



Supplement of

Patterns and drivers of water quality changes associated with dams in the Tropical Andes

R. Scott Winton et al.

Correspondence to: R. Scott Winton (scott.winton@gmail.com)

The copyright of individual parts of the supplement might differ from the article licence.

Table S1. Summary of approximate maximum differences in temperature and dissolved oxygen (DO) between surface and deep waters as well as minimum deep water DO concentration for Colombia hydropower reservoirs. Qualitative stratification classification is based on these metrics with “strong” referring to sites with minimum DO ≤ 1.5. Reservoirs bounded by boxes share a direct hydrologic connection. Data source: Autoridad Nacional de Licensias Ambientales

Reservoir	Stratification			
	ΔT °C	ΔDO mg/L	DO min.	class
La Miel	5	7	1.5	Strong
Chivor	3.5	2	5.5	Weak
Porce III	4	10	0.1	Strong
Porce II	3	7.5	0.1	Strong
Miraflores	unknown	unknown	unknown	unknown
Quimbo	6	7.5	0.5	Strong
Betania	5.5	4	1	Strong
Urra	5.5	7.5	0.1	Strong
Guavio	unknown	unknown	unknown	unknown
Punchina	3	1	6.5	Weak
Guatape	2.5	7	0.5	Strong
Playas	3	2	5.5	Weak
San Lorenzo	5	2.5	4.5	Weak
Prado	unknown	unknown	unknown	unknown
Sogamoso	unknown	unknown	unknown	unknown
Calima	unknown	unknown	unknown	unknown
Rio Grande	2	7	0.5	Strong
El Paraiso	unknown	unknown	unknown	unknown
Anchicaya	unknown	unknown	unknown	unknown
Ituango	unknown	unknown	unknown	unknown
Salvajina	unknown	unknown	unknown	unknown
San Francisco	unknown	unknown	unknown	unknown

Table S2. Summary of inflowing water conditions, reservoir characteristics, management modes and downstream conditions for eight selected Colombian hydropower projects. Colors highlight potentially problematic cells based on expert assessment with red indicating likely problems, yellow possible problems and green indicating no concerns.

Project	data n months	Inflows			Reservoir						Management			Downstream	
		max. BOD mg L ⁻¹	min. DO mg L ⁻¹	TSS range mg L ⁻¹	res. Time days	depth m	Fr. # -	Elev. masl	deep DO mg L ⁻¹	withdrawal	oxygenation	sediments	DO mg L ⁻¹	TSS range mg L ⁻¹	
Urra	12	6.7	hypoxic (4-5)	<10.6 - 680	29	73	0.153	131	anoxic (<1)	fixed depth	none		<3	no data	
Quimbo	6	<3	oxic (>6)	26 - 660	56	151	0.111	577	anoxic (<1)	fixed depth	liquid O ₂		<4	<5 - 54	
Sogamoso	2-3	4.3	oxic (>5)	17 - 1608	565	190	0.004	181	anoxic (<1)	fixed depth	in review		<3	2.5 - 198	
Prado	1-3	13	oxic (>7)	20	97	90	0.044	361	no data	fixed depth	in review		<4	13.5 - 28	
Porce III	12	4.3	hypoxic (<4)	<5 - 32	8	151	0.170	680	anoxic (<1)	fixed depth	none		<5	8.9 - 62	
La Miel	6	<2	oxic (>7)	<6 - 149	78	188	0.022	327	hypoxic (<2)	fixed depth	integrated		>6.5	<6 - 19	
Chivor	3	9	oxic (>6)	37 - 265	255	237	0.006	1200	oxic (>5)	multi-intake	none		>7	<10	
Guavio	2-3	<3	oxic (>6)	22 - 419	168	243	0.006	1949	no data	fixed depth	none		>7	324 - 554	

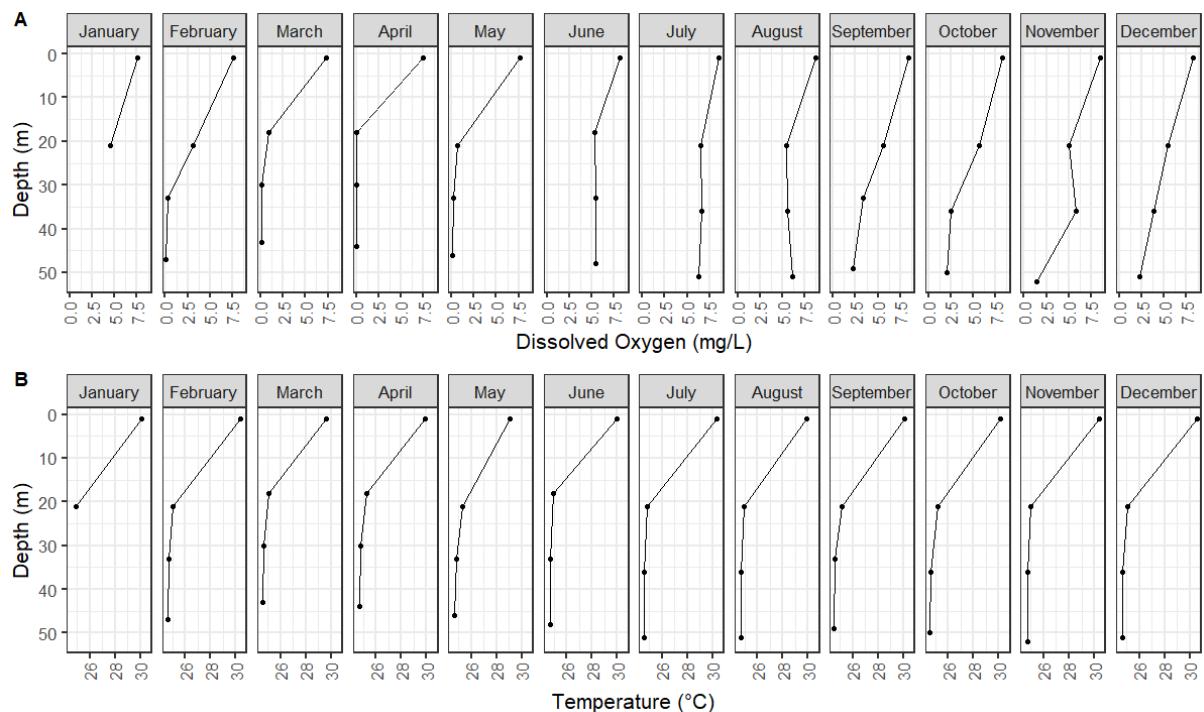


Fig. S1. Depth profiles of dissolved oxygen and temperature for Urra Reservoir in Cordoba, Colombia measured in 2018. Data source: Autoridad Nacional de Licensias Ambientales

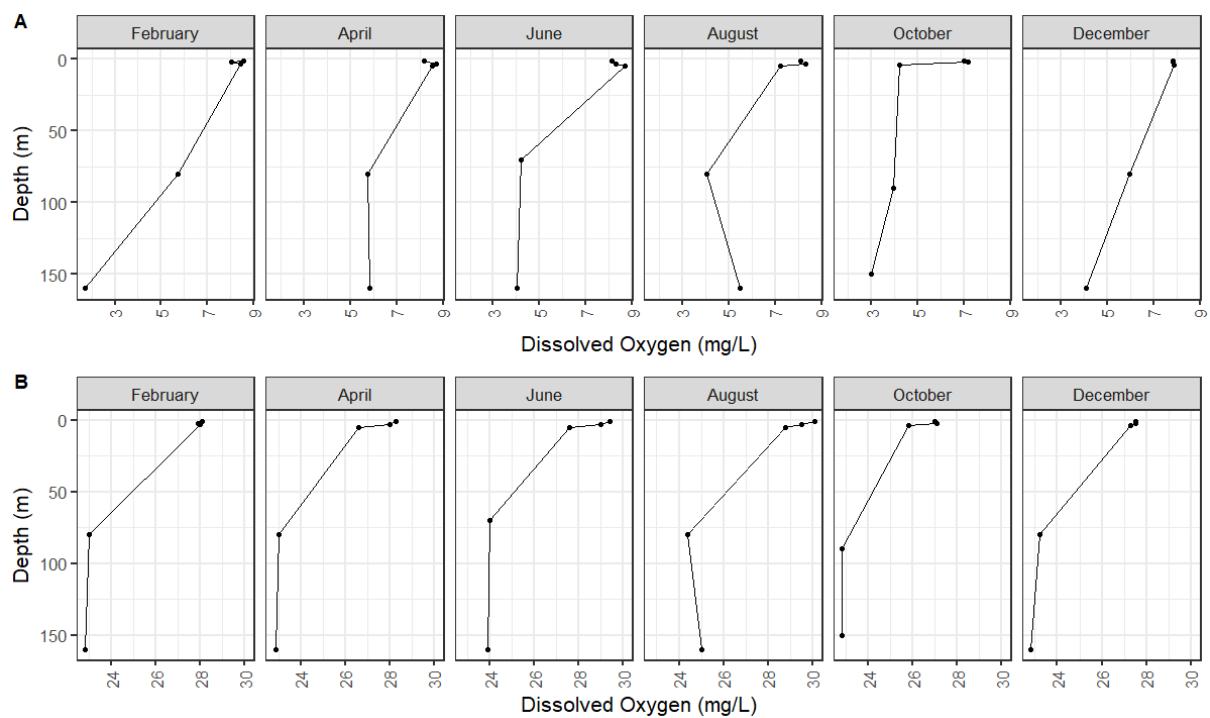


Fig. S2. Depth profiles of dissolved oxygen and temperature for La Miel Reservoir in Caldas, Colombia measured in 2018. Data source: Autoridad Nacional de Licensias Ambientales

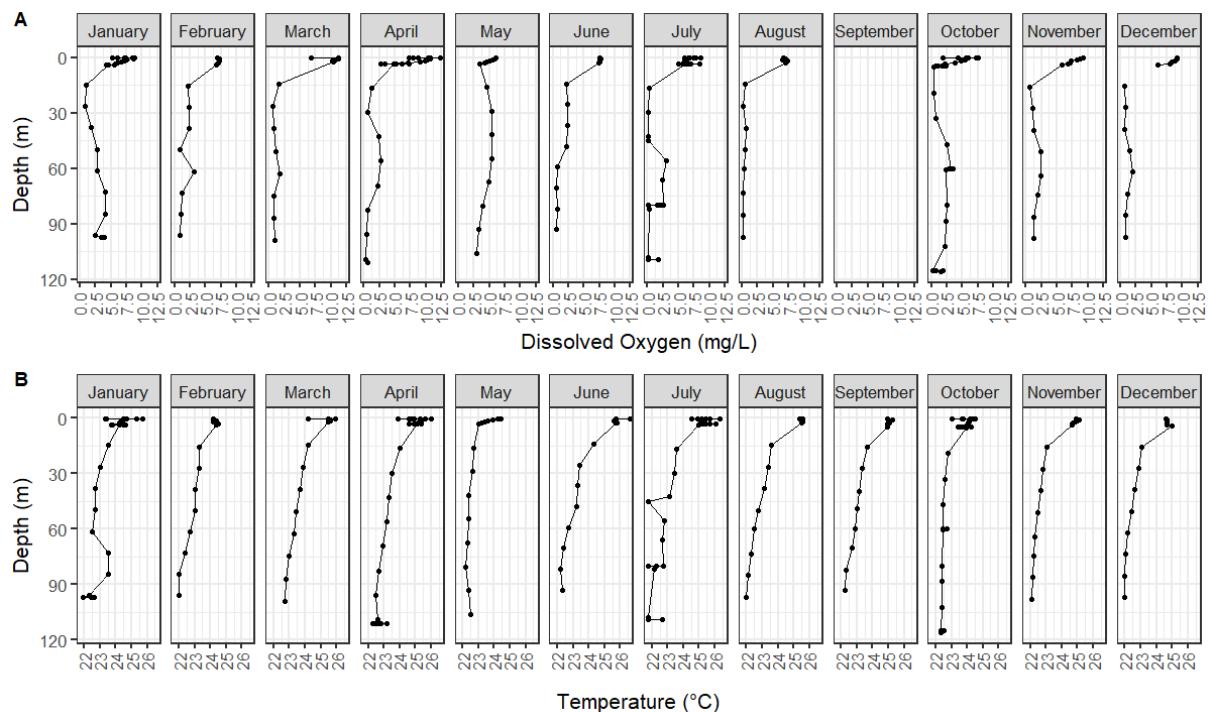


Fig. S3. Depth profiles of dissolved oxygen and temperature for Porce III Reservoir in Antioquia, Colombia measured in 2018. Data source: Autoridad Nacional de Licencias Ambientales