



The thermal future of a regulated river: spatiotemporal dynamics of stream temperature under climate change in a peri-Alpine catchment

David Dorthe^{1,2}, Michael Pfister¹, and Stuart Nicholas Lane²

¹School of Engineering and Architecture of Fribourg, HES-SO University of Applied Sciences and Arts Western Switzerland, Fribourg, 1700, Switzerland

²Faculty of Geosciences and Environment, Institute of Earth Surface Dynamics, University of Lausanne, Lausanne, 1015, Switzerland

Correspondence: David Dorthe (david.dorthe@hefr.ch)

Received: 10 February 2025 – Discussion started: 4 March 2025

Revised: 2 October 2025 – Accepted: 9 October 2025 – Published: 17 November 2025

Abstract. Climate change is driving an increase in river water temperatures, presenting challenges for aquatic ecosystems and water management. Many rivers are regulated by hydropower production, which alters their thermal regimes, causes short-term temperature fluctuations (thermopeaking) linked to flow variations, and whose future evolution under climate change remains uncertain. This study examines how the thermal regime of a peri-alpine regulated river could evolve under future climate scenarios using a high-resolution process-based model. Projections indicate that mean annual water temperatures may rise by up to 4 °C by 2080–2090 under RCP 8.5, with daily mean temperatures exceeding 15 °C for nearly half the year, raising ecological concerns. While these trends are comparable to those in unregulated rivers, river regulation introduces distinct spatial and seasonal patterns in climate change impacts. The reach with only a residual flow is particularly susceptible to warming due to limited discharge, whereas deep reservoir releases help moderate climate change impacts downstream of the dam and the hydropower plant. Furthermore, unlike in unregulated rivers where the strongest warming typically occurs in summer, climate change impacts in this regulated system are projected to be most pronounced in autumn and winter due to the thermal inertia of the reservoir. Indicators used to assess thermopeaking impacts remain largely unaffected by climate change, provided that hydropower operation remains unchanged. This study highlights that while regulation can exacerbate vulnerabilities to climate change, it also mitigates

climate change impacts by influencing river temperature dynamics beyond thermopeaking alone.

1 Introduction

The ongoing rise in river water temperatures driven by climate change presents a challenge for aquatic biodiversity and water resource management (Benateau et al., 2019; Johnson et al., 2024). Long-term river temperature records have already revealed warming trends, with an average increase of +0.3 to +0.4 °C per decade reported for Western Europe (Michel et al., 2020; Seyedhashemi et al., 2022). In general, river temperatures are warming at lower rates than air temperatures, with a typical water-to-air temperature increase ratio close to 0.8 (Null et al., 2013; Leach and Moore, 2019; Michel et al., 2022). However, in regulated rivers notably with significant flow abstraction, reduced discharge in certain contexts can amplify river sensitivity to temperature changes (Booker and Whitehead, 2022; White et al., 2023), causing water temperatures to rise more rapidly than air temperatures (Seyedhashemi et al., 2022).

Regulation that leads to reduced instream discharge tends to increase river sensitivity to solar radiation (Olden and Naiman, 2010), so accelerating warming. The presence of major reservoirs, however, may mitigate such effects by buffering against droughts and lowering water temperatures during summer periods. This happens where there is strati-

fication and water is released from the hypolimnion (Kędra and Wiejaczka, 2018; Seyedhashemi et al., 2021; Bruckerohoff et al., 2022).

Lakes themselves are influenced by climate change, with rising temperatures (Dokulil, 2014; O'Reilly et al., 2015; Woolway et al., 2020) and shifts in mixing regimes (Woolway and Merchant, 2019; Råman Vinnå et al., 2021), which subsequently impact the temperature of water released downstream. These dynamics are further compounded by water withdrawals, whether for maintaining minimum flow releases or for hydropower production, which create feedback effects that additionally influence lake temperatures (Nürnberg, 2007; Dorthé et al., 2025b). In the context of hydropower production, rapid turbine water releases can cause abrupt and significant sub-daily temperature fluctuations, a phenomenon known as thermopeaking (Zolezzi et al., 2011). Thus, the evolution of thermal regimes in regulated rivers under climate change reflects complex, interacting processes with highly variable impacts.

Numerous studies have simulated future river temperature trends using various modelling approaches (Van Vliet et al., 2013; Ficklin et al., 2014; Santiago et al., 2017; Jackson et al., 2018; Michel et al., 2022; Fuso et al., 2023; Čerkasova et al., 2024). The latter generally indicate mean temperature increases of +1.0 to +4.0 °C by the end of the century. However, several studies have highlighted the potential for higher increases during summer, with mean temperature rises reaching +4.0 to +6.5 °C under high-impact scenarios (Ficklin et al., 2014; Michel et al., 2022; Fuso et al., 2023).

To simulate future river temperatures, studies rely on stream temperature models calibrated under current conditions and driven by data from either global climate scenarios (e.g., Byers et al., 2022) or regional scenarios (e.g., CH2018, 2018). These models are typically either statistical (Webb et al., 2008; Watts et al., 2015; Piccolroaz et al., 2016; Jackson et al., 2018; Rehana, 2019), or process-based (Null et al., 2013; Ficklin et al., 2014; Michel et al., 2022).

Statistical models are widely used due to their relatively low data requirements (Benyahya et al., 2007). However, the statistical relationships supporting these models are established under specific conditions and may not provide robust predictions for future climates (Leach and Moore, 2019) in particular with regulated rivers, where these relationships are less effective at capturing mean and extreme temperature (Erickson and Stefan, 2000; Arismendi et al., 2014; Snyder et al., 2015). This limitation can lead to an underestimation of future stream temperature increases (Leach and Moore, 2019). In contrast, process-based models simulate water temperature dynamics by physically describing the thermal fluxes that govern the river's heat balance. These models require extensive input data, particularly climatic variables (Benyahya et al., 2007), but they allow for the explicit consideration of how changes in specific inputs affect water temperature evolution. Moreover, process-based models enable the detailed description of spatial and temporal

thermal patterns (Dugdale et al., 2017). To achieve this, such models must accurately replicate the key processes governing spatiotemporal thermal variations (Dorthé et al., 2025a), such as temperature mitigation by riparian shading (Dugdale et al., 2018; Seyedhashemi et al., 2022) and thermal inertia induced by hyporheic exchanges with the sediment layer (Arrigoni et al., 2008).

The spatiotemporal thermal patterns are crucial for understanding the impacts of climate change on regulated rivers, as they spatially shape species distribution and migration patterns (Daufresne et al., 2004; Buisson et al., 2008; Svenning et al., 2016; Bilous and Dunmall, 2020) and influence temporally species phenology (Gillet and Quélin, 2006; Greig et al., 2007; Jonsson and Jonsson, 2009; Lugowska and Witeska, 2018). Furthermore, temporal variations are expected to exert a greater influence on species than changes in mean temperature alone (Vasseur et al., 2014).

Integrating climate scenario data into spatiotemporal process-based models presents several challenges. Climate scenarios often provide time series at coarse temporal resolutions (e.g., annual, monthly, or daily), which may be insufficient for analysing impacts at sub-daily scales (Michel et al., 2021a). To address this limitation, temporal downscaling methods have been proposed. Among these, the delta-change approach (Anandhi et al., 2011) modifies high-resolution historical time series to reflect future climate conditions by applying a delta (difference or ratio) calculated from comparisons between historical data and climate scenario outputs for a reference period. This method preserves fine-scale temporal variability while integrating projected seasonal and annual trends.

Studies addressing the evolution of thermal regimes in regulated rivers remain rare due to the complexity of interacting processes and extensive data needs for adequately modelling those processes. Examples often rely on coarse temporal resolutions and statistical approaches (Cole et al., 2014; Fuso et al., 2023). Developing a deeper understanding of the long-term effects of climate change on the thermal regimes of regulated rivers is crucial for guiding decision-making and optimizing the operation of these structures under changing environmental conditions.

Given this review, the aim of this study is twofold: (1) to assess climate change-induced temperature variations along a regulated river and (2) to evaluate the evolution of thermal alterations caused by hydropowering. A process-based thermal model previously calibrated at the reach scale and at high temporal resolution (Dorthé et al., 2025a) serves as the basis. The model is driven by climate scenario data that have been temporally downscaled to match the spatial and temporal scales of the model.

2 Data and Methods

2.1 Study site

The Sarine River, originating in the Swiss Alps, drains a catchment area of 1892 km², with elevations ranging from 2540 m a.s.l. (meter above sea level) in the Alps to 461 m a.s.l. at its confluence with the Aare River. It is regulated by five dams associated with hydropower generation. This study focuses on a 22 km long reach between the Rossens Dam (679 m a.s.l.), impounding Lake Gruyère, and the Maigrange Dam (562 m a.s.l., Fig. 1). The studied reach is divided into two distinct sections: the residual flow reach (river km 0 to 13.5), characterized by a residual flow released from the Rossens Dam (base discharge of 3.5 m³ s⁻¹ in summer and 2.5 m³ s⁻¹ in winter), and the hydropeaking reach (river km 13.5 to 22), affected by hydropower releases. The Hauterive hydropower plant, (HPP) located 13.5 km downstream of Rossens Dam, receives water from the dam through a 6 km long tunnel with a maximum turbine capacity of 75 m³ s⁻¹, generating hydropeaking-induced discharge variations downstream of the power plant. Two unregulated tributaries, the Gérine and the Glâne, contribute average discharges of 1.7 and 4.2 m³ s⁻¹, respectively, joining the Sarine 15 and 16 km downstream of the Rossens Dam. At the end of the investigated reach, the Sarine has finally a mean annual discharge of 41.6 m³ s⁻¹.

The Gérine follows a nival-pluvial pre-Alpine hydrological regime, while the Glâne exhibits a pluvial regime. Upstream of Lake Gruyère, approximately 20 km from the study reach and over 200 m higher, the Sarine naturally follows a nival Alpine regime shaped by snowmelt and precipitation. Within the study reach, the river is highly regulated, and its hydrological regime is controlled by hydropower operations. The presence of Lake Gruyère, which acts as a large reservoir, effectively decouples the hydrology of the river within the study reach from that of its upstream catchment. As a result, hydrological variability due to snowmelt or precipitation upstream is strongly buffered by the reservoir, and discharge variations within the study reach are driven by hydropower management rather than direct climatic forcing. The contribution of natural flow variability is limited to the unregulated tributaries. Direct runoff into the study reach, whether from precipitation or snowmelt, is negligible and represents less than 1 % of the annual flow volume at the downstream end of the reach.

Meteorological data from Fribourg/Grangeneuve (MeteoSwiss) report an average annual air temperature of 9.1 °C, ranging from 0.4 °C in January to 18.5 °C in July, with an annual precipitation average of 962 mm (1991–2020). Snowfall represents a minor component of annual precipitation, with an average annual snow water equivalent of less than 50 mm, accounting for about 5 % of total precipitation. While snow accumulation and melt contribute to hydrological conditions in the upstream catchment, the presence of Lake Gruyère

largely buffers their influence on downstream flow and temperature dynamics within the study reach.

Lake Gruyère has a monomictic mixing regime, with summer stratification and winter mixing caused by surface cooling. Surface temperatures respond rapidly to atmospheric variations, while temperatures near the tunnel intake, located 40 m below the surface, range between 3 and 15 °C annually. Water temperatures within the tunnel exhibit minimal variation, in contrast to the downstream river, where natural conditions and hydropeaking operations create significant thermal fluctuations.

2.2 Stream temperature model

The model used in this study is a one-dimensional process-based stream temperature model based upon the HEC-RAS (HEC, 2022) framework and tested and calibrated using continuously recording temperature sensors (Dorthé et al., 2025a). It simulates stream temperature along the 22 km regulated river reach, with high spatial (436 computational segments, each spanning 50 m of the river) and temporal resolution (10 min intervals) and including key physical processes. The heat budget in the model is expressed as follows (Brunner, 2016):

$$\text{Heat}_{\text{Source/Sink}} = \frac{q_{\text{net}}}{\rho_w c_{\text{pw}}} \frac{A_s}{V}, \quad (1)$$

where q_{net} is the net heat flux (W m⁻²), ρ_w the density of water (kg m⁻³), c_{pw} the specific heat of water at constant pressure (J kg⁻¹ °C⁻¹), A_s and V the area (m²) and volume (m³) of a computational segment. The net heat flux is the budget of the following terms:

$$q_{\text{net}} = q_{\text{sw}} + q_{\text{atm}} - q_{\text{b}} + q_{\text{h}} - q_{\text{l}} + q_{\text{sed}}, \quad (2)$$

where q_{sw} is the net shortwave solar radiation (W m⁻²), q_{atm} the atmospheric (downwelling) longwave radiation (W m⁻²), q_{b} the back (upwelling) longwave radiation, q_{h} the sensible heat (W m⁻²), q_{l} the latent heat (W m⁻²), q_{sed} the sediment-water heat flux (W m⁻²).

Incident solar radiation was provided from the meteorological station and corrected within the model using time-specific (hourly and daily) shading factors (0 %–70 %) representing the combined effects of topography and vegetation. These factors assume fully opaque vegetation and do not account for potential light transmission through the canopy. The longwave radiation, sensible heat and latent heat fluxes were computed from meteorological inputs (Appendix A). The sediment-water heat flux q_{sed} was computed using a simplified conductive heat flux approach, based on the temperature gradient between the sediment and the water column, and calibrated properties of the sediment layer (Dorthé et al., 2025a).

The model's application requires a wide range of input data, including meteorological data, hydrological data for

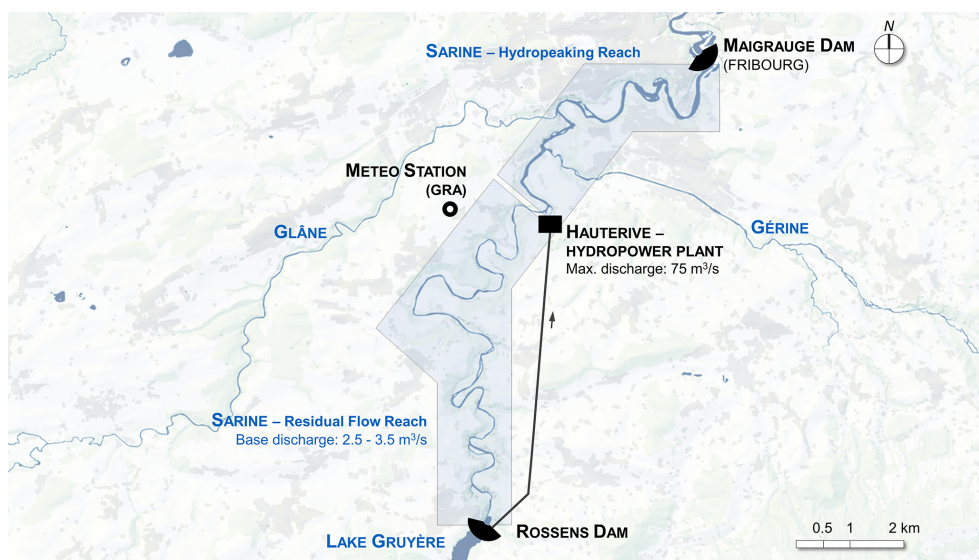


Figure 1. Studied reach of the Sarine with main hydraulic structures (background: © swisstopo data).

discharges from hydropower installations and natural tributaries, topographic and vegetation data to account for shading effects, and water temperature data serving as boundary conditions for inflows from both hydropower operations and tributaries. Precipitation inputs were not considered in the model, as direct runoff into the reach is negligible both in terms of flow volume and thermal contribution. A full description of the model and its calibration and testing is available in open access (Dorthé et al., 2025a).

2.3 Data for current climate simulations

2.3.1 Meteorological data

Meteorological data reflecting current climate conditions were provided by the MeteoSwiss station at Fribourg/Grangeneuve (GRA, Fig. 1). The dataset includes air temperature, incoming solar radiation, relative humidity, and atmospheric pressure, each recorded at a 10 min temporal resolution.

2.3.2 Hydrological data

The residual flow released from Rossens Dam is maintained at $2.5 \text{ m}^3 \text{ s}^{-1}$, increasing to $3.5 \text{ m}^3 \text{ s}^{-1}$ between May and September. Discharges from the HPP were recorded at a 15 min temporal resolution and provided by the hydropower operator. Discharge data for the two main tributaries were obtained from the platform <https://fribourg.swissrivers.ch> (last access: 1 November 2025), with a 1 h temporal resolution.

2.3.3 Water temperature data

Water temperatures entering the river from hydropower installations (at Rossens Dam or via the HPP) were determined

using measured lake temperatures provided by the operator. These temperatures were measured at three depths (620, 640, and 660 m a.s.l.) with a 6 h temporal resolution. Water is withdrawn at fixed depths: 620 m a.s.l. for the residual flow and 637.5 m a.s.l. for the hydropower tunnel. Temperatures of the two main tributaries (Gérine and Glâne) were recorded close to their confluence with the Sarine over a 7-year period, at a 10 min temporal resolution. Similarly, Sarine River temperatures were recorded at the same temporal resolution and over the same period. However, these data were not used as model inputs but exclusively for model calibration purposes in a previous study (Dorthé et al., 2025a).

2.4 Climate change scenarios

The model aims to simulate future water temperature under climate change based on projected time series of parameters driving river temperature dynamics. For this purpose, climate change scenarios from the CH2018 dataset were used (CH2018, 2018). This dataset provides high-resolution climate projections for Switzerland, derived from regional climate model (RCM) simulations forced by global climate models (GCM) under different emission scenarios corresponding to representative concentration pathways (RCPs). The projections cover the period 1981–2099 and are available at a daily time scale for various meteorological stations across Switzerland and for multiple climate models. Additionally, hydrological projections under climate change are provided by the Hydro-CH2018 dataset (Muelchi et al., 2022), developed from CH2018 climate scenarios and offering daily runoff simulations for 93 catchments over the same period, based on the same climate models. Both CH2018 and Hydro-CH2018 are based on the Coupled Model Inter-comparison Project Phase 5 (CMIP5), as no equivalent high-

resolution datasets for Switzerland derived from the more recent CMIP6 are currently available.

Two main challenges arise with both climate and hydrological data. First, the spatial coverage of the datasets does not fully align with our needs. Specifically, future solar radiation data are not available for the GRA meteorological station, and the two tributaries, the Glâne and the Gérine, fall outside the 93 catchments represented in Hydro-CH2018. Second, the time series are given at a daily resolution, yet for thermopeaking analysis, sub-hourly resolution is required to capture finer-scale dynamics. The methods used to address these challenges are detailed below.

2.4.1 Meteorological data

The CH2018 dataset provides daily time series for 68 climate scenarios, covering air temperature and relative humidity for GRA. For direct solar radiation, however, there are no results for this station, but data are available from nearby stations. Hourly radiation measurements from 2017–2023 for these neighboring stations were compared with GRA data for the same period. Among them, the Payerne station (PAY) showed a high similarity with GRA, with a coefficient of determination (R^2) > 0.96 and a regression slope of 0.99. It was thus assumed that solar radiation trends at GRA will mirror those at PAY.

To increase the temporal resolution of future daily meteorological series, a delta-change downscaling method was applied. This technique involves comparing the trends between reference time series and climate scenario series, both at daily resolution. The resulting difference (delta factor), either additive or multiplicative, is then applied to historical data for which measurements are available at the required finer temporal resolution. The delta values represent the climate change effect, while the observed data provide the baseline conditions with the necessary sub-daily variability (Anandhi et al., 2011). The delta adjustment reflects seasonal differences without introducing excessive variability into the initial data (Bosshard et al., 2011; Michel et al., 2021a). Accordingly, delta values are calculated on smoothed time series that capture low-frequency seasonal trends while minimizing noise from natural variability (Fig. 2). For accurate representation of seasonal amplitudes and averages, data smoothing was applied using a harmonic function with n terms. The choice of the number of terms, n , represented a balance between achieving a better representation of seasonal averages and avoiding artificially increasing variability. Figure 3 illustrates the mean absolute seasonal error between the historical series and the smoothed series using n terms. The results show a clear reduction in error when increasing from 5 to 7 terms, followed by a modest decrease beyond. Here, n was set to 7. This decision reflects previous studies that applied this approach in similar contexts (Michel et al., 2021a).

Future temperature series were derived using an additive delta factor, while relative humidity and solar radiation values are calculated using a multiplicative delta factor, with relative humidity values subsequently filtered to prevent exceeding 100 %. Atmospheric pressure time series were assumed to remain unchanged under future climate scenarios.

2.4.2 Hydrological data

Inflows to the river reach were categorized as either regulated or natural. Regulated flows include the base discharge released from the dam and the turbinized discharged at the HPP (Fig. 1). For future climate scenarios, these regulated flows were assumed to remain unchanged, as they are determined by hydropower operations rather than by climatic conditions. This assumption is based on the fact that total annual precipitation is not expected to change significantly, and that the large storage capacity of Lake Gruyère (over 20 % of the river's total annual volume) provides effective buffering. Although hydropower production will likely evolve in the future, such changes will primarily reflect complex socio-economic developments rather than direct climatic forcing. This assumption enables the model to isolate the direct effects of climate change, excluding potential impacts from altered hydropower management.

Unregulated tributary inflows respond directly to climatic conditions, and their evolution under climate change must be accounted for as they influence the flow regime of the study reach. Since the Hydro-CH2018 dataset does not provide projections for these tributaries, analogue catchments within the dataset were identified to compute delta change factors. For each analogue catchment, the climate change signal was derived by comparing its historical daily discharge series with its projected discharge series under climate scenarios, resulting in a time-varying multiplicative delta factor (Delta Q in Fig. 4). This signal was then applied to the historical discharge measurements of the Glâne and Gérine. As these factors are multiplicative, they were directly applied to the tributaries without the need for scaling. Several candidate analogue catchments were tested, and the climate change signal (Delta Q) was found to be very similar across these candidates for a given climate scenario (Fig. 4, bottom). The variability introduced by the choice of analogue catchment was substantially smaller than across climate models (Fig. 4, top), supporting the robustness of this approach and the assumption that rivers with comparable regimes will respond similarly. The most similar catchments in terms of regime, size, elevation, and proximity were selected for each tributary: the Sense at Thörishaus (ID2179) for the Gérine and the Mentue at Yvonand (ID2369) for the Glâne.

2.4.3 Water temperature

The boundary conditions for water temperature entering the system, whether from the lake or tributaries, must be adjusted

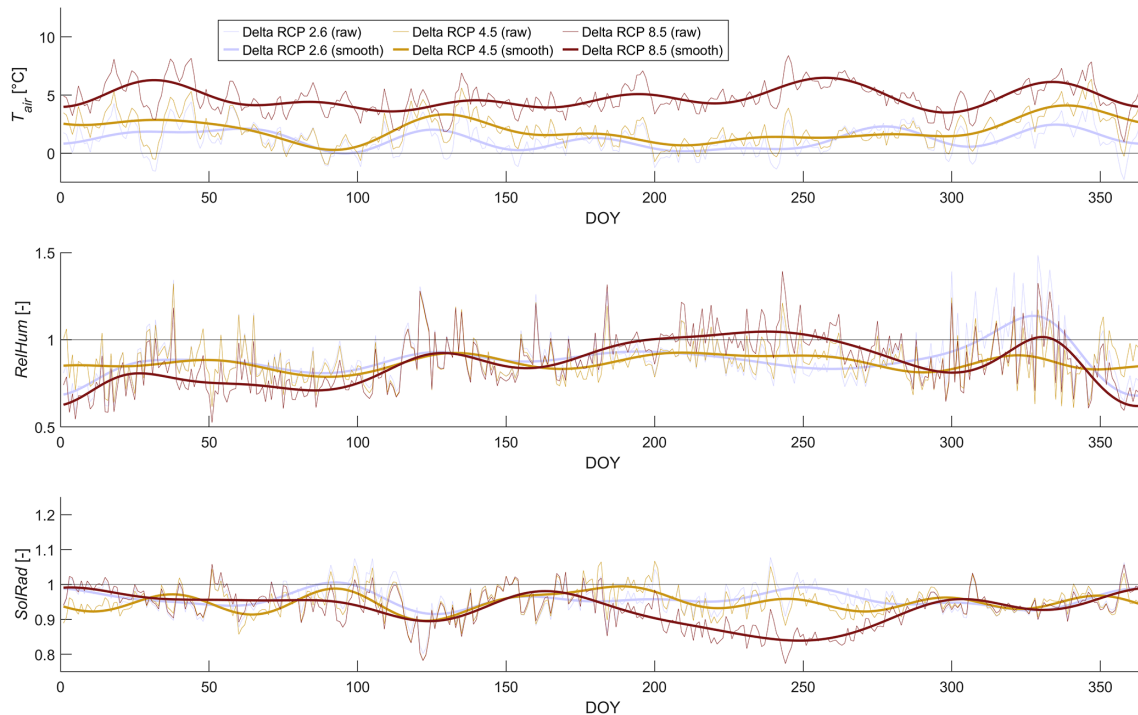


Figure 2. Delta computed for 3 different RCPs (time-horizon 2080–2090) based on raw and smoothed timeseries for air temperature (top), relative humidity (middle) and solar radiation (bottom) versus day of year (DOY).

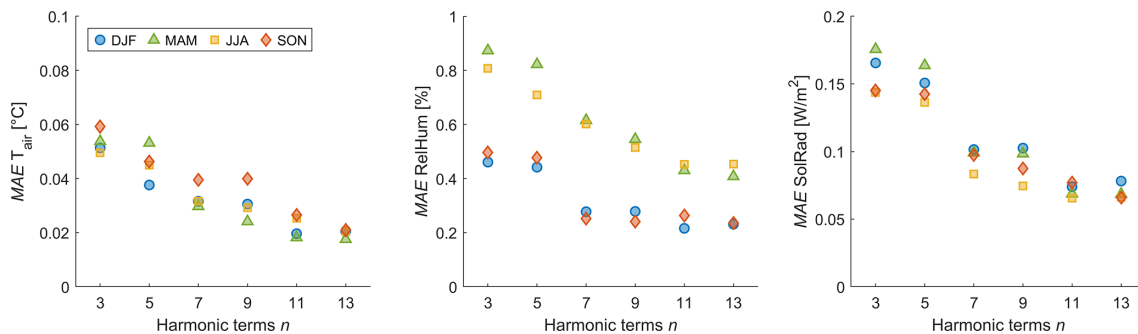


Figure 3. Seasonal mean absolute error (MAE) between historical timeseries and timeseries smoothed with n harmonic terms for air temperature (left), relative humidity (middle) and solar radiation (right).

to reflect anticipated future changes. Lake water temperatures exhibit distinct dynamics as a function of depth and thermal stratification, which differ from typical river temperature patterns. However, reservoirs diverge from natural lakes, which often have longer residence times and more stable water levels. As a result, direct comparisons to other systems with available future time series data are limited, and the literature on the effects of climate change on regulated lake temperatures remains sparse (Fuso et al., 2023). Statistical models provide a practical solution for addressing data limitations or the absence of boundary condition availability in process-based models (Dugdale et al., 2017), and air temperature is frequently identified as a key driver of lake water

temperatures (Michel et al., 2021b) that can be used in modelling approaches (O'Reilly et al., 2015; Fuso et al., 2023).

To simulate lake temperature evolution, a statistical relationship was developed to estimate water temperature at various depths based on past air temperature. For each depth, the relationship is defined by three parameters: the number of past days (N) over which a moving average of air temperature is calculated, and two calibration parameters – A , which scales the moving average, and B , which offsets it. These parameters are specific to each depth (subscript d) and allow the computation of lake temperature at a given time (t) based on prior air temperature records:

$$T_{w_{lake,d}}(t) = A_d \cdot \overline{T_{air[t-N_d:t]}} + B_d, \quad (3)$$

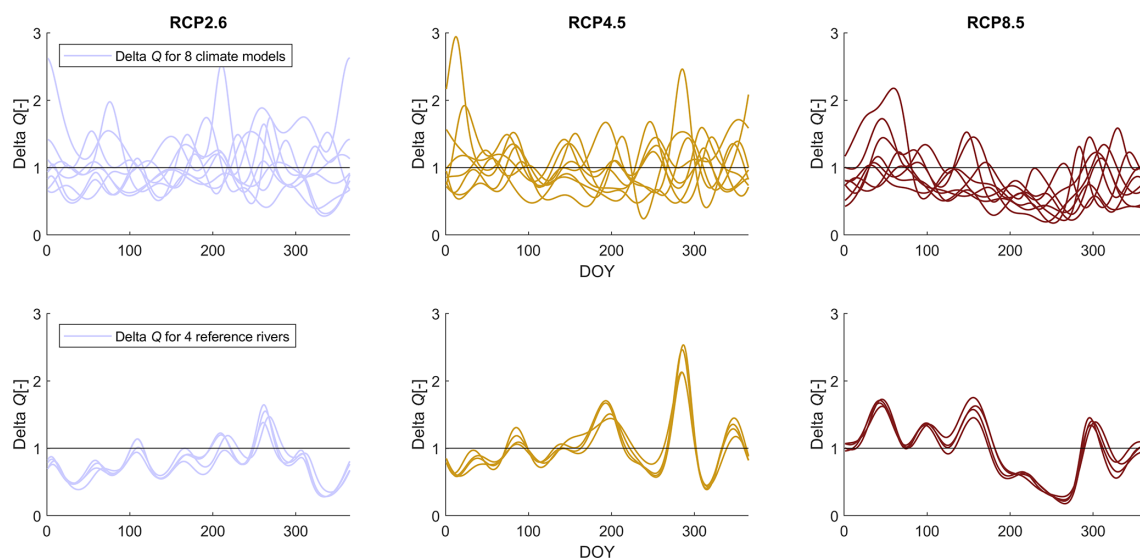


Figure 4. Variability of the smoothed discharge-delta computed based on different climate models but on the same reference river (top) and based on 4 different reference rivers but with the same climate model (bottom, with climate model No. 2 from Table 1).

For the period 2017–2022, this model characterizes lake temperatures at different depths with a mean absolute error of 0.7 to 1.1 °C (Fig. 5, per lake level 620, 640 and 660 m a.s.l.). For future climate scenarios, it was assumed that the statistical relationships derived under current conditions remain valid and can be used to project lake temperature based on future air temperature time series. However, these relationships could become less accurate over time, as lake dynamics and thermal stratification may gradually evolve under climate change.

The daily mean temperature of the tributaries shows a strong correlation with the daily mean air temperature (Fig. 6: $R^2 = 0.89$ for the Gérine and 0.92 for the Glâne over the period 2017–2022). Using the previously calculated delta change factors for air temperature, these could be applied to the historical temperature series of the tributaries by scaling them with the correlation coefficients between air and water temperature, which are 0.72 for the Gérine and 0.70 for the Glâne. This approach maintained the intrinsic variability of the historical series in the generated future projections.

2.4.4 Environmental data

The temperature model accounts for various processes influencing water temperature, including shading effects and thermal exchanges with the sediment layer. Shading from topography and vegetation is expressed as a time-specific correction factor (ratio between 0 and 1, varying through day and year) applied to the measured radiation, estimated on the basis of a digital surface model (Dorthé et al., 2025a). This shading correction factor was assumed to remain unchanged under climate change.

The physical properties (density, thermal conductivity and diffusivity) of the sediment layer are considered unaffected by future climate conditions. However, the sediment–water heat flux is also driven by a boundary condition representing the temperature at the bottom of the sediment layer. Under the current climate, this boundary temperature was computed based on a moving average of the measured air temperature time-series (Dorthé et al., 2025a). To adjust this condition for future climate scenarios, the same approach was applied, using a moving average of the projected air temperature time series to compute this boundary temperature for the sediment layer.

2.5 Approach to simulation

The downscaling of the projected meteorological time series was conducted by comparing series from 2012–2022 with climate scenarios for the periods 2055–2065 and 2080–2090, as used in similar studies in Switzerland. The calculated daily-scale delta change factors were applied to 10 min resolution time series from three reference years: 2019 (mean annual air temperature at GRA: 9.8 °C; total annual precipitation: 912 mm), 2020 (10.4 °C; 958 mm), and 2021 (9.0 °C; 1073 mm). These three years were selected because high-resolution data were available for all relevant drivers (meteorological data, tributary inflows and temperatures, hydropower releases, lake temperature). This enabled the application of the climate change delta values to consistent sub-daily inputs. Moreover, the selected years represent contrasting hydro-meteorological conditions, helping to capture interannual variability. This approach preserves the intra-daily and inter-annual variability of these reference series to future climate time series.

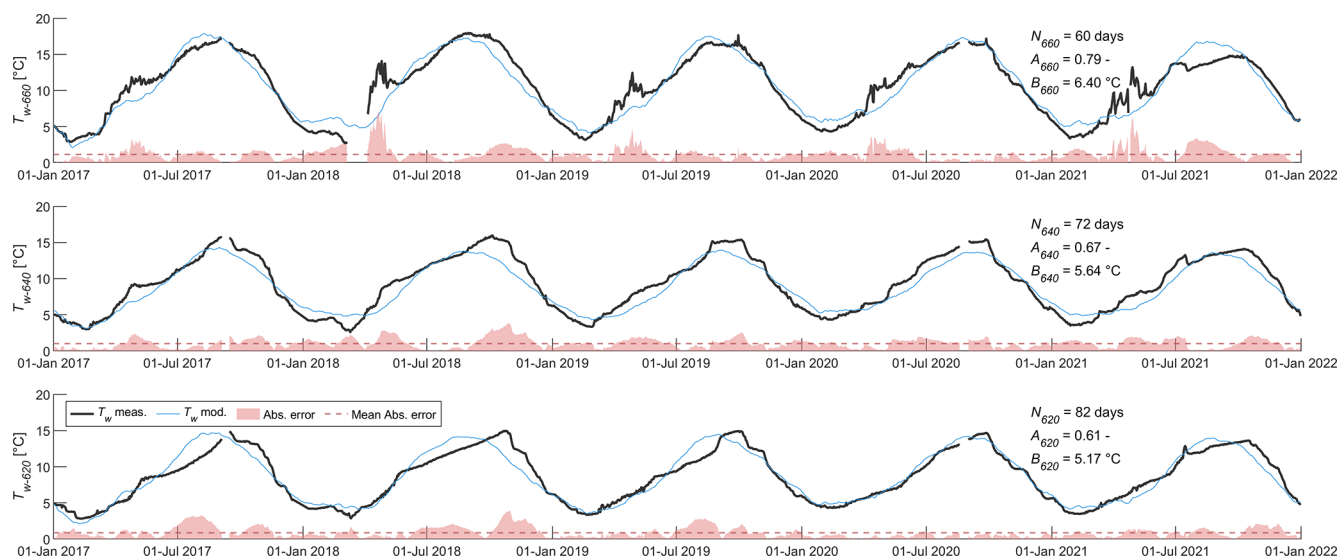


Figure 5. Measured (T_w meas.) and modelled (T_w mod.) lake temperatures at various depths, along with the absolute error and mean absolute error between the two series. The tunnel intake level is 2.5 m below T_{w-64} (middle graph), while the dotation intake level corresponds to T_{w-620} (bottom graph). N_d , A_d , and B_d are the parameters of the statistical relationship for each depth d (Eq. 3).

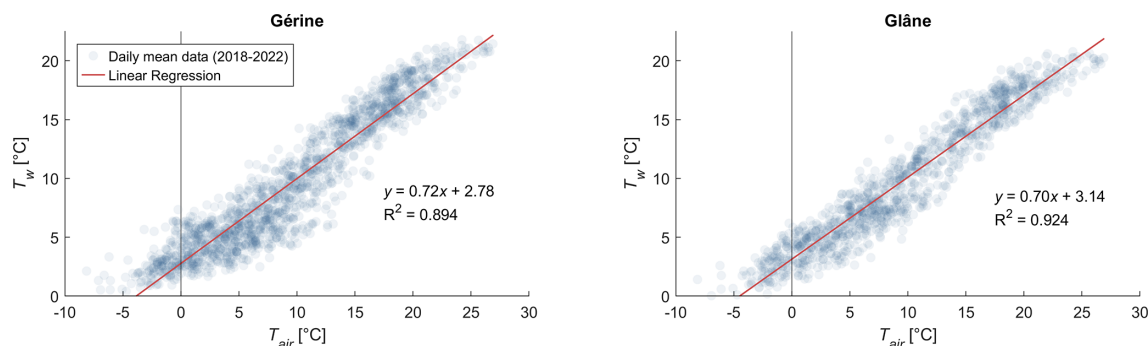


Figure 6. Correlation between daily mean air temperature and daily mean stream temperature for both tributaries (G rine, left and Gl ne, right).

The CH2018 dataset includes scenarios derived from a set of different climate models. Because thermal river regimes are influenced by multiple interacting factors and vary across both spatial and temporal scales, their response to climate change is complex. This complexity makes it difficult to select individual climate models that would clearly represent average or extreme outcomes for the different thermal indicators (see Sect. 2.6). Therefore, multiple climate models were used to encompass a broad range of probable future outcomes.

These models provide predictions that vary based on three emission scenarios relating to representative concentration pathways (RCPs): RCP 2.6 (low emissions), RCP 4.5 (moderate emissions), and RCP 8.5 (high emissions). Using different climate models across time-horizons or RCPs could introduce biases, so priority was given to models that pro-

vide scenarios for all three RCPs. The eight models selected are listed in Table 1.

Future time series were generated based on three reference years (2019, 2020, 2021), across eight climate models, with three RCPs, and for two future periods (2055–2065 and 2080–2090). This produced 144 unique scenarios, each simulated for one year. Simulation parallelization and automation were managed using the HEC-RAS controller via MATLAB (Goodell, 2014; Leon and Goodell, 2016).

2.6 Temperature indicators

To quantify climate change impacts, three groups of indicators were chosen:

1. To describe the annual temperature distribution, the mean annual water temperature ($T_{w,mean}$) was calculated and high and low temperatures, excluding ex-

Table 1. List of climate models from CH2018 used in the study.

No.	GCM	RCM	Init	Model horizontal resolution
1	ICHEC-EC-EARTH	DMI-HIRHAM5	r3i1p1	0.11°
2	MOHC-HadGEM2-ES	KNMI-RACMO22E	r1i1p1	0.44°
3	ICHEC-EC-EARTH	SMHI-RCA4	r12i1p1	0.11°
4	ICHEC-EC-EARTH	SMHI-RCA4	r12i1p1	0.44°
5	MOHC-HadGEM2-ES	SMHI-RCA4	r1i1p1	0.44°
6	MIROC-MIROC5	SMHI-RCA4	r1i1p1	0.44°
7	MPI-M-MPI-ESM-LR	SMHI-RCA4	r1i1p1	0.44°
8	NCC-NorESM1-M	SMHI-RCA4	r1i1p1	0.44°

tremes, were expressed by the 5th and 95th percentiles of annual temperatures ($T_{w,5}$ and $T_{w,95}$, respectively).

- To quantify alterations in the thermal regime due to hydropeaking, two indicators were used: the 90th percentile of daily maximum temperature gradients ($TT90$) and the 90th percentile of daily maximum temperature amplitudes ($AT90$). These two parameters described in previous research (Pfaundler and Keusen, 2007; Zolezzi et al., 2011) are the main criteria used in Swiss regulations to evaluate hydropeaking impacts on the thermal regime (OFEV, 2017a).
- To assess the impact of these temperatures on aquatic fauna, the number of days with a mean temperature above 15 °C ($N15^\circ$) were used. This metric is strongly correlated with the prevalence of proliferative kidney disease (OFEV, 2017b; Michel et al., 2022; Fuso et al., 2023). The results related to this indicator are presented in the Appendix B.

When these indicators are expressed as the difference between future climate scenarios and current values, they are preceded by the symbol Δ (e.g., $\Delta TT90 = TT90_{\text{fut.clim.}} - TT90_{\text{curr.clim.}}$).

3 Results

3.1 Overall stream temperature evolution

The results are first presented as average values over the entire study reach, providing an overall picture of the thermal response to climate change. The model predicts globally increasing stream temperatures under climate change. The extent of these increases depends obviously on the RCP, especially for the longer 2080–2090 horizon (Fig. 7). Stream temperatures are expected to increase the most under RCP 4.5 and RCP 8.5 by the end of the century in comparison with 2055–2065. For each RCP and time-horizon, temperature increases are relatively similar for the mean temperature ($T_{w,\text{mean}}$) as well as for low and high percentiles ($T_{w,5}$ and $T_{w,95}$) (Fig. 8). The full temperature spectrum responds

in a similar way to climate change. Temperature differences for RCP 2.6 are similar between the two time-horizons, with a modest increase between 0 and 1 °C for all three indicators. For the other two RCPs, the temperature rise is more pronounced by the end of the century, especially for RCP 8.5, where average values are expected to increase by approximately +4 °C. The variability among results is highest for RCP 8.5 at the end of the century, with a range greater than 3 °C between minimum and maximum projections. Beyond these averages, indicators with direct ecological relevance provide additional insight. For example, across scenarios, projected warming manifests as a rising occurrence of days above the 15 °C threshold (see Appendix B).

3.2 Spatial stream temperature evolution

Temperature differences were further analyzed in terms of their spatial evolution along the investigated river reach. Figures 9 and 10 show respectively the temperature indicator ($T_{w,5}$, $T_{w,\text{mean}}$, $T_{w,95}$) and the temperature differences ($\Delta T_{w,5}$, $\Delta T_{w,\text{mean}}$, $\Delta T_{w,95}$) between future climate scenarios and current conditions along the river downstream from the Rossens Dam. The locations of the HPP outflow and the two main tributaries (Trib.) are marked with dashed lines. For each RCP, the range of the different results obtained from the simulations are represented by the mean value (solid bold line) along with a shaded area indicating the range between the lower and upper standard deviation. Overall, temperature increases vary with time-horizons and RCPs, showing more pronounced rises along the residual flow reach. Discontinuities in this trend are observed at the hydropower outflow and tributary confluences. Downstream, where discharge and flow velocity are higher, the temperature increases are generally less marked.

3.3 Seasonal stream temperature evolution

Seasonal temperature changes are assessed by presenting results quarterly (Fig. 11, for the 2080–2090 time-horizon with DJF = December–January–February; MAM = March–April–May; JJA = June, July, August; and

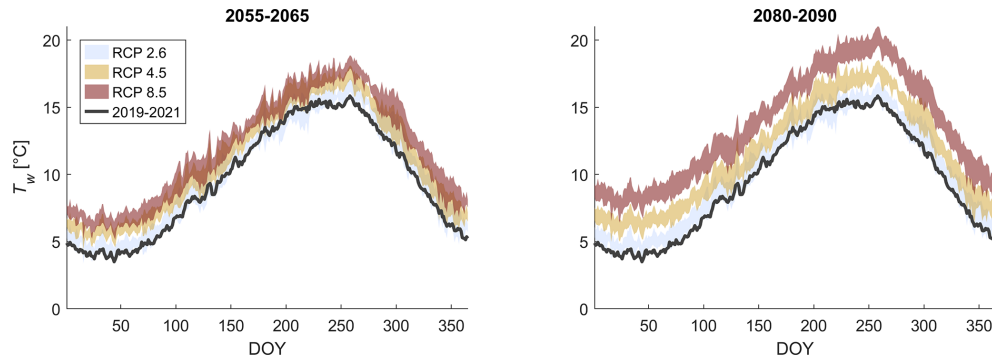


Figure 7. Simulated temperatures for the current climate (average from 2019 to 2021) and future projections. The shaded areas indicate the range of variability across different simulations for the same RCP scenario. Temperatures are averaged on the entire river reach.

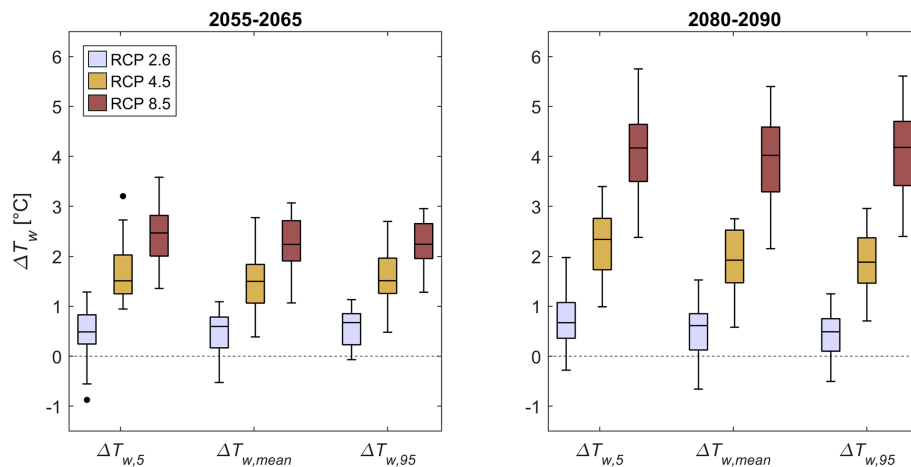


Figure 8. Simulated difference between current (2019–2021) and future climate for the mean annual temperature ($\Delta T_{w,mean}$), the 5th and 95th percentiles of annual temperature ($\Delta T_{w,5}$ and $\Delta T_{w,95}$). Temperatures are averaged on the entire river reach.

SON = September, October, November). Unlike annual trends, maximum temperatures are more affected than minimum temperatures during summer and autumn. In winter, this effect is minimal, while in spring, minimum temperatures are projected to exhibit the most significant increases. Here, seasonal evolution is presented as reach-averaged across the entire study reach. The combined spatial and seasonal evolution along the reach is presented in Appendix C.

3.4 Changes in thermopeaking impacts due to climate change

The streamwise evolution of the $TT90$ and $AT90$ indicators, characterizing the impact of thermopeaking, is shown in Fig. 12. Gradient values ($TT90$) are low first along the residual flow reach, then pronounced immediately downstream of the HPP outflow, and thereafter decreasing. Amplitudes ($AT90$), in contrast, are low at the start of the reach due to the thermal inertia of the lake, progressively increasing along the residual flow reach, and decreasing again after the con-

fluences with the two tributaries. For both indicators, climate change has an insignificant impact, with $\Delta TT90$ and $\Delta AT90$ remaining close to zero along the entire reach across all RCP scenarios.

4 Discussion

4.1 Overall stream temperature evolution

Mean temperature rises are predicted to remain below 1 °C for RCP 2.6 and exceed 4 °C for RCP 8.5 (Fig. 8). Thus, the identified increase in future mean annual stream temperature depends strongly on the emission scenario, especially toward the end of the century. The magnitude of this rise under RCP 8.5 aligns with values reported in recent studies (Michel et al., 2022; Fuso et al., 2023). On an annual scale and across the whole study reach, the magnitude of temperature variations remains similar whether minimal, average, or maximal temperatures are considered. This observation holds for the

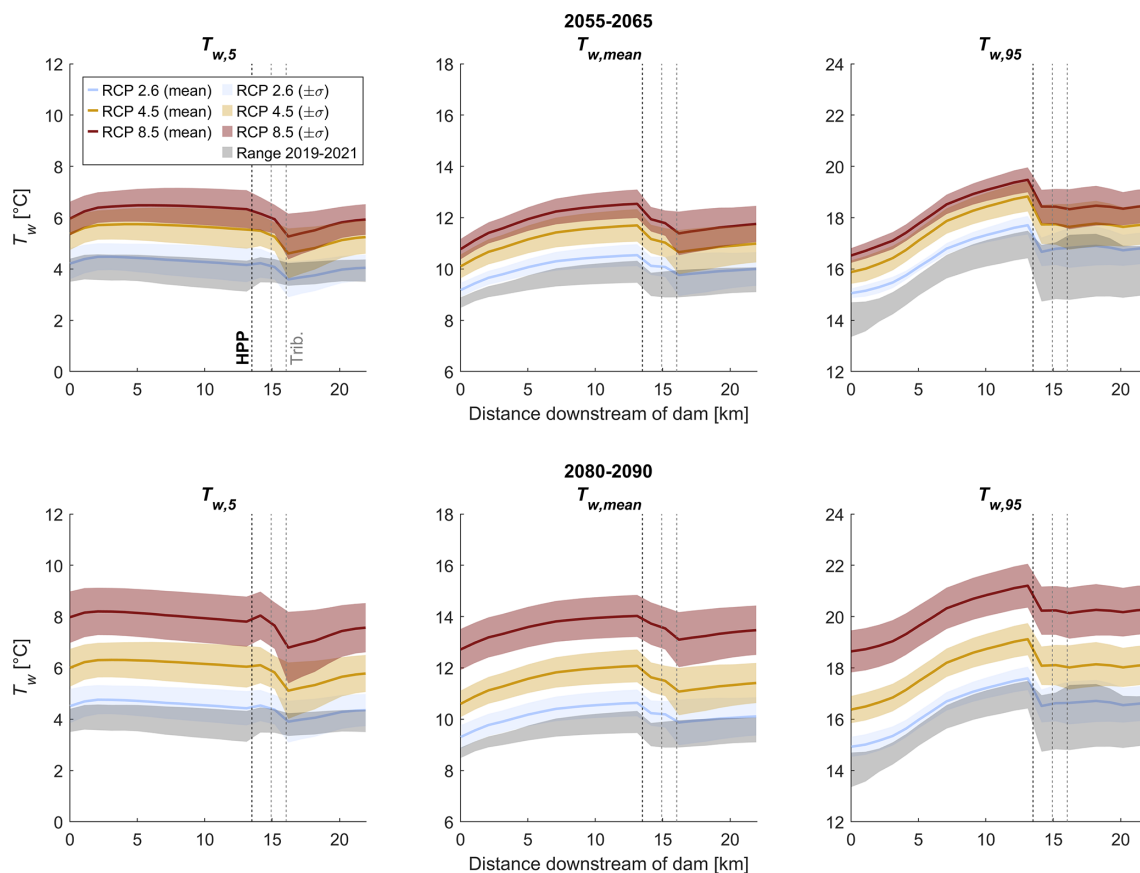


Figure 9. Simulated stream temperature along the investigated river reach for the current climate (2019–2021) and future climate (top: 2055–2065; bottom: 2080–2090) for the mean annual temperature ($T_{w,mean}$), the 5th and 95th percentiles of annual temperature ($T_{w,5}$ and $T_{w,95}$). The black line (HPP) shows the section where water is released from hydropower plant and the two grey lines (Trib.) show the confluence sections with the two tributaries.

case where results are presented annually and averaged over all investigated sections.

The ratio between the mean increase in water temperature and air temperature is 1.1 ± 0.2 for scenarios corresponding to RCP 4.5 and RCP 8.5. This is above the ratio of approximately 0.8 reported in the literature for unregulated rivers (Null et al., 2013; Leach and Moore, 2019; Michel et al., 2022), suggesting that a regulated river may be more vulnerable to the impacts of climate change. Due to insignificant variations under RCP 2.6, such a ratio is inappropriate. This difference in sensitivity should be interpreted with caution, as it may stem from both modeling assumptions and river characteristics. From a modelling perspective, the approach used here explicitly integrates several pathways through which air temperature influences the system, including lake temperature, tributary inflows, sediment heat exchange, and direct river-atmosphere interactions. This integrated structure may partly explain the stronger response to atmospheric warming, in contrast to statistical models that rely on fixed empirical relationships and do not account for the progressive warming of slow-reacting components such as lakes, soils,

and sediments. From a river system perspective, regulation likely amplifies thermal sensitivity. The presence of the reservoir increases water residence times, while low residual flows downstream reduce thermal inertia. These factors combined make the reach more responsive to atmospheric warming.

The results show high variability. Each box of Fig. 8 is a synthetic representation of 24 values, derived from the 24 simulations corresponding to the combination of 8 climate models and 3 reference years. An example of the diverse outcomes from these simulations is illustrated in Fig. 13, which presents annual time series of simulated water temperatures for two sections: one located halfway through the residual flow reach (panel a, 6 km downstream of the dam) and another downstream of both the HPP and the confluence with tributaries (panel b, 18 km downstream of the dam). The top row displays simulated temperatures for eight different climate models, all based on the same reference year (2019). The middle row presents results for three different reference years while using the same climate model ($CM = 2$). The bottom row shows the standard deviation across the series from

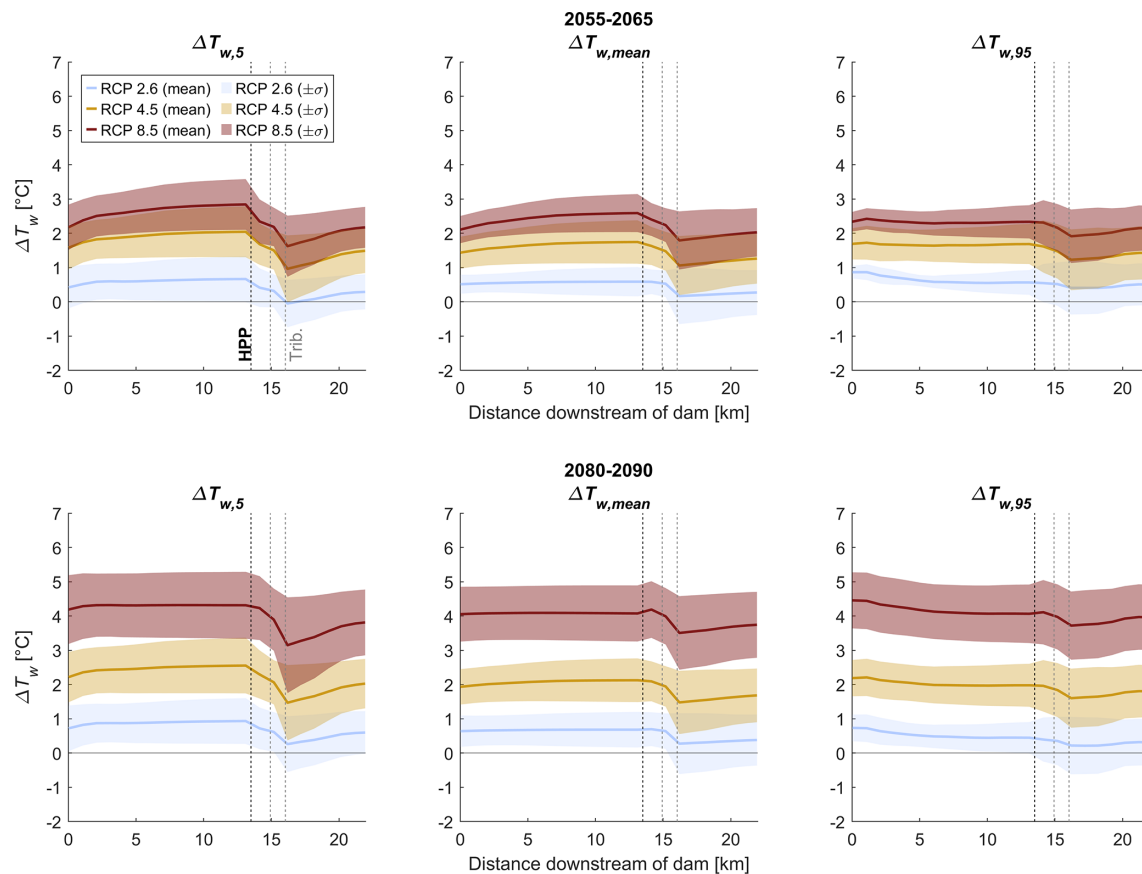


Figure 10. Spatial distribution of simulated difference between current (2019–2021) and future climate for the mean annual temperature ($\Delta T_{w,\text{mean}}$), the 5th and 95th percentiles of annual temperature ($\Delta T_{w,5}$ and $\Delta T_{w,95}$). The black line (HPP) shows the section where water is released from hydropower plant and the two grey lines (Trib.) show the confluence sections with the two tributaries.

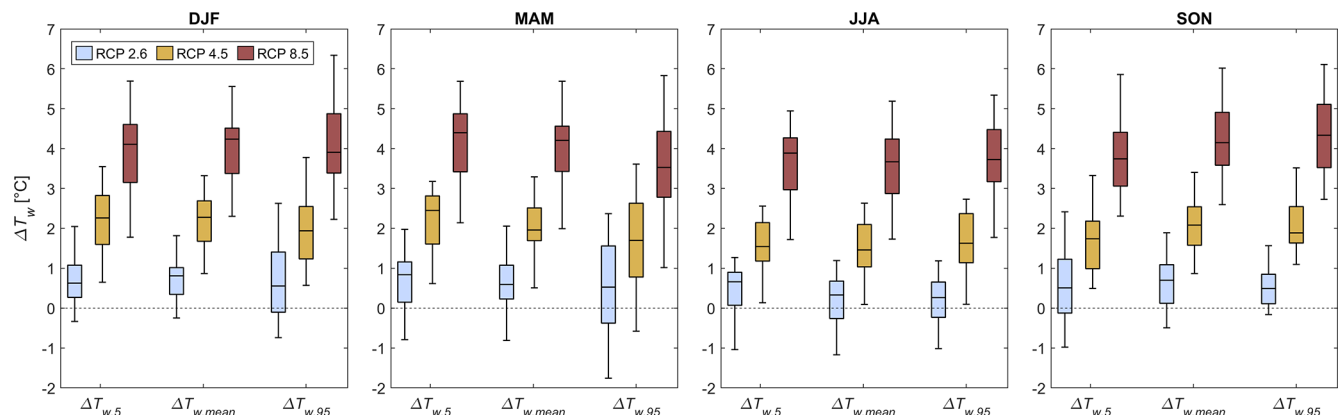


Figure 11. Simulated difference between current (2019–2021) and future climate (time-horizon 2080–2090) for the mean seasonal temperature ($\Delta T_{w,\text{mean}}$), the 5th and 95th percentiles of seasonal temperature ($\Delta T_{w,5}$ and $\Delta T_{w,95}$). Temperatures are averaged over the entire reach.

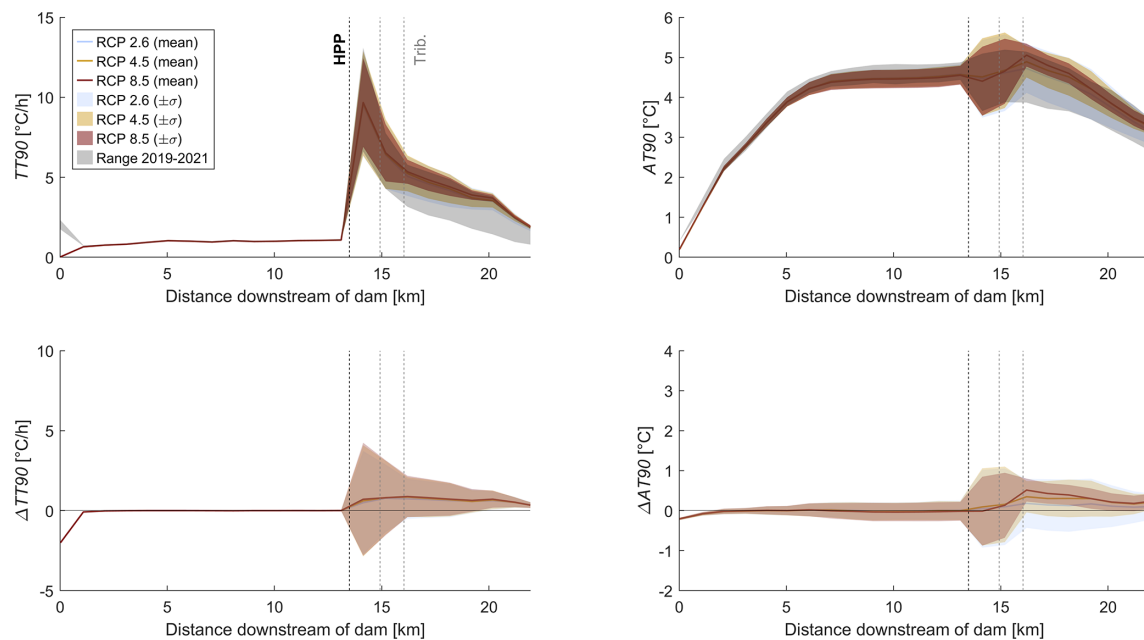


Figure 12. Simulated thermopeaking alteration indicators ($TT90$ and $AT90$) under future (2080–2090) and current climate (top) and difference between future and current indicators (bottom).

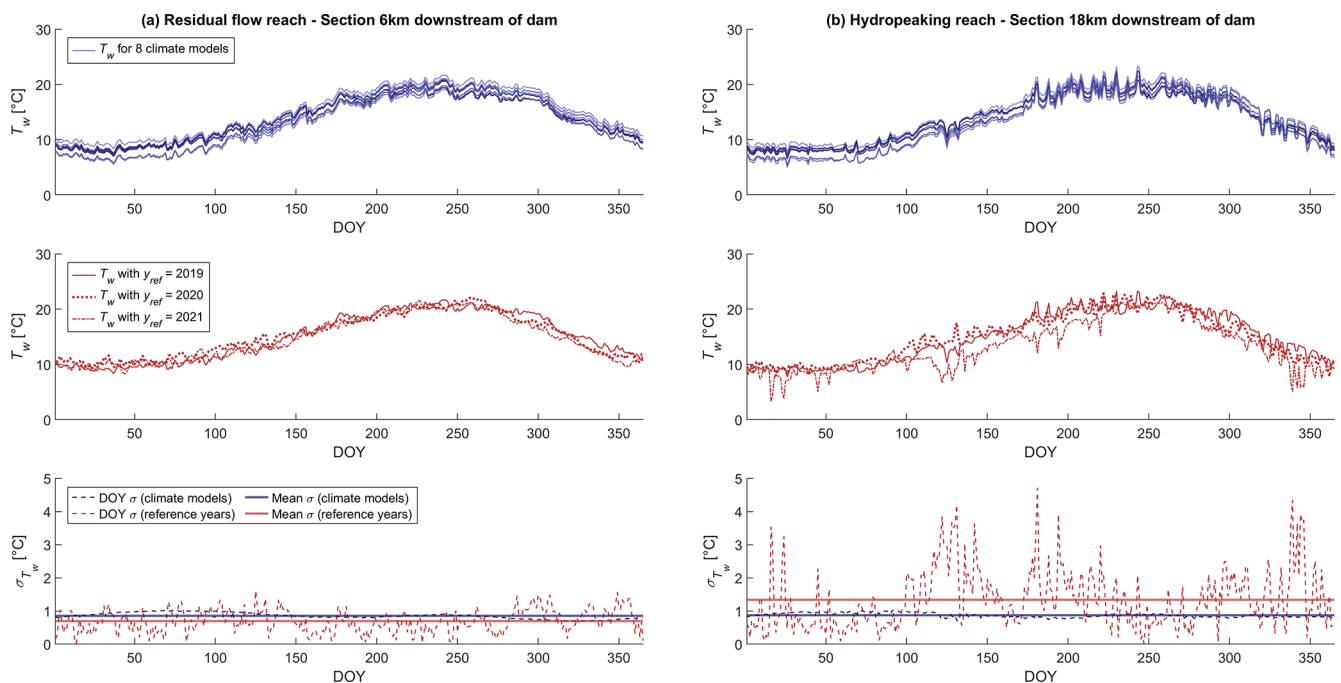


Figure 13. Simulated temperature based on 8 different climate models (top: RCP 8.5; time-horizon 2080–2090; ref. year 2019). Simulated temperature based on three different reference years (middle: RCP 8.5; time-horizon 2080–2090; CM = 2). Variability (DOY and mean) between the different simulated series based on the standard deviation (bottom).

the first two rows, with daily values (DOY) and the annual mean.

The plots indicate that variability across climate models and reference years contributes to a comparable extent to the overall variability, as reflected by standard deviations of similar magnitudes ($0.9 \pm 0.4^\circ\text{C}$, horizontal lines in Fig. 13, bottom). However, for the upstream section, variability induced by different climate models exceeds that of reference years. This is due to the consistent hydrological regime in the residual flow reach, where year-to-year differences are primarily driven by atmospheric conditions, resulting in smaller variations compared to differences across climate models. In contrast, downstream sections are influenced not only by atmospheric conditions but also by hydroelectric production regimes and, to some extent, tributary inflows.

These three drivers, atmospheric conditions, hydropower management and tributary inflows, exhibit high interannual variability, surpassing the variability from climate models. Conducting simulations including several climate models and reference years increases confidence in the results. This approach is particularly valuable given that variations among climate models often exceed those in air temperature projections produced by different stream temperature models (Piotrowski et al., 2021).

4.2 Spatial stream temperature evolution

So far, averaged spatial temperatures were considered along the investigated river reach, but regulated rivers often experience disrupted longitudinal thermal gradients (e.g., Fig. 9).

Downstream of the Rossens Dam, water temperatures are largely governed by the thermal regime of Lake Gruyère, with annual variations remaining moderate and rarely dropping below 4°C or exceeding 15°C . Significant temperature fluctuations nevertheless occur along the residual flow reach. The residual flow reach generally experiences more warming than cooling, with $T_{w,\text{mean}}$ and $T_{w,95}$ increasing along the 0 to 13.5 km stretch (Fig. 9), while $T_{w,5}$ shows only a slight decrease over the same distance. The highest $T_{w,\text{mean}}$ and $T_{w,95}$ are recorded at the end of this section, suggesting that, while the lake stabilizes temperatures first, low discharge and velocity increase susceptibility to temperature changes due to lower thermal inertia and prolonged exposure to atmospheric and ground heat exchanges along the residual flow reach.

The thermal regime is thereafter influenced by hydropower and tributary inflows. Hydropower releases significantly alter the thermal regime by substantially increasing discharge while resetting the temperature closer to the values observed downstream of the dam. This increased volume reduces temperature variability downstream of the HPP. The tributary confluences, located 1.5 and 2.5 km downstream of the plant, have minimal impact on temperature during hydropower operations. However, they generally contribute to lowering $T_{w,5}$ and $T_{w,\text{mean}}$ temperatures, with a limited effect on $T_{w,95}$.

Despite these spatial dynamics, the expected temperature increase due to climate change appears relatively uniform along the whole investigated river reach (Fig. 10). In the residual flow reach (km 0 to 13.5), temperature change (ΔT_w) remains nearly constant for each RCP scenario and indicator, suggesting that spatial dynamics will remain similar under climate change albeit with an upward temperature shift. This increase varies by RCP, with $+0.5^\circ\text{C}$ for RCP 2.6, $+2^\circ\text{C}$ for RCP 4.5, and $+4^\circ\text{C}$ for RCP 8.5 by 2080–2090. Downstream of the HPP and the tributary confluences, ΔT_w values are slightly lower for all indicators and scenarios, implying that higher discharges from unregulated tributaries help mitigate climate change impacts. Unsurprisingly, low-discharge sections show greater vulnerability to temperature increases caused by climate change.

The $N15^\circ$ indicator shows its lowest values immediately downstream of the lake for both historical years and future climate simulations (Fig. 12), confirming the role of lake thermal stratification and hypolimnion releases in mitigating temperature increases (Kędra and Wiejaczka, 2018). In contrast, the indicator reaches its highest value towards the end of the residual flow reach, since low discharges are sensitive to rising temperatures. Further downstream, at the HPP and the confluences with tributaries, higher discharges reduce the number of days exceeding the threshold.

4.3 Seasonal stream temperature evolution

The seasonal representation of climate change impacts (Fig. 11) shows that the magnitude of temperature changes induced by climate change is relatively consistent across all four seasons. However, during summer and autumn, high temperatures are expected to increase more significantly than low temperatures, while the opposite trend is observed in spring. Additionally, the largest temperature increases are projected for autumn and winter. These findings contrast with observations in unregulated Swiss catchments (Michel et al., 2022), where seasonal differences were more pronounced, with larger increases in summer (up to $+6.5^\circ\text{C}$) compared to winter. This difference is mainly because unregulated rivers are expected to undergo temperature changes under climate change driven by two factors: modifications in their hydrological regime and increasing air temperatures. These hydrological changes often lead to reduced summer discharges amplifying temperature increases. In contrast, for the regulated river reach investigated herein, the discharge regime remained unchanged (see Sect. 2.4.2).

4.4 Thermopeak alteration

While the simulations indicate a significant evolution of future stream temperatures, the indicators characterizing thermopeak are minimally affected (Fig. 12). This outcome is due to three reasons. First, it is partly a methodological consequence, associated with the nature of the indica-

tors. Indicators like $TT90$ and $AT90$ require substantial sub-daily changes in the temperature difference between river discharge and turbine discharge at the powerplant to exhibit notable evolution. Without modifications due to hydropower operation, such changes could arise from either a spatial shift in thermal dynamics along the residual flow reach or alterations in the thermal regime at a sub-daily scale. Our findings, then, are sensitive to how hydropower operation might change in the future. Second, it is because spatial dynamics are stable. The spatial patterns of thermal dynamics along the residual flow reach are largely unaffected, as ΔT_w values remain nearly constant along the reach (Fig. 10). This is primarily because both the upstream temperature boundary conditions and the stream temperature evolution along the reach are fundamentally driven by the same key factor, air temperature variation, which limits the potential for significant changes in the temperature difference. Third, it is because of stable sub-daily dynamics. The delta-change method generates future time series with sub-daily variability based on historical patterns, where climate change introduces a low-frequency signal that varies across days and seasons (Fig. 2) but remains consistent within a single day between daytime and night-time. As a result, daily temperature amplitudes under climate change are comparable to those under current conditions, as solar radiation is not significantly affected by climate scenarios. While the overall thermal system becomes nearly uniformly warmer, the disparities are too small to generate significant sub-daily trends.

However, while thermopeaking alteration indicators appear minimally influenced by climate change in the current analysis, this may not hold if future modifications in reservoir and hydropower operations occur in response to changing climate conditions.

4.5 Modelling approach and limitations

The process-based modelling approach indicates robustness in predicting future conditions. However, its extensive data requirements necessitate simplifications and omissions of certain aspects. Some thermal fluxes (e.g., frictional heat, direct inputs from precipitation, biological and chemical processes) are not included. This focus on first-order parameters influencing water temperature (Hannah and Garner, 2015), while omitting secondary factors, aligns with the principle of parsimonious modelling (Beven, 2018). The model reproduced past thermal regimes with good accuracy over the full river reach and simulation period, with mean absolute errors (MAE) of 0.4–0.8 °C for the calibration year 2019 and 0.3–1.2 °C for the validation years (2018–2022), calculated at 10 min resolution over multiple sections (Dorthé et al., 2025a). Nevertheless, limitations emerge when projecting future conditions.

One major limitation stems from uncertainties associated with climate scenarios. These scenarios exhibit significant variability across climate models, complicating the accurate

prediction of impacts (Čerkasova et al., 2024). This challenge is exacerbated when the model must resolve fine spatial and temporal scales, requiring climate scenario data to be down-scaled or transferred, potentially introducing additional biases.

Other potential limitations arise from modelling assumptions. The first concerns the assumption that environmental conditions, particularly shading effects, remain constant under climate change. Shading is a key factor influencing the thermal regime of rivers (Caissie, 2006; Dugdale et al., 2018; Seyedhashemi et al., 2022). Future changes in riparian vegetation are difficult to anticipate, as shifts in species composition (e.g., from coniferous to deciduous) could alter both canopy density and seasonal dynamics in complex and uncertain ways. Therefore, introducing such changes into the model would add uncertainty, as some effects could amplify or offset each other, and their combined influence would mostly increase overall model uncertainty. To avoid this, the modelling focused on atmospheric drivers to isolate the direct effects of climate change on stream temperature and provide a clearer basis for interpreting results. This assumption is further supported by the fact that the river is already heavily shaded, and that the confined topography and regulated hydrological regime make significant changes in riparian vegetation unlikely over the coming decades.

Another limitation of the modelling framework is the absence of explicit representation of snow processes and phase changes in precipitation. In the studied region, snow is a relatively minor component of the hydrological cycle. For the unregulated tributaries, discharge and temperature during the reference years (2019–2021) were based on measurements that implicitly reflect the influence of snow melt. For future scenarios, discharge changes were derived from analogue unregulated catchments in the Hydro-CH2018 dataset, which accounts for snowmelt processes. However, the temperature evolution of the tributaries was projected using air–water temperature relationships, without explicit modelling of short-term deviations caused by snowmelt events, which occur primarily in winter and spring, and occasionally in autumn. The high correlation observed between air and water temperatures during the reference period (Fig. 6) suggests that snowmelt exerts only a limited buffering effect in these tributaries. Unaccounted snow-related thermal effects are therefore considered negligible at the annual scale, with potential deviations in the Sarine River temperature smaller than the accuracy of the temperature sensors. Nevertheless, during specific short-term events, such as winters with high snowfall followed by rapid melt, local and temporary impacts on tributary temperatures may occur, representing a minor source of uncertainty in the model. These effects, however, are expected to decline in frequency and magnitude under future climate conditions.

Another assumption is that hydropower operations remain unchanged under climate change. While climate change is known to have significant environmental impacts on wa-

ter resources, it is also expected to prompt socioeconomic responses in water resource management (Reynard et al., 2014; Brosse et al., 2022). However, assuming unchanged hydropower production in the model enables the isolation of the direct effects of climate change on the river reach.

The evolution of lake temperature under climate change represents another important modelling assumption, as Lake Gruyère defines the upstream boundary condition of the investigated reach and influences the water released at the HPP. In this study, a statistical lake temperature model was preferred over 1D or 3D models, as these would have required substantial data, including reliable projections of future boundary conditions (e.g., inflows, hydropower operations), that are difficult to produce under climate change. Such models would also have introduced additional variability and uncertainty by combining interacting or compensating processes, making it harder to interpret the drivers of thermal response. The statistical approach provided a robust and transparent solution, ensuring control of upstream conditions and clearer interpretation of the river's thermal behavior. Coupling river and reservoir thermal models could nevertheless represent a valuable direction for future research, as reservoir stratification, mixing regimes, and deep-water withdrawals can significantly influence downstream conditions (Dorthé et al., 2025b). However, such an approach would require data of sufficient quality and resolution to justify the added model complexity and ensure meaningful results.

The simulated thermal responses and underlying processes identified in this study must be interpreted within the specific context of the investigated system. This work focuses on a single peri-Alpine river reach shaped by a particular combination of hydrology, climate, and hydropower infrastructure. Several mechanisms highlighted here, including the mitigating role of stratified reservoirs and increased thermal vulnerability under low-flow conditions, are consistent with observations from other regulated rivers in Europe, North America and New Zealand (Kędra and Wiejaczka, 2018; Seyedhashemi et al., 2021; Booker and Whitehead, 2022; Brucknerhoff et al., 2022; White et al., 2023). However, the precise magnitudes and spatial patterns of these thermal responses likely remain site-specific, as they depend on local hydrology, reservoir operations, and climatic context. This variability across systems remains difficult to quantify at this stage, due to the lack of comparable high-resolution studies in similarly regulated rivers. One distinctive feature of the study site is its limited sensitivity to direct precipitation, due to the dominance of regulation. This characteristic suggests that other strongly regulated rivers, even in regions with different precipitation regimes, could exhibit similar thermal responses, as regulation largely decouples river temperature dynamics from natural hydrological variability.

5 Conclusion

This study characterized the impact of climate change on the thermal regime of a regulated river, highlighting key spatial and temporal dynamics. Using a high-resolution process-based thermal model, it quantified projected temperature changes along a regulated river reach. Under RCP 8.5 by 2080–2090, mean annual water temperatures are projected to increase by 4 °C. These average values align with projections for unregulated rivers in Switzerland, but significant distinctions emerge when analyzing spatial and temporal patterns in greater detail.

The residual flow reach appears particularly vulnerable due to its low discharge, which amplifies thermal fluctuations and limits buffering capacity. In contrast, hypolimnion releases from Lake Gruyère, driven by thermal stratification, mitigate warming at the dam's base and downstream of the HPP. Additionally, unregulated tributaries play a role in shaping the thermal regime by introducing cooler waters at confluences, potentially moderating temperature extremes.

Beyond spatial heterogeneity, temporal trends also differ from those observed in unregulated rivers. Whereas unregulated systems typically experience the most pronounced warming in summer, the presence of a reservoir shifts the maximum temperature increases to autumn and winter, primarily due to the thermal inertia of the reservoir and delayed heat release.

Sub-daily thermal alterations induced by thermopeaking, when assessed using *TT90* and *AT90* indicators, remain largely unaffected by climate change. In the absence of modifications to hydropower operations, these alterations will not be significantly influenced by future climate conditions. However, this conclusion would no longer hold if hydropower operations were adapted in response to evolving climatic conditions or electricity demand, highlighting the importance of considering potential management shifts in future studies.

The findings also reveal the limitations of commonly used thermopeaking indicators, which fail to capture the broader regulatory influences on river thermal regimes. The impact of river regulation extends beyond thermopeaking alone, encompassing multiple interacting factors, including reservoir thermal stratification, residual flow reaches, and hydropower releases. Some of these impacts, such as maintaining a minimum discharge or releasing cold water, may benefit aquatic ecosystems, while others could be detrimental. Reservoirs thus play a dual role in shaping river thermal dynamics: while they contribute to vulnerability in some areas, they also offer potential solutions for mitigating climate change impacts through adaptive water management strategies. Refining river thermal models through coupling with lake thermal models would enhance the accuracy of projected downstream temperature regimes, particularly in systems where stratification dynamics are key regulators. Additionally, incorporating potential changes in hydropower operations in response to

climate change would allow for a more comprehensive assessment of future river thermal dynamics and their ecological consequences.

Appendix A: Formulation of heat fluxes in the model

The equations for calculating the various heat fluxes in the model (Brunner, 2016; Zhang and Johnson, 2016) are detailed below.

A1 Atmospheric longwave radiation

$$q_{\text{atm}} = \varepsilon_a \sigma T_{\text{ak}}^4, \quad (\text{A1})$$

With q_{atm} the atmospheric (downwelling) longwave radiation (W m^{-2}), ε_a the emissivity of air (unitless), σ the Stefan-Boltzmann constant ($\text{W m}^{-2} \text{K}^{-1}$), and T_{ak} the air temperature (K).

A2 Back (upwelling) longwave radiation

$$q_b = \varepsilon_w \sigma T_{\text{wk}}^4 \quad (\text{A2})$$

With q_b the back (upwelling) longwave radiation (W m^{-2}), ε_w the emissivity of water (unitless) assumed constant (0.97), and T_{wk} the water temperature (K).

A3 Latent heat

$$q_l = \frac{0.622}{P} L \rho_w (e_s - e_a) f(U) \quad (\text{A3})$$

With q_l the latent heat (W m^{-2}), P the atmospheric pressure (mb), L the latent heat of vaporization (J kg^{-1}), ρ_w the density of water (kg m^{-3}), e_s the saturated vapor pressure at water temperature (mb), e_a the vapor pressure of overlying air (mb), and $f(U)$ the wind function (m s^{-1}).

A4 Sensible heat

$$q_h = \frac{K_h}{K_w} c_p \rho_w (T_a - T_w) f(U) \quad (\text{A4})$$

With q_h the sensible heat (W m^{-2}), $\frac{K_h}{K_w}$ the diffusivity ratio (unitless), c_p the specific heat of air at constant pressure ($\text{J kg}^{-1} \text{°C}^{-1}$), T_a the air temperature (°C) and T_w the water temperature (°C).

A5 Sediment-water heat flux

$$q_{\text{sed}} = \rho_s c_{\text{ps}} \frac{\alpha_s}{0.5h_2} (T_{\text{sed}} - T_w) \quad (\text{A5})$$

With q_{sed} the sediment-water heat flux (W m^{-2}), ρ_s the density of sediments (kg m^{-3}), c_{ps} the specific heat of sediments ($\text{J kg}^{-1} \text{°C}^{-1}$), α_s the sediment thermal diffusivity ($\text{m}^2 \text{s}^{-1}$), h_2 the active sediment layer thickness (m), and T_{sed} the sediment temperature (°C).

Appendix B: Rising occurrence of ecological thermal threshold exceedance

One ecological impact of the temperature increases can be quantified through the number of days with an average temperature exceeding 15 °C ($N15^\circ$). This metric is strongly correlated with the prevalence of proliferative kidney disease among fishes (OFEV, 2017b; Michel et al., 2022; Fuso et al., 2023).

Under future climate conditions, the occurrence of these exceedances is expected to rise, depending on the RCP scenario and the time horizon (Fig. B1). Under RCP 2.6, increases remain limited, ranging from 0 to 20 additional days per year. For RCP 4.5, the rise is more pronounced yet relatively consistent across the two considered time-horizons, with approximately plus 40 to 60 d annually. The largest increases are projected under RCP 8.5, with a significant amplification toward the end of the century, exceeding 100 additional days per year. This suggests that conditions conducive to PKD proliferation could persist for nearly six months under the most extreme scenarios, compared to historical observations ranging from 18 to 52 d. These projections align with previous studies, which reported increases of 50 to 125 d annually based on similar indicators (Michel et al., 2022; Fuso et al., 2023).

The spatial evolution of the $N15^\circ$ indicator (Fig. B2, top) shows that under the current climate, the first 5 km of the reach and the sections downstream of HPP releases are less likely to exceed the 15 °C threshold, due to the relatively low temperature of the released lake water. Under future climate conditions, however, these sections are projected to experience the strongest increase in threshold exceedance (highest $\Delta N15^\circ$ in Fig. B2, bottom). As a result, the spatial distribution of this indicator would become more uniform under climate change compared to present conditions. This pattern arises because, under the RCP 4.5 and RCP 8.5 scenarios, lake temperatures are projected to rise and frequently surpass 15 °C , particularly toward the end of the century (Fig. B3). Thus, while reservoir releases would likely continue to generate thermal disruptions, their temperatures might no longer prevent exceedance of critical values.

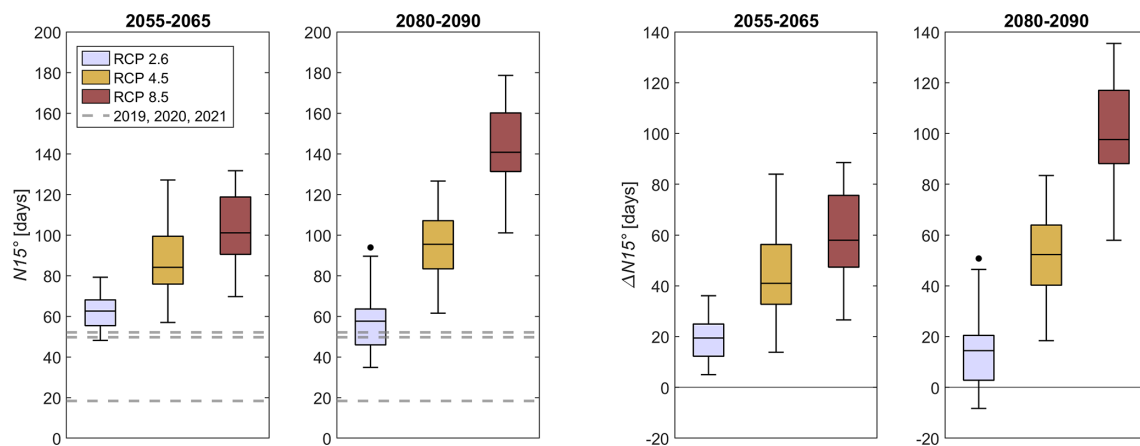


Figure B1. Simulated number of days per year with an average temperature above 15 °C for future climate and historical values ($N15^\circ$, left) and difference between future values for this indicator and mean historical values ($\Delta N15^\circ$, right). Temperatures are averaged on the entire river reach.

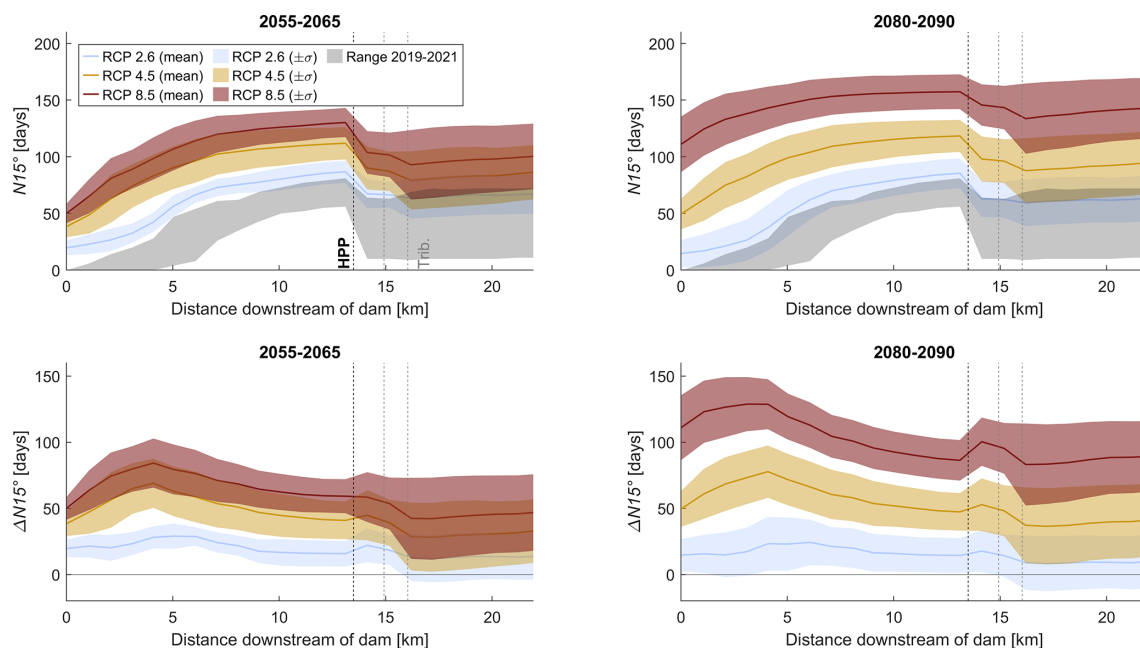


Figure B2. Simulated number of days with an average stream temperature above 15 °C ($N15^\circ$, top) for current and future climate along the reach, and difference between current and future climate ($\Delta N15^\circ$, bottom).

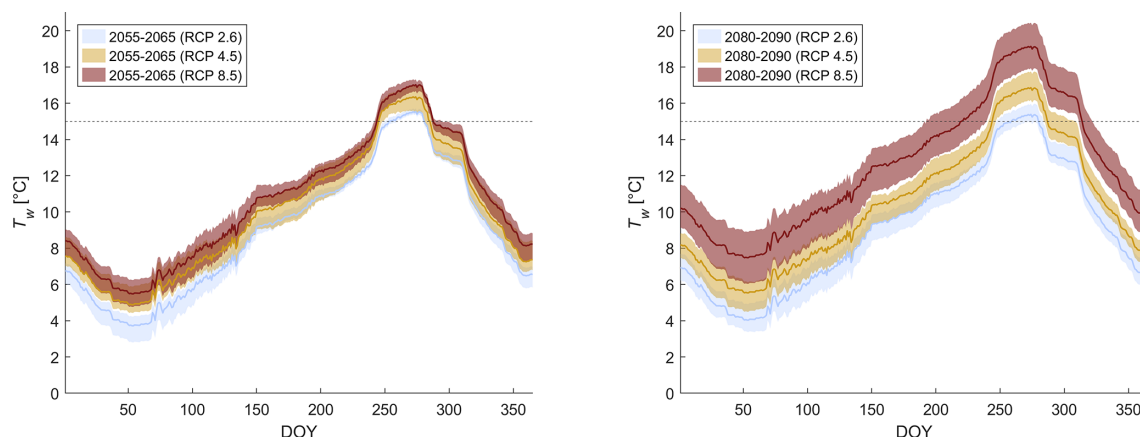


Figure B3. Simulated lake temperature at residual for intake level (637.5 m a.s.l.) under climate change for 2055–2065 (left) and 2080–2090 (right), dotted line indicates 15 °C showing that lake temperature will tend to be above this threshold more often in the future.

Appendix C: Stream temperature evolution under combined spatial and seasonal dimensions

The spatial and temporal evolutions, previously analyzed separately, can also be considered jointly. Figure C1 shows the spatial representation of the simulated seasonal temperatures for the reference period (2019–2021, top), under climate change (2080–2090, RCP 8.5, middle), and the difference between the two (bottom). In comparison with reach-averaged values, these seasonal differences reveal greater heterogeneity with varying ΔT_w values and trends along the reach and for the different seasons.

The spatial representation of future temperatures along the residual flow reach (Fig. C1, top) reveals distinct seasonal behavior. In general, temperatures just downstream of Rossens Dam are higher in summer and autumn when the lake is warm, but downstream dynamics vary by season and temperature indicator. For example, during autumn $T_{w,\text{mean}}$ remains nearly constant along the residual flow reach, indicating that, on average, stream warming and cooling balance each other. In contrast, $T_{w,5}$ decreases downstream due to the relatively warm, stable outflows from the lake combined with nighttime cooling, while $T_{w,95}$ increases downstream as water in the river warms more rapidly than at the lake bottom. Hydropower releases also exhibit seasonal effects, tending to increase temperatures in autumn and winter while decreasing them in spring and summer, consistent with the typical seasonal pattern of “cold” and “warm” thermopeaking (Olden and Naiman, 2010).

The difference ΔT_w (Fig. C1, bottom) is approximately +4 °C along the residual flow reach. Values are slightly lower in summer for $\Delta T_{w,5}$ and $\Delta T_{w,\text{mean}}$ but higher in autumn for $\Delta T_{w,95}$. This is consistent with the observation that reservoirs can disrupt the interaction between air and water temperatures by increasing the time lag between these two (Kędra and Wiejaczka, 2018).

For most cases, ΔT_w remains relatively uniform along the residual flow reach, except for $\Delta T_{w,5}$, which increases in spring and decreases in summer. Currently, in spring, minimal night-time temperatures decrease along the reach due to very low air temperatures. Under future climate, lake temperatures are expected to remain cold, but higher nighttime air temperatures will limit the temperature decrease in $\Delta T_{w,5}$ along the reach. These patterns illustrate the compound interplay between climate change effects, daily and seasonal cycles, and discharge regulation.

Downstream of the HPP, thermal behavior becomes more complex, as ΔT_w values are influenced by hydropower discharges and tributary inflows. While higher downstream discharges generally temper temperature increases, exceptions occur, such as for $T_{w,\text{mean}}$ in autumn or $T_{w,95}$ in winter. On these sections, seasonal dependency is more pronounced, with differences of up to 1.5 °C between factors. The interaction of lake temperature, climatic conditions, hydropower operations, and tributaries can either amplify or mitigate thermal changes, emphasising the importance of integrating these factors into process-based models.

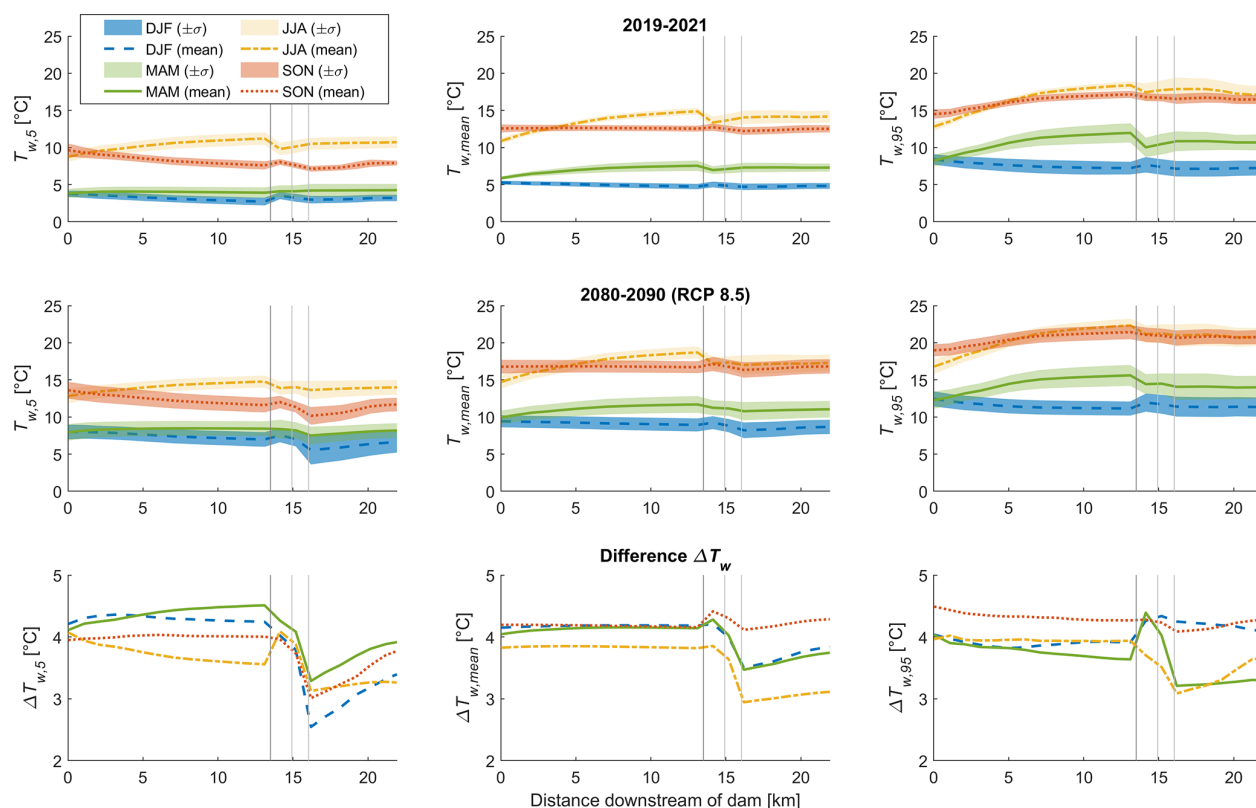


Figure C1. Simulated seasonal temperature along the reach under current climate (top, 2019–2021) and future climate (middle, for 2080–2090 and RC P8.5) with the 5th percentile, the mean and the 95th percentile of the seasonal values, and difference between these simulated temperature indicators under future and current climate (bottom).

Data availability. The collected stream temperature data is available from the corresponding author upon request.

Author contributions. DD, SNL and MP developed the idea, conceptualization, and method of the paper, DD performed the analysis, prepared the figures and the manuscript draft, SNL and MP reviewed and edited the manuscript.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

Acknowledgements. We thank the HEIA-FR technicians Elodie Labra, Yanis Schaller, Dominique Delaquis, and (formerly) Bruno Spahni for the set-up of the in-situ measurement equipment, as well as for the long-time and reliable operation of the latter. We thank Flavio Calvo who provided support with computing resources. ChatGPT (OpenAI, 2024) was used for editing MATLAB scripts and to revise the manuscript.

Financial support. This study was funded by Groupe E, Ribl SA ingénieurs hydrauliciens, School of Engineering and Architecture of Fribourg (HEIA-FR, Funding Ra&D), and Haute école spécialisée de Suisse occidentale (HES-SO).

Review statement. This paper was edited by Manuela Irene Brunner and reviewed by three anonymous referees.

References

- Anandhi, A., Frei, A., Pierson, D. C., Schneiderman, E. M., Zion, M. S., Lounsbury, D., and Matonse, A. H.: Examination of change factor methodologies for climate change impact assessment, *Water Resour. Res.*, 47, <https://doi.org/10.1029/2010WR009104>, 2011.
- Arismendi, I., Safeeq, M., Dunham, J. B., and Johnson, S. L.: Can air temperature be used to project influences of climate change on stream temperature?, *Environ. Res. Lett.*, 9, 084015, <https://doi.org/10.1088/1748-9326/9/8/084015>, 2014.
- Arrigoni, A. S., Poole, G. C., Mertes, L. A. K., O'Daniel, S. J., Woessner, W. W., and Thomas, S. A.: Buffered, lagged, or cooled? Disentangling hyporheic influences on temperature cycles in stream channels, *Water Resour. Res.*, 44, <https://doi.org/10.1029/2007WR006480>, 2008.
- Benateau, S., Gaudard, A., Stamm, C., and Altermatt, F.: Climate change and freshwater ecosystems: Impacts on water quality and ecological status, Federal Office for the Environment (FOEN) and Eawag, <https://doi.org/10.5167/uzh-169641>, 2019.
- Benyahya, L., Caissie, D., St-Hilaire, A., Ouarda, T. B. M. J., and Bobée, B.: A Review of Statistical Water Temperature Models, *Can. Water Resour. J. Rev. Can. Ressour. Hydr.*, 32, 179–192, <https://doi.org/10.4296/cwrj3203179>, 2007.
- Beven, K.: *Environmental Modelling: An Uncertain Future?*, CRC Press, London, 328 pp., <https://doi.org/10.1201/9781482288575>, 2018.
- Bilous, M. and Dunmall, K.: Atlantic salmon in the Canadian Arctic: potential dispersal, establishment, and interaction with Arctic char, *Rev. Fish Biol. Fish.*, 30, 463–483, <https://doi.org/10.1007/s11160-020-09610-2>, 2020.
- Booker, D. J. and Whitehead, A. L.: River water temperatures are higher during lower flows after accounting for meteorological variability, *River Res. Appl.*, 38, 3–22, <https://doi.org/10.1002/rra.3870>, 2022.
- Bosshard, T., Kotlarski, S., Ewen, T., and Schär, C.: Spectral representation of the annual cycle in the climate change signal, *Hydrol. Earth Syst. Sci.*, 15, 2777–2788, <https://doi.org/10.5194/hess-15-2777-2011>, 2011.
- Brosse, M., Benateau, S., Gaudard, A., Stamm, C., and Altermatt, F.: The importance of indirect effects of climate change adaptations on alpine and pre-alpine freshwater systems, *Ecol. Solut. Evid.*, 3, e12127, <https://doi.org/10.1002/2688-8319.12127>, 2022.
- Bruckerhoff, L. A., Wheeler, K., Dibble, K. L., Mihalevich, B. A., Neilson, B. T., Wang, J., Yackulic, C. B., and Schmidt, J. C.: Water Storage Decisions and Consumptive Use May Constrain Ecosystem Management under Severe Sustained Drought, *JAWRA J. Am. Water Resour. Assoc.*, 58, 654–672, <https://doi.org/10.1111/1752-1688.13020>, 2022.
- Brunner, G. W.: HEC-RAS river analysis system user's manual version 5.0, US Army Corps Eng., 962, Report No. CPD-68 (USACE/HEC), <https://apps.dtic.mil/sti/html/tr/ADA311953/> (last access: 11 November 2025), 2016.
- Buisson, L., Thuiller, W., Lek, S., Lim, P., and Grenouillet, G.: Climate change hastens the turnover of stream fish assemblages, *Glob. Change Biol.*, 14, 2232–2248, <https://doi.org/10.1111/j.1365-2486.2008.01657.x>, 2008.
- Byers, E., Krey, V., Kriegl, E., Riahi, K., Schaeffer, R., Kikstra, J., Lamboll, R., Nicholls, Z., Sandstad, M., Smith, C., van der Wijst, K., Al-Khourdajie, A., Lecocq, F., Portugal-Pereira, J., Saheb, Y., Stromman, A., Winkler, H., Auer, C., Brutschin, E., Gidden, M., Hackstock, P., Harmsen, M., Huppmann, D., Kolp, P., Lepault, C., Lewis, J., Marangoni, G., Müller-Casseres, E., Skeie, R., Werning, M., Calvin, K., Forster, P., Guivarch, C., Hasegawa, T., Meinshausen, M., Peters, G., Rogelj, J., Samset, B., Steinberger, J., Tavoni, M., and van Vuuren, D.: AR6 scenarios database [data set], <https://doi.org/10.5281/zenodo.7197970>, 2022.
- Caissie, D.: The thermal regime of rivers: a review, *Freshw. Biol.*, 51, 1389–1406, <https://doi.org/10.1111/j.1365-2427.2006.01597.x>, 2006.
- Čerkasova, N., Mězině, J., Idzelytė, R., Lesutienė, J., Ertürk, A., and Umgieser, G.: Exploring variability in climate change projections on the Nemunas River and Curonian Lagoon: coupled SWAT and SHYFEM modeling approach, *Ocean Sci.*, 20, 1123–1147, <https://doi.org/10.5194/os-20-1123-2024>, 2024.
- CH2018: CH2018 – Climate Scenarios for Switzerland, Technical Report, National Centre for Climate Services, Zurich, 271 pp., ISBN 978-3-9525031-4-0, 2018.
- Cole, J. C., Maloney, K. O., Schmid, M., and McKenna, J. E.: Developing and testing temperature models for regulated systems: A case study on the Upper Delaware River, *J. Hydrol.*, 519, 588–598, <https://doi.org/10.1016/j.jhydrol.2014.07.058>, 2014.
- Daufresne, M., Roger, M. C., Capra, H., and Lamouroux, N.: Long-term changes within the invertebrate and fish communities of the Upper Rhône River: effects of climatic factors, *Glob. Change Biol.*, 10, 124–140, <https://doi.org/10.1046/j.1529-8817.2003.00720.x>, 2004.
- Dokulil, M. T.: Impact of climate warming on European inland waters, *Inland Waters*, 4, 27–40, <https://doi.org/10.5268/IW-4.1.705>, 2014.
- Dorthe, D., Pfister, M., and Lane, S. N.: Model Inputs and Data Requirements for Process-Based Stream Temperature Modeling in Regulated Peri-Alpine Rivers, *Water Resour. Res.*, 61, e2024WR038860, <https://doi.org/10.1029/2024WR038860>, 2025a.
- Dorthe, D., Micoulet, G., and Pfister, M.: Simulation des Zusammenhangs von Stratifikation und Turbinenbetrieb eines Mittelland-Stausees mit der Qualität des nachfolgenden Fließgewässers, *Wasser Energ. Luft – SWV*, Schweizerischer Wasserwirtschaftsverband, <https://arodes.hes-so.ch/record/15788?v=pdf> (last access: 11 November 2025), 2025b.
- Dugdale, S. J., Hannah, D. M., and Malcolm, I. A.: River temperature modelling: A review of process-based approaches and future directions, *Earth-Sci. Rev.*, 175, 97–113, <https://doi.org/10.1016/j.earscirev.2017.10.009>, 2017.
- Dugdale, S. J., Malcolm, I. A., Kantola, K., and Hannah, D. M.: Stream temperature under contrasting riparian forest cover: Understanding thermal dynamics and heat exchange processes, *Sci. Total Environ.*, 610–611, 1375–1389, <https://doi.org/10.1016/j.scitotenv.2017.08.198>, 2018.
- Erickson, T. R. and Stefan, H. G.: Linear Air/Water Temperature Correlations for Streams during Open Water Periods, *J. Hydrol. Eng.*, 5, 317–321, [https://doi.org/10.1061/\(ASCE\)1084-0699\(2000\)5:3\(317\)](https://doi.org/10.1061/(ASCE)1084-0699(2000)5:3(317)), 2000.
- Ficklin, D. L., Barnhart, B. L., Knauft, J. H., Stewart, I. T., Maurer, E. P., Letsinger, S. L., and Whittaker, G. W.: Climate change and stream temperature projections in the Columbia

- River basin: habitat implications of spatial variation in hydrologic drivers, *Hydrol. Earth Syst. Sci.*, 18, 4897–4912, <https://doi.org/10.5194/hess-18-4897-2014>, 2014.
- Fuso, F., Stucchi, L., Bonacina, L., Fornaroli, R., and Bocchiola, D.: Evaluation of water temperature under changing climate and its effect on river habitat in a regulated Alpine catchment, *J. Hydrol.*, 616, 128816, 2023.
- Gillet, C. and Quétin, P.: Effect of temperature changes on the reproductive cycle of roach in Lake Geneva from 1983 to 2001, *J. Fish Biol.*, 69, 518–534, <https://doi.org/10.1111/j.1095-8649.2006.01123.x>, 2006.
- Goodell, C.: Breaking HEC-RAS Code, User's Guide Autom. HEC-RAS, 645, ISBN 978-0-9908918-0-2, 2014.
- Greig, S. M., Sear, D. A., and Carling, P. A.: A review of factors influencing the availability of dissolved oxygen to incubating salmonid embryos, *Hydrol. Process.*, 21, 323–334, <https://doi.org/10.1002/hyp.6188>, 2007.
- Hannah, D. M. and Garner, G.: River water temperature in the United Kingdom: Changes over the 20th century and possible changes over the 21st century, *Prog. Phys. Geogr.*, 39, 68–92, <https://doi.org/10.1177/0309133314550669>, 2015.
- HEC (Hydrologic Engineering Center): HEC-RAS River Analysis System, Version 6.3 [software], U.S. Army Corps of Engineers, Institute for Water Resources, <https://www.hec.usace.army.mil/software/hec-ras/download.aspx> (last access: 11 November 2025), 2022.
- Jackson, F. L., Fryer, R. J., Hannah, D. M., Millar, C. P., and Malcolm, I. A.: A spatio-temporal statistical model of maximum daily river temperatures to inform the management of Scotland's Atlantic salmon rivers under climate change, *Sci. Total Environ.*, 612, 1543–1558, <https://doi.org/10.1016/j.scitotenv.2017.09.010>, 2018.
- Johnson, M. F., Albertson, L. K., Algar, A. C., Dugdale, S. J., Edwards, P., England, J., Gibbins, C., Kazama, S., Komori, D., MacColl, A. D. C., Scholl, E. A., Wilby, R. L., de Oliveira Roque, F., and Wood, P. J.: Rising water temperature in rivers: Ecological impacts and future resilience, *WIREs Water*, 11, e1724, <https://doi.org/10.1002/wat2.1724>, 2024.
- Jonsson, B. and Jonsson, N.: A review of the likely effects of climate change on anadromous Atlantic salmon *Salmo salar* and brown trout *Salmo trutta*, with particular reference to water temperature and flow, *J. Fish Biol.*, 75, 2381–2447, <https://doi.org/10.1111/j.1095-8649.2009.02380.x>, 2009.
- Kędra, M. and Wójcicka, Ł.: Climatic and dam-induced impacts on river water temperature: Assessment and management implications, *Sci. Total Environ.*, 626, 1474–1483, <https://doi.org/10.1016/j.scitotenv.2017.10.044>, 2018.
- Leach, J. A. and Moore, R. D.: Empirical Stream Thermal Sensitivities May Underestimate Stream Temperature Response to Climate Warming, *Water Resour. Res.*, 55, 5453–5467, <https://doi.org/10.1029/2018WR024236>, 2019.
- Leon, A. S. and Goodell, C.: Controlling hec-ras using matlab, *Environ. Model. Softw.*, 84, 339–348, 2016.
- Lugowska, K. and Witeska, M.: The effect of temperature on early development of barbel *Barbus barbus* (L.), *Aquac. Res.*, 49, 2495–2502, <https://doi.org/10.1111/are.13709>, 2018.
- Michel, A., Brauchli, T., Lehning, M., Schaeffli, B., and Huwald, H.: Stream temperature and discharge evolution in Switzerland over the last 50 years: annual and seasonal behaviour, *Hydrol. Earth Syst. Sci.*, 24, 115–142, <https://doi.org/10.5194/hess-24-115-2020>, 2020.
- Michel, A., Sharma, V., Lehning, M., and Huwald, H.: Climate change scenarios at hourly time-step over Switzerland from an enhanced temporal downscaling approach, *Int. J. Climatol.*, 41, 3503–3522, 2021a.
- Michel, A., Răman Vinnă, C. L. M., Bouffard, D., Epting, J., Huwald, H., Schaeffli, B., Schmid, M., and Wüest, A. J.: Evolution of stream and lake water temperature under climate change, Hydro-CH2018 Project. Commissioned by the Federal Office for the Environment (FOEN), <https://doi.org/10.16904/envdat.207>, 2021b.
- Michel, A., Schaeffli, B., Wever, N., Zekollari, H., Lehning, M., and Huwald, H.: Future water temperature of rivers in Switzerland under climate change investigated with physics-based models, *Hydrol. Earth Syst. Sci.*, 26, 1063–1087, <https://doi.org/10.5194/hess-26-1063-2022>, 2022.
- Muelchi, R., Rössler, O., Schwanbeck, J., Weingartner, R., and Martius, O.: An ensemble of daily simulated runoff data (1981–2099) under climate change conditions for 93 catchments in Switzerland (Hydro-CH2018-Runoff ensemble), *Geosci. Data J.*, 9, 46–57, 2022.
- Null, S. E., Viers, J. H., Deas, M. L., Tanaka, S. K., and Mount, J. F.: Stream temperature sensitivity to climate warming in California's Sierra Nevada: impacts to coldwater habitat, *Clim. Change*, 116, 149–170, <https://doi.org/10.1007/s10584-012-0459-8>, 2013.
- Nürnberg, G. K.: Lake responses to long-term hypolimnetic withdrawal treatments, *Lake Reserv. Manag.*, 23, 388–409, <https://doi.org/10.1080/07438140709354026>, 2007.
- OFEV: Eclusées – Mesures d'assainissement, Un module de l'aide à l'exécution Renaturation des eaux, <https://www.bafu.admin.ch/dam/bafu/fr/dokumente/wasser/uv-umwelt-vollzug/schwall-sunk-massnahmen.pdf.download.pdf/UV-1701-f.pdf> (last access: 1 November 2025), 2017a.
- OFEV: Impulsions pour une adaptation de la Suisse aux changements climatiques, <https://www.bafu.admin.ch/bafu/fr/home/themen/thema-klima/klima--publikationen-und-studien/publikationen-klima/impulse-fuer-klimaangepasste-schweiz.html> (last access: 1 November 2025), 2017b.
- Olden, J. D. and Naiman, R. J.: Incorporating thermal regimes into environmental flows assessments: modifying dam operations to restore freshwater ecosystem integrity, *Freshw. Biol.*, 55, 86–107, <https://doi.org/10.1111/j.1365-2427.2009.02179.x>, 2010.
- O'Reilly, C. M., Sharma, S., Gray, D. K., Hampton, S. E., Read, J. S., Rowley, R. J., Schneider, P., Lenters, J. D., McIntyre, P. B., Kraemer, B. M., Weyhenmeyer, G. A., Straile, D., Dong, B., Adrian, R., Allan, M. G., Anneville, O., Arvola, L., Austin, J., Bailey, J. L., Baron, J. S., Brookes, J. D., de Eyto, E., Dokulil, M. T., Hamilton, D. P., Havens, K., Hetherington, A. L., Higgins, S. N., Hook, S., Izmest'eva, L. R., Joehnk, K. D., Kangur, K., Kasprzak, P., Kumagai, M., Kuusisto, E., Leshkevich, G., Livingston, D. M., MacIntyre, S., May, L., Melack, J. M., Mueller-Navarra, D. C., Naumenko, M., Noges, P., Noges, T., North, R. P., Plisnier, P.-D., Rigosi, A., Rimmer, A., Rogora, M., Rudstam, L. G., Rusak, J. A., Salmaso, N., Samal, N. R., Schindler, D. E., Schladow, S. G., Schmid, M., Schmidt, S. R., Silow, E., Soyulu, M. E., Teubner, K., Verburg, P., Voutilainen, A., Watkinson, A., Williamson, C. E., and Zhang, G.: Rapid and highly variable

- warming of lake surface waters around the globe, *Geophys. Res. Lett.*, 42, 10773–10781, <https://doi.org/10.1002/2015GL066235>, 2015.
- Pfandner, M. and Keusen, M.: Veränderungen von Schwall-Sunk: Hydrologische Datenanalyse zur Charakterisierung von Schwall-Sunk Phänomenen in der Schweiz, Bundesamt für Umwelt, BAFU, https://www.bafu.admin.ch/dam/bafu/de/dokumente/wasser/ww-umwelt-wissen/veraenderungen_vonschwall-sunk.1.pdf.download.pdf/veraenderungen_vonschwall-sunk.pdf (last access: 1 November 2025), 2007.
- Piccolroaz, S., Calamita, E., Majone, B., Gallice, A., Siviglia, A., and Toffolon, M.: Prediction of river water temperature: a comparison between a new family of hybrid models and statistical approaches, *Hydrol. Process.*, 30, 3901–3917, <https://doi.org/10.1002/hyp.10913>, 2016.
- Piotrowski, A. P., Osuch, M., and Napiorkowski, J. J.: Influence of the choice of stream temperature model on the projections of water temperature in rivers, *J. Hydrol.*, 601, 126629, <https://doi.org/10.1016/j.jhydrol.2021.126629>, 2021.
- Råman Vinnå, L., Medhaug, I., Schmid, M., and Bouffard, D.: The vulnerability of lakes to climate change along an altitudinal gradient, *Commun. Earth Environ.*, 2, 35, <https://doi.org/10.1038/s43247-021-00106-w>, 2021.
- Rehana, S.: River Water Temperature Modelling Under Climate Change Using Support Vector Regression, in: *Hydrology in a Changing World: Challenges in Modeling*, edited by: Singh, S. K. and Dhanya, C. T., Springer International Publishing, Cham, 171–183, https://doi.org/10.1007/978-3-030-02197-9_8, 2019.
- Reynard, E., Bonriposi, M., Graefe, O., Homewood, C., Huss, M., Kauzlaric, M., Liniger, H., Rey, E., Rist, S., Schädler, B., Schneider, F., and Weingartner, R.: Interdisciplinary assessment of complex regional water systems and their future evolution: how socioeconomic drivers can matter more than climate, *WIREs Water*, 1, 413–426, <https://doi.org/10.1002/wat2.1032>, 2014.
- Santiago, J. M., Muñoz-Mas, R., Solana-Gutiérrez, J., García de Jalón, D., Alonso, C., Martínez-Capel, F., Pórtolles, J., Monjo, R., and Ribalaygua, J.: Waning habitats due to climate change: the effects of changes in streamflow and temperature at the rear edge of the distribution of a cold-water fish, *Hydrol. Earth Syst. Sci.*, 21, 4073–4101, <https://doi.org/10.5194/hess-21-4073-2017>, 2017.
- Seyedhashemi, H., Moatar, F., Vidal, J.-P., Diamond, J. S., Beaufort, A., Chandesris, A., and Valette, L.: Thermal signatures identify the influence of dams and ponds on stream temperature at the regional scale, *Sci. Total Environ.*, 766, 142667, <https://doi.org/10.1016/j.scitotenv.2020.142667>, 2021.
- Seyedhashemi, H., Vidal, J.-P., Diamond, J. S., Thiéry, D., Monteil, C., Hendrickx, F., Maire, A., and Moatar, F.: Regional, multi-decadal analysis on the Loire River basin reveals that stream temperature increases faster than air temperature, *Hydrol. Earth Syst. Sci.*, 26, 2583–2603, <https://doi.org/10.5194/hess-26-2583-2022>, 2022.
- Snyder, C. D., Hitt, N. P., and Young, J. A.: Accounting for ground-water in stream fish thermal habitat responses to climate change, *Ecol. Appl.*, 25, 1397–1419, <https://doi.org/10.1890/14-1354.1>, 2015.
- Svenning, M.-A., Sandem, K., Halvorsen, M., Kanstad-Hanssen, Ø., Falkegård, M., and Borgstrøm, R.: Change in relative abundance of Atlantic salmon and Arctic charr in Veidnes River, Northern Norway: a possible effect of climate change?, *Hydrobiologia*, 783, 145–158, <https://doi.org/10.1007/s10750-016-2690-1>, 2016.
- Vasseur, D. A., DeLong, J. P., Gilbert, B., Greig, H. S., Harley, C. D. G., McCann, K. S., Savage, V., Tunney, T. D., and O'Connor, M. I.: Increased temperature variation poses a greater risk to species than climate warming, *Proc. R. Soc. B Biol. Sci.*, 281, 20132612, <https://doi.org/10.1098/rspb.2013.2612>, 2014.
- van Vliet, M. T. H., Franssen, W. H. P., Yearsley, J. R., Ludwig, F., Haddeland, I., Lettenmaier, D. P., and Kabat, P.: Global river discharge and water temperature under climate change, *Glob. Environ. Change*, 23, 450–464, <https://doi.org/10.1016/j.gloenvcha.2012.11.002>, 2013.
- Watts, G., Battarbee, R. W., Bloomfield, J. P., Crossman, J., Dacache, A., Durance, I., Elliott, J. A., Garner, G., Hannaford, J., Hannah, D. M., Hess, T., Jackson, C. R., Kay, A. L., Kernan, M., Knox, J., Mackay, J., Monteith, D. T., Ormerod, S. J., Rance, J., Stuart, M. E., Wade, A. J., Wade, S. D., Weatherhead, K., Whitehead, P. G., and Wilby, R. L.: Climate change and water in the UK – past changes and future prospects, *Prog. Phys. Geogr. Earth Environ.*, 39, 6–28, <https://doi.org/10.1177/0309133314542957>, 2015.
- Webb, B. W., Hannah, D. M., Moore, R. D., Brown, L. E., and Nobilis, F.: Recent advances in stream and river temperature research, *Hydrol. Process.*, 22, 902–918, <https://doi.org/10.1002/hyp.6994>, 2008.
- White, J. C., Khamis, K., Dugdale, S., Jackson, F. L., Malcolm, I. A., Krause, S., and Hannah, D. M.: Drought impacts on river water temperature: A process-based understanding from temperate climates, *Hydrol. Process.*, 37, e14958, <https://doi.org/10.1002/hyp.14958>, 2023.
- Woolway, R. I., Kraemer, B. M., Lenters, J. D., Merchant, C. J., O'Reilly, C. M., and Sharma, S.: Global lake responses to climate change, *Nat. Rev. Earth Environ.*, 1, 388–403, <https://doi.org/10.1038/s43017-020-0067-5>, 2020.
- Woolway, R. I. and Merchant, C. J.: Worldwide alteration of lake mixing regimes in response to climate change, *Nat. Geosci.*, 12, 271–276, <https://doi.org/10.1038/s41561-019-0322-x>, 2019.
- Zhang, Z. and Johnson, B. E.: Aquatic nutrient simulation modules (NSMs) developed for hydrologic and hydraulic models, US Army Engineer Research and Development Center, Environmental Laboratory, <https://hdl.handle.net/11681/10112> (last access: 11 November 2025), 2016.
- Zolezzi, G., Siviglia, A., Toffolon, M., and Maiolini, B.: Thermo peaking in Alpine streams: event characterization and time scales, *Ecohydrology*, 4, 564–576, <https://doi.org/10.1002/eco.132>, 2011.