



Generating Boundary Conditions for Compound Flood Modeling in a Probabilistic Framework

Pravin Maduwantha^{1,2}, Thomas Wahl^{1,2}, Sara Santamaria-Aguilar^{1,2}, Robert Jane^{1,2}, Sönke Dangendorf³, Hanbeen Kim^{4,5}, and Gabriele Villarini^{4,5}

¹Department of Civil, Environmental and Construction Engineering, University of Central Florida, Orlando, FL 32816, USA

²National Center for Integrated Coastal Research, University of Central Florida, Orlando, FL 32816, USA

³Department of River-Coastal Science and Engineering, Tulane University, 6823 St. Charles Avenue, New Orleans, LA 70118-5698, USA

⁴Department of Civil and Environmental Engineering, Princeton University, Princeton, NJ 08544, USA

⁵High Meadows Environmental Institute, Princeton University, Princeton, NJ 08544, USA

Correspondence: Pravin Maduwantha (pravin@ucf.edu)

Received: 1 April 2025 – Discussion started: 17 April 2025

Revised: 28 December 2025 – Accepted: 4 January 2026 – Published: 27 January 2026

Abstract. Compound flood risk assessments require probabilistic estimates of flood depths and extents that are derived from compound flood models. It is essential to simulate a wide range of flood driver conditions to capture the full range of variability in resultant flooding. Although recent advancements in computational resources and the development of faster compound flood models allow for more rapid simulations, generating a large enough set of storm events for boundary conditions remains a challenge. In this study, we introduce a statistical framework designed to generate many synthetic but physically plausible compound events, including storm-tide hydrographs and rainfall fields, which can serve as boundary conditions for dynamic compound flood models. We apply the proposed framework to Gloucester City in New Jersey, as a case study. The results demonstrate its effectiveness in producing synthetic events covering the unobserved regions of the parameter space. We use flood model simulations to assess the importance of explicitly accounting for variability in mean sea level (m.s.l.) and tides in generating the boundary conditions. Results highlight that m.s.l. anomalies and tidal conditions alone can lead to differences in flood depths exceeding 1 and 1.2 m, respectively, in parts of Gloucester City. While we use historically observed events, the framework can be applied to model output data including hindcasts or future projections.

1 Introduction

Flooding in coastal regions can be caused by various hydrometeorological drivers such as precipitation, excess river discharge, wind-driven storm surge, mean sea level (m.s.l.), and high tides. When these flood drivers occur simultaneously or in close succession, they often lead to compound flooding, which can result in more severe flood impacts and substantial socioeconomic losses (e.g., Hendry et al., 2019; Nasr et al., 2023; Wahl et al., 2015; Ward et al., 2018). Therefore, accurately quantifying and characterizing compound flood risk is crucial for effective flood risk management and mitigation, infrastructure design, urban planning, the (re)insurance markets, emergency response, and more.

Flood depths (and extents) are typically estimated using compound flood models, due to the scarcity of data on historic flood events, e.g., from high water marks or satellite observations. One simple approach is to use static compound flood models (also referred to as “bathtub” models) (e.g., Gallien, 2016; Seenath et al., 2016; Semmendinger et al., 2021), but these models tend to overestimate flood extent primarily due to the assumption that peak water levels are maintained indefinitely and by neglecting critical factors such as bottom friction and flood duration (Barnard et al., 2019; Breilh et al., 2013; Gallien, 2016; Kumbier et al., 2019). Alternatively, dynamic compound flood models are employed to capture the physical mechanisms of coastal and inland flooding, and they have been shown to provide good

results for various terrain types, catchment sizes, and flood driver combinations (Kumbier et al., 2019; Lewis et al., 2013; Ramirez et al., 2016; Vousdoukas et al., 2016). However, dynamic compound flood models require time series of the different flood drivers, and their relative timing to each other, as boundary conditions.

Temporally and spatially varying boundary conditions permit a thorough exploration of different scenarios, including variations in timing, intensity, and spatial extent of flood drivers (Harrison et al., 2022; Quinn et al., 2014). The development of faster compound flood models (e.g. SFINCS (Super-Fast INundation of CoastS)) coupled with the increase in computational resources enables many scenarios to be rapidly propagated through dynamic compound flood models. The scarcity of long-term concurrent observational records of flood drivers poses a challenge in generating plausible extreme conditions that can serve as boundary conditions for those models (Ward et al., 2018). One way of addressing this issue is by using physics-based models to generate many events (e.g. rainfall-surge-discharge events) (Bass and Bedient, 2018; Bates et al., 2021; Gori et al., 2020; Nederhoff et al., 2024; Orton et al., 2020). For example, Gori et al. (2020) first derived synthetic tropical cyclone (TC) tracks and then simulated the resultant rainfall (RF) fields using a physics-based model and the associated storm tides through a hydrodynamic model (ADvanced CIRCulation (ADCIRC) model, Luettich et al., 1992). These RF fields and storm tides were subsequently used as boundary conditions in a one-way coupled hydrodynamic modeling framework to simulate the total flood levels in a tidal estuary.

Generating boundary conditions via physics-based modeling is often computationally expensive, thus making it challenging to implement across diverse climate and environmental conditions. Statistical approaches offer a computationally cheaper alternative by modeling the joint probability distribution of flood drivers directly and simulating scenarios from the fitted distribution model. These scenarios are then propagated through compound flood models, allowing for the assessment of flood impacts while reducing computational demands compared to more complex physical models. Bayesian networks (e.g., Couasnon et al., 2018), bivariate logistic models (e.g., Serafin et al., 2019), and copulas (e.g., Liu et al., 2024; Moftakhari et al., 2019; Zellou and Rahali, 2019) are examples of statistical approaches applied to analyze compound flood drivers. These approaches still possess various limitations when deriving time series of boundary conditions. For instance, they often rely on a representative event (e.g., Liu et al., 2024) or a simplistic sinusoidal shape (e.g., Moftakhari et al., 2019) of the hydrographs for all simulations, which oversimplifies the temporal variability of flood drivers. They also may neglect the timing dynamics between RF-runoff and storm tides, either assuming both flood drivers peak simultaneously or assuming a range of possible time lags (e.g., Moftakhari et al., 2019). Furthermore, they fail to capture the spatial variability of RF fields

as they rely on RF point data from observations or models (e.g., Zellou and Rahali, 2019).

Harrison et al. (2022) highlighted that in both large and small estuaries, storm surge intensity rather than height was the main flooding driver, while Shen et al. (2019) noted that longer-duration storm tides led to greater backward flow volumes in underground pipes. Therefore, generating realistic synthetic storm-tide hydrographs is crucial since the flood extent, particularly around the peak water level, is often highly sensitive to the shape of the storm-tide hydrograph (Quinn et al., 2014). Methods for generating extreme storm-tide hydrographs can be mainly categorized into deterministic and stochastic. Deterministic methods use pre-defined shapes or observed event patterns, such as triangles (e.g., Vousdoukas et al., 2016) or sinusoidal functions (e.g., Moftakhari et al., 2019), which simplify the event structure but may not capture the natural asymmetry in water level profiles. This approach, although efficient, may also ignore non-linear interactions between tides and surges, depending on how the method is applied (Arns et al., 2020). Rescaling of total water level (or non-tidal residuals (NTR) time series) of observed events is another deterministic approach that leverages observed event data (Dawson et al., 2005; Kim et al., 2023; Xu et al., 2024). This method incorporates site-specific information, eliminating the assumption of symmetrical rising and falling limbs in the total water level profile. Alternatively, stochastic simulation methods can be used to generate many physically plausible events for a given peak water level, while accounting for natural temporal variability in storm tides (MacPherson et al., 2019; Wahl et al., 2011, 2012). For example, Wahl et al. (2011) parameterized water levels around peak tides using 19 sea level and six time parameters, fitting independent marginal distributions to each, and modeling dependencies through linear regression. Filters were applied to ensure realistic event generation, effectively recreating the peak water level–intensity relationship observed at German Bight tide gauges. Dullaart et al. (2023) created a global dataset of storm tide hydrographs from the depth-averaged hydrodynamic Global Tide and Surge Model (GTSM) (Hersbach et al., 2020). They incorporated non-linear tide-surge interactions in the surge series by calculating it as the difference in elevation between storm tide simulations and tide-only simulations. However, they assumed that the surge maximum coincided with the high tide.

A variety of methods are available for generating design hyetographs for point RF estimates, ranging from simple geometric shapes (e.g., Chow et al., 1988) to more sophisticated multi-site stochastic models (e.g., Evin et al., 2018). However, relatively few studies have focused on generating synthetic space-time varying RF events. Green et al. (2024) classified methods for simulating space-time varying RF into four main approaches: (1) multi-site temporal simulations (e.g., Brissette et al., 2007; Kleiber et al., 2012), (2) point process theory-based methods (e.g., Burton et al., 2008; Cowpertwait et al., 2002), (3) random field theory-

based methods (e.g., Leblois and Creutin, 2013; Papalexiou et al., 2021), and (4) fractal processes in two or three dimensions (e.g., Schertzer and Lovejoy, 1987). These methods are often tailored to specific research objectives depending on their strengths, but they also come with various limitations. For example, while point process theory-based methods are generally robust, they may not accurately capture the complex spatial structures of RF cells (Green et al., 2024). Furthermore, many of these approaches generate stochastic RF fields, without accounting for the temporal dependencies with other flood drivers, such as storm surge, which limits their applicability for generating synthetic compound events.

Among the applications of uniform scaling of flooding drivers, Xu et al. (2024) applied the “same frequency amplification” method to construct a 200-year storm surge hydrograph and rainfall hyetograph for their flood simulations. However, their approach was limited to point rainfall and assumed uniformly distributed rainfall across the catchment. Kim et al. (2023) proposed a framework for generating synthetic time series of RF fields and associated NTR by scaling time series of observed TC events. The framework was used to capture different spatial patterns of RF fields as this aspect was shown to significantly contribute to compound flood hazard (e.g., Gori et al., 2020). However, their analysis exclusively focused on TC events and the methodology only produces NTR time series and does not extend to producing complete storm-tide hydrographs; this is because it was applied to the Texas coast where the tidal range is small, and where compound flooding is primarily driven by TCs. Other types of storms can produce compound flooding in many other areas and tides often contribute significantly to the resulting still water levels.

The existing statistical approaches that generate time-varying boundary conditions for dynamic compound flood models are primarily intended to construct design events with specified joint return periods (e.g., 50-year, 100-year) (Serafin et al., 2019; Moftakhari et al., 2019; Zellou and Rahali, 2019; Kim et al., 2023; Liu et al., 2024; Xu et al., 2024). This method supports the “event-based” flood hazard analysis, where single synthetic events, or a few of them, with known joint return periods are simulated through a flood model, and it is assumed that the joint probability of the flood drivers directly translates into the probability of the flood response. However, this neglects the range of potential different flooding scenarios that may arise from variations in temporal and spatial patterns, differences in the relative timing of multiple flood drivers, and other complex interactions (for example, tide-surge interactions). For a more complete characterization of flood hazard and risk, the flood response of many synthetic events needs to be modeled, allowing the derivation, for example, of return levels of flood depth at all points within the model domain (i.e., “response-based” flood hazard analysis).

In this study, we present a framework for generating many synthetic but physically plausible compound events consist-

ing of storm-tide hydrographs and RF fields that can act as boundary conditions for dynamic compound flood models. We first estimate the joint probability distribution of flood drivers following Maduwantha et al. (2024) and utilize time series of RF and NTR of observed events to generate a synthetic event set. We explicitly account for the intra-annual and longer-term variability of m.s.l. and tides, tide-surge interactions, and relative lag times between the peaks of flood drivers. Then, we use flood model simulations to assess the importance of accounting for m.s.l. and tidal variability in the boundary condition’s generation process. We apply the proposed framework for Gloucester City, New Jersey, as a case study.

2 Study area

Gloucester City is located in Camden County, New Jersey, and has been impacted by several severe compound flood events in recent years, caused by hurricanes and other intense storms, including Hurricanes Floyd in 1999, Irene in 2011, Sandy in 2012, and an unnamed storm in 2015. The city is bordered by the Delaware River from the west, Newton Creek to the north, and Little Timber Creek to the south exposing the area to flooding from multiple water sources. According to the Federal Emergency Management Agency (FEMA), a substantial portion of the city’s land area falls within designated flood zones, and over 1100 residential and commercial properties are exposed to major, severe, or extreme flood risk (Gloucester City New Jersey, 2024; FEMA, 2016). We select the catchment area for Gloucester City comprising two 14-digit hydrologic units (Fig. 1) (Jones et al., 2022).

3 Data

For the statistical analysis, we consider RF and NTR as flood drivers. We use hourly water level data from the nearest tide gauges to the study site provided by the National Oceanic and Atmospheric Administration (NOAA): Philadelphia (St. ID: 8545240) and Philadelphia Pier 11-north (St. ID: 8545530). The two datasets are merged, adjusting a 1 cm constant offset between the two records during the overlapping period. This results in a 122-year-long dataset from 1901 to 2021 with less than 3 % of missing data. The water level time series is then detrended using a 30 d moving average to eliminate the effects of long-term relative m.s.l. rise and seasonal and interannual m.s.l. variability. Subsequently, a year-by-year harmonic tidal analysis is conducted using the Unified Tidal Analysis and Prediction (UTide) package in MATLAB to determine tidal constituents and tidal levels (Codiga, 2011). Years with more than 25 % missing data are removed from the analysis (1903, 1921, 1922, and 1959). We calculate the hourly NTR time series by subtracting the predicted tides from the detrended water levels.

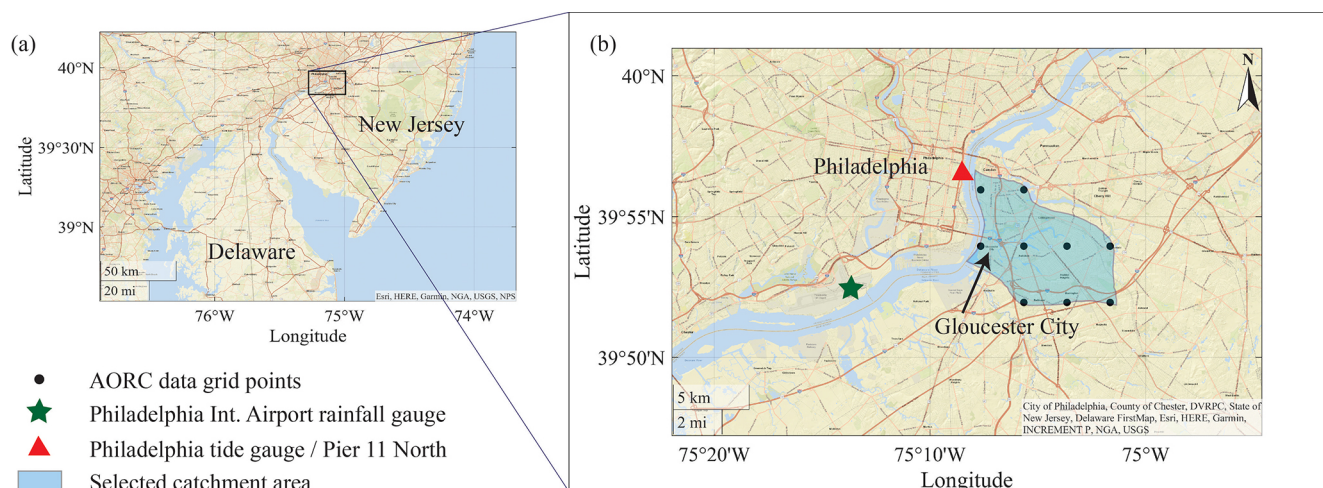


Figure 1. Location of Gloucester City, selected catchment boundaries, locations of the rainfall gauge, tide gauge, and grid points of the Analysis of Period of Record for Calibration (AORC) data.

We use both gridded RF data from the Analysis of Period of Record for Calibration (AORC) from 1979 to 2021 and hourly RF gauge data at the Philadelphia International Airport from 1900 to 2021 (Kitzmillier et al., 2018). Although radar-based quantitative precipitation estimates, such as the Multi-Radar Multi-Sensor (MRMS) products, often provide higher accuracy compared to other gridded rainfall products, their temporal coverage is relatively short (Gao et al., 2021; Gomez et al., 2024). We use AORC rainfall data because of its availability from 1979 and its demonstrated higher accuracy among products with similar temporal coverage (e.g., Hong et al., 2024; Kim and Villarini, 2022), while offering hourly data at ~ 4 km spatial resolution. Rain gauges measure highly localized rainfall. Assuming that these point measurements occurred uniformly distributed across the entire catchment can misrepresent the compound flood hazard. To address this, we apply a bias correction to the hourly gauge data so it matches the basin-averaged hourly rainfall estimates derived from AORC. This correction is performed using the quantile mapping method, in which both the gauge-based and AORC-based rainfall distributions are fitted to gamma functions (for more details see Maduwantha et al., 2024).

For identifying TC events, we use the HURDAT2 TC track dataset from the National Hurricane Center, which provides the location of the center of circulation at 6 h intervals (Landsea and Franklin, 2013). Considering the overlapping periods of available datasets, the joint probability analysis is conducted for the period from 1901 to 2021.

4 Methods

The overall methodology to derive synthetic boundary conditions for compound flood inundation modeling with as-

sociated annual exceedance probabilities is outlined in the flowchart in Fig. 2. In the following subsections we describe the process in more detail and refer to the relevant boxes (or groups of boxes) in the flowchart for better clarity.

4.1 Joint probability estimation

Recent data-driven threshold-selection methods, such as the Sequential Goodness-of-Fit method (Bader et al., 2018), the Extrapolated-Height Stability method (Liang et al., 2019), *L*-moment ratio stability (Silva Lomba and Fraga Alves, 2020), and a comparative multi-method approach (Radfar et al., 2022), provide robust peak-over-threshold (POT) thresholds but primarily optimize tail fit. Extreme compound flood events are not necessarily generated by extreme flood driver peaks. With favorable timing, duration, and tidal conditions, extreme flooding can occur even under moderate flood-driver conditions (Santamaria-Aguilar et al., 2025). Therefore, we use a two-sided conditional sampling based on the POT approach to identify extreme events, setting NTR and RF thresholds to obtain samples allowing an average of 5 exceedances per year (Jane et al., 2020; Kim et al., 2023). When conditioning on NTR, the maximum RF value within a 3 d window is selected, and the same procedure is followed when conditioning on RF. To ensure independence within the POT samples, a 5 d declustering window (2.5 d before and after the event peaks) is used (Camus et al., 2021). Next, the two conditional samples are stratified into two sets, TC events and non-TC events, using the TC track data set. An event is classified as being caused by a TC if there is a center of circulation within a 350 km radius of the Gloucester City catchment within a 3 d window (2 d before and 1 d after) of a POT event. All other events are categorized as non-TC events. This process is carried out for hourly RF accumulation times from 1 to 48 h; the RF accumulation time that has the highest

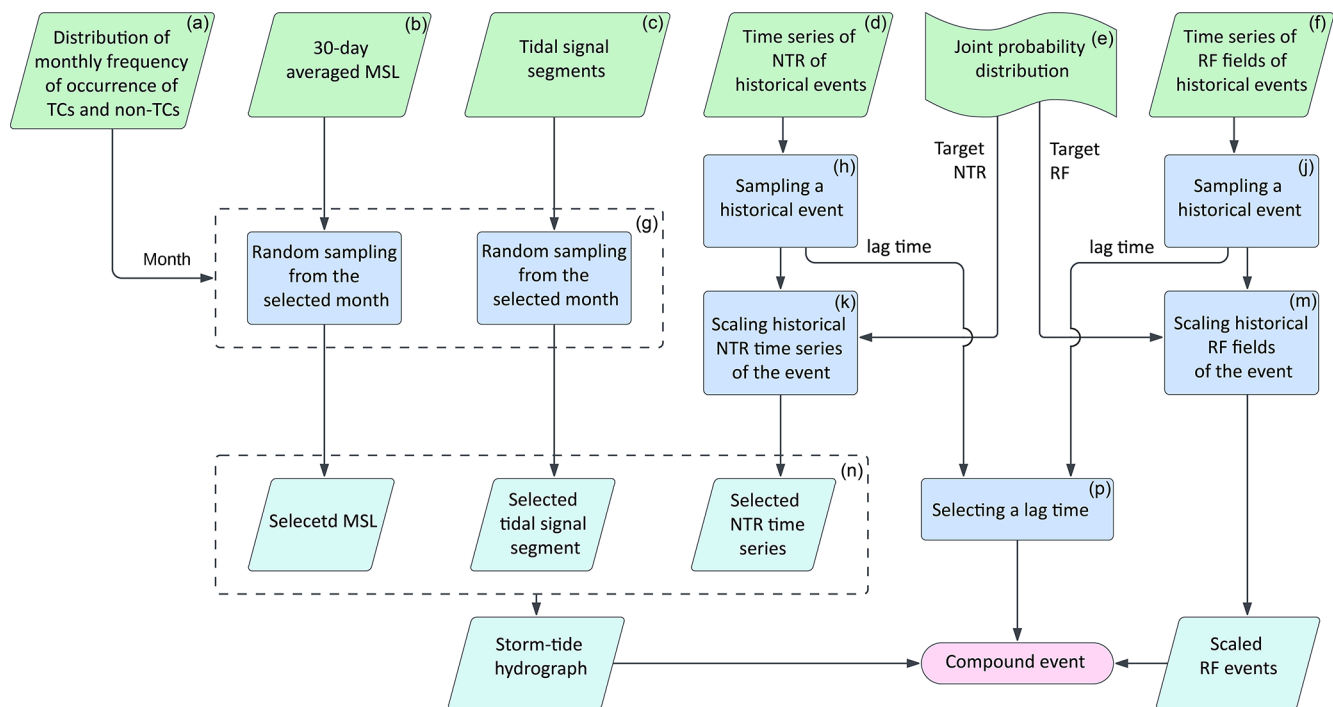


Figure 2. Workflow of the framework.

correlation with NTR is selected for the subsequent bivariate statistical analysis. Maduwantha et al. (2024) found significant non-stationarity in Kendall's τ between peak NTR and RF over the analysis period. To capture most recent climate conditions and avoid underestimating compounding effects, we model dependence using only the last 30 years of data. The stratified samples (TC and non-TC) are then fitted to different parametric univariate distributions and copulas to identify the best-fitting marginal distributions and copula families, respectively. Considering the recommendations of Moftakhari et al. (2019) for compound flood assessments, we use the “AND” scenario which represents the exceedance of both variables for calculating annual joint exceedance probabilities (AEPs). The calculated AEPs of two stratified samples are then combined to estimate the final joint probability distribution. To quantify relative joint probabilities along a given isoline, we sample 10^6 NTR and RF combinations from the fitted copulas, ensuring the proportion of extremes matches the empirical distribution. The relative probability along the isolines is then calculated using a kernel density function, with the “most likely” event assigned to the point of highest relative probability density on the isoline (Salvadori and De Michele, 2013). A more detailed description of the methodology can be found in Maduwantha et al. (2024).

We generate an event set of 5000 combinations of NTR and RF (“target events”) by sampling from the fitted copulas such that the relative proportion of extremes is consistent with the empirical distribution. This initial event set contains the peak NTR and peak basin average RF for the selected RF

accumulation time reflecting their joint probability of occurrence at the study site (Fig. 2e). In the following subsections, we outline how those peak values are turned into storm-tide hydrographs and temporally varying RF fields with realistic lag times between the peaks of NTR and RF.

4.2 Characteristics of NTR and RF time series from TC and non-TC events

Before generating the final synthetic events, we compare the characteristics of TC events and non-TC events to determine whether event generation should be conducted separately for TC and non-TC events or if we can draw time series from the combined dataset, allowing for more variability in the final event set. We extract hourly time series of NTR (Fig. 2d) and hourly RF fields (Fig. 2f) over the Gloucester City catchment during a three-day period around all POT events. This analysis is limited to POT events recorded after January 1979, the start date of the gridded AORC RF data. The joint probability distribution derived in Sect. 4.1 explicitly accounts for the two different dependence structures between peak NTR and RF for the two different storm types. In this analysis step, we examine the correlations between various characteristics of the time series, including hourly peaks, durations, intensities, and lag times. Additionally, we assess the distributional shapes of peak RF, total RF, RF duration, lag time, NTR duration, and NTR intensity by fitting them to appropriate parametric distributions. We consider Normal, Exponential, Gamma, Lognormal, Birnbaum-Saunders, and gen-

eralized Pareto distributions, selecting the best model using the Akaike information criterion (AIC; Akaike, 1974). Previous studies indicate that TCs generally produce more intense RF compared to extratropical cyclones (ETCs), while ETCs often generate longer-duration RF (e.g., Orton et al., 2016; Sinclair et al., 2020). Therefore, we analyze the shapes and durations of the NTR and RF time series from observed events to determine whether there are significant differences between TC and non-TC event time series.

We use a 6 h continuous dry period to identify independent RF events, and the duration of a given RF event is defined as the non-zero basin average RF to the starting hour of the next 6 h dry spell. Here we calculate the total RF as the sum of all the basin-averaged hourly RF quantities of the event. The duration of the NTR events is defined as the duration over which the NTR is continuously above the defined threshold. The intensity of the NTR is calculated as the area under the NTR time series curve above zero within the duration.

4.3 The events generation process

4.3.1 Selecting observed events

To disaggregate the target basin average peak RF spatially and temporally, we select a historical event that closely matches the accumulated RF of the target basin average RF. Given the limited number of observed events, selecting only the nearest event would result in utilizing a single or small number of observed events for all the nearby target scenarios, thereby restricting the diversity of the generated events. Additionally, when the selected RF event is largely different from the target RF, the scaling factor becomes higher and may result in making the synthetic event unrealistic. Therefore, we randomly sample from the observed events, with probabilities defined as the inverse of the difference between target RF and peak basin average RF quantities (of the selected RF accumulation time) of historical events (Fig. 2j). For NTR, we also use the same method for selecting a nearby event using the inverse of the difference between the target NTR and peak hourly NTR of the historical events (Fig. 2h).

4.3.2 Scaling observed events

We use a similar scaling approach to that introduced by Kim et al. (2023) for assigning time series of data to match target scenarios (peak NTR and peak basin average RF pairs). We calculate the RF scaling factor K_{RF} as follows:

$$K_{\text{RF}} = \text{RF}_T / \text{RF}_{\text{obs}} \quad (1)$$

where, RF_T is the target RF and RF_{obs} is the peak basin average RF (of selected accumulation time) of the selected observed event. Then we multiply the hourly observed RF fields by the scaling factor K_{RF} , generating a synthetic RF event with a peak accumulation that matches that of the target RF (Fig. 2m).

For NTR, we calculate the NTR scaling factor K_{NTR} as follows:

$$K_{\text{NTR}} = \text{NTR}_T / \text{NTR}_{\text{obs}} \quad (2)$$

where, NTR_T is the target NTR peak and NTR_{obs} is the peak hourly NTR of the selected observed event. Then we multiply the hourly time series of the NTR by the scaling factor K_{NTR} , generating a synthetic NTR event with a peak that matches the peak target NTR (Fig. 2k). Here we only consider the section of the NTR time series for which the NTR is positive around the peak.

4.3.3 Combining scaled NTR time series with tides and m.s.l.

Dynamic compound flood models require total water level time series as boundary conditions which comprise the tide, m.s.l., and NTR (in some cases also waves, depending on the location). All of those exhibit seasonal variations, which can be significant and, therefore, cannot be ignored (for NTR this is captured through stratification into TC and non-TC events). As a preliminary step, we assess the variability of m.s.l. and the high and low tides throughout the year, categorized by calendar months. As explained in Maduwantha et al. (2024), we apply a 30 d moving average to the measured water level data to remove any trends before conducting the tidal analysis. We then segregate the 30 d averaged m.s.l. values of the last five years (to ensure that the analysis reflects the most recent conditions) by calendar month. For tides, we extract hourly tidal signal segments spanning 3 d periods around each high tide, covering the last 18.6 years to account for the lunar nodal cycle. These segments are then grouped by calendar month.

To ensure consistency with seasonal variations, we first sample a month based on the distribution of POT observations recorded in each month (i.e., the monthly frequency of occurrence). Target events are derived from copulas fitted to the TC sample and the non-TC sample. If the target event is derived from a copula fitted to TC (non-TC) events, we sample the month from the distribution of TC (non-TC) events (Fig. 2a). Once the month is selected, we randomly sample a m.s.l. value and a tidal signal segment from the selected month (Fig. 2g).

Considering that tide-surge interactions are significant in certain regions, tides, and wind-driven storm surges (here NTR) often show interdependencies. Therefore, it is important to check the variability of the timing of peak NTR relative to tidal levels to determine whether it is necessary to explicitly account for tide-surge interactions when generating synthetic events. Here, we use the observed time difference between peak NTR and the subsequent high tide of the sampled NTR time series to combine it with the sampled tidal signal. Then the sampled m.s.l. value is added, generating the storm tide hydrograph (Fig. 2n).

4.3.4 Combining storm tide hydrograph and RF fields

As the final step, the scaled RF fields and calculated storm tide hydrographs are combined to create compound events that can be simulated through a flood model. The timing dynamics of the flood drivers play a vital role in the resultant flood depth (Gori et al., 2020). Therefore, we randomly pick one of the observed lag times (between the peak hourly NTR and peak hourly basin average RF) from the selected NTR event and selected RF event for creating the synthetic compound event (Fig. 2p).

4.4 Assessing the effects of m.s.l. and tidal variability on flood hazard

One advancement of the proposed framework over the approach outlined in Kim et al. (2023) is the inclusion of m.s.l. and tides, along with their intra- and inter-annual variability. To assess how this variability affects compound flooding, we use the SFINCS model. SFINCS is a reduced-complexity model designed to simulate flooding from multiple drivers, such as storm surge, river discharge, and precipitation (Leijnse et al., 2021). It offers a simplified yet robust approach to modeling the complex interactions between flood drivers, balancing computational efficiency with accuracy. We define the flood model domain as the catchment area comprising the 14-digit hydrologic units of the two creeks (Newton and Little Timber Creeks) that surround Gloucester City to account for all the runoff that can produce pluvial flooding in the study site. The inland catchment area boundaries are defined as outflow boundaries to allow water to exit the domain. For the coastal boundary, we place an open boundary along the middle of the Delaware River, defined by the catchment polygons described earlier. We use the Coastal National Elevation Database (CoNED) from the U.S. Geological Survey, a Digital Elevation Model (DEM) with a horizontal resolution of 1 m and a vertical accuracy of 10 cm (Danielson et al., 2016). We use the subgrid approach of SFINCS with a dual resolution of 10 and 1 m. For surface roughness, we use land cover data from the NJDEP (New Jersey Department of Environmental Protection) Bureau of GIS, converting land classifications into Manning's coefficients based on guidance from the U.S. Army Corps of Engineers (US Army Corps of Engineers (USACE), 2024). Water level boundary conditions are provided as the time series at the location of the Philadelphia tide gauge. RF forcing is applied as spatially varying fields, with the same resolution as the AORC data, and SFINCS interpolates these onto the model grid resolution. The model is run with the advection term neglected, solving the local inertia equations (we tested the sensitivity of the results when the advection term was enabled, but changes were negligible). We use the GPU version of SFINCS and ran the simulations on an Intel (R) Core (TM) i7-13700KF CPU and NVIDIA GeForce RTX 4080 GPU.

The lack of observed flood data to validate and calibrate flood models is a common challenge (see e.g., Merz et al., 2024; Molinari et al., 2019). For this case study, we search for historical flood information from several different sources, including high-water marks from USGS (United States Geological Survey), satellite images, the NOAA storm event dataset, FEMA Flood Risk Map, local news, and crowd-sourced platforms such as social media and citizen science platforms. However, very little information was found to perform a quantitative validation of the simulated water depths and extents. Due to the lack of observed historical flood data, we perform a qualitative validation comparing a few known flooded areas with simulated flooded sites for this qualitative validation, we also use local expert knowledge on areas that are frequently flooded as well as a few known flooded areas from past events from the previously listed sources. Overall, we find good agreement between the model output and the reported flood depths. A detailed description of the model validation can be found in Appendix 1 of Pollack et al. (2025).

To quantify the impact of including m.s.l. and tide variations in the framework, we designed the following experiment. We use the most-likely event with 0.01 AEP (i.e., 100-year return period), determined from the derived joint probability distribution, as the target scenario for all simulations. Using the developed framework, we generate many most-likely 0.01 AEP events. A single event is then selected where the peak NTR coincides with high tide, as tidal variability would have less impact on flood depths if the peak NTR occurred during low tide. Then, we modify only the specific parameter of interest (m.s.l. or tide) of the selected event while keeping all other event characteristics the same. To assess the impact of m.s.l., we change the m.s.l. to the lowest and highest 30 d averaged m.s.l. values recorded in the past five years and simulate the compound flooding. For tidal influences, we use tidal signal segments with the lowest and highest high tides over the last 18.6 years of the study period. This analysis allows us to assess the individual contributions from the variability of m.s.l. and tides to overall flood hazard and better understand how critical it is to align with the seasonality when combining m.s.l. and tide with NTR time series.

5 Results

5.1 Joint probability distribution

The threshold for NTR is set to 0.63 m, resulting in a total of 580 POT events (that is consistent with 5 events per year on average). For RF, thresholds are set to also obtain 580 POT events for each RF accumulation time from 1 to 48 h. The 18 h RF accumulation time exhibits the strongest correlation with the peak NTR. Therefore, the 18 h RF accumulation is selected for subsequent analysis. After stratifying these events into TC and non-TC, 38 are identified as TCs

when conditioned on NTR, and 43 when conditioned on RF, with the remaining events categorized as non-TCs. The conditioning variable of each stratified sample is fit to a Generalized Pareto Distribution (GPD). For the conditioned variable, several parametric distributions are tested. Selected marginal distributions and quantile plots for each sample are shown in Fig. S1 in the Supplement. The rotated Tawn type 2 (180°) copula provides the best fit for both conditioning samples of TC events. For the non-TC events, the Frank-Joe Copula is selected for the sample conditioning NTR and Clayton Copula for the sample conditioning RF. The quantile isolines after combining the joint probability distributions of the two storm populations (TC and non-TC) are shown in Fig. 3 (for a more detailed description, refer to Maduwantha et al., 2024). Here we use the framework to derive 5000 combinations of peak NTR and RF by sampling from the fitted copulas such that the relative proportion of extremes is consistent with the empirical distribution (see Fig. 3b).

5.2 Characteristics of TC events and non-TC events

We use Kendall's rank correlation coefficient τ to measure the strength of dependence between different attributes of observed events falling into the TC and non-TC categories. The correlations between NTR duration and peak NTR (Fig. 4a), NTR intensity and peak NTR (Fig. 4d), total RF and peak hourly RF (Fig. 4k) are strong, positive, and statistically significant. The lag times of the observed events are predominantly positive, indicating that the peak hourly RF typically occurs before the peak NTR. The correlation between lag time and peak RF (Fig. 4i) is weakly to moderately negative, but statistically significant only for the non-TC sample. However, Fig. 4e and i show that events with higher peaks of NTR or RF generally tend to have shorter lag times. There is no significant correlation between RF duration and NTR duration in both TC and non-TC samples (see Fig. 4c). To further examine differences in the pairwise correlations in TC and non-TC samples, we derive the confidence intervals associated with the values of Kendall's τ (Fig. 5). Only the NTR hourly peak vs. RF hourly peak and NTR intensity vs. total RF exhibit non-overlapping 95 % confidence intervals, whereas in all other cases, the confidence intervals for TC and non-TC events overlap.

The NTR duration, NTR intensity, lag time, RF duration, peak hourly RF, and total RF observations are fitted to various parametric distributions, with the best fitting selected based on AIC. Figure 6 displays the estimated parameters of the selected distributions along with their 95 % confidence intervals. For all parameter values, the confidence intervals for TC events overlap with those of non-TC events, except for the scale parameter of the RF duration. The goodness of fit of the parametric distributions is shown in Fig. S2 of the Supplement. As described in Sect. 4.2, we also check the time evolution of the NTR and basin-averaged RF of the observed POT events. Figure 7 shows the hourly time series of

NTR and basin average RF of observed events around the peak. Although peak RF is higher for TC events compared to non-TCs, the overall shape of the NTR time series and basin-average RF is similar for both storm types. Therefore, TC and non-TC RF and NTR time series are randomly sampled (and scaled to the target peak values) without stratifying by storm type.

We emphasize that stratification is still conducted and important when deriving the joint probability distribution because TC and non-TC events exhibit different dependence between NTR and RF. However, the relevant characteristics of the complete time series of the different event types are similar, as shown in this section. Therefore, to have a larger sample to draw from (especially in the TC case) we do not treat TC and non-TC events separately when selecting observed event time series for subsequent scaling. We elaborate on this more in the Discussion section.

5.3 Event generation process

Figure 8 illustrates the procedure for generating an event with a 106-year joint return period, consisting of a 1.75 m NTR and 80 mm 18 h basin-average RF. Since the target event was simulated from the copula that was fit to the TC sample, the event month was randomly sampled from the frequency of TC occurrences in each month (Fig. 8d). For the selected event, the month of July was sampled. After that, a m.s.l. value of 0.3 m was selected from the m.s.l. distribution for the month of July (Fig. 8e). To generate the storm tide hydrograph, an NTR time series was sampled from the observed events (regardless of storm type) (Fig. 8g) and scaled to match the target value (Fig. 8h). The NTR time series was subsequently combined with the sampled m.s.l. and a randomly selected tidal signal segment, chosen from the set of tidal signal segments for the month of July (Fig. 8f). For generating RF fields, an RF event was sampled (regardless of storm type) from all available events (Fig. 8b) and scaled to match the target 18 h RF (Fig. 8c). Figure 8k shows the scaled RF fields at selected hours, demonstrating the spatio-temporal variability in the RF fields. A 6 h time lag, originally associated with the selected RF event, was used to combine the RF time series with the storm tide hydrograph (Fig. 8m).

The proposed framework was implemented to generate 5000 synthetic events, consisting of hourly still water levels (storm tide hydrograph) at the Philadelphia tide gauge and hourly RF fields over the Gloucester City catchment. Figure 9 shows the scatter plots comparing various characteristics of the time series, including hourly peaks, durations, intensities, and lag times for both observed and simulated events. Overall, the spread and correlation for each pair of parameters in the simulated events are consistent with those in the observed events.

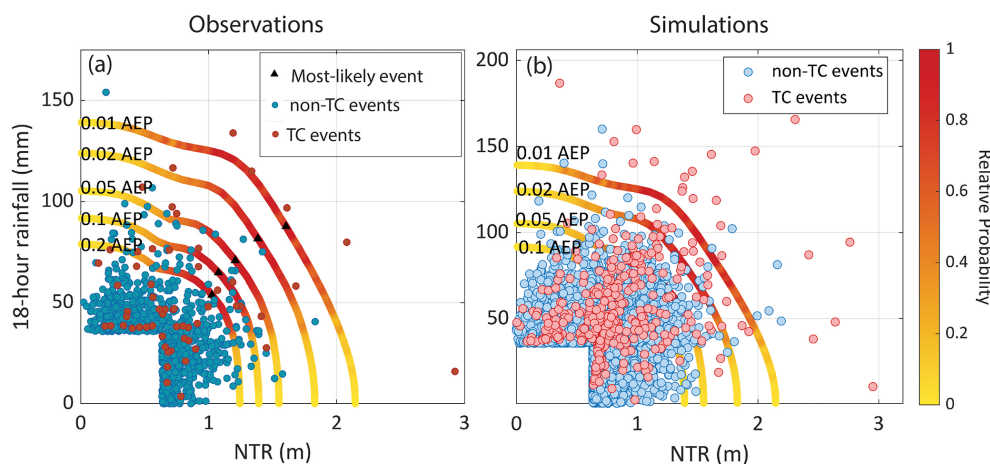


Figure 3. Joint probability isolines after combining the AEPs of the two populations (TC and non-TC) with (a) observations, and (b) simulations. The color scale indicates the relative probability of events along the isolines. The location of the “most likely” event is assigned to the point with the highest relative probability density on an isoline (black triangles in a).

5.4 Flood model simulations and role of m.s.l. and tide variation

A most-likely 0.01 AEP event (see black triangle in Fig. 3a) was used to assess the impact of tidal and m.s.l. variability on flood depth and extent. To assess m.s.l. impact, we simulate flooding by adjusting the m.s.l. to the lowest (-0.198 m, above NAVD88) and highest (0.540 m, above NAVD88) 30 d average values recorded over the past five years. For tidal influences, we use tidal segments with the lowest and highest high tides observed over the last 18.6 years. Figure 10 illustrates the maximum flood depth and extent resulting from each scenario during the flood model simulations. There is a significant difference in flood depth and extent when comparing the simulation results of applying the maximum and minimum tide (or m.s.l.). Flood depths reach up to 1.5 meters in certain areas when the highest 30 d m.s.l. is used for generating the storm-tide hydrograph. The difference in flood depths between using the highest and lowest 30 d m.s.l. reaches up to 1 m in some areas of the city. Similarly, applying the tidal signal segment with the highest high tide causes flood depths to reach 2 m in several areas, with increases over 1.2 m compared to using the segment with the lowest high tide. These changes in flood depths are particularly pronounced along the Delaware River and Newton Creek, where the influence of coastal water levels is strongest.

6 Discussion

A detailed description of the procedure for estimating the joint probability distribution applied in this study is provided in Maduwantha et al. (2024). When applying the two-way sampling to extract POT events, we used a 3 d pairing window to capture peak NTR and RF, following similar studies

(Couasnon et al., 2020; Kim et al., 2023). We also manually checked the RF and NTR time series of POT events and found that a 3 d window was generally sufficient to capture both peaks in the vast majority of cases. To ensure independence within the POT samples, previous studies have applied various declustering windows (e.g., 3 d (Haigh et al., 2016), 7 d (Santos et al., 2021), 10 d (Kim et al., 2023), and 14 d (Terlinden-Ruhl et al., 2025)). Longer declustering windows are often adopted when the influence of river discharge is present, as its effects can persist for several days or more (Terlinden-Ruhl et al., 2025). In this study, we use a 5 d declustering window (2.5 d before and after the event peaks), as highly elevated NTR rarely lasts more than 5 d at the tide gauge location. Previous studies have applied various search radii to identify TC events, such as ~ 400 km (Kim et al., 2023) and 500 km (Towey et al., 2022). In this study, we tested the sensitivity of the correlation between peak NTR and peak accumulated RF to the TC search radius, following Kim et al. (2023). Increasing the search radius captures more nearby TC tracks but also introduces events that are too distant to strongly influence flooding drivers at the study site, thereby reducing the overall correlation between RF and NTR of the TC sample. We selected a 350 km search radius, as it provided a higher correlation between drivers while still retaining a reasonable number of TC events in the sample.

Maduwantha et al. (2024) identified a strong correlation between peak NTR and peak RF when the extreme events are caused by TCs in the Gloucester City region, suggesting that there is a higher potential for compound flooding by TCs in the study region (Fig. S3a and c in the Supplement). The non-TC events, which include ETCs and convective RF events, exhibit a weaker correlation between peak NTR and RF. Consequently, TC and non-TC events were treated as two distinct populations in the joint probability analysis, leading to more accurate and robust estimates com-

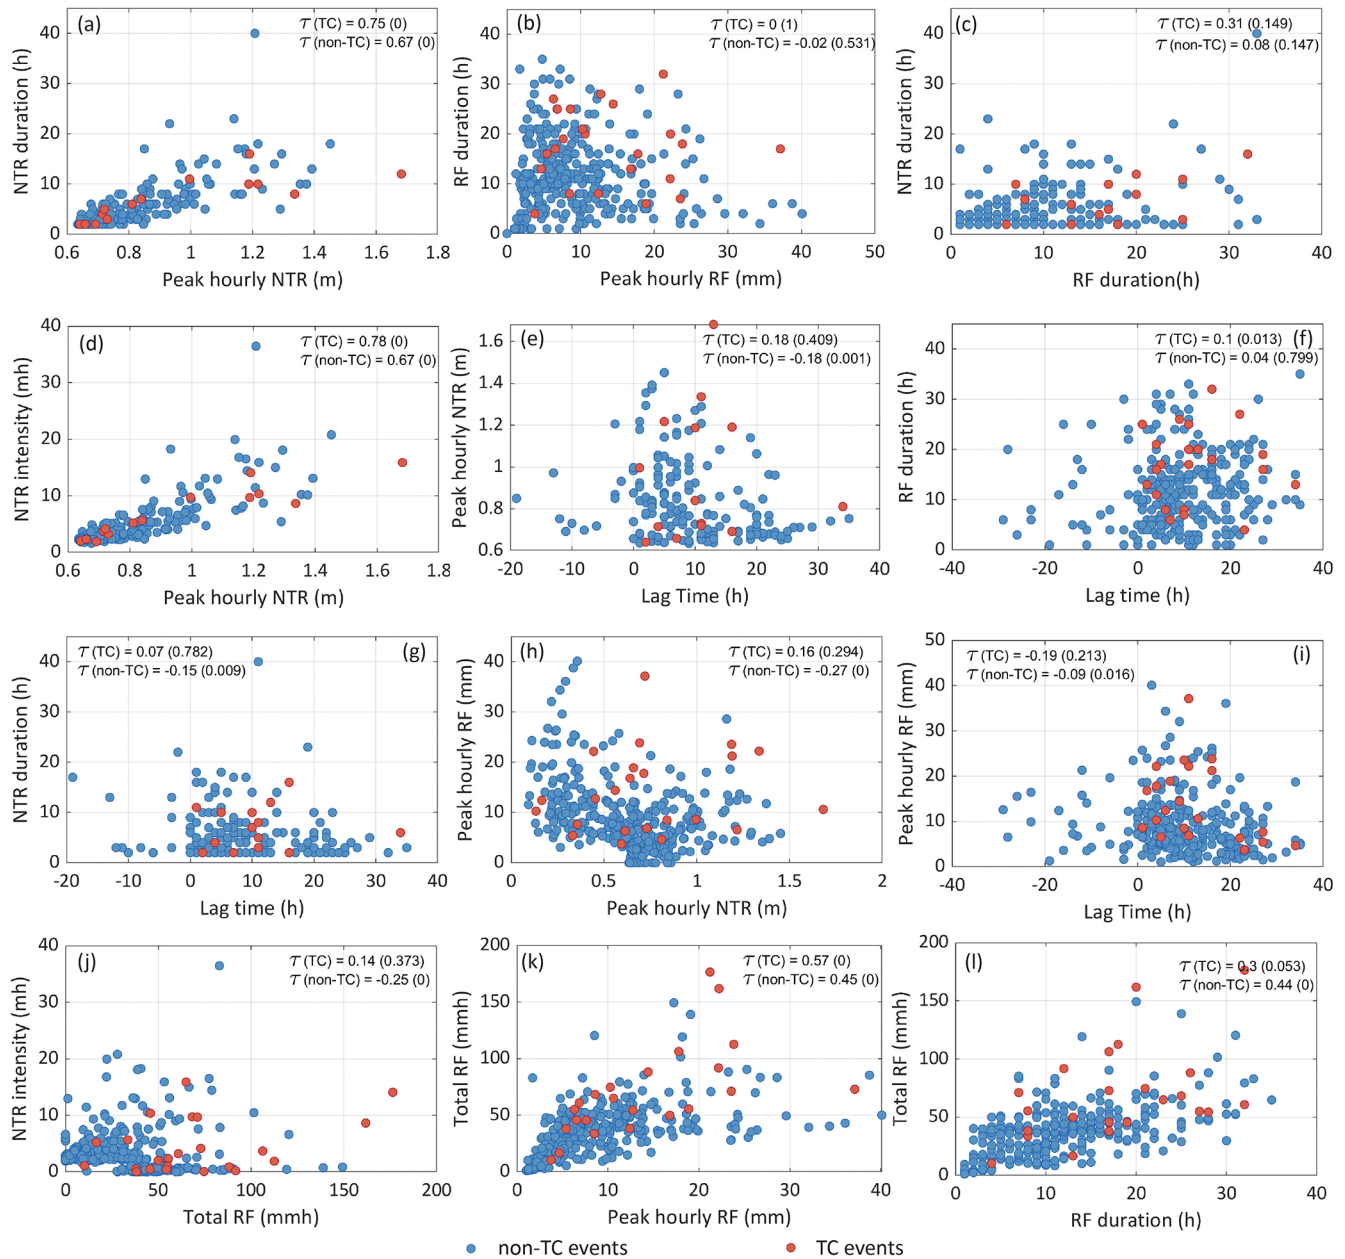


Figure 4. Scatter plots between (a) NTR duration and peak NTR, (b) RF duration and peak hourly RF, (c) NTR duration and RF duration, (d) NTR intensity and peak NTR, (e) peak NTR and lag time, (f) RF duration and lag time, (g) NTR duration and lag time, (h) peak hourly RF and peak NTR, (i) Peak hourly RF and lag time, (j) NTR intensity and total RF, (k) total RF (sum of all the basin-averaged hourly RF quantities of the event) and peak hourly RF, (l) total RF and RF duration, of observed TC events (red) and non-TC events (blue). Kendall's τ for each sample with the corresponding p-value (in brackets) is shown in each panel.

pared to modeling them as a single population (Maduwantha et al., 2024). The joint probability distributions of peak NTR and peak RF of TC and non-TC storms are substantially different. Small to moderate compound events are more frequent in the non-TC storms, whereas the most extreme compound events are more likely generated by TCs. For example, the selected event for demonstrating the event-generation framework (NTR = 1.75 m, 18 h RF = 80 mm) corresponds

to a ~ 106 -year joint return period in the combined joint probability distribution. The same event has a joint return period of ~ 111 years in the TC sample and ~ 2431 years in the non-TC sample, highlighting that rare events are primarily associated with TCs. Here, the generated 5000 combinations of peak NTR and RF by sampling from the fitted copulas provide 1000 years' worth of extreme events (5 events per

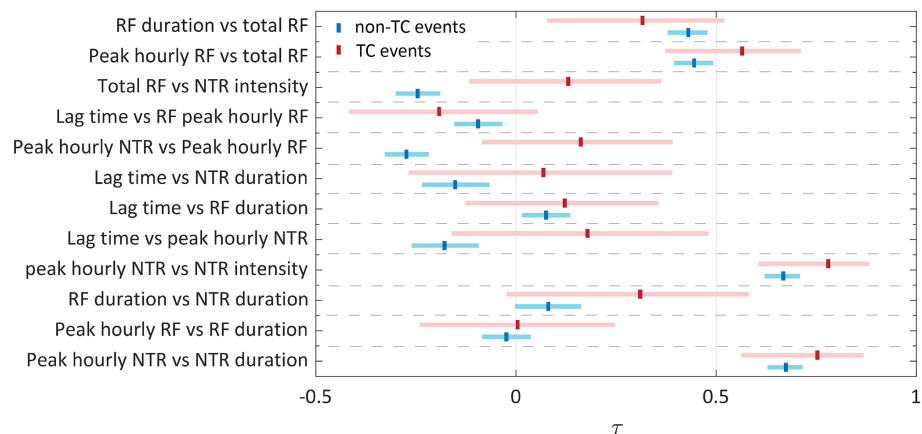


Figure 5. Kendall's τ for different parameters of observed TC events (red) and non-TC events (blue). The light color range indicates the associated 95 % confidence intervals.

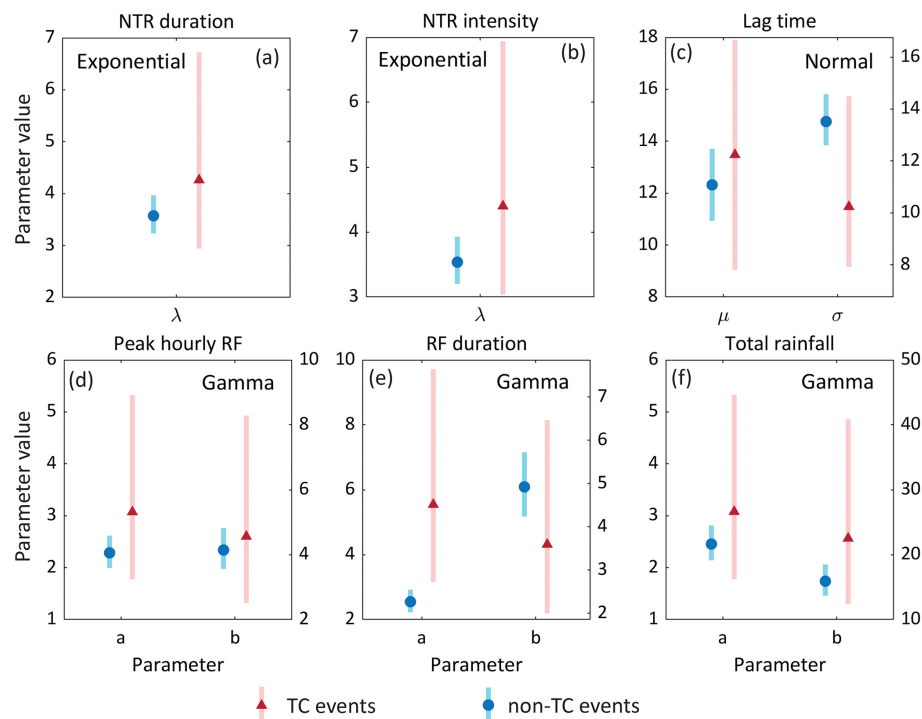


Figure 6. Parameter values of the fitted parametric distributions with their 95 % confidence intervals for TC events (red) and non-TC events (blue). The selected parametric distribution is shown in each panel.

year on average), reflecting the joint probability distribution of NTR and RF.

Considering the distinct properties of TCs compared to ETCs and other storm types, it is crucial to account for the unique characteristics of these flood drivers in the synthetic event generation process. Therefore, the most effective approach would be to use observed time series of flood drivers from TC events exclusively for generating synthetic TC events, while using those from non-TC events separately to generate synthetic non-TC events. This separation allows

for a more accurate representation of the differences in timing (of peak storm surge and peak RF), intensity, duration, and spatial patterns between TC and non-TC events, ensuring that the synthetic events realistically reflect the distinct physical properties associated with each storm type. However, the small number of TCs in the historical record, due to their infrequent occurrence, presents a challenge when generating many synthetic events. A limited TC dataset may not fully reflect the inherent variability and the full range of possible events through the event generation process. Therefore,

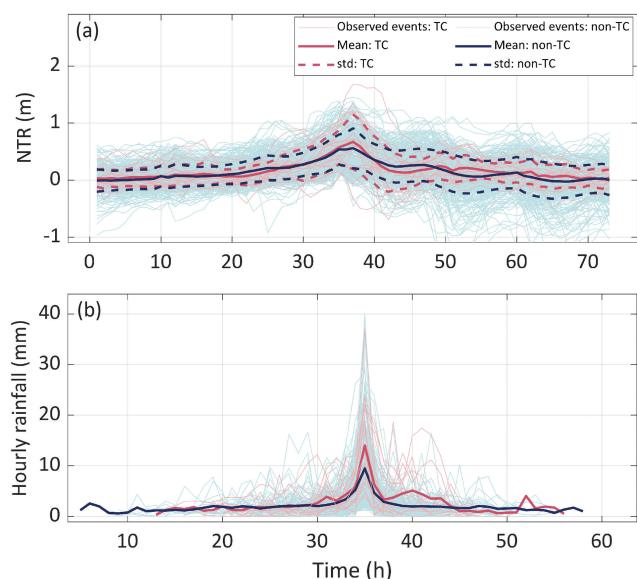


Figure 7. Hourly time series of (a) NTR and (b) basin average RF of observed events besides the peak. The solid lines show the mean value of each time step of TC events (red) and non-TC events (blue). The dashed lines of (a) represent the standard deviation around the mean at each time step.

we assess whether the event generation process can be applied to the entire sample, combining both TC and non-TC events while still preserving key characteristics of the flood drivers. To inform this decision, we examined various time series attributes of NTR and RF, such as magnitudes, durations, shapes, and timing of the peaks.

Kendall's τ for the hourly peak and duration of the NTR time series shows a strong positive correlation (see Fig. 4a), suggesting that more intense storm surge events tend to last longer in the study region. In contrast, for RF there is no significant correlation between the hourly peak and the duration of the basin-average RF, as indicated by τ values closer to zero (see Fig. 4b). However, the confidence intervals of τ , as shown in Fig. 5, indicate that the strength of dependence between the tested characteristics does not differ significantly between the two storm types. It is well known that TCs typically produce more intense RF than ETCs, whereas ETCs tend to be larger in size and generate RF for prolonged durations (e.g., Orton et al., 2016; Sinclair et al., 2020). However, this behavior is not evident in the statistical properties of the observed POT events, as shown in Figs. 4 to 6. Several factors could explain this. First, the non-TC sample may include TCs that passed beyond the 350 km search radius but still contributed RF and storm surge to the Gloucester City catchment. Second, the non-TC sample also contains locally generated convective RF events, which, although shorter in duration, can produce severe RF intensities (Pfahl and Wernli, 2012). Further, the smaller number of observed TC events may lead to statistically significant correlations going unde-

tected and wider confidence intervals, limiting the ability to discern distinct patterns. One option to overcome the limited TC sample size in our analysis is employing physics-based models to generate time series of flood drivers from synthetic TC tracks (e.g., Emanuel et al., 2006; Gori et al., 2020). We plan to explore this in future work. The relatively small size of the Gloucester City catchment also means that we analyze only parts of the spatial variability associated with different storm types.

The comparison of distribution parameters fitted to peak RF, total RF, RF duration, lag time, NTR duration, and NTR intensity also suggests no significant differences between the various characteristics of TCs and non-TCs (see Fig. 6). Similarly, the shapes of the NTR and basin-average RF time series produced by TCs are not significantly different from those generated by non-TC events (see Fig. 7). Given these results we conclude that sampling and scaling of the observed event time series (i.e., water level hydrographs and RF hyetographs) separately for the two storm types would produce similar results compared to the ones we derive without stratifying. Note, that stratification is still applied when deriving the joint probability distribution since the dependence structure of the peaks of NTR and RF is substantially different. Importantly, this applies to the specific study location. In other places, significant differences may exist in the time series characteristics between TC and non-TC samples (as discussed in Sect. 4.2), warranting that the event generation process is also conducted separately for each storm type.

In the event generation process described in Sect. 4.3, steps are taken to ensure the synthetic events are both realistic and physically plausible. While lag times between peak NTR and peak RF can vary a lot, more extreme events tend to exhibit shorter lag times (see Figs. 4e and i). To incorporate this behavior into the synthetic events, we not only select nearby historical events for scaling but also adopt the lag time from one of the selected events. At the Philadelphia tide gauge, peak NTR often occurs 4–5 h before the next high tide (see Fig. S4 in the Supplement). To account for this, we combined scaled NTR with tide predictions using the observed lag between peak NTR and subsequent high tide of the sampled NTR event (see Sect. 4.3.3). These steps ensure that synthetic compound events retain the same temporal dynamics as similar observed events.

Mean sea level exhibits both long-term trends and seasonal variability, which is often driven by regional climate characteristics (Barroso et al., 2024). Detection of this seasonality is crucial, as the risk of flooding increases significantly when elevated m.s.l. coincides with storm activity and/or seasonal high tides (known as king tides), compared to when these peaks are out of phase (Barroso et al., 2024; Dangendorf et al., 2013; Thompson et al., 2021). At the Philadelphia tide gauge, the 30 d averaged m.s.l. varies by approximately 0.7 m over the last five years of the study period, highlighting the importance of incorporating this variability into flood modeling frameworks. The long-term variations of tides have also

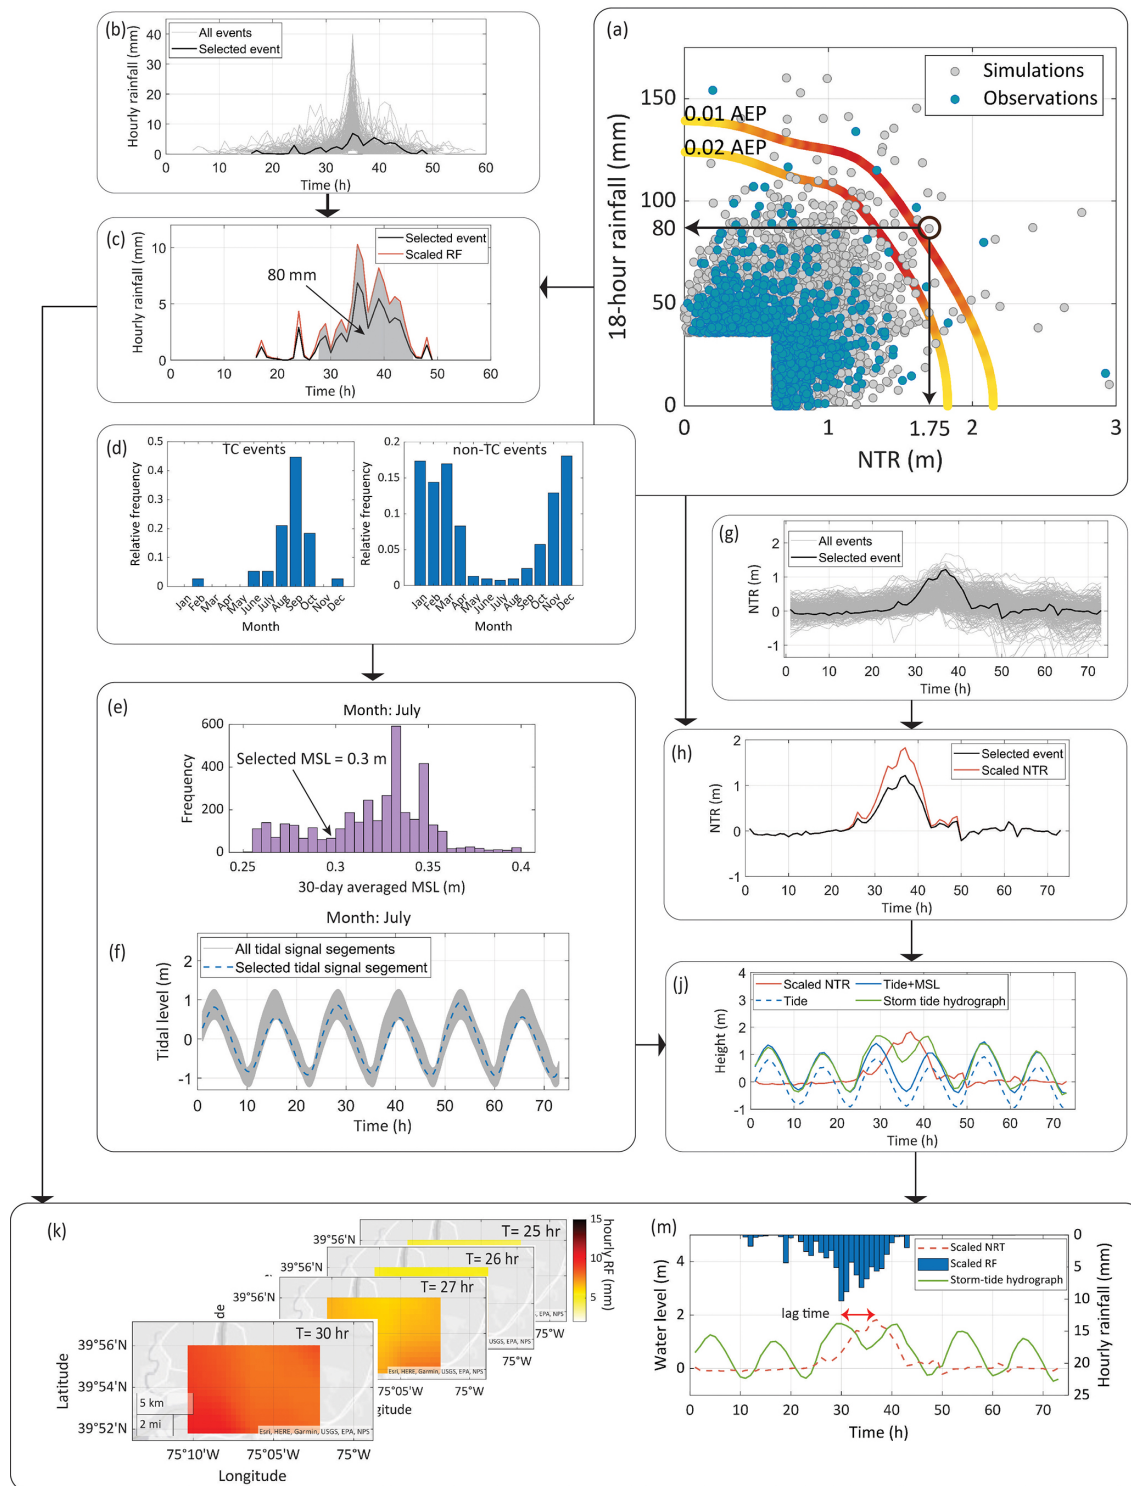


Figure 8. The demonstration of the event generation process using an example target event with 1.75 m NTR and 80 mm 18-hr RF. Panels: (a) Joint probability distribution, (b) Observed RF time series, (c) Selected and scaled RF time series, (d) Monthly frequency of occurrence of TC events and non-TC events, (e) m.s.l. distribution of the month July, (f) Tidal signal segments of the month July, (g) Observed NTR time series, (h) Selected and scaled NTR time series, (i) Storm tide hydrograph, (k) Scaled hourly RF fields over the Gloucester City catchment, (m) Synthetic compound event comprised of storm tide hydrograph (including scaled NTR) and scaled RF.

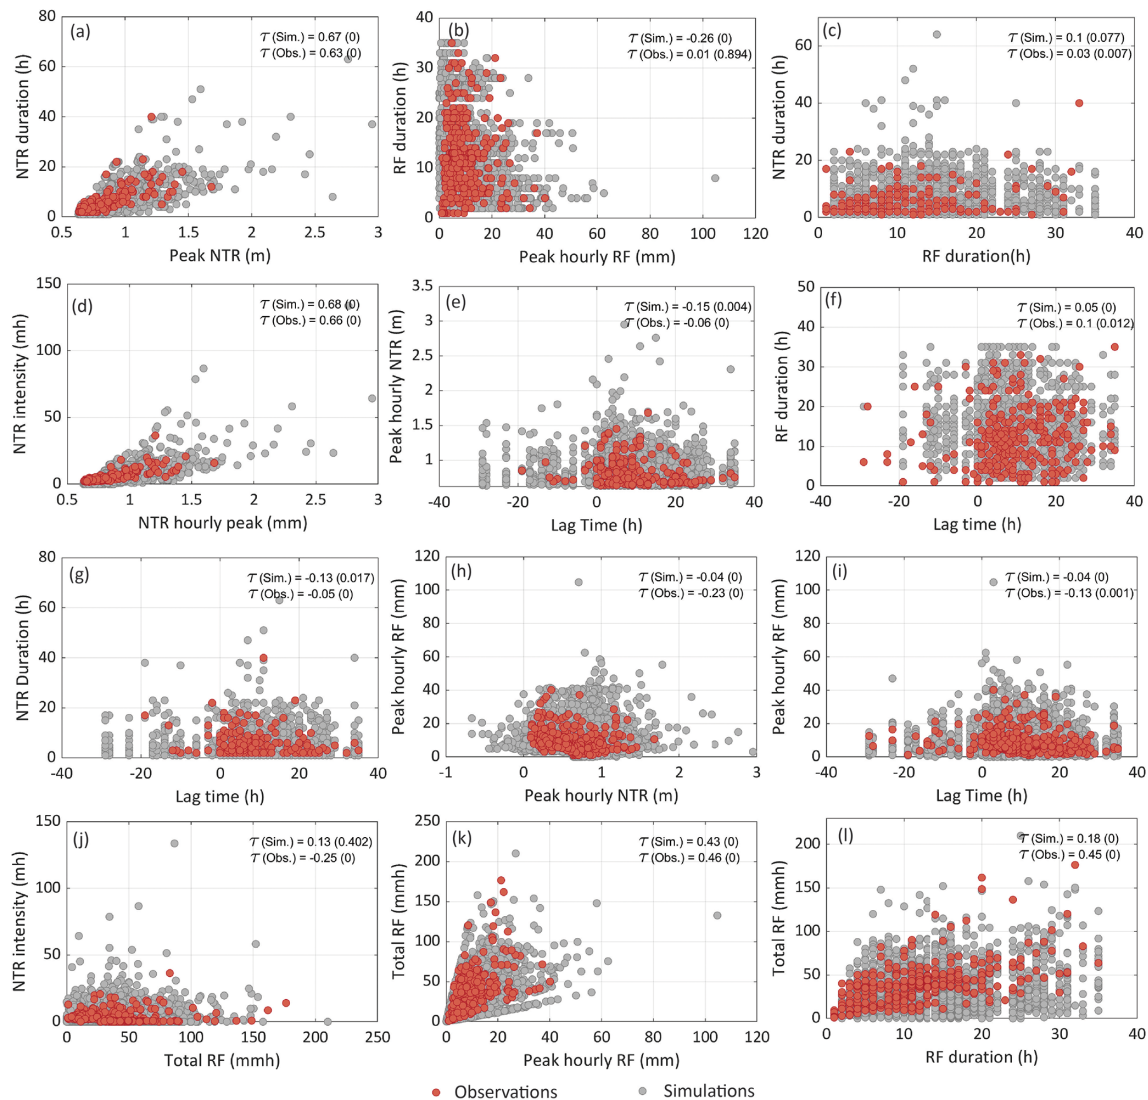


Figure 9. Scatter plots between (a) NTR duration and peak NTR, (b) RF duration and peak hourly RF, (c) NTR duration and RF duration, (d) NTR intensity and peak NTR, (e) peak NTR and lag time, (f) RF duration and lag time, (g) NTR duration and lag time, (h) peak hourly RF and peak NTR, (i) Peak hourly RF and lag time, (j) NTR intensity and total RF, (k) total RF (sum of all the basin-averaged hourly RF quantities of the event) and peak hourly RF, (l) total RF and RF duration, of observed events (red) and simulated events (gray). Kendall's τ for each sample with the corresponding p-value (in brackets) is shown in each panel.

been linked to increases in high-tides and extreme coastal flooding (Enríquez et al., 2022; Thompson et al., 2021). These tidal variations arise from the nodal and perigean modulations, with cycles of 18.6 and 4.4 years respectively. To account for these tidal variations, we use 3 d tidal signal segments over the most recent 18.6 years of the study period to generate the synthetic storm events. The framework was applied to generate 5000 synthetic events, and the comparisons of scatter plots in Fig. 9 indicate that the characteristics of the simulated events, such as hourly peaks, durations, intensities, and lag times are consistent with the observed events.

The results of the compound flood model simulations show that a substantial portion of the study area is impacted

by a 0.01 AEP compound flood event. Still, the flood depth varies significantly depending on the m.s.l. and tidal conditions (see Fig. 10). An event with 0.01 AEP (i.e., joint probability between peak RF and peak NTR) can produce up to 1 m difference in flood depth depending on m.s.l. conditions, while the prevailing tidal conditions can lead to differences of up to 1.2 m. These changes are particularly evident in areas along the Delaware River and Newton Creek, where the influence of coastal water levels is the largest. It is important to note that these variabilities are solely due to the influence of m.s.l. and tides, and do not account for additional variability from different combinations of NTR and RF peaks along the 0.01 AEP isoline or other factors (Jane et al., 2022). Nonethe-

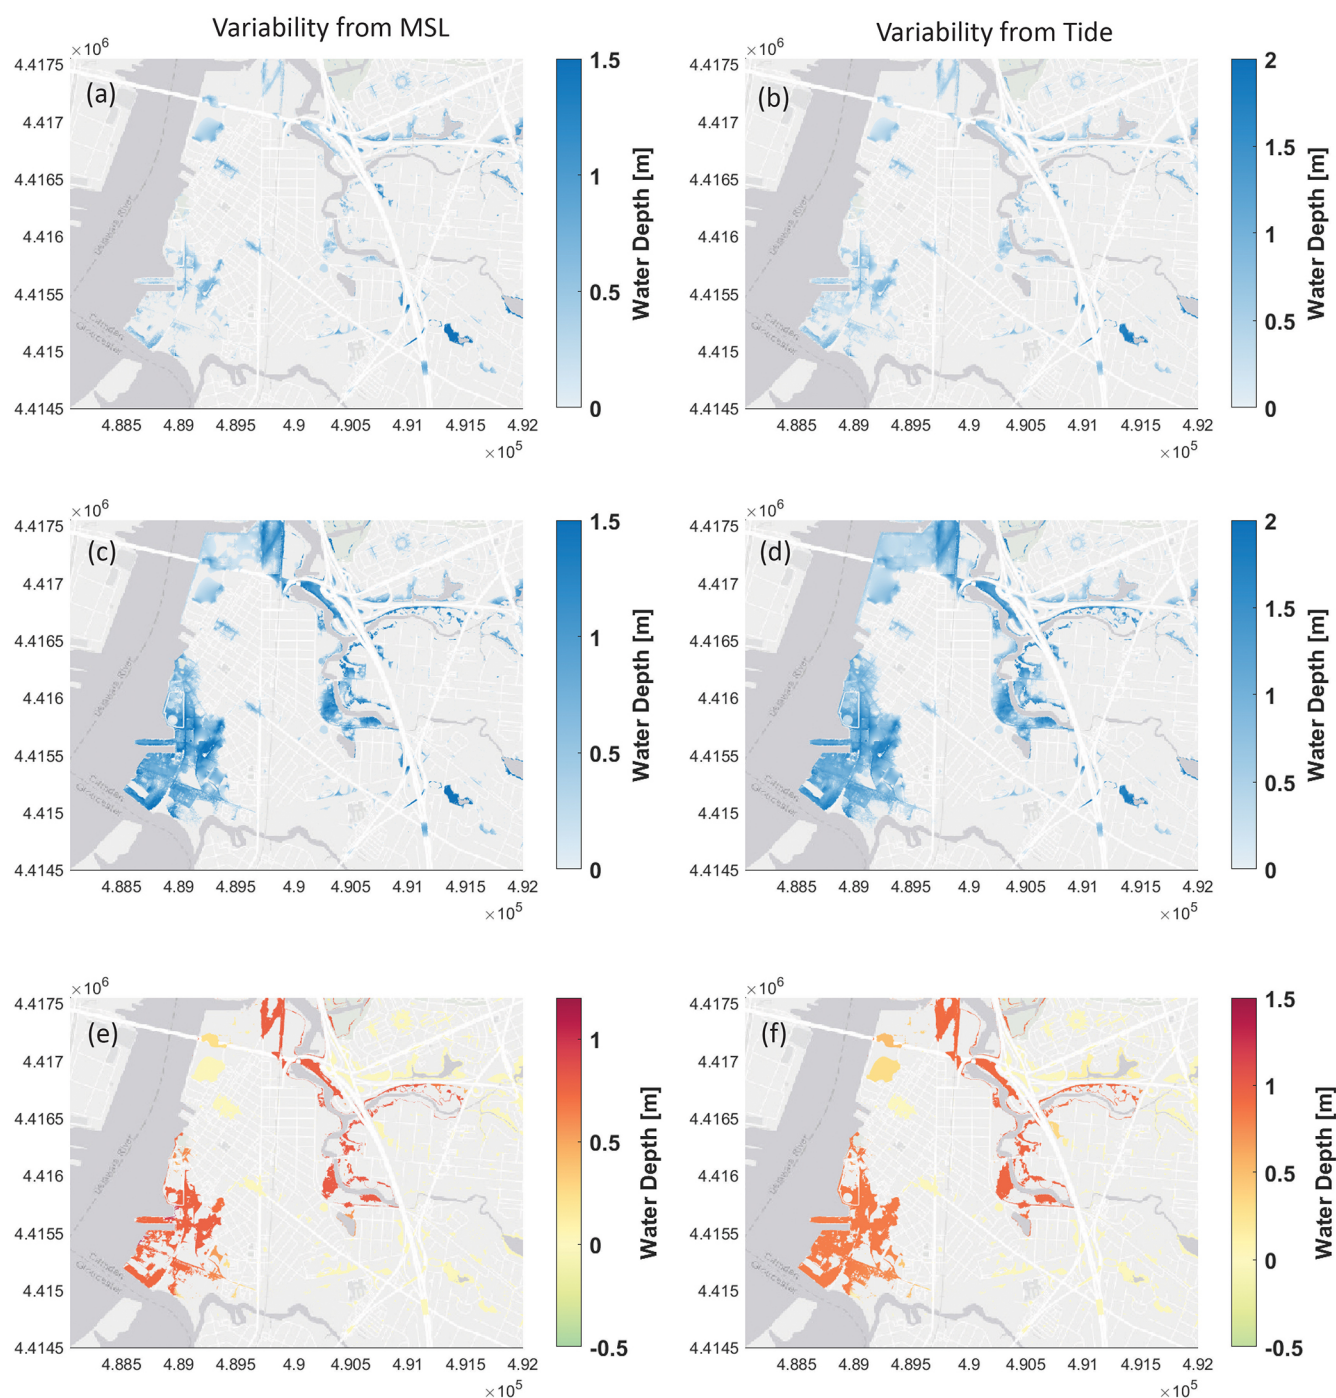


Figure 10. Changes in flood depths associated with variability in m.s.l. (left) and Tide (right) of a selected 0.01 AEP most-likely event. (a) When considering the lowest 30 d m.s.l., (b) when considering the tidal segment with the lowest high tide, (c) when considering the highest 30 d m.s.l., (d) when considering the tidal segment with the highest high tide, (e) the difference between (a) and (c), (f) difference between (b) and (d) (X, Y coordinate system: UTM-zone 18N).

less, the substantial differences in flood depths highlight the critical importance of accurately representing m.s.l. and tidal conditions, which we achieve in the proposed framework by randomly sampling from their monthly distributions. Analyzing only the most likely event, even if it appears to be

the most plausible based on observations, does not capture the range of flood levels that could be generated by different combinations of flood drivers (i.e., NTR and RF) with different time series properties. Therefore, the flood model simulations presented here are aimed at evaluating the importance

of explicitly accounting for the variability of m.s.l. and tides, and not to produce comprehensive probabilistic flood maps. In a separate study (Santamaria-Aguilar et al., 2025), we simulated flooding of 5000 synthetic storms at this site and found large variation in resultant flooding, even for events with similar joint return periods. However, attributing this variability to a single factor like m.s.l. or tides is challenging due to the complexity of their interactions.

One key assumption of the framework is that uniform scaling (also referred to as “same frequency amplification”) of flooding-driver time series creates a realistic compound event. This approach has been widely adopted in previous studies to construct design hydrographs and hyetographs (e.g., Serafin et al., 2019; Moftakhari et al., 2019; Zellou and Rahali, 2019; Kim et al., 2023; Liu et al., 2024; Xu et al., 2024). However, assessing whether each generated synthetic storm event is physically realistic is challenging. Ideally, a direct one-to-one validation against observed events (verifying whether every synthetic event has a similar observed event) would provide the most rigorous test. Yet such validation is impossible given the limited availability of observations, which is why the synthetic event generation is necessary in the first place. Instead, we tested the framework by comparing statistical properties of key time series characteristics between observations and synthetic events (Fig. 9). Another limitation of the proposed framework is that certain characteristics of synthetic events, such as RF duration and lag times, are limited to the observed values. To generate more diverse lag times, the observed lag times could be fitted to a parametric distribution (or alternatively to a copula that accounts for the dependence between peak values and lag times) and then one could sample lag times from the fitted distribution during the event generation process. This would introduce unobserved lag times into the synthetic events, enhancing their diversity. Additionally, the stratification of POT events utilizes a simple yet commonly used approach (e.g., Kim et al., 2023; Maduwantha et al., 2024) as discussed in Sect. 4.1. However, this method may not capture all TCs, particularly those that produce significant RF and storm surges from distances greater than 350 km. Such events are classified as non-TC events here, meaning the analysis in Sect. 4.2 may not fully reflect the true characteristics of TC and non-TC events.

Although measures are taken to prevent the generation of physically unrealistic events (see Sect. 4.3), it cannot be fully ruled out. For instance, when generating many peak NTR-RF combinations from the multivariate statistical model, unbounded marginal distributions can produce implausible extreme events that would result in unrealistic flood depths for those particular events. How much that affects the overall results depends on the type of analysis and how the flood information from individual synthetic events is used. Implementing a quality control process, e.g., using probable maximum precipitation or existing data on maximum storm surge potential (in the U.S. such data is available from a large number

of SLOSH simulations) could help filter out such unrealistic events, ensuring that the resulting synthetic event set remains feasible for a comprehensive flood risk assessment.

7 Conclusions

This paper presents a novel framework for generating synthetic events consisting of RF fields and (coastal/estuarine) water level time series, which can serve as boundary conditions for compound flood models. The framework explicitly accounts for different storm types in estimating the joint distribution of flood drivers and derives a large sample of peak NTR-RF combinations. Historic time series are scaled to match the target peaks, with the observed events chosen to ensure that the re-scaled events are physically plausible. We applied this framework to Gloucester City in New Jersey, a coastal city that is exposed to flooding from multiple water sources and storm types. The results demonstrate that the simulated events are consistent with observed events while covering unobserved portions of the event space. Results of the flood modeling indicate that substantial variability in flood depth can arise solely from different m.s.l. and tidal conditions, even when peak NTR and RF values are the same. This emphasizes the importance of accounting for the variability in time series dynamics, m.s.l., and tidal conditions in compound flood risk assessments. While we focus on historical observed events, the framework can be used with model output data including hindcasts or future projections.

Code availability. The marginal distribution fitting and copula selection were done using the MultiHazard R package, which can be downloaded from GitHub at <https://github.com/rjaneUCF/MultiHazard> (Jane et al., 2026). The other codes are available on GitHub at <https://github.com/CoRE-Lab-UCF/MACH-Compound-Flooding>. (last access: 11 January 2026; DOI: <https://doi.org/10.5281/zenodo.18216090>, Maduwantha, 2026).

Data availability. The hourly water level data at the Philadelphia tide gauge (St. ID: 8545240, St. ID: 8545530) can be accessed through the National Oceanic and Atmospheric Administration (NOAA: <http://tidesandcurrents.noaa.gov/>, last access: 1 November 2023). The HURDAT2 data are available from <https://www.nhc.noaa.gov/data/hurdat> (last access: 8 February 2024). The measured rainfall data used in this paper can be downloaded through NOAA's National Climatic Data Center's (NCDC) archive of global historical weather and climate data at <https://www.ncdc.noaa.gov/cdo-web> (last access: 2 November 2023). The AORC (4 km) Version 1.1 datasets can be obtained from the NOAA and available at <https://hydrology.nws.noaa.gov/aorc-historic/> (last access: 2 November 2023).

Supplement. The supplement related to this article is available online at <https://doi.org/10.5194/hess-30-401-2026-supplement>.

Author contributions. The study was conceived by TW and PM. PM developed the methodology, undertook the analysis, and wrote the first draft of the paper under the guidance of TW, SSA, RJ, and SD. HK and GV contributed to technical discussions in the early stages of the analysis. All authors co-wrote the final paper.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

Special issue statement. This article is part of the special issue "Methodological innovations for the analysis and management of compound risk and multi-risk, including climate-related and geophysical hazards (NHES/ESD/ESSD/GC/HES inter-journal SI)". It is not associated with a conference.

Acknowledgements. PM, TW, SSA, and SD were supported by the National Science Foundation as part of the Megalopolitan Coastal Transformation Hub (MACH) under NSF award ICER-2103754. MACH contribution no. 68.

Financial support. This research has been supported by the National Science Foundation (grant no. ICER-2103754).

Review statement. This paper was edited by Alberto Guadagnini and reviewed by two anonymous referees.

References

- Akaike, H.: A new look at the statistical model identification, *IEEE Trans. Automat. Contr.*, 19, 716–723, <https://doi.org/10.1109/TAC.1974.1100705>, 1974.
- Arns, A., Wahl, T., Wolff, C., Vafeidis, A. T., Haigh, I. D., Woodworth, P., Niehüser, S., and Jensen, J.: Non-linear interaction modulates global extreme sea levels, coastal flood exposure, and impacts, *Nat. Commun.*, 11, <https://doi.org/10.1038/s41467-020-15752-5>, 2020.
- Bader, B., Yan, J., and Zhang, X.: Automated threshold selection for extreme value analysis via ordered goodness-of-fit tests with adjustment for false discovery rate, *Ann. Appl. Stat.*, 12, 310–329, <https://doi.org/10.1214/17-AOAS1092>, 2018.
- Barnard, P. L., Erikson, L. H., Foxgrover, A. C., Hart, J. A. F., Limber, P., O'Neill, A. C., van Ormondt, M., Vitousek, S., Wood, N., Hayden, M. K., and Jones, J. M.: Dynamic flood modeling essential to assess the coastal impacts of climate change, *Sci. Rep.*, 9, 4309, <https://doi.org/10.1038/s41598-019-40742-z>, 2019.
- Barroso, A., Wahl, T., Li, S., Enriquez, A., Morim, J., Dangelndorf, S., Piecuch, C., and Thompson, P.: Observed Spatiotemporal Variability in the Annual Sea Level Cycle Along the Global Coast, *J. Geophys. Res.-Oceans*, 129, e2023JC020300, <https://doi.org/10.1029/2023JC020300>, 2024.
- Bass, B. and Bedient, P.: Surrogate modeling of joint flood risk across coastal watersheds, *J. Hydrol.*, 558, 159–173, <https://doi.org/10.1016/j.jhydrol.2018.01.014>, 2018.
- Bates, P. D., Quinn, N., Sampson, C., Smith, A., Wing, O., Sosa, J., Savage, J., Olcese, G., Neal, J., Schumann, G., Gius-tarini, L., Coxon, G., Porter, J. R., Amodeo, M. F., Chu, Z., Lewis-Gruss, S., Freeman, N. B., Houser, T., Delgado, M., Hamidi, A., Bolliger, I., E. McCusker, K., Emanuel, K., Ferreira, C. M., Khalid, A., Haigh, I. D., Couasnon, A., E. Kopp, R., Hsiang, S., and Krajewski, W. F.: Combined Modeling of US Fluvial, Pluvial, and Coastal Flood Hazard Under Current and Future Climates, *Water Resour. Res.*, 57, e2020WR028673, <https://doi.org/10.1029/2020WR028673>, 2021.
- Breilh, J. F., Chaumillon, E., Bertin, X., and Gravelle, M.: Assessment of static flood modeling techniques: application to contrasting marshes flooded during Xynthia (western France), *Nat. Hazards Earth Syst. Sci.*, 13, 1595–1612, <https://doi.org/10.5194/nhess-13-1595-2013>, 2013.
- Brissette, F. P., Khalili, M., and Leconte, R.: Efficient stochastic generation of multi-site synthetic precipitation data, *J. Hydrol.*, 345, 121–133, <https://doi.org/10.1016/j.jhydrol.2007.06.035>, 2007.
- Burton, A., Kilsby, C. G., Fowler, H. J., Cowpertwait, P. S. P., and O'Connell, P. E.: RainSim: A spatial-temporal stochastic rainfall modelling system, *Environmental Modelling & Software*, 23, 1356–1369, <https://doi.org/10.1016/j.envsoft.2008.04.003>, 2008.
- Camus, P., Haigh, I. D., Nasr, A. A., Wahl, T., Darby, S. E., and Nicholls, R. J.: Regional analysis of multivariate compound coastal flooding potential around Europe and environs: sensitivity analysis and spatial patterns, *Nat. Hazards Earth Syst. Sci.*, 21, 2021–2040, <https://doi.org/10.5194/nhess-21-2021-2021>, 2021.
- Chow, V. T., Maidment, D. R., and Mays, L. W.: *Applied Hydrology*, McGraw-Hill Book Company, New York, ISBN 0-07-100174-3, 1988.
- Codiga, D.: Unified tidal analysis and prediction using the UTide Matlab functions, <https://doi.org/10.13140/RG.2.1.3761.2008>, 2011.
- Couasnon, A., Sebastian, A., and Morales-Nápoles, O.: A Copula-based bayesian network for modeling compound flood hazard from riverine and coastal interactions at the catchment scale: An application to the houston ship channel, Texas, *Water*, 10, <https://doi.org/10.3390/w10091190>, 2018.
- Couasnon, A., Eilander, D., Muis, S., Veldkamp, T. I. E., Haigh, I. D., Wahl, T., Winsemius, H. C., and Ward, P. J.: Measuring compound flood potential from river discharge and storm surge

- extremes at the global scale, *Nat. Hazards Earth Syst. Sci.*, 20, 489–504, <https://doi.org/10.5194/nhess-20-489-2020>, 2020.
- Cowpertwait, P. S. P., Kilsby, C. G., and O’Connell, P. E.: A space-time Neyman-Scott model of rainfall: Empirical analysis of extremes, *Water Resour. Res.*, 38, 6-1–6-14, <https://doi.org/10.1029/2001WR000709>, 2002.
- Dangendorf, S., Wahl, T., Mudersbach, C., and Jensen, J.: The Seasonal Mean Sea Level Cycle in the Southeastern North Sea, *J. Coast. Res.*, 29, 1915–1920, 2013.
- Danielson, J. J., Poppenga, S. K., Brock, J., Evans, G. A., Tyler, D. J., Gesch, D. B., Thatcher, C. A., and Barras, J.: Topobathymetric elevation model development using a new methodology: Coastal National Elevation Database, *J. Coastal Res.*, Special Issue 76, 75–89, <https://doi.org/10.2112/SI76-008>, 2016.
- Dawson, R. J., Hall, J. W., Bates, P. D., and Nicholls, R. J.: Quantified Analysis of the Probability of Flooding in the Thames Estuary under Imaginable Worst-case Sea Level Rise Scenarios, *Int. J. Water Resour. Dev.*, 21, 577–591, <https://doi.org/10.1080/07900620500258380>, 2005.
- Dullaart, J. C. M., Muis, S., de Moel, H., Ward, P. J., Eilander, D., and Aerts, J. C. J. H.: Enabling dynamic modelling of coastal flooding by defining storm tide hydrographs, *Nat. Hazards Earth Syst. Sci.*, 23, 1847–1862, <https://doi.org/10.5194/nhess-23-1847-2023>, 2023.
- Emanuel, K., Ravela, S., Vivant, E., and Risi, C.: A statistical deterministic approach to hurricane risk assessment, *Bull. Am. Meteorol. Soc.*, 87, 299–314, <https://doi.org/10.1175/BAMS-87-3-299>, 2006.
- Enríquez, A. R., Wahl, T., Baranes, H. E., Talke, S. A., Orton, P. M., Booth, J. F., and Haigh, I. D.: Predictable Changes in Extreme Sea Levels and Coastal Flood Risk Due To Long-Term Tidal Cycles, *J. Geophys. Res.-Oceans*, 127, e2021JC018157, <https://doi.org/10.1029/2021JC018157>, 2022.
- Evin, G., Favre, A.-C., and Hingray, B.: Stochastic generation of multi-site daily precipitation focusing on extreme events, *Hydrol. Earth Syst. Sci.*, 22, 655–672, <https://doi.org/10.5194/hess-22-655-2018>, 2018.
- FEMA: Flood Risk Report Camden County Coastal Project Area, https://map1.msc.fema.gov/data/FRP/FRR_Coastal_34007_20170424.pdf?LOC=6c60f6776821e59ef746b3ecd45fd27c (last access: 21 January 2026), 2016.
- Gallien, T. W.: Validated coastal flood modeling at Imperial Beach, California: Comparing total water level, empirical and numerical overtopping methodologies, *Coastal Engineering*, 111, 95–104, <https://doi.org/10.1016/j.coastaleng.2016.01.014>, 2016.
- Gao, S., Zhang, J., Li, D., Jiang, H., and Fang, Z. N.: Evaluation of multiradar multisensor and stage IV quantitative precipitation estimates during Hurricane Harvey, *Nat. Hazards Rev.*, 22, 04020057, [https://doi.org/10.1061/\(ASCE\)NH.1527-6996.0000435](https://doi.org/10.1061/(ASCE)NH.1527-6996.0000435), 2021.
- Gloucester City New Jersey: Gloucester City, New Jersey, <https://www.cityofgloucester.org/>, last access: 24 February 2024.
- Gomez, F. J., Jafarzadegan, K., Moftakhari, H., and Moradkhani, H.: Probabilistic flood inundation mapping through copula Bayesian multi-modeling of precipitation products, *Nat. Hazards Earth Syst. Sci.*, 24, 2647–2665, <https://doi.org/10.5194/nhess-24-2647-2024>, 2024.
- Gori, A., Lin, N., and Xi, D.: Tropical Cyclone Compound Flood Hazard Assessment: From Investigating Drivers to Quantifying Extreme Water Levels, *Earth’s Future*, 8, e2020EF001660, <https://doi.org/10.1029/2020EF001660>, 2020.
- Green, A. C., Kilsby, C., and Bárdossy, A.: A framework for space-time modelling of rainfall events for hydrological applications of weather radar, *J. Hydrol.*, 630, <https://doi.org/10.1016/j.jhydrol.2024.130630>, 2024.
- Haigh, I. D., Wadey, M. P., Wahl, T., Ozsoy, O., Nicholls, R. J., Brown, J. M., Horsburgh, K., and Gouldby, B.: Spatial and temporal analysis of extreme sea level and storm surge events around the coastline of the UK, *Sci. Data*, 3, 160107, <https://doi.org/10.1038/sdata.2016.107>, 2016.
- Harrison, L. M., Coulthard, T. J., Robins, P. E., and Lewis, M. J.: Sensitivity of Estuaries to Compound Flooding, *Estuaries and Coasts*, 45, 1250–1269, <https://doi.org/10.1007/s12237-021-00996-1>, 2022.
- Hendry, A., Haigh, I. D., Nicholls, R. J., Winter, H., Neal, R., Wahl, T., Joly-Laugel, A., and Darby, S. E.: Assessing the characteristics and drivers of compound flooding events around the UK coast, *Hydrol. Earth Syst. Sci.*, 23, 3117–3139, <https://doi.org/10.5194/hess-23-3117-2019>, 2019.
- Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., Simmons, A., Soci, C., Abdalla, S., Abellan, X., Balsamo, G., Bechtold, P., Biavati, G., Bidlot, J., Bonavita, M., De Chiara, G., Dahlgren, P., Dee, D., Diamantakis, M., Dragani, R., Flemming, J., Forbes, R., Fuentes, M., Geer, A., Haimberger, L., Healy, S., Hogan, R. J., Hólm, E., Janisková, M., Keeley, S., Laloyaux, P., Lopez, P., Lupu, C., Radnoti, G., de Rosnay, P., Rozum, I., Vamborg, F., Villaume, S., and Thépaut, J.-N.: The ERA5 global reanalysis, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999–2049, <https://doi.org/10.1002/qj.3803>, 2020.
- Hong, Y., Kessler, J., Titze, D., Yang, Q., Shen, X., and Anderson, E. J.: Towards efficient coastal flood modeling: A comparative assessment of bathtub, extended hydrodynamic, and total water level approaches, *Ocean Dynam.*, 74, 391–405, <https://doi.org/10.1007/s10236-024-01610-1>, 2024.
- Jane, R., Cadavid, L., Obeysekera, J., and Wahl, T.: Multivariate statistical modelling of the drivers of compound flood events in south Florida, *Nat. Hazards Earth Syst. Sci.*, 20, 2681–2699, <https://doi.org/10.5194/nhess-20-2681-2020>, 2020.
- Jane, R. A., Malagón-Santos, V., Rashid, M. M., Doebele, L., Wahl, T., Timmers, S. R., Serafin, K. A., Schmied, L., and Lindeimer, C.: A Hybrid Framework for Rapidly Locating Transition Zones: A Comparison of Event- and Response-Based Return Water Levels in the Suwannee River FL, *Water Resour. Res.*, 58, e2022WR032481, <https://doi.org/10.1029/2022WR032481>, 2022.
- Jane, R. A., Wahl, T., Peña, F., Obeysekera, J., Murphy-Barltrop, C., Ali, J., Maduwantha, P., Li, H., and Malagón Santos, V.: MultiHazard: copula-based joint probability analysis in R, *J. Open Source Softw.*, 11, 8350, <https://doi.org/10.21105/joss.08350>, 2026.
- Jones, K. A., Niknami L. S., Buto S. G., and Decker D.: Federal standards and procedures for the national Watershed Boundary Dataset (WBD), vol. 11-A3, U.S. Department of the Interior/U.S. Geological Survey, <https://pubs.usgs.gov/tm/11/a3/> (last access: 9 October 2023), 2022.

- Kim, H. and Villarini, G.: Evaluation of the Analysis of Record for Calibration (AORC) Rainfall across Louisiana, *Remote Sens.*, 14, 3284, <https://doi.org/10.3390/rs14143284>, 2022.
- Kim, H., Villarini, G., Jane, R., Wahl, T., Misra, S., and Michalek, A.: On the generation of high-resolution probabilistic design events capturing the joint occurrence of rainfall and storm surge in coastal basins, *International Journal of Climatology*, 43, 761–771, <https://doi.org/10.1002/joc.7825>, 2023.
- Kitzmler, D. H., Wu, W., Zhang, Z., Patrick, N., and Tan, X.: The Analysis of Record for Calibration: A High-Resolution Precipitation and Surface Weather Dataset for the United States, in: AGU Fall Meeting Abstracts, H41H-06, <https://agu.confex.com/agu/fm18/meetingapp.cgi/Paper/390693> (last access date: 21 January 2026), 2018.
- Kleiber, W., Katz, R. W., and Rajagopalan, B.: Daily spatiotemporal precipitation simulation using latent and transformed Gaussian processes, *Water Resour. Res.*, 48, <https://doi.org/10.1029/2011WR011105>, 2012.
- Kumbier, K., Carvalho, R. C., Vafeidis, A. T., and Woodroffe, C. D.: Comparing static and dynamic flood models in estuarine environments: A case study from south-east Australia, *Mar. Freshw. Res.*, 70, 781–793, <https://doi.org/10.1071/MF18239>, 2019.
- Landsea, C. W. and Franklin, J. L.: Atlantic hurricane database uncertainty and presentation of a new database format, *Mon. Weather Rev.*, 141, 3576–3592, <https://doi.org/10.1175/MWR-D-12-00254.1>, 2013.
- Leblois, E. and Creutin, J.-D.: Space-time simulation of intermittent rainfall with prescribed advection field: Adaptation of the turning band method, *Water Resour. Res.*, 49, 3375–3387, <https://doi.org/10.1002/wrcr.20190>, 2013.
- Leijnse, T., van Ormondt, M., Nederhoff, K., and van Dongeren, A.: Modeling compound flooding in coastal systems using a computationally efficient reduced-physics solver: Including fluvial, pluvial, tidal, wind- and wave-driven processes, *Coastal Engineering*, 163, 103796, <https://doi.org/10.1016/j.coastaleng.2020.103796>, 2021.
- Lewis, M., Bates, P., Horsburgh, K., Neal, J., and Schumann, G.: A storm surge inundation model of the northern Bay of Bengal using publicly available data, *Quarterly Journal of the Royal Meteorological Society*, 139, 358–369, <https://doi.org/10.1002/qj.2040>, 2013.
- Liang, B., Shao, Z., Li, H., Shao, M., and Lee, D.: An automated threshold selection method based on the characteristic of extrapolated significant wave heights, *Coast. Eng.*, 144, 22–32, <https://doi.org/10.1016/j.coastaleng.2018.12.001>, 2019.
- Liu, Y., Zhang, T., Ding, Y., Kang, A., Lei, X., and Li, J.: Exploring the driving factors of compound flood severity in coastal cities: a comprehensive analytical approach, *Hydrol. Earth Syst. Sci.*, 28, 5541–5555, <https://doi.org/10.5194/hess-28-5541-2024>, 2024.
- Luettich Jr., R. A., Westerink, J. J., and Scheffner, N. W.: ADCIRC: An advanced three-dimensional circulation model for shelves, coasts, and estuaries. Report 1: Theory and methodology of ADCIRC-2DDI and ADCIRC-3DL, Technical Report, Coastal Engineering Research Center, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS, USA, 143 pp., 1992.
- MacPherson, L. R., Arns, A., Dangendorf, S., Vafeidis, A. T., and Jensen, J.: A Stochastic Extreme Sea Level Model for the German Baltic Sea Coast, *J. Geophys. Res.-Oceans*, 124, 2054–2071, <https://doi.org/10.1029/2018JC014718>, 2019.
- Maduwantha, P.: Synthetic Compound Storm Event Generation Using Copula-Based non-tidal residual-Rainfall Modeling, Version V1, Zenodo [code], <https://doi.org/10.5281/zenodo.18216090>, 2026.
- Maduwantha, P., Wahl, T., Santamaria-Aguilar, S., Jane, R., Booth, J. F., Kim, H., and Villarini, G.: A multivariate statistical framework for mixed storm types in compound flood analysis, *Nat. Hazards Earth Syst. Sci.*, 24, 4091–4107, <https://doi.org/10.5194/nhess-24-4091-2024>, 2024.
- Merz, B., Blöschl, G., Jüpner, R., Kreibich, H., Schröter, K., and Vorogushyn, S.: Invited perspectives: safeguarding the usability and credibility of flood hazard and risk assessments, *Nat. Hazards Earth Syst. Sci.*, 24, 4015–4030, <https://doi.org/10.5194/nhess-24-4015-2024>, 2024.
- Moftakhari, H., Schubert, J. E., AghaKouchak, A., Matthew, R. A., and Sanders, B. F.: Linking statistical and hydrodynamic modeling for compound flood hazard assessment in tidal channels and estuaries, *Adv Water Resour.*, 128, 28–38, <https://doi.org/10.1016/j.advwatres.2019.04.009>, 2019.
- Molinari, D., De Bruijn, K. M., Castillo-Rodríguez, J. T., Aronica, G. T., and Bouwer, L. M.: Validation of flood risk models: Current practice and possible improvements, *International Journal of Disaster Risk Reduction*, 33, 441–448, <https://doi.org/10.1016/j.ijdrr.2018.10.022>, 2019.
- Nasr, A. A., Wahl, T., Rashid, M. M., Jane, R. A., Camus, P., and Haigh, I. D.: Temporal changes in dependence between compound coastal and inland flooding drivers around the contiguous United States coastline, *Weather Clim. Extrem.*, 41, 100594, <https://doi.org/10.1016/j.wace.2023.100594>, 2023.
- Nederhoff, K., Leijnse, T. W. B., Parker, K., Thomas, J., O'Neill, A., van Ormondt, M., McCall, R., Erikson, L., Barnard, P. L., Foxgrover, A., Klessens, W., Nadal-Caraballo, N. C., and Massey, T. C.: Tropical or extratropical cyclones: what drives the compound flood hazard, impact, and risk for the United States Southeast Atlantic coast?, *Natural Hazards*, 120, 8779–8825, <https://doi.org/10.1007/s11069-024-06552-x>, 2024.
- Orton, P. M., Hall, T. M., Talke, S. A., Blumberg, A. F., Georgas, N., and Vinogradov, S.: A validated tropical-extratropical flood hazard assessment for New York Harbor, *J. Geophys. Res.-Oceans*, 121, 8904–8929, <https://doi.org/10.1002/2016JC011679>, 2016.
- Orton, P. M., Conticello, F. R., Cioffi, F., Hall, T. M., Georgas, N., Lall, U., Blumberg, A. F., and MacManus, K.: Flood hazard assessment from storm tides, rain and sea level rise for a tidal river estuary, *Natural Hazards*, 102, 729–757, <https://doi.org/10.1007/s11069-018-3251-x>, 2020.
- Papalexiou, S. M., Serinaldi, F., and Porcu, E.: Advancing Space-Time Simulation of Random Fields: From Storms to Cyclones and Beyond, *Water Resour. Res.*, 57, e2020WR029466, <https://doi.org/10.1029/2020WR029466>, 2021.
- Pfahl, S. and Wernli, H.: Quantifying the relevance of cyclones for precipitation extremes, *J. Climate*, 25, 6770–6780, <https://doi.org/10.1175/JCLI-D-11-00705.1>, 2012.
- Pollack, A. B., Santamaria-Aguilar, S., Maduwantha, P., Helgeson, C., Wahl, T., and Keller, K.: Funding rules that promote equity in climate adaptation outcomes, *Proceedings of the National Academy of Sciences*, 122, <https://doi.org/10.1073/pnas.2418711121>, 2025.
- Quinn, N., Lewis, M., Wadey, M. P., and Haigh, I. D.: Assessing the temporal variability in extreme storm-tide time series

- for coastal flood risk assessment, *J. Geophys. Res.-Oceans*, 119, 4983–4998, <https://doi.org/10.1002/2014JC010197>, 2014.
- Radfar, S., Shafieefar, M., and Akbari, H.: Impact of copula model selection on reliability-based design optimization of a rubble mound breakwater, *Ocean Eng.*, 260, 112023, <https://doi.org/10.1016/j.oceaneng.2022.112023>, 2022.
- Ramirez, J. A., Lichter, M., Coulthard, T. J., and Skinner, C.: Hyper-resolution mapping of regional storm surge and tide flooding: comparison of static and dynamic models, *Natural Hazards*, 82, 571–590, <https://doi.org/10.1007/s11069-016-2198-z>, 2016.
- Salvadori, G. and De Michele, C.: Multivariate Extreme Value Methods, in: *Extremes in a Changing Climate: Detection, Analysis and Uncertainty*, edited by: AghaKouchak, A., Easterling, D., Hsu, K., Schubert, S., and Sorooshian, S., Springer Netherlands, Dordrecht, 115–162, https://doi.org/10.1007/978-94-007-4479-0_5, 2013.
- Santamaria-Aguilar, S., Maduwantha, P., Enriquez, A. R., and Wahl, T.: Large discrepancies between event- and response-based compound flood hazard estimates, *EGUsphere* [preprint], <https://doi.org/10.5194/egusphere-2025-1938>, 2025.
- Santos, V. M., Jane, R., Misra, S. K., White, K. D., and Wahl, T.: Assessing compound flooding potential with multivariate statistical models in a complex estuarine system under data constraints, *J. Flood Risk Manage.*, 14, e12749, <https://doi.org/10.1111/jfr3.12749>, 2021.
- Schertzer, D. and Lovejoy, S.: Physical modeling and analysis of rain and clouds by anisotropic scaling multiplicative processes, *Journal of Geophysical Research: Atmospheres*, 92, 9693–9714, <https://doi.org/10.1029/JD092iD08p09693>, 1987.
- Seenath, A., Wilson, M., and Miller, K.: Hydrodynamic versus GIS modelling for coastal flood vulnerability assessment: Which is better for guiding coastal management?, *Ocean Coast. Manag.*, 120, 99–109, <https://doi.org/10.1016/j.ocecoaman.2015.11.019>, 2016.
- Semmendinger, K., Foley, J., and Steinschneider, S.: A Probabilistic, Parcel-Level Inundation Prediction Tool for Medium-Range Flood Forecasting in Large Lake Systems, *JAWRA Journal of the American Water Resources Association*, 57, 57–74, <https://doi.org/10.1111/1752-1688.12893>, 2021.
- Serafin, K. A., Ruggiero, P., Parker, K., and Hill, D. F.: What's streamflow got to do with it? A probabilistic simulation of the competing oceanographic and fluvial processes driving extreme along-river water levels, *Nat. Hazards Earth Syst. Sci.*, 19, 1415–1431, <https://doi.org/10.5194/nhess-19-1415-2019>, 2019.
- Shen, Y., Morsy, M. M., Huxley, C., Tahvildari, N., and Goodall, J. L.: Flood risk assessment and increased resilience for coastal urban watersheds under the combined impact of storm tide and heavy rainfall, *J. Hydrol.*, 579, <https://doi.org/10.1016/j.jhydrol.2019.124159>, 2019.
- Silva Lomba, J. and Fraga Alves, M. I.: L-moments for automatic threshold selection in extreme value analysis, *Stoch. Environ. Res. Risk Assess.*, 34, 465–491, <https://doi.org/10.1007/s00477-020-01789-x>, 2020.
- Sinclair, V. A., Rantanen, M., Haapanala, P., Räisänen, J., and Järvinen, H.: The characteristics and structure of extra-tropical cyclones in a warmer climate, *Weather Clim. Dynam.*, 1, 1–25, <https://doi.org/10.5194/wcd-1-1-2020>, 2020.
- Terlinden-Ruhl, L., Couasnon, A., Eilander, D., Hendrickx, G. G., Mares-Nasarre, P., and Antolínez, J. A. Á.: Accelerating compound flood risk assessments through active learning: A case study of Charleston County (USA), *Nat. Hazards Earth Syst. Sci.*, 25, 1353–1375, <https://doi.org/10.5194/nhess-25-1353-2025>, 2025.
- Thompson, P. R., Widlansky, M. J., Hamlington, B. D., Merrifield, M. A., Marra, J. J., Mitchum, G. T., and Sweet, W.: Rapid increases and extreme months in projections of United States high-tide flooding, *Nat. Clim. Change*, 11, 584–590, <https://doi.org/10.1038/s41558-021-01077-8>, 2021.
- Towey, K. L., Booth, J. F., Rodriguez Enriquez, A., and Wahl, T.: Tropical cyclone storm surge probabilities for the east coast of the United States: a cyclone-based perspective, *Nat. Hazards Earth Syst. Sci.*, 22, 1287–1300, <https://doi.org/10.5194/nhess-22-1287-2022>, 2022.
- United States Army Corps of Engineers (USACE): National Structure Inventory technical documentation, U.S. Army Corps of Engineers, Washington, DC, USA, <https://www.hec.usace.army.mil/confluence/nsi/technicalreferences/latest/technical-documentation> (last access: 5 March 2024), 2022.
- Vousdoukas, M. I., Voukouvalas, E., Mentaschi, L., Dottori, F., Giardino, A., Bouziotas, D., Bianchi, A., Salamon, P., and Feyen, L.: Developments in large-scale coastal flood hazard mapping, *Nat. Hazards Earth Syst. Sci.*, 16, 1841–1853, <https://doi.org/10.5194/nhess-16-1841-2016>, 2016.
- Wahl, T., Mudersbach, C., and Jensen, J.: Assessing the hydrodynamic boundary conditions for risk analyses in coastal areas: a stochastic storm surge model, *Nat. Hazards Earth Syst. Sci.*, 11, 2925–2939, <https://doi.org/10.5194/nhess-11-2925-2011>, 2011.
- Wahl, T., Mudersbach, C., and Jensen, J.: Assessing the hydrodynamic boundary conditions for risk analyses in coastal areas: a multivariate statistical approach based on Copula functions, *Nat. Hazards Earth Syst. Sci.*, 12, 495–510, <https://doi.org/10.5194/nhess-12-495-2012>, 2012.
- Wahl, T., Jain, S., Bender, J., Meyers, S. D., and Luther, M. E.: Increasing risk of compound flooding from storm surge and rainfall for major US cities, *Nat. Clim. Change*, 5, 1093–1097, <https://doi.org/10.1038/nclimate2736>, 2015.
- Ward, P. J., Couasnon, A., Eilander, D., Haigh, I. D., Hendry, A., Muis, S., Veldkamp, T. I. E., Winsemius, H. C., and Wahl, T.: Dependence between high sea-level and high river discharge increases flood hazard in global deltas and estuaries, *Environmental Research Letters*, 13, 084012, <https://doi.org/10.1088/1748-9326/aad400>, 2018.
- Xu, H., Ragno, E., Jonkman, S. N., Wang, J., Bricker, J. D., Tian, Z., and Sun, L.: Combining statistical and hydrodynamic models to assess compound flood hazards from rainfall and storm surge: a case study of Shanghai, *Hydrol. Earth Syst. Sci.*, 28, 3919–3930, <https://doi.org/10.5194/hess-28-3919-2024>, 2024.
- Zellou, B. and Rahali, H.: Assessment of the joint impact of extreme rainfall and storm surge on the risk of flooding in a coastal area, *J. Hydrol.*, 569, 647–665, <https://doi.org/10.1016/j.jhydrol.2018.12.028>, 2019.