



## Mapping water content dynamics in SAT systems using 3D electrical tomography

Lurdes Martínez-Landa<sup>1,2</sup>, Jesús Carrera<sup>2,3</sup>, Juan José Ledo<sup>4</sup>, Perla Piña-Varas<sup>5</sup>, Paola Sepúlveda-Ruiz<sup>6</sup>, Montserrat Folch<sup>6</sup>, and Cristina Valhondo<sup>2,3</sup>

<sup>1</sup>Department of Civil and Environmental Engineering, Universitat Politècnica de Catalunya, Barcelona, Spain

<sup>2</sup>Hydrogeology Group (UPC-CSIC), Barcelona, Spain

<sup>3</sup>Geosciences department, Institute of Environmental Assessment and Water Research, Spanish Research Council (IDAEA-CSIC), Barcelona, Spain

<sup>4</sup>Department of Earth Physics and Astrophysics, Faculty of Physics, Universidad Complutense de Madrid, Madrid, Spain

<sup>5</sup>Geomodels-UB Research Institute, Faculty of Earth Sciences, Universitat de Barcelona, Barcelona, Spain

<sup>6</sup>Biology, Sanitation and Environmental Department, University of Barcelona, Av. Joan XXIII, 08028 Barcelona, Spain

**Correspondence:** Cristina Valhondo (cvalhondo@gmail.com)

Received: 15 August 2025 – Discussion started: 11 September 2025

Revised: 27 January 2026 – Accepted: 27 January 2026 – Published: 13 February 2026

**Abstract.** The growing demand for high-quality water requires sustainable strategies to promote reuse and recycling. Managed Aquifer Recharge strategies, particularly Soil-Aquifer Treatment systems, have demonstrated effectiveness in improving water quality by reducing contaminants through biodegradation, retention, and sorption. The coexistence of solid, liquid, and gas phases in the unsaturated zone enhances adsorption, and retention of pathogens and colloids, while the availability of organic carbon and terminal electron acceptors sustains this zone as critical for biodegradation processes.

During recharge, the hydration-drainage front in the unsaturated zone follows a depth-dependent pattern. However, soil heterogeneity causes water to infiltrate through preferential pathways, gradually hydrating the surrounding medium. This behavior is further influenced by system management (recharge strategy, applied flow rate, and/or installation of reactive barriers), which also promotes the development of biofilms. These biofilms facilitate water retention and act as localized microreactors for contaminant biodegradation.

We investigate the influence of recharge strategies (pulsed versus continuous) and the presence of a reactive barrier on the hydration-drainage front in the unsaturated zone and biofilm development in two Soil-Aquifer Treatment systems. This was achieved using cross-hole electrical resistivity tomography, combined with the assessment of biofilm forma-

tion through extracellular polymeric substances quantification in solid samples collected from the unsaturated zone during the recharge episodes.

The study compares two Soil-Aquifer Treatment systems: one composed of fine sand and another incorporating a reactive barrier consisting of sand, woodchips, compost, biochar, zeolites, and clay. Two recharge episodes were analyzed: one operated under continuous flow and the other under pulsed flow, while maintaining the same average flow rate. Resistivity measurements, associated with the properties of the porous medium and the fluids circulating through it, were acquired under the initial dry conditions and throughout recharge, revealing the 3D distribution of the unsaturated zone volume during hydration (at the start of recharge) and drainage (when recharge ceased). Over time, these measurements also indicated the potential formation of biofilms in the Soil-Aquifer Treatment system. Measurements at the beginning and end of each recharge episode capture the 3D evolution of water content.

Results showed that water infiltration occurred through preferential pathways or fingers, creating significant heterogeneity in water content in both Soil-Aquifer Treatment systems. The reactive barrier enhanced water retention during dry periods, supporting biofilms development. Furthermore, the pulsed recharge strategy promoted biofilm growth more effectively than the continuous recharge strategy. These find-

ings provide insight into optimizing recharge strategies and media composition to manage system dynamics and, consequently, enhance contaminant removal in Soil-Aquifer Treatment systems.

## 1 Introduction

Groundwater depletion has become a pressing global issue driven by rising water demand and compounded by climate change (Amanambu et al., 2020; Gurdak, 2017; Jasechko et al., 2024). Managed Aquifer Recharge (MAR) offers a robust and sustainable solution to replenish aquifers while improving the quality of recharged water (Valhondo and Carrera, 2019). MAR involves introducing water into aquifers via diverse methods to achieve objectives such as aquifer storage, water quality enhancement, and prevention of seawater intrusion in coastal aquifers (Dillon, 2005; Page et al., 2018). However, regulatory hurdles often constrain the widespread application of MAR (Alam et al., 2021). In many countries, the use of treated wastewater as a water source is largely limited to pilot-scale and research applications under restrictive legal frameworks (Casanova et al., 2016; Miquel, 2003; Rivera-Vidal et al., 2025). These regulations, aimed at ensuring water quality due to global concerns about pollutants – such as endocrine disruptors, antibiotic-resistant bacteria, and nutrients – focus heavily on the source water quality (Bijay-Singh and Craswell, 2021; Nnadozie and Odume, 2019; Thacharodi et al., 2023). This focus often overlooks the natural pollutant reduction capacity of the porous media during recharge.

Water quality improvement through pollutant removal is especially relevant in Soil Aquifer Treatment (SAT), a MAR technique that uses impaired water source and intentionally promotes infiltration through the surface, thereby simultaneously enhancing groundwater quality and augmenting groundwater resources, the core objective of MAR. (Bouwer, 1991, 2002; Dillon, 2005; Bekele et al., 2011; Dillon et al., 2019; Valhondo et al., 2020a, b; Alharbi and El-Rawy, 2024). SAT systems have demonstrated remarkable water quality improvements, by removing essentially all suspended solids and microorganisms, greatly reducing dissolved organic carbon, nitrate, phosphates and most metals (Fox et al., 2001; Sanz et al., 2024a). To further optimize SAT, a reactive barrier has been proposed at the bottom of recharge basins (Valhondo et al., 2020a). This barrier, comprising sand, woodchips, compost, biochar, zeolites, and clay, releases dissolved organic carbon (DOC), fostering redox zonation and supporting diverse microbial communities. The reactive barrier also enhances pollutant sorption, particularly for neutral and cationic compounds (Valhondo et al., 2023). Beyond its water treatment benefits, the reactive barrier modifies the porous media texture, porosity, and water retention capacity (Martinez-Landa et al., 2023). Studies have demonstrated

its ability to reduce emerging contaminants, toxicity, and pathogen indicators, making it a cost-effective, eco-friendly treatment technique for water reclamation and the recovery of aquifers (Sanz et al., 2024a; Sunyer-Caldú et al., 2023). However, effective monitoring is essential for broader application and operation.

Monitoring SAT systems, especially in the unsaturated zone (USZ), presents unique challenges. While the aquifer can be monitored via sampling wells and sensors, tracking dynamic processes in the USZ is more complex. Numerous studies highlight that significant water quality improvements occur in the shallowest layers of soil, primarily driven by microbiological processes (Bekele et al., 2011; Dillon et al., 2020; Fichtner et al., 2019). Microorganisms catalyze oxidation-reduction reactions, which consume organic compounds, including pollutants. In porous media, microorganisms often form biofilms as a survival strategy (Donlan and Costerton, 2002).

Biofilms are critical for water quality enhancement because biodegradation predominantly occurs within them. In fact, Jou-Claus et al. (2024) have shown that the most lipophilic organic compounds, including those that are toxic by accumulation, tend to be retained in biofilms, which host the bacteria that degrade them, leading to high effective degradation rates even for recalcitrant compounds. Thus biofilms are essential for the optimal functioning of SAT systems. But biofilms alter the properties of the medium, affecting permeability and water retention (Baveye et al., 1998; Wang et al., 2024; Xia et al., 2014). The flow conditions in SAT systems (gravity flow, fine sand on top to prevent deep clogging and recharge rate much lower than the initial permeability) favor fingering, which further complicates monitoring. Point measurements, such as moisture sensors or a quantification of bacterial activity in a sample, provide limited insight due to spatial variability and evolving flow geometries. Nevertheless, monitoring is crucial for effective system management.

Despite growing interest on SAT, visualization of water and microbial dynamics in the USZ remains elusive. Electrical resistivity tomography (ERT) offers a promising solution for monitoring the USZ in SAT systems. ERT is non-invasive, provides extensive monitoring coverage, and is well-suited to detecting changes in resistivity caused by water content, biofilm growth, and preferential flow paths (Haaken et al., 2016; Wehrer et al., 2014; Wehrer and Slater, 2015). Previous studies have demonstrated ERT's ability to identify areas of increased water content, preferential flow, and fingering in the USZ (Deiana et al., 2007; Koestel et al., 2008, 2009). When used in time-lapse mode, ERT can characterize flow dynamics over time, offering valuable insight into recharge processes (Nenna et al., 2014; Palacios et al., 2020). While ERT has been successfully applied to monitor infiltration dynamics and USZ flow during MAR and SAT operations, previous studies have primarily focused on hydrodynamic process or subsurface structure (Haaken et al.,

2016; Sendrós et al., 2020, 2021; Arboleda-Zapata et al., 2025). By contrast, the potential of ERT to explore hydro-biogeochemical processes in the USZ of SAT systems, particularly the influence of recharge strategies and the indirect signatures of biofilm development on electrical properties, has received limited attention to date.

Our research addresses this gap by investigating the potential of ERT to identify preferential flow paths in two SAT systems: one incorporating a reactive barrier, hypothesized to promote biofilm development and enhance water retention, and another without reactive barrier. We use ERT to monitor the temporal evolution of both systems during two recharge episodes: one with continuous inflow and the other with pulsed inflow. We then link resistivity variations to flow patterns and biofilm dynamics within the USZ.

## 2 Materials and methods

### 2.1 SAT systems

ERT acquisitions were conducted at the pilot SAT systems located within the Palamós Wastewater Treatment Plant (WWTP) in NE Spain. For a more detailed description of the WWTP and local weather conditions, see Sect. S1 and Fig. S1 in the Supplement. These systems, described in detail by Valhondo et al. (2020b), consist of six SAT replicas. Each replica represents a 3.5 m<sup>2</sup> surface recharge basin overlaying a 1.15 m-thick USZ. Beneath this a 15 m-long × 2.34 m-wide canal filled with well-graded fine sand (grain size ~ 0.4 mm) that simulates the aquifer (Fig. 1).

A 1 m-thick Reactive Barrier (RB) was installed between the basin surface and the aquifer to promote pollutant removal through adsorption and biodegradation. The RB design includes a 20 cm fine sand layer at the top to prevent deep clogging and flotation of woody materials, and a 20 cm coarse sand layer at the bottom to evenly distribute the recharged water. This study focusses on two specific systems: Sand System (SandS), which consists solely of fine sand, thus representing traditional SAT systems and serving as reference, and Reactive Barrier System (RBS), composed of 50 % sand, 30 % organic matter (a blend of wood and garden wood compost), 10 % Biochar, 8 % zeolite, 2 % clay. The RB enhances water retention due to the secondary porosity of the pieces of wood, biochar and zeolite. Retention curves indicate the porosity of RB is some 50 % larger than that of the Sand (0.59 vs. 0.38, respectively) (Fig. S2).

Vegetation on the recharge basin plays a critical role in system functionality by reducing clogging and potentially enhancing pollutant removal (Valhondo et al., 2020b). Grass was planted following the installation of these RBs in January 2021. The grass was established using pre-grown sods. The soil within the sod root zone consisted of a mixture of sand and small proportion of clay. In some systems, the clay content was slightly higher, initially reducing infiltra-

tion capacity. This issue was mitigated by perforating the sod layer for several weeks during the first RP. As the vegetation progressed, the problem resolved naturally. No further maintenance was performed, allowing vegetation to evolve freely, although it remained sensitive to seasonal changes and recharge cycles (i.e., dry or flooded periods). For further details on the SAT systems see Fig. S3 in the Supplement.


The SAT systems are fed with secondary effluent from the WWTP (hereafter referred to as “INF”), which is pumped from a tank located at the outlet using dosing pumps (PRIUS, Emec s.r.l., Rieti, Italy). Pumping rates are recorded continuously with electromagnetic ISOMAG MS600 flowmeters (ISOIL industria, Milan, Italy). The pumped volume is distributed over the recharge surface using drip irrigation pipes (their layout can be seen in Fig. S3). Discharge occurs from the base of the aquifer, through a level control outlet at the opposite end of the recharge basins, EX point (at the right of Fig. 1a). The discharge point of the systems is equipped with a water meter to record the discharge volume.

Each SAT system includes 10 piezometers equipped with CTDs sensors (DIVER, VanEssen Instruments, Waterloo, ON, Canada) that record aquifer heads, temperatures and Electrical Conductivity (EC) in the saturated points (Fig. 1b). Temperature and volumetric water content were measured using 6 capacitive moisture Aquacheck-sensors (Cesens, Logroño, La Rioja, Spain) equally spaced 10 cm at 6 depths in the central recharge basin area (Fig. 1c). Weather data, including rainfall, wind direction and velocity, atmospheric moisture, and temperature, was recorded onsite by a weather station (Meters) (Fig. S1).

For the ERT acquisitions, six rods (spaced 0.65 m apart) were installed, each equipped with 12 electrodes. The electrodes spaced 10 cm apart and extending from the basin surface to the base of the USZ (depths range: 0.1 to 1.2 m), encompass a monitored volume of approximately 1 m<sup>3</sup> (Fig. 1c and d). To maintain consistent ERT measurements, this volume remained undisturbed and free of metallic objects, which could interfere with readings. Half of the USZ volume was allocated for ERT acquisitions, while the remaining half accommodated additional instruments and material sampling for biofilm growth studies over time.

### 2.2 Recharge systems operation

The SAT systems operate by alternating between Wet Cycles (WC), during which recharge takes place, and Dry Cycles (DC), during which the recharge is paused to allow the USZ to drain and the surface to dry. This alternation is necessary to restore infiltration capacity, which can decline due to clogging caused by biological activity (e.g., biofilm growth) and the accumulation of fine organic and inorganic particles on the basin surface. A common guideline recommends alternating two weeks of WC with two weeks of DC (Bouwer, 2002). However, the optimal schedule depends on site-specific conditions and the intended treatment objectives of the SAT sys-

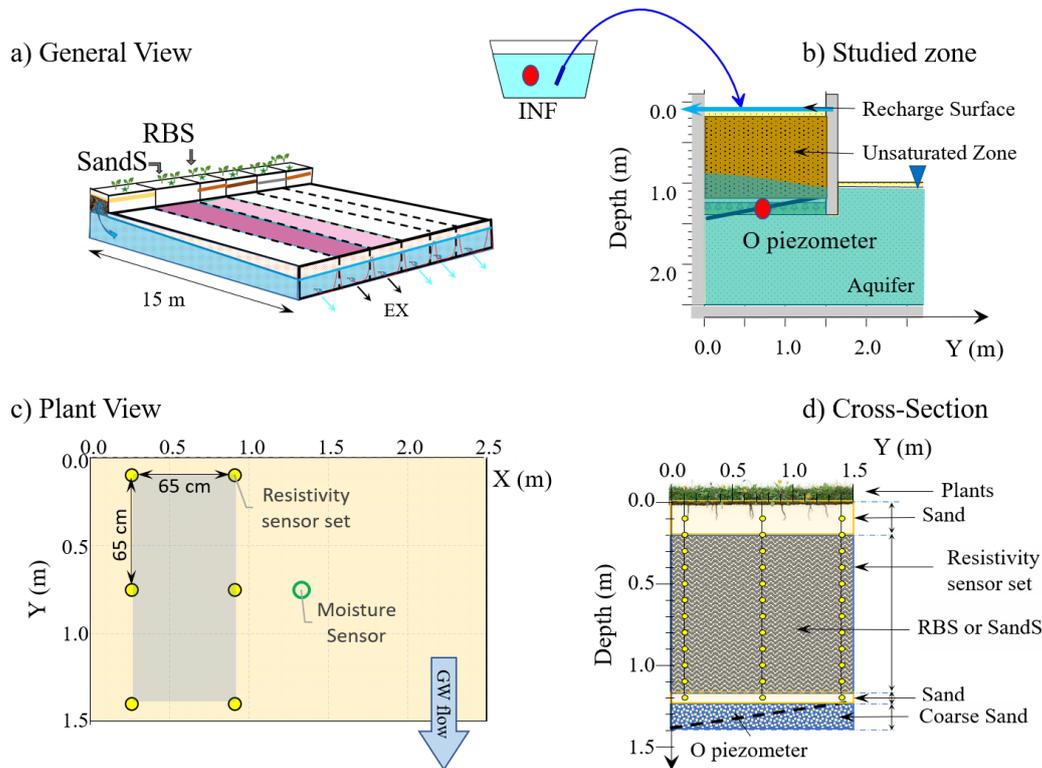

**Figure 1.** Site description: (a) general view of the six SAT systems in Palamós, including the two studied systems, SandS and RBS; (b) longitudinal cross section the SATs systems; (c) plan view; and (d) lateral cross section showing the location of ERT electrodes.

tem, as different contaminants may require distinct hydrological regimes to maximize their removal efficiency. Our observations indicate that our SAT systems have operated continuously for periods of several months without clogging (having to stop for maintenance), which we attribute to the role of vegetation in maintaining open recharge pathways (Valhondo et al., 2020b; Wu et al., 2017; Le Coustumer et al., 2012). In this study, we implemented extended WC durations to evaluate two distinct recharge strategies: continuous (Cont) and pulsed (Puls) operations. In the Continuous strategy, recharge was applied at a constant flow rate, promoting steady-state flow conditions. In the Puls strategy, recharge was applied for 12 h per day. This approach (Puls) enhances oxygen availability in the USZ, as air is sucked into the USZ during DCs and pushed down during WCs (Roumelis et al., 2025; Sepulveda-Ruiz et al., 2025). Under Puls operation, the recharge flow rate was doubled compared to Cont operations to ensure identical daily recharge volumes (Figs. 2a and S4a). Two recharge episodes were monitored in this study:

1. Puls operation: The Wet Cycle started on 21 September 2022 (StrPuls), after 110 d of Dry Cycle, and ended on 11 November 2022 (EndPuls),
2. Cont operation: The Wet Cycle started on 22 December 2022 (StrCont), after 41 d of Dry Cycle, and concluded on 22 March 2023 (EndCont).

### 2.3 Cross-hole electrical resistivity tomography

Cross-borehole ERT involves measuring the ratio of the voltage between an electrode pair to the current injected between another electrode pair, across numerous sets of four electrodes positioned along the considered boreholes. For this experiment 6 plastic rods (borehole) with 12 electrodes spaced at 10 cm intervals on each array. The uppermost electrode on each array was 10 cm below the tank top (see Fig. 1c). Bellmunt et al. (2016) suggest that it is better to use different configurations (dipole–dipole, pole–tripole and Wenner) with different sensitivity patterns to obtain the maximum information about the subsurface resistivity. The configurations adopted here were the ones described and assessed by Bing and Greenhalgh (2000) and Bellmunt et al. (2016).

The measurements were conducted using a Syscal Pro multi-channel (10-channel) system (IRIS instruments) with 72 electrodes. Current injection lasted  $250 \times 10^{-3}$  s, with up to six stacks performed to ensure data quality. Each tomography session lasted over 80 min and 6740 measurements were acquired. Measurements were timed to occur just before cycle transitions (e.g., End Wet Cycle: EndWC or End Dry Cycle: EndDC) and again four hours after the new cycle began (Start Wet Cycle: StrWC or Start Dry Cycle: StrDC). These intervals were chosen to capture the evolution of water distribution within the USZ.

The numerical inversion was performed using the R3t code via the ResIPy open-source package (Binley, 2015; Binley and Kemna, 2005; Blanchy et al., 2020). R3t code provides a forward/inverse solution for three-dimensional current flow within a tetrahedral mesh. The inverse solution is derived from a regularized objective function combined with weighted least squares, in an Occam-type approach. We follow the strategy proposed by Bellmunt and Marcuello (2011) for the quality control of the data based on the comparison between normal and reciprocal measurements. We chose a threshold of 15 % difference between the normal and reciprocal data to keep the measurement. Moreover, during the inversion process a linear error model relating the reciprocal error with the measured resistance is used to improve the inversion results and to reduce the variance in the model estimates following (Tso et al., 2017).

## 2.4 Biofilm monitoring in the USZ via EPS extraction

Samples from the USZ material were collected weekly during both the Puls and Cont recharge episodes to evaluate biofilm growth via quantification of extracellular polymeric substances (EPS). Sampling began at the start of each wet cycle (i.e., StrWC) and continued until the final day, in both Sand and RB systems. Using a soil probe, samples were taken at three depths (28, 41 and 54 cm), outside the ERT monitoring area and ensuring that previous sampling points were avoided. Samples were stored in sterilized plastic tubes, transported at 4 °C, and preserved at –20 °C until analysis. The holes were refilled with the same type of barrier material that had sampled.

EPS are key indicators of biofilm development. They are primarily composed of polysaccharides and proteins and contributes more to bioclogging than microbial cells themselves (Mitchell and Nevo, 1964). EPS were extracted using a cation exchange resin (CER) (Dowex Marathon C, Na<sup>+</sup> form, strongly acidic, Sigma-Aldrich, Steinheim, Germany), which was pre-conditioned according to the manufacturer's instructions.

For each sample, 5 g of material was transferred to a falcon tube containing 30 mL of phosphate buffer (1.78 g of Na<sub>2</sub>HPO<sub>4</sub> · 2H<sub>2</sub>O, 0.24 g of KH<sub>2</sub>PO<sub>4</sub>, 8 g of NaCl, 0.2 g of KCl; pH 7.0) and 5 g of preconditioned resin. The EPS extraction was conducted at 4 °C on a shaker (300 rpm) for one hour to minimize microbial cell disruption. Following this, the samples were centrifugated at 12 000 g for 15 min at 4 °C (Eppendorf 5810R, Eppendorf Ibérica S.L.U., Spain). The supernatant was collected and stored at 4 °C for subsequent EPS characterization, with resin concentration optimized to maximize EPS recovery (Frølund et al., 1996). Polysaccharide content, as a component of EPS, was quantified using the phenol-sulphuric acid assay (DuBois et al., 1956). Standard curves were prepared for glucose (0–200 µg mL<sup>-1</sup>) and BSA (0–25 µg mL<sup>-1</sup>).

Polysaccharide content was measured following the phenol-sulphuric acid assay and protein content was measured following the Bradford assay. Standard of glucose (0–200 µg mL<sup>-1</sup>) and BSA (0–25 µg mL<sup>-1</sup>) were prepared (DuBois et al., 1956). The results are presented in total EPS content (µg g<sup>-1</sup> dw) (polysaccharides and proteins) during both recharge episodes (see Table S1).

## 3 Results and Discussion

### 3.1 Influence of the recharge strategy on hydraulic conditions

The hydraulic evolution of RBS and SandS are shown in Figs. 2 and 3, and the complete evolution of point moisture measurements with depth for both systems are displayed in Figs. S4 and S5 in the Supplement. Recharge rate peaks ( $q_{rec}$ ) during Puls are double than during Cont (Figs. 2 and 3a), which is reflected in the evolution of volumetric water content (Figs. 2 and 3b). During the first four days of Puls, a malfunction in the automatic pump controller caused continuous recharge instead of pulses, leading to a step increase in %H. After this, Puls WC proceeded as intended, with normal recharge rates ( $q_{rec}$ ) and corresponding system responses in %H,  $T^a$ , and depth to water table. The electrical conductivity (EC) measured in the INF water averaged 2 mS cm<sup>-1</sup>, with variations associated with specific wind directions during certain rainfall events that caused seawater intrusions into the sewerage system as a result of wave overtopping. (see Fig. S6). Similar variations were subsequently detected in the O piezometer, but with lower and slightly broader peaks, allowing EC to be used as a tracer for estimating the residence time of the recharged water within the USZ (Martínez-Landa et al., 2023; Valhondo et al., 2016). The Aquacheck probe includes temperature sensors placed at the same depths as the moisture sensors. Figure S7 illustrates the temperature variations recorded at 0.4 m depth for both systems and system operations.

At the start of the Puls period (blue dotted line), both systems were extremely dry due to the preceding 110 d dry cycle (EndDC). Lower moisture levels may enhance the formation of preferential flow paths (Kang et al., 2023). Water content was below 5 % in SandS, while RBS showed slightly higher values (around 10 %). By the end of the wet cycle (EndWC), water content had increased to 20 %–25 % in the SandS and to 30 %–35 % in the RBS, highlighting the greater moisture retention capacity of the materials integrated in the RB compared to sand. Variations in %H due to Puls recharge reached around 15 % in SandS and 20 % in RBS at 10 cm depth. These fluctuations persisted with depth in SandS but became smoother in the RBS, with water content stabilizing at ~ 20 % in SandS and ~ 35 % in the RBS (Figs. S4 and S5 respectively).

Under Cont recharge (red line), both systems started with higher initial water contents than in Puls, but SandS exhibited lower values ( $\sim 10\%$ ) compared to RBS ( $\sim 15\%$ – $30\%$ , increasing with depth). At the end of the Cont WC (EndWC), water content reached  $\sim 20\%$  in SandS and  $\sim 30\%$  in RBS, with minimal variation with depth. By the End of the Cont scheme, we have observed an increase of a water layer due to the reduction of infiltration capacity. In these types of systems, the reduction in infiltration capacity is likely attributable to: (i) the superficial accumulation of fine organic particulate material transported by the INF water; (ii) increased water viscosity associated with lower winter temperatures (Fig. S7); (iii) seasonal stages in the life cycle of certain plant species, during which established plants cease proliferating and produce fewer new roots (Fig. S3; Xiao et al., 2024); and (iv) a slightly higher proportion of clay in the root zone (observed in SandS). These conditions favored the temporary formation of a surface water layer (Figs. S8 and S9).

Notably, in SandS, dissolved oxygen at 35 cm depth remained above  $3\text{ mg L}^{-1}$  for most of the Cont WC but dropped sharply around day 50 to negligible values (Figs. S10 and S11), coinciding with the period just before surface water began to accumulate and with the peak EPS concentrations recorded in SandS (Fig. 4). The water content did not decrease with depth during this period, indicating that this was not a case of complete surface clogging which would have reduced USZ water content once drainage exceeded infiltration.

Depth to water table in RBs (Figs. 2 and 3c) decreases in response to recharge from initially dry (1.2 m) and fluctuates during pulsed recharge. Considering that the aquifer water tables are measured in terms of depth, the water table elevation is observed as a decrease in depth.

Since Puls and Cont WCs had different durations, data analysis focused on the first 51 d to observe the systems' response to the USZ saturation behavior (Figs. 2 and 3). Cont WC continued until day 91, exhibiting trends like those of Puls WC.

Wi-Fi connectivity issues with the Aquacheck datalogger caused some data loss during Cont measurements. However, once the signal was restored, the measurements trends aligned with prior observations. The CTD sensor recorded data only after recharge water reached its location, resulting in initial gaps in WC measurements.

### 3.2 Influence of the recharge strategy on EPS

EPS content differed markedly between the two SAT systems (Fig. 4). In SandS, average EPS concentrations were  $71\ \mu\text{g g}^{-1}$  during Puls recharge and  $69\ \mu\text{g g}^{-1}$  during Cont recharge. In contrast, RBS exhibited significantly higher EPS levels, averaging 390 and  $225\ \mu\text{g g}^{-1}$  during Puls and Cont recharge, respectively (Table S1).

In SandS, EPS levels began to rise on day 22 (Puls) and day 25 (Cont), displaying similar temporal trends across both strategies. In RBS, a sharp increase in EPS was observed by day 15 during Puls recharge, followed by a decline, whereas under Cont recharge, EPS levels increased gradually from day 20 to day 34. This Puls sample on day 15, may reflect the heterogeneity of the medium, as it does not exhibit a consistent increasing trend but rather a localized increase.


EPS production typically occurs during the initial phase of microbial attachment to surfaces and plays a key role modifying porous media properties, including pore-scale hydration (Du et al., 2021; Lu et al., 2024). The earlier peak observed during the Puls strategy may suggest that it accelerates the microbial attachment phase. However, this effect could also be influenced by higher temperatures during the Puls recharge episode compared to the Cont period (see Fig. S7 for temperature evolution).

The differences between the two SAT systems are likely related to the organic-rich composition of the RB which promote both water retention and microbial colonization. Sustained moisture levels (%H) coupled with elevated temperature, further support biofilm growth. In turn, the biofilm enhances moisture retention, creating a positive feedback loop that further supports biofilm persistence and system functionality.

This interplay is relevant in SAT systems, as biofilm presence may facilitate the degradation of contaminants of emerging concern, while also potentially enhancing the transport of microbial contaminants (Du et al., 2021; Jou-Claus et al., 2024).

### 3.3 Spatial Moisture Dynamics Revealed by ERT

The ERT measurements provide spatially resolved insight into moisture distribution across the USZ ( $1\text{ m}^3$  block), from the basin surface to the aquifer water level, complementing the point-scale data discussed in previous sections. Results are displayed in three perpendicular planes, as shown in Figs. 5, 6, and 7. These figures depict a temporal sequence of specific measurements taken with the ERT. Log10 resistivity values are inversely related to water content (%H). Dark blue areas correspond to the lowest resistivity values, indicating the wettest (i.e., highest %H), while light blue areas represent the driest (lowest %H values). The CTD sensor automatically recorded water EC every 30 min at the INF (WWTP effluent tank) and the O piezometer (beneath the USZ) (Fig. 1), with an average value of  $2.2\ \text{mS cm}^{-1}$ . The Lowest water EC values occurred during heavy rain events, while peak values were linked to seawater intrusion into the sewage system caused by coastal windstorms (Fig. S6). ERT results are presented in terms of inverted ERT to facilitate consistent comparison within acquisitions (all water displays the same EC) but slightly hinder long-term comparisons (note that water EC fluctuations are far smaller than those of ERT).

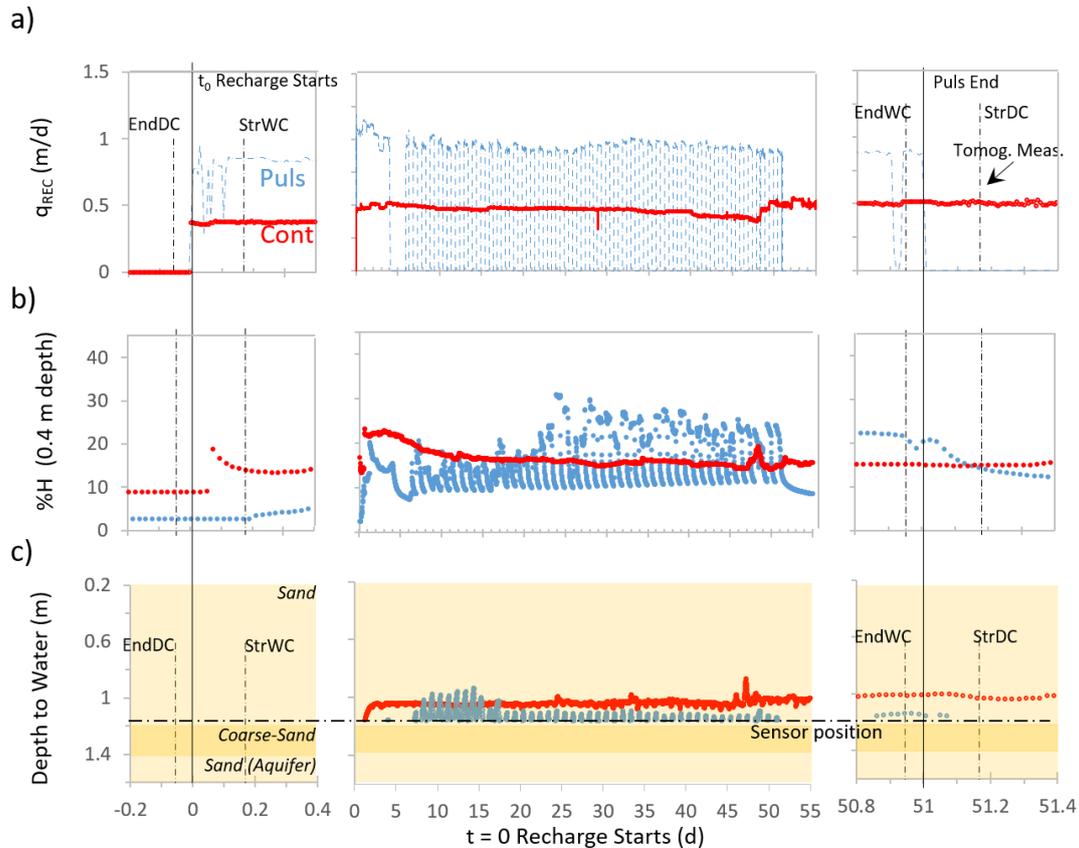

**Figure 2.** Time (days after the beginning of each WC) evolution of main hydraulic variables of the SandS: (a) recharge rate, (b) volumetric water content at 40 cm depth (other depths displayed in the Supplement), and (c) materials (color shadows) and water level at piezometer O, below the barrier, during both recharge episodes (Puls in blue, and Cont in red). The left and right columns are zooms at the initial and final times to best display the times of ERT acquisitions (dashed lines). Note that the recharge episodes (RP) were sequential. After a long dry period (EndDC), pulse recharge started at StrWC (= StrPuls) and continued for 51 d until EndWC (= EndPuls = StrDC). The SAT remained dry for 41 d until a continuous RP started at StrWC (= StrCont), which remained operational for 91 d until EndWC (= EndCont). The time scale around this last stop has been shifted to facilitate superposition with EndPuls.


The sequence starts with the Puls RP during the driest period (EndDC), where light colors predominate. Infiltration is visible in the second frame (StrWC = StrPuls), where it becomes evident that it does not occur as a homogeneous front, but rather in preferential areas, resulting in darker spots within the lighter regions. Infiltration appears to occur more easily in SandS than in RBS, as indicated by the increasing dark blue areas with depth in the second frame for this system. This observation is consistent with the lower initial moisture content in the SandS, which may facilitate preferential flow paths and has got less water content, and resident water to displace (compare Fig. 2b for Sand and Fig. 3b for RBS).

At the EndPuls dry areas are still present amid more humid zones, showing heterogeneity in water content distribution measurement, despite the high %H. Water content is higher in RBS than in SandS, which aligns with the higher EPS concentrations observed. This is consistent with feedback mechanism, where higher moisture supports EPS mainte-

nance, and EPS in turn enhances water retention. The fourth frame (StrDC) shows the first hours of drainage, revealing again greater retention capacity and heterogeneity in RBS, reflected by a broader range of color gradation, which is again consistent with the organic-rich materials and high biofilm content that enhance moisture retention as shown in Fig. S2.

Cont began after 41 d of continuous drainage in winter (EndDC), which represents the first ERT measurement in this sequence. SandS is drier than RBS, as expected. Four hours after the recharge begins, the StrWC frame shows increase %H in both systems, with RBS displaying a more distinct preferential flow path than SandS.

After 91 d of continuous recharge, the EndWC measurement is taken. In this sequence, it appears that more preferential flow paths have developed compared to Puls, as evidenced by the increased heterogeneity in color distribution across the three figures. By the end of the continuous recharge episode (EndWC), water accumulation is observed

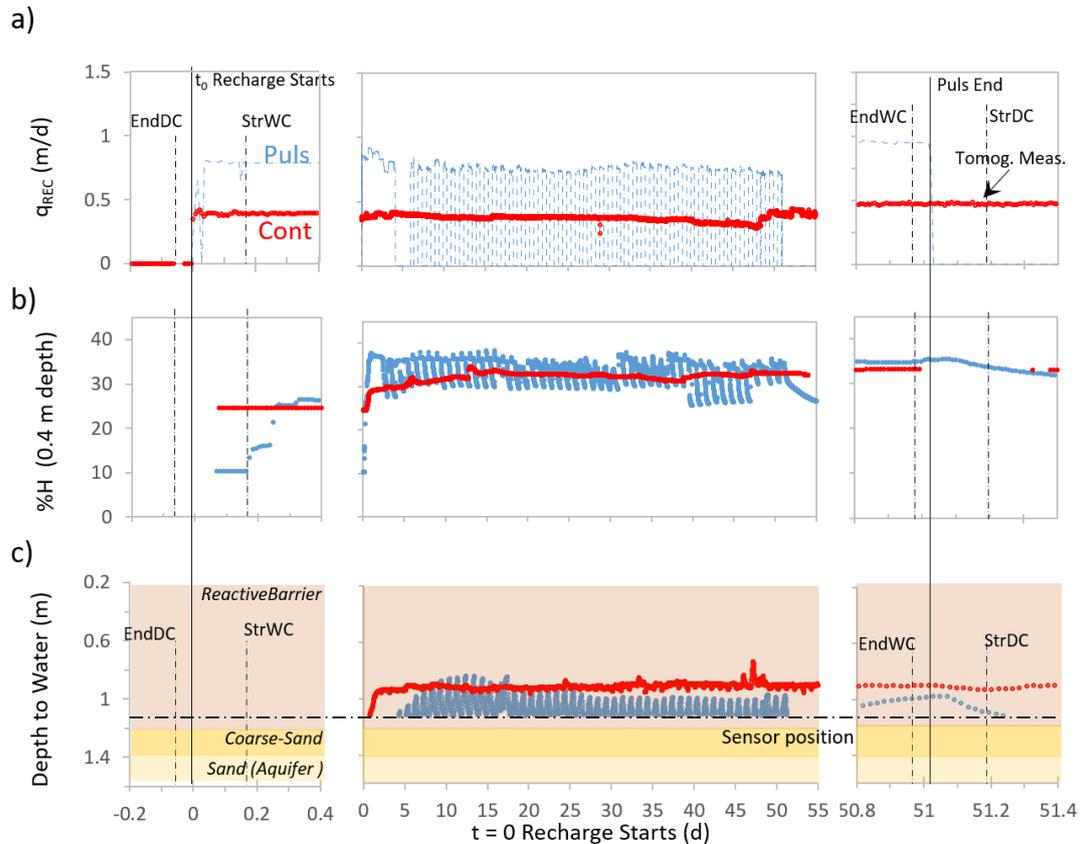


**Figure 3.** Time (days after the beginning of each WC) evolution of main hydraulic variables of the RBS: **(a)** recharge rate, **(b)** volumetric water content at 40 cm depth (other depts displayed in the Supplement), and **(c)** materials (color shadows) and water level at piezometer O, below the barrier, during both recharge episodes (Puls in blue, and Cont in red). The left and right columns are zooms at the initial and final times to best display the times of ERT acquisitions (dashed lines).

at the surface of the basin, 28 cm in SandS and 1.5 cm in RBS. During the 4 h leading to StrDC, the SandS water layer decreases by 6 cm, while RBS water layer disappears. The levels in the aquifer (Depth to water table: DW), indicated with a red line in the figures, slightly saturate the lower part of the analyzed volume at the end of the two WC (EndWC) measurements, with %H increasing due to capillary rise.

Analyzing the validity of the inversion is required prior to a more detailed analysis of results. The first validation comes from consistency with expectations, as discussed in the two previous paragraphs. But a more precise discussion of the validity comes from comparing inversions at the end of wet cycles (EndWC) to those at the beginning of dry cycles (StrDC). What happens in between is the continuation of recharge for 80 min, which should imply little change with respect to EndWC inversions, followed by 240 min draining the retained water. This situation occurred twice (at EndPuls and at EndCont) for each system (SandS and RBS). Comparing the EndWC to the StrDC (columns 3–4 of Fig. 5 through Fig. 7 for EndPuls, and 7–8 for EndCont). These comparisons yield several useful messages. But the first one is that all of them reflect with surprising detail the draining pro-

cess. This is hard to visualize because it occurs in 3D and one needs to examine Fig. 5 through Fig. 7, while simultaneously imagining gravity drainage, to properly understand the evolution. Therefore, we only discuss in detail the evolution of the RBS during the EndPuls (bottom row maps in columns 3–4 of the three figures). A finger can be seen at the end of the WC (column 3) in Fig. 6 at  $Y \approx 0.3$  m extending from the surface to nearly the bottom, where it spreads laterally. This finger extends over the whole width at the horizontal cross section (Fig. 7) but is not quite crossed by the vertical cross section of Fig. 5 (only the edges). It would be expected that this finger would serve as drain of the USZ when recharge stops. This drainage becomes apparent when examining the StrDC (column 4). Areas away from the finger stay wet. Also relevant is the significant reduction of moisture at the bottom, which coincides with the coarse sand base. Similar observations can be made in the other three EndWC–StrDC pairs. It is also interesting the behavior at EndCont where both systems were flooded at EndCont, partly due to the low temperatures (Figs. S1 and S7). But SandS remained flooded at StrDC, while RBS had become dry (the thickness of the water layer flooding is shown in Figs. 5 and 6, and its time evo-

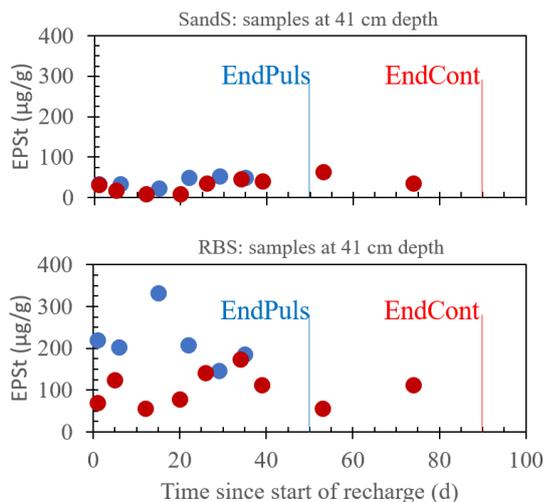

**Figure 4.** Total EPS ( $\mu\text{g g}^{-1}$ ) sampled in the USZ material at 41 cm depth at the SandS system (up) and RBS system (down). Blue and red dots correspond to values obtained during the pulsed (Puls) and the continuous (Cont) recharge strategies, respectively. Due to different durations of each Wet Cycle (51 d for Puls and 91 d for Cont), fewer samples were taken in Puls than in Cont RP.

lution in Figs. S8a and S9a). In this case the resistivity maps at EndWC and StrDC are very similar for SandS (top row maps in columns 7–8 of the three figures) but suggest beginning of drainage for RBS. Considering that all inversions were performed independently from independent ERT acquisitions, we take this consistency to indicate that the resistivity variability displayed in Fig. 5 through Fig. 7 is not an inversion artifact, but representative of the SAT system behavior, which allows us to discuss other features of these maps.


The EndWC–StrDC pairs, discussed in the previous paragraph, also provide information about biofilms and the conditions for growth and survival. Dark blue spots can be observed at the end of the recharge episodes (the 4 EndWC maps in columns 3 and 7 of Fig. 5 through Fig. 7) remain slightly reduced in size, after 4 h of drainage. Given that the permeability of the systems is of the order of  $10 \text{ m d}^{-1}$ , and that the raw media are relatively homogeneous, they should have drained if they had represented simply water saturation. We conclude that they must represent areas with significant water accumulation due to high organic content and biofilms. In short, very low resistivity area (dark blue in the figures) can be associated with high biofilm content.

Large biofilm clusters do not occupy the whole medium, but a relatively small fraction, as can be deduced from the result of the previous paragraph plus close examination of the figures. As expected, the remaining wet immediately after drainage starts (again, EndWC–StrDC pairs) given their low effective permeability. The relatively low biofilm filled area might suggest that only a small fraction of the USZ volume is active. ERT resolution does not allow us to reach such conclusion. Biofilm clusters may have a broad range of sizes

Kurz et al. (2023) show that they follow a power law distribution, which was required by Wang et al. (2024) to fit breakthrough curves of partitioning tracers in biofilm growth laboratory experiments. Therefore, one may expect significant biochemical activity in biofilm clusters not visible in the ERT inversion. Still, one may also expect dramatically reducing conditions, and thus different microbial communities, in the inner cores of the large clusters, which should be broadened the range of contaminants removed during SAT.

Significant differences could be observed on the behavior of the SandS and RBS during the dry period, as can be deduced from comparison of the 4 and 5 columns of StrDC–EndDC pairs in Fig. 5 through Fig. 7. It is clear that the SandS drains well, which favors aeration, oxygen diffusion into the USZ, and the consumption of EPS on biofilms. In fact, it is this type of response what motivates traditional operation of SAT systems since Bouwer (1974). To prevent biological clogging, the usual practice is to alternate wet and dry periods, typically with durations around 2 weeks each. Infiltration rates usually recover after two weeks dry which conventional wisdom attributes to biofilm consumption under aerobic conditions. This is consistent with what we observed in the SandS. The RBS showed much larger moisture at EndDC than at StrDC. While this increase can be attributed to the rainfall occurring at the end of DC, the fact remains that the SandS was dry at EndDC and the RBS was not. During the Puls scheme, the SandS maintains aerobic conditions throughout the entire USZ, whereas the RBS maintains aerobic conditions only during the dry part of each pulse, and only in the upper part of the USZ, sustaining anaerobic conditions at depth, which are reversed at the beginning of the dry cycle (StrDC), see oxygen behavior in Figs. S10 (SandS) and S11 (RBS). We attribute this differing behavior to the high retention capacity of both the organic matter and the biofilms in the RBS.

Figure 5 through Fig. 7 display differences in the behavior of the SandS and RBS during the two recharge episodes. The SandS consistently starts with relatively low water retention during the first hours, but it increases significantly both during Puls and Cont recharge regimes. We attribute this increase to biofilm growth. Similar behavior occurs for the RBS during the Puls cycle, but not during the Cont cycle. In fact, as discussed in the previous paragraph, the RBS had large water contents at EndWC, so it is not surprising that it immediately showed very high moisture at StrWC (column 6, bottom row Fig. 5 through Fig. 7). What is surprising is that water retention, while still higher than the SandS, decreased by the next acquisition (EndWC, column 7). We attribute this behavior to a reduction in infiltration capacity driven by the combined effect of several factors as it is explained in Sect. 3.1, which may have decreased biological activity. Notably, this clogging effect was not observed during a six-month Cont RP conducted before the another sod installation (Sanz et al., 2024b, a). Therefore, we deduce that, in this case, the slightly higher proportion of clay in the

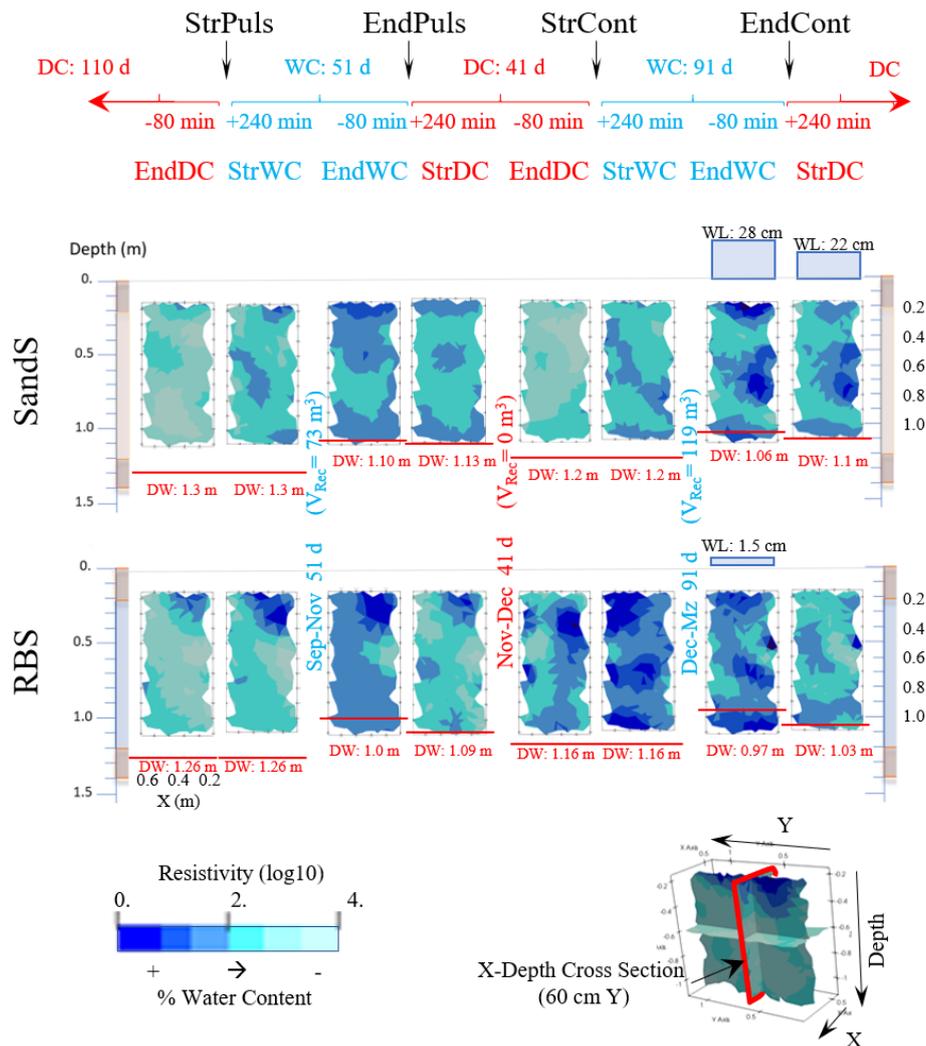


**Figure 5.** X depth Cross section at 60 cm in Y direction, highlighted in red in the lower-right scheme. The top timeline displays the measurement periods: the recharge episode (RP: Puls or Cont) and their start or end points; the central timeline indicates the cycles (Wet Cycle, WC, or Dry Cycle, DC) within each RP and their durations in days; and the bottom timeline shows time in minutes, referenced to the start or end of each cycle when the ERT data was acquired (red for dry cycles, blue for wet cycles). The central section of the figure contains the resistivity measurements, arranged in two rows: the top row shows measurements for the SandS and the bottom row shows measurements for the RBS. The legend indicates the resistivity scale (log10) and its inverse correlation with water content (%). In the downer part of each image the Deep to the Water table (DW) is indicated in red, to mark the position of the aquifer (100 % of water content). A blue square in the upper part of the images indicates the water column over the basin surface, if exist, and the numbers the sizes in cm at the time of ERT measurement.

root zone of the new sods, together with the accumulation of fine organic particles and the long duration of Cont recharge scheme, is responsible for the observed reduction in infiltration capacity.

The evolution of oxygen concentrations in both systems during both cycles is also interesting (Figs. S10 and S11). As expected, oxygen concentrations remain high during the Puls cycles (recall, Sect. 2.2, that the goal of pulses was to enhance oxygen availability in the USZ). However, concentrations in the SandS remained much higher (fluctuating around  $6 \text{ mg L}^{-1}$  at 35 cm depth and  $4\text{--}5 \text{ mg L}^{-1}$  at 90 cm

depth, close to the water table) than in the RBS (concentrations dropped after 30 d of recharge and started fluctuating between below 0.01, LOD, and  $2 \text{ mg L}^{-1}$  at 35 cm, and between 0.03 and  $0.1 \text{ mg L}^{-1}$  at 90 cm). This reflects two factors. On the one hand, SandS showed faster drainage than RBS, which favors oxygen diffusion. On the other hand, the lower concentrations in the RBS reflect the biofilm (very low resistivity) virtually covering the top of the RBS during Puls (column 3, bottom row of Figs. 5 and 6). The fact that oxygen was virtually depleted at 35 cm during the Puls WC suggests intense biological activity. Interestingly, oxygen never

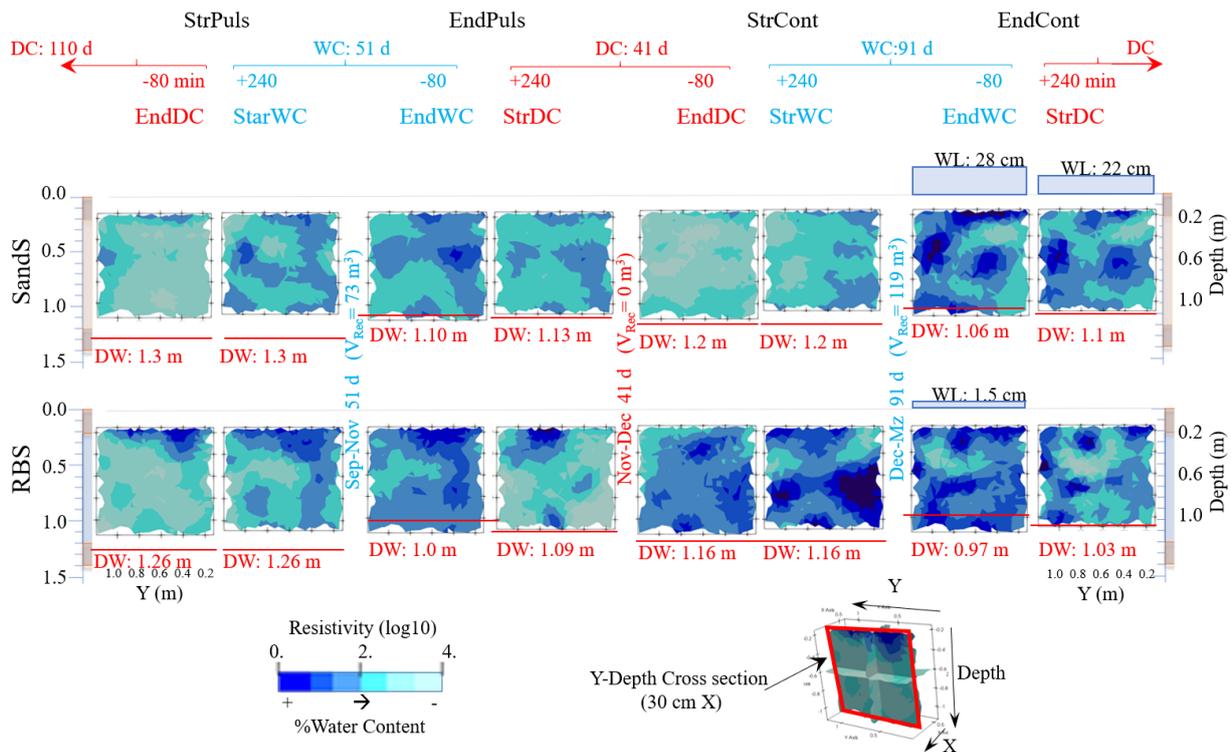

**Figure 6.** Y depth Cross section at 30 cm in X direction, highlighted in red in the lower-right scheme. The top timeline displays the measurement periods: the recharge episode (RP: Puls or Cont) and their start or end points; the central timeline indicates the cycles (Wet Cycle, WC, or Dry Cycle, DC) within each RP and their durations in days; and the bottom timeline shows time in minutes, referenced to the start or end of each cycle when the ERT data was acquired (red for dry cycles, blue for wet cycles). The central section of the figure contains the resistivity measurements, arranged in two rows: the top row shows measurements for the SandS, and the bottom row shows measurements for the RBS. The legend indicates the resistivity scale (log10) and its inverse correlation with water content (%). In the downer part of each image the Deep to the Water table (DW) is indicated in red, to mark the position of the aquifer (100 % of water content). A blue square in the upper part of the images indicates the water column over the basin surface, if exist, and the numbers the sizes in cm at the time of ERT measurement.


reached full air saturation, despite clear evidence of air infiltration. While we cannot directly demonstrate the mechanism, this pattern is consistent with the “aquifer breathing” process described by Roumelis et al. (2025). In our case, we hypothesize that the pulsed recharge strategy enhanced oxygen entry, thereby promoting aerobic conditions in the USZ. A last comment regarding oxygen concentrations is that recorded values, during Cont recharge, were higher at 90 cm depth than at 35 cm. This result suggests that oxygen rich water was reaching the deep portions of the USZ through preferential flow paths, not recorded by our sensors. This illustrates one of the advantages of ERT overall maps with respect to point measurements.

Figure 5 through Fig. 7 also show that the “hot spots” (dark blue areas indicative of big biofilm clusters) changed location along the recharge episodes. We interpret this displacement as indicative of biochemical processes. Big clusters may grow in the edges where electron donors and acceptors flow close to large microbial communities but may die in the middle for lack of nutrients. A hint of this process can

be inferred by comparing the horizontal cross sections of the RBS before and after of EndPuls (Columns 3 and 4, respectively, of the bottom row of Fig. 7). The apparent finger intersected by this section at around  $Y = 0.4$  before EndPuls, appears displaced towards  $Y = 0.5$  (upwards in the figure) immediately after the stop of injection, which suggests that the biofilm is growing in that direction, so that it is where water is retained at StrDC. Intermittency in preferential flow paths has also been observed by Kurz et al. (2022) using microfluidics techniques. They attribute it to the competition between growth, similar patterns as those described here, and shear stress that causes rapid opening of preferential flow paths. Their head gradients ranged between 80 and 300, compared to close to 1 in our experiment, so that it is not clear if their conclusion can be extrapolated to field conditions.

#### 4 Conclusions

The first observation of this work is that ERT allows visualizing and monitoring variations in water retention that we

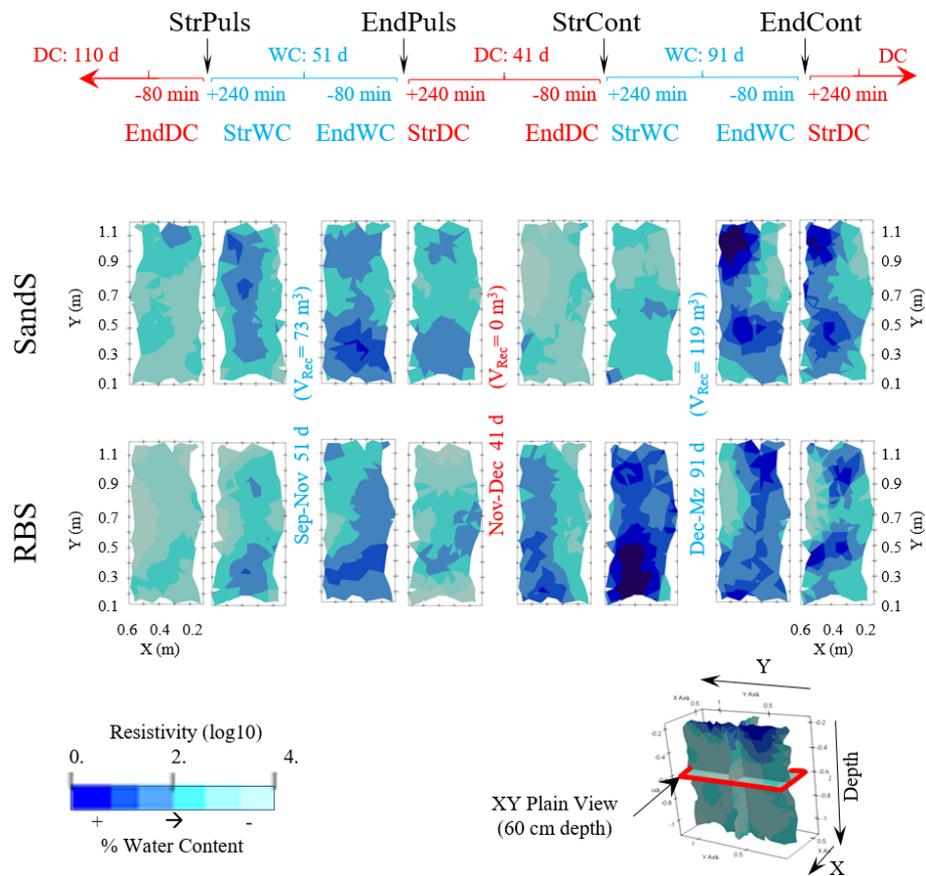

**Figure 7.** XY horizontal section at a depth of 60 cm, highlighted in red in the lower-right scheme. The top timeline displays the measurement periods: the recharge episode (RP: Puls or Cont) and their start or end points; the central timeline indicates the cycles (Wet Cycle, WC, or Dry Cycle, DC) within each RP and their durations in days; and the bottom timeline shows time in minutes, referenced to the start or end of each cycle when the ERT data was acquired (red for dry cycles, blue for wet cycles). The central section of the figure contains the resistivity measurements, arranged in two rows: the top row shows measurements for the Sands, and the bottom row shows measurements for the RBS. The legend indicates the resistivity scale (log10) and its inverse correlation with water content (%).

associate to biofilm growth. This is relevant because contaminant removal in SAT systems is driven by sorption and biodegradation processes. It is known that biodegradation occurs predominantly within biofilms, both because they host the bacterial colonies that promote degradation and because they tend to sorb the most lipophilic compounds by mechanisms analogous to those that favor their accumulation in animal tissues. The implication is that, on the one hand, it is desirable to promote biofilm growth. But, on the other hand, biofilms tend to clog. Navigating these contradicting requirements will require detailed monitoring. Our first conclusion is that ERT will help with such monitoring.

Beyond its potential use for detailed monitoring, ERT's ability to map water distribution heterogeneity has proven useful in gaining insight into the functioning of different recharge strategies and the use of a reactive barrier, as well as how they influence water infiltration and retention. Both approaches created localized moisture variations, which suggests the formation of large biofilm clusters. These clusters

occupy a relatively modest fraction of the whole medium, which contributes to explaining the resilience of the systems and the observation that they take a long time to clog (incipient clogging was only observed at the end of the continuous recharge operation). The evolution of ERT maps also implies a rather dynamic structure of water flow within the USZ, which preferential flow paths (infiltration fingers) vary in response to changes in the biofilm clusters.

While ERT provides reliable maps of moisture distribution, interpretation is best achieved when coupled to point measurements. We have found oxygen monitoring particularly useful to add a quantitative measure of biochemical activity to the moisture maps. The combined analysis of hydraulic monitoring, EPS quantification, and ERT imaging demonstrates that recharge strategy and barriers implementation influence biofilm development and water distribution in the USZ. The RBS, due to its organic-rich composition and higher porosity, promotes biofilm formation and retains more moisture, reinforcing a positive feedback loop between mi-

crobial activity and hydraulic behavior. ERT imaging proved particularly valuable for visualizing spatial heterogeneity and preferential flow patterns, offering critical insights that complement point-based measurements and support informed design and operation of SAT systems. The findings revealed significant contrasts between the reactive barrier system (RBS) and the control sand system (SandS). The RBS, with enhanced porosity and organic material, retained moisture significantly longer than SandS. This prolonged moisture retention supported sustained biofilm growth, critical for biodegradation and contaminant removal. Conversely, SandS showed faster drainage, which favors faster aeration and, in general, more aerobic conditions.

Cross-hole ERT also identified anomalies and preferential flow patterns that could have an impact on the long-term efficiency of the SAT systems. For example, under continuous recharge, resistivity data showed increased heterogeneity and the formation of preferential pathways. This highlights the need for adaptive management strategies. ERT's detailed monitoring capabilities are an essential tool for understanding and improving SAT systems. It enables precise control of critical processes such as biofilm formation and contaminant degradation. Recharge management significantly affects system performance. Puls recharge initially facilitated higher biofilm growth rates by enhancing periodic oxygenation and rapid infiltration. In contrast, continuous recharge facilitates steady-state conditions, sustaining consistent biofilm activity over extended periods. These findings emphasize the importance of tailoring recharge strategies to specific site conditions and target contaminants.

Organic matter derived from plants contributes secondary porosity, which retains water for extended periods, supporting biofilm growth and activity during dry cycles. Consequently, systems that maintain higher moisture levels can sustain contaminant degradation for longer durations post-recharge. During wet cycles, surface water infiltrates through preferential flow paths, subsequently hydrating the broader unsaturated zone. Similarly, during dry cycles, drainage follows these heterogeneous pathways.

*Data availability.* All raw data can be provided by the corresponding authors upon request.

*Supplement.* The supplement related to this article is available online at <https://doi.org/10.5194/hess-30-877-2026-supplement>.

*Author contributions.* LML: Conceptualization, Data Curation, Formal analysis, Investigation, Methodology, Project administration, Resources, Supervision, Visualization, Writing (original draft preparation), Writing (review and editing). JC: Conceptualization, Data Curation, Funding acquisition, Investigation, Supervision, Writing (review and editing). JL: Conceptualization, Data Cura-

tion, Formal analysis, Investigation, Methodology, Resources, Supervision, Visualization, Writing (review and editing). PPV: Conceptualization, Data Curation, Formal analysis, Writing (review and editing). PS: Data Curation, Formal analysis, Methodology, Project administration, Resources, Writing (review and editing). MF: Funding acquisition, Investigation, Resources, Writing (review and editing). CV: Conceptualization, Data Curation, Funding, Methodology acquisition, Investigation, Methodology, Resources, Supervision, Writing (review and editing).

*Competing interests.* The contact author has declared that none of the authors has any competing interests.

*Disclaimer.* Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

*Acknowledgements.* We would like to express our gratitude to the Consorci d'Aigües de la Costa Brava Girona (CACBGi) for their support at the WWTP.

*Financial support.* This research has been supported by the Ministerio de Ciencia e Innovación (grant nos. TED2021-131188B-C31, PCI2019-103603, PCI2019-103425, RYC2023-045649-I, and LIFE REMAR LIFE20 ENV/ES/000284), the Agència de Gestió d'Ajuts Universitaris i de Recerca (grant no. AGAUR-SGR00609), the Agencia Estatal de Investigación (grant nos. RYC2023-045649-I and LIFE REMAR LIFE20 ENV/ES/000284), and the European Commission, NextGenerationEU (grant no. TED2021-131188B-C31).

The article processing charges for this open-access publication were covered by the CSIC Open Access Publication Support Initiative through its Unit of Information Resources for Research (URICI).

*Review statement.* This paper was edited by Xavier Sanchez-Vila and reviewed by Alex Furman and one anonymous referee.

## References

Alharbi, H. and El-Rawy, M.: Soil Aquifer Treatment (SAT) for Managed Aquifer Recharge and Water Quality Improvement in the MENA Region, in: Managed Aquifer Recharge in MENA Countries, Earth and Environmental Sciences Library, editd by: El-Rawy, M. and Negm, A., Springer, Cham, [https://doi.org/10.1007/978-3-031-58764-1\\_4](https://doi.org/10.1007/978-3-031-58764-1_4), 2024.

- Arboleda-Zapata, M., Osterman, G., Li, X., Sasidharan, S., Dahlke, H. E., and Bradford, S. A.: Time-lapse ensemble-based electrical resistivity tomography to monitor water flow from managed aquifer recharge operations, *Journal of Hydrology*, 659, 133282, <https://doi.org/10.1016/j.jhydrol.2025.133282>, 2025.
- Alam, S., Borthakur, A., Ravi, S., Gebremichael, M., and Mohanty, S. K.: Managed aquifer recharge implementation criteria to achieve water sustainability, *Sci. Total Environ.*, 768, 144992, <https://doi.org/10.1016/j.scitotenv.2021.144992>, 2021.
- Amanambu, A. C., Obarein, O. A., Mossa, J., Li, L., Ayeni, S. S., Balogun, O., Oyebamiji, A., and Ochege, F. U.: Groundwater system and climate change: Present status and future considerations, *J. Hydrol.*, 589, 125163, <https://doi.org/10.1016/j.jhydrol.2020.125163>, 2020.
- Baveye, P., Vandevivere, P., Hoyle, B. L., DeLeo, P. C., and Sanchez De Lozada, D.: Environmental impact and mechanisms of the biological clogging of saturated soils and aquifer materials, *Crit. Rev. Environ. Sci. Technol.*, 28, 123–191, <https://doi.org/10.1080/10643389891254197>, 1998.
- Bekele, E., Toze, S., Patterson, B., and Higginson, S.: Managed aquifer recharge of treated wastewater: Water quality changes resulting from infiltration through the vadose zone, *Water Res.*, 45, 5764–5772, <https://doi.org/10.1016/j.watres.2011.08.058>, 2011.
- Bellmunt, F. and Marcuello, A.: Method to obtain standard pseudo-sections from pseudo pole–dipole arrays, *J. Appl. Geophys.*, 75, 419–430, <https://doi.org/10.1016/j.jappgeo.2011.07.020>, 2011.
- Bellmunt, F., Marcuello, A., Ledo, J., and Queralt, P.: Capability of cross-hole electrical configurations for monitoring rapid plume migration experiments, *J. Appl. Geophys.*, 124, 73–82, <https://doi.org/10.1016/j.jappgeo.2015.11.010>, 2016.
- Bijay-Singh and Craswell, E.: Fertilizers and nitrate pollution of surface and ground water: an increasingly pervasive global problem, *SN Appl. Sci.*, 3, 518, <https://doi.org/10.1007/s42452-021-04521-8>, 2021.
- Bing, Z. and Greenhalgh, S. A.: Cross-hole resistivity tomography using different electrode configurations, *Geophys. Prospect.*, 48, 887–912, <https://doi.org/10.1046/j.1365-2478.2000.00220.x>, 2000.
- Binley, A.: 11.08 – Tools and Techniques: Electrical Methods, in: *Treatise on Geophysics*, 2nd Edn., edited by: Schubert, G., Elsevier, Oxford, 233–259, <https://doi.org/10.1016/B978-0-444-53802-4.00192-5>, 2015.
- Binley, A. and Kemna, A.: DC Resistivity and Induced Polarization Methods, in: *Hydrogeophysics*, edited by: Rubin, Y. and Hubbard, S. S., Springer Netherlands, Dordrecht, 129–156, [https://doi.org/10.1007/1-4020-3102-5\\_5](https://doi.org/10.1007/1-4020-3102-5_5), 2005.
- Blanchy, G., Saneiyani, S., Boyd, J., McLachlan, P., and Binley, A.: ResIPy, an intuitive open source software for complex geoelectrical inversion/modeling, *Comput. Geosci.*, 137, 104423, <https://doi.org/10.1016/j.cageo.2020.104423>, 2020.
- Bouwer, H.: Renovating secondary effluent by groundwater recharge with infiltration basins, in: *Conference on Recycling Treated Municipal Wastewater Through Forest and Cropland*, EPA-660/2-74-003, 1974.
- Bouwer, H.: Role of Groundwater Recharge in Treatment and Storage of Wastewater for Reuse, *Water Sci. Technol.*, 24, 295–302, <https://doi.org/10.2166/wst.1991.0258>, 1991.
- Bouwer, H.: Artificial recharge of groundwater: hydrogeology and engineering, *Hydrogeol. J.*, 10, 121–142, <https://doi.org/10.1007/s10040-001-0182-4>, 2002.
- Casanova, J., Devau, N., and Pettenati, M.: Managed Aquifer Recharge: An Overview of Issues and Options, in: *Integrated Groundwater Management*, edited by: Jakeman, A. J., Barreteau, O., Hunt, R. J., Rinaudo, J. D., and Ross, A., Springer, Cham, [https://doi.org/10.1007/978-3-319-23576-9\\_16](https://doi.org/10.1007/978-3-319-23576-9_16), 2016.
- Deiana, R., Cassiani, G., Kemna, A., Villa, A., Bruno, V., and Bagliani, A.: An experiment of non-invasive characterization of the vadose zone via water injection and cross-hole time-lapse geophysical monitoring, *Near Surf. Geophys.*, 5, 183–194, <https://doi.org/10.3997/1873-0604.2006030>, 2007.
- Dillon, P.: Future management of aquifer recharge, *Hydrogeol. J.*, 13, 313–316, 2005.
- Dillon, P., Stuyfzand, P., Grischek, T., Lloria, M., Pyne, R. D. G., Jain, R. C., and Sapiano, M.: Sixty years of global progress in managed aquifer recharge, *Hydrogeology Journal*, 27, 1–30, 2019.
- Dillon, P., Fernández Escalante, E., Megdal, S. B., and Massmann, G.: Managed Aquifer Recharge for Water Resilience, *Water*, 12, <https://doi.org/10.3390/w12071846>, 2020.
- Donlan, R. M. and Costerton, J. W.: Biofilms: Survival mechanisms of clinically relevant microorganisms, *Clin. Microbiol. Rev.*, 15, 167–193, <https://doi.org/10.1128/CMR.15.2.167-193.2002>, 2002.
- Du, M., Wang, L., Ebrahimi, A., Chen, G., Shu, S., Zhu, K., Shen, C., Li, B., and Wang, G.: Extracellular polymeric substances induced cell-surface interactions facilitate bacteria transport in saturated porous media, *Ecotoxicol. Environ. Saf.*, 218, 112291, <https://doi.org/10.1016/j.ecoenv.2021.112291>, 2021.
- DuBois, M., Gilles, K. A., Hamilton, J. K., Rebers, P. A., and Smith, F.: Colorimetric Method for Determination of Sugars and Related Substances, *Anal. Chem.*, 28, 350–356, <https://doi.org/10.1021/ac60111a017>, 1956.
- Fichtner, T., Goersmeyer, N., and Stefan, C.: Influence of Soil Pore System Properties on the Degradation Rates of Organic Substances during Soil Aquifer Treatment (SAT), *Appl. Sci.*, 9, <https://doi.org/10.3390/app9030496>, 2019.
- Fox, P., Narayanaswamy, K., Genz, A., and Drewes, J. E.: Water quality transformations during soil aquifer treatment at the Mesa Northwest Water Reclamation Plant, USA, *Water Sci. Technol.*, 43, 343–350, 2001.
- Frølund, B., Palmgren, R., Keiding, K., and Nielsen, P. H.: Extraction of extracellular polymers from activated sludge using a cation exchange resin, *Water Res.*, 30, 1749–1758, [https://doi.org/10.1016/0043-1354\(95\)00323-1](https://doi.org/10.1016/0043-1354(95)00323-1), 1996.
- Gurdak, J. J.: Climate-induced pumping, *Nat. Geosci.*, 10, 71–71, <https://doi.org/10.1038/ngeo2885>, 2017.
- Haaken, K., Furman, A., Weisbrod, N., and Kemna, A.: Time-Lapse Electrical Imaging of Water Infiltration in the Context of Soil Aquifer Treatment, *Vadose Zo. J.*, 15, vjz2016.04.0028, <https://doi.org/10.2136/vjz2016.04.0028>, 2016.
- Jasechko, S., Seybold, H., Perrone, D., Fan, Y., Shamsudduha, M., Taylor, R. G., Fallatah, O., and Kirchner, J. W.: Rapid groundwater decline and some cases of recovery in aquifers globally, *Nature*, 625, 715–721, <https://doi.org/10.1038/s41586-023-06879-8>, 2024.

- Jou-Claus, S., Rodríguez-Escales, P., Martínez-Landa, L., Diaz-Cruz, M. S., Carrera, J., Sunyer-Caldú, A., Quintana, G., and Valhondo, C.: Assessing the Fate of Benzophenone-Type UV Filters and Transformation Products during Soil Aquifer Treatment: The Biofilm Compartment as Bioaccumulator and Biodegrader in Porous Media, *Environ. Sci. Technol.*, 58, 5472–5482, <https://doi.org/10.1021/acs.est.3c08465>, 2024.
- Kang, W., Tian, J., Reemt Bogena, H., Lai, Y., Xue, D., and He, C.: Soil moisture observations and machine learning reveal preferential flow mechanisms in the Qilian Mountains, *Geoderma*, 438, 116626, <https://doi.org/10.1016/j.geoderma.2023.116626>, 2023.
- Koestel, J., Kemna, A., Javaux, M., Binley, A., and Vereecken, H.: Quantitative imaging of solute transport in an unsaturated and undisturbed soil monolith with 3-D ERT and TDR, *Water Resour. Res.*, 44, <https://doi.org/10.1029/2007WR006755>, 2008.
- Koestel, J., Vanderborght, J., Javaux, M., Kemna, A., Binley, A., and Vereecken, H.: Noninvasive 3-D Transport Characterization in a Sandy Soil Using ERT: 1. Investigating the Validity of ERT-derived Transport Parameters, *Vadose Zo. J.*, 8, 711–722, <https://doi.org/10.2136/vzj2008.0027>, 2009.
- Kurz, D. L., Secchi, E., Carrillo, F. J., Bourg, I. C., Stocker, R., and Jimenez-Martinez, J.: Competition between growth and shear stress drives intermittency in preferential flow paths in porous medium biofilms, *Proceedings of the National Academy of Sciences of the United States of America*, 119, <https://doi.org/10.1073/pnas.2122202119>, 2022.
- Kurz, D. L., Secchi, E., Stocker, R., and Jimenez-Martinez, J.: Morphogenesis of Biofilms in Porous Media and Control on Hydrodynamics, *Environ. Sci. Technol.*, 57, 5666–5677, <https://doi.org/10.1021/acs.est.2c08890>, 2023.
- Le Coustumer, S. L., Fletcher, T. D., Deletic, A., Barraud, S., and Poelsma, P.: The influence of design parameters on clogging of stormwater biofilters: a large-scale column study, *Water Res.*, 46, 6743e6752, <https://doi.org/10.1016/j.watres.2012.01.026>, 2012.
- Lu, L., Zhao, Y., Li, M., Wang, X., Zhu, J., Liao, L., and Wang, J.: Contemporary strategies and approaches for characterizing composition and enhancing biofilm penetration targeting bacterial extracellular polymeric substances, *J. Pharm. Anal.*, 14, 100906, <https://doi.org/10.1016/j.jpha.2023.11.013>, 2024.
- Martínez-Landa, L., Valhondo, C., Saaltink, M. W., Castillo, Y. A., and Carrera, J.: Estudio de la zona no saturada en sistemas de recarga artificial suelo-acuífero, in: *Estudios en la Zona No Saturada*, Vol XVI, ISBN 978-84-09-55828-5, 2023.
- Miquel, G.: La qualité de l'eau et de l'assainissement en France, Rapport de l'Office parlementaire d'évaluation des choix scientifiques et technologiques, Sénat no. 215, Assemblée Nationale no. 705, 2 tomes, 2003.
- Mitchell, R. and Nevo, Z.: Effect of Bacterial Polysaccharide Accumulation on Infiltration of Water Through Sand, *Appl. Microbiol.*, 12, 219–223, <https://doi.org/10.1128/am.12.3.219-223.1964>, 1964.
- Nenna, V., Pidlisecky, A., and Knight, R.: Monitoring managed aquifer recharge with electrical resistivity probes, *Interpretation*, 2, T155–T166, <https://doi.org/10.1190/INT-2013-0192.1>, 2014.
- Nnadozie, C. F. and Odume, O. N.: Freshwater environments as reservoirs of antibiotic resistant bacteria and their role in the dissemination of antibiotic resistance genes, *Environ. Pollut.*, 254, 113067, <https://doi.org/10.1016/j.envpol.2019.113067>, 2019.
- Page, D., Bekele, E., Vanderzalm, J., and Sidhu, J.: Managed Aquifer Recharge (MAR) in Sustainable Urban Water Management, *Water*, 10, <https://doi.org/10.3390/w10030239>, 2018.
- Palacios, A., Ledo, J. J., Linde, N., Luquot, L., Bellmunt, F., Folch, A., Marcuello, A., Queralt, P., Pezard, P. A., Martínez, L., del Val, L., Bosch, D., and Carrera, J.: Time-lapse cross-hole electrical resistivity tomography (CHERT) for monitoring seawater intrusion dynamics in a Mediterranean aquifer, *Hydrol. Earth Syst. Sci.*, 24, 2121–2139, <https://doi.org/10.5194/hess-24-2121-2020>, 2020.
- Rivera-Vidal, R., Aruní, J. A., Melo, O., Delgado, V., Parra, V., Stehr, A., and Daniele, L.: Managed aquifer recharge implementation challenges: Lessons from Chile's water-scarce regions, *Groundwater for Sustainable Development*, 31, <https://doi.org/10.1016/j.gsd.2025.101502>, 2025.
- Roumelis, C., Willert, F., Scaccia, M., Welch, S., Gabor, R., Carrera, J., Folch, A., Salgot, M., and Sawyer, A. H.: Water Table Fluctuations Control Nitrate and Ammonium Fate in Coastal Aquifers, *Water Resour. Res.*, 61, <https://doi.org/10.1029/2024WR038087>, 2025.
- Sanz, C., Casado, M., Martínez-Landa, L., Valhondo, C., Amalfitano, S., Di Pippo, F., Levantesi, C., Carrera, J., and Piña, B.: Efficient removal of antibiotic resistance genes and of enteric bacteria from reclaimed wastewater by enhanced Soil Aquifer Treatments, *Sci. Total Environ.*, 953, <https://doi.org/10.1016/j.scitotenv.2024.176078>, 2024a.
- Sanz, C., Sunyer-Caldú, A., Casado, M., Mansilla, S., Martínez-Landa, L., Valhondo, C., Gil-Solsona, R., Gago-Ferrero, P., Portugal, J., Diaz-Cruz, M. S., Carrera, J., Piña, B., and Navarro-Martín, L.: Efficient removal of toxicity associated to wastewater treatment plant effluents by enhanced Soil Aquifer Treatment, *J. Hazard. Mater.*, 465, <https://doi.org/10.1016/j.jhazmat.2023.133377>, 2024b.
- Sendrós, A., Himi, M., Lovera, R., Rivero, L., Garcia-Artigas, R., Urruela, A., and Casas, A.: Geophysical characterization of hydraulic properties around a managed aquifer recharge system over the Llobregat River Alluvial Aquifer (Barcelona Metropolitan Area), *Water*, 12, 3455, <https://doi.org/10.3390/w12123455>, 2020.
- Sendrós, A., Urruela, A., Himi, M., Alonso, C., Lovera, R., Tapias, J. C., Rivero, L., Garcia-Artigas, R., and Casas, A.: Characterization of a Shallow Coastal Aquifer in the Framework of a Subsurface Storage and Soil Aquifer Treatment Project Using Electrical Resistivity Tomography (Port de la Selva, Spain), *Appl. Sci.*, 11, <https://doi.org/10.3390/app11062448>, 2021.
- Sepulveda-Ruiz, P., Casado, M., Martínez-Landa, L., Folch, M., Piña, B., Carrera, J., and Valhondo, C.: Pulsed Recharge and Reactive Barriers to Improve Nitrogen Removal in Soil Aquifer Treatment Systems (Preprint), SSRN, <https://doi.org/10.2139/ssrn.5327969>, 2025.
- Sunyer-Caldú, A., Benedetti, B., Valhondo, C., Martínez-Landa, L., Carrera, J., Di Carro, M., Magi, E., and Diaz-Cruz, M. S.: Using integrative samplers to estimate the removal of pharmaceuticals and personal care products in a WWTP and by soil aquifer treatment enhanced with a reactive barrier, *Sci. Total Environ.*, 867, <https://doi.org/10.1016/j.scitotenv.2023.161466>, 2023.
- Thacharodi, A., Hassan, S., Hegde, T. A., Thacharodi, D. D., Brindhadevi, K., and Pugazhendhi, A.: Water a major source of endocrine-disrupting chemicals: An overview

- on the occurrence, implications on human health and bioremediation strategies, *Environ. Res.*, 231, 116097, <https://doi.org/10.1016/j.envres.2023.116097>, 2023.
- Tso, C.-H. M., Kuras, O., Wilkinson, P. B., Uhlemann, S., Chambers, J. E., Meldrum, P. I., Graham, J., Sherlock, E. F., and Binley, A.: Improved characterisation and modelling of measurement errors in electrical resistivity tomography (ERT) surveys, *J. Appl. Geophys.*, 146, 103–119, <https://doi.org/10.1016/j.jappgeo.2017.09.009>, 2017.
- Valhondo, C. and Carrera, J.: Chap. 1 – Water as a finite resource: From historical accomplishments to emerging challenges and artificial recharge, in: *Sustainable Water and Wastewater Processing*, edited by: Galanakis, C. M. and Agrafioti, E., Elsevier, 1–17, <https://doi.org/10.1016/B978-0-12-816170-8.00001-6>, 2019.
- Valhondo, C., Martínez-Landa, L., Hidalgo, J., Tubau, I., De Pourcq, K., Grau-Martínez, A., and Ayora, C.: Tracer test modeling for characterizing heterogeneity and local-scale residence time distribution in an artificial recharge site, *Hydrol. Earth Syst. Sci.*, 20, 4209–4221, <https://doi.org/10.5194/hess-20-4209-2016>, 2016.
- Valhondo, C., Carrera, J., Martínez-Landa, L., Wang, J., Amalfitano, S., Levantesi, C., and Diaz-Cruz, M. S.: Reactive Barriers for Renaturalization of Reclaimed Water during Soil Aquifer Treatment, *Water*, 12, 1012, <https://doi.org/10.3390/w12041012>, 2020a.
- Valhondo, C., Martínez-Landa, L., Carrera, J., Díaz-Cruz, S. M., Amalfitano, S., and Levantesi, C.: Six artificial recharge pilot replicates to gain insight into water quality enhancement processes, *Chemosphere*, 240, <https://doi.org/10.1016/j.chemosphere.2019.124826>, 2020b.
- Valhondo, C., Duporté, G., Cabaret, G., Rosain, D., Gomez, E., and Luquot, L.: Assessing the Feasibility of Sustainable Materials to Boost the Sorption of Pharmaceutical Active Compounds When Included in Reactive Barriers in Soil Aquifer Treatment for Water Reuse, *Water*, 15, <https://doi.org/10.3390/w15071393>, 2023.
- Wang, J., Carrera, J., Saaltink, M. W., Petchamé-Guerrero, J., Herrera, G. S., and Valhondo, C.: Biofilm Growth in Porous Media Well Approximated by Fractal Multirate Mass Transfer With Advective-Diffusive Solute Exchange, *Water Resour. Res.*, 60, e2023WR036872, <https://doi.org/10.1029/2023WR036872>, 2024.
- Wehrer, M. and Slater, L. D.: Characterization of water content dynamics and tracer breakthrough by 3-D electrical resistivity tomography (ERT) under transient unsaturated conditions, *Water Resour. Res.*, 51, 97–124, <https://doi.org/10.1002/2014WR016131>, 2015.
- Wehrer, M., Lissner, H., Bloem, E., French, H., and Totsche, K. U.: Electrical resistivity tomography as monitoring tool for unsaturated zone transport: an example of preferential transport of deicing chemicals, *Environ. Sci. Pollut. Res.*, 21, 8964–8980, <https://doi.org/10.1007/s11356-013-2252-2>, 2014.
- Wu, G.-L., Liu, Y., Yang, Z., Cui, Z., Deng, L., Chang, X.-F., and Shi, Z.-H.: Root channels to indicate the increase in soil matrix water infiltration capacity of arid reclaimed mine soils, *J. Hydrol.* 546, 133e139, <https://doi.org/10.1016/j.jhydrol.2016.12.047>, 2017.
- Xia, L., Zheng, X., Shao, H., Xin, J., and Peng, T.: Influences of environmental factors on bacterial extracellular polymeric substances production in porous media, *J. Hydrol.*, 519, 3153–3162, <https://doi.org/10.1016/j.jhydrol.2014.10.045>, 2014.
- Xiao, T., Li, P., Fei, W., and Wang, J.: Effects of vegetation roots on the structure and hydraulic properties of soils: A perspective review, *Sci. Total Environ.*, 906, 167524, <https://doi.org/10.1016/j.scitotenv.2023.167524>, 2024.