



Improving streamflow predictions at ungauged locations

X. Xie et al.

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Improving streamflow predictions at ungauged locations with real-time updating: application of an EnKF-based state-parameter estimation strategy

X. Xie¹, S. Meng¹, S. Liang^{1,2}, and Y. Yao¹

¹State Key Laboratory of Remote Sensing Science, College of Global Change and Earth System Science, Beijing Normal University, Beijing, China

²Department of Geographical Sciences, University of Maryland, College Park, USA

Received: 13 October 2013 – Accepted: 28 October 2013 – Published: 8 November 2013

Correspondence to: X. Xie (xianhong@bnu.edu.cn)

Published by Copernicus Publications on behalf of the European Geosciences Union.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Abstract

The challenge of streamflow predictions at ungauged locations is primarily attributed to various uncertainties in hydrological modelling. Many studies have been devoted to addressing this issue. The similarity regionalization approach, a commonly used strategy, is usually limited by subjective selection of similarity measures. This paper presents an application of a portioned update scheme based on the ensemble Kalman filter (EnKF) to reduce the prediction uncertainties. This scheme performs real-time updating for states and parameters of a distributed hydrological model by assimilating gauged streamflow. The streamflow predictions are constrained by the physical rainfall-runoff processes defined in the distributed hydrological model and by the correlation information transferred from gauged to ungauged basins. This scheme is successfully demonstrated in a nested basin with real-world hydrological data where the subbasins have immediate upstream and downstream neighbours. The results suggest that the assimilated observed data from downstream neighbours have more important roles in reducing the streamflow prediction errors at ungauged locations. The real-time updated model parameters remain stable after short-period assimilation, while their estimation trajectories have slow variations, which may be attributable to climate and land surface changes. Although this real-time updating scheme is intended for streamflow predictions in nested basins, it can be a valuable tool in separate basins to improve hydrological predictions by assimilating multi-source datasets, e.g. ground-based and remote-sensing observations.

1 Introduction

The streamflow prediction plays a central role in hydrology because it is an important element for water resources management, the design of hydraulic infrastructures and flood risk mapping (Srinivasan et al., 2010). Because it is an important component in the terrestrial water budget, streamflow is also a direct diagnostic variable measuring

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

the impact of climate changes and human activities that act on a given watershed. Streamflow prediction depends highly on reliable hydrological data and sophisticated hydrological models. However, hydrological data are often insufficient due to ungauged or poorly gauged basins in many parts of the world (Sivapalan, 2003). Because of the scarcity of data, hydrological modelling is also plagued by various sources of uncertainties. To reduce uncertainties from those hydrological data and hydrological modelling, the International Association of Hydrological Sciences (IAHS) launched an initiative on Predictions in Ungauged Basins (PUB) (Sivapalan, 2003; Sivapalan et al., 2003).

Through the past PUB decade, major advances have been achieved including data acquisition and exploitation, modelling strategies and uncertainty analysis, and catchment classification and new theory (Hrachowitz et al., 2013). There is a growing consensus that remote sensing techniques provide valuable data for understanding the land surface hydrological system (Yang et al., 2013). Moreover, considerable progress has been made on hydrological models (typically the distributed hydrological models) to capture the physical process associated with the basin rainfall-runoff and snowmelt-runoff responses. This progress has fostered specific problem areas in the field: uncertainty quantification with respect to model input forcing, model structures and parameters (Ajami et al., 2007; Vrugt et al., 2008; Gupta et al., 2012). To reduce the uncertainty from model parameters, one common practice is the parameter calibration by adjusting model parameters to make the simulated water discharges correspond to the observations (typically the data from the outlet of a watershed) (Duan et al., 1992, 1994). However, a calibrated parameter set with acceptable streamflow simulation performance at the watershed outlet does not guarantee the performance at interior locations (Zhang et al., 2008).

The essence of PUB is to transfer information from neighbouring basins to the basins of interest (Sivapalan et al., 2003). Such process is generally referred to as hydrological regionalization, based on either regression methods or measureable distances (with respect to physical similarity or spatial proximity) between gauged and ungauged locations (Hrachowitz et al., 2013). Regionalization techniques of model parameters are

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

a lumped hydrological model. Wang et al. (2009) presented three constrained schemes with EnKF to prevent the violation of parameter physical constraints. Most of these studies performed parameter estimations for lumped hydrological models with a small number of parameters to be estimated. Xie and Zhang (2010) successfully demonstrated a joint state-parameter estimation based on EnKF for a distributed hydrological model, i.e. Soil and Water Assessment Tool (SWAT), focusing on one dominant parameter in SWAT. For multiple types of parameter estimation, Xie and Zhang (2013) developed a portioned update scheme and indicated the potential of such scheme for streamflow predictions in ungauged basins based on distributed hydrological models.

In this study, we present the application of the portioned update scheme to improve streamflow predictions in ungauged locations by assimilating gauged streamflow. This data assimilation algorithm is fully coupled with the distributed hydrological model, i.e. SWAT. The state vector and parameters in ungauged subbasins are estimated when information is transferred from gauged subbasins. In addition to the EnKF-based scheme, please note that the other data assimilation methods, e.g. the particle filter (PF), may also be optional for state-parameter estimation as a few studies have indicated (Moradkhani et al., 2005a; DeChant and Moradkhani, 2012). In the following sections, we first introduce the EnKF-based data assimilation scheme and give a brief description of the SWAT model. We then present an application case of a real-world problem in the Zhanghe River basin in China in which river channels are connected and subbasins have nested upstream and downstream neighbours. Three scenarios regarding different combinations of observed streamflow are designed to discuss the impact of gauged locations on streamflow predictions. Finally, conclusions are given in the last section.

2 Methodology

2.1 EnKF-based state and parameter estimation scheme

To describe the information transfer process from gauged to ungauged locations, we define a joint state vector \mathbf{X} that contains gauged (x_g) and ungauged (x_u) states: $\mathbf{X} = [x_g, x_u]$. Moreover, we consider the diagnostic variables, i.e. the water discharge and the evapotranspiration, as model states and include them in the vector \mathbf{X} to perform streamflow updating in the data assimilation. The joint state vector \mathbf{X} and the parameter vector $\boldsymbol{\theta}$ estimation at time t are conditioned on measurements (y_t) from gauged basins. The information transfer process, i.e. the posterior probability density function (pdf) $p(\mathbf{X}_t, \boldsymbol{\theta}_t | y_t)$, can be expressed within Bayes' framework,

$$p(\mathbf{X}_t, \boldsymbol{\theta}_t | y_t) \propto p(y_t | \mathbf{X}_t, \boldsymbol{\theta}_t) \cdot p(\mathbf{X}_t, \boldsymbol{\theta}_t | \mathbf{X}_{t-1}, \boldsymbol{\theta}_{t-1}), \quad (1)$$

where $p(y_t | \mathbf{X}_t, \boldsymbol{\theta}_t)$ is the likelihood function of measurements given model estimations at time t . Moreover, $p(\mathbf{X}_t, \boldsymbol{\theta}_t | \mathbf{X}_{t-1}, \boldsymbol{\theta}_{t-1})$ is the prior pdf of \mathbf{X} and $\boldsymbol{\theta}$ at time t that represents model forecasting and parameter evolutions.

The updating framework defined in Eq. (1) is well included in and effectively solved by sequential data assimilation strategies, typically, the EnKF strategy (Evensen, 1994). The EnKF strategy operates sequentially with a forecast step and a filter update step. In the forecasting process, uncertainty propagation is characterised by an ensemble of model realisations:

$$\mathbf{X}_t^{i-} = M(\mathbf{X}_{t-1}^{i+}, \boldsymbol{\theta}_t^{i-}, \mathbf{u}_t^i) + \boldsymbol{\omega}_t^i, \quad \boldsymbol{\omega}_t^i \sim N(0, Q_t), \quad i = 1, 2, \dots, N \quad (2)$$

where “-” and “+” denote the forecast and analysis for the state vectors \mathbf{X} and the parameter vector $\boldsymbol{\theta}$, t is the time step, \mathbf{u} is the input forcing vector, and N is the ensemble size. The model error vector $\boldsymbol{\omega}$ is assumed to follow a Gaussian distribution with zero mean and covariance Q_t . Prior to model forecasting using Eq. (2), the model parameters can be perturbed, similar to the forecast of the state vector, to avoid the shrinkage

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of the parameter ensemble during the updating (Wang et al., 2009). However, the parameter perturbation is susceptible to over-dispersion in sampling (Moradkhani et al., 2005b). A kernel smoothing technique is effective to address the over-dispersion while maintaining a reasonable ensemble spread for the parameters (Liu, 2000; Moradkhani et al., 2005b; Xie and Zhang, 2013). This technique is briefly expressed as

$$\boldsymbol{\theta}_t^{i-} = \alpha \boldsymbol{\theta}_{t-1}^{i+} + (1 - \alpha) \bar{\boldsymbol{\theta}}_{t-1}^+ + \boldsymbol{\tau}_t^i, \quad \boldsymbol{\tau}_t^i \sim N(0, T_t), \quad (3)$$

$$\bar{\boldsymbol{\theta}}_{t-1}^+ = \frac{1}{n} \sum_{i=1}^n \boldsymbol{\theta}_{t-1}^{i+}, \quad (4)$$

$$T_t = h^2 \text{var}(\boldsymbol{\theta}_{t-1}^+), \quad (5)$$

where α is the shrinkage factor with a range of (0, 1], typically in [0.95, 0.99], h is the smoothing factor defined as $\alpha^2 + h^2 = 1$, and T_t is the covariance constrained by the ensemble variance $\text{var}(\boldsymbol{\theta}_t^+)$. The prescription of the smoothing factor h depends on the magnitude of the ensemble variance $\text{var}(\boldsymbol{\theta}_{t-1}^+)$. When $\text{var}(\boldsymbol{\theta}_{t-1}^+)$ is quite large at the beginning of data assimilation, h is defined as $\sqrt{1 - \alpha^2}$ to reduce the ensemble spread. Moreover, when $\text{var}(\boldsymbol{\theta}_{t-1}^+)$ is too small, it may cause filter divergence. In this scenario, h is inflated ($h > \sqrt{1 - \alpha^2}$) to increase the ensemble spread ($h = 1.0$ in this study).

With the forecast of the states and parameters, the filter update step is performed when observations are available. This updating is actually the solving process for Eq. (1). Here we intentionally create an explicit expression of the updating for gauged and ungauged states and parameters:

$$\begin{bmatrix} x_{g,t}^{i+} \\ x_{u,t}^{i+} \\ \boldsymbol{\theta}_t^{i+} \end{bmatrix} = \begin{bmatrix} x_{g,t}^{i-} \\ x_{u,t}^{i-} \\ \boldsymbol{\theta}_t^{i-} \end{bmatrix} + \mathbf{K}_t \cdot (\mathbf{y}_t^i - Hx_{g,t}^{i+}), \quad (6)$$

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where \mathbf{y}_t^i is the observation vector, which is suitably perturbed with covariance of R to account for uncertainties in observations, and H is the observation operator which is linear in this study. The Kalman gain matrix \mathbf{K}_t is given by

$$\mathbf{K}_t = \begin{bmatrix} \text{COV}(x_{g,t}, x_{g,t}) \\ \text{COV}(x_{g,t}, x_{u,t}) \\ \text{COV}(x_{g,t}, \theta_t) \end{bmatrix} \cdot (\text{COV}(x_{g,t}, x_{g,t}) + R)^{-1}, \quad (7)$$

where $\text{cov}(\cdot)$ is the covariance operator that is computed from the ensembles of states and parameters. Please note the size of the matrix \mathbf{K}_t is $n \times m$, where n is the total number of state variables and parameters and m is the number of observations.

The above equations are commonly used procedures of EnKF with a state-augmentation technique. It has been successfully used in many cases for real-time state and parameter estimation (Moradkhani et al., 2005b; Wang et al., 2009; Xie and Zhang, 2010). From Eqs. (6) and (7), we can see that EnKF provides a general framework to transfer information from gauged to ungauged basins. However, when used for parameter estimations in distributed hydrological models, it is vulnerable to corruption due to spurious covariance computation in Eq. (7), primarily resulting from a large degree of freedom for high-dimensional vectors of the augmented state. To relieve this problem, Xie and Zhang (2013) proposed a partitioned forecast-update scheme (PU_EnKF) that is inspired by the dual state-parameter estimation algorithm (Moradkhani et al., 2005b). In the partitioned forecast-update scheme, the parameter set of a hydrological model is partitioned into different types (N_p types in total) based on their sensitivities. Each type is estimated in an individual loop by repeated forecasting and updating. Here, the parameter type maintains an aggregation connotation. A parameter type can contain only one parameter (e.g. for lumped hydrological models) or many parameters associated with the same number of computational units in distributed hydrological models. For example, the parameter CN_2 in SWAT (will be introduced in Sect. 2.2) is considered to be parameter type.

At time t , the PU_EnKF is recursively applied as follows for N_p loops:

13448

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

- I. Perform parameter evolution using Eq. (3) for the j -th parameter type, producing a new ensemble of parameters.
- II. Run the model N times following Eq. (2) to obtain ensemble predictions for gauged and ungauged state variables. In the prediction, the j -th parameter type is prescribed with a member of the ensemble produced in step (I), while the others are set with the ensemble means that are estimated from previous loops at this time step and from the previous time step.
- III. Compute the Kalman gain matrix using Eq. (7) based on the ensembles of states and parameters when observations become available at time t .
- IV. Update the state vector and the j -th parameter type using Eq. (6).
- V. Compute the ensemble means of the j -th parameter type. These means are estimates of the parameters and are used in step (II) in the subsequent loops for the estimating other parameter types.
- VI. Return to step (I) if $j < N_p$. Otherwise, go to the next time step $t + 1$. The updated state vector from the loop $j = N_p$ is considered as estimates of gauged and ungauged state variables; all estimates of parameters are also obtained.

This partitioned update scheme is quite suitable for distributed hydrological models to estimate high-dimensional parameters. Its capability has been demonstrated in synthetic cases and it has been successfully used in a real watershed for state and parameter estimation (Xie and Zhang, 2013). In this study, we apply this scheme to improve the streamflow prediction in ungauged sites and to estimate model parameters.

2.2 Model description

The distributed hydrologic model, SWAT, is a basin-scale hydrological model developed by the USDA Agricultural Research Service (Arnold et al., 1998; Arnold and Fohrer,

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

2005). In the implementation of SWAT, a basin is partitioned into multiple subbasins that are then divided into hydrologic response units (HRUs), which consist of unique land cover, management, and soil characteristics (Neitsch et al., 2001; Gassman et al., 2007). The HRUs do not contain spatial properties because of their percentile representation of the subbasin area and they are the basic computational units in which the overall hydrologic balance is simulated, including precipitation partitioning, surface runoff generation, evapotranspiration (ET), soil water and groundwater movement.

The surface runoff generation is commonly simulated using the Soil Conservation Service (SCS) model (Rallison and Miller, 1981; Ponce et al., 1996). This model has only one parameter, i.e. the curve number at moisture condition II (CN_2), which is also the dominant parameter in SWAT. Actual ET is formulated based on potential ET to account for evaporation from the plant canopy, transpiration, sublimation and evaporation from the soil. The soil water movement is characterised by a storage routing technique that uses the field capacity to dominate redistribution of water between layers. By infiltration or percolation, a fraction of water below the soil profile enters groundwater storage as recharge and is partitioned between shallow and deep aquifers. Base flow from the shallow aquifer is also routed to river channels. Details regarding these processes can be found in the SWAT user's manual by Neitsch et al. (2001).

SWAT contains a large number of spatially varying parameter types to be prescribed before hydrologic simulation and prediction. These parameters consist of the surface roughness, soil properties, land-cover pattern and hydraulic conditions of the river channel. Although their default values can be prescribed according to lookup tables, the optimal values must be calibrated on the basis of modelling behaviour and observations. To reduce the number of calibrating parameters, a sensitivity analysis is usually required (van Griensven et al., 2006). Considerable effort has been devoted to sensitivity analysis for SWAT; several parameters are recognised as the most influential ones that dominate the model behaviour (Holvoet et al., 2005; Muleta and Nicklow, 2005; van Griensven et al., 2006). Based on these studies, seven parameters (also called parameter types) are selected and shown in Table 1. They underpin differ-

ent hydrologic processes in a basin involving the surface runoff, soil water, baseflow, groundwater, evapotranspiration and channel water processes. Their ranges are determined in terms of the lookup tables (Neitsch et al., 2001) and the specific soil and land use properties of the Zhanghe River basin (Post and Jakeman, 1999).

In addition to these sensitive parameter types, ten hydrologic variables are selected for updating in data assimilation (Table 2). The first nine variables are the dynamic states that characterise water storage status in HRUs or subbasins and partially influence the diagnostic variables, i.e. ET and the water discharge (Qr). Therefore, along with both outputs, these states should be updated to guarantee consistent model behaviour. In this study, ET is excluded from the state vector because there are no ET observations and its passive update in data assimilation does not impact other state estimations.

The SWAT model is used for this study for two main reasons. First, SWAT is a very popular distributed hydrological model to predict water, sediment, and agricultural chemical yields in large, complex watersheds (Gassman et al., 2007). An improved version of this model has been used to simulate the water movement in the Zhanghe River basin, an irrigation district with paddy rice planting (Xie and Cui, 2011). Second, we have coupled it with the EnKF-based algorithms with a few successful applications (Xie and Zhang, 2010, 2013; Xie, 2013). Therefore, such a coupled SWAT-EnKF data assimilation platform is expected to be more powerful and widely used for real-time hydrological predictions.

3 Application to a real case

3.1 Study area and database

The data assimilation scheme is applied in the Zhanghe River basin in Hubei Province, China (Fig. 1). The Zhanghe drains an area of 1129 km², and the elevation difference between the north and the south is more than 400 m. It has a typical subtropical cli-

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



mate with an annual mean temperature of 17 °C. The annual rainfall in the catchment is approximately 970 mm per year, although rainfall varies substantially from year to year depending upon the monsoon strength. This basin is actually an agricultural irrigation area and its cultivated area accounts for 59%. Paddy rice is the primary cultivated plant, which, from May to August, requires irrigation water from the Zhanghe reservoir and thousands of local ponds. Owing to intense human activities, including cultivation, irrigation and drainage, streamflow prediction in this basin is challenge with large uncertainties (Cai, 2007; Xie and Cui, 2011).

We choose the Zhanghe River basin as a study area because there are relatively sufficient datasets associated with weather conditions, land use and soil properties, and hydrological information. This area has been chosen for a few modelling studies (Cai, 2007; Xie and Cui, 2011). The land use classification with resolution of 14.25 m was retrieved based on remote sensing data (Landsat ETM+) for years 2000 and 2001 (Fig. 1b). The land use pattern in this basin exhibits only small changes since 2000. Therefore, we assume the land use pattern in the period 2004–2006 is the same as in 2000–2001. The soil map with soil properties, which is used to derive model parameters, is obtained from the local agriculture department. The weather dataset, including daily temperature, radiation, wind speed and relative humidity, from January 2000 to December 2006 is available from five stations distributed in and around this basin as shown in Fig. 1c. Moreover, four streamflow gauges were installed, marked as A, B, C and D for simple referencing. Gauge D is the outlet of the basin. Gauge A is located at the outlet of a small source subbasin. Because these four gauges observe the river stages and then transform the data into streamflow according to calibrated rating curves, daily streamflow data for the period 2003–2006 are available.

The Zhanghe River basin is divided into 20 subbasins based on a digital elevation model (DEM) with a resolution of 90 m (Fig. 1c). Thereafter, 98 HRUs are obtained according to land use and the soil map. With this delineation, Gauge A drains runoff from a source subbasin, Gauge B drains four, Gauge C drains ten, and Gauge D drains all the basins.

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

3.2 Error quantification

The success of ensemble-based data assimilation methods depends highly on ensemble generations to quantify errors from model input forcing, parameters and model structures. Moreover, quantifying observation errors is also critical to account for uncertainties from measurements and derivations. Due to the dynamics of the SWAT model, the errors/uncertainties from the input forcing, parameters and the model structure are transferred to the water storages (e.g. soil moisture and channel storages) and diagnostic variables (e.g., streamflow). Although there are more than ten variables that require updating in SWAT, three of them are perturbed in this study to represent the modelling uncertainties, i.e. precipitation, soil moisture and streamflow, because the other variables are internal and their uncertainties are transferred to the soil moisture and the simulated streamflow (Xie and Zhang, 2013).

Perturbations to these variables are conducted based on zero-mean Gaussian distributions. The standard deviations (σ) are proportional to their values,

$$\sigma_x = \eta_x \cdot X, \quad (8)$$

where η is the fractional factor of the standard deviation to the variable x . Thus, there are four fractional factors corresponding to the precipitation (η_p), soil moisture (η_{sm}), simulated streamflow (η_{Qm}) and the observed streamflow (η_{Qo}). With this error quantification, the four standard deviations vary with time, depending on the magnitudes of the four variables.

These fractional factors should not only represent the related uncertainties in modelling and the observations but also produce ensemble streamflow predictions with reasonable ensemble spread (Clark et al., 2008). Based on the uncertainty analysis by Xie and Cui (2011), the prediction errors with the SWAT model are more than 10% of the variables due to the irrigation and drainage practices in the Zhanghe River basin; the measurement of precipitation also has the same level of uncertainty. Therefore, various combinations of factor values are evaluated by running the data assimilation procedure. Table 3 presents the final choice of the four fractional factors.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Please note the error quantification remains challenging for land surface data assimilation. A few newly developed approaches may be a good attempt, e.g. adaptive filtering (Crow and Reichle, 2008; Reichle et al., 2008). However, we quantify the model and the observation uncertainties in this study in terms of an experiential and practical perspective in which large storm events normally induce larger uncertainties in modelling and observations. Moreover, an overestimation of uncertainties is a better practice than underestimation to avoid the ensemble shrinkage (Crow and Van Loon, 2006; Clark et al., 2008).

3.3 Assimilation setup and scenario design

The assimilation process is performed with three successive periods (Xie and Zhang, 2013). First, the model is prescribed with prior parameters and spun-up within the period 1 January 2003 to 30 June 2003 to initialise the model states. At the end of this period, the seven parameters of the SWAT model are perturbed using the Latin hypercube method (Helton and Davis, 2003) with Gaussian distributions. The parameter means of the Gaussian distributions are set according the lookup table suggested in SWAT (Neitsch et al., 2001); the associated variances are constrained to ensure that random samples are within their respective physically or model-required ranges in Table 3. Please note the uniform distribution is more intuitive than the Gaussian and often also used in sampling (Moradkhani et al., 2005b). In this study, we use the Gaussian because the lookup table provides favourable prior estimates for the parameters. After the parameter perturbations, the second period begins (1 July 2003–31 December 2003) to perturb the model input forcing, model states and diagnostic variables as described in Sect. 3.2. This perturbation period is to quantify the uncertainties in prediction and to generate reasonable ensemble spread for subsequent data assimilation. The third period is the data assimilation period (1 January 2004–31 December 2005) in which the observed data of streamflow are assimilated when data are available.

To demonstrate the improvement of streamflow prediction in ungauged locations, we only assimilate streamflow from one or two of the four gauges and the remaining

gauges, regarded as pseudo-ungauged locations, are used to validate the performance of data assimilation. Three scenarios with different combinations of data from the four gauges are designed:

- I. ASS_D: The observed data of streamflow from Gauge D are assimilated; Gauges A, B and C are assumed as pseudo-ungauged. This scenario is similar to a common calibration practice for which only the outlet (Gauge D) discharges are employed to calibrate the parameters and to extrapolate streamflow of ungauged subbasins from the outlet.
- II. ASS_BD: The observed data of streamflow from Gauge B and D are assimilated; the other two are regarded as pseudo-ungauged subbasins. This scenario adds the data from Gauge B at the upstream in this basin based on scenario ASS_D.
- III. ASS_AB: The observed data of streamflow only from Gauge A and B are assimilated; the others are assumed as pseudo-ungauged subbasins. This scenario only uses the streamflow from the two gauges at the upstream in this basin.

3.4 Prediction in ungauged locations

Ensemble streamflow predictions along with parameter estimations are performed for the three scenarios. To distinguish the improvement of streamflow prediction, a control-run scenario is performed in which the model parameters are prescribed with the calibrated estimates of Xie and Cui (2011). The data assimilation performance is evaluated by comparing with the four series of observed streamflow. Although the observed streamflow series still contain uncertainties, we consider them to be a benchmark because the observations are commonly assumed to be the best estimates of “real” streamflow processes. Therefore, the series of streamflow prediction errors are computed (predictions minus observations) and the root-mean-square error (RMSE) and the mean absolute error (MAE) are used as comprehensive indexes for evaluations.

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Figure 2 shows the streamflow errors from the control-run prediction and scenario ASS_D. The control-run simulation clearly overestimates the peak flow (in rainfall periods) for the four gauges, while underestimates the base flow in some non-rainfall periods (e.g. 230th–300th time steps). This poor performance is greatly improved by assimilating the observed streamflow and considering the uncertainties from the input forcing and model states. It may not be surprising that the Gauge D streamflow errors in ASS_D are less than those in the control-run scenario because the observed streamflow from Gauge D is assimilated to update the prediction. For the (pseudo-) ungauged locations, the streamflow predictions of Gauge A, B and C are also more acceptable than from the control-run scenario. At Gauge C, for example, the RMSE decreases from $3.539 \text{ m}^3 \text{ s}^{-1}$ to $2.014 \text{ m}^3 \text{ s}^{-1}$. Moreover, there is no notable biased prediction due to the slight overestimations and underestimations for peak flow.

Figure 3 shows the results from scenarios ASS_BD and ASS_AB. Adding an observed gauge (Gauge B) at the upstream in the basin, i.e. the ASS_BD scenario, provides better streamflow predictions in the pseudo-ungauged subbasins than the ASS_D scenario; the RMSE drops to $1.741 \text{ m}^3 \text{ s}^{-1}$. If assimilating the data from the upstream locations, i.e. the ASS_AB scenario, the improvement is degraded and the predictions are only slightly better than the control-run scenario. In addition to Gauge C (for pseudo-ungauged locations), Gauge A, B and D have very favourable streamflow predictions due to the fact the data from these gauges are assimilated to update the predicted streamflow (not shown in Fig. 3).

Along with the updating of model states and diagnostic variables, the model parameters are also estimated. Figure 4 shows examples of real-time parameter updating from the ASS_D scenario. After approximately 120 time steps, the ensemble trajectories are nearly stable with slow variations that are probably induced by the changes of land surface and river channel conditions for runoff generation and routing (Liu et al., 2008; Troch et al., 2013). At every time step in data assimilation, the parameter samples can be approximated with Gaussian distributions as shown in the histograms in Fig. 4. This property is favourable for parameter estimation with ensemble-based data assimila-

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



tion. The parameter estimate uncertainties at every time step are represented using the ensemble spread (EnSp), which is computed based on sample variances (see the illustration under Fig. 5). At the beginning of the data assimilation, the parameters have broad ensemble spreads. The spreads quickly shrink after 100 time steps with the evolution of the streamflow assimilation, and remain stable after 400 time steps. Therefore, the estimation uncertainty of the parameters decreases with the data assimilation and state updating. Moreover, the relative stabilities of ensemble trajectories (Fig. 4) and the ensemble spreads (Fig. 5) imply an attractive potential that it is possible to use short-term data to retrieve optimal estimates of parameters.

Even though the three scenarios provide different parameter estimates due to the assimilation of different observations, encouraging properties of parameter estimations are achieved in the three scenarios. The parameter estimates require a further validation to evaluate the performance of the PU_EnKF scheme.

3.5 Validation for parameter estimation

It is difficult to directly validate the estimates of parameters using measurements because the SWAT model is a conceptual hydrological model and most parameters do not have physical meanings. Only a few parameters (e.g. the SOL_AWC in Table 1) can be measured at local sites; those parameters regarding HRUs, subbasins and river channels remain difficult to be obtained by sampling experiments. We perform single-run predictions using the parameter estimates from the three scenarios and evaluate the predicted streamflow against observed streamflow. This is a commonly used strategy to validate parameters of a conceptual hydrological model. For simplicity and consistency, the three single-run predictions are named ASS_D, ASS_BD and ASS_AB, although they are neither assimilation-based predictions nor ensemble predictions. Moreover, the control-run prediction is used for comparison. All four scenarios are run for the period 1 January 2006–31 October 2006. The uncertainties in the input forcing and the model structure are not considered in these predictions.

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Figure 6 shows the streamflow prediction errors from the four scenarios. Only the results of Gauge C and Gauge D are shown because they are located at the downstream locations in the Zhanghe River basin. The three scenarios using prescribed parameters with estimates from data assimilation achieve better predictions for the two gauges than the control-run scenario. The RMSE of Gauge D from the ASS_D scenario decreases from 5.550 to 3.055. Moreover, the ASS_BD scenario provides the best predictions among the four scenarios. All of these improvements are attributable to the encouraging parameter estimations from the data assimilation. The ASS_BD scenario renders the most reasonable parameter estimations. Comparably, the parameter estimates from ASS_D are also satisfactory for streamflow predictions, while the estimates from the ASS_AB scenario lead to slight improvements for streamflow predictions. Therefore, the parameter estimation performance of the three scenarios is similar to the estimations of diagnostic variables (i.e. the water discharge) as illustrated in Sect. 3.4. The assimilated observations from downstream, especially the outlet of the basin, have more important roles than those from upstream for parameter estimation. This finding also applies to the streamflow predictions in ungauged subbasins.

4 Conclusions

We present an application of an EnKF-based portioned update scheme for improving streamflow predictions at ungauged locations. This scheme features real-time updating and simultaneous state-parameter estimation, considering modelling and measurement uncertainties. Moreover, the scheme constrains the predictions by the physical rainfall-runoff processes that are defined in the distributed hydrological model (i.e. the SWAT model) and considers the correlations of states and parameters between gauged and ungauged subbasins, which are represented by the covariance matrix in the Kalman gain. With these two constraints, the observed information is successfully transferred to ungauged locations.

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The real-word application case suggests that the PU_EnKF scheme performs better than the control-run simulation (with calibrated parameters) for streamflow predictions at gauged and ungauged locations. Although only the outlet-gauged data are assimilated, the streamflow predictions at ungauged sites are still acceptable due to low estimation errors. The downstream data have more important roles in the data assimilation than those from upstream. This data assimilation scheme provides reasonable estimates of model parameters for all computational units (i.e. subbasins and HRUs), including both gauged and ungauged sites, as validated by conventional single-run simulations. Moreover, the parameter estimates approach nearly stable levels after a small number of time steps (120 steps in this study). The parameter estimations show slow variations that would be an advantage of PU_EnKF to identify the changes of land surface properties.

Although favourable performance to improve streamflow predictions is obtained using the EnKF-based scheme, the runoff routing is neglected within the PU_EnKF assimilation setup because the travel time of generated runoff is less than one day in the Zhanghe River watershed. In fact, the time lag of runoff routing is an important factor for short-time (e.g. the hourly step) flood forecasting (Li et al., 2013; Pan and Wood, 2013). Moreover, this scheme is intent on PUB for the nested basins in which the correlations of states and parameters between neighbouring subbasins can be constructed. For separate basins in the same climatic regions and land surface conditions, assimilating other sources of data (e.g. the remotely sensed soil moisture and bright temperature) is expected to improve the predictions of hydrological variables (Troch et al., 2003). Nevertheless, this study provides an encouraging application for PUB by assimilating streamflow, which is generally regarded as quality observations compared with the remote sensing data.

Acknowledgements. This work was supported by grants from the National Natural Science Foundation of China (No. 51009001), the National High Technology Research and Development Program of China (863 Program, No. 2013AA121200), and the Fundamental Research Funds for the Central Universities (No. 105562GK).

References

- Ajami, N. K., Duan, Q., and Sorooshian, S.: An integrated hydrologic Bayesian multimodel combination framework: confronting input, parameter, and model structural uncertainty in hydrologic prediction, *Water Resour. Res.*, 43, W01403, doi:10.1029/2005wr004745, 2007.
- 5 Arnold, J. G. and Fohrer, N.: SWAT2000: current capabilities and research opportunities in applied watershed modelling, *Hydrol. Process.*, 19, 563–572, 2005.
- Arnold, J. G., Srinivasan, R., Muttiah, R. S., and Williams, J.: Large area hydrologic modeling and assessment part I: Model development1, *JAWRA J. Am. Water Resour. As.*, 34, 73–89, 1998.
- 10 Blöschl, G., Reszler, C., and Komma, J.: A spatially distributed flash flood forecasting model, *Environ. Model. Softw.*, 23, 464–478, doi:10.1016/j.envsoft.2007.06.010, 2008.
- Cai, X. L.: Strategy analysis on integrated irrigation water management with RS/GIS and hydrological model, Ph.D thesis, Wuhan University, Wuhan, China, 2007.
- Clark, M. P., Rupp, D. E., Woods, R. A., Zheng, X., Ibbitt, R. P., Slater, A. G., Schmidt, J., and Uddstrom, M. J.: Hydrological data assimilation with the ensemble Kalman filter: use of streamflow observations to update states in a distributed hydrological model, *Adv. Water Resour.*, 31, 1309–1324, doi:10.1016/j.advwatres.2008.06.005, 2008.
- 15 Crow, W. T. and Reichle, R. H.: Comparison of adaptive filtering techniques for land surface data assimilation, *Water Resour. Res.*, 44, W08423, doi:10.1029/2008wr006883, 2008.
- 20 Crow, W. T. and Van Loon, E.: Impact of incorrect model error assumptions on the sequential assimilation of remotely sensed surface soil moisture, *J. Hydrometeorol.*, 7, 421–432, 2006.
- DeChant, C. M. and Moradkhani, H.: Examining the effectiveness and robustness of sequential data assimilation methods for quantification of uncertainty in hydrologic forecasting, *Water Resour. Res.*, 48, W04518, doi:10.1029/2011wr011011, 2012.
- 25 Duan, Q. Y., Sorooshian, S., and Gupta, V.: Effective and efficient global optimization for conceptual rainfall-runoff models, *Water Resour. Res.*, 28, 1015–1031, 1992.
- Duan, Q. Y., Sorooshian, S., and Gupta, V. K.: Optimal use of the SCE-UA global optimization method for calibrating watershed models, *J. Hydrol.*, 158, 265–284, 1994.
- 30 Evensen, G.: Sequential data assimilation with a nonlinear quasi-geostrophic model using Monte Carlo methods to forecast error statistics, *J. Geophys. Res.*, 99, 10143–10162, doi:10.1029/94jc00572, 1994.

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

- Evensen, G.: The ensemble Kalman filter: theoretical formulation and practical implementation, *Ocean. Dynam.*, 53, 343–367, 2003.
- Evensen, G.: *Data Assimilation: the Ensemble Kalman Filter*, Springer Verlag, Berlin, Heidelberg, 2009.
- 5 Gassman, P., Reyes, M., Green, C., and Arnold, J.: The soil and water assessment tool: historical development, applications, and future research directions, *Trans. ASABE*, 50, 1211–1250, 2007.
- Gupta, H. V., Clark, M. P., Vrugt, J. A., Abramowitz, G., and Ye, M.: Towards a comprehensive assessment of model structural adequacy, *Water Resour. Res.*, 48, W08301, doi:10.1029/2011wr011044, 2012.
- 10 Helton, J. and Davis, F.: Latin hypercube sampling and the propagation of uncertainty in analyses of complex systems, *Reliabil. Eng. Syst. Safe.*, 81, 23–69, 2003.
- Holvoet, K., van Griensven, A., Seuntjens, P., and Vanrolleghem, P. A.: Sensitivity analysis for hydrology and pesticide supply towards the river in SWAT, *Phys. Chem. Earth*, 30, 518–526, doi:10.1016/j.pce.2005.07.006, 2005.
- 15 Hrachowitz, M., Savenije, H. H. G., Blöschl, G., McDonnell, J. J., Sivapalan, M., Pomeroy, J. W., Arheimer, B., Blume, T., Clark, M. P., Ehret, U., Fenicia, F., Freer, J. E., Gelfan, A., Gupta, H. V., Hughes, D. A., Hut, R. W., Montanari, A., Pande, S., Tetzlaff, D., Troch, P. A., Uhlenbrook, S., Wagener, T., Winsemius, H. C., Woods, R. A., Zehe, E., and Cudennec, C.: A decade of Predictions in Ungauged Basins (PUB) – a review, *Hydrolog. Sci. J.*, 58, 1198–1255, doi:10.1080/02626667.2013.803183, 2013.
- 20 Li, Y., Ryu, D., Western, A. W., and Wang, Q. J.: Assimilation of stream discharge for flood forecasting: the benefits of accounting for routing time lags, *Water Resour. Res.*, 49, 1887–1900, doi:10.1002/wrcr.20169, 2013.
- 25 Liu, F.: *Bayesian time series: analysis methods using simulation-based computation*, Ph.D thesis, Institutes of Statistics and Decision Science, Duke University, Durham, North Carolina, USA, 2000.
- Liu, G., Chen, Y., and Zhang, D.: Investigation of flow and transport processes at the MADE site using ensemble Kalman filter, *Adv. Water Resour.*, 31, 975–986, 2008.
- 30 Merz, R. and Blöschl, G.: Regionalisation of catchment model parameters, *J. Hydrol.*, 287, 95–123, doi:10.1016/j.jhydrol.2003.09.028, 2004.

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Moradkhani, H., Hsu, K.-L., Gupta, H., and Sorooshian, S.: Uncertainty assessment of hydrologic model states and parameters: Sequential data assimilation using the particle filter, *Water Resour. Res.*, 41, W05012, doi:10.1029/2004wr003604, 2005a.
- Moradkhani, H., Sorooshian, S., Gupta, H. V., and Houser, P. R.: Dual state-parameter estimation of hydrological models using ensemble Kalman filter, *Adv. Water Resour.*, 28, 135–147, 2005b.
- Muleta, M. K. and Nicklow, J. W.: Sensitivity and uncertainty analysis coupled with automatic calibration for a distributed watershed model, *J. Hydrol.*, 306, 127–145, doi:10.1016/j.jhydrol.2004.09.005, 2005.
- Neitsch, S., Arnold, J., Kiniry, J., Williams, J., and King, K.: Soil and water assessment tool theoretical documentation version 2000, Grassland, Soil and Water Research Laboratory, Temple, Texas, 2001.
- Norbiato, D., Borga, M., Degli Esposti, S., Gaume, E., and Anquetin, S.: Flash flood warning based on rainfall thresholds and soil moisture conditions: an assessment for gauged and ungauged basins, *J. Hydrol.*, 362, 274–290, 2008.
- Pan, M. and Wood, E. F.: Inverse streamflow routing, *Hydrol. Earth Syst. Sci. Discuss.*, 10, 6897–6929, doi:10.5194/hessd-10-6897-2013, 2013.
- Parajka, J., Viglione, A., Rogger, M., Salinas, J. L., Sivapalan, M., and Blöschl, G.: Comparative assessment of predictions in ungauged basins – Part 1: Runoff-hydrograph studies, *Hydrol. Earth Syst. Sci.*, 17, 1783–1795, doi:10.5194/hess-17-1783-2013, 2013.
- Ponce, V., Hawkins, R., Golding, B., Smith, R., and Willeke, G.: Runoff curve number: has it reached maturity?, *J. Hydrol. Eng.*, 1, 11–19, 1996.
- Post, D. A. and Jakeman, A. J.: Predicting the daily streamflow of ungauged catchments in SE Australia by regionalising the parameters of a lumped conceptual rainfall-runoff model, *Ecol. Model.*, 123, 91–104, 1999.
- Rallison, R. and Miller, N.: Past, present and future SCS runoff procedure, in: *Rainfall Runoff Relationship*, edited by: Singh, V. P., Water Resour. Publ., Littleton, Colo., USA, 353–364, 1981.
- Reichle, R., McLaughlin, D., and Entekhabi, D.: Hydrologic data assimilation with the ensemble Kalman filter, *Mon. Weather Rev.*, 130, 103–114, 2002.
- Reichle, R. H., Crow, W. T., and Keppenne, C. L.: An adaptive ensemble Kalman filter for soil moisture data assimilation, *Water Resour. Res.*, 44, W03423, doi:10.1029/2007wr006357, 2008.

Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Sellami, H., La Jeunesse, I., Benabdallah, S., Baghdadi, N., and Vanclooster, M.: Uncertainty analysis in model parameters regionalization: a case study involving the SWAT model in Mediterranean catchments (Southern France), *Hydrol. Earth Syst. Sci. Discuss.*, 10, 4951–5011, doi:10.5194/hessd-10-4951-2013, 2013.
- 5 Sivapalan, M.: Prediction in ungauged basins: a grand challenge for theoretical hydrology, *Hydrol. Process.*, 17, 3163–3170, doi:10.1002/hyp.5155, 2003.
- Sivapalan, M., Takeuchi, K., Franks, S. W., Gupta, V. K., Karambiri, H., Lakshmi, V., Liang, X., McDonnell, J. J., Mendiondo, E. M., O'Connell, P. E., Oki, T., Pomeroy, J. W., Schertzer, D., Uhlenbrook, S., and Zehe, E.: IAHS Decade on Predictions in Ungauged Basins (PUB),
10 2003–2012: Shaping an exciting future for the hydrological sciences, *Hydrolog. Sci. J.*, 48, 857–880, doi:10.1623/hysj.48.6.857.51421, 2003.
- Srinivasan, R., Zhang, X., and Arnold, J.: SWAT ungauged: hydrological budget and crop yield predictions in the Upper Mississippi River Basin, *T. ASABE*, 53, 1533–1546, 2010.
- Troch, P. A., Paniconi, C., and McLaughlin, D.: Catchment-scale hydrological modeling and data
15 assimilation, *Adv. Water Resour.*, 26, 131–135, doi:10.1016/s0309-1708(02)00087-8, 2003.
- Troch, P. A., Carrillo, G., Sivapalan, M., Wagener, T., and Sawicz, K.: Climate-vegetation-soil interactions and long-term hydrologic partitioning: signatures of catchment co-evolution, *Hydrol. Earth Syst. Sci.*, 17, 2209–2217, doi:10.5194/hess-17-2209-2013, 2013.
- van Griensven, A., Meixner, T., Grunwald, S., Bishop, T., Diluzio, M., and Srinivasan, R.:
20 A global sensitivity analysis tool for the parameters of multi-variable catchment models, *J. Hydrol.*, 324, 10–23, doi:10.1016/j.jhydrol.2005.09.008, 2006.
- Vrugt, J. A., Diks, C. G. H., Gupta, H. V., Bouten, W., and Verstraten, J. M.: Improved treatment of uncertainty in hydrologic modeling: Combining the strengths of global optimization and data assimilation, *Water Resour. Res.*, 41, W01017, doi:10.1029/2004wr003059, 2005.
- 25 Vrugt, J. A., ter Braak, C. J. F., Clark, M. P., Hyman, J. M., and Robinson, B. A.: Treatment of input uncertainty in hydrologic modeling: doing hydrology backward with Markov chain Monte Carlo simulation, *Water Resour. Res.*, 44, W00b09, doi:10.1029/2007wr006720, 2008.
- Wang, D., Chen, Y., and Cai, X.: State and parameter estimation of hydrologic models using the constrained ensemble Kalman filter, *Water Resour. Res.*, 45, W11416, doi:10.1029/2008wr007401, 2009.
- 30 Xie, X.: Simultaneous state-parameter estimation for hydrologic modeling using ensemble Kalman filter, in: *Land Surface Observations, Modeling and Data Assimilation*, 1st Edn.,

HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



edited by: Liang, S., Li, X., and Xie, X., Word Scientific, Toh Tuck Link, Singapore, p. 462, 2013.

Xie, X. and Cui, Y.: Development and test of SWAT for modeling hydrological processes in irrigation districts with paddy rice, *J. Hydrol.*, 396, 61–71, doi:10.1016/j.jhydrol.2010.10.032, 2011.

Xie, X. and Zhang, D.: Data assimilation for distributed hydrological catchment modeling via ensemble Kalman filter, *Adv. Water Resour.*, 33, 678–690, doi:10.1016/j.advwatres.2010.03.012, 2010.

Xie, X. and Zhang, D.: A partitioned update scheme for state-parameter estimation of distributed hydrologic models based on the ensemble Kalman filter, *Water Resour. Res.*, doi:10.1002/2012WR012853, in press, 2013.

Yang, J., Gong, P., Fu, R., Zhang, M., Chen, J., Liang, S., Xu, B., Shi, J., and Dickinson, R.: The role of satellite remote sensing in climate change studies, *Nat. Clim. Change*, 3, 875–883, doi:10.1038/nclimate1908, 2013.

Zhang, X., Srinivasan, R., and Van Liew, M.: Multi-site calibration of the SWAT model for hydrologic modeling, *T. ASABE*, 51, 2039–2049, 2008.

Improving streamflow predictions at ungauged locations

X. Xie et al.

Table 1. Model parameters to be estimated in data assimilation.

No.	Parameter (Type)	Description	Scale*	Process	Min	Max
1	CN ₂	SCS runoff curve number for moisture condition II (–)	HRU	Runoff	35.0	98.0
2	CH_K	Effective hydraulic conductivity of channels alluvium (mm h ⁻¹)	Subbasin	Channel water	0.02	76.0
3	SOL_AWC	Available water capacity of the soil layer (mm mm ⁻¹ soil)	HRU	Soil	0.0	1.0
4	SURLAG	Surface runoff lag coefficient (day)	HRU	Runoff	1.0	10.0
5	GWQMN	Threshold depth of water in the shallow aquifer required for return flow to occur (mm)	HRU	Groundwater	20.0	1000.0
6	ESCO	Plant evaporation compensation factor (–)	HRU	Evaporation	0.0	1.0
7	ALPHA_BF	Baseflow alpha factor (day)	HRU	Lateral water	0.0	1.0

* The hydrologic variables are with respect to the scales to reflect the related hydrologic processes.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Improving streamflow predictions at ungauged locations

X. Xie et al.

Table 2. Dynamic hydrologic states and outputs to be updated in data assimilation.

No.	Variable	Description	Scale*
1	Qsufstor	Amount of surface runoff stored or lagged (mm)	HRU
2	Qlatstor	Amount of lateral flow stored or lagged (mm)	HRU
3	Qshall	Amount of shallow water stored or lagged (mm)	HRU
4	Qrchrg	Amount of recharge entering the aquifer (mm)	HRU
5	Qpregw	Amount of groundwater flow into the main channel (mm)	HRU
6	Wsol	Amount of water stored in the soil layer for each HRU (mm)	HRU×Nlay ^a
7	Wr	Amount of water stored in the reach (m ³)	Subbasin
8	Wb	Amount of water stored in the bank (m ³)	Subbasin
9	SW	Amount of water stored in soil profile (mm)	Subbasin
10	Qr	Amount of water flow out of reach (Streamflow, m ³ s ⁻¹)	Subbasin (Reach)

* Here Nlay is the number of soil layers (Nlay = 4 for this study), and HRU×Nlay means the soil profile of each HRU is partitioned into Nlay layers.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



HESSD

10, 13441–13473, 2013

Improving streamflow predictions at ungauged locations

X. Xie et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 3. Fractional factors used to perturb the precipitation (η_p), soil moisture (η_{sm}), simulated streamflow (η_{Qm}) and the observed streamflow (η_{Qo}).

Distribution parameter	η_p	η_{sm}	η_{Qm}	η_{Qo}
Values of fractional factor	0.10	0.15	0.15	0.10

Improving streamflow predictions at ungauged locations

X. Xie et al.

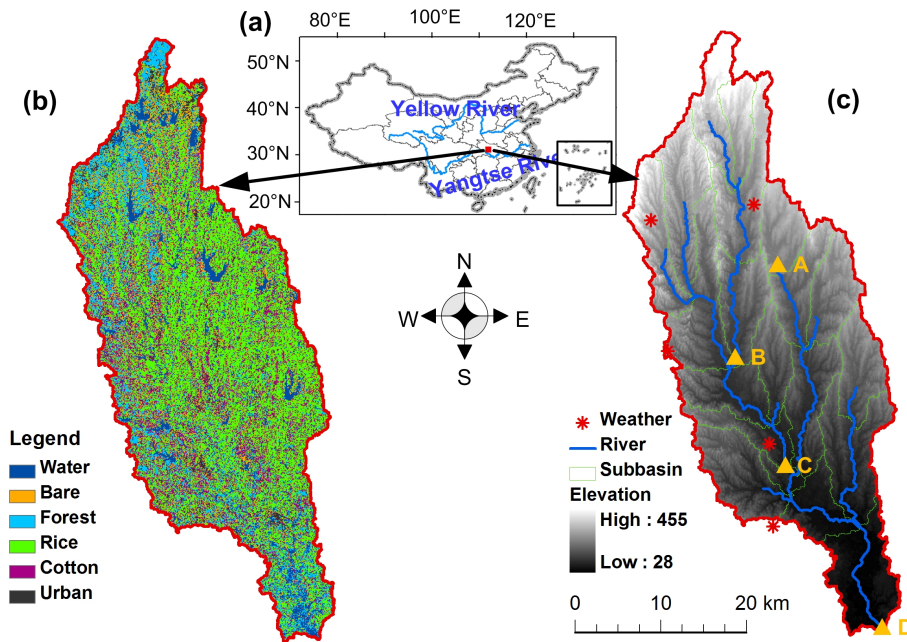


Fig. 1. Zhanghe River basin in China **(a)**, the land use **(b)** and subbasin distribution with DEM **(c)**.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Improving streamflow predictions at ungauged locations

X. Xie et al.

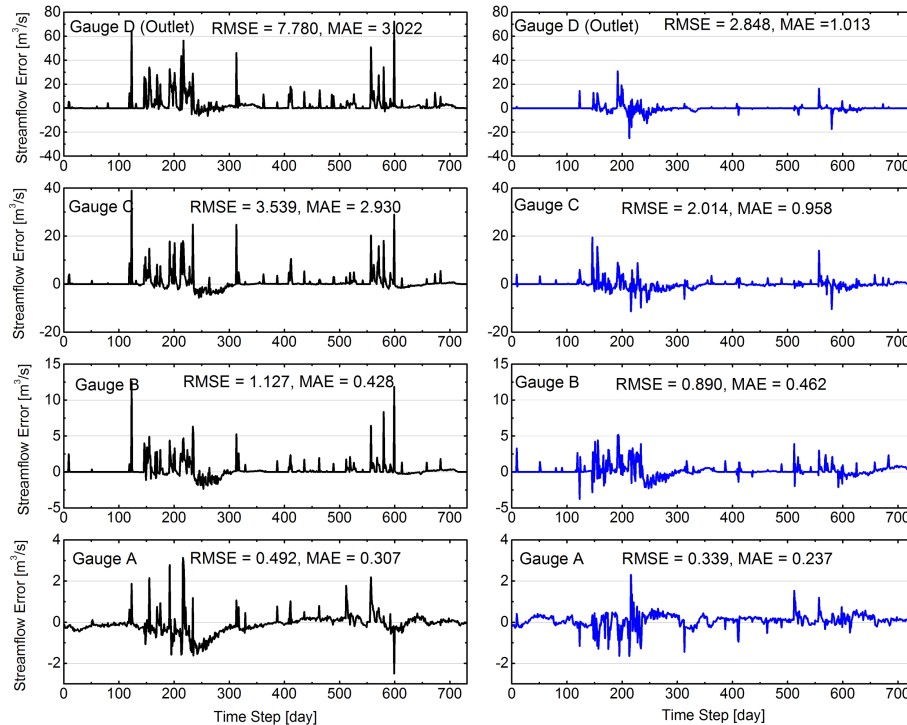


Fig. 2. Streamflow prediction errors from the control-run simulation (left column) and the data assimilation of scenario ASS_D (right column), i.e. only the observed streamflow from Gauge D (outlet) is assimilated to update model states and parameters.

Improving streamflow predictions at ungauged locations

X. Xie et al.

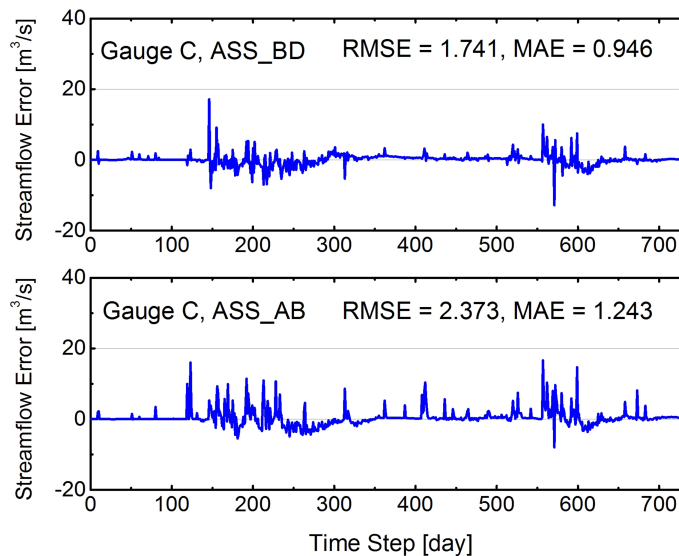


Fig. 3. Streamflow prediction errors from scenarios ASS_BD and ASS_AB. Only the results for Gauge C are shown because Gauge C is at the outlet of a pseudo-ungauged subbasin in both scenarios.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Improving streamflow predictions at ungauged locations

X. Xie et al.

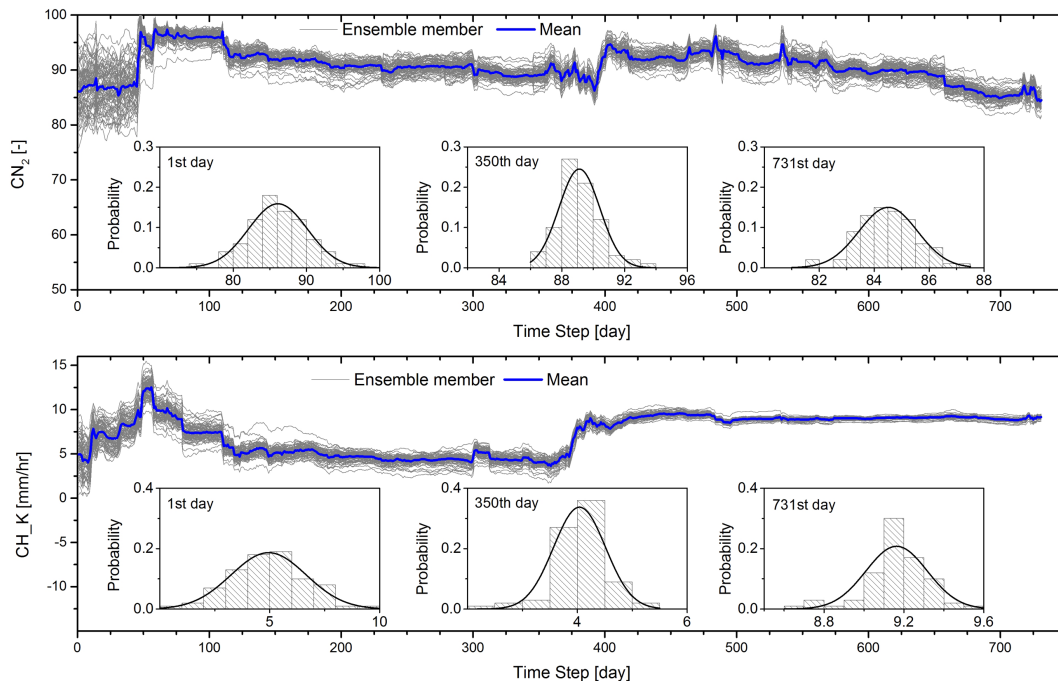


Fig. 4. Estimations of two typical parameters (CN_2 and CH_K) from the ASS_D scenario. The histograms in each plot, fitted with the Gaussian distribution function, represent the ensemble distribution at three time steps.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Improving streamflow predictions at ungauged locations

X. Xie et al.

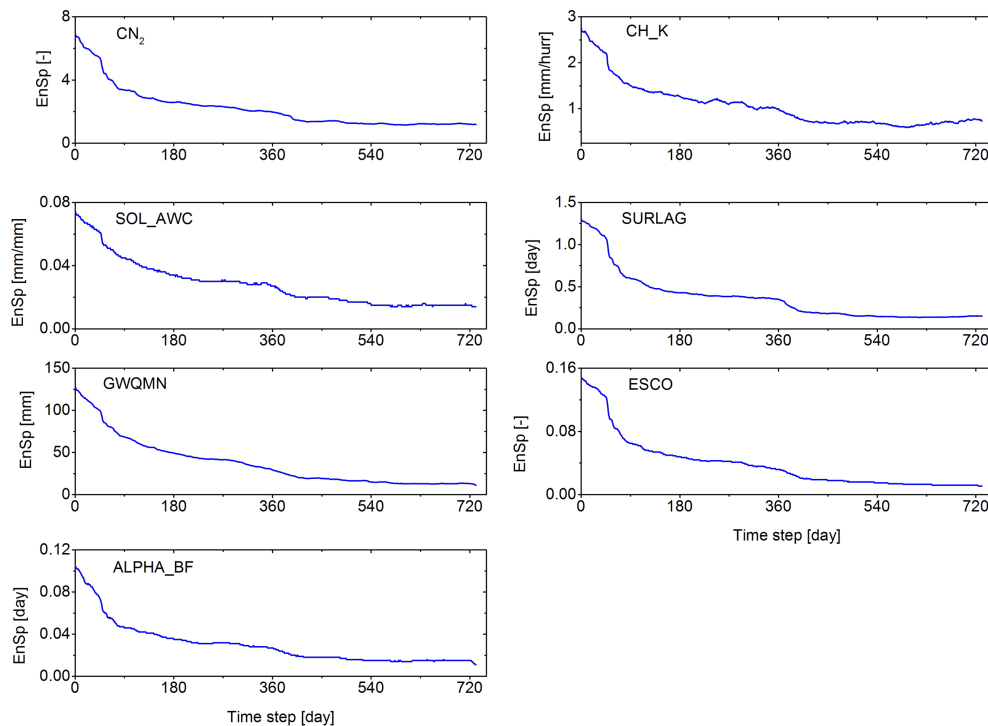


Fig. 5. Ensemble spreads (EnSp) of the seven parameters listed in Table 1: $\text{EnSp} = \sqrt{\frac{1}{\text{Nu}} \sum_{i=1}^{\text{Nu}} \text{VAR}_{\text{En}}(i)}$, where Nu is the number of HRUs or subbasins and $\text{VAR}_{\text{En}}(i)$ denotes the ensemble variance at each HRU or subbasin with respect to each parameter.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Improving streamflow predictions at ungauged locations

X. Xie et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

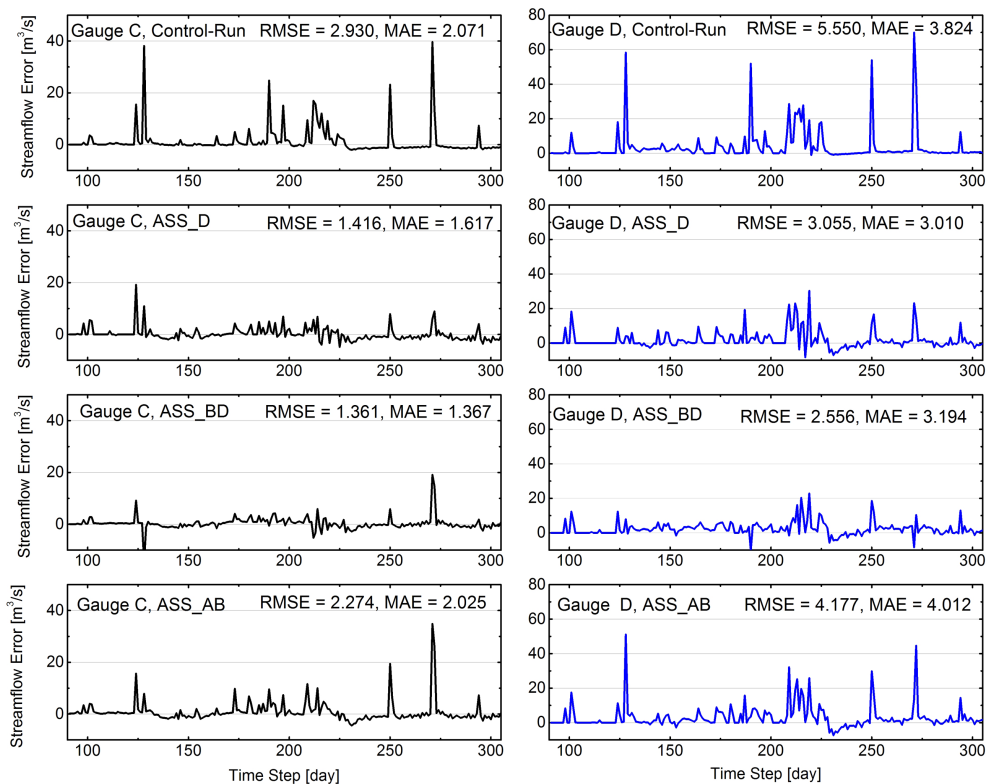


Fig. 6. Streamflow predictions using four scenarios of different parameter sets. Only results of Gauge C and D are shown.