

**Evaluation of Mekong River Commission
operational flood
forecasts, 2000–2012**

T. C. Pagano

**Evaluation of Mekong River Commission
operational flood forecasts, 2000–2012**

T. C. Pagano

Bureau of Meteorology, 700 Collins Street, Docklands VIC 3008, Australia

Received: 7 November 2013 – Accepted: 7 November 2013 – Published: 26 November 2013

Correspondence to: T. C. Pagano (thomas.c.pagano@gmail.com)

Published by Copernicus Publications on behalf of the European Geosciences Union.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Abstract

This study created a 13 yr historical archive of operational flood forecasts issued by the Regional Flood Management and Mitigation Center (RFMMC) of the Mekong River Commission. The RFMMC issues 1 to 5 day-ahead daily deterministic river height forecasts for 22 locations throughout the wet season (June–October). When these forecasts reach near Flood Level, government agencies and the public are encouraged to take protective action against damages. When measured by standard skill scores, the forecasts perform exceptionally well (e.g. 1 day-ahead Nash–Sutcliffe > 0.99) although much of this apparent skill is due to the strong seasonal cycle and the narrow natural range of variability at certain locations. 5 day-ahead forecasts upstream of Phnom Penh typically have 0.8 m error standard deviation, whereas below Phnom Penh the error is typically 0.3 m. The Coefficients of Persistence for 1 day-ahead forecasts are typically 0.4–0.8 and 5 day-ahead forecasts are typically 0.1–0.7. RFMMC uses a series of benchmarks to define a metric of Percentage Satisfactory forecasts. As the benchmarks were derived based on the average error, certain locations and lead-times consistently appear less satisfactory than others. Instead, different benchmarks were proposed and derived based on the 70th percentile of absolute error over the 13 yr period. There are no obvious trends in the Percentage of Satisfactory forecasts from 2002–2012, regardless of the benchmark chosen. Finally, when evaluated from a categorical “crossing above/not-crossing above flood level” perspective, the forecasts have a moderate probability of detection (48 % at 1 day-ahead, 31 % at 5 day-ahead) and false alarm rate (13 % at 1 day-ahead, 74 % at 5 days-ahead).

1 Introduction

The Mekong River is one of the few large rivers where its flow has not yet been drastically modified by human development. It is a complex and varied system, both naturally and institutionally, originating in the Tibetan Plateau, flowing through six countries, and

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

discharging to the Mekong Delta in Viet Nam. The region and the River are underdeveloped, and there are anticipated major geopolitical, economic, social, and environmental changes – such as the planned five-fold increase in reservoir storage in the next ten years (Johnston and Kummu, 2012) – to support the irrigation and hydropower needs of a rapidly growing population (Pech and Sunada, 2008). Deforestation and urbanization are likely, along with the construction of roads, embankments, and flood protection works.

Flood forecasts help the economic development of the region while mitigating flood damages and mortalities. The first flood forecasting program was established following a very large flood in 1966 (Plate and Insisiengmay, 2005), and a sequence of nearly unprecedented floods in 2000–2001 lead to the establishment of the Mekong River Commission's (MRC) Regional Flood Management and Mitigation Center (RFMMC) in Phnom Penh, Cambodia. The RFMMC and the flood forecasts it produces are part of a broader water management plan that includes both structural and non-structural measures designed to keep floods away from people and people away from floods, respectively.

The RFMMC generates 1 to 5 day-ahead forecasts, updated daily, during the wet season (June–October) and 1 to 7 day-ahead outlooks, updated weekly, during the dry season (November–May). It also creates qualitative flood forecasts, which describe the expectation of flooding (i.e. may not refer to a specific place but could be used for flash flood advice or for seasonal outlooks). The forecasts are bundled with recent observed data and distributed as the Mekong Bulletin to 39 water-related government, non-government, and United Nations agencies in Viet Nam, Thailand, Lao People's Democratic Republic (PDR), and Cambodia; and made publicly available on the Internet (Mekong River Commission, 2013). National television, radio broadcasting, telephone, facsimile, e-mail, websites, and newspaper networks are used to deliver flood information to the public. However, many people find it difficult to obtain real time alerts as they do not have access to email and websites (Keoduangsine and Goodwin, 2012).

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



The RFMMC uses human expertise and a combination of hydrologic, hydraulic, and statistical models to generate the forecasts. The RFMMC inherited several forecasting models, including the Streamflow Synthesis and Reservoir Regulation (SSARR, Rockwood, 1968) installed in 1967 to simulate flows in the main river from Chiang Saen to Pakse (Johnston and Kumm, 2012). Following the recommendations of a comprehensive review (Malone, 2006) the forecasting system was updated in 2008, including using new data sources, improved and extended use of rainfall forecasts, and improved flood forecast models. The RFMMC shifted to the Delft-FEWS platform using the URBS event-based hydrologic model with Muskingum routing, as well the ISIS hydrodynamic model (Tospornsampan et al., 2009). It expanded its use of satellite-based precipitation estimates to supplement the sparse ground-based rain gauge network. Over time, the operational forecasters have improved and gained experience with the system. The system was immediately tested by major floods in 2008 and again in 2011, after which the forecasters re-tuned the model parameters.

Performance evaluation is a critical component of any forecasting system. Comparison of actual operational forecasts (and/or retrospectively generated hindcasts) to observations can highlight strengths and weaknesses of a system, helping to identify opportunities to improve forecasts. Performance evaluation can also show the value of forecasts to program managers and demonstrate the improvements realized from past investments in system upgrades. Users of the forecasts can consider information about the expected error of any given forecast to manage risks associated with taking action to protect against anticipated floods. Further, performance of operational systems can be compared to experimental and research systems to evaluate the potential adoption of new techniques and technologies. There have been increased calls for study of “hydrologic forecasting science” as a way for forecasts to improve our understanding of natural systems and vice versa (Welles et al., 2007).

This article is the first evaluation of the performance of the entire history of operational flood forecasts of the RFMMC. This study is intended not only as an external and independent investigation into forecast accuracy, but as a basis for considering and

implementing further improvements to the RFMMC flood forecasting system. Additionally, the operational performance evaluation methods in use at RFMMC and outlined here and may serve as templates for others in the region and overseas.

The article begins with a discussion of the study locations and the available data.

5 It reviews past efforts at evaluating Mekong River forecasts and outlines the forecast evaluation method used here. The performance of the forecasts is then measured and the implications discussed.

2 Study locations

The Mekong Basin has several geographic features that make forecasting challenging. According to MRC (2005):

10 “Kratie is generally regarded as the point in the Mekong system where the hydrology and hydrodynamics of the river change significantly. Upstream from this point, the river generally flows within a clearly identifiable mainstream channel. In all but the most extreme flood years, this channel contains the full discharge with only local over-
15 bank natural storage. Downstream from Kratie, seasonal floodplain storage dominates the annual regime and there is significant movement of water between channels over flooded areas, the seasonal refilling of the Great Lake and the flow reversal in the Tonle Sap. There is extreme hydrodynamic complexity in both time and space and it becomes impossible to measure channel discharge. Water levels, not flow rates and
20 volumes, determine the movement of water across the landscape. . . As the water level in the mainstream falls in late September, water flows out of the lake down the Tonle Sap back into the Mekong mainstream. Nowhere else in the world is there a flow reversal this large”.

25 The Tonle Sap is the largest freshwater lake in Asia. The Bassac River is a distributary of the Tonle Sap and the Mekong River downstream of Phnom Penh, flowing alongside the mainstream channel.

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Above Kratie, the basin is further divided at Vientiane-Nong Khai. Upstream of this point, especially in China, the catchment is relatively steep and fast responding although a snowmelt component contributes to flow in the dry season. The lower basin is dominated by wet-season runoff originating in Lao PDR. RFMMC currently produces forecasts of water level at 22 locations and discharge at 14 locations; there are no discharge forecasts below Kratie (Table 1 and Fig. 1).

The forecast points are the locations of river gauges; additional information is necessary to translate the forecasts at gauges to water levels in the many local villages along the floodplain. Each forecast point has a defined Flood Level (e.g. 11.8 m) at which point local and national authorities need to take urgent measures to prevent significant damage. Flood Levels are determined by the member states, with the definition of Flood Level dependent on national standards. Alarm Level is typically exceeded three days before Flood Level is reached or exceeded. Alarm Levels are determined by the RFMMC and member states based upon the defined Flood Level and an analysis of historic flood records (Mekong River Commission, 2013).

In the lower parts of the basin, maximum river level is not the only flooding concern. Prolonged periods of flow above a given discharge can cause the weakening and collapse of protection dikes. Also, rice paddies can be submerged in water for 8 to 10 days and survive, but longer than that and the crop begins to die (Mekong River Commission, 2005). Total annual volume of flow is sometimes used as a proxy for the damages caused by long-duration floods. The RFMMC currently only produces 1 to 5 day-ahead forecasts but there is strong interest in medium-range and seasonal forecasts.

The flow has strong seasonality with a well-defined wet season during June to October (Fig. 2). The upstream station, Luang Prabang, routinely has six or more peak flows during a single season, with the greatest peak typically occurring in June. Pakse, downstream, is less variable, with fewer peaks later in the season (August is a typical peak period but in 2007 floods occurred as late as October). Tan Chau at the Viet Nam/Cambodia border and near the Delta is nearly completely dominated by the seasonal cycle and there are instances of river heights exceeding Flood Level for more

than a month. When Tan Chau river height is below 2 m (usually December–July), the station is affected by ocean tides. These tides have an effect as far upstream as Phnom Penh at the nadir of the dry season.

Total travel time between Chiang Saen and Phnom Penh is about 10 days. In the steep river reach between Chiang Saen and Vientiane, floods can travel at approximately a speed of 400 km per day. Downstream of Vientiane, the speed is half of this or less, especially near the Delta. Below Phnom Penh, depending on the level of the Tonle Sap and tides, the river can stagnate and change direction.

Rain gauge density (but not spatial distribution) in Thailand and Viet Nam is fair, but the networks are inadequate in Cambodia and Laos (Pengel et al., 2008). There is little automation and telemetry of measurements, in part because human observers remain relatively inexpensive and provide reliable quality data. Runoff coefficients (runoff/precipitation) vary between 0.34 and 0.52 for individual locations, with 0.41 for the whole basin (Hapuarachchi et al., 2008).

3 Data

The primary distribution channel of the RFMMC's forecasts is the Mekong Bulletin. The Bulletin's tables and graphics are created using templates in Excel spreadsheets. For this study, processing scripts were used to extract the numerical values of the forecasts from the spreadsheets in order to place them in a consistent structure. The layout of the spreadsheets has changed over time and they are designed to be human-readable (as opposed to having a strict and consistent format for machine-readability). Therefore care was taken to visualize the end results to detect outliers and possible processing errors.

Operationally, a new spreadsheet is saved for each day's forecasts, normally named "F" with a suffix of the issue day, month and year (e.g. F21Aug09.xls). File names may have slightly different suffixes (e.g. F21Aug09_Original.xls, F21Aug09_Isis.xls). The latter may contain raw model output and not as-issued forecasts. The suffix "Original"

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

was allowed in the 0.65 % of cases that a normal-named file did not exist for a given date. 3531 spreadsheets were identified as potentially containing official forecasts.

There are many examples of multiple files with the same name existing in various locations in the RFMMC operational forecasting directory structure. The union of all forecasts was retained (i.e. non-blanks overriding blanks) and in the 0.41 % cases where forecasts with the same location, issue date, and lead-time conflicted, the original files were manually inspected and subjective judgment used to select the numbers that best reflect the forecaster’s intent (e.g. 4.17 is more likely than exactly 0.00). The forecasters have the option to issue a “first” (i.e. provisional) forecast at 10 a.m. and a “follow-up” forecast a few hours later. This is only done around five times per season and the metadata insufficiently distinguish first and follow-up forecasts.

This study archived the forecasts in absolute heights above Mean Sea Level and relative to the gauge datum (“Zero Gauge Levels”, Table 1). The Bulletins contain these Zero Gauge Levels but when one was missing, the Zero Gauge Level was inferred from earlier and later forecasts.

The observations were collected from several sources. The Bulletins often contain observed river height for the prior two days. This is the 7 a.m. reading and the data are provisional. Unfortunately, during the dry season when the forecasts are issued every seven days and only extend to seven days ahead, there will be nearly no overlap between the Bulletins’ forecasts and observations. The RFMMC also receives four other manual readings per day along with continuous automated hourly data where available. These data are reviewed and corrected for errors and archived as a daily average in the operational database. This second source of data was time shifted to match the interpretation of the RFMMC forecasts (i.e. instantaneous height at 7 a.m.). Thirdly, the IKMP (Integrated Knowledge Management Programme) of the Technical Support Division of the MRC is the long-term custodian of the data and provides July–October data for 2008–2012 on the Internet (http://ffw.mrcmekong.org/historical_rec.htm).

The observations from these three sources (Bulletins, Operational Database, and IKMP) were visualized together to discover and remove obvious outliers. The data

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



were merged in order of priority of: Bulletins < Operational Database < IKMP. There are 4598 days (12.6 yr) of observations for 22 stations. 21 % of these observations are missing, 58 % came from the Operational Database, 16 % from IKMP, and 4 % from the Bulletins.

Finally, the forecasts and observations were visualized together to inspect for outliers. 73 of 353 547 forecasts (roughly 1 in 5000 or 5 per year) appeared as outliers and the original Bulletins were examined to determine the cause. In 32 % of cases, the Bulletins contained forecasts for a date other than what was indicated by the file-name and therefore were excluded. 12 % of cases resulted from a keying error (e.g. 9.3 meant to be 6.3). 57 % appear to be genuine model malfunctions. For example, during 13–17 November 2011 (during the dry season), the forecast contains unreasonably low discharges in the headwaters and errors in excess of 3 m. When available, observed flow from China is used by the RFMMC as an input to the model and it is possible that 0 inflow was entered when it should have been listed as missing. The forecasts with keying errors and model malfunctions are available to the public and therefore are an actual part of the user experience. However, for the purposes of this study all forecast outliers were removed because they are extremely rare, are not systematic, and it is hoped that attentive users would know that the forecasts are unreasonable. When forecaster intent was clear, keying errors were corrected to the likely true value.

4 Previous studies

Although this article is the first evaluation of many years of operational forecasts, the RFMMC has been evaluating its forecasts for practically as long as it has been issuing them. The purpose of the evaluations has mainly been to give users a realistic view of the accuracy that can be achieved, particularly by emphasizing the high uncertainty in the forecasts with longer lead-times (Pengel et al., 2007).

Plate et al. (2008) demonstrated general evaluation concepts using water level forecasts from the SSARR model for the 2005 wet season (July–October) as examples.

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



sensed products but the satellite-based rainfall estimates commonly differ from the in situ measurements and each other by 20–60 % on seasonal timescales (or over 200 % in extreme cases).

In operational practice, the final products from the model are examined and analysed by the flood forecaster in charge, who may change the forecast based on his judgement by utilizing his knowledge of the system, relevant information (e.g. hydro-meteorological data, satellite images, weather charts, storm forecast etc.), and past experiences. These forecaster adjustments commonly occur upstream of Kratie and have been shown to yield substantial improvements to forecast skill over the raw model output (Kanning et al., 2008).

5 Method

Aspects of performance of the forecasts are measured in a variety of ways in this study. The deterministic forecasts are of a continuous variable at point locations (river height measured in the morning at specific gauges). The accuracy of the forecasts is calculated using the standard deviation of the error, with 0 being a perfect value;

$$\sigma(\text{loc}, \text{lead}) = \sqrt{\frac{1}{N} \sum_{i=1}^N \left\{ \left[f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc}) \right] - \left[\overline{f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc})} \right] \right\}^2}$$

where $f_i(\text{loc}, \text{lead})$ is the forecast issued on day i for a given location and lead-time (lead = 1 to 5 days). The corresponding observation occurs at $o_{i+\text{lead}}(\text{loc})$. Forecasts and/or observations are missing on some days, and statistics were only calculated on days with valid forecast-observation pairs. This measure does not consider bias (average error).

While the error standard deviation is a highly relevant evaluation measure for an individual user at a single location, this measure is often highly influenced by the hydrological characteristics of the river and is less influenced by the quality of the forecasts.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



For example, the difference between maximum and minimum height for Luang Prabang during 2000–2012 is 18.1 m whereas Tan Chau did not vary by more than 5.1 m. Therefore the former is likely to be a more difficult forecasting challenge than the latter.

To facilitate easier comparison of performance across locations, it is useful to normalize the results. The Nash Sutcliffe (NS) is one minus the mean squared error of the forecasts divided by the variance of the observations;

$$NS(\text{loc}, \text{lead}) = 1 - \frac{\sum_{i=1}^N \left\{ [f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc})] - \overline{[f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc})]} \right\}^2}{\sum_{i=1}^N [o_{i+\text{lead}}(\text{loc}) - \overline{o_{i+\text{lead}}(\text{loc})}]^2}$$

An NS of 1 is perfect, 0 indicates no skill over always guessing the long-term average, and values less than 0 imply negative skill.

For slowly varying rivers and/or rivers with a strong seasonal cycle, the long-term average is an uninformative baseline. Instead, researchers commonly use a Coefficient of Persistence (CP) that is similar to NS but the baseline uses the value of the observation at the start of the forecast issuance (Kitanidis and Bras, 1980)

$$CP(\text{loc}, \text{lead}) = 1 - \frac{\sum_{i=1}^N \left\{ [f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc})] - [o_i(\text{loc}) - o_{i+\text{lead}}(\text{loc})] \right\}^2}{\sum_{i=1}^N [o_{i+\text{lead}}(\text{loc}) - o_i(\text{loc})]^2}$$

The baseline could also be persistence extrapolated into the future using the trend of the two observations prior to forecast issuance:

$$f_i(\text{loc}, \text{lead}) = o_i(\text{loc}) + \text{lead} \cdot [o_i(\text{loc}) - o_{i-1}(\text{loc})]$$

RFMMC commonly calculates a Percentage Satisfactory index, measuring the percentage of forecasts where the error is less than a prescribed threshold $B(\text{loc}, \text{lead})$.

$$PS(\text{loc}, \text{lead}) = \frac{1}{N} \sum_{i=1}^N \begin{cases} |f_i(\text{loc}, \text{lead}) - o_{i+\text{lead}}(\text{loc})| < B(\text{loc}, \text{lead}) & 1 \\ \text{else} & 0 \end{cases}$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



PS of 1 is perfect and 0 is completely unsatisfactory. The thresholds depend on the user's concept of "satisfactory". They could be based on maintaining a consistent level of service (e.g. are this year's forecasts at least as good as last year's?) or based on the decision-making context (e.g. is the accuracy sufficient for planning purposes?).

Finally, perhaps the most visible and important forecasts of the RFMMC are those that predict a passing into Flood Level conditions. The continuous forecasts of water level can be converted to categorical forecasts of "Yes flood" and "No flood", based on the Flood Levels published in the Bulletins. A contingency table can then be constructed measuring the fraction of observed and/or forecast events that were correctly predicted. The false alarm rate is the fraction of times that the forecast indicated an event (e.g. flood) but no event occurred (0 is perfect). The probability of detection is the fraction of times that the forecast indicated an event, relative to all the times the event occurred (1 is perfect). The Equitable Threat Score combines hits, misses, and false alarms in a manner that considers the rarity of the event (Gandin and Murphy, 1992):

$$ETS = \frac{H - H_e}{H + FA + M - H_e}$$

Where H is hits (forecasts said flood, observed was flood), M is misses (forecasts said no flood, flood occurred) and FA is false alarms (forecast said flood, no flood occurred). H_e is the expected hits by chance and is given by

$$H_e = \frac{(H + FA)(H + M)}{N}$$

Where N is the total events and non-events. For rare events, the worst value of ETS is near 0 whereas a perfect score is 1.

Throughout this study, only forecasts issued during the wet season (June to October) were evaluated. During the dry season the rivers remain predictably near baseflow and can be affected by ocean tides.

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



6 Results

Upstream of Kompong Cham, with the exception of Luang Prabang (which is the lowest accuracy location), 1 day-ahead forecasts have an error standard deviation of approximately 0.17 m, increasing to 0.83 m at 5 days ahead. Below Pakse, the 1 and 5 day-ahead forecasts have higher accuracy with an error standard deviation of 0.06 and 0.26 m respectively (Fig. 3). Most locations upstream of Phnom Penh have an observed standard deviation near 2.5 m although Kratie has a value as high as 3.6 and Chiang Saen (the most upstream point) is as low as 1.4 m. Below Phnom Penh, the observed standard deviation is typically close to 1.5 m.

When compared to the baseline of the long-term average, the forecasts appear exceptionally skilful; all locations except Chiang Saen have 1 day ahead NS scores greater than 0.99 (1.0 is perfect). Upstream of Kratie, 5 day ahead NS are typically 0.90, and the NS are still above 0.98 for the points downstream. Undoubtedly, much of this apparent skill comes from the strong seasonal cycle and the slow variations of such a large river system. When compared to persistence, the skill is more modest, with CP scores between 0.4–0.8 for 1 day-ahead and 0.1–0.7 for 5 day-ahead forecasts. These results are similar to but somewhat better than what is reported by research models (e.g., Shahzad et al., 2009, reported NS ~ 0.9 and Persistence Index of 0.2–0.5). For lead-time 1 day, persistence extrapolated by a linear trend outperforms the operational forecasts for 12 out of 22 locations, however, for 2 days and greater, persistence with trend is consistently worse than simple persistence only.

As mentioned in previous sections, the RFMMC commonly reports the Percentage Satisfactory forecasts as a measure of performance. Three benchmarks are available, the first of which has been used operationally for many years (“Legacy”, included in old seasonal and annual RFMMC reports), the second and third were proposed by an Australian consultant (“Malone”) and a US consultant (“Operational”, Table 2), the last two extend to 10 days ahead and are reported in Smith (2009). Smith’s benchmarks are more stringent than the others and were intended as stretch goals after the 2008

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

benchmarks is nearly identical to that of this study's benchmark. Although there is a gradual (albeit likely insignificant) upward trend in skill between 2006 and 2012, there is no obvious cause for the higher skill in 2002–2004. Individual stations and/or leadtimes do not have significant trends for either Percentage Satisfactory or average absolute error (not shown).

A contingency table of Yes/No forecasts for conditions above Flood Level is shown in Table 3. Only shown are forecasts where the preceding observation was below the Flood Level; such forecasts are the most important for users because after the flood has started there are fewer options to take protective action. Do note that further information is necessary to translate Flood Level at a specific gauge into local flood impacts directly upstream and downstream of the gauge, given that the height of the embankment varies.

Threshold crossing events (i.e. going from non-flood to flood) are very rare; at 11 of 22 stations there has never been a forecast at any lead-time that indicated that the Flood Level would be crossed. This may be because Flood Levels are based on local vulnerability and many places are highly protected. Therefore, the collection of forecasts were pooled for all locations.

The vast majority (> 99.7%) of forecasts correctly predict the persistence of below-Flood Level conditions. Forecasts with 1 day lead-time have a moderate Probability of Detecting floods (48%) and a very low False Alarm Rate (13%). Forecasts with 5 day lead-time have a lower Probability of Detection (31%) and a high False Alarm Rate (74%). The 1 day forecasts have a higher ETS than 5 day forecasts. Between days 1 and 5 (i.e. days 2–4, not shown), the skill declines nearly linearly with leadtime. Although the sample sizes are very small, forecasts below Phnom Penh are somewhat better at predicting threshold crossing events than are points upstream, presumably due to the dominance of hydraulics over hydrology in the lowest reaches of the main-stream channel.

7 Discussion and conclusions

This study analyzed thirteen years of data from the operational flood forecasts for 22 locations along the Mekong River. The forecasts had very low error particularly in the region downstream of Phnom Penh. When measured by standard skill scores, the forecasts perform exceptionally well, although much of this apparent skill is due to the strong seasonal cycle and the narrow natural variability at certain locations.

When compared to the baseline of a persistence forecast, the operational skill is more modest but still positive even at the longest lead-times suggesting that RFMMC could be reasonably confident in extending its lead-times beyond 5 days. At several locations, persistence with trend outperformed the 1 day-ahead operational forecasts. Given that RFMMC makes extensive use of recent observed flows when generating forecasts, this result may be partly an artefact of the real-time use of provisional data that has since been revised. In other words, persistence with trend using provisional observations (what is available in real-time) might not outperform the operational forecasts.

RFMMC currently creates an overall index of Percentage Satisfactory forecasts using an established set of (deemed) acceptable error levels. This study showed that the current benchmarks make certain locations and lead-times consistently appear to have less acceptable forecasts than others. If the error levels are based on user requirements, the existing benchmarks should be retained, otherwise minor modifications were proposed to the benchmarks to make the results more stable and consistent.

During historical forecast processing, occasional but rare outliers were detected, often resulting from keying errors or model malfunctions. RFMMC should strive to minimize keying errors by programmatically populating forecasts into product templates from a digital database (something that should be easier under new modelling software). Likewise, RFMMC should use automated routines and manual checks to prevent forcing the models with obviously bad data. The forecasts should be visualized in the context of the recent observations and historical climatology to ensure that

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



unreasonable forecasts are not issued. For example, the recent observation can be extended into an envelope of possibilities in the future based on simple autocorrelation of historical river levels at a given location; the operational forecast can go outside this envelope if anomalous conditions are predicted, but the envelope should not be exceeded casually.

The RFMMC has done well to maintain an archive of operational forecasts. Effort should be made to backfill the archive if more past forecasts are recovered. Also, future forecasts should be archived in a consistent machine-readable format to facilitate easy processing. Although not evaluated in this study, RFMMC also preserves raw model output and these should be included in the forecast database. RFMMC should continue to foster a culture of continual forecast evaluation to demonstrate the value of its forecasts to users and to assess the potential benefits of innovations in the forecasting system.

Acknowledgements. Thanks are extended to Seqwater's Terry Malone and Deltares's Alex Minett for their discussions of Mekong forecasting concerns during a site visit to the RFMMC in Phnom Penh during November/December 2012. Thanks are extended to RFMMC operational forecasters and managers for providing the archive of historical forecasts and observations, published reports, and review of this manuscript, particularly Lam Hung Son, Nicolaas Bakker, Hort Khieu, and Pichaid Varoonchotikul. Tanya Smith contributed to the editing of this manuscript.

References

- Corby, R. J., West Gulf River Forecast Center, Lawrence, W. E., and Arkansas-Red Basin River Forecast Center: A Categorical Flood Forecast Verification System for Southern Region RFC River Forecasts, National Weather Service, Southern Region, 17, Tulsa, Oklahoma, 17 pp., 2002.
- Gandin, L. S. and Murphy, A. H.: Equitable skill scores for categorical forecasts, Mon. Weather Rev., 120, 361–370, 1992.

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Hapuarachchi, H. A. P., Takeuchi, K., Zhou, M., Kiem, A. S., Georgievski, M., Magome, J., and Ishidaira, H.: Investigation of the Mekong River basin hydrology for 1980–2000 using the YHyM, *Hydrol. Process.*, 22, 1246–1256, 2008.

Johnston, R. and Kummu, M.: Water resource models in the Mekong Basin: a review, *Water Resour. Manag.*, 26, 429–455, 2012.

Kanning, W., Pich, S., and Pengel, B.: Flood forecasting accuracy for the Mekong River Basin, 6th Annual Mekong Flood Forum Integrated approaches and applicable systems for medium-term flood forecasting and early warning in the Mekong River Basin Phnom Penh, Cambodia, 11 pp., 2008.

Keoduangsiang, S. and Goodwin, R.: An appropriate flood warning system in the context of developing countries, *International Journal of Innovation, Management and Technology*, 3, 213–216, 2012.

Kitanidis, P. K. and Bras, R. L.: Real-time forecasting with a conceptual hydrologic model: 2. Applications and results, *Water Resour. Res.*, 16, 1034–1044, 1980.

Malone, T.: Roadmap mission for the development of a flood forecasting system for the Lower Mekong River, Mekong River Commission Flood Management and Mitigation Programme, Technical Component-Main Report, 72, Phnom Penh, Cambodia, 72 pp., 2006.

Mekong River Commission: Overview of the Hydrology of the Mekong Basin, Mekong River Commission, Vientiane, 73 pp., 2005.

Mekong River Commission: Flood Operations Policy, Regional Flood Management and Mitigation Centre, Phnom Penh, 37 pp., 2013.

Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I – A discussion of principles, *J. Hydrol.*, 10, 282–290, 1970.

Pech, S. and Sunada, K.: Population growth and natural-resources pressures in the Mekong River Basin, *AMBIO*, 37, 219–224, 2008.

Pengel, B., Malone, T., Katry, P., Pich, S., and Hartman, M.: Towards a new flood forecasting system for the lower Mekong river basin, 3rd South-East Asia Water Forum, Malaysia, 1–10, 22–27 October 2007 at Kuala Lumpur, 10 pp., 2007.

Pengel, B., Tospornsampan, J., Malone, T., Hartman, M., and Janssen, A.: The Mekong River Flood Forecasting System at the Regional Flood Management and Mitigation Centre, 6th Annual Mekong Flood Forum Proceedings, 27–28 May 2008 in Phnom Penh, 9 pp., Plenary 2, paper 1, 2008.

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Plate, E. J. and Insisiengmay, T.: Early warning system for the Lower Mekong River, *Water Int.*, 30, 99–107, doi:10.1080/02508060508691841, 2005.

Plate, E. J. and Lindenmaier, F.: Quality Assessment of Forecasts, 6th Annual Flood Forum, Phnom Penh, 27–28 May, 10 pp., 2008.

5 Rockwood, D. M.: Application of Streamflow Synthesis and Reservoir Regulation-SSARR program to the Lower Mekong River, *The Use of Analog and Digital Computers in Hydrology*, IAHS publication 80, 329–344, 1968.

Shahzad, M., Lindenmaier, F., Ihringer, J., Plate, E., and Nestmann, F.: Statistical Flood Forecasting for the Mekong River, *EGU General Assembly Conference Abstracts*, 4333, 1 pp., 10 Vienna, Austria, 19–24 April, 2009.

Smith, G. F.: Development of Performance Indicators for the new Mekong Flood Forecasting System (FEWS-URBS-ISIS) and Mekong Flash Flood Guidance System (MRC FFG), *Regional Flood Management and Mitigation Centre*, Phnom Penh, 91 pp., 2009.

15 Tospornsampan, J., Malone, T., Katry, P., Pengel, B., and An, H. P.: FMMP Component 1 Short And Medium-Term Flood Forecasting At The Regional Flood Management And Mitigation Centre, 7th Annual Mekong Flood Forum, 13 and 14 May 2009, Thailand, Bangkok, 10 pp., 2009.

Welles, E., Sorooshian, S., Carter, G., and Olsen, B.: Hydrologic verification: a call for action and collaboration, *B. Am. Meteorol. Soc.*, 88, 503–511, doi:10.1175/BAMS-88-4-503, 2007.

Table 1. Characteristics of forecast points along the Mekong River. ID is the identifier in the RFMMC forecasting system and number is the identifier of the station in the MRC's Master Catalogue. Zero level is the datum of the river gauge. Anglicised names may vary by source (e.g. Pakse vs. Pakxe or Paksé). Contributing area for locations below Phnom Penh vary seasonally due to the reversal of flows.

ID	Number	Lat. (Deg.)	Long. (Deg.)	Distance upstream (km)	Travel time to Phnom Penh (days)	Upstream area (km ²)	Alarm Level (m)	Flood Level (m)	Zero Level (m)	Name
CSA	010501	20.274	100.089	2364	10	185	11.5	11.8	357.11	Chiang Saen
LUA	011201	19.893	102.134	2010	9	262	17.5	18	267.20	Luang Prabang
CKH	011903	17.900	101.670	1716	8.5	289	17.32	17.4	194.12	Chiang Khan
VIE	011901	17.931	102.616	1584	8	295	11.5	12.5	158.04	Vientiane
NON	012001	17.881	102.732	1548	8	295	11.4	12.2	153.65	Nong Khai
PAK	012703	18.376	103.644	1395	7	332	13.5	14.5	142.13	Paksane
NAK	013101	17.425	104.774	1218	5.5	365	12.6	12.7	130.96	Nakhon Phanom
THA	013102	17.396	104.796	1216	5.5	365	13	13.5	129.63	Thakhek
SAV	013402	16.583	104.733	1125	5	382	12	13	125.02	Savannakhet
MUK	013401	16.544	104.732	1123	5	382	12.5	12.6	124.22	Mukdahan
KHO	013801	15.318	105.500	909	3.3	408	16	16.2	89.03	Khong Chiam
PKS	013901	15.100	105.813	869	3	541	11	12	86.49	Pakse
STR	014501	13.533	105.950	684	2	631	10.7	12	36.79	Stung Treng
KRA	014901	12.481	106.018	561	1	647	22	23	-1.08	Kratie
KOM	019802	11.995	105.469	439	0.5	653	15.2	16.2	-0.93	Kompong Cham
PRE	020102	11.811	104.807	364			9.5	10	0.08	Prek Kdam (Tonle Sap)
PPP	020101	11.610	104.920	332	0	663	9.5	11	0.00	Phnom Penh Port
PPB	033401	11.563	104.935	332			10.5	12	-1.02	Phnom Penh (Bassac)
KOH	033402	11.268	105.028	273			7.4	7.9	0.00	Koh Khel (Bassac)
NEA	019806	11.250	105.283	268			7.5	8	-0.33	Neak Luong
TCH	019803	10.801	105.248	209			3.5	4.5	0.00	Tan Chau
CDO	039801	10.705	105.134	203			3	4	0.00	Chau Doc (Bassac)

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[⏴](#)[⏵](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

Table 2. Performance benchmarks currently used operationally (left, from Smith, 2009) and proposed by this study (right). The table is ordered from upstream to downstream. Greater numbers indicate that higher levels of error are considered acceptable at these locations and lead-times.

ID	Satisfactory forecast accuracy benchmarks (centimeters)										Name
	Operational					Pagano					
	1 Day	2 Day	3 Day	4 Day	5 Day	1 Day	2 Day	3 Day	4 Day	5 Day	
CSA	25	50	50	75	75	15	30	45	60	70	Chiang Saen
LUA	25	50	50	75	75	20	35	60	80	110	Luang Prabang
CKH	25	50	50	50	50	15	25	40	55	75	Chiang Khan
VIE	10	25	25	50	50	15	20	35	50	70	Vientiane
NON	10	25	25	50	50	10	20	35	50	65	Nong Khai
PAK	10	25	25	50	50	15	25	40	55	70	Paksane
NAK	10	25	25	50	50	15	25	40	55	70	Nakhon Phanom
THA	10	25	25	50	50	15	25	40	55	70	Thakhek
SAV	10	25	25	50	50	15	25	40	55	70	Savannakhet
MUK	10	25	25	50	50	10	20	40	55	70	Mukdahan
KHO	10	25	25	50	50	15	25	40	55	70	Khong Chiam
PKS	10	25	25	50	50	15	20	35	50	70	Pakse
STR	10	25	25	50	50	10	20	30	40	50	Stung Treng
KRA	10	25	25	50	50	15	20	35	50	70	Kratie
KOM	10	25	25	50	50	9	10	20	30	40	Kompong Cham
PRE	10	10	10	25	25	4	6	9	15	15	(Tonle Sap) Prek Kdam
PPP	10	10	10	25	25	5	7	10	15	20	Phnom Penh Port
PPB	10	10	10	10	25	5	7	10	15	20	(Bassac) Phnom Penh
KOH	10	10	10	10	25	3	4	6	10	15	(Bassac) Koh Khel
NEA	10	10	10	25	25	4	6	9	15	15	Neak Luong
TCH	10	10	10	10	25	3	5	8	10	15	Tan Chau
CDO	10	10	10	10	25	3	6	9	15	15	(Bassac) Chau Doc

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

Table 3. Contingency table of the forecast vs. observed occurrence of river levels above Flood Level (defined in Table 1). All locations and years are pooled together due to the rarity of floods. The top table is for one day ahead forecasts and the bottom is for five day ahead forecasts. Forecasts are only included if observed river level was below Flood Level at the time of forecast issuance.

1 Day-ahead forecast:	Event: Flood	No flood	False alarm rate 13.3 %
Flood	26	4	
No flood	28	34 087	
Probability of Detection	48.1 %		44.8 % Equitable threat score
5 Day-ahead forecast:	Event: Flood	No flood	False alarm rate 73.5 %
Flood	31	86	
No flood	69	31 547	
Probability of detection	31.0 %		16.5 % Equitable threat score

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

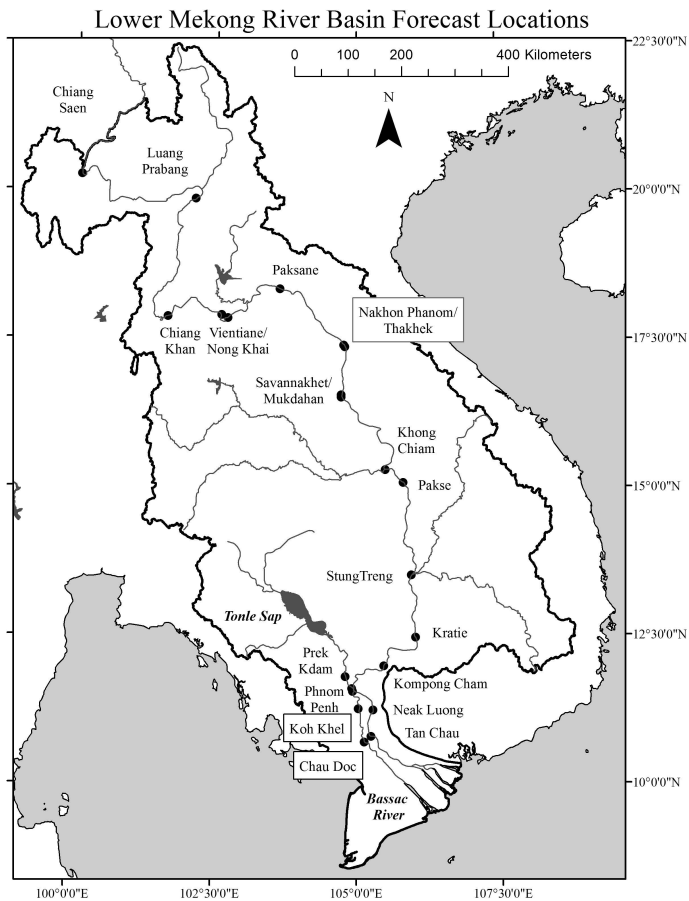


Fig. 1. Map of forecast locations (black circles). The river channel, significant water bodies and basin boundary are shown in grey outline.

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[⏪](#) [⏩](#)

[⏴](#) [⏵](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

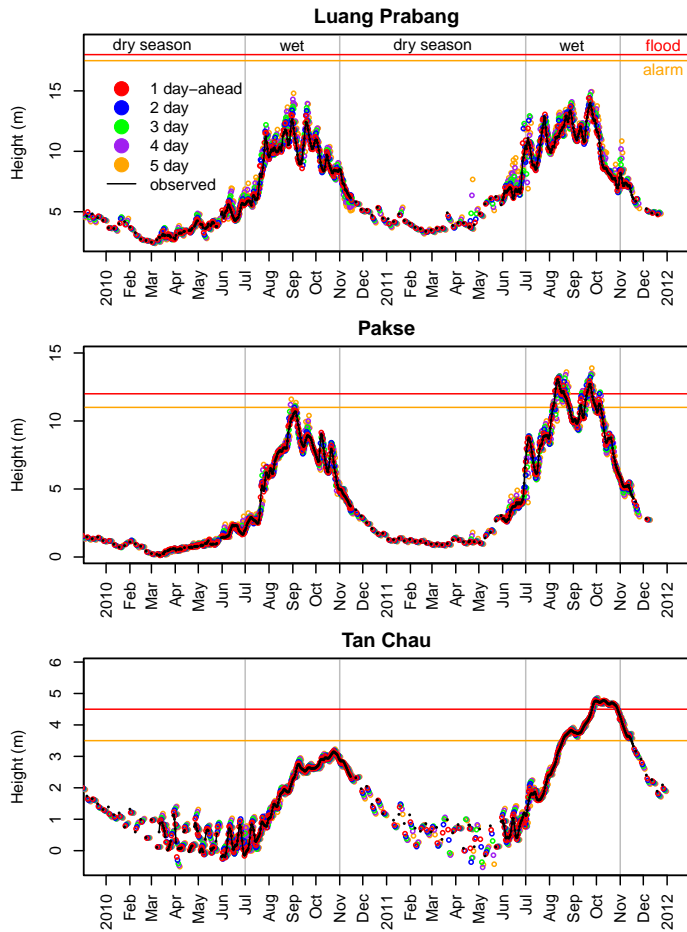


Fig. 2. Time series of river height observations (black lines) and forecasts (colored dots) for Luang Prabang (top), Pakse (middle) and Tan Chau (bottom) for 2010–2011. Flood Levels and Alarm Levels are horizontal lines and vertical lines divide the wet and dry seasons.

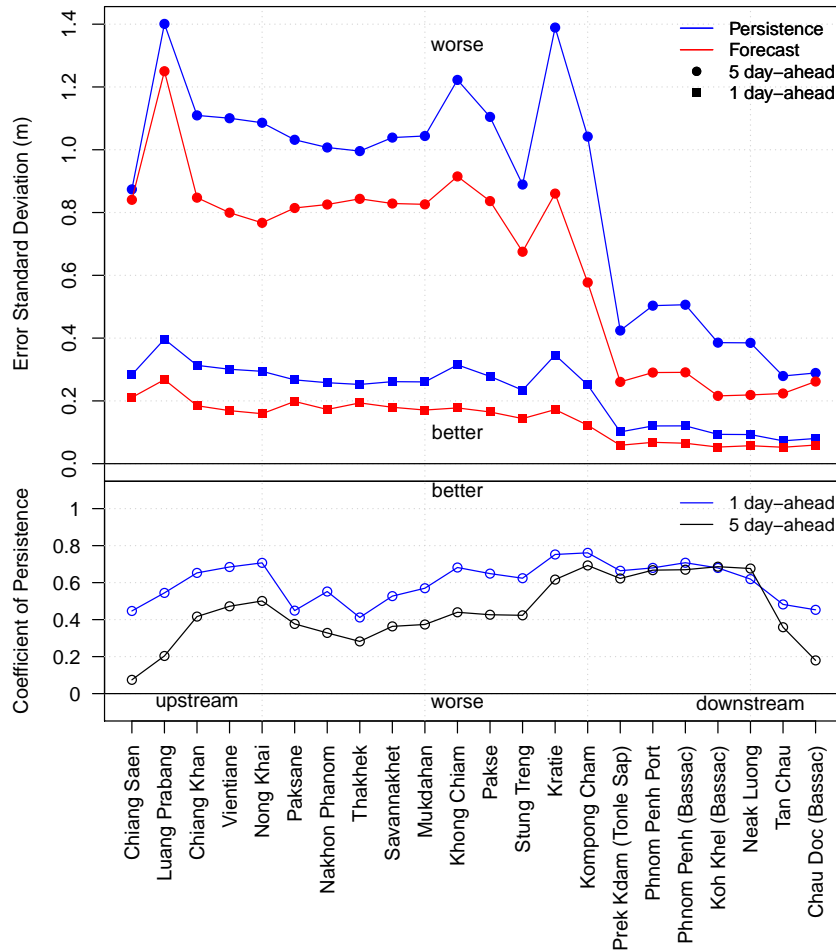


Fig. 3. Error standard deviation (top) and Coefficient of Persistence (bottom) for locations upstream (left) to downstream (right) for wet-season forecasts from 2000–2012.

[Title Page](#)

[Abstract](#) | [Introduction](#)

[Conclusions](#) | [References](#)

[Tables](#) | [Figures](#)

[⏪](#) | [⏩](#)

[◀](#) | [▶](#)

[Back](#) | [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

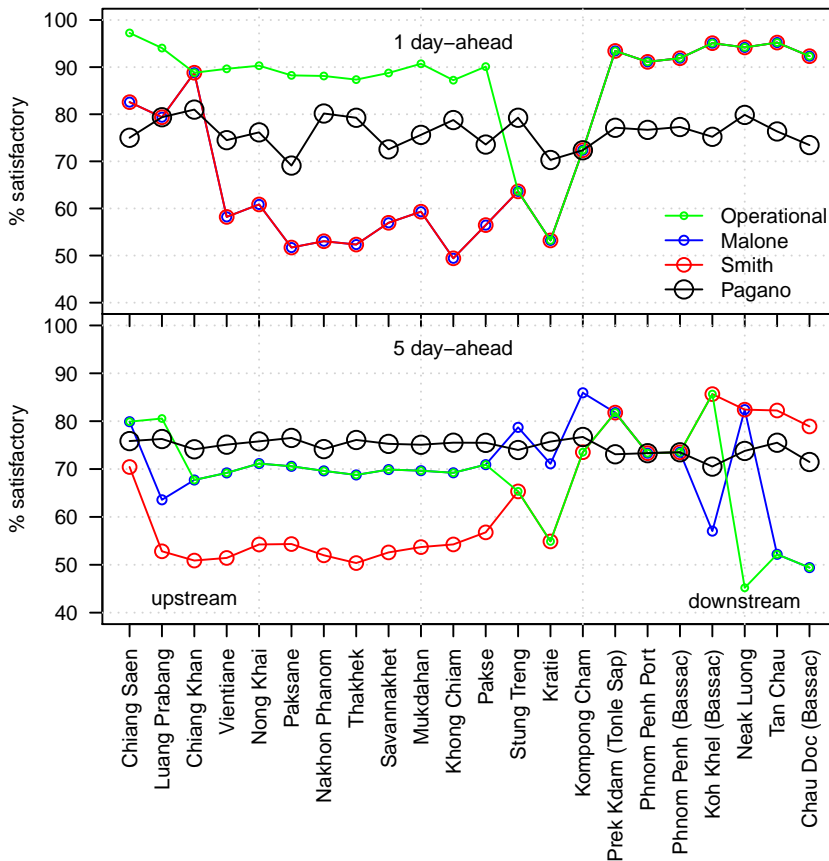


Fig. 4. Percentage satisfactory for 1 (top) and 5 (bottom) day-ahead wet-season forecasts by location. Forecasts are evaluated using four different benchmarks (colored lines). The benchmark proposed by this study (black line with large circles) is defined to give a 70% satisfactory rate over the long-term; deviations from 70% are due to the rounding of the benchmark thresholds.

HESSD

10, 14433–14461, 2013

Evaluation of Mekong River Commission operational flood forecasts, 2000–2012

T. C. Pagano

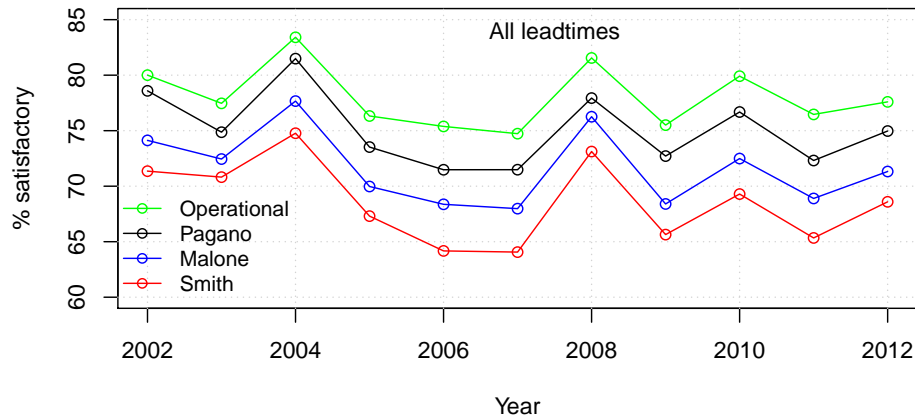


Fig. 5. Percentage satisfactory for all lead-times and locations for each year (x-axis) using four different benchmarks.

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

