

Intensively exploited Mediterranean aquifers: resilience and proximity to critical points of seawater intrusion

Katerina Mazi^{1,2,3}, Antonis D. Koussis^{2,3} and Georgia Destouni^{1,3}

1. Department of Natural Geography & Quaternary Geology
Bert Bolin Centre for Climate Research
Stockholm University
SE-106 91 Stockholm, Sweden

2. Institute for Environmental Research and Sustainable Development
National Observatory of Athens
I. Metaxa & Vas. Pavlou Str.
GR-152 36 Palea Penteli, Athens, Greece

3. Navarino Environmental Observatory (NEO)
Navarino Dunes, Costa Navarino
GR-240 01, Messinia, Greece

Correspondence e-mail: kmazi@noa.gr

Abstract

We investigate ~~here~~ seawater intrusion in three prominent Mediterranean aquifers that are subject to intensive exploitation and modified hydrologic regimes by human activities: the Nile Delta ~~Aquifer~~, the Israel Coastal ~~Aquifer~~ and the Cyprus Akrotiri Aquifer. Using a generalized analytical sharp-interface model, we review the salinization history and current status of these aquifers, and quantify their resilience/vulnerability to current and future sea intrusion forcings. We identify two different critical limits of ~~sea~~ intrusion under groundwater exploitation and/or climatic stress: a limit of *well intrusion*, at which intruded seawater reaches key locations of groundwater pumping, and a *tipping point of complete sea intrusion* upto the prevailing groundwater divide of a coastal aquifer. Either limit can be reached, and ultimately crossed, under intensive aquifer exploitation and/or climate-driven change. We show that sea intrusion vulnerability for different aquifer cases can be directly compared in terms of normalized intrusion *performance curves*. The site-specific assessments show that the **advance of seawater** currently seriously threatens the Nile Delta Aquifer and the Israel Coastal Aquifer. The Cyprus Akrotiri Aquifer is currently somewhat less threatened by increased seawater intrusion.

Keywords: coastal aquifer, seawater intrusion, submarine groundwater discharge, sharp interface, tipping points, resilience, Mediterranean

1. Introduction

The generally slow rate of water movement and storage are innate advantages of groundwater resources in terms of resilience to climate variations and relative to surface water resources. Groundwater is often of potable quality, and thus does not require expensive treatment, permitting scaled development upon demand and use of infrastructure that is normally of lower cost than that of surface water supplies (Taylor et al., 2009). However, aquifers in general and especially coastal aquifers are often exploited so intensively that their natural hydrological regime is strongly disturbed and may be thrown out of balance (Custodio, 2010). In particular, sea intrusion changes are highly nonlinear and exhibit important thresholds, or tipping points, beyond which full seawater intrusion into a coastal aquifer may occur in response to even small sea level and/or groundwater management changes (Mazi et al., 2013). The possibility of such acceleration into full sea intrusion is a major concern for the resilience and sustainability of coastal populations that depend on groundwater for their water supply.

Several aquifers along the densely populated Mediterranean coasts are already suffering sea intrusion. Acceleration of this phenomenon could also be particularly large here, because the Mediterranean region, and especially its semi-arid areas, is likely to be seriously affected by a decline in water resources (Kundzewicz and Döll, 2009). Human vulnerability to decrease of renewable groundwater resources induced by climate change, as projected by climate models up to 2055, is expected to be higher for the North African rim of the Mediterranean Sea (Döll, 2009).

In this paper, we study three coastal aquifers in the Southeastern Mediterranean region that are already suffering seawater intrusion, with the aim to determine how close these aquifers are to reaching critical seawater intrusion extents in relation to different possible groundwater pumping locations (Koussis et al., 2010a,b) and/or to tipping points for complete seawater intrusion in the aquifer (Mazi et al., 2013). The studied aquifers are (Fig. 1): 1) that underlying the Nile Delta (the Nile Delta Aquifer, referred to as NDA), which is of profound importance to Egypt, 2) the Israel Coastal Aquifer (ICA), which is considered to be the most important freshwater source in Israel, and 3) the Cyprus Akrotiri Aquifer (CAA), which is a major source of potable and irrigation water in Cyprus. These aquifers have been subject to extensive exploitation and modified hydrologic regime by human activities and constructions (e.g., dams), and are located in a sensitive region of the world, both in climatic and political respect.

We here review the salinization history and current status of these aquifers, and quantify their resilience/vulnerability to current and future exploitation schemes and/or hydroclimatically changed recharge conditions, in view of their respective tipping points and other critical extents of seawater intrusion.

2. Materials and Methods

2.1 Site descriptions

In this section we summarize the physical characteristics of the three regional coastal aquifers (Fig. 1) and present the manner of their exploitation and the resulting current and possible future development conditions.

2.1.1. *The Nile Delta Aquifer (NDA)*

The Nile Delta area (22000 km²) is among the largest deltas in the world. This area is important as the outflow area of one of the largest rivers of the world, and because it concentrates 45% of the total population, 45% of the arable land, 50% of the industrial production, 40% of the agricultural production and 60% of the fish catch in Egypt (Mikhailova, 2001).

The Nile Delta has its apex near Cairo, approximately 200 km from the Mediterranean Sea, and its base at the Mediterranean coastline extending from Alexandria to Port Said, a distance of about 240 km (Fig. 2a). The area of the Nile Delta is bounded to the east by the Ismailiya and the Suez Canals, to the west by the El Nubariya Canal, and to the north by the Mediterranean Sea. The Damietta branch of the Nile, flowing to the NE, and the Rosetta branch, flowing to the NW, divide the NDA in a middle, an eastern, and a western part.

The average annual rainfall in the Nile Delta ranges from 180 mm at the coast to ca. 26 mm in the Cairo area, occurring mostly in the winter (Sherif and Singh, 1999). The alluvial NDA underlies the Delta plain and accounts for freshwater resources exceeding 400 km³ (Mikhailova, 2001). The aquifer is recharged by infiltration from a network of irrigation conduits, from excess irrigation water and limited precipitation, and by flows from the Nile Valley aquifer. The main aquifer consists of unconsolidated coarse sands and gravels (with occasional clay lenses), having an estimated porosity varying between 25% and 40% and thinning towards the east and west sides of the Delta. The near-surface deposits change in the seaward direction into impervious clays and silt. The aquifer is mostly unconfined, but it is considered leaky and partially semi-confined close to the sea. The aquifer base is a clay aquiclude that is inclined towards the north with a slope of 0.3-0.4%. The depth of the aquifer at the Mediterranean coast can reach 1000 m, but near Cairo it is only about 200 m (Sherif, 1999).

Groundwater flows in a radial pattern from the apex of the Delta to the sea and its quality deteriorates towards the north mainly as a result of seawater intrusion due to over-pumping, but also due to leakage of domestic wastewater (septic tanks), discharges of untreated industrial wastewater (from industries located in the greater Cairo area) and fertilizers used in agriculture. The piezometric head field in the aquifer fluctuates mildly (± 1 m) (Kashef, 1983) in an annual cycle. A total volume of about 2.4 km³ (Mikhailova, 2001) is extracted annually from the aquifer for all uses.

But an accurate balance for the Nile Delta cannot be calculated due to unreliable or missing data (Mikhailova, 2001), and only a few components can be estimated with some certainty. Sherif et al. (2012) report that, today, seawater intrusion has reached 100 km from the coast.

2.1.2. The Israel Coastal Aquifer (ICA)

The ICA (Fig. 2b) is considered the most important freshwater source among Israel's major water reservoirs; the next two are the Lake of Galilee and the Mountain aquifer. The ICA covers an area of 1900 km², with a length of 126 km and an average width of 15 km (Assouline and Shavit 2004). It is a seaward sloping aquifer of inclination 0.01 (1% slope) (Yechieli et al., 2010) and its maximum thickness at the coast reaches 200 m, thinning to a few meters towards the eastern (land) boundary.

The aquifer belongs to the Kurkar Group, consisting of inter-layered sandstone, calcareous sandstone, siltstone and red loam, alternating with continental and marine clays that overlie impervious marine clays of the Sakiye Group of Pliostocene age (Yechieli et al., 2010). East of the shoreline, to a distance of 5–8 km, clay inter-layers subdivide the aquifer into four sub-aquifers. Certain of the lower sub-aquifers are confined while the upper ones are phreatic (Yechieli et al., 2010). The general flow direction in the aquifer is from the east towards the Mediterranean Sea to the west. The average annual precipitation ranges from 550 mm/yr in the north, to 300 mm/yr in the south, while the infiltrated natural recharge is about one third to one half of the precipitation (Aberbach and Sellinger, 1967).

The chlorinity of groundwater in the aquifer did not exceed 100 mg/L Cl⁻ during the 1930's (Kass et al., 2005). Since then, however, the aquifer has been under extensive exploitation, and during the 1960's groundwater withdrawal was up to 400×10⁶ m³/yr (or twice the natural recharge of the aquifer); in 1962, about 480×10⁶ m³/yr of groundwater were extracted from the aquifer (Aberbach and Sellinger, 1967). In some locations, over-exploitation of groundwater has caused the water level to drop by 15–20 m and seawater to intrude 2.5 km from the coast (Aberbach and Sellinger, 1967). Assouline and Shavit (2004) report monitoring data for groundwater quality that indicate a steadily increasing mean salinity; at 2004, groundwater salinity was around 200 ppm Cl⁻ and according to some predictions may reach 300 ppm Cl⁻ by 2020.

Permissible groundwater withdrawal from the aquifer was proposed to be 200×10⁶ m³/yr (Aberbach and Sellinger, 1967), but Melloul and Zeitoun (1999, p.547) reported that in 1997 the Israel Hydrological Service recommended 280×10⁶ m³/yr. After 1990, withdrawals of 275 – 300×10⁶ m³/yr (Assouline and Shavit, 2004) and up to 350 – 400×10⁶ m³/yr (Melloul and Zeitoun, 1999) have been reported. Today's average pumping is about 240×10⁶ m³/yr (derived from data reported by Yechieli et al. (2010)).

To enhance the water balance of the aquifer Israel practices artificial recharge, mostly in the winter, through wells and spreading grounds, with water conveyed

annually by the National Water Carrier (NWC) from the Lake of Galilee (earlier also floodwater). Water brought by the NWC in 1973 was reported to be $80 \times 10^6 \text{ m}^3/\text{yr}$ (Sellinger and Aberbach, 1973), corresponding to 40 mm/yr on average over the whole aquifer area; other reports estimate this contribution to be 100 – $150 \times 10^6 \text{ m}^3/\text{yr}$ (Melloul and Zeitoun, 1999), corresponding to 50-80 mm/yr. Furthermore, $300 \times 10^6 \text{ m}^3/\text{yr}$ of water is conveyed annually by the NWC for desalination and injection in ICA. After the 1990's, $35 \times 10^6 \text{ m}^3/\text{yr}$ are artificially recharged (Assouline and Shavit, 2004) while natural recharge is calculated to be 275 – $300 \times 10^6 \text{ m}^3/\text{yr}$ (Sellinger and Aberbach, 1973), or 200 mm/yr (Yechieli *et al.*, 2010).

2.1.3. The Cyprus Akrotiri Aquifer (CAA)

The CAA (Fig. 2c) extends over 40 km^2 in the southern edge of the Akrotiri basin (78 km^2), which forms the southernmost peninsula of Cyprus. The Akrotiri basin has a smooth and hilly relief, with average altitude over 200 m aMSL in the northern part of the basin. The Salt Lake, located in the middle of the peninsula, is a topographic low, with mean water level below sea level, receiving drainage from the Akrotiri basin (Mazi, 2000).

The Akrotiri basin and aquifer geology, hydrological budget, and water management scenarios and conditions have been studied extensively by Mazi (2000), Koussis (2001), Mazi *et al.* (2004a, b), and Koussis *et al.* (2010 b, 2012). The alluvial aquifer consists of river deposits, gravels with layers of marls, and sands with boulders interbedded with lenses of silts and clays. The impermeable base of the aquifer (alternating marls, chalks, chalky marls and marly chalks) slopes towards the south at about 1.7 % and the saturated aquifer thickness ranges from 10 m (water table at 50 m above MSL) at its northern edge to more than 100 m near the Salt Lake in the south. The mean annual precipitation (1968 – 2000) over the basin ranges from over 500 mm at its northern end to 420 mm near the Salt Lake.

Originally, the CAA was replenished by rainfall, leakage from Kouris River in the adjacent basin, inflows from its northern boundary and return irrigation flows. The closure and operation of Kouris Dam in 1988 has caused a 66%-decrease in the replenishment of the aquifer by Kouris flows (Balasha and Phedonos, 1992). In response to declining groundwater levels and attendant seawater intrusion in the aquifer, the Water Development Department of the Republic of Cyprus initiated artificial recharge. Artificial recharge was applied to spreading grounds and ponds in the main aquifer area, when water from external sources was available. Nowadays, the CAA is replenished by various supplementary sources: (a) releases from the Kouris Dam, (b) Kouris reservoir losses, and (c) artificial recharge (effluents from Limassol's wastewater treatment plant and water from the Garyllis and Yermasogia reservoirs, located outside the Akrotiri basin). Almost no artificial recharge took place during the drought years of 1998 and 1999, however, and groundwater pumping was then also reduced. Mean annual groundwater extraction from the CAA was $14.5 \times 10^6 \text{ m}^3/\text{yr}$ during 1967-1977 (Jakovides *et al.*, 1982), but fell to only $10 \times 10^6 \text{ m}^3/\text{yr}$ in 2000 (Mazi *et al.*, 2004).

Our study focuses on the area of Zakaki, west of Limassol (the second largest city of Cyprus). During past dry years, groundwater from this eastern part of the CAA was used as additional potable water source, with groundwater salinity at 500 m from the coast reaching several thousand ppm of total dissolved solids (TDS) in the early 1990's. As a consequence, after 1997, groundwater withdrawals were reduced by 25%, to counteract deterioration of groundwater quality, with salinity then stabilizing at 1000 ppm TDS in boreholes at about 1000 m from the coast.

2.1.4. Aquifer similarities and differences

The aquifers studied here are all important freshwater sources for the local populations and for the sustainability and prosperity of their economies. The natural regimes of the aquifers, replenishment from rainfall, and inflows from neighbouring freshwater sources, have all been altered by human activities during the last 50 years, in the NDA through the Assuan Dams, in the CAA through the Kouris Dam, and in the ICA and CAA also through artificial recharge. All three are further unconfined sloping aquifers, from which large quantities of fresh groundwater are extracted annually. In the NDA, groundwater pumping is dispersed over the area of the whole Delta; for the ICA and the CAA, more concentrated pumping zones can be identified.

Among the three aquifers, the NDA area is the largest (22000 km²), its depth exposure to the sea is greatest (1000 m), the inclination of its base is lowest (0.3-0.4%) and it is much more permeable (mean hydraulic conductivity $K = 100$ m/d) than the other two. The intruding seawater front has here advanced many tens of kilometers inland from the coast in the last 50 years, and this movement has accelerated in the last 20 years, reaching today a distance of ~100 km from the coast. Another important difference from the other two aquifers is further the absence of a serious attempt to manage the NDA, which is in contrast to the importance of this aquifer for the regional water supply; the lack of management is also manifested in the absence of credible data for calculation of an overall water balance for NDA.

For direct aquifer comparison, the ICA area is about 1900 km², its depth exposure to the sea is about 200 m, the inclination of its base is 1% and its mean hydraulic conductivity $K = 30$ m/d. The aquifer is recharged by precipitation and artificial recharge applied through wells and spreading grounds. No boundary inflows replenish the aquifer. An extensive monitoring network is in place and measurements indicate that the seawater front reaches today to 2.5 km from the coast. Several studies have been performed to estimate the permissible withdrawal from the ICA.

The CAA is further relatively small (40 km²), its exposure to the sea is 50 m, the inclination of its base is 1.7% and its mean hydraulic conductivity is $K = 28$ m/d. The aquifer is recharged by precipitation and by freshwater inflows from its northern boundary, and also by artificial recharge. In CAA there is an established network for monitoring the groundwater level and quality.

2. Methodology

2.1 Modeling approach

This study focuses on a first-order vulnerability assessment of seawater intrusion in the three studied aquifers. These aquifers have also been studied previously by several scientists using variable-density models such as 2D-FED: NDA Sherif & Singh (1999), FEFLOW: NDA Sherif et al. (2012), ICA Yechieli et al. (2010), SUTRA: CAA (Prieto, 2005; Prieto et al., 2006). However, the present study is the first that addresses their vulnerability in direct relation to the high non-linearity of the seawater intrusion process with **associated tipping points** for complete aquifer intrusion (Mazi et al., 2013), in conjunction with consideration of critical seawater intrusion to different possible groundwater pumping locations (Koussis et al., 2010a,b), and comparatively so across the different aquifers.

Present-day personal computers are capable of solving the coupled nonlinear equations governing variable-density flow and transport. Indeed, this is often done for specific studies at particular sites, like those of the present aquifer cases. However, the high computational demands of detailed simulations are an obstacle, and the usefulness of such simulations has also been questioned on the grounds that their results often lack reliability due to the common paucity of data for adequately characterising the detailed hydrogeology (hydraulic parameters) and concentration field (Sanford and Pope, 2010). In addition, the boundary conditions and hydrologic forcing (recharge and pumping) are often not known over time sufficiently. Thus, in the absence of credible data, the benefits of using detailed and complex numerical variable-density models are undermined by the guesswork (or non-unique fitting) and simplifications needed for the estimation of multiple aquifer parameters and their variability in space and time.

In comparison, analytical solutions of steady-state sharp-interface flow of one-flowing fluid are evaluated with efficiency and are suitable tools for **first-order**, regional-scale assessments of coastal aquifer vulnerability to seawater intrusion. They are also useful for screening the impact of various groundwater pumping alternatives in management scenarios (Koussis et al., 2012; Mantoglou, 2003). After developing a sound conceptual model, properly schematising aquifer geometry, and carefully estimating dominant hydraulic parameters and forcing quantities, analytical solutions can be used for systematic analyses, elucidating the way in which various physical and management parameters impact the seawater intrusion behaviour of coastal aquifers, and determining likely intrusion responses to various forcing conditions (Werner and Simmons, 2009; Ferguson and Gleason, 2012; Mazi et al., 2013).

From this perspective, we use here the generalized analytical model of Koussis *et al.* (2012) (see Appendix A for the mathematical details) for steady interface flow in sloping phreatic aquifers, taking also into account a recent correction that alleviates the **hydrodynamic defect** of Dupuit-type sharp-interface solutions in phreatic coastal aquifers related to ignoring the finite outflow gap (rather than idealized singular

point on an sharp-interface cross-section) through which submarine groundwater discharge occurs (Koussis *et al.*, submitted). The solution of Koussis *et al.* (2012) accounts for the generally present and usually hydraulically significant aquifer slope that has previously been ignored in analytical sharp-interface solutions of seawater intrusion (e.g., Strack, 1976). This discharge-potential model approximates the gravity-driven flow component and represents the aquifer geometry in a schematised yet realistic manner. To compare our results to those obtained with variable-density models, we assigned to the sharp interface the 50%-salinity line (17500 ppm) of the transition zone, as suggested by Reilly and Goodman (1987) and adopted generally. With the use of this generalised model and approach, Koussis *et al.* (2012) have previously identified important criteria useful in the management of an aquifer, and Mazi *et al.* (2013) have shown the high non-linearity of seawater intrusion and associated tipping points that should not be crossed in order to avoid rapid loss of control and complete sea intrusion in an aquifer.

The model considers an inclined ($\sin\phi$) unconfined homogeneous aquifer with depth H_{sea} at the coast, and with length L and hydraulic conductivity K . The aquifer is further recharged uniformly at the rate r , in addition to receiving an inflow, q_b (for prescribed-flux boundary condition, FB), or having a constant-head boundary, h_L , that determines inflow through its land boundary (for prescribed-head boundary condition, HB). Furthermore, in the case of inland FB condition, the model solution can account for groundwater pumping in a collector trough (line sink, or well gallery) at a distinct distance ℓ_w from the coastline, that penetrates the aquifer completely and draws groundwater at the rate q_w . In the case of inland HB condition, dispersed groundwater pumping can be accounted for by reducing the recharge rate r with the pumped groundwater amount. Both types of boundary condition and their respective solutions enable calculation of the location of the sea intrusion interface toe, ℓ_T , and the important (Destouni *et al.*, 2008) but typically uncertain (Prieto and Destouni, 2011) submarine discharge, q_{SD} . See further Figure A1 in Appendix A for more details on all key parameters, boundary conditions and solutions discussed here.

2.2 Analysis approach

For the present analysis of aquifer cases with inland FB condition, and with a distinct groundwater pumping location, ℓ_w , and pumping rate q_w , we introduce the term $q_{\text{norm}} = -(q_o + q_w)/(KL)$, which is the normalised remaining groundwater flow from up-gradient of ℓ_w after the pumping of q_w , where $q_o = -r(L - \ell_w) + q_b$ is the total groundwater flow from up-gradient of the pumping location ℓ_w (and with q_b , q_o and all other groundwater flow terms defined as negative in the seaward direction). In order to make calculation results for different such case studies directly comparable with each other, they are in the following section shown and discussed in terms of the normalised position of the sharp interface toe, ℓ_T/L , as function of q_{norm} . For the analysis of aquifer cases with inland HB condition, and dispersed groundwater pumping, resulting ℓ_T/L is instead shown as function of the consistently normalised submarine discharge $q_{SD}/(KL)$, with $q_{SD} = q_b - rL + q_w = q_b - r_nL$, where $r_n = (r + q_w/L)$ is

apparent net aquifer recharge after dispersed pumping of groundwater at rate q_w . The resulting curves of ℓ_T/L versus $q_{SD}/(KL)$ or q_{norm} are then referred to as the *performance curves* of seawater intrusion (Koussis *et al.*, 2012).

For each case study, we have further for the analysis selected typical cross-sections that are parallel to the groundwater flow in the different aquifers. For the NDA, where the flow is radial, we have selected two such cross-sections, one along the Middle Nile Delta Aquifer (mNDA), in the north-south direction, and one in the East Nile Delta Aquifer (eNDA), following a north-east direction (Fig. 2a). For ICA, the cross-section has an east-west orientation (Fig. 2b), while in CAA the orientation is northwest to southeast (Fig. 2c). Parameters used in the cross-section modeling of each case study are summarized in Table 1, and the cross-section conceptualizations are shown in Figure 3 (a-b for NDA, c for ICA, d for CAA).

For the NDA, the lengths of the two cross-sections are as follows: the mNDA section has a length of 175 km and the eNDA section has a length of 180 km (Figs. 3a,b). Using the surface of the Mediterranean Sea as datum, the piezometric head at the inland boundary is at 14 m for both sections. The hydraulic conductivities of the two sections were found by interpolating the curves in Figs. 7a,b of Sherif *et al.* (2012); for the mNDA profile-section $K = 100$ m/d, and for the eNDA section $K = 120$ m/d. The slope of the aquifer base and the aquifer depth at the coast were determined for the mNDA profile-section as 0.3% and 740 m, respectively, and for the eNDA profile-section as 0.4% and 910 m, respectively (Figs. 3a,b).

In their recent paper, Sherif *et al.* (2012) performed simulations with FEFLOW for five horizontal layers (areal sections) of the NDA, reaching to the depth of 400 m; without explicitly reporting the aquifer recharge, they report the seawater intrusion to exceed 100 km (1000 ppm) from the coast. As no information is openly available for the NDA recharge, and in order to use the latest published data on the Nile Delta sea-intrusion, we have used the present analytical model to calculate the likely current location of the interface toe, ℓ_T , by calibrating the net aquifer recharge, r_n , in the definition of submarine groundwater discharge q_{SD} . Through this calibration, the sharp interface toe for the mNDA was positioned at $\ell_T = 100$ km, according to the intersection of the constant slope aquifer base with the 50%-salinity line of profile 1 in Fig. 10 of Sherif *et al.* (2012) (the 50%-salinity line was interpolated from the 1000 ppm and 35000 ppm lines in the salinity transition zone). The thus calibrated net recharge value r_n was found to be about 10 mm/yr, incorporating the aquifer recharge from all possible (natural and artificial) sources minus the known magnitude of groundwater extractions from the mNDA. Because the extraction locations are dispersed in the NDA, there is no single representative pumping location, ℓ_w , that we could use in the modeling and the illustration of resulting intrusion performance curves for this aquifer case; performance curves for the NDA sections are therefore shown in terms of ℓ_T/L as function of $q_{SD}/(KL)$. Table 1 further summarizes the modeling parameters for the NDA sections, with r_n for the eNDA being assumed approximately equal to that calibrated for the mNDA based on results reported by Sherif *et al.* (2012).

For the dispersed present pumping in the NDA cross-sections, we calculated then first the interface toe position ℓ_T for various exploitation conditions of the aquifer (at various times in the past), assuming that the head at the inland boundary remained unaltered (at today's levels) at 14 m. We further also performed a sensitivity analysis of the combined effects of calculated net recharge changes from former to current pumping rates, in conjunction with possible groundwater head changes at the inland boundary. The latter could be brought about by changing management conditions in the Nile River Valley aquifer, or, more generally, by a change in the apportionment of the Nile waters among neighbouring countries, and/or by climate change.

For the ICA, our cross-section conceptualization is based approximately on the work of Yechieli et al. (2010), but considers a 20-km long cross-section ending in a perfect cliff, with an aquifer depth at the coastline of 200 m, slope of the impermeable aquifer base of 1%, hydraulic conductivity $K = 30$ m/d and no boundary inflows (Fig. 3c). The total aquifer recharge considered here is 240 mm/yr, with 200 mm/yr derived from natural recharge and 40 mm/yr from artificial recharge. We further consider a pumping rate of 285×10^6 m³/yr (3000 m³/m/yr) through a fully penetrating trough at 3000 m from the coast. Our analytical modeling applied to current conditions yields then the sharp-interface toe position at 2.6 km, in agreement with the intrusion stated by Aberbach and Sellinger (1967). The complete set of the parameters used for the ICA modeling is further summarized in Table 1.

For the CAA, the one-layer cross-sectional conceptualization is shown in Fig. 3d. The length of the aquifer is $L = 3000$ m, its hydraulic conductivity $K = 28$ m/day, the slope of the aquifer base is $\sin\phi = 0.017$, and the depth of the sea to the aquifer base at the coastline is $H_{sea} = 50$ m; a representative pumped collector trough is located at $\ell_w = 1000$ m. Conditions are typical of the eastern area of the unconfined aquifer in the Akrotiri peninsula, the Zakaki area bordering the city of Lemessos. The natural recharge, r , and the inflows through the aquifer's landside boundary, q_b , were estimated by Mazi et al. (2004) from the hydrological balance of the Akrotiri basin for the period 1972–1992 at the following mean values: $r = 92$ mm/yr and $q_b = -549$ m²/yr (m³ per metre width). For the same period, Koussis et al. (2012) translated the annual groundwater withdrawals in the Zakaki area of 2×10^6 m³ to the 2D-equivalent pumping rate at a representative well gallery of $q_w = 500$ m³/m/yr for use in the profile model of the aquifer. The full parameter set used in the CAA modeling is further summarized in Table 1.

For both the ICA and CAA cross-sections, with their more well-defined average present pumping locations, ℓ_w , we have calculated and illustrate in the following their respective intrusion performance curves in terms of ℓ_T/L as function of $q_{norm} = -(q_o + q_w)/(KL)$, i.e., the normalised remaining groundwater flow from up-gradient of ℓ_w after the pumping of q_w . We further analyzed the effects of different possible pumping locations on the intrusion performance curves.

3. Results

3.1 Model result interpretation of critical intrusion points

In the ICA and CAA cases with inland FB condition (prescribed boundary inflow q_b) and distinct pumping location ℓ_w , the associated analytical solution allows for evaluating whether a hydraulic divide (with maximum hydraulic head) is formed at a location ℓ_{div} down-gradient of ℓ_w . The ratio ℓ_T/ℓ_{div} , which expresses the relation between the interface toe location and the divide location, depends then on and is inversely proportional to the submarine discharge, $q_{SD} = q_b - rL + q_w$. As pumping increases, q_{SD} decreases and ℓ_{div} moves seawards, i.e., decreases. If a hydraulic divide is formed down-gradient of ℓ_w , i.e., if $\ell_{div}/\ell_w \leq 1$, then the pumping will draw groundwater also from the down-gradient region ($\ell_w - \ell_{div}$) between the coast and ℓ_w . A critical tipping point of intruding seawater that is just on the verge of invading the whole coastal aquifer will here be reached if the interface toe reaches the groundwater divide, i.e., if $\ell_T/\ell_{div} = 1$, as identified by Mazi *et al.* (2013).

If no groundwater divide is formed down-gradient of the pumping location, i.e., if $\ell_{div}/\ell_w \geq 1$, then the condition $\ell_T/\ell_w = 1$ constitutes another point of critical seawater intrusion. This condition means that the invading seawater reaches the distinct well location, ℓ_w , so that the well is lost before the intruding seawater reaches the tipping point of complete aquifer intrusion. The critical intrusion point $\ell_T/\ell_w = 1$ is reached if the total groundwater flow $q_o = -r(L - \ell_w) + q_b$ from up-gradient of the pumping location ℓ_w is too small to counteract seawater intrusion to ℓ_w .

The pumping of q_w may further draw groundwater only from up-gradient, or from both up-gradient and down-gradient of ℓ_w . When the value of the normalised remaining groundwater flow after pumping, $q_{norm} = -(q_o + q_w)/(KL)$, is positive, the pumped water is only from up-gradient; when q_{norm} is negative, some of the pumped water is from down-gradient of ℓ_w . The flow q_{norm} cannot become negative if a divide is not formed down-gradient of the pumping location. If the pumping location is moved further up-gradient, the pumping of q_w may draw water from both up- and down-gradient of ℓ_w , such that a divide can form between the sea and ℓ_w if sufficient submarine groundwater discharge $q_{SD} = q_b - rL + q_w$ remains after that pumping. However, just moving a pumping well farther inland does not by itself ensure that the well will not be invaded by intruding seawater; such protection can only be achieved if a hydraulic divide indeed is formed down-gradient of ℓ_w , and if the tipping point $\ell_T/\ell_{div} = 1$ of complete aquifer invasion is not reached by the toe extending to that divide.

In the case of the inland HB condition (prescribed head at the boundary), the solution allows evaluating whether a hydraulic divide is formed at a location ℓ_{div} down-gradient of the inland boundary. If a hydraulic divide exists in the aquifer and the net recharge r_n decreases (e.g., due to increased dispersed groundwater pumping), the submarine groundwater discharge q_{SD} will decrease and the groundwater divide location ℓ_{div} will move landward, such that it may then reach the end of the aquifer, so that $\ell_{div}/L \geq 1$. This means that a tipping point of the type ℓ_T/ℓ_{div}

= 1 for complete aquifer intrusion will not be reached in this case. However, if the hydraulic head at the inland boundary decreases (e.g., due to groundwater pumping, or climate-driven recharge decrease in the hydrological catchment up-gradient of the inland aquifer boundary), the divide location ℓ_{div} will move seaward, allowing for the interface toe of sea intrusion to possibly meet it, and the critical tipping point of $\ell_T/\ell_{div} = 1$ to be reached such that complete sea intrusion occurs.

In both cases of possible inland boundary conditions (FB and HB) there exists thus the possibility of reaching critical tipping points of complete sea intrusion in the coastal aquifer, of the type $\ell_T/\ell_{div} = 1$. In the flux boundary (FB) case with distinct pumping location, ℓ_w , the other type of critical sea intrusion point, in which the intruded seawater toe reaches the well location, i.e., $\ell_T/\ell_w = 1$, may also occur. Which of the two types of critical sea intrusion points that may be reached first, and thus be limiting for aquifer resilience to seawater intrusion, depends on actual aquifer conditions and their changes, as quantified further in the following section.

3.2 Aquifer-specific calculation results

According to our calculations, prior to the 1950's, when pumping from the NDA was negligible, the interface toe location was at 14 km in the mNDA and at 23 km in the eNDA. In the 1990's (Sherif and Al-Rashed, 2001) the pumping from the aquifer was 1.92 billion m^3/yr and, according to our calculations, the toe moved then to 26 km in the mNDA and to 40 km in the eNDA. Increased pumping after the year 2000 to 2.4 billion m^3/yr (Mikhailova, 2001) caused the interface to move to its current position, i.e., 100 km from the coast in mNDA and 120 km from the coast in eNDA. The strong non-linearity of the intrusion performance curves implies that the increased pumping has brought the NDA to a marginal situation (Fig. 4).

More specifically, the submarine discharge q_{SD} is currently 4.2 $m^3/m/day$ for the eNDA, and 3.9 $m^3/m/day$ for the mNDA, with the associated groundwater divide and interface toe locations then being at ~154 km and 116 km, respectively, in the eNDA, and at ~143 km and 98 km, respectively, in the mNDA. Thus, the ratio of the toe to the divide location, ℓ_T/ℓ_{div} , which is a key parameter for aquifer resilience/vulnerability to sea intrusion, is 0.755 for the eNDA and 0.684 for the mNDA, which explains the higher vulnerability of eNDA. As r_n decreases, the hydraulic divide will reach the end of the aquifer, $\ell_{div} = L$, for $r_n = 6.5$ mm/yr in the eNDA and for $r_n = 5.7$ mm/yr in the mNDA. The ratio ℓ_T/ℓ_{div} will then be 0.69 and 0.64 in the eNDA and mNDA, respectively, showing that ℓ_{div} moves faster than ℓ_T under decreasing r_n . Because of the landside HB condition, with piezometric head at 14 m, the aquifer will not be completely invaded by seawater even if net recharge r_n diminishes to zero; under those conditions $\ell_T \approx 140$ km in the eNDA and $\ell_T \approx 131$ km in the mNDA (eq. 2, Appendix A). In other words, even for zero r_n , the interface toe ℓ_T cannot here intrude to the inland boundary at $L = 180$ km in the eNDA and $L = 175$ km in the mNDA, if the prescribed hydraulic head and the implied inflow there are sustained at current levels (Fig. 4). However, if water management practices and/or climate change in the hydrological catchment upstream of inland aquifer boundary would

decrease the hydraulic head at that boundary, the tipping point $\ell_T/\ell_{div} = 1$ of full sea intrusion could be reached, even if the net recharge would be maintained at current levels (inset, Fig. 4).

The sensitivity analysis of the combined effect of recharge and boundary head change for the eNDA and mNDA shows that, if net aquifer recharge and associated submarine groundwater discharge q_{SD} had remained at their former greater values, the head at the inland boundary would not play such a big role for the vulnerability of the aquifer to seawater intrusion. Specifically, a change of $\pm 10\%$ in the boundary head would only cause the interface toe to fluctuate by ± 350 m at the most in the mNDA section and by -860 m to $+420$ m in the eNDA section (Fig. 5a and Table 2). However, under current conditions of net recharge limited to about 10 mm/yr, a $+10\%$ head change causes the interface to retreat by 6.5 km in both sections, while a -10% head change causes the interface to advance by 5.3 km in the mNDA and by 7.7 km in the eNDA (Fig. 5b and Table 2). In particular, a decrease in the inland boundary head of 22% in the mNDA and of 17% in the eNDA can bring the NDA to its tipping point of complete aquifer intrusion (Fig. 4, inset). Therefore, under current recharge conditions, it is critical for the resilience and sustainability of the Nile Delta aquifer to control the upgradient catchment hydrological conditions so that sufficient piezometric groundwater head is maintained at the inland aquifer boundary.

For the ICA and CAA cross-sections, resulting sea intrusion performance curves are shown in terms of normalized intrusion toe position ℓ_T/L as function of the normalized remaining groundwater flow $q_{norm} = -(q_o + q_w)/(KL)$ (Fig. 6). In general, depending on which condition is the limiting one for each case, the resulting performance curves terminate either at the tipping point of complete aquifer intrusion $\ell_T/\ell_{div} = 1$, or at the limit of well intrusion $\ell_T/\ell_w = 1$. If the tipping point condition $\ell_T/\ell_{div} = 1$ is the limiting one, Fig. 6 shows also the corresponding value of $\ell_T/\ell_w < 1$. If the well intrusion condition $\ell_T/\ell_w = 1$ is instead limiting, the performance curves are continued (simulating the condition of pumping seawater) as dotted lines from that limiting point until the tipping point of complete seawater intrusion in the aquifer.

For current pumping rates (corresponding to the $q_{norm} = -(q_o + q_w)/(KL)$ value of the red dashed lines, Fig. 6; with $q_w = 3000$ m³/m/yr in ICA and $q_w = 500$ m³/m/yr in CAA) and pumping locations (black curves; $\ell_w/L = 0.15$ ($\ell_w = 3$ km) in ICA, Fig. 6a; $\ell_w/L = 0.33$ ($\ell_w = 1$ km) in CAA, Fig. 6b), the well intrusion condition $\ell_T/\ell_w = 1$ (black filled circle) is the limiting one for both aquifers. The ICA (Fig. 6a) is then closer to that limit than the CAA (Fig. 6b). Increasing the pumping rate q_w at the same well location will decrease $q_{norm} = -(q_o + q_w)/(KL)$ and move the aquifer closer toward the well intrusion limit $\ell_T/\ell_w = 1$ (along the black curves, Fig. 6). The risk of crossing that limit can be reduced by moving the pumping location further inland (shifting from the black to, e.g., the green or blue curves, Fig. 6) but the tipping point of complete aquifer intrusion $\ell_T/\ell_{div} = 1$ (open square symbol, Fig. 6) may then become the limiting condition instead of the well intrusion limit. Table 3 summarizes for the different well location choices illustrated in Fig. 6 the highest possible groundwater pumping

rate, $(q_w)_{\max}$ (and other associated variable values), until a critical sea intrusion limit is crossed.

In the ICA simulations for pumping locations $\ell_w = 6000$ m and $\ell_w = 8000$ m, the maximum pumping rate $(q_w)_{\max} = 3603$ m³/m/yr is limited by the condition $\ell_T = \ell_{\text{div}} = 4987$ m. In the CAA simulations for pumping locations $\ell_w = 1400$ m and $\ell_w = 2000$ m, the maximum pumping rate $(q_w)_{\max} = 697.6$ m³/m/yr is limited by the condition $\ell_T = \ell_{\text{div}} = 1385$ m. We note then that moving pumping locations more “up-gradient” does not, without further specification, automatically imply well protection from seawater intrusion and increase of exploitable water volume. What matters is the specific location of the hydraulic divide to be down-gradient of the pumping location (critical point of sea intrusion to well) and the interface toe not to reach the divide (tipping point of complete intrusion). In the specific ICA and CAA cases, there is then no gain at all, in either exploitable water volume or aquifer protection, of moving pumping locations further up-gradient than $\ell_w = 6000$ m in ICA and $\ell_w = 1400$ m in CAA.

4. Conclusions

Directly comparable *performance curves* have here been developed for analyzing the resilience/vulnerability of different coastal aquifers to seawater intrusion. Two different types of critical sea intrusion limits are then identified: the well intrusion limit $\ell_T/\ell_w = 1$, and the complete intrusion limit $\ell_T/\ell_{\text{div}} = 1$. The risk of crossing the first limit can be reduced by moving pumping locations further inland, but then the tipping point of complete aquifer intrusion may be crossed instead. The measure of moving pumping locations more inland in coastal aquifers will offer no gain in more exploitable water volume or improved aquifer protection from sea intrusion beyond the limiting location of the prevailing groundwater divide in a coastal aquifer.

The site-specific vulnerability assessments show that the advance of seawater currently seriously threatens the Nile Delta Aquifer (NDA). The inland boundary head must here be sustained at any cost, as even a 10% decline will cause sea intrusion advancement by around 5-8 km and a 20% decline may bring the NDA to its tipping point of complete aquifer intrusion. These indications call for careful further study for establishing reliable hydrologic conditions for the NDA.

In the Israel Coastal Aquifer (ICA), the current pumping locations do not allow for increased groundwater abstractions. The maximum pumping could here be increased by about 20% if the pumping location were moved more inland, at least at $\ell_w = 5$ km from the coast, thereby allowing a groundwater divide to form down-gradient. In the Cyprus Akrotiri Aquifer (CAA), current forcing conditions do not directly threaten groundwater sustainability by increased seawater intrusion. Maximum pumping could here be raised by up to around 28% above the present rate. If pumping locations were here moved more inland (to about $\ell_w = 1.4$ km from the coast), the maximum pumping rate would increase by up to 40% over the present rate.

Appendix A

One-dimensional model of interface flow in phreatic coastal aquifers on sloping base

Here, we summarise the analytical model of Koussis *et al.* (2012), referring to that paper for the theory leading to the equations used here. Consider, then, steady flow with a fresh-sea water interface in a shallow phreatic aquifer of length L and hydraulic conductivity K , resting on an impervious inclined base (angle φ against the horizontal) and recharged at the uniform rate r (see schematic Fig. A1). The ℓ -axis follows the aquifer base, from the vertical projection on the aquifer base of the intersection of the sea level and the coast, at the depth H_{sea} below the sea surface, where the datum is placed. The depth normal to the aquifer base is h , the z -axis vertical, and the hydraulic head is $\phi = h \cos \varphi + z_b$, with z_b the bed elevation; $dz_b/d\ell = \sin \varphi$. The sea constitutes a constant-head boundary, where $\phi(\ell = 0) = H_{sea}$. Koussis *et al.* (2012) use a discharge potential for the gravity-driven flow in which the depth is approximated as a constant h_o [i.e., the gravity-driven flow $-Kh \sin \varphi \approx -Kh_o \sin \varphi$] and assume that the freshwater flows over a stagnant seawater wedge.

Mazi *et al.* (2013) have solved the governing equation subject to *flux-control* and *head-control* conditions (Werner and Simmons, 2009) referring to management schemes applied in the aquifers; here we adopt the terms flux-boundary condition and prescribed-head boundary condition to denote the landside boundary conditions in the aquifers. The related solutions developed by Koussis *et al.* (2012) and Mazi *et al.* (2013) apply here.

The equation governing the flow in the entire aquifer is $d^2\Phi/d\ell^2 = -r \cos \varphi \pm \sum \sigma_i$ (σ_i = point sources/sinks), with the discharge potential Φ defined differently in the freshwater zone 1 and in the interface zone 2 (see Mazi *et al.*, 2013). Integrating, and implementing the boundary conditions for prescribed flux or prescribed head at the inland boundary, yields the discharge potential solution for each boundary condition. These solutions, combined with the discharge potential at the sea intrusion toe, lead in the flux-control case (prescribed flux at the inland boundary) to the quadratic equation (A1) and in the head-control case (prescribed head at the inland boundary) to the cubic equation (A2) for the location of the sea intrusion toe ℓ_T :

$$[r + K\delta(1 + \delta)\sin^2\varphi]\ell_T^2 + 2[q_{SD} - K\delta(1 + \delta)\sin\varphi H_{sea}]\ell_T + K\delta(1 + \delta)H_{sea}^2 = 0 \quad (A1)$$

$$(1 + \delta)\sin^2\varphi \ell_T^3 + \left\{ \frac{rL}{K} + \sin\varphi[2h_o - (1 + \delta)(2H_{sea} - \delta L \sin\varphi)] \right\} \ell_T^2 - \left\{ \frac{rL^2}{K} + h_L^2 - (1 + \delta)H_{sea}^2 + 2\sin\varphi L[h_o + \delta(1 + \delta)H_{sea}] \right\} \ell_T + L\delta(1 + \delta)H_{sea}^2 = 0 \quad (A2)$$

where $\delta = (\rho_s - \rho_f)/\rho_f$, with ρ_s and ρ_f the respective salt- and freshwater densities, and h_L is the depth of flow at the inland boundary. Only the root with the negative square root has physical meaning for Eq. A1. For Eq. A2, the value of the depth h_o must be estimated through iteration, e.g., by iterating on $h_o = [h(\ell_T) + h_L]/2$. The single

meaningful root of Eq. A2 lies on the branch of the function $\ell_T(H_{sea})$ on which ℓ_T increases as H_{sea} increases and is the smaller of the two positive roots (a negative root is rejected).

Koussis et al. (2012) have solved the flux-control case (flux-boundary condition) in which the aquifer receives a constant boundary inflow $q_b = q(\ell = L)$, plus recharge r , and includes a pumped collector trough of infinitesimal width (line sink or well gallery), located at $\ell = \ell_w$, which penetrates the aquifer completely and draws groundwater at the rate q_w . The flow that reaches the pumped collector trough from up-gradient is then

$$q_o = -r(L - \ell_w) + q_b \quad (A3)$$

Our interest is in the profile of the discharge potential between the sea and the well gallery, where interface flow occurs, and particularly in the location of the sea intrusion interface toe, ℓ_T . This is given by the quadratic equation (A1) in which

$$q_{SD} = -rL + q_b + q_w \quad (A4)$$

with the physically meaningful solution being the root with negative square root.

Koussis *et al.* (submitted) corrected the 1-D (Dupuit) interface models to also include a vertical gap ξ_o through which submarine discharge occurs (Destouni and Prieto, 2003; Prieto and Destouni, 2005, 2011). The size of ξ_o was determined by adapting analytical estimates of the outflow gap of 2-D potential-flow interface solutions for infinitely thick aquifers. This correction allows predicting a more realistic location of the interface toe on the aquifer base (shorter penetration of a deeper interface), after reducing the depth at the aquifer outflow section H_{sea} by ξ_o to $[H_{sea}]' = H_{sea} - \xi_o$. The validity of this approach was verified through comparisons with results of variable-density models. We adopt this methodology here as well, to better reflect the true near-shore groundwater dynamics in the Mediterranean aquifers that we are examining. For notational simplicity, henceforth H_{sea} stands for the corrected value, by ξ_o , of the initial sea depth $[H_{sea}]'$.

In aquifers with flux-boundary and pumping from a well-defined location ℓ_w , if a hydraulic divide is formed between the interface toe and the pumping location, such that $\ell_T \leq \ell_{div} \leq \ell_w$, the divide location can be calculated from

$$\ell_{div} = \ell_w - (q_o + q_w)/r, \quad (A5)$$

while the head at the divide is calculated from

$$h_{div}^2 - (\ell_T - L) \sin \varphi h_{div} - \frac{rL^2}{K} - (1 + \delta)(H_{sea} - \ell_T \sin \varphi)(H_{sea} - L \sin \varphi) = 0 \quad (A6)$$

with the physically meaningful solution being the root with the positive square root.

In aquifers with prescribed-head boundary and without a distinct pumping location (but still possible dispersed pumping that may be represented by reduced recharge r), if a hydraulic divide is formed inside the aquifer, its location can be calculated (Mazi *et al.*, 2013) from

$$\ell_{div} = \frac{1}{2} L + \frac{K/r}{2L} \left[2h_o(z_{bL} - z_{bT}) + h_L^2 - \frac{\rho_s}{\rho_f} (H_{sea} - z_{bT})^2 \right] \quad (A7)$$

where z_b denotes bed elevation and the hydraulic head is given by

$$h_{div} = \sqrt{\frac{r}{K} \ell_{div}^2 - 2 h_o (z_{bdiv} - z_{bT}) + (1 + \delta)(H_{sea} - z_{bT})^2} \quad (A8).$$

772 References

- 773 Aberbach, S.H., and Sellinger, A.: Review of artificial groundwater recharge in the
774 coastal plain of Israel, International Association of Scientific Hydrology. Bulletin,
775 12:1, 65-77, <http://dx.doi.org/10.1080/02626666709493512>, 1967.
- 776 Assouline, S., and Shavit, U.: Effects of management policies, including artificial
777 recharge, on salinization in a sloping aquifer: The Israeli Coastal Aquifer case, *Water*
778 *Resour. Res.*, 40: W04101, doi:10.1029/2003WR002290, 2004.
- 779 Balasha – Jalon Consultants and Engineers Ltd. and Phedonos Consultants:
780 Environmental study and management plan for the Akrotiri Salt Lake and Wetlands
781 and assessment of the environmental impact of the proposed water development
782 works in the Limnatis, Dhiarizos and Ezousa Watersheds, Annexes 1-4, Republic of
783 Cyprus, June, 1992.
- 784 Custodio, E.: Coastal aquifers of Europe: an overview, *J. Hydrogeology*, 18: 269–280,
785 doi:10.1007/s10040-009-0496-1, 2010.
- 786 Destouni, G., and Prieto, C.: On the possibility for generic modeling of submarine
787 groundwater discharge, *Biogeochemistry*, 66: 171-186, doi:
788 10.1023/B:BI0G.0000006101.12076.10, 2003.
- 789 Destouni, G., Hannerz, F., Prieto, C., Jarsjö, J. and Shibuo, Y.; Small unmonitored
790 near-coastal catchment areas yielding large mass loading to the sea, *Global*
791 *Biogeochem. Cycles*, 22: GB4003, doi:10.1029/2008GB003287, 2008.
- 792 Döll, P.: Vulnerability to the impact of climate change on renewable groundwater
793 resources: a global-scale assessment, *Environ. Res. Lett.* 4, 035006,
794 doi:10.1088/1748-9326/4/3/035006, 2009.
- 795 Ferguson, G., and Gleeson, T.: Vulnerability of coastal aquifers to groundwater use
796 and climate change, *Nature Clim. Change*, 2: 342–5, doi:10.1038/nclimate1413,
797 2012.
- 798 Jacovides, J.: Southern Conveyor Project, Feasibility Study: Groundwater Resources,
799 vol. 3. Water Development Department, Nicosia, Republic of Cyprus, 1982.
- 800 Kashef, A-A.I.: Salt-Water Intrusion in the Nile Delta, *Groundwater*, 21: No 2-March-
801 April, doi: 10.1111/j.1745-6584.1983.tb00713.x, 1983.
- 802 Kass, A., Gavrieli, I., Yechieli, Y., Vengosh, A., and Starinsky, A.: The impact of
803 freshwater and wastewater irrigation on the chemistry of shallow groundwater: a
804 case study from the Israeli Coastal Aquifer, *J. Hydrology*, 300: 314–331,
805 doi:10.1016/j.jhydrol.2004.06.013, 2005.
- 806 Koussis, A.D., (ed.): WASSER: Utilisation of Groundwater Desalination and
807 Wastewater Reuse in the Water Supply of Seasonally-Stressed Regions, Final Report,
808 with Appendices, to the European Commission DGXII-D, Environment and Climate
809 Programme, Contract no. ENV4-CT97-0459, National Observatory of Athens, Greece,
810 2001.
- 811 Koussis, A.D., Kotronarou, A., Destouni, G., and Prieto, C.: Intensive groundwater
812 development in coastal zones and small islands, (Chapter 6) in: Intensive Use of

813 Groundwater: *Challenges and Opportunities*, R. Llamas and E. Custodio (eds),
814 Balkema, 2003.

815 Koussis, A.D., Georgopoulou, E., Kotronarou, A., Lalas, D.P., Restrepo, P., Destouni,
816 G., Prieto, C., Rodriguez, J.J., Rodriguez-Mirasol, J., Cordero, T., and Gomez-Gotor,
817 A.: Cost-efficient management of coastal aquifers via recharge with treated
818 wastewater and desalination of brackish groundwater: General framework,
819 *Hydrological Sciences Journal*, **55**(7): 1217 – 1233, doi:
820 10.1080/02626667.2010.512467, 2010a.

821 Koussis, A.D., Georgopoulou, E., Kotronarou, A., Mazi, K., Restrepo, P., Destouni, G.,
822 Prieto, C., Rodriguez, J.J., Rodriguez-Mirasol, J., Cordero, T., Ioannou, C., Georgiou,
823 A., Schwartz, J., and Zacharias, I.: Cost-efficient management of coastal aquifers via
824 recharge with treated wastewater and desalination of brackish groundwater:
825 Application to the Akrotiri Basin and Aquifer, Cyprus, *Hydrological Sciences Journal*,
826 **55**(7): 1234 – 1245, doi: 10.1080/02626667.2010.512469, 2010b.

827 Koussis, A.D., Mazi, K., and Destouni, G.: Analytical single-potential, sharp-interface
828 solutions for regional seawater intrusion in sloping unconfined coastal aquifers, with
829 pumping and recharge, *J. Hydrology*, **416–417**: 1–11,
830 <http://dx.doi.org/10.1016/j.jhydrol.2011.11.012>, 2012.

831 Koussis, A.D., Mazi, K., Riou, F., and Destouni, G.: Sea-intrusion in unconfined coastal
832 aquifers: submarine outflow correction for Dupuit-type sharp-interface models,
833 (submitted).

834 Kundzewicz, Z. W., and Döll, P.: Will groundwater ease freshwater stress under
835 climate change?, *Hydrological Sciences Journal*, **54**: 4, 665-675,
836 <http://dx.doi.org/10.1623/hysj.54.4.665>, 2009.

837 Mantoglou, A.: Pumping management of coastal aquifers using analytical models of
838 saltwater intrusion, *Water Resource Res.*, **39**: 12, doi: 10.1029/2002WR001891,
839 2003.

840 Mazi, K.: Optimisation of parameters of hydrologic models with the use of
841 groundwater data, M.S. in Water Resources Science and Technology, Civil Eng. Dept.,
842 National Technical University, Athens (in Greek), Greece, 2000.

843 Mazi, K., Koussis, A.D., and Destouni, G.: Tipping points for seawater intrusion in
844 coastal aquifers under rising sea level, *Environ. Res. Lett.* **8** 014001 (6pp),
845 doi:10.1088/1748-9326/8/1/014001, 2013.

846 Mazi, K., Koussis, A.D., Restrepo, P., and Koutsoyiannis, D.: A groundwater-based,
847 objective-heuristic parameter optimisation method for the PRMS model: The Akrotiri
848 Basin, Cyprus application, *J. Hydrology*, **290**, pp. 243-258,
849 <http://dx.doi.org/10.1016/j.jhydrol.2003.12.006>, 2004a.

850 Mazi, K., Koussis, A.D., Restrepo, P., and Koutsoyiannis, D.: A groundwater-based,
851 objective-heuristic parameter optimisation method for the PRMS model: The Akrotiri
852 Basin, Cyprus application, Erratum *J. Hydrology*, **299**, 160–161,
853 <http://dx.doi.org/10.1016/j.jhydrol.2004.09.017>, 2004b.

854 Mikhailova, M.: Hydrological regime of the Nile Delta and dynamics of its coastline,
855 *Water Resour. Res.* **28**(5): 477–490, doi:10.1023/A:1012320920434, 2001.

856 Melloul, A.J., and Zeitoun, D.G.: A semi-empirical approach to intrusion monitoring in
857 Israeli coastal aquifer, in *Seawater Intrusion in Coastal Aquifers: Concepts, Methods,*
858 *and Practices*, Theor. Appl. Transp. Porous Media, vol. 14, edited by J. Bear et al., pp.
859 543–558, Kluwer Acad., Dordrecht, Netherlands, 1999.

860 Prieto, C., and Destouni, G.: Quantifying hydrological and tidal influences on
861 groundwater discharges to coastal waters, *Water Resour. Res.*, 41, W12427,
862 doi:10.1029/2004WR003920, 2005.

863 Prieto, C., Kotronarou, A., and Destouni, G.: The influence of temporal hydrological
864 randomness on seawater intrusion in coastal aquifers, *J. Hydrology*, 330/1-2, 285-
865 300, doi:10.1016/j.jhydrol.2006.03.024, 2006.

866 Prieto, C.: Groundwater-seawater interactions: Seawater intrusion, submarine
867 groundwater discharge and temporal variability and randomness effects, Ph.D. thesis
868 in Water Resources Engineering, KTH Architecture and the Built Environment, Royal
869 Institute of Technology, Stockholm, Sweden, 2005. (Available at
870 http://www.lwr.kth.se/Publikationer/PDF_Files/LWR_PHD_1019.pdf)

871 Prieto, C., and Destouni, G.: Is submarine groundwater discharge predictable?,
872 *Geophysical Research Letters*, 38, L01402, doi:10.1029/2010GL045621, 2011.

873 Sellinger, A., and Aberbach, S.H.: Artificial recharge of coastal-plain aquifer in Israel,
874 *IAHS Publ.*, no. 111, 701 – 714, 1973.

875 Sherif, M. M., Singh, V.P., and Amer, A.M.: A two-dimensional finite element model
876 for dispersion (2D-FED) in coastal aquifers, *J. Hydrology*, 103: 11- 36,
877 [http://dx.doi.org/10.1016/0022-1694\(88\)90003-0](http://dx.doi.org/10.1016/0022-1694(88)90003-0), 1988.

878 Sherif, M.M.: Nile Delta Aquifer in Egypt, in *Seawater Intrusion in Coastal Aquifers:*
879 *Concepts, Methods, and Practices*, Theor. Appl. Transp. Porous Media, vol. 14,
880 edited by J. Bear et al., pp. 543–558, Kluwer Acad., Dordrecht, Netherlands, 1999.

881 Sherif, M.M., and Singh, V.P.: Effect of climate change on sea water intrusion in
882 coastal aquifers, *Hydrol. Processes*, 13, 1277–1287, doi: 10.1002/(SICI)1099-
883 1085(19990615)13:8<1277::AID-HYP765>3.0.CO;2-W, 1999.

884 Sherif, M.M., Sefelnasr, A., and Javadi, A.: Incorporating the concept of equivalent
885 freshwater head in successive horizontal simulations of seawater intrusion in the
886 Nile Delta aquifer, Egypt, *J. Hydrology*, 464–465: 186–198, 2012.
887 <http://dx.doi.org/10.1016/j.jhydrol.2012.07.007>

888 Sanford, W.E., and Pope, J.P.: Current challenges in forecasting saltwater intrusion:
889 Lessons from the Eastern Shore of Virginia, *Hydrogeology J.*, 1: 73-93, doi:07/s10040-
890 009-0513-4, 2010.

891 Strack, O.D.L.: A single-potential solution for regional interface problems in coastal
892 aquifers, *Water Resour. Res.* **12**: 1165–1174, 1976. doi:10.1029/WR012i006p01165

893 Taylor, R.G., Koussis, A.D., and Tindimugaya, C.: Groundwater and climate in Africa - a
894 review, *Hydrol. Sci. J.*, 54:4, 655-664, 2009. <http://dx.doi.org/10.1623/hysj.54.4.655>

895 Werner, A.D., and Simmons, C.T.: Impact of sea-level rise on sea water intrusion in
896 Coastal Aquifers, *Ground Water*, **47**(2): 197–204, 2009. doi:10.1111/j.1745-
897 6584.2008.00535.x

898 Yechieli, Y., and Sivan, O.: The distribution of saline groundwater and its relation to
899 the hydraulic conditions of aquifers and aquitards: examples from Israel,
900 *Hydrogeology J.*, 19: 71–81, 2011. doi:10.1007/s10040-010-0646-5
901 Yechieli, Y., Shalev, E., Wollman, S., Kiro, Y., and Kafri, U.: Response of the
902 Mediterranean and Dead Sea coastal aquifers to sea level variations, *Water Resour.*
903 *Res.*, 46, W12550, 2010. doi:10.1029/2009WR008708
904

Table 1. Characteristics and parameters of the conceptual model sections (Figure 3) of the three Mediterranean aquifers

	Nile Delta Aquifer		Israel Coastal	Cyprus Akrotiri
	Middle section	East section	Aquifer	Aquifer
Slope of impervious aquifer base, $\sin\phi$	0.003	0.004	0.01	0.017
Inland boundary condition	constant head = 14 m	constant head = 14 m	no-flow	boundary inflow = 549 m ³ /m/yr
Depth of flow (m) at inland boundary	225	200		
Hydraulic conductivity, K (m/d)	100	120	30	28
Aquifer length, L (km)	175	180	20	3
Aquifer depth at the coast, H_{sea} (m)	740	910	200	50
Aquifer recharge rate, r (mm/yr)	10	10	240	92
	(net recharge r_n)	(net recharge r_n)	(natural & artificial)	(natural)
Pumping location, ℓ_w (km)	dispersed	dispersed	3	1
Water withdrawals, q_w (m ³ /m/yr)	*	*	3000	500
Sharp-interface toe calculated, ℓ_T (km)	98	116	2.6	0.65
Groundwater divide, ℓ_{div} (km)	143.5	153.6	20	
Submarine discharge, q_{SD} (m ³ /m/day)	3.9	4.2	4.9	0.9
L/H_{sea} : aquifer length to depth at the sea	237	198	100	60

* water withdrawals have been subtracted from the aquifer recharge rate, to yield *net recharge rate* r_n

Table 2. Interface toe location, ℓ_T , for different conditions of net recharge rate and groundwater head at the inland boundary for the Nile Delta Aquifer sections.

Net recharge rate (mm/yr)	Head at inland boundary (m)	Middle Nile Delta ℓ_T (km)	East Nile Delta ℓ_T (km)
10	12.6	113.35	123.70
	14	98.01	116.04
	15.4	91.49	109.37
100	12.6	22.56	35.88
	14	22.21	35.46
	15.4	21.88	34.60

Table 3. Variable quantification related to the results of Fig. 6 for the Cyprus Akrotiri Aquifer and the Israel Coastal Aquifer. Quantified variables include groundwater exploitation (current pumping rate q_w , possible maximum pumping rate $(q_w)_{\max}$, pumping location ℓ_w in relation to aquifer length L , intrusion toe position ℓ_T/L and $(\ell_T/L)_{\max}$ for q_w and $(q_w)_{\max}$ pumping, respectively, and relative location ℓ_{div}/L of a possible groundwater divide formed down-gradient of ℓ_w .

Curve, Fig. 6	position of well, ℓ_w	ℓ_w/L	ℓ_w/H_{sea}	q_w ($\text{m}^3/\text{m}/\text{yr}$)	ℓ_T/L	ℓ_{div}/L	$(q_w)_{\max}$ ($\text{m}^3/\text{m}/\text{yr}$)	$(\ell_T/L)_{\max}$	limiting criterion
(a) Israel (ICA)									
Black	current: 3 km	0.15	15	3000	0.132	1	3179 (+6%)	0.15	$\ell_T = \ell_w$, well intrusion
Green	change 1: 6 km	0.3	30	3000	0.132	1	3603 (+20%)	0.25	$\ell_T = \ell_{\text{div}}$ complete intrusion
Blue	change 2: 8 km	0.4	40	3000	0.132	1	3603 (+20%)	0.25	$\ell_T = \ell_{\text{div}}$ complete intrusion
(b) Cyprus (CAA)									
Black	current: 1 km	0.33	20	500	0.22	no divide	648.4 (+30%)	0.33	$\ell_T = \ell_w$, well intrusion
Green	change 1: 1.4 km	0.47	28	500	0.22	no divide	700.5 (+40%)	0.45	$\ell_T = \ell_{\text{div}}$ complete intrusion
Blue	change 2: 2 km	0.67	40	500	0.22	no divide	700.5 (+40%)	0.45	$\ell_T = \ell_{\text{div}}$ complete intrusion

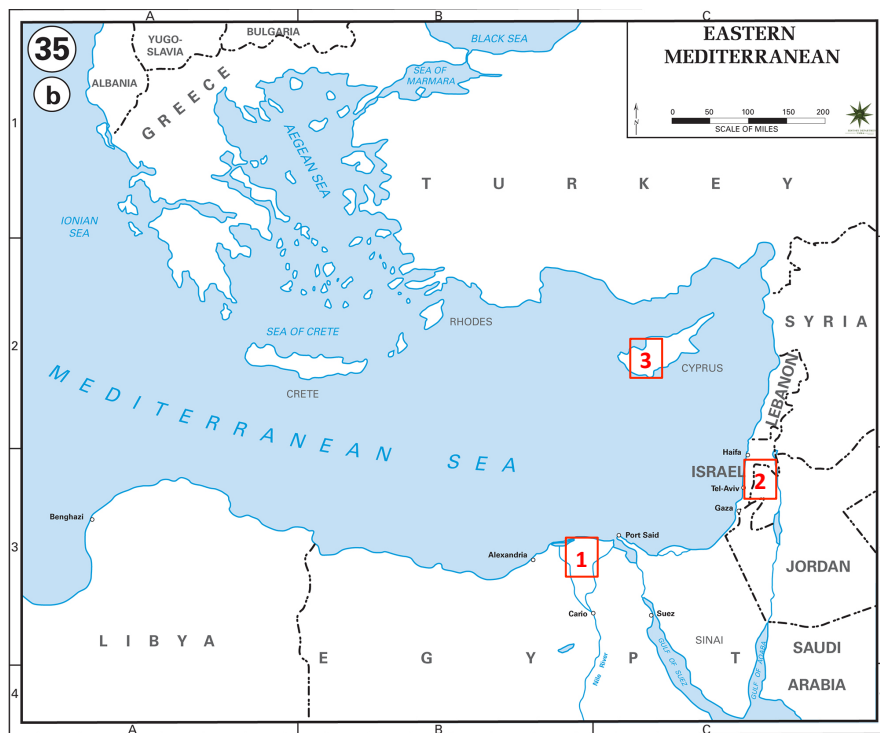


Figure 1.



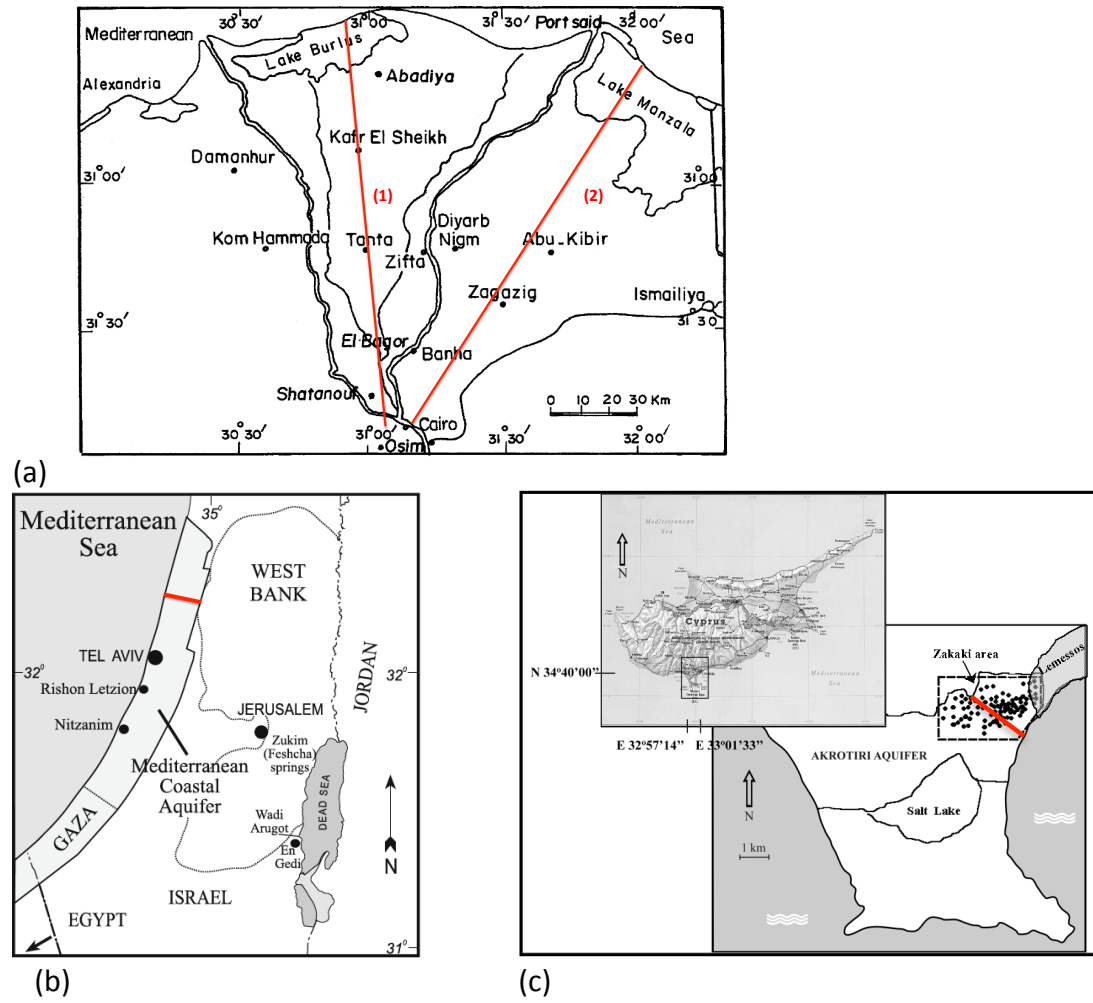



Figure 2.

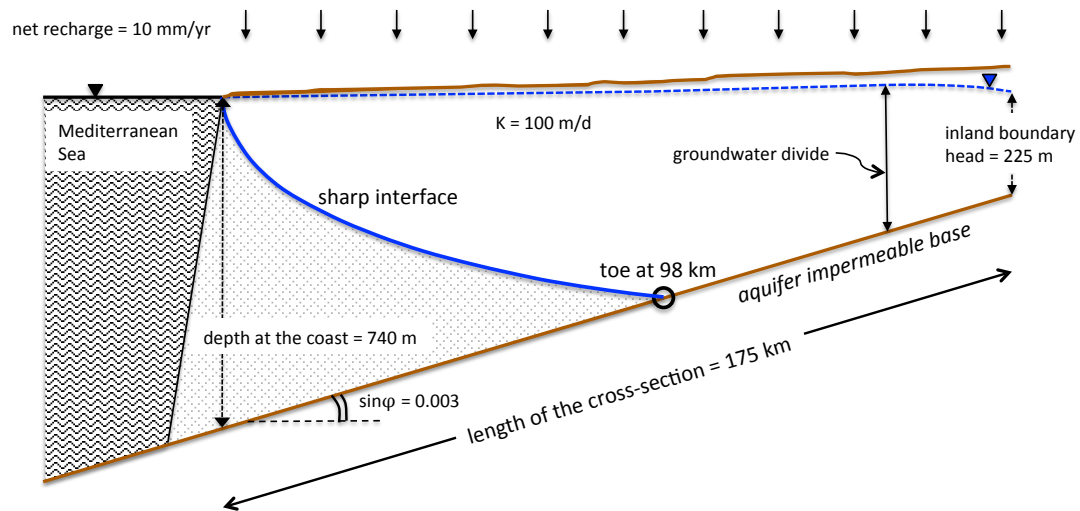


(a)

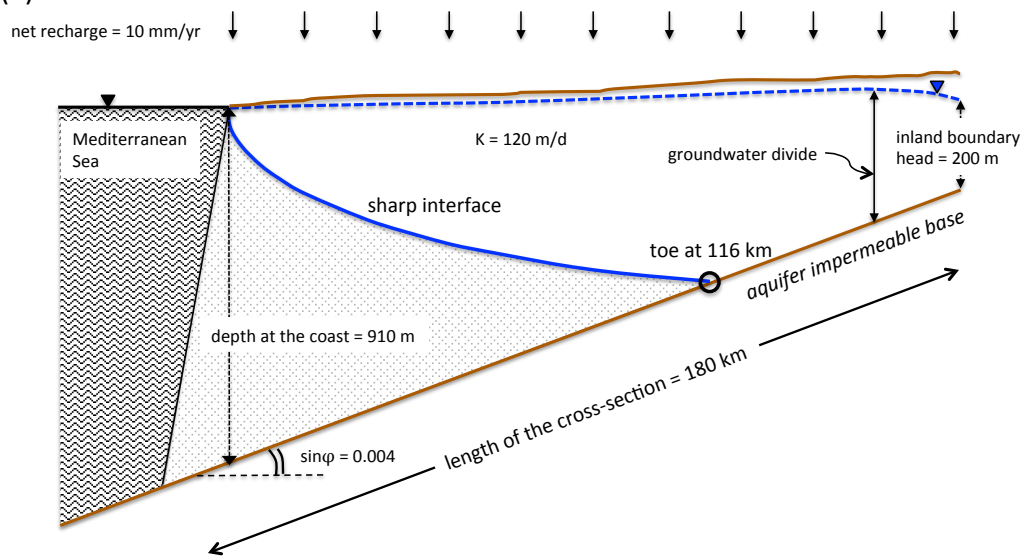

(b)

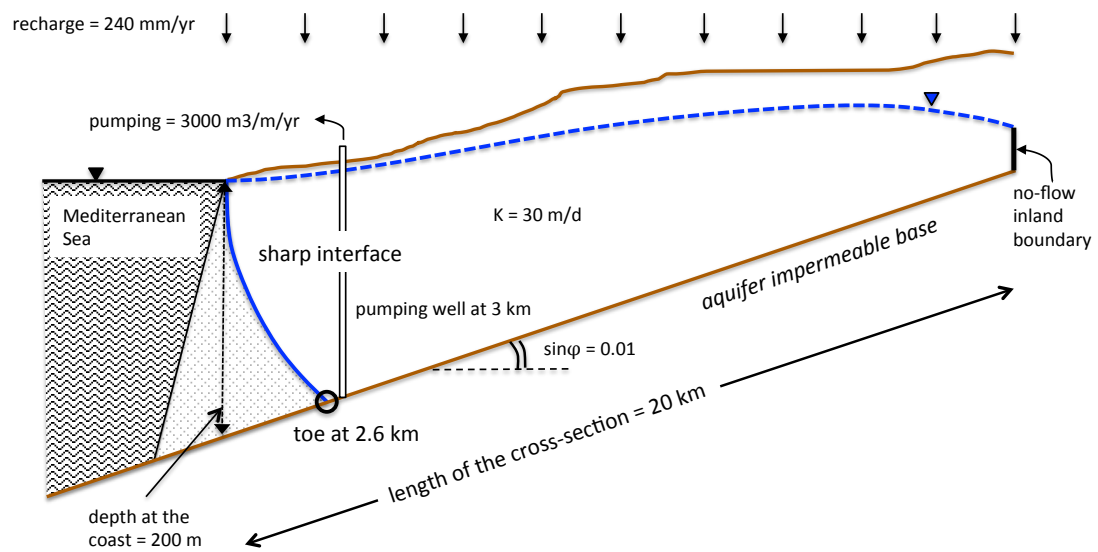

(c)

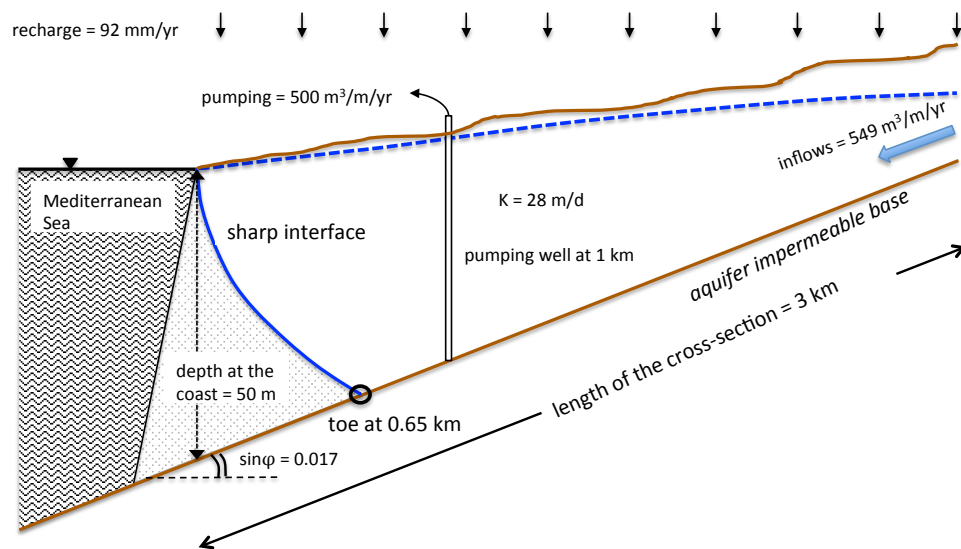

(d)

Figure 3.



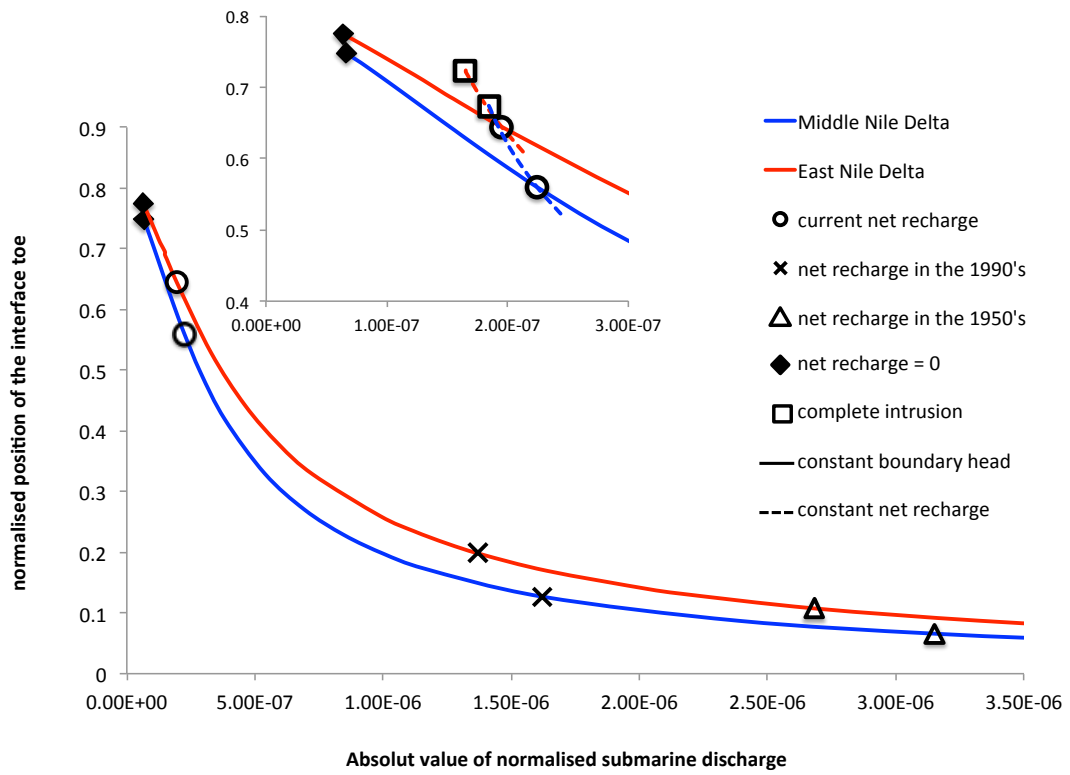


Figure 4.

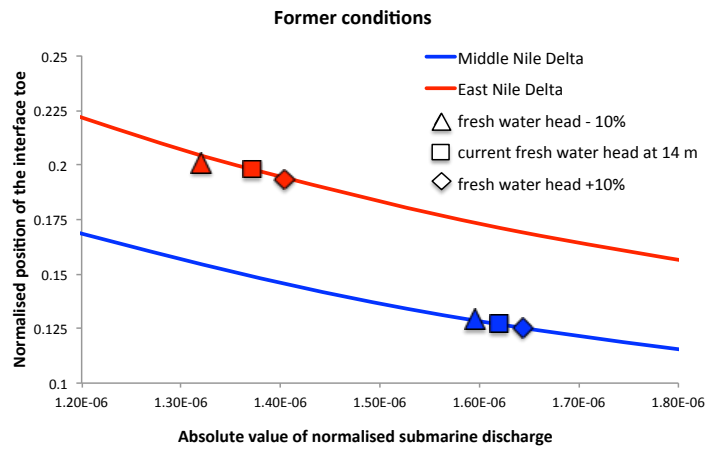


(a)

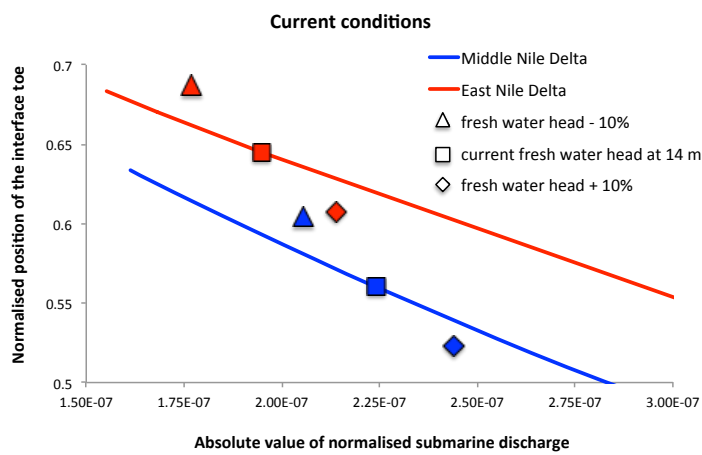


(b)

Figure 5.

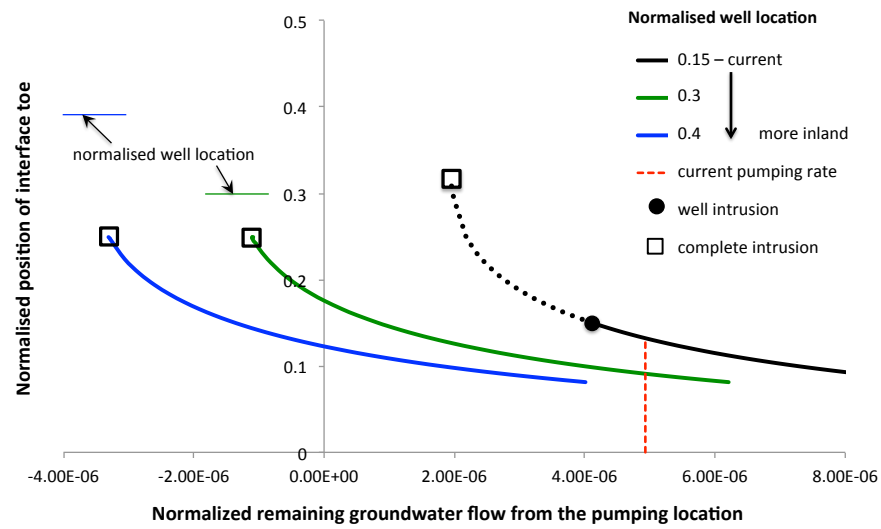

(a)

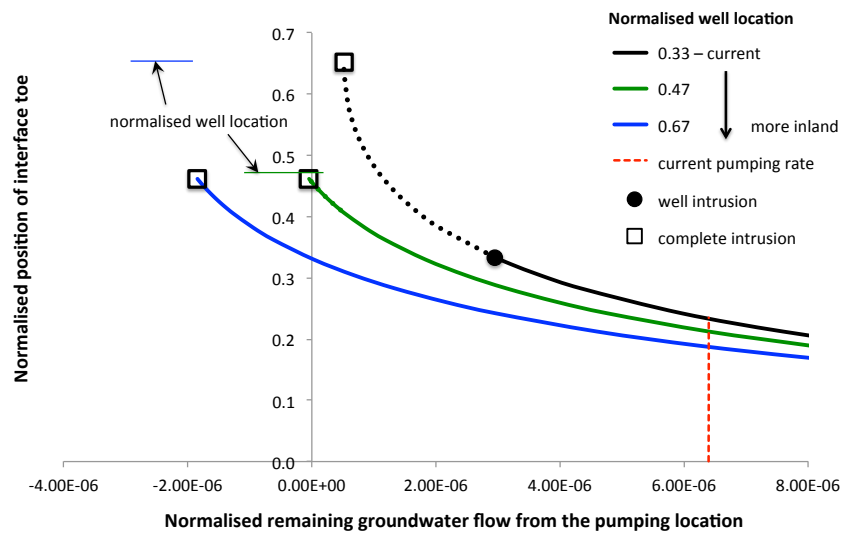

(b)

Figure 6.

Figure captions

Figure 1. The locations of the aquifers under study in the Southeastern Mediterranean, 1) Nile Delta Aquifer, 2) Israel Coastal Mediterranean Aquifer, and 3) Cyprus Akrotiri Aquifer.

(adapted from http://www.emersonkent.com/map_archive/eastern_mediterranean.htm)

Figure 2. Mediterranean aquifers and selected cross-sections (red lines): (a) Nile Delta Aquifer (1) Middle Nile Delta and (2) East Nile Delta (adapted from Sherif, 1999), (b) Israel Coastal Aquifer Israel Coastal Aquifer, light grey area (left) (adapted from Yechieli et al., 2011) and (c) Cyprus Akrotiri Aquifer.

Figure 3. Schematized modeled cross-sections: (a) Middle Nile Delta Aquifer, (b) East Nile Delta Aquifer, (adapted respectively from Fig. 17.2 and 17.3, Sherif (1999)), (c) Israel Coastal Aquifer and (d) Cyprus Akrotiri Aquifer.

Figure 4. Sea intrusion performance curves for the Middle and East Nile Delta Aquifer cross-sections. Symbols mark the calculated normalized intrusion toe position, ℓ_T/L , as function of the normalized submarine groundwater discharge $q_{SD}/(KL)$ under constant boundary head conditions for present and past groundwater pumping and associated net recharge conditions (continuous lines in main graph and inset), for which the tipping point of full intrusion (open squares) cannot be reached. The inset shows comparative results (dashed lines) for variable head conditions at the boundary under constant net recharge conditions at current levels, for which the tipping point of full intrusion (open squares) can be reached.

Figure 5. Sea intrusion performance curves for the Middle and East Nile Delta Aquifer cross-sections for different groundwater head conditions at the inland boundary. Normalized intrusion toe position, ℓ_T/L , is shown as function of the normalized submarine groundwater discharge $q_{SD}/(KL)$ for: a) former values of net recharge and associated q_{SD}/KL (range of higher $q_{SD}/(KL)$ values in the x-axis scale), and b) current values of net recharge and associated $q_{SD}/(KL)$ (range of lower $q_{SD}/(KL)$ values in the x-axis scale).

Figure 6. Sea intrusion performance curves for different normalized well locations in: (a) the Israel Coastal Aquifer (ICA) and (b) the Cyprus Akrotiri Aquifer (CAA). Normalized intrusion toe position, ℓ_T/L , is shown as function of the normalized remaining groundwater flow q_{norm} from the normalized pumping location ℓ_w/L . Absolute ℓ_w values for the curves shown here are then 3 km (black line; current condition), 6 km (green line) and 8 km (blue line) for ICA, and 1 km (black line; current condition), 1.4 km (green line) and 2 km (blue line) for CAA. Black dotted line: continued pumping of seawater.

Figure A1. Sharp-interface conceptualization of seawater intrusion in an inclined unconfined coastal aquifer