

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Scoping a field experiment: error diagnostics of TRMM precipitation radar estimates in complex terrain as a basis for IPHEx2014

Y. Duan, A. M. Wilson, and A. P. Barros

Department of Civil and Environmental Engineering, Pratt School of Engineering,
Duke University, Durham, NC 27708, USA

Received: 9 August 2014 – Accepted: 22 August 2014 – Published: 9 October 2014

Correspondence to: A. P. Barros (barros@duke.edu)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

11, 11137–11182, 2014

**Error diagnostics of
TRMM PR**

Y. Duan et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Abstract

A diagnostic analysis of the space-time structure of error in Quantitative Precipitation Estimates (QPE) from the Precipitation Radar (PR) on the Tropical Rainfall Measurement Mission (TRMM) satellite is presented here in preparation for the 5 Integrated Precipitation and Hydrology Experiment (IPHEx) in 2014. IPHEx is the first NASA ground-validation field campaign after the launch of the Global Precipitation Measurement (GPM) satellite. In anticipation of GPM, a science-grade high-density raingauge network was deployed at mid to high elevations in the Southern Appalachian Mountains, USA since 2007. This network allows for direct comparison between 10 ground-based measurements from raingauges and satellite-based QPE (specifically, PR 2A25 V7 using 5 years of data 2008–2013). Case studies were conducted to characterize the vertical profiles of reflectivity and rain rate retrievals associated with 15 large discrepancies with respect to ground measurements. The spatial and temporal distribution of detection errors (false alarm, FA, and missed detection, MD) and magnitude errors (underestimation, UND, and overestimation, OVR) for stratiform and convective precipitation are examined in detail toward elucidating the physical basis of retrieval error.

The diagnostic error analysis reveals that detection errors are linked to persistent stratiform light rainfall in the Southern Appalachians, which explains the high 20 occurrence of FAs throughout the year, as well as the diurnal MD maximum at midday in the cold season (fall and winter), and especially in the inner region. Although UND dominates the magnitude error budget, underestimation of heavy rainfall conditions accounts for less than 20 % of the total consistent with regional hydrometeorology. The 2A25 V7 product underestimates low level orographic enhancement of rainfall 25 associated with fog, cap clouds and cloud to cloud feeder-seeder interactions over ridges, and overestimates light rainfall in the valleys by large amounts, though this behavior is strongly conditioned by the coarse spatial resolution (5 km) of the terrain topography mask used to remove ground clutter effects. Precipitation associated

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



with small-scale systems ($< 25 \text{ km}^2$) and isolated deep convection tends to be underestimated, which we attribute to non-uniform beam-filling effects due to spatial averaging of reflectivity at the PR resolution. Mixed precipitation events (i.e., cold fronts and snow showers) fall into OVR or FA categories, but these are also the types of events for which observations from standard ground-based raingauge networks are more likely subject to measurement uncertainty, that is raingauge underestimation errors due to under-catch and precipitation phase.

Overall, the space-time structure of the errors shows strong links among precipitation, envelope orography, landform (ridge-valley contrasts), and local hydrometeorological regime that is strongly modulated by the diurnal cycle, pointing to three major error causes that are inter-related: (1) representation of concurrent vertically and horizontally varying microphysics; (2) non uniform beam filling (NUBF) effects and ambiguity in the detection of bright band position; and (3) spatial resolution and ground clutter correction.

15 1 Introduction

Reliable quantitative measurement of rainfall distribution over mountainous regions is essential for climate studies, hydrological and hazard forecasting, and for the management of water and ecosystem resources (Barros, 2013; Vivenioli et al., 2011). Recent advances toward high spatial and temporal resolution satellite-based quantitative precipitation estimation (QPE) make these estimates potentially attractive for flood forecasting and other operational hydrology studies (e.g. Tao and Barros, 2013, 2014, and references therein). Numerous studies have been conducted to compare satellite products against ground measurements to quantify error and to improve retrieval algorithms (Amitai et al., 2009, 2012; Kirstetter et al., 2013; Wolff and Fisher, 2008; Barros et al., 2000; Tao and Barros, 2010). For long-term monitoring, raingauges remain the most autonomous and affordable instrument, but large errors can be introduced in extrapolating point observations to represent areal means

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



(Prasetya et al., 2012). Considering the large uncertainties due to satellite temporal sampling and volume sampling discrepancies, and the challenges in accounting for atmospheric heterogeneity and landform complexity, direct comparison of satellite-based precipitation estimates with ground-based point measurements (e.g., rain gauges) poses many challenges, especially at short time scales over small areas (< 1000 km; Amitai et al., 2012; Barros and Tao, 2008; Fisher, 2004; among many others).

In mountainous regions, terrain complexity is a key complicating factor not only because it introduces spatial variability, but also because land in this region is difficult to access. This tends to constrain the type, density and locations of ground-based observations, leading to sparse, poorly maintained, and irregularly distributed observing networks. Furthermore, observations from operational ground-based radar systems cannot be relied upon to monitor the lower troposphere due to blockage and ground-clutter effects, and thus satellite-based observations provide an opportunity for long-term monitoring at high spatial resolution with consistent measurement quality. Studies evaluating satellite QPE consistently report widespread underestimation of rainfall in mountainous regions independently of the temporal scale (Barros et al., 2000; Lang and Barros, 2002; Barros and Tao, 2008; Prat and Barros, 2010a). In the Southern Appalachians and the adjacent Piedmont, light rainfall ($\leq 3 \text{ mm h}^{-1}$) accounts for 30–50 % and higher of annual freshwater input to headwater catchments (Wilson and Barros, 2014; Barros, 2013), and therefore light rainfall detection and estimation, which has been a long-standing challenge in remote sensing of rainfall, is critical to water cycle studies. On the other hand, vertical complexity and high spatial variability of heavy rainfall and mixed precipitation events associated with severe weather pose major challenges to operational weather and hydrological forecasting of extreme events.

A diagnostic analysis of the space-time structure of error in QPE from the Precipitation Radar (PR) on the Tropical Rainfall Measurement Mission (TRMM) satellite in preparation for the Integrated Precipitation and Hydrology Experiment (IPHEx) in 2014 is reported here. In particular, we examine the physical basis of false

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



alarm (FA), missed detection (MD), underestimation (UND) and overestimation (OVR) errors with the purpose of designing and implementing a Ground-Validation Observing System that captures the range of key conditions and hydrometeorological regimes linked to various types of retrieval error, and thus can inform improvements in retrieval 5 algorithms and precipitation product development in regions of complex orography.

IPHEx is the first ground-validation field campaign after the launch of the Global Precipitation Measurement (GPM) satellite (Barros et al., 2014). The configuration of the terrain and TRMM overpasses and the complex regional meteorology necessitate a comprehensive assessment of the spatial and temporal structure of uncertainty 10 conditional on observing geometry and hydrometeorological regime. In anticipation of IPHEx, a science-grade high-density raingauge network was deployed at mid to high elevations in the Southern Appalachian Mountains, USA since 2007. This network allows for direct comparing of ground-based measurements from raingauges and satellite-based QPE from the TRMM precipitation radar (specifically, PR 2A25 V7), and the GPM Dual-Frequency Precipitation Radar (DPR) when these become available. 15 Specifically, raingauge measurements were compared against 5 years of TRMM orbital precipitation estimates PR 2A25 collected between 2008 and 2013. The satellite-based estimates were evaluated via gauge-to-pixel analysis for spatiotemporally matched gauges and areal average analysis at the PR pixel scale. Case studies were conducted to characterize the vertical profiles of reflectivity and rain rate associated with large 20 uncertainty, as well as the spatial distribution for typical cases of quantitative errors (underestimation, UND, and overestimation, OVR) and detection errors (false alarm, FA, and missed detection, MD) for stratiform and convective precipitation.

Kirstetter et al. (2013) performed a comprehensive study and reported improvements 25 of TRMM PR 2A25 version 7 (V7) over version 6 (V6) across the southern conterminous US (CONUS) using the National Weather Service (NWS) operational radars and raingauges as reference. Several changes were implemented in the TRMM PR algorithm for V7 including the vertical profile of hydrometeor characteristics, which affects the reflectivity-to-rainfall rate ($Z-R$) relationship and attenuation correction, and

Title Page	
Abstract	Introduction
Conclusions	References
Tables Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Title Page	
Abstract	Introduction
Conclusions	References
Tables	
Figures	
◀ ▶	
◀ ▶	
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



the reintroduction of a correction for non-uniform beam-filling (NUBF) effects (described in Kozu and Iguchi, 1999) that had been removed from V6. Because there are large gaps in the NWS operational observing system in mountainous regions, we build on earlier work by Prat and Barros (2010a) and overlapping V6 and V7 products (TRMM

5 PR 2A25) are also compared here for the 3 years of concurrent availability in the study region (2008–2011).

Section 2 briefly describes the TRMM PR products and the climatology of rainfall observed from the rain gauge network, and includes a comparison of TRMM 2A25 V7 and V6 estimates with respect to reference ground measurements focusing on rainfall 10 detectability and quantitative accuracy. Section 3 is devoted to an examination of the vertical reflectivity structures of underestimation (UND), overestimation (OVR), false alarm (FA) and missed detection (MD) errors for stratiform and convective rainfall as defined by TRMM-based criteria with the purpose of characterizing the uncertainty in each class and exploring the physical basis of associated errors. Section 4 focuses on 15 diagnosing the potential sources of errors for illustrative case studies. Summary and conclusions follow in Sect. 5.

2 Data

2.1 The GSMNP raingauge network

A high-spatial resolution raingauge network has been installed in the Great Smoky 20 Mountains National Park (GSMNP) in the Southern Appalachians since 2007 (Prat and Barros, 2010b). In this study, 32 stations equipped with tipping bucket (TB) gauges operating for the longest continuous period, distributed at mid to high elevations (from 1150 to 1920 m) on mountain ridges, will be used as reference “ground-truth” (Table 1, Fig. 1). The current network configuration includes additional raingauges, 25 disdrometers, MicroRain Radars (MRRs) and weighing raingauges (Barros et al., 2014), but in this study we use only the TB raingauge data that have several years



of record length during the 2008–2013 period, thus assuring robust statistics. The raingauges provide point observations of surface rainfall at different measurement resolution: seven rain gauges use the TB3 model (RG0XX: catchment size of 200 mm; 0.2 mm tip⁻¹), 13 are TB3/0.1 (RG1XX: catchment size of 282.2 mm; 0.1 mm tip⁻¹) and 12 are HS305 (RG3XX: catchment size of 305 mm; 1 mm tip⁻¹). Note the RG3XX data are available only from 2009 onward. Although higher resolution TB gauges were co-located with several RG3XX gauges since their initial deployment, their record is short and thus those observations are not used here. To reiterate, a note of caution is warranted with regard to the many potential errors due to spatial density and 10 geolocation distribution of the gauges, wind effects, surface wetting of the gauge funnel, animal and human interference, evaporation, and splashing that may introduce error in the raingauge observations independently of the measurement accuracy proper. For example, for high wind speeds, the reported rain rate is typically 2–18 % lower than the 15 actual value (Chen et al., 2013; Wang and Wolff, 2010). Nevertheless, the rain gauge measurements provide a reliable and independent reference to evaluate uncertainties and identify possible biases associated with remote-sensing estimates.

Over the Southern Appalachians, most precipitation is associated with stratiform systems, although isolated thunderstorms and mesoscale convective systems are dominant in the warm season. Figure 1 shows a map of the study region, where the GSMNP network is a relatively dense raingauge network deployed in the Pigeon River Basin in the Southern Appalachians spanning an area of about 1400 km^2 . As can be seen in Fig. 1, the RG0XX (easternmost) and RG3XX (westernmost) gauges are clustered over the outer ridges, whereas the RG1XX gauges are distributed in the inner mountain region. Figure 2 shows the spatial variability of average daily precipitation raingauge accumulations over the period of study. Note the lack of classic orographic rainfall enhancement with elevation (Fig. 2b), as well as the stronger variability for the RG1XX gauges in the inner mountain region (blue colors) with higher rainfall totals at lower elevations in the valleys and at ridge tops and a decrease at intermediate elevations on hill slopes. The high values in the valleys reflect the contribution of

seeder-feeder processes resulting from the interaction of stratiform rainfall with low level clouds and thick fog banks (Wilson and Barros, 2014). Complex orographic precipitation effects in the Southern Appalachian Mountains and high intra-annual variability in large-scale weather conditions explain the high spatial variability in the 5 diurnal cycle of rainfall frequency from one season to another as depicted in Fig. 3. During the summer, rainfall frequency peaks in the late afternoon (15:00 to 18:00 EDT) with daytime convection accounting for nearly 20 % of the seasonal total and is somewhat uniform in the remainder of the day with each period contributing about 10–15 %; during the winter, rainfall frequency reveals a strong diurnal cycle characterized 10 by a high-amplitude maximum in the early afternoon (12:00 to 15:00 EDT) and a relative minimum occurring between 21:00 and 06:00 EDT. Spring and fall seasons, on the other hand, exhibit a much weaker diurnal cycle, with a relative maximum occurring in the afternoon, and otherwise more or less constant throughout the rest of the day.

2.2 TRMM PR 2A25 products

15 The TRMM satellite was launched in November 1997 and operated on a non-sun-synchronous orbit designed to capture precipitation structure in the tropics. On 8 July 2014 NASA ceased station keeping maneuvers and TRMM is currently drifting downward from its operating altitude of 402 to 335 km, expected to be reached around February 2016, at which point data collection will be terminated.

20 The Precipitation Radar (PR) was the first active microwave instrument for measuring three-dimensional rainfall structure over the tropics and subtropics from space (Kozu et al., 2001), and produces more reliable near surface estimates of precipitation at higher spatial resolution than radiometers including in mountainous regions (Nesbitt et al., 2000; Barros et al., 2000; Barros and Tao, 2008). The PR operates at 25 13.8 GHz frequency with 250 m vertical resolution, and is thus capable of penetrating dense cloud layers to detect underlying precipitation (Prasetya et al., 2012). Retrieval errors such as the uncertainty of the assumed drop size distribution (DSD), incorrect physical assumptions (freezing-level height, hydrometeor temperatures), possible

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



contamination by surface backscatter, the reliability and physical basis of the stratiform-convective classification, attenuation and extinction of the signal and NUBF effects, light rain sensitivity (minimum detectable signal), and surface clutter rejection all contribute to uncertainty in PR rainfall estimates, and the respective effects are corrected to varying degrees (Iguchi et al., 2009; Wolff and Fisher, 2008).

Specifically, a hybrid of the surface reference technique and the Hitschfeld and Bordan method is applied to correct for atmospheric attenuation (Iguchi et al., 2000). The PR attenuation correction is adequate in stratiform rain but is underestimated in convective rain, particularly for heavy rain accumulations (Liao and Meneghini, 2009).

Generally, application of the attenuation correction can change the estimated rain rate by an order of magnitude in cases of heavy precipitation (Bindlish and Barros, 2000; Iguchi et al., 2000; Meneghini et al., 2000). Generally, the NUBF effects refer to underestimation errors in the presence of reflectivity gradients, that is, subgrid-scale volume heterogeneity at the relatively coarse resolution of the PR footprint (Nakamura, 1991; Durden et al., 1998). Previous studies evaluating the impact of NUBF have been conducted for ocean conditions and for moderate to heavy rainfall conditions, and results suggested very small errors due to NUBF for the TRMM PR, but no studies focused on subgrid-scale effects in mountainous regions where there is a strong co-organization of landform and precipitation along with strong space-time variability.

Other sources of errors include the orbital geometry of the satellite at relatively high latitude (Fisher, 2004), and local hydrometeorological regimes which may present cloud and rainfall vertical structure very different from that implied in the retrieval algorithm's microphysical assumptions. Intercomparison of precipitation estimates from different algorithms allows examination of the specific impacts of algorithm differences on QPE reliability and accuracy. For instance, the underestimation of rain rate in V6 (Prat and Barros, 2010a) was addressed in the V7 algorithm revisions by recalibration of the $Z-R$ relationship over land, and implementation of the NUBF correction to produce larger estimates both over land and over ocean (Seto et al., 2011). Finally, sampling errors are subject to sampling frequency and the spatiotemporal structure of precipitation

Title Page	
Abstract	Introduction
Conclusions	References
Tables	
Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



associated with diurnal, seasonal, and inter-annual variability of rainfall within a region. Even though sampling errors are more randomly distributed, they can be a significant contribution to the total error (Fisher, 2004). The main TRMM product used in this work is the PR 2A25 V7 product, described at (http://disc.sci.gsfc.nasa.gov/precipitation/documentation/TRMM_README). V6 products will be used for assessing V7 algorithm improvements, specifically with regard to instantaneous precipitation estimates. For this purpose, all rainfall measurements observed coincidentally by TRMM overpasses and the GSMNP network from June 2008 to May 2011 are used.

An important challenge in the validation of satellite-derived estimations against ground measurements is the resolution discrepancy of different datasets. Here, all the raingauge measurements within a 2.5 km radius from the center of the PR pixel position for each PR overpass within a selected time-scale are integrated into one. Nevertheless, matching the rain gauge and TRMM PR at its pixel scale (~ 5 km) in space and time introduces uncertainties due to sparse spatial sampling and topographic variations. Despite these drawbacks, comparisons with ground reference gauges constitute a critical component in evaluating the accuracy of the PR estimates of surface precipitation, reflectivity and rain rate.

2.3 Comparison of TRMM PR 2A25 V7 vs. V6

2.3.1 Rainfall detection

As stated earlier, the objective of the revisions implemented in the TRMM PR V7 algorithm was to correct some key deficiencies identified in the V6 algorithm, namely the large underestimation of rain over land relative to ground-based measurements, and the relatively large dependence of rain estimates on the viewing angle (Iguchi et al., 2009). A detailed summary of the major changes in the TRMM PR retrieval algorithm are summarized in Iguchi et al. (2009) and Okamoto et al. (2008). Here, V6 and V7 rain rates from June 2008 to May 2011 corresponding to three years of satellite overpasses over the Southern Appalachians are compared. Note that V6 data

Title Page	
Abstract	Introduction
Conclusions	References
Tables	
Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



are only available up to summer 2011. To evaluate the satellite estimates, rain rate estimates for a given pixel are compared to the observed values at raingauges located within the pixel's fingerprint (~ 5 km diameter). The number of raingauges varies from pixel to pixel, but on average, about 2 gauges can be found in each PR field of

5 view. To determine whether there is an optimal time-scale that reconciles the nearly instantaneous (point in time) satellite-based areal rainfall estimates (pixel scale) with raingauge observations (point in space) with different measurement resolution (TB size), the gauge rain rates are integrated and temporally averaged over a range of time-scales (10–60 min) centered at the time of overpass. When multiple gauges exist
10 in same pixel, the PR measurements are paired separately with different raingauges, hereafter referred to as point-to-pixel comparisons, to increase the sample size and avoid ambiguity associated with the spatial representativeness of the gauges within the pixel. It is assumed that the PR resolution remains constant for both near-nadir and off-nadir inclination angles. To avoid contamination due to the resolution deformation, the
15 PR-RG pairs were segregated into “near-nadir” (scanning inclination angles ranging from 0 to 9°) and “off-nadir” (scanning inclination angles beyond 9°) comparisons. Off-nadir pairs are discarded in some quantitative comparisons to exclude the angle deformation in exploring other sources of error. In this section, the TRMM PR 2A25 products (near surface rain rate, estimated rain rate, average rain between 2 and 4 km,
20 and integral of rain rate from rain top to rain bottom) were analyzed with respect to the independent ground reference rainfall data to examine the performance of the satellite rainfall retrievals. Contingency tables and statistical skill scores are used to evaluate rainfall detectability, and to examine the quantitative relationship between TRMM products and the rain gauge data.

25 The contingency matrices of PR estimates with regard to the gauge observations at 10 min time-scale for all angles (a) and for near-nadir cases only (b) are presented in Table 2. Table 3 provides a summary of detection metrics (i.e. skill scores) based on the counts of hits (YY), misses (NY), false alarms (YN) and correct rejections (NN) inferred from contingency matrices at time-scales ranging from 10 to 60 min:

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



accuracy, frequency bias (FB), probability of detection (POD), false alarm ratio (FAR), probability of false detection (POFD), and threat score (TS). The equations to calculate the skill scores are included in Table 3. In V7 (see Table 2a), the percentage of correct detections (rain events detected simultaneously by the TRMM PR and rain gauges: ~ 1 %) is lower than the number of false alarms (events registered by the TRMM and not recorded by rain gauge: ~ 3 %), but higher than the number of missed detections (events observed by raingauges but missed by TRMM: ~ 0.7 %). The agreement in the number of rejections (when both TRMM and raingauges do not detect rain) is expected. Although the specific quantitative values are different, the skill for near-nadir viewing angles (Table 2b) is nearly the same as that for all cases (Table 2a). Overall, V7 exhibits slightly better detection skill as indicated by the higher probability of correct detection and correct rejection, and lower probability of false alarms and missed detection.

Results from the sensitivity study of the skill scores to time-scale of integration of raingauge observations centered at the time of TRMM overpasses are summarized in Table 3. TB RG3XX data are excluded from this comparison considering its coarse measurement accuracy (1 mm tip^{-1}), and due to the fact that the record length of concurrent V6 and V7 is too short. V6 and V7 exhibit similar skill in accuracy and POFD at different time scales. The FB scores, which indicate whether TRMM has a tendency to underestimate (< 1) or overestimate (> 1) rainfall, show strong sensitivity to the time-scale of integration, followed by the gauge measurement sensitivity. Unbiased results are obtained at the 20 min time scale with skill scores close to perfect (1). The POD scores decrease with the time-scale as expected due to the space-time intermittency of rainfall, and no significant improvements were found in V7 as compared to V6. FAR scores, which count how often the satellite products detect rainfall in the absence of rainfall at the gauges, are slightly lower for V7. Lower scores are observed in RG1XX series in the inner mountain region than in the RG0XX series on the eastern ridges, possibly because of rain gauge measurement threshold (RG0XX: 0.2 mm tip^{-1} , RG1XX: 0.1 mm tip^{-1}) and location (RG0XX: outer ridge, RG1XX: inner ridge). The TS scores, which are sensitive to correct detection and penalize for both missed

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



5 detections and false alarms, are consistently higher in V7 as compared to V6, but only slightly so. Overall, this analysis indicates that V7 improvements in rainfall detection in the Southern Appalachians are minimal relative to V6. This result is consistent with Kirstetter et al. (2013), who reported improvement in QPE but not in detection metrics for 2A25 V7 products relative to V6.

2.3.2 Quantitative precipitation estimation (QPE)

To assess the accuracy of TRMM PR rainfall estimates, histograms of concurrent satellite near surface rain rate (NSR) estimates and gauge observations for the near-nadir cases are displayed in Fig. 4a, using the average raingauge rates at the PR 10 pixel scale. Only non-zero data pairs are used, and thereby large amounts of non-rainy days are excluded from this comparison. The overestimation of the relative frequency of light rainfall ($< 5 \text{ mm h}^{-1}$) results from QPE underestimation of heavier rainfall. Figure 4b suggests that V7 NSR estimates of moderate rainfall rates are higher than estimated surface rain rate (ESR) estimates. In addition, scatterplots 15 and regression analysis were also conducted (not shown here) for ESR and NSR against raingauge observations with similar results to those reported by Prat and Barros (2010a). Compared to V6, a smaller slope is obtained in V7 for these two TRMM products, which is consistent with Seto et al. (2011) who showed that V7 rain rate estimates are larger than in V6 over land and over ocean. The tendency to 20 underestimate rain rate (slope > 1) has been mitigated in V7 with slopes closer to unity, thus indicating better agreement with the reference ground observations. The severe underestimation of heavy rainfall rates in both versions can be attributed at least in part to the lack of areal representativeness of the rain gauges which are point estimates in contrast with the area-averaged ($5 \text{ km} \times 5 \text{ km}$) TRMM rainfall estimates, although 25 the point estimates of rain rate are reduced by using a time-scale of at least 10 min centered at the satellite overpass time.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



3 Statistics and physical basis of PR 2A25 V7 error structure

The physical basis of error structure in V7 is assessed focusing on the space-time variability of error and how it relates to storm structure for underestimation (UND), overestimation (OVR), false alarm (FA) and missed detection (MD) cases.

5 This section is organized by first evaluating the overall quantitative performance of TRMM precipitation estimates compared to gauge data, next examining the rain type, rain rate, and the temporal distribution over a spectrum of time scales (e.g., diurnal and seasonal), and finally exploring the relationship between rainfall error and vertical reflectivity structure.

10 3.1 Surface rain rate classes

Error analysis of TRMM estimates for 1820 PR overpasses in the Southern Appalachians during 2008–2013 is presented here. The reference rainfall is computed in a similar manner to that described earlier by selecting raingauges that lie within a 2.5 km radius around the center of the PR pixel. A sensitivity analysis of bias was 15 conducted on four TRMM PR 2A25 precipitation products: estimated surface rain rate (ESR), near surface rain rate (NSR), 2–4 km averaged rain rate, and integrated column rain rate at various time scales ranging from 10 to 60 min (not shown here). Results for TRMM NSR indicate that bias is minimized at 10 min time scales for RG0XX and RG1XX, and 30 min for RG3XX estimates (RG0XX: ~0.5, RG1XX: ~0.2, RG3XX: ~0).

20 Consequently, 10 and 30 min (centered at the time of overpass) rain rates from RG0XX and RG1XX and RG3XX respectively will be used as reference hereafter. Bias is lowest overall in the inner mountain region (RG1XX). Overestimation of light rainfall leads to large positive bias everywhere, but is much larger on the western ridges (RG3XX) than on the eastern ridges (RG0XX) or in the inner region (RG1XX) consistent with 25 the gauges' measurement resolution (Fig. 5a); for moderate and heavier rain rates ($> 5 \text{ mm h}^{-1}$), the bias is negative, relatively small, and uniformly distributed.

Regression analysis (not shown here) of PR 2A25 V7 rainfall estimates (NSR and ESR) vs. averaged gauge data indicates that for non-null PR-gauge pairs, both estimates derived from PR are in good agreement (regression slope close to one) with the ranges of rainfall intensity associated with the regional hydrometeorological regimes, but the R^2 value is very low for both estimates (NSR: 0.09, ESR: 0.08), which likely results from significant discrepancies for heavy rainfall events.

In order to better understand the quantitative discrepancy between TRMM and RG, the matched PR pixels and raingauge cluster pairs are classified into five distinct categories corresponding to the relative difference (ε) of the 2A25 estimates with respect to rain gauge observations (see Fig. 5b and Table 4). The same classes are used later in the manuscript to examine TRMM reflectivity profiles. In Table 4, regardless of the value of the discrepancy in the rainfall rate estimates, conditions when rain was simultaneously observed by the satellite and raingauges (cases I–III), correspond to approximately 31 % of all cases, while about 50 % report rain for TRMM only (case IV, FA), and about 19 % report rain for rain gauges only (case V, MD). As will be shown later in more detail (see Fig. 7a), a large fraction of FAs and MDs occurs at larger viewing angles ($> 8^\circ$) in which case NUBF uncertainty is expected to be higher. However, the predominance of FAs raises concerns about the reliability of the algorithm in mountainous regions. In order to address this question, an evaluation was conducted by comparing concurrent TB and weighing raingauge observations (not shown here). The analysis indicates that the TB raingauges miss detection of light rainfall events of short duration (< 30 min) with accumulations below their measurement sensitivity, corresponding to circumstances when wind and turbulence under-catch effects can be dominant, but these circumstances are not statistically meaningful. Significant discrepancies between TB and weighing raingauges occur for snowfall conditions when near-surface air temperature is below 0°C , but this is still a small number of events (~ 15 % of FAs) in the region of study. Thus, the problem of excessive spurious detection cannot be explained by TB raingauge measurement limitations alone.

Title Page	
Abstract	Introduction
Conclusions	References
Tables Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



An overview of the organization of error categories as a function of rain type and rain rate is provided in Fig. 6. The rain type (derived in TRMM 2A23 as a parameter to separate convective and stratiform rain) and rain rate categories follow the error classification framework described in Table 4. A large fraction of UND errors (class

5 II) is associated with “probably stratiform” (rain type: 120) rainfall by the TRMM PR algorithm in the winter, but over 60 % correspond to heavy rainfall events (see Table 4, IIa) and most convective rainfall (200 and 210) occurs during the summer. There is a relatively small number of samples overall (the UND 5 year total is only 174, see Table 4). The errors tend to cluster at specific times-of-day that are consistent with
10 the regional hydrometeorology, thus enhancing our confidence on the diurnal cycle and providing a physical basis for attribution. Indeed, a survey of the results shows that the diurnal cycle of UND error peaks during the period 15:00–18:00 EDT (not shown here), a time of day typically associated with daytime solar forcing of convective activity. The histograms of TRMM and raingauge rain rate estimates for UND events
15 (Fig. 6a, right panel) have different skew with TRMM PR NSR estimates mostly below 5 mm h^{-1} , whereas most raingauge observations exceed 10 mm h^{-1} . This indicates that UND errors cannot be corrected using linear bulk adjustments such as bias correction; rather, physical insight is needed to improve retrievals.

Overestimation (OVR, class III) errors are mostly associated with wintertime
20 precipitation classified as “probably stratiform”. Inspection (not shown here) of the apparent annual and diurnal cycles of OVR errors (note again the limited sample size on an hourly basis: 5 year total OVR is 139, Table 4, III) indicates that these errors exhibit a diurnal cycle peaking in January and March during daytime (09:00–15:00 EDT) consistent with the diurnal cycle of rainfall in winter (Fig. 3d). A good overall
25 agreement between the histograms of raingauge and TRMM rain rates (Fig. 6b, right panel) for these events suggests that bias correction of OVR errors should lead to immediate improvements in TRMM PR products. Figure 6c shows that FA (IV) errors are also associated with “stratiform” and “probable stratiform” rainfall throughout the year and light rainfall rates ($< 5 \text{ mm h}^{-1}$).

Overall, the results show that the error budget of TRMM PR NSR estimates is largely controlled by ambiguity in the detection of the bright band (stratiform conditions) for significantly off-nadir observations (significant NUBF effects) for light rainfall conditions in all seasons, and in the wintertime generally.

5 3.2 Space-time error structure

A survey of precipitation detectability skill in the TRMM PR 2A25 V7 from the point of view of FA and MD errors is presented in Fig. 7. The impact of observing geometry is explored in Fig. 7a, focusing specifically on the interplay between complex orography, satellite orbit, and the viewing angle for each pixel in the satellite's swath. Detection 10 skill depends on the orbit and the specific trajectory of the satellite over the region. For the eastern ridges (RG0XX series), a large portion of FA occurs at small angles, in particular $\sim 5^\circ$, reflecting the geometry of the overpasses and the terrain underneath as the satellite approaches the Appalachians; in the inner ridges (RG1XX series), more cases are observed around 8 and 11° ; for the western ridges (RG3XX series), 15 almost all cases are registered at off-nadir angles ($\geq 9^\circ$), especially around 11° . Note that at larger viewing angles (RG1XX and RG3XX) the radar signal also travels through a longer trajectory, and thus an extended liquid water path. Figure 7b and c display the diurnal and seasonal distributions of FAs and MDs corresponding to rainfall 20 classes IV and V (Table 3). Note the strong diurnal cycle of FAs peaking at mid-day and early afternoon, especially in the case of the inner region (blue color). The seasonal cycle shows that FAs in the eastern ridges and western ridges are relatively uniformly distributed throughout the year, whereas they peak in the summer in the inner ridges. Furthermore, the number of FAs and MDs in the inner region is very high and 25 dominates overall statistics. Close examination of the diurnal cycle reveals that most FAs in the summer occur in the afternoon (12:00–18:00 EDT) corresponding to diurnal convective activity, while winter cases follow the diurnal cycle of precipitation pattern peaking in the early afternoon (not shown here).

Among all MD cases, most are classified as “no rain” and some are categorized as “other”, whereas only 3 are classified as stratiform, and none are considered convective (not shown here). Figure 7b and c for MDs (class V) show a strong diurnal cycle with most occurring around 12:00–15:00 EDT and a seasonal trend with a large proportion occurring during the cold season, which is attributed to the frequent presence of fog and low level clouds in the fall and winter seasons, especially in the inner region (RG1XX). The very small count of MDs in the western ridges (RG3XX) is explained in part by the coarse gauge sensitivity (1 mm tip^{-1} , 30 min time-scale), and because fog seldom develops over this region due to strong winds. Dense and deep fog formation during the fall and winter seasons in the inner mountain region establishes conditions for enhanced stratiform rainfall via seeder-feeder mechanisms at low levels ($< 1 \text{ km}$) that is measured by the gauges in the inner mountain region (e.g. Wilson and Barros, 2014), but cannot be detected by the TRMM PR due to the topography and automatic ground clutter correction. In addition, the minimum detectable signal of TRMM PR is approximately 18 dBZ (0.4 mm h^{-1}) (Yang and Nesbitt, 2014; Heymsfield et al., 2000), and thus weak radar reflectivity for light rainfall can also partly explain MD statistics.

3.3 TRMM PR reflectivity profile and rainfall detectability

Here, we examine the relationship between rainfall detectability and the vertical reflectivity structure of TRMM PR. To facilitate the comparison of various types of precipitation including the distinction between convective and stratiform precipitation by TRMM-derived criteria, three categories of reflectivity profiles have been identified (see Fig. 8): (1) stratiform with bright band; (2) stratiform without bright band; and (3) convective. Note that the reflectivity profile is used in the rain classification algorithm, in addition to the precipitation rate estimation proper.

For stratiform UND cases (see Fig. 8a and b, class II), the reflectivity gradually decreases with altitude and the median values between 2 and 4 km are in the range of 20–30 dBZ approximately. Some UND cases (see the red outliers in Fig. 8b, II) display high cloud tops (up to 9 km), consistent with the heavy rainfall events in Fig. 6a that

Title Page	
Abstract	Introduction
Conclusions	References
Tables Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

are indicative of warm rain with embedded convection. Reflectivity data below 2 km are often removed due to ground clutter contamination. In Fig. 8a (III), the mean reflectivity profile shows a decreasing tendency with height (from 2.75 km toward the ground surface), suggesting that summertime OVR errors are likely linked to light rainfall evaporating before it reaches the ground (see rain type: 100 in Fig. 6b). Compared to the UND (II) cases (left panels in Fig. 8), the reflectivity profiles for OVR cases show steeper positive gradients at lower levels, in particular below 3 km, and more measurements are available below 2 km altitude in the convective cases (see Fig. 8b and c, III). The downward decreasing trend of reflectivity toward the surface is also evident in the reflectivity profiles of FAs for stratiform conditions with and without bright band (see Fig. 8a, IV), which can also be explained by raindrop evaporation during the summer (see rain type: 100 in Fig. 6c). Compared to the UND and OVR cases in Fig. 8a and b, the FA stratiform reflectivity profiles decrease more gradually with altitude at lower levels. Note the rapid reflectivity increase (35–50 dBz) below 2 km in the convective cases (IV, Fig. 8c). This feature will be further discussed next in the context of error diagnosis and interpretation.

4 Physical context of retrieval error

In this section, we focus primarily on diagnosing the potential sources of errors in the retrieval algorithm by studying selected representative TRMM overpasses with substantial discrepancies between 2A25 V7 NSR estimates and raingauge observations, including isolated thunderstorms, mesoscale convective systems, cold fronts, hail events, and snow showers. Figure 9 shows the TRMM overpass in the region of study for each of the selected cases overlaid on the base reflectivity fields from the KMRX and KGSP NWS (National Weather Service) radars respectively in Knoxville, TN and Greer, SC.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



4.1 Local underestimation (II)

Figure 10a depicts a vertical cross-section from the TRMM overpass at 15:08 EDT during a tornado outbreak event (<http://earthobservatory.nasa.gov/NaturalHazards>) on 2 March 2012 as the primary squall line was moving over the region (Fig. 9a). After applying the ground clutter correction, the near surface rain rate of 4.5 mm h^{-1} at the location marked by the black arrow (viewing angle 7.6°) is estimated at 2.25 km altitude. The collocated raingauge (RG104, Fig. 1) is placed at a much lower elevation ($\sim 1.6 \text{ km}$) and records very heavy rainfall intensity (60 mm h^{-1}). In the presence of low level fog and orographic clouds, this difference in elevation ($\sim 650 \text{ m}$) is sufficient to explain the one order of magnitude difference in rainfall intensities by seeder-feeder enhanced coalescence (Wilson and Barros, 2014). The PR reflectivity profile extends up to 8 km in altitude, and there is no indication of bright band or large ice-scattering aloft; nevertheless, this pixel is classified as “probably stratiform” (rain type: 120) based on the H method because of the weak echo. In addition to the ground-clutter filter that eliminates a significant fraction of the measured reflectivity profile at lower levels, the incorrect classification of shallow convection as probably stratiform is also due in part to the effect of spatial averaging over the PR’s relatively coarse horizontal resolution, a smoothing effect that is amplified at off-nadir viewing angles. Similar results were reported by Heymsfield et al. (2000) who found that convective precipitation often falls from cells smaller than the PR footprint and its average reflectivity tends to be underestimated due to the NUBF effects, consequently leading to the rain-type classification being artificially biased toward the stratiform type. Nevertheless, an examination of the TRMM reflectivity cross-section in Fig. 10a as well as PR 4 km reflectivity fields (not shown here) clearly reveals the substantial advantage of the satellite based radar in mountainous regions, where the terrain blocks the monitoring effectiveness of the ground radars (see Fig. 9a).

Figure 10b and c display the vertical cross-section of reflectivity and rain rate of two adjacent scans on 8 July 2011 15:51 EDT associated with the presence of small

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



bands and clusters of severe summer thunderstorms in the region of interest at the time of overpass (Fig. 9b). Two selected pixels (denoted as pixel 1 on one scan and pixel 2 on the other) observed at $\sim 12.1^\circ$ angle among those corresponding to the high altitude outliers (red + signs) in Fig. 8c (II) are highlighted here. Note the steep increase in profile reflectivity at altitudes above 4 km followed by a decrease with height that indicates the existence of a bright band; along with high low-level reflectivities, the vertical structure of reflectivity suggests that over the western slopes of the Appalachians high precipitation rates were produced by a stratiform system with embedded convection. Although gauges RG303 (40 mm h^{-1}) and RG311 (60 mm h^{-1}) are very close together (Fig. 1), RG303 is located at a higher elevation ($\sim 1.5 \text{ km}$) on the wall of a valley running nearly perpendicular to the western ridge of the Southern Appalachians, whereas RG311 is at lower elevation ($\sim 1.25 \text{ km}$) in the valley proper. The TRMM near surface estimate for both scans is between 22 and 25 mm h^{-1} . The effect of the ground clutter correction is evident in Fig. 10b and c. In addition, note the relative location of the gauges at the boundary between two columns, one with low to moderate reflectivity and one with very high reflectivity in Fig. 10b and c. Because the clusters of shallow embedded convection are very small, averaging significantly reduces the TRMM estimated rainfall and reduces spatial variability. Therefore, TRMM appears to underestimate rainfall from the isolated small-scale summer convective cells, consistent with previous studies demonstrating the underestimation of convection over land by the TRMM PR algorithm (Iguchi et al., 2009; Rasmussen et al., 2013). Among the two raingauge observations in pixel 2, more intense rainfall is observed in the nearby valley (RG311) than on the ridge (RG303), and the PR reflectivity in the valley is much higher than surrounding ridges. Despite horizontal separation in addition to the elevation difference, the low level enhancement of rainfall at RG311 compared to RG303 is consistent with the increased depth of the precipitation column thus enhanced raindrop growth by coalescence (Prat and Barros, 2010b; Wilson and Barros, 2014). In such circumstances, orographic rainfall does not increase with elevation as in the canonical model. This event highlights detectability challenges over

[Title Page](#)
[Abstract](#) [Introduction](#)
[Conclusions](#) [References](#)
[Tables](#) [Figures](#)
[◀](#) [▶](#)
[◀](#) [▶](#)
[Back](#) [Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)



mountainous regions at coarse horizontal scales (e.g., high spatial variability due to the complexity of the physics of orographic enhancement cannot be resolved). The effective resolution deformation at far-range viewing angles may further contribute to the large underestimation.

5 4.2 Local overestimation (III)

At the time of the TRMM overpass on 18 August 2011 18:53 EDT, there were small convective clusters and isolated thunderstorms scattered across the region (Fig. 9c). The KMRX radar located in Knoxville, TN shows no activity over the Appalachians, but the KGSP radar located in Greer, SC does show activity over the eastern ridges, 10 which is consistent with the shallow isolated cells detected by the TRMM PR shown in Fig. 11a. Classified as “certainly convective” (the reflectivity profiles show no signal of ice scatter aloft), the retrieved near surface rain rate overestimates the observed precipitation at RG005 (~ 1.52 km; 12 mm h^{-1}) and RG008 (~ 1.74 km; 18 mm h^{-1}) by nearly 60 % on average (viewing angle is 5.2°). Interestingly, despite very different 15 vertical structure including the bright band effects for the UND (II) case on 8 July 2011 discussed in Sect. 4.1, the near surface precipitation estimates derived from TRMM for both cases are about the same ($\sim 24 \text{ mm h}^{-1}$). However, the OVR(III) problem could be related to the relative position of the two gauges at the edge of the isolated convective cluster (Fig. 9c) as the satellite moves over the orography, in which case NUBF artifacts 20 should lead to overestimation of reflectivity over the gauges outside of the convective cluster. Indeed, the TRMM PR reflectivity between 2 and 4 km is in the 40–50 dBz range, whereas the base-reflectivity from KGSP at gauge locations is in the 20–30 dBz range.

Two other relevant OVR (III) cases coincided with the passage of a cold front with 25 a leading pre-frontal convection line in the Piedmont on 21 January 2012 that was captured by the TRMM overpass at 12:05 EDT (Fig. 9d), and a pattern of disorganized thunderstorm activity ahead of the propagation of a westerly convective system on 17 April 2012 with overpass at 15:09 EDT (Fig. 9e). The winter system produced major

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)





winter snow and ice precipitation from western North Carolina to New York State. In the reflectivity cross-section (Fig. 11b), the vertical profiles exhibit a sharp decrease of about 16 dBz in reflectivity between 2 and 3 km. The TRMM PR rain rate at ~ 2 km and the value observed at RG109 in the inner mountain region (~ 1.5 km, Fig. 1) are 26.3 and 10.8 mm h^{-1} respectively, resulting in an overestimation of 140 %. However, raingauge measurements are expected to exhibit significant errors (\sim up to 60 %) for frozen precipitation, and even higher for snow in the presence of strong winds. Since this event produced significant snow accumulations and frozen rain, error attribution is an ambiguous proposition.

10 Both ground-based radars (KMRX, KGSP) miss the deep isolated convective activity in the mountains that is detected by the TRMM PR (Fig. 11c). The vertical profiles for pixel 1 and 2 over the locations of RG001 and RG010 on the eastern slopes of the Appalachians show large reflectivity (> 30 dBz) up to 6–7 km, suggesting the presence of ice/hail aloft. Records held by the State Climate Office of North Carolina (<http://www.nc-climate.ncsu.edu/lsrcdb/index.php>) reveal multiple reports of intense hail over large areas in the Southern Appalachian Mountains at the time. However, raingauge records indicate only 1.2 and 9 mm h^{-1} compared to 25.8 and 36.5 mm h^{-1} from TRMM estimates for pixel 2 (RG001) and pixel 1 (RG010) respectively. Again, this reflects the deficiency of tipping-bucket gauges to capture frozen precipitation, and 15 hail in particular. Conditions in the two pixels are classified as “certainly convective” because of the high horizontal reflectivity gradients. The TRMM PR demonstrates good 20 capability to detect this hail-producing storm.

4.3 Local false alarms (IV)

25 FA (IV) errors can result from NUBF effects for certain viewing angles, terrain and weather configurations due to coarse resolution leading to spatial deformation in reflectivity similar to the problems leading to overestimation in the August 2011 case (Fig. 11a) discussed above. Such errors could result from non-precipitating ice clouds, or from light snowfall under windy conditions that is missed by the raingauges.

Indeed, blizzard conditions were present for the TRMM overpass on 24 January 2010 19:54 EDT (Fig. 9f). Note the extremely large reflectivity values in the lowest levels in the cross-section on the western ridges of the Appalachians displayed in Fig. 12. The vertical profiles exhibit large increments of reflectivity (22 dBz) and rain rate (47 mm h^{-1}) below 4 km. The pixel identified by the black arrow is classified as “certainly convective” and the retrieved near surface rain rate is $\sim 50 \text{ mm h}^{-1}$ at 1.75 km elevation, whereas the nearest raingauge (RG302, at 1.86 km) does not register precipitation. According to winter storm reports from State Climate Office of North Carolina (http://www.nc-climate.ncsu.edu/climate/winter_wx/database.php), snow showers developed across the mountains on 12 January 2010, resulting in ice and snow accumulation in the lower valleys. The substantial increase in reflectivity at lower levels in the TRMM PR profiles likely results from frozen precipitation particles in cold clouds and/or the accumulated ice and snow in the valleys detected by TRMM.

5 Summary and conclusions

TRMM PR 2A25 QPE products were spatiotemporally matched and compared with ground gauges in the Southern Appalachian Mountains over a 5-year period 2008–2013, which provides a statistically large sample of comparisons performed at PR-pixel resolution. The quantitative comparisons yield favorable agreement of the PR with raingauge observations, with clear advantage over remote ground-based operating radars, but errors can be significant depending on the underlying rainfall regimes.

First, V7 and V6 QPEs were inter-compared in order to assess the impact of retrieval algorithm changes such as reintroducing the NUBF correction, recalibration of the $Z-R$ relationship over land, and attenuation correction of the PR radar signal. Although a small improvement from V6 to V7 was identified at high to moderate rainfall rates, the results do not show significant differences in warm-season precipitation detection skill.

Based on the TRMM rain-type classification, characteristic features in the vertical structure of reflectivity and retrieved rainfall profiles that can be associated with distinct

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



error characteristics under various precipitation regimes were identified. Regardless of error type, a significant fraction of estimation errors occurs when rainfall is classified as “probably stratiform”, which is hypothesized to result from the compounded effect of radar sensitivity and NUBF that renders the PR detectability of bright band unreliable for small-scale systems, especially at far-viewing angles. The statistics of FAs are highly sensitive to the measurement threshold of the raingauges (TB tip size) and the phase of precipitation. Nevertheless, the errors exhibit a relatively constant rate of occurrence throughout the year, a strong diurnal cycle with early and mid-afternoon peaks, a large skew of the rain rates toward low values ($< 5 \text{ mm h}^{-1}$), and the highest incidence is in the inner mountain region. This suggests that averaging at the coarse resolution of the PR pixel eliminates the signature of the small-scale complex structure of isolated orographic convection and localized multi-layered clouds and fog that are dominant in the region, and thus explains the high number of FA counts using the point-to-pixel strategy used here.

15 MDs show a strong annual cycle occurring predominantly during the cold season and into the spring with very low values in the summer. The diurnal cycle indicates that MDs appear linked to fog and multi-tiered low-level clouds especially in the inner mountain region, which the TRMM PR products fail to detect due to the ground clutter correction. The high reflectivity sensitivity threshold of the PR can also result in failure
20 to detect weak echoes, thus missing detection of light rainfall. Because ground-clutter contamination is not a problem inherent to the TRMM PR alone, but it is rather a general problem for all space-based radars such as the DPR (Dual-Polarization Radar) on the GPM satellite, and because of the importance of persistent light rainfall in mountainous regions, there is a critical need to develop retrieval startegies that can capture the
25 vertical structure of low-level reflectivity and the associated rainfall in complex terrain. This can be accomplished for instance by integrating operational satellite retrieval algorithms with simple physical models targeting local processes (e.g. Prat and Barros, 2009; Wilson and Barros, 2014).



Albeit of low frequency, heavy precipitating events have significant hydrologic impact leading to extreme floods and landslides in the region. Six representative case studies with substantial discrepancies between TRMM and gauge references provide insight into the characteristics of PR rainfall retrieval errors that need to be taken into consideration for applications in complex terrain. The results show that TRMM tends to underestimate small-scale winter storms and embedded convection in the summer, which can be attributed to the averaging effects of NUBF at TRMM PR coarse horizontal resolution as well as misclassification of convective systems as stratiform, especially at large incidence angle. Precipitation from warm season convective systems smaller than the PR footprint is either underestimated or overestimated depending on the size of the system footprint and the depth of active convection. In particular, TRMM tends to underestimate rainfall from embedded convection, and overestimates rainfall from isolated small-scale shallow convection when, and where it is detected. Cold-season mixed-phase precipitation (i.e., hail, ice falling through melting layers, etc.) is associated with strong scattering signal from ice crystals and can be misclassified as “certain convective”. Mixed-phase precipitation cannot be estimated by the convective $Z-R$ (reflectivity–rainfall) relationship in the algorithm, leading to the severe overestimation or false alarm errors in the winter and spring seasons.

Diagnostic analysis focusing on the characterization of the physical basis of QPE error provides a framework for error source attribution and subsequent correction or mitigation of satellite retrievals generally and can be applied elsewhere. Based on the results presented here, the observing strategy devised for IPHEx placed strong emphasis on documenting the spatial and temporal heterogeneity of rainfall microphysics conditional on time-of-day, prevalent hydrometeorological regime, and topographic and physiographic context (Barros et al., 2014). Special emphasis was placed on the vertical structure of precipitation in the lower troposphere. Analysis of IPHEx results is ongoing.

Acknowledgements. This research was funded in part by NASA Grant NNX13AH39G with the third author A. P. Barros.

Title Page	
Abstract	Introduction
Conclusions	References
Tables Figures	
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Amitai, E., Llort, X., and Sempere-Torres, D.: Comparison of TRMM radar rainfall estimates with NOAA next-generation QPE, *J. Meteorol. Soc. Jpn.*, 87A, 109–118, doi:10.2151/jmsj.87A.109, 2009.

5 Amitai, E., Unkrich, C. L., Goodrich, D. C., Habib, E., and Thill, B.: Assessing satellite-based rainfall estimates in semiarid watersheds using the USDA-ARS Walnut Gulch Gauge Network and TRMM PR, *J. Hydrometeorol.*, 13, 1579–1588, doi:10.1175/jhm-d-12-016.1, 2012.

10 Barros, A. P.: Orographic precipitation, freshwater resources, and climate vulnerabilities in mountainous regions, in: *Climate Vulnerability: Understanding and Addressing Threats to Essential Resources*, Elsevier Inc., Academic Press, Waltham, Massachusetts, 57–78, 2013.

Barros, A. P. and Tao, K.: A space-filling algorithm to extrapolate narrow-swath instantaneous TRMM microwave rain-rate estimates using thermal IR imagery, *J. Atmos. Ocean. Tech.*, 25, 1901–1920, doi:10.1175/2008jtecha1019.1, 2008.

15 Barros, A. P., Joshi, M., Putkonen, J., and Burbank, D. W.: A study of the 1999 monsoon rainfall in a mountainous region in central Nepal using TRMM products and rain gauge observations, *Geophys. Res. Lett.*, 27, 3683–3686, doi:10.1029/2000gl011827, 2000.

20 Barros, A. P., Petersen, W., Schwaller, M., Cifelli, R., Mahoney, K., Peters-Liddard, C., Shepherd, M., Nesbitt, S., Wolff, D., Heymsfield, G., Starr, D., Anagnostou, E., Gourley, J. J., Kim, E., Krajewski, W., Lackman, G., Lang, T., Miller, D., Mace, G., Petters, M., Smith, J., Tao, W.-K., Tsay, S.-C., and Zipser, E.: NASA GPM-Ground Validation: Integrated Precipitation and Hydrology Experiment 2014 Science Plan, Duke University, Durham, NC, doi:10.7924/G8CC0XMR, 2014.

Bindlish, R. and Barros, A. P.: Multifrequency soil moisture inversion from SAR measurements with the use of IEM, *Remote Sens. Environ.*, 71, 67–88, doi:10.1016/S0034-4257(99)00065-6, 2000.

25 Chen, Y., Ebert, E. E., Walsh, K. J. E., and Davidson, N. E.: Evaluation of TRMM 3B42 precipitation estimates of tropical cyclone rainfall using PACRAIN data, *J. Geophys. Res.-Atmos.*, 118, 2184–2196, doi:10.1002/jgrd.50250, 2013.

30 Durden, S. L., Haddad, Z. S., Kitayakara, A., and Li, F. K.: Effects of nonuniform beam filling on rainfall retrieval for the TRMM precipitation radar, *J. Atmos. Ocean. Tech.*, 15, 635–646, 1998.

Title Page	Abstract	Introduction
Conclusions	References	
Tables	Figures	
◀	▶	
◀	▶	
Back	Close	
Full Screen / Esc		
	Printer-friendly Version	
	Interactive Discussion	



Fisher, B. L.: Climatological validation of TRMM TMI and PR monthly rain products over Oklahoma, *J. Appl. Meteorol.*, 43, 519–535, doi:10.1175/1520-0450(2004)043<0519:CVOTTA>2.0.CO;2, 2004.

5 Heymsfield, G. M., Geerts, B., and Tian, L.: TRMM precipitation radar reflectivity profiles as compared with high-resolution airborne and ground-based radar measurements, *J. Appl. Meteorol.*, 39, 2080–2102, doi:10.1175/1520-0450(2001)040<2080:TPRRPA>2.0.CO;2, 2000.

10 Iguchi, T., Kozu, T., Meneghini, R., Awaka, J., and Okamoto, K.: Rain-profiling algorithm for the TRMM precipitation radar, *J. Appl. Meteorol.*, 39, 2038–2052, doi:10.1175/1520-0450(2001)040<2038:RPAFTT>2.0.CO;2, 2000.

Iguchi, T., Kozu, T., Kwiatkowski, J., Meneghini, R., Awaka, J., and Okamoto, K. I.: Uncertainties in the rain profiling algorithm for the TRMM precipitation radar, *J. Meteorol. Soc. Jpn.*, 87A, 1–30, doi:10.2151/jmsj.87A.1, 2009.

15 Kirstetter, P.-E., Hong, Y., Gourley, J. J., Schwaller, M., Petersen, W., and Zhang, J.: Comparison of TRMM 2A25 products, version 6 and version 7, with NOAA/NSSL ground radar-based national mosaic QPE, *J. Hydrometeorol.*, 14, 661–669, doi:10.1175/jhm-d-12-030.1, 2013.

Kozu, T. and Iguchi, T.: Nonuniform beamfilling correction for spaceborne radar rainfall measurement: implications from TOGA COARE radar data analysis, *J. Atmos. Ocean. Tech.*, 16, 1722–1735, doi:10.1175/1520-0426(1999)016<1722:NBCFSR>2.0.CO;2, 1999.

20 Kozu, T., Kawanishi, T., Kuroiwa, H., Kojima, M., Oikawa, K., Kumagai, H., Okamoto, K., Okumura, M., Nakatsuka, H., and Nishikawa, K.: Development of precipitation radar onboard the Tropical Rainfall Measuring Mission (TRMM) satellite, *IEEE T. Geosci. Remote*, 39, 102–116, doi:10.1109/36.898669, 2001.

25 Lang, T. J. and Barros, A. P.: An investigation of the onsets of the 1999 and 2000 monsoons in central Nepal, *Mon. Weather Rev.*, 130, 1299–1316, 2002.

Liao, L. and Meneghini, R.: Validation of TRMM precipitation radar through comparison of its multiyear measurements with ground-based radar, *J. Appl. Meteorol. Clim.*, 48, 804–817, doi:10.1175/2008jamc1974.1, 2009.

30 Meneghini, R., Iguchi, T., Kozu, T., Liao, L., Okamoto, K., Jones, J. A., and Kwiatkowski, J.: Use of the surface reference technique for path attenuation estimates from the TRMM precipitation radar, *J. Appl. Meteorol.*, 39, 2053–2070, doi:10.1175/1520-0450(2001)040<2053:UOTSRT>2.0.CO;2, 2000.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)





Nakamura, K.: Biases of rain retrieval algorithms for spaceborne radar caused by nonuniformity of rain, *J. Atmos. Ocean. Tech.*, 8, 363–373, 1991.

Nesbitt, S. W., Zipser, E. J., and Cecil, D. J.: A census of precipitation features in the tropics using TRMM: radar, ice scattering, and lightning observations, *J. Climate*, 13, 4087–4106, doi:10.1175/1520-0442(2000)013<4087:ACOPFI>2.0.CO;2, 2000.

Okamoto, K., Meneghini, R., Iguchi, T., Awaka, J., and Shimizu, S.: TRMM PR algorithms version 6 status and plans for version 7, in: *Asia-Pacific Remote Sensing of the Atmosphere and Clouds II*, November 17, Noumea, New Caledonia, edited by: Stephens, G. L. and Nakajima, T. Y., *Proc. SPIE* 7152, 715208, doi:10.1117/12.804932, 2008.

Prasetya, R., As-syakur, A. R., and Osawa, T.: Validation of TRMM precipitation radar satellite data over Indonesian region, *Theor. Appl. Climatol.*, 112, 575–587, doi:10.1007/s00704-012-0756-1, 2012.

Prat, O. P. and Barros, A. P.: Exploring the transient behavior of $Z-R$ relationships: implications for radar rainfall estimation, *J. Appl. Meteorol. Clim.*, 48, 2127–2143, doi:10.1175/2009JAMC2165.1, 2009.

Prat, O. P. and Barros, A. P.: Assessing satellite-based precipitation estimates in the Southern Appalachian mountains using rain gauges and TRMM PR, *Adv. Geosci.*, 25, 143–153, doi:10.5194/adgeo-25-143-2010, 2010a.

Prat, O. P. and Barros, A. P.: Ground observations to characterize the spatial gradients and vertical structure of orographic precipitation – experiments in the inner region of the Great Smoky Mountains, *J. Hydrol.*, 391, 141–156, doi:10.1016/j.jhydrol.2010.07.013, 2010b.

Rasmussen, K. L., Choi, S. L., Zuluaga, M. D., and Houze, R. A.: TRMM precipitation bias in extreme storms in South America, *Geophys. Res. Lett.*, 40, 3457–3461, doi:10.1002/grl.50651, 2013.

Seto, S., Iguchi, T., and Meneghini, R.: Comparison of TRMM PR V6 and V7 Focusing Heavy Rainfall, in: *Geoscience and Remote Sensing Symposium (IGARSS), 2011 IEEE International*, Vancouver, Canada, 24–29 July, 2582–2585, 2011.

Tao, J. and Barros, A. P.: Prospects for flash flood forecasting in mountainous regions – an investigation of tropical storm Fay in the Southern Appalachians, *J. Hydrol.*, 506, 69–89, doi:10.1016/j.jhydrol.2013.02.052, 2013.

Tao, J. and Barros, A. P.: Coupled prediction of flood response and debris flow initiation during warm- and cold-season events in the Southern Appalachians, USA, *Hydrol. Earth Syst. Sci.*, 18, 367–388, doi:10.5194/hess-18-367-2014, 2014.

Tao, K. and Barros, A. P.: Using fractal downscaling of satellite precipitation products for hydrometeorological applications, *J. Atmos. Ocean. Tech.*, 27, 409–427, doi:10.1175/2009jtecha1219.1, 2010.

Viviroli, D., Archer, D. R., Buytaert, W., Fowler, H. J., Greenwood, G. B., Hamlet, A. F., Huang, Y.,
5 Koboltschnig, G., Litaor, M. I., López-Moreno, J. I., Lorentz, S., Schädler, B., Schreier, H.,
Schwaiger, K., Vuille, M., and Woods, R.: Climate change and mountain water resources:
overview and recommendations for research, management and policy, *Hydrol. Earth Syst.
Sci.*, 15, 471–504, doi:10.5194/hess-15-471-2011, 2011.

Wang, J. and Wolff, D. B.: Evaluation of TRMM ground-validation radar-rain errors using rain
10 gauge measurements, *J. Appl. Meteorol. Clim.*, 49, 310–324, doi:10.1175/2009jamc2264.1,
2010.

Wilson, A. M. and Barros, A. P.: An investigation of warm rainfall microphysics in the Southern
Appalachians: orographic enhancement via low-level seeder–feeder interactions, *J. Atmos.
Sci.*, 71, 1783–1805, doi:10.1175/jas-d-13-0228.1, 2014.

15 Wolff, D. B. and Fisher, B. L.: Comparisons of instantaneous TRMM ground validation and
satellite rain-rate estimates at different spatial scales, *J. Appl. Meteorol. Clim.*, 47, 2215–
2237, doi:10.1175/2008jamc1875.1, 2008.

Yang, S. and Nesbitt, S. W.: Statistical properties of precipitation as observed by the TRMM
precipitation radar, *Geophys. Res. Lett.*, 41, 5636–5643, doi:10.1002/2014gl060683, 2014.

Title Page	Abstract	Introduction
Conclusions	Tables	Figures
Tables	Figures	
◀	▶	
◀	▶	
Back	Close	
Full Screen / Esc		

Printer-friendly Version
Interactive Discussion





Table 1. Inventory of long-term raingauges in the Pigeon River Basin including the Great Smoky Mountains National Park (GSMNP) in the Southern Appalachians used in this study.

Raingauge	Latitude	Longitude	Elevation (m)	Series
RG001	35.4	-82.91	1156	RG0XX Eastern Ridge
RG002	35.43	-82.97	1731	
RG003	35.38	-82.92	1609	
RG004	35.37	-82.99	1922	
RG005	35.41	-82.96	1520	
RG008	35.38	-82.97	1737	
RG010	35.46	-82.95	1478	
RG100	35.59	-83.07	1495	RG1XX Inner Ridge
RG101	35.58	-83.09	1520	
RG102	35.56	-83.1	1635	
RG103	35.55	-83.12	1688	
RG104	35.55	-83.09	1587	
RG105	35.63	-83.04	1345	
RG106	35.43	-83.03	1210	
RG107	35.57	-82.91	1359	
RG108	35.55	-82.99	1277	
RG109	35.5	-83.04	1500	
RG110	35.55	-83.15	1563	
RG111	35.73	-82.95	1394	
RG112	35.75	-82.96	1184	
RG300	35.73	-83.22	1558	RG3XX Western Ridge
RG301	35.71	-83.26	2003	
RG302	35.72	-83.25	1860	
RG303	35.76	-83.16	1490	
RG304	35.67	-83.18	1820	
RG305	35.69	-83.13	1630	
RG306	35.75	-83.17	1536	
RG307	35.65	-83.2	1624	
RG308	35.73	-83.18	1471	
RG309	35.68	-83.15	1604	
RG310	35.7	-83.12	1756	
RG311	35.77	-83.14	1036	

Table 2. Contingency matrices for TRMM 2A25 V7 surface rain rate and 10 min raingauge rain rates: (a) all cases; and (b) near-nadir cases. Counts are expressed as a percentage of the total number of observations. Values in parentheses are for V6. The 10 min time scale is centered over the time of the satellite overpass during June 2008–May 2011.

(a)		All rain gauges (0XX and 1XX)		
		Yes	No	Tot.
TRMM PR 2A25	Yes	1.18 (1.12)	2.73 (3)	3.91 (4.12)
	No	0.74 (0.71)	95.35 (95.17)	96.09 (95.88)
	Tot.	1.93 (1.83)	98.07 (98.17)	100 (100)

(b)		All rain gauges (0XX and 1XX)		
		Yes	No	Tot.
TRMM PR 2A25	Yes	2.23 (2.01)	2.83 (3.12)	5.06 (5.13)
	No	1.24 (1.28)	93.7 (93.59)	94.94 (94.87)
	Tot.	3.47 (3.29)	96.53 (96.71)	100 (100)

	Time window (min)												Perfect Score
	10 min			20 min			30 min			60 min			
	All	0XX	1XX	All	0XX	1XX	All	0XX	1XX	All	0XX	1XX	
Accuracy ^a	0.97 (0.96)	0.96 (0.96)	0.97 (0.97)	0.96 (0.96)	0.96 (0.96)	0.97 (0.96)	0.96 (0.96)	0.96 (0.96)	0.96 (0.96)	0.95 (0.94)	0.94 (0.94)	0.95 (0.95)	1
FB ^b	1.5 (1.65)	1.7 (1.84)	1.39 (1.55)	1.02 (1.12)	1.05 (1.12)	1.01 (1.12)	0.83 (0.89)	0.83 (0.87)	0.82 (0.91)	0.59 (0.63)	0.56 (0.59)	0.6 (0.66)	1
POD ^c	0.61 (0.61)	0.6 (0.58)	0.61 (0.62)	0.55 (0.55)	0.55 (0.54)	0.55 (0.56)	0.49 (0.49)	0.51 (0.5)	0.48 (0.49)	0.4 (0.4)	0.42 (0.4)	0.39 (0.4)	1
FAR ^d	0.59 (0.63)	0.65 (0.68)	0.56 (0.6)	0.46 (0.51)	0.47 (0.52)	0.45 (0.5)	0.41 (0.45)	0.39 (0.43)	0.42 (0.46)	0.32 (0.36)	0.26 (0.31)	0.36 (0.39)	0
POFD ^e	0.02 (0.03)	0.03 (0.03)	0.02 (0.03)	0.02 (0.02)	0.02 (0.02)	0.02 (0.02)	0.02 (0.02)	0.02 (0.02)	0.02 (0.02)	0.01 (0.02)	0.01 (0.01)	0.01 (0.02)	0
TS ^f	0.32 (0.3)	0.28 (0.26)	0.35 (0.32)	0.37 (0.35)	0.37 (0.34)	0.38 (0.36)	0.37 (0.35)	0.38 (0.36)	0.36 (0.34)	0.34 (0.33)	0.36 (0.34)	0.32 (0.32)	1

^a Accuracy = [YY + NN] / Total.

^b Frequency Bias = FB = [YY + YN] / [YY + NY].

^c Probability of detection = POD = YY / [YY + NY].

^d False alarm ratio = FAR = YN / [YY + YN].

^e Probability of False Detection = POFD = YN / [NN + YN].

^f Threat Score = TS = YY / [YY + NY + YN].

11169

Title Page
Abstract Introduction
conclusions References
Tables Figures
◀ ▶
◀ ▶
Back Close
Full Screen / Esc
Printer-friendly Version
Interactive Discussion



Table 4. Classification of TRMM 2A25 reflectivity profiles as a function of the difference (ε) $[\text{RR_TRMM2A25} - \text{RR_RG}] / \text{RR_RG}$ that represents the relative error of the 2A25 estimates with respect to the raingauge observations. The time-scale of integration is 10 min for RG0XX and RG1XX and 30 min for RG3XX, which corresponds to the minimum error bias for the period of record. Bold values correspond to $\varepsilon = 0.5$.

Class	Diff (ε) = $[\text{RR_TRMM} - \text{RR_RG}] / \text{RR_RG}$		
	$\varepsilon = 0.25$	$\varepsilon = 0.50$	$\varepsilon = 0.75$
I : $\text{Abs}(\text{Diff}) < \varepsilon$	126	237	368
II : $\text{Diff} < -\varepsilon$	259	174	70
IIa : $\text{Diff} < -\varepsilon$ and $\text{RR_RG} > 7 \text{ mm h}^{-1}$	99	76	45
III : $\text{Diff} > \varepsilon$	165	139	112
IIIa : $\text{Diff} > \varepsilon$ and $\text{RR_TRMM} > 7 \text{ mm h}^{-1}$	50	43	35
IV : $\text{RR_RG} = 0$ and $\text{RR_TRMM} \neq 0$	863	863	863
V : $\text{RR_RG} \neq 0$ and $\text{RR_TRMM} = 0$	330	330	330
Total	1743	1743	1743

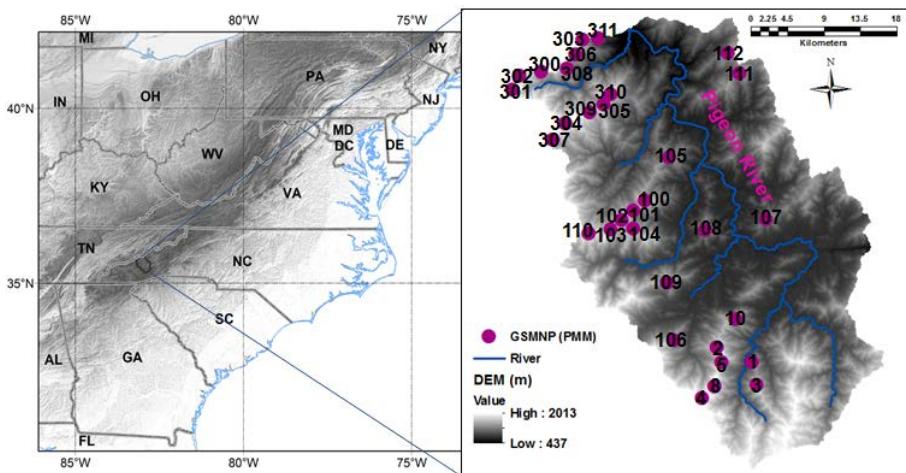


Figure 1. Region of study including the Great Smoky Mountains National Park (GSMNP) in the Southern Appalachians. The right panel shows the Pigeon River Basin where the raingauges are installed. Note RG0XX, RG1XX, and RG3XX were installed in summer 2007, 2008, and 2009 respectively. Additional raingauges and other instrumentation placed in the region are not shown here (see <http://iphex.pratt.duke.edu>).

Title Page	Abstract	Introduction
Conclusions	References	
Tables	Figures	
◀	▶	
◀	▶	
Back	Close	
Full Screen / Esc		
Printer-friendly Version		
Interactive Discussion		

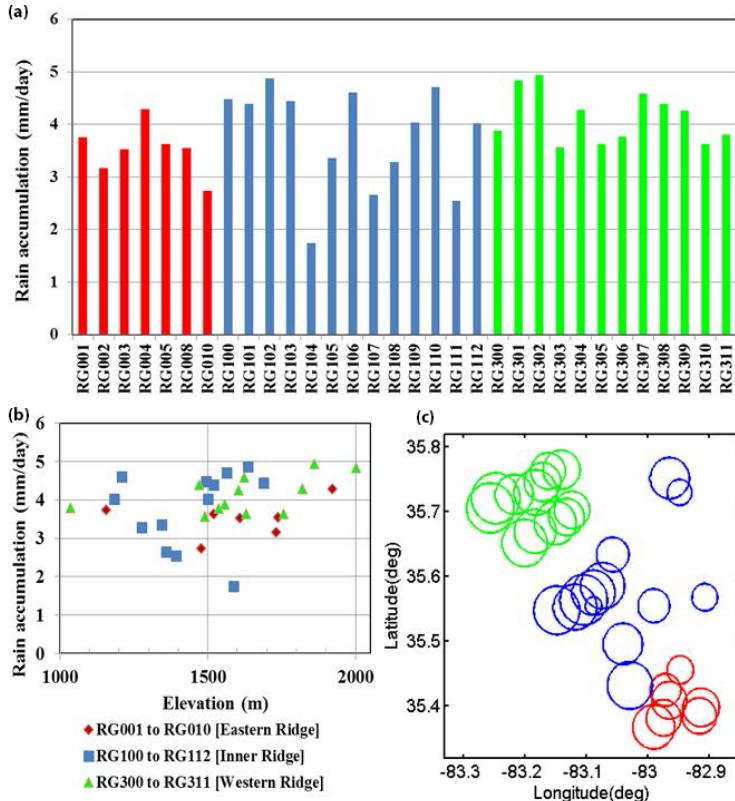


Figure 2. (a) Average rain accumulation (mm day^{-1}) for the rain gauges deployed in the GSMRGN. Average rain accumulation as a function of: (b) elevation. (c) Geolocation of each rain gauge.

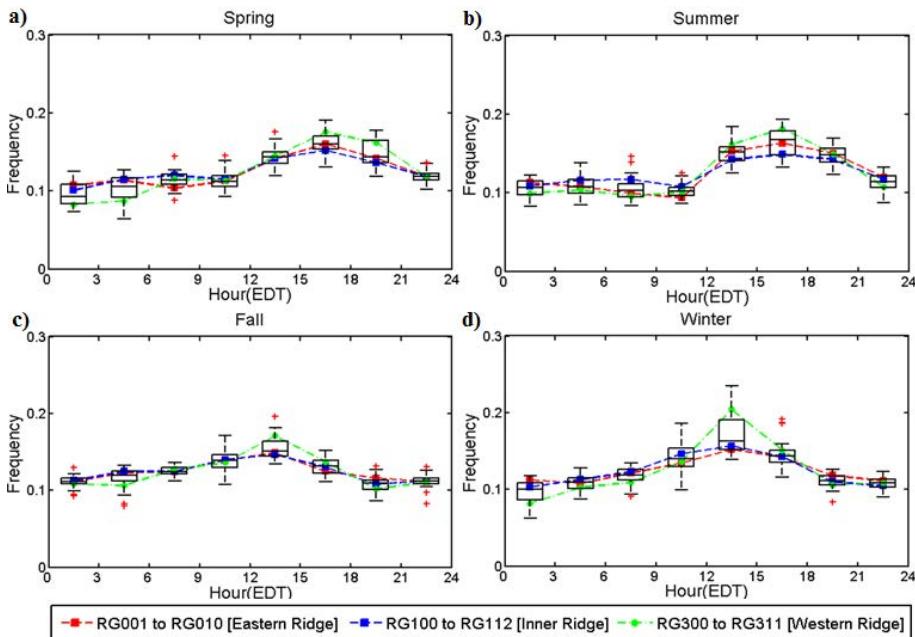


Figure 3. Three-hourly diurnal cycle as a function of the season of the year and the rain gauge network location (Eastern, Inner, and Western Ridge) for: **(a)** spring (April–May–June), **(b)** summer (July–August–September), **(c)** fall (October–November–December), **(d)** winter (January–February–March).

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

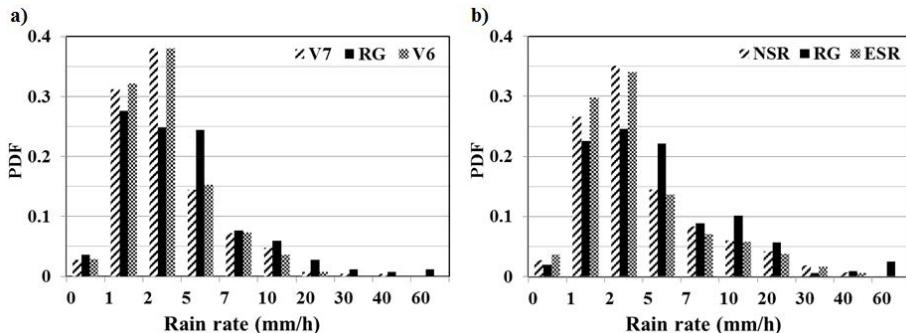


Figure 4. (a) Probability distributions of rain rates for V7 and V6 comparison of *non-null* TRMM 2A25 Near Surface Rain Rate (NSR) estimates and average raingauge rain rates for *near-nadir pixels* (scanning inclination angles ranging from 0 to 9°) during the period 1 June 2008–31 May 2011; (b) probability distribution of *non-null* TRMM 2A25 V7 surface rain rate products (Estimated Surface Rain Rate (ESR) and NSR) and average gauge rain rates during the period 1 June 2008–31 May 2013. Raingauge rain rates are calculated using time-scales of 10 min (RG0XX and RG1XX) and 30 min (RG3XX) corresponding to the interval centered at the time of satellite overpasses.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

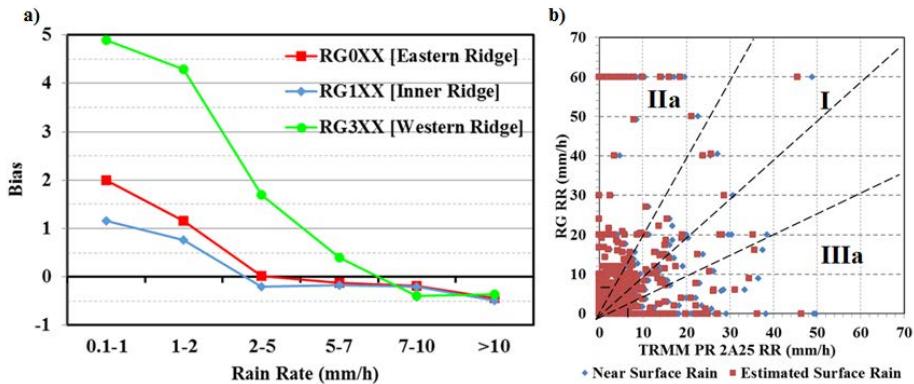


Figure 5. (a) Bias between TRMM 2A25 V7 NSR and average raingauge rain rates for different series: RG0XX, RG1XX, and RG3XX (see Table 1); (b) scatterplot for TRMM 2A25 V7 surface rain rates (NSR and ESR) and average rain gauge rain rates during the period 1 June 2008–31 May 2013. Rain gauges rain rates are using a 10 min (RG0XX and RG1XX) and 30 min (RG3XX) scale centered at the time of the satellite overpass. Note rain gauge measurements and TRMM profiles classification as described in Table 4 (5 primary categories (I-II-III-IV-V), and 2 subcategories, IIa–IIIa).

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

Error diagnostics of TRMM PR

Y. Duan et al.

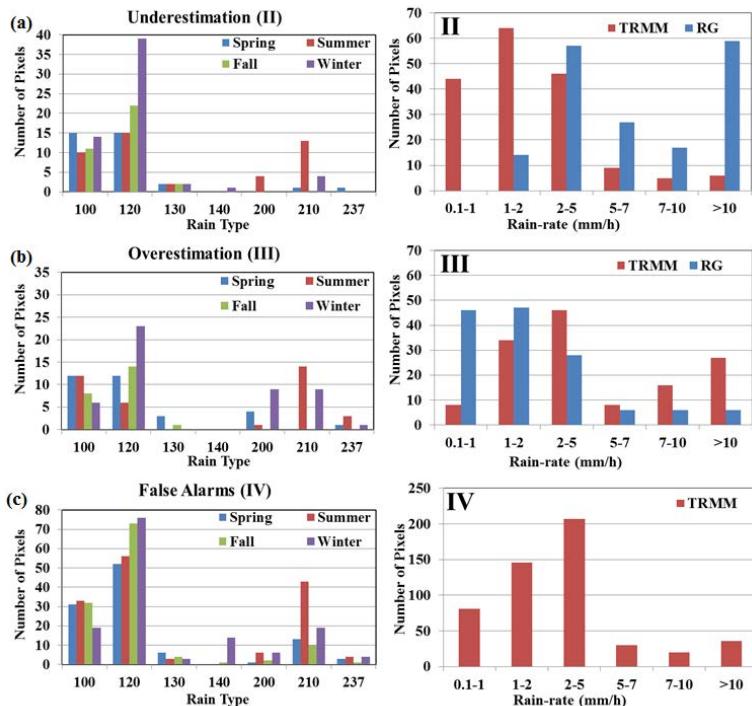


Figure 6. Histogram of rain type (left panels) and observed RG rain rate and NSR from TRMM (right panels) distributions for the different errors: **(a)** II (UND); **(b)** III (OVR); and **(c)** IV (FA). The error classification is provided in Table 4. The rain type categories correspond to the TRMM 2A23 Rain Type Flag: 100 – stratiform certain, 120 – probably stratiform, 130 – maybe stratiform, 140 – maybe stratiform or maybe transition or something else, 200 and 210 – convective certain, 237 – probably convective. (For further details please see the 2A23 documentation at http://disc.sci.gsfc.nasa.gov/precipitation/documentation/TRMM_README.)

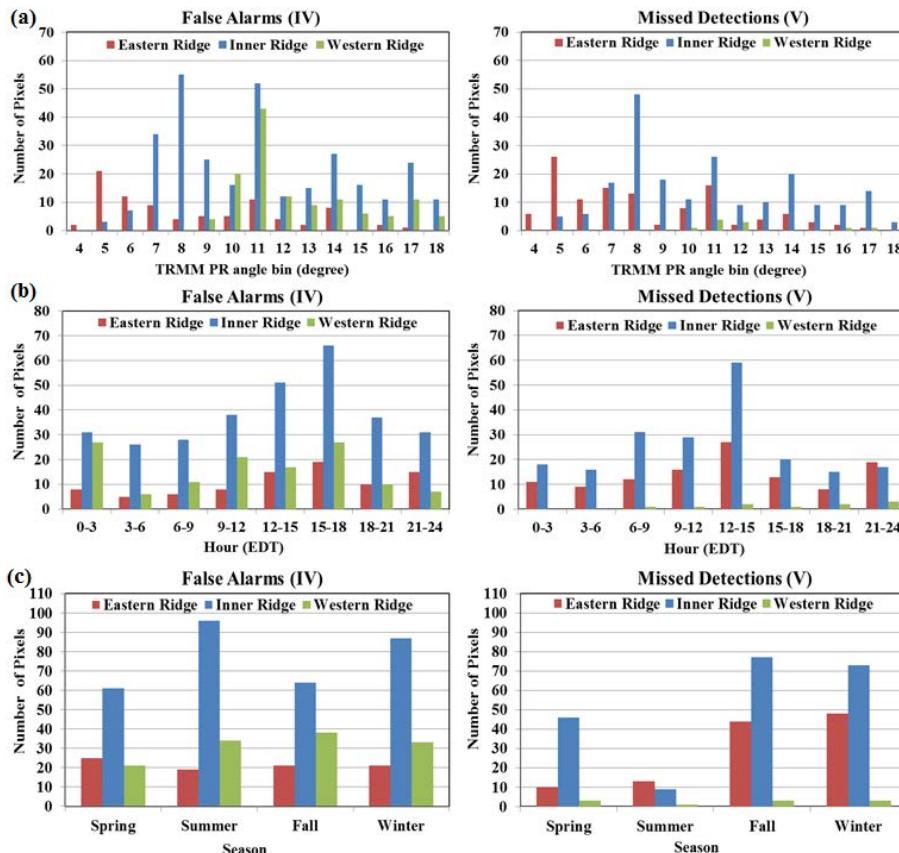


Figure 7. Histograms of FA (left panel) and MD (right panel) occurrences as a function of the viewing angle (a), time of day (b) and season of the year (c). As previously, the colors correspond to raingauges aligned with the eastern (red, RG0XX), western (green, RG3XX) and inner ridges (blue, RG1XX) in the region of study (Fig. 1, Table 1).

Error diagnostics of TRMM PR

Y. Duan et al.

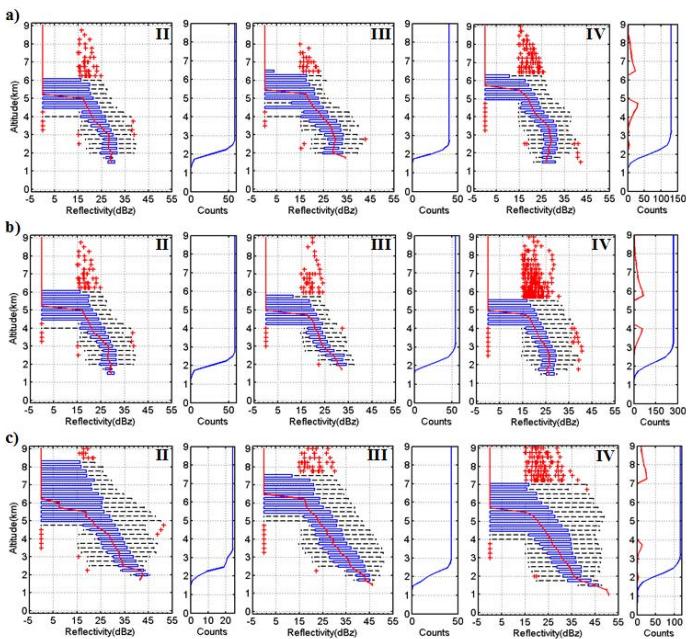


Figure 8. TRMM 2A25 reflectivity profiles for error classes II (UND), III (OVR), and IV (FA): **(a)** stratiform conditions with BB detected (Rain Type: 100 and 130, Fig. 6); **(b)** stratiform conditions without BB detected (Rain Type: 120 and 140, Fig. 6); and **(c)** convective conditions (Rain Type: 200, 210, and 237, Fig. 6). The blue box denotes the interquartile range (IQR) from the lower quartile (25th) to the upper quartile (75th); the median is indicated by the red mark inside the box. The red line connects the median reflectivity at all levels to yield the median reflectivity profile. The two horizontal lines (“whiskers”) extending from the central box represent the ± 1.5 IQR interval. Outliers (points falling out of ± 1.5 IQR) are marked as red crosses. For each error class, the right panel shows the number of observations with height; the red line for error class IV (FA) shows the distribution of outliers with height.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Error diagnostics of TRMM PR

Y. Duan et al.

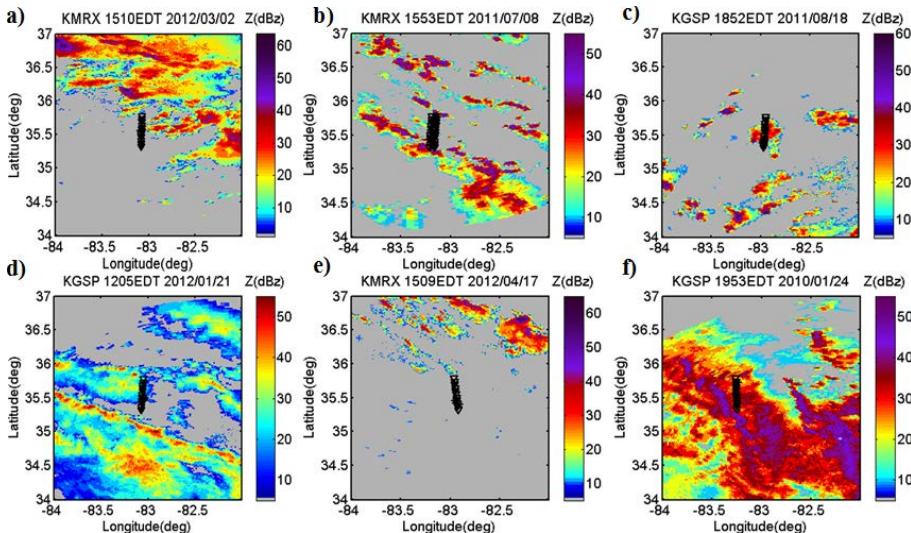


Figure 9. Base reflectivity composites from KMRX (Knoxville, TN) and KGSP (Greer, SC) National Weather Service radars corresponding to the overpass times shown in Figs. 10–12 below. The black lines formed by black inverted triangles map the track of the overpasses that span the Southern Appalachians.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

Error diagnostics of TRMM PR

Y. Duan et al.

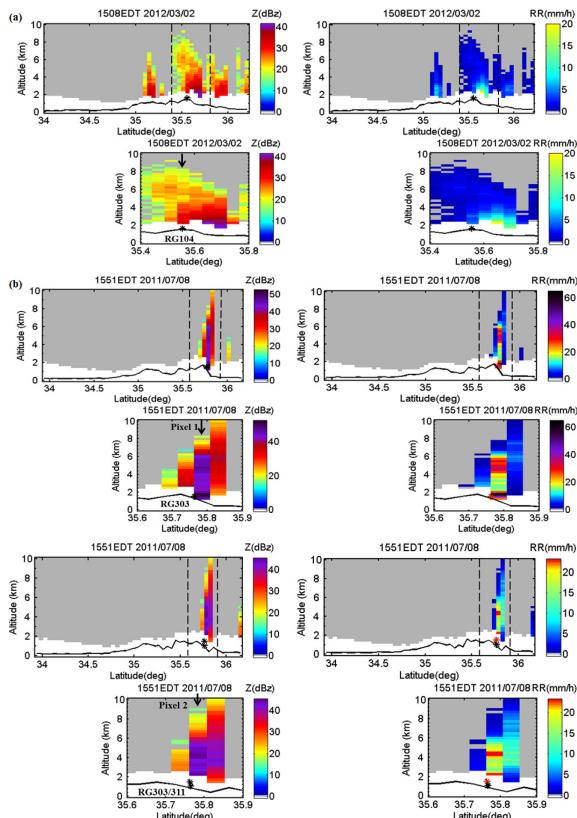


Figure 10. Cross section of reflectivity (Z) and rain rate estimates (RR) from TRMM 2A25 for three underestimation cases: (a) 15:08 EDT on 2 March 2012; and for two different cross-sections at 15:51 EDT on 8 July 2011 (b, c). The top row shows the overpass cross-section. The bottom row shows the cross-section between the two dashed vertical lines in the top rows. Asterisks denote the position of the raingauges as marked, and the color in the right panel is consistent with the measured rain-rate. The black arrow identifies the PR profile used to make the error determination. Ground clutter flags are shown in white. The black continuous line represents the topography.

Printer-friendly Version

Interactive Discussion

Error diagnostics of TRMM PR

Y. Duan et al.

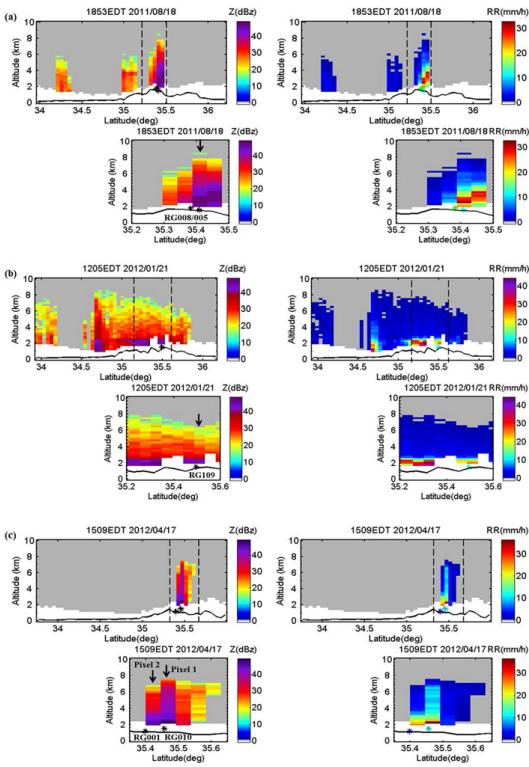


Figure 11. Cross section of reflectivity (Z) and rain rate estimates (RR) from TRMM 2A25 for three overestimation cases, respectively: **(a)** 18:53 EDT on 18 August 2011; **(b)** 12:05 EDT on 21 January 2012; and **(c)** 15:09 EDT on 17 April 2012. The top row shows the overpass cross-section. The bottom row shows the cross-section between the two dashed vertical lines in the top row plots. Asterisks denote the position of the raingauges as marked, and the color in the right panel is consistent with the measured rain-rate. The black arrow identifies the PR profile corresponding to the 2A25 used to make the error determination. Ground clutter flags are shown in white. The black continuous line represents the topography.

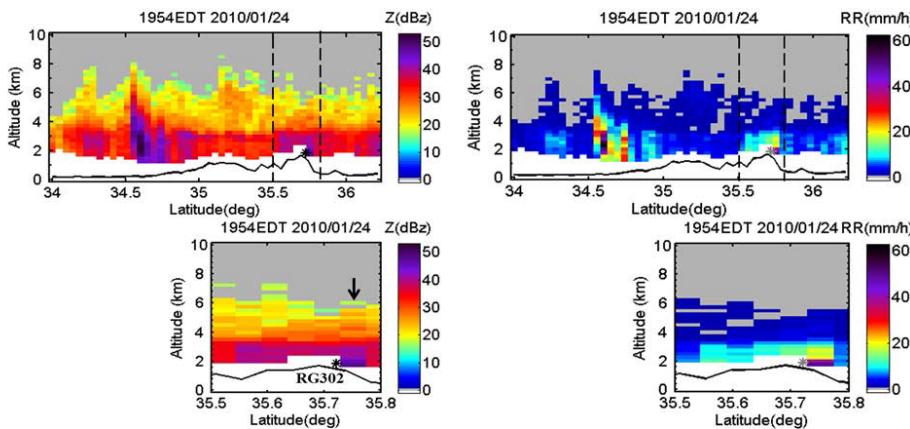


Figure 12. Cross section of reflectivity (Z) and rain rate estimates (RR) from TRMM 2A25 for a selected case of incorrect False Alarm determination at 19:54 EDT on 24 January 2010. The top row shows an overpass cross-section. The bottom row shows the cross-section between the two dashed vertical lines in the top row plots. Asterisks denote the position of RG302, and the color in the right panel is consistent with the measured rain-rate. The black arrow identifies the PR profile used to make the error determination. Ground clutter flags are shown in white. The black continuous line represents the topography.

Title Page	Abstract	Introduction
Conclusions	References	
Tables	Figures	
◀	▶	
◀	▶	
Back	Close	
Full Screen / Esc		
	Printer-friendly Version	
	Interactive Discussion	