

## Spatial sensitivity analysis of snow cover data in a distributed rainfall-runoff model

Tomasz Berezowski<sup>1,2</sup>, Jiri Nossent<sup>2</sup>, Jarosław Chormański<sup>1</sup>, and Okke Batelaan<sup>2,3</sup>

<sup>1</sup>Department of Hydraulic Structures, Warsaw University of Life Sciences, Nowoursynowska 166, 02-787 Warsaw, Poland

<sup>2</sup>Department of Hydrology and Hydraulic Engineering, Vrije Universiteit Brussel, Pleinlaan 2, 1050 Brussels, Belgium

<sup>3</sup>School of the Environment, Flinders University, GPO Box 2100, Adelaide SA 5001, Australia

*Correspondence to:* Tomasz Berezowski (t.berezowski@lewis.sggw.pl)

**Abstract.** As the availability of spatially distributed data sets for distributed rainfall-runoff modelling is strongly growing, more attention should be paid to the influence of the quality of the data on the calibration. While a lot of progress has been made on using distributed data in simulations of hydrological models, sensitivity of spatial data with respect to model results is not well understood.

5 In this paper we develop a spatial sensitivity analysis method for spatial input data (snow cover fraction - SCF) for a distributed rainfall-runoff model to investigate if the model is differently subjected to SCF uncertainty in different zones of the model. The analysis was focused on the relation between the SCF sensitivity and the physical, spatial parameters and processes of a distributed rainfall-runoff model. The methodology is tested for the Biebrza River catchment, Poland for which a distributed  
10 WetSpa model is setup to simulate two years of daily runoff. The sensitivity analysis uses the Latin-Hypercube One-factor-At-a-Time (LH-OAT) algorithm, which employs different response functions for each spatial parameter representing a 4 x 4 km snow zone. The results show that the spatial patterns of sensitivity can be easily interpreted by co-occurrence of different environmental factors such as: geomorphology, soil texture, land-use, precipitation and temperature. Moreover, the spa-  
15 tial pattern of sensitivity under different response functions is related to different spatial parameters and physical processes. The results clearly show that the LH-OAT algorithm is suitable for our spatial sensitivity analysis approach and that the SCF is spatially sensitive in the WetSpa model. The developed method can be easily applied to other models and other spatial data.

## 1 Introduction

20 Distributed hydrological models are developed to improve the simulation and analysis of physically  
based spatially distributed hydrological processes. While more spatially distributed parameters and  
input data are becoming available for modelling, most attention is paid to the influence of the data  
on the quality of the calibration and to the capacity of models to reproduce measured output time  
series. Several researchers focussed on the effect of using distributed precipitation data in hydrolog-  
25 ical models. Oblet et al. (1994) showed with a semi-distributed TOPMODEL (Beven et al., 1995)  
application that although the number of stations used to generate a rainfall field appeared to have  
an important impact on discharge simulation, the response of the model to changes in the rainfall  
field was marginal. Schuurmans and Bierkens (2007) used the fully-distributed SIMGRO (Querner,  
1997) model to analyse the effect of rainfall fields generated on basis of rain gauge and radar data  
30 on discharge, soil moisture and groundwater heads. In their study, the distributed data outperformed  
lumped data in the simulation results. A similar study was conducted by Fu et al. (2011) who used  
the MIKE SHE model (Abbott et al., 1986). However, in this case a clear effect of rainfall distri-  
bution was visible only on groundwater head and recharge. In summary, the advantage of spatially  
distributed precipitation over lumped data may vary, depending on the model, the study area and  
35 processes under consideration. Nonetheless, the spatial aspect of model parameters, input data and  
the way they are implemented in models clearly is an important research issue.

Several studies address classical sensitivity and uncertainty analysis methods to spatial data and  
parameters. An interesting stochastic uncertainty approach for spatial rainfall fields in the dynamic  
TOPMODEL (Beven and Freer, 2001) was presented by Younger et al. (2009). The results were  
40 obtained by dividing a catchment into homogeneous, irregular zones in which the precipitation was  
randomly perturbed by large factors. Their study, however, focusses rather on the model output  
uncertainty than on quantification of spatial sources of uncertainty, or spatial sensitivity.

Another study is presented by Stisen et al. (2011), who investigated if the use of spatially dis-  
tributed surface temperature data in an objective function can provide robust calibration and evalua-  
45 tion of the MIKE SHE model compared to a lumped simulation. The study used a spatial perturbation  
of parameters by random factors between 0.75 to 1.25 in 2 km grid for the sensitivity analysis, but  
the results were not analysed spatially. Thus no spatial pattern of sensitivity, showing which zones  
of the model are more vulnerable to uncertainty, was obtained.

Another spatial approach for sensitivity analysis was presented by Hostache et al. (2010). In their  
50 work a local, gradient method was applied to conduct a sensitivity analysis of the Manning coeffi-  
cient in each computational node of a hydrodynamic model. This approach showed completely dif-  
ferent sensitivity zonation than in the predefined land-use based Manning coefficient classes used as  
a comparison scenario. This result stresses the importance of assessing the sensitivity in a spatially-  
distributed way.

55 In this study, the various approaches of spatial sensitivity (or uncertainty) analysis presented above  
are compiled and extended in order to propose a method that would be generally applicable and thus  
would give a framework for inter-comparison of different models. Such a method would use a reg-  
ular grid to quantify the spatial pattern of sensitivity as in Stisen et al. (2011), hence it differs from  
the irregular zonation in Younger et al. (2009). Furthermore, the perturbation of spatial input data  
60 in a general framework should be realized using a well-established algorithm, e.g. Latin-Hypercube  
One-factor-At-a-Time (LH-OAT) (van Griensven et al., 2006). This change would give a straight-  
forward interpretation of the sensitivity. Similarly, Hostache et al. (2010) used a well-established  
gradient method for spatial sensitivity analysis. However, unlike the gradient method, LH-OAT pro-  
vides global insight into sensitivity. Such a method would also allow to quantify the sensitivity of  
65 spatial data with respect to the output and be able to explain the causes for the sensitivity patterns.

Main purpose of the application of spatial sensitivity analysis proposed in this study would be,  
after the Saltelli (2002) definition of sensitivity analysis, to quantify spatially the vulnerability of  
the model output to uncertainty of spatial input. Thus a result of this analysis would provide feed-  
back e.g. where in a model domain a modeller should focus more on the quality of input data and  
70 parameters. However, the same method can be used for comprehensive spatial change (e.g. land-use  
change) analyses to show where the change (e.g. urbanization) would be least or most influencing  
the model output.

Important issue in this study is the selection of the hydrological model used to conduct the spatial  
sensitivity analysis. An option is the WetSpa model (De Smedt et al., 2000; Liu and De Smedt, 2004)  
75 which shown to have a high sensitivity with respect to runoff prediction when various scenarios of  
distributed impervious surfaces input data were tested (Chormański et al., 2008; Berezowski et al.,  
2012; Verbeiren et al., 2013). Moreover, the WetSpa model was positively evaluated for possibility  
of utilizing distributed snow data from a remote sensor (Berezowski and Chormański, 2011). Hence,  
the WetSpa model showed to be an appropriate framework for analysis of spatially distributed phe-  
80 nomena.

Another issue is the selection of the input data used to conduct the spatial sensitivity analysis. A  
spatial data set, frequently tested and easy to obtain is snow cover. Snow cover fraction (SCF [-])  
or snow water equivalent remote sensing products are widely available from a number of sensors.  
The different available products vary widely in spatial resolution (500 m to 25 km), temporal reso-  
85 lution (sub-daily to monthly) and temporal coverage (the oldest time series starts in 1966, while new  
products are regularly announced). One of the most frequently used remote sensing snow products  
comes from the MODIS instrument (Hall et al., 2006). Several studies show different strategies in  
respect to how hydrological models can benefit from snow cover data. A popular approach is to de-  
rive snow depletion curves from MODIS SCF and use them in the Snowmelt Runoff Model - SRM  
90 (Martinec, 1975). This approach is still popular and used in recent studies (Lee et al., 2005; Tekeli  
et al., 2005; Li and Williams, 2008; Butt and Bilal, 2011; Tahir et al., 2011; Bavera et al., 2012).

However, the SRM studies are focused mostly on the winter half-year and are limited to study sites where snowmelt processes are dominant. Another popular model which benefit from satellite derived SCF is HBV (Sælthun, 1996); studies showing use of MODIS snow products are presented by  
95 Udnaes et al. (2007), Parajka and Blöschl (2008) and Şorman et al. (2009). In the WetSpa model the MODIS snow products were used to evaluate spatial distribution of predicted snow cover (Zeinivand and De Smedt, 2010). The spatial sensitivity of model output to snow cover, despite its popularity as input data in distributed hydrological models, has not yet been evaluated.

The aim of this paper is to provide and test a methodology for a global spatial sensitivity analysis of SCF in a distributed rainfall-runoff model. Purpose of this analysis is to show if the WetSpa  
100 model is spatially sensitive to SCF, i.e.: identify zones where the model output is most vulnerable to input uncertainty. An important point of the analysis is to explain the existing patterns of spatial sensitivity in function of physical, spatial parameters used and hydrological processes in the study area. For the remainder of the paper, the section “Methods” presents the spatially distributed rainfall-  
105 runoff model WetSpa, the study area, data and spatial sensitivity analysis. In “Results” the output of the spatial sensitivity analysis of SCF for Biebrza River catchment is presented and described. The “Discussion” section presents the results in view of the hydrological processes occurring in the study area, but further applicability of the spatial sensitivity analysis method and the limitation of the method (e.g. computation time) are also provided. The final section “Conclusions” recaps the  
110 main findings of the study.

## 2 Methods

### 2.1 Hydrological model

The hydrological simulations in this study were conducted using the WetSpa model (Water and Energy Transfer between Soil, Plants and Atmosphere; De Smedt et al., 2000; Liu et al., 2003). The  
115 model divides a catchment into a regular grid with a specified dimension. In each grid cell, the water balance is simulated and the surface, interflow and groundwater discharge components are routed to the catchment outlet (Wang et al., 1996). Spatial parameters used to calculate the hydrological processes are obtained from land-use, soil and elevation input maps. Attribute tables based on literature data are linked to the maps and transformed to distributed physical values via a GIS preprocess-  
120 ing step (Chormański and Michałowski, 2011). Several studies have demonstrated that WetSpa and its steady state version WetSpass (Batelaan and De Smedt, 2007) are suited to integrate distributed remote sensing input data in the simulation of the hydrological processes (Poelmans et al., 2010; Dujardin et al., 2011; Ampe et al., 2012; Chormański, 2012; Demarchi et al., 2012; Dams et al., 2013).

125 The model consists of the following storages: interception, depression, root zone, interflow and groundwater. Water transport between the storages is based on physical and empirical equations.

Rainfall, temperature and potential evapotranspiration based on data from meteorological stations are made spatially explicit by use of Thiessen polygons, but also a spatially distributed input form is possible.

130 In the standard WetSpa version, snow accumulation is calculated based on precipitation and a threshold temperature  $t_0$  [ $^{\circ}\text{C}$ ]. If the temperature in a grid cell is  $t$  [ $^{\circ}\text{C}$ ] and falls below  $t_0$ , precipitation is assumed to be snow. Snow melt is calculated based on  $t_0$ , a degree-day coefficient  $k_{snow}$  [ $\text{mm } ^{\circ}\text{C}^{-1}\text{day}^{-1}$ ] and coefficient  $k_{rain}$  [ $\text{mm mm}^{-1}\text{ } ^{\circ}\text{C}^{-1}\text{day}^{-1}$ ] reflecting the amount of snowmelt caused by rainfall  $v_{rain}$  [ $\text{mm}$ ]. In this study SCF was obtained from MODIS snow products and used  
135 as input data. Thus, snow accumulation was not calculated, but replaced with the input SCF, while the snowmelt amount ( $v_{sm}$ ) [ $\text{mm}$ ] per model time step (e.g. day) is calculated as:

$$v_{sm} = SCF(k_{snow}(t - t_0) + k_{rain}v_{rain}(t - t_0)) \quad (1)$$

This approach of calculating snowmelt based on SCF and snowmelt rate was proposed by Liston (1999). It allows to obtain distributed  $v_{sm}$  values weighted by SCF from grid cells where  $SCF > 0$ .

140 WetSpa is also capable to use an energy balance model for snowmelt calculation (Zeinivand and De Smedt, 2010), however, because of the higher demand on input data, this approach was not used.

Surface water routing is based on a geomorphological instantaneous unit hydrograph (IUH) (Liu et al., 2003). The IUH is calculated for a flow path starting in a grid cell and ending at the catchment outlet, i.e. each grid cell has its own IUH. Groundwater flow and interflow are calculated on a sub-  
145 catchment level based on a linear reservoir method and routed to the catchment outlet with the IUH. Comparison of the WetSpa performance with other distributed hydrological models can be found in the results of the DMIP2 project (Safari et al., 2012).

The model was setup with a daily time step and 250 by 250 m grid cells. The calibration period was 1<sup>st</sup> September 2008 till 31<sup>st</sup> August 2009, while validation was from 1<sup>st</sup> September 2007 till  
150 31<sup>st</sup> August 2008. The length of the calibration and validation was selected to optimize the model for snow conditions occurring in the period selected for sensitivity analysis (Sect. 2.4.1). The global WetSpa parameters were calibrated using the Shuffled Complex Evolution algorithm (Duan et al., 1993). The calibration was conducted with the R software (R Development Core Team, 2013) and package “hydromad”. The model was optimized to maximize the Nash and Sutcliffe (1970) efficiency ( $NS$ ):

$$NS = 1 - \frac{\sum_{x=1}^{\tau} (Q_x - \hat{Q}_x)^2}{\sum_{x=1}^{\tau} (Q_x - \bar{Q})^2} \quad (2)$$

where:  $Q_x$  and  $\hat{Q}_x$  are observed and simulated discharges at time  $x$ ,  $\bar{Q}$  is the mean observed discharge,  $\tau$  is the total number of time steps. Sensitivity of the WetSpa model to the global parameters is presented in Yang et al. (2012).

## 160 2.2 Study area

The study area is the Biebrza River catchment upstream from the discharge station at Burzyn. The total catchment area comprises 6845 km<sup>2</sup> (Fig. 1). Biebrza is a lowland catchment consisting of moraine plateaus and post-glacial valleys with low slopes (average 1.03 %, Fig. 2) and an elevation ranging from 102 m ASL at the catchment outlet to 298 m ASL at the northern water divide. Land-  
165 use is composed of agriculture (54%), forests (26%), wetlands and grasslands (17%), water (2%) and urban (1%) (Fig. 3). The area is considered as semi-natural, especially because of its large area of well preserved wetlands and forests and is therefore used as a reference area in wetlands research (Wassen et al., 2006). Several lakes in the northern part of the catchment are controlled by management schemes, which usually discharge into Biebrza tributaries after accumulation period.  
170 Lakes in WetSpa are modelled by setting appropriate values of the hydraulic parameters in the model e.g. by a high runoff coefficient and a low friction. The simulation of water management schemes in the controlled lakes is, however, not implemented. Dominant soil textures in the study area are sand (34%), loamy sand (26%) and sandy loam (18%), whereas minor parts are covered by sandy clay (4%) and silt (2%), other soils cover less than 1% of the area. In the river valley, organic soils are  
175 frequent and cover in total 16% of the study area (Fig. 4). The dominating landscape features, that certainly have influence on the functioning of the Biebrza hydrological system are the river valley and the large forest complex located in the north-eastern part of the catchment (Fig. 5).

The Biebrza River is characterized by a spring flood regime, the discharge of the spring flood is mostly related to the volume of snowmelt in the catchment (Stachý, 1987; Mioduszewski et al.,  
180 2004; Chormański and Batelaan, 2011). Based on the meteorological record from 25 stations and the flow record at the Burzyn profile (Fig. 1) managed by Polish Institute of Meteorology and Water Management - National Research Institute (IMGW) the study area can be characterized by the following figures. Mean yearly discharge (1951-2012) at Burzyn is 34.9 m<sup>3</sup>/s, while summer and winter average are respectively 26.0 and 43.9 m<sup>3</sup>/s. Recorded extreme low and high discharges (1951-2012)  
185 are 4.33 and 517 m<sup>3</sup>/s respectively. The climate in this area is transitional between continental and Atlantic, with relatively cold winters and warm summers, effectively making this area the coldest region in lowland Poland. The mean air temperature (1979-2009) is 7.0°C, in the winter half-year 0.3°C and in the summer half-year 13.7°C. The mean monthly temperature (1979-2009) has a maximum in July (17.6°C) and minimum in January (-3.3°C). The yearly precipitation (1979-2009) is  
190 587 mm (375 mm in the summer half-year, 212 mm in the winter half-year). The yearly average number of days with temperature below 0°C (1979-2009) is 79 and with snow cover (1975-2012) is 93 (average snow depth is 12 cm). Based on the meteorological maps (Stachý, 1987; Rojek, 2000), the mean yearly evaporation from free water surface (1951-2000) is 550 mm, 465 mm in summer and 85 mm in winter (1951-1970).

### 195 2.3 Data

Hydrometeorological data (precipitation, air temperature and discharge) was obtained from IMGW. Daily precipitation was obtained for 25 rain gauge stations, whereas air temperature was available for 5 stations (Fig. 1). Temperature was recorded as minimum and maximum daily temperature, an average from these values was calculated to obtain the mean daily temperature for each station.

200 Daily discharge was obtained for Burzyn. Potential evapotranspiration was estimated based on mean monthly evaporation from free water surface (Stachý, 1987) and uniformly disaggregated into daily values.

Daily SCF was obtained from MODIS/TERRA snow product MOD10A1 (Hall et al., 2006, datasets used: IX 2007 to X 2009) with a 500 m resolution. The SCF values in MOD10A1 are  
205 calculated based on the Normalized Difference Snow Index (*NDSI*):

$$NDSI = \frac{r_{vis} - r_{ir}}{r_{vis} + r_{ir}} \quad (3)$$

with  $r_{vis}$  and  $r_{ir}$  the reflectance in visible and in near-infrared bands, which for the MODIS sensor is respectively band 4 (545-565 nm) and band 6 (1628-1652 nm). In general, *NDSI* gives higher values if a larger part of a pixel is covered by snow. However, it may be affected by noise from  
210 many sources and has to be corrected for bias in forest areas (Klein et al., 1998). The MOD10A1 SCF input data was aggregated into 524 4 by 4 km snow zones, while zones close to the catchment boundary are fractions of a 4 km square. Purpose of the aggregation was to decrease computation time of the sensitivity analysis and to reduce noise in the MOD10A1 data while keeping enough variability to obtain meaningful spatial results. In order to remove missing data related to cloud  
215 cover occurrence the SCF in snow zones was linearly interpolated over time. Finally, SCF was set to 0 in months when there was no snow recorded in lowland Poland, i.e. from May to September. The in snow zones aggregated MOD10A1 SCF data was used to calibrate the WetSpa model. For the spatial sensitivity analysis, however, the daily time series of catchment averages of MOD10A1 SCF's were used, i.e.: the spatial pattern of SCF in snow zones was obtained by perturbing the  
220 catchment averages by random factors (Sect. 2.4.1).

Spatial data (elevation, land-use and soil) used to calculate distributed model parameters were obtained from variable GIS sources. The elevation map (Fig. 1) was compiled from three sources: Digital Elevation Model of Poland in scale 1:26,000, digitized contours from the Topographical Map of Poland in scale 1:25,000 and from field surveys in the Biebrza valley. The land-use map (Fig. 3)  
225 was obtained from the Corine Land Cover 2006 project (Commission of the European Communities, 2013). In the catchment area outside the Polish border (56 km<sup>2</sup>), agricultural land-use was assigned. The soil map (Fig. 4) was obtained from the Soil Map of Poland in scale 1:50,000 for agricultural areas and 1:500,000 in forests and cities. Outside the Polish border the most frequent in the neighbourhood, sandy soil, was assigned. All the spatial data were interpolated to 250 m grid cells using  
230 the nearest-neighbourhood (soil, land-use) and the bilinear (elevation) algorithms.

## 2.4 Sensitivity analysis

### 2.4.1 Spatial sensitivity analysis with Latin-Hypercube One-factor-At-a-Time algorithm

Usually a sensitivity analysis is performed for global parameters of a model (i.e. a set of parameters valid for the whole model area). The sensitivity analysis presented in this paper, however, follows a spatial approach, i.e. parameters are evaluated in different zones of the model area, as the parameter  $e_i$  represent a fraction of the daily averaged MOD10A1 SCF assigned into the zone  $i$ . In this study, each  $e_i$  is assigned to one of the 524 snow zones. Since  $e_i$  are randomly sampled the MOD10A1 data constrains only the temporal dynamics of SCF. Hence, results of the sensitivity analysis are interpretable in terms of SCF as input data in general, rather than in terms of MOD10A1 in particular.

LH-OAT (van Griensven et al., 2006) is an effective global sensitivity analysis method, similar to the Morris screening (Morris, 1991). The LH-OAT method is frequently used by SWAT users for ranking the parameters according to their influence on the model output (Nossent and Bauwens, 2012). LH-OAT combines two different techniques. First, it selects  $n$  latin-hypercube (McKay et al., 1979) samples. Next, the LH points are used as starting points of  $p$  one-factor-at-a-time perturbations, where  $p$  is equal to the number of model parameters. A higher number of LH samples ( $n$ ) will lead to a better convergence; a value of at least  $n = 100$  is necessary to achieve convergence (Nossent, 2012; Nossent et al., 2013). The method requires in total  $p(n + 1)$  model evaluations to calculate the sensitivity analysis results. The sensitivity measure (final effect) for each  $i^{\text{th}}$  parameter is calculated by averaging partial effects for this parameter ( $s_{i,j}$ ) from all LH samples (van Griensven et al., 2006):

$$s_{i,j} = \left| \frac{100 \left( \frac{F(e_1, \dots, e_i(1+f_i), \dots, e_p) - F(e_1, \dots, e_i, \dots, e_p)}{[F(e_1, \dots, e_i(1+f_i), \dots, e_p) + F(e_1, \dots, e_i, \dots, e_p)]/2} \right)}{f_i} \right| \quad (4)$$

$$s_i = \frac{\sum_{j=1}^n s_{i,j}}{n} \quad (5)$$

where  $F(\cdot)$  is a response or objective function of a model run with a set of  $e_1$  to  $e_p$  parameters,  $e_i$  is the current parameter,  $j$  is the current LH sample ranging between 1 and  $n$ ;  $f_i$  is the fraction by which  $e_i$  was changed during the OAT perturbation, the sign of  $f_i$  is random at each loop as the value can increase or decrease. Since the small snow zones at the catchment border would give relatively smaller sensitivity than similarly parametrized zones of bigger area, the  $s_i$  measure has to be normalized for non equal area ( $a_i$ ) of snow zones. Thus, the normalised sensitivity ( $s_i^*$ ) is defined as:

$$s_i^* = \frac{s_i}{a_i} \quad (6)$$

$s_i^*$  should be interpreted as a response measure of the changes in SCF in the snow zones to the value of  $F(\cdot)$ , a higher sensitivity stands for a stronger response and means that the model output



is more vulnerable to uncertainty in a particular snow zone. This study design allows to obtain SCF  
265 sensitivity in each snow zone of the model. Insights into model sensitivity while simulating different  
processes can be achieved by using various response functions as  $F(\cdot)$  (Sect. 2.4.2). The example of  
LH-OAT loops for spatial sensitivity analysis described above is presented in Fig. 6.

The experimental set-up for the spatial sensitivity was as follows. The values of the global pa-  
rameters of the WetSpa model were the same as obtained from the model calibration. To be able  
270 to achieve convergence, a relatively large number of LH samples was selected ( $n=100$ ). Together  
with the parameters representing the snow zones,  $p=524$ , this results in a total number of model  
evaluations of 52500. The LH samples are taken from a uniform distribution ranging from 0 to 1.14,  
resulting in a range of 0 to 1 for the SCF in a snow zone (maximum mean SCF in the catchment was  
88%, thus  $\frac{1}{0.88} = 1.14$ ). The perturbation  $f_i$  was set to 1%, in order to avoid that the OAT samples  
275 exceed the average distance between the LH samples. The sensitivity analysis was run for two full  
hydrological years from 1<sup>st</sup> November 2007 till 31<sup>st</sup> October 2009, preceded by a warm-up period  
of 2 months.

#### 2.4.2 Response functions

In order to investigate the relationship between parameters and different model processes, the sen-  
sitivity analysis was performed for a set of response functions  $F(\cdot)$ . A response function quantifies  
280 a model behaviour, but unlike an objective function a response function does not use observation  
(e.g. observed discharge). Table 1 lists the 15 response functions which were used in the sensitivity  
analysis. This selection of response functions allows to interpret the results in view of different com-  
ponents of the discharge as simulated by a number of model processes related to them. Moreover,  
285 the division into winter and summer half-years gives more insight into seasonal variability of the  
simulated results. The winter half-year response functions reflect processes occurring during snow  
accumulation and spring snowmelt, when the highest flows occur. On the other hand, the summer  
half-year response functions reflect processes occurring during the summer low flow period. Winter  
half-year response functions were calculated for November until April, summer half-year response  
290 function for May until October. The  $\bar{q}_{high}$  and  $\bar{q}_{low}$  reflect processes related to the highest and lowest  
flows. The  $\bar{v}_{sm}$  is calculated as the mean daily value of snowmelt [mm] and reflects processes related  
to snowmelt generation without routing.

#### 2.4.3 Output data analysis

The spatial approach followed in this study gives a large output data set i.e. sensitivity maps based  
295 on different response functions. Each sensitivity map was analysed in view of 15 WetSpa parameter  
maps presented in Table 2. The Thiessen polygons for potential evapotranspiration were omitted, as  
there was only one polygon for the whole catchment.

In order to prepare the dataset for statistical analysis, each of the 15 parameter maps was spatially aggregated to fit the spatial extent of the sensitivity analysis results ( $s_i^*$ ) of the snow zones by calculating the mean (for continuous data) or the majority (for discrete data) of a parameter value in a snow zone. Based on this data set the coefficient of determination ( $\rho^2$ ) was calculated for each pair of  $s_i^*$  and the aggregated parameter values. The  $\rho^2$  describes the strength of the linear association between the variables by indicating the fraction of one variable's variance explained by the second variable. Since in literature the thresholds of  $\rho^2$  for quantifying the strength of the linear association are vague, in this paper a  $\rho^2 \geq 0.40$  is used as representing a moderate association.

### 3 Results

#### 3.1 Model calibration and performance

The calibrated model shows high efficiencies:  $NS=0.86$  for the calibration period,  $NS=0.73$  for the validation period and  $NS=0.79$  for the whole period. The snow related global WetSpa parameters were estimated during the calibration as:  $k_{snow} = 5.03 \text{ mm } ^\circ\text{C}^{-1}\text{day}^{-1}$ ,  $k_{rain} = 0.02 \text{ mm mm}^{-1} \text{ } ^\circ\text{C}^{-1}\text{day}^{-1}$ . The comparison of observed and simulated discharge is presented in Figure 7. 90% of the simulated discharge at the catchment outlet has a groundwater origin, while surface runoff (5.3%) and interflow (4.7%) contribute mostly to the highest peaks (Fig. 7).

#### 3.2 Spatial sensitivity analysis

The maps presenting global model output sensitivities  $s_i^*$  to variations of spatial SCF are presented in Figure 8. The use of different response function results in different patterns of spatial sensitivity, although some similarities can be distinguished as well. The minimum, maximum and mean values are indicated on each map (Fig. 8). If the minimum is equal to 0, the model is completely insensitive in at least one snow zone for this response function. The values presented in the first four rows can be compared within a row, however, comparison between the rows is more difficult as in different rows the response functions concern discharge components of different magnitude. Note that the grey scale is different for all maps in the lowest row. This is because, unlike in the upper rows, the  $s_i^*$  calculated from these response functions are not intended to be compared within this row as they concern different processes.

The analysis of  $\rho^2$  values (Tab. 3) explains the spatial relations between SCF sensitivity with different response function and the spatial parameters. Most of the pairs in Table 3 have low  $\rho^2$  suggesting that a parameter was not relevant for sensitivity with this response function. However, for most of the response functions at least one  $\rho^2 \geq 0.40$  was found, indicating that the SCF sensitivity with these response functions can be partially explained by the values of the parameter maps. The values of  $\rho^2$  show influential and unimportant spatial parameters for the SCF sensitivity i.e. for

the snow related processes. Detailed analysis of Fig. 8 and Tab. 3 is provided in the subsequent subsections.

### 3.2.1 General relations of the spatial sensitivity analysis results with parameters maps

The last column of Table 3 shows the frequency of the parameters with moderately strong coefficient of determination under different response functions. The most frequent occurring parameter with a coefficient of determination above the threshold (0.40) is slope. The second most frequent is the group of soil texture related parameters: wilting point, hydraulic conductivity, porosity, residual soil moisture and field capacity. The lowest frequency is observed for maximal and minimal interception, initial soil moisture and root depth, as well as for parameters responsible for generating surface runoff: runoff coefficient and depression storage.

The scatter plots of the slope versus different response functions (Fig. 9) show that this parameter strongly correlates with the spatial sensitivity quantified with  $\bar{q}$ ,  $\bar{q}_i$  and  $\bar{q}_g$  and their winter/summer half-years equivalents. However, when looking closer at the plots for these response functions the lower values of the slope (0.0% - 0.5%) give steeper relation with less scatter than higher slope values.

### 3.2.2 Discharge source response functions

Using  $\bar{q}$  and  $\bar{q}_w$  as response function resulted in a clear pattern differentiating the upland from the valley (cfr. Fig 8 and Fig. 5), showing that SCF zones occurring in the flat, organic-soil dominated valley is much less sensitive than in the mineral upland. High sensitivity is obtained in snow zones with steeper slopes (cfr. Fig 8 and Fig. 2), what is confirmed by high  $\rho^2$  with the slope (Tab. 3). Several WetSpa parameters (mostly soil texture dependent: depression storage, wilting point, field capacity, porosity, residual soil moisture content) have high  $\rho^2$  with  $\bar{q}$  and  $\bar{q}_w$  response functions (Tab. 3).

Some differences between  $\bar{q}$  and  $\bar{q}_s$  are visible when analysing the  $\rho^2$  (Tab. 3). The SCF sensitivity for  $\bar{q}_s$  has higher  $\rho^2$  for parameters that are related to groundwater flow, like: porosity, residual soil moisture content, field capacity and pore size distribution index.

When comparing  $\bar{q}$ ,  $\bar{q}_w$  and  $\bar{q}_s$  with  $\bar{q}_g$ ,  $\bar{q}_g_w$  and  $\bar{q}_g_s$  with respect to spatial patterns (Fig. 8) and  $\rho^2$  (Tab. 3), the figures are very similar. The group of parameters responsible for groundwater processes (porosity, residual soil moisture content, field capacity and pore size distribution index) have higher  $\rho^2$  with the groundwater response functions  $\bar{q}_g$  and  $\bar{q}_g_w$  than with  $\bar{q}$  and  $\bar{q}_w$ .

The SCF sensitivity for  $\bar{q}_s$  and  $\bar{q}_s_w$  differentiates the river valley and the north-western upland catchment from the south-eastern upland (cfr. Fig 8 and Fig. 5). The maps of SCF sensitivity for  $\bar{q}_s$  and  $\bar{q}_s_w$  are the only one that show clearly a relatively higher sensitivity in the river valley than in most of the upland.

365 The SCF sensitivity for the interflow response function differs from the groundwater and surface  
water response function results. The spatial pattern of SCF sensitivity for  $\bar{q}_i$  and  $\bar{q}_{i_w}$  seems opposite  
to the pattern of  $\bar{q}_s$  and  $\bar{q}_{s_w}$ .

### 3.2.3 Extreme discharges response functions

The SCF sensitivity for  $\bar{q}_{high}$  and  $\bar{q}_{low}$  presents a spatial pattern that can not be visually related  
370 to land-use, soil, or slope maps (Fig. 8). These response functions do not correlate with any of the  
WetSpa spatial parameters (Tab. 3). The spatial pattern of  $\bar{q}_{high}$  shows high values both in the upland  
and in the valley, however it has also some zones of low sensitivity in the central part of valley. Low  
but noticeable  $\rho^2$  is found only with the slope. The spatial pattern of  $\bar{q}_{low}$  is quite uniform, with some  
higher values in the western uplands, lower values in the central part of the valley and in flat regions  
375 in the northern upland (cfr. Fig 5 and Fig. 8).

### 3.2.4 Mean snowmelt response function

The pattern of  $\bar{v}_{sm}$  shows random values with different means in different Thiessen polygons for  
temperature stations used in the model (Fig. 8). This pattern is confirmed by high  $\rho^2$  between  $v_{sm}$   
and temperature, with no other parameters having noticeable  $\rho^2$  (Tab. 3).

## 380 4 Discussion

### 4.1 Model calibration and performance

The groundwater dominated discharge composition obtained with the calibrated model is in concep-  
tual agreement with Pajnowska et al. (1984). The model performed well during snowmelt-supplied  
spring floods. Although, the peaks were underestimated by 8% of the observed value on average.  
385 The peak discharges underestimation are possibly determined by the uncertainty of the rating curve.  
During the yearly spring floods, the measurement profile near the gauging station widens outside the  
riverbed and extends into the densely vegetated floodplain, where proper hydraulic measurements  
are very difficult. Nonetheless, the shape of the events resembled well the observed values, which  
can be an advantage of using observed SCF data instead of predicting snow cover in the model. This  
390 is supported by the comparison of the hydrograph (upper part of Fig. 7) with the timing of snowmelt  
and temperature rise above 0 °C (lower part of Fig. 7), which shows a rapid discharge rise at the  
beginning of spring floods. Good results of using MODIS snow products in other hydrological mod-  
els have also been shown by Lee et al. (2005); Udnaes et al. (2007); Parajka and Blöschl (2008);  
Şorman et al. (2009); Tahir et al. (2011). The model performed worse during periods of intensive  
395 summer storms. For these storms, a rapid discharge rise was simulated, which was not observed in  
reality. A possible reason for this low performance is the positively biased soil moisture prediction  
of the model during these periods.

## 4.2 Spatial sensitivity analysis

The global model output sensitivities ( $\hat{s}_i^*$ ) are calculated for a regular-structured grid (Fig. 8). This approach may be considered not perfect, as irregular, homogenous zonation (Younger et al., 2009) could more directly reference the sensitivity to spatial features of the model. Regular zonation used in this study was similar as in Stisen et al. (2011). This approach implies that the borders of spatial features do not resemble the zonation and the results are somewhat aggregated. Advantage of structured grid lies, however, in broad comparability of different models, e.g. spatial sensitivity analysis in a study area modelled with different spatial discretization like hydrological response unit (SWAT) or grid cell (WetSpa) could be easily compared when using the structured grid. Moreover, irregular approach would require much more zones if very fine spatial features were to be analysed. This would require additional computational time, as the number of zones determines the number of parameter for the sensitivity analysis (see Sect. 4.3 for further discussion on this topic).

Computational time could be decreased if other methods than LH-OAT would be used. Spatial sensitivity calculated based on a gradient method was presented by Hostache et al. (2010). Their results, although showing the importance of spatial sensitivity analysis, were calculated using a local method. Local methods are not handling properly the non-linear models (Turanyi and Rabitz, 2000). On the contrary, the method presented in this study results in a global sensitivity, i.e.: covering the whole parameter space and thus giving more insight into the model behaviour than a local method. There is still room for selecting other method for spatial sensitivity. Interesting results could be obtained when a variance-based method, like Sobol' (Sobol', 1993) would be used. Such an analysis would give additionally to LH-OAT information on interactions between the model parameters.

### 4.2.1 General relations of the spatial sensitivity analysis results with parameters maps

The reason why most sensitivity maps calculated for different response functions (Fig. 8) were correlated with slope (Tab. 3) is because slope has a large impact on other hydraulic parameters (e.g. Manning coefficient), but also tunes values of depression storage and potential runoff coefficient (Liu and De Smedt, 2004).

A number of sensitivity maps were correlated with soil texture related parameters. These parameters have an influence on directing water that is stored as soil moisture, thus have general impact on groundwater, interflow and infiltrability. The soil texture related parameters have higher frequencies than the land-use related parameters (cfr. Tab. 2 and Tab. 3). This means that soil texture is a clearly more important WetSpa input than land-use with regard to the SCF sensitivity. The reason may be that the groundwater discharge accounts for 90% of the total simulated discharge and the parametrization of the groundwater processes is strongly dependent on soil properties in WetSpa.

Some of the WetSpa parameter maps, have a  $\rho^2$  not above the selected threshold for any of the sensitivity maps. In case of the interception related parameters the explanation is that the intercep-

tion capacity is important in the summer half-year, when no SCF is present. A similar explanation holds for the root depth (an evapotranspiration-related parameter) which has a relatively negligible importance in the winter half-year. In case of initial soil moisture content the explanation could be  
435 that it affects mostly the beginning of the simulation, i.e. the warm-up period.

Parameters responsible for generating surface runoff also did not have  $\rho^2$  above the selected threshold for any of the sensitivity maps. This is explained by the fact that the catchment is not urbanized and areas of high runoff coefficient and low depression storage are not frequent in this  
440 area. This situation is expected to be different for urbanized catchments, where the surface runoff would participate more in the total discharge than in this study area (Berezowski et al., 2012).

The frequency analysed here is obviously dependent on the value of the  $\rho^2$  threshold (in this case 0.40). The threshold is subjective, however, allows discriminating between the high and low  $\rho^2$ . The selected threshold is justified by the fact that the  $\rho^2 = 0.40$  is equivalent to the Pearson's correlation coefficient of 0.63, which is generally considered as representing a strong correlation between  
445 variables. Nevertheless, the results should be viewed also in scope of the  $\rho^2$  values themselves.

The analysis of correlation between slope and sensitivity maps provided in more details in Figure 9 shows that even when  $\rho^2$  values are high (Tab. 3), the spatial sensitivity can be explained by a given parameter only in a certain range of its values, while for the remaining values the correlation is  
450 not that strong. This shows the complexity of the presented analysis. It has to be taken into account that the values presented in Table 3 shows only the general relation with the sensitivity maps (Fig. 8) while at different ranges of the analysed values different model behaviour is expected.

#### 4.2.2 Spatial sensitivity in scope of the Biebrza River catchment functioning

All the sensitivity maps calculated for the winter half-year response functions resemble the full  
455 year response functions, both in the  $\rho^2$  (Tab. 3) and in the spatial pattern (Fig. 8). This means that when looking at SCF sensitivity, the winter processes dominate the whole year. The reason for this lies in the fact that snowmelt water is routed mostly in winter and spring, while in summer water routing is only affected by remaining snowmelt water in soil moisture and groundwater reservoirs. A confirmation that SCF appears to influence summer half-year discharges more by groundwater  
460 than by surface runoff is its the sensitivity for  $\bar{q}_s$ , which has strong correlation with parameters related to groundwater flow. Nonetheless, the groundwater discharge dominates the total discharge in the model of Biebrza River catchment when looking at the similar results for the total discharge and groundwater discharge response functions. This is also confirmed in functioning of the Biebrza River catchment as described in literature (Pajnowska et al., 1984; Batelaan and Kuntohadi, 2002; Wassen et al., 2006; Chormański et al., 2011a).  
465

This surface runoff response functions ( $\bar{q}_s$  and  $\bar{q}_{s,w}$ ) sensitivity pattern may be related to the soil properties. As presented in Figure 4, the SE upland is dominated by loamy sand ( $h_{con} = 1.7 \times 10^{-5}$  ms<sup>-1</sup>), while much lower hydraulic conductivities are observed in the river valley (dominated by

organic soils  $h_{con} = 5.6 \times 10^{-6} \text{ ms}^{-1}$ ) and the NW upland (big share of sandy loam  $h_{con} = 6.9 \times$   
470  $10^{-6} \text{ ms}^{-1}$ ). The soil-sensitivity pattern is confirmed by the high  $\rho^2$  with the hydraulic conductivity  
and weak, but noticeable  $\rho^2$  with the runoff coefficient. Thus, the infiltration ability and surface  
water routing have a considerable effect in explaining the SCF sensitivity for surface runoff. Another  
important role of surface runoff is revealed by relatively higher sensitivity of  $\bar{q}s_w$  in the river valley  
475 is a considerable water source to spring floods and is transported as surface runoff (Chormański  
et al., 2011b).

The opposite pattern to  $\bar{q}s$  is visible in  $\bar{q}i$ , what may be explained by the way the interflow is  
modelled in WetSpa. Interflow depends not only on the hydraulic conductivity (the key parameter  
for explaining sensitivity for  $\bar{q}s$ ), but also on the slope ( $\rho^2 = 0$  for  $\bar{q}s$ ), which is related to routing  
480 water in the subsoil and, thus shows high  $\rho^2$  with SCF sensitivity for  $\bar{q}i$  and  $\bar{q}i_w$  (Tab. 3).

No  $\rho^2 \geq 0.40$  are found for the SCF sensitivity for  $\bar{q}i_s$  (Tab. 3). In this case, the role of the pa-  
rameters is limited. This is probably because most of the interflow water that could be related to  
SCF produced discharge during winter half-year. The highest  $\rho^2$ , similarly like for  $\bar{q}i$  and  $\bar{q}i_w$ , is  
found with the slope, which can also be easily linked by similarity of spatial patterns with the SCF  
485 sensitivity map (cfr. Fig. 2 and Fig. 8).

Similarly, no  $\rho^2 \geq 0.40$  are found for the SCF sensitivity for  $\bar{q}low$  and  $\bar{q}high$  (Tab. 3). Thus there are  
other sources of variance in the SCF sensitivity for these response functions, which do not originate  
directly in the parameter maps. Only a low but noticeable  $\rho^2$  is found between  $\bar{q}high$  and the slope  
indicating a link with runoff generation in WetSpa.

490 The pattern of  $\bar{q}low$  may be related to extreme groundwater deficits to which mineral soils in  
the uplands have a higher contribution than organic saturated soils in the valley (porosity has low,  
but noticeable  $\rho^2$ ). The spatial pattern of soil moisture in the Biebrza River valley presented by  
Dabrowska-Zielińska et al. (2009) partially confirms the spatial sensitivity analysis results presented  
in this paper.

#### 495 4.2.3 Mean snowmelt response function

A completely different pattern than for the other response functions is presented by SCF sensitivity  
for  $\bar{v}_{sm}$  (Fig. 8). According to Eq. 1,  $v_{sm}$  in a model grid cell (and thus  $\bar{v}_{sm}$  in the entire catchment)  
is calculated based on temperature and precipitation, and then adjusted by SCF. Hence, the sensitivity  
for  $\bar{v}_{sm}$  corresponds with the spatial pattern of the mean yearly temperature averaged in the Thiessen  
500 polygons, while yearly sum of precipitation in the Thiessen polygons is less influential. The pattern  
of SCF is not visible, because in this sensitivity analysis the SCF values in Eq. 1 come from the  
random LH-OAT sampling. The reason that  $\rho^2$  between  $\bar{v}_{sm}$  and temperature and precipitation is  
lower than 1.00 is because the values are aggregated in time and space and lose some of the variance  
important for the relation.

### 505 4.3 Computational constraints

The total computation time, a product of simulation time and number of required runs, is a limitation of the applicability of this method and is similar as in all methods requiring a large number of model runs to achieve the desired output. This was also the case in this study, as WetSpa required about 1 minute for a single run, the total time for 52500 simulations was about 36.5 days. The advantage  
510 of any random sampling based sensitivity analysis method (including LH-OAT) is that it is easily parallelized, i.e. the LH-OAT samples are obtained before the simulations and the model runs are divided over a number of processors or computers.

One could, however, consider decreasing the number of zones ( $n$ ) in which the input data is perturbed or the number LH samples ( $p$ ) to receive the results faster. The latter implies that the LH-  
515 OAT method may not converge (Nossent and Bauwens, 2012). Thus, it seems more reasonable to decrease the number of zones and be satisfied with results at lower spatial resolution.

### 4.4 Applicability of the spatial sensitivity analysis

The analyses conducted in this case study are both a validation and an example application of spatial sensitivity analysis method. The further potential use of this method could be twofold: for generic  
520 sensitivity analysis and for a catchment change scenario analysis.

The generic sensitivity analysis would be similar to the presented approach in this paper. The maps (e.g. Fig. 8) would show zones of the catchment with high or low sensitivity. The correlation analysis as in Table 3 would show the parameters explaining the sensitivity pattern which thus require more attention during the parametrization. This would require possibly denser field sampling of  
525 the correlated parameters additionally to the data subjected to sensitivity analysis, or obtaining the data from a source with less uncertainty; as a result the prediction uncertainty should be decreased. Additionally, the detailed scatter plots of parameters against response functions (e.g. Fig. 9) would show which data ranges of the parameters are the most responsible for the spatial sensitivity pattern. In contrast the “standard” sensitivity analysis is performed for global parameters which usually are  
530 not spatially distributed, or are semi-distributed (i.e. grouped to few categories with the same values; e.g. Ayvaz, 2013).

The catchment change scenario analysis was not investigated in this paper but is a possible application of the presented spatial sensitivity analysis method. In such an analysis instead of SCF input time series the LH-OAT sampling would be done for e.g. different land covers proportions in the  
535 catchment zones. The output of such an analysis would be sensitivity of the zones to changes in land cover and could be used as e.g. a stochastic decision support for urban development.



## 5 Conclusions

With increasing spatial data availability for distributed hydrological modelling a need appears for a methodology for sensitivity analysis of the spatial data. Such a methodology should point to zones  
540 of the study area where the sensitivity of a model spatial input to output is higher or lower and should relate these patterns to the processes simulated by the model. In order to answer these needs this paper presents an application of the LH-OAT sensitivity analysis to the WetSpa model of the Biebrza River catchment. Unlike a standard sensitivity analysis of global model parameters, a spatial approach is presented in this study. The catchment is divided into regular snow grid cells or zones  
545 in which sensitivity of SCF as input data was evaluated. The aim of this study was to present an approach for using sensitivity analysis for spatial input data and to show that the WetSpa model is sensitive to spatial input data. Moreover, it was intended to show that the spatial sensitivity results are related to physical parameters used in the model.

The spatial approach of the LH-OAT sensitivity analysis results in spatial maps presenting areas  
550 of relatively higher and lower sensitivity. In order to extend the analysis, the sensitivity analysis was repeated with different response functions. Most of the sensitivity analysis results were similar for the whole year and winter-half year response functions. Moreover, the sensitivity obtained for the mean discharge response function was very similar to the sensitivity analysis for the mean groundwater discharge response function. Hence, the snow-processes related model behaviour is dominated  
555 by winter half-year and groundwater processes, which is in agreement with the Biebrza River spring flood regime with a dominant share of groundwater discharge. Another important finding was that SCF sensitivity was high in snow zones in the river valley under the winter half-year surface runoff response function. This is in agreement with the observation that the snowmelt in the river valley is a considerable surface runoff source to spring floods.

In this case study, the spatial patterns of SCF sensitivity could, for most of the response functions,  
560 easily be interpreted by co-occurrence of different landscape features like upland and river valley. However, for some of the response functions a straightforward interpretation was impossible. A successful approach to interpret the patterns was performed by analysing the values of coefficients of determination between the physical model parameters and the SCF sensitivity. The spatial pattern  
565 of the sensitivity for different response functions, obtained from these results, is related to different spatial parameters and to different physical processes simulated by the model. The parameters which had a strong correlation with the SCF sensitivity for most of the response functions were: slope, and soil related parameters. The potential runoff coefficient and depression storage were important for only a few response functions, because the catchment is not urbanized. Temperature, which directly  
570 influences the snowmelt generation in the WetSpa model, shows a strong correlation only with the mean snowmelt response function. It is important to mention that the spatial sensitivity quantified with several response functions was correlated to more than one spatial parameter. This shows the

importance of the links between the parameters and which were revealed by this spatially distributed analysis.

575 In summary, a spatial approach of sensitivity analysis can be performed with the LH-OAT algorithm, as presented in the results of this paper, and the SCF is spatially sensitive in the WetSpa model. The pattern of spatial sensitivity is related to spatially distributed physical parameters, the results are confirmed by a priori scientific understanding of the Biebrza River catchment functioning. The spatial sensitivity maps can be used to highlight areas which require better attention during the parametrization and to show which spatial parameters have influence on the analysed phenomena,  
580 in this case the snow related processes.

In future work, other input time series or input parameters should be evaluated in a spatial analysis. It would also be interesting to compare spatial sensitivity of the same input data with other models e.g. TOPMODEL or SWAT. Finally, since spatial SCF is sensitive in WetSpa, other sources of this  
585 input data should be tested in the model.

*Acknowledgements.* First author acknowledge Ignacy Kardel for sharing the DEM and sources for the soil map used in this study. First author also acknowledges the Flemish Government for supporting his research visit to the Vrije Universiteit Brussel. The Hydro-meteorological data was provided by Institute of Meteorology and Water Management - National Research Institute (IMGW).

## 590 **References**

- Abbott, M., Bathurst, J., Cunge, J., O'Connell, P., and Rasmussen, J.: An introduction to the European Hydrological System - Systeme Hydrologique Europeen, "SHE", 2: Structure of a physically-based, distributed modelling system, *Journal of Hydrology*, 87, 61–77, 1986.
- Ampe, E., Vanhamel, I., Salvatore, E., Dams, J., Bashir, I., Demarchi, L., Chan, J., Sahli, H., Canters, F., and Batelaan, O.: Impact of Urban Land-Cover Classification on Groundwater Recharge Uncertainty, Selected Topics in Applied Earth Observations and Remote Sensing, *IEEE Journal of*, 5, 1859–1867, 2012.
- Ayvaz, M. T.: A linked simulation-optimization model for simultaneously estimating the Manning's surface roughness values and their parameter structures in shallow water flows, *Journal of Hydrology*, 500, 183–199, 2013.
- 600 Batelaan, O. and De Smedt, F.: GIS-based recharge estimation by coupling surface-subsurface water balances, *Journal of Hydrology*, 337, 337–355, 2007.
- Batelaan, O. and Kuntohadi, T.: Development and application of a groundwater model for the Upper Biebrza River Basin, *Annals of Warsaw Agricultural University-SGGW, Land Reclamation*, 33, 57–69, 2002.
- Bavera, D., De Michele, C., Pepe, M., and Rampini, A.: Melted snow volume control in the snowmelt runoff model using a snow water equivalent statistically based model, *Hydrol. Process.*, 26, 3405–3415, 2012.
- 605 Berezowski, T. and Chormański, J.: Analysis of use of satellite imagery for extraction of snow cover distribution as a parameter in a rainfall-runoff model, *Scientific Review - Engineering and Environmental Sciences*, 51, 15–26, in Polish with English abstract, 2011.
- Berezowski, T., Chormański, J., Batelaan, O., Canters, F., and Van de Voorde, T.: Impact of remotely sensed land-cover proportions on urban runoff prediction, *International Journal of Applied Earth Observation and Geoinformation*, 16, 54–65, 2012.
- 610 Beven, K. and Freer, J.: A dynamic TOPMODEL, *Hydrol. Process.*, 15, 1993–2011, 2001.
- Beven, K., Lamb, R., Quinn, P., Romanowicz, R., Freer, J., and Singh, V.: Computer models of watershed hydrology, chap. Topmodel, pp. 627–668, Water Resources Publications, Colorado, USA, 1995.
- 615 Butt, M. J. and Bilal, M.: Application of snowmelt runoff model for water resource management, *Hydrol. Process.*, 25, 3735–3747, 2011.
- Chormański, J.: Analysis of urbanization impact on changes in river discharge - a case study of the Biała river catchment, *Studia Geotechnica et Mechanica*, 34, 19–32, 2012.
- Chormański, J. and Batelaan, O.: Application of the WetSpa distributed hydrological model for catchment with significant contribution of organic soil. Upper Biebrza case study, *Annals of Warsaw University of Life Sciences-SGGW. Land Reclamation*, 43, 25–35, 2011.
- 620 Chormański, J. and Michałowski, R.: Hydrological catchment model WetSpa-SGGW integrated with a calculation module in ArcGIS environment, *Scientific Review - Engineering and Environmental Sciences*, 53, 196–206, in Polish, 2011.
- 625 Chormański, J., Van de Voorde, T., De Roeck, T., Batelaan, O., and Canters, F.: Improving Distributed Runoff Prediction in Urbanized Catchments with Remote Sensing based Estimates of Impervious Surface Cover, *Sensors*, 8, 910–932, 2008.
- Chormański, J., Berezowski, T., Okruszko, T., and Ignar, S.: Contemporary problems of management and environmental protection. Vol. 7 - Issue of Landscape Conservation and Water Management in Rural Areas, chap.

- 630 Hydrography and hydrology of the upper Biebrza basin, pp. 175–203, Uniwersytet Warmiński Mazurski, Olsztyn, Poland, 2011a.
- Chormański, J., Okruszko, T., Ignar, S., Batelaan, O., Rebel, K., and Wassen, M.: Flood mapping with remote sensing and hydrochemistry: a new method to distinguish the origin of flood water during floods, *Ecological Engineering*, 37, 1334–1349, 2011b.
- 635 Commission of the European Communities: CORINE Land-cover, <http://www.eea.europa.eu/publications/COR0-landcover>, last access: 1 November 2013, 2013.
- Dabrowska-Zielińska, K., Gruszczyńska, M., Lewiński, S., Hościło, A., and Bojanowski, J.: Application of remote and in situ information to the management of wetlands in Poland, *Journal of Environmental Management*, 90, 2261–2269, 2009.
- 640 Dams, J., Dujardin, J., Reggers, R., Bashir, I., Canters, F., and Batelaan, O.: Mapping impervious surface change from remote sensing for hydrological modeling, *Journal of Hydrology*, 485, 84–95, 2013.
- De Smedt, F., Liu, Y. B., and Gebremeskel, S.: Risk Analysis II, chap. Hydrologic modeling on a catchment scale using GIS and remote sensed land use information, pp. 295 – 304, WTI press, Southampton, Boston, 2000.
- 645 Demarchi, L., Canters, F., Chan, J. C.-W., Ampe, E., and Batelaan, O.: Use of land-cover fractions derived from MESMA for urban water balance calculation, in: *Geoscience and Remote Sensing Symposium (IGARSS), 2012 IEEE International*, pp. 1594–1597, IEEE, 2012.
- Duan, Q., Gupta, V., and Sorooshian, S.: Shuffled complex evolution approach for effective and efficient global minimization, 76, 501–521, 1993.
- 650 Dujardin, J., Batelaan, O., Canters, F., Boel, S., Anibas, C., and Bronders, J.: Improving surface-subsurface water budgeting using high resolution satellite imagery applied on a brownfield, *Science of The Total Environment*, 409, 800–809, 2011.
- Fu, S., Sonnenborg, T. O., Jensen, K. H., and He, X.: Impact of Precipitation Spatial Resolution on the Hydrological Response of an Integrated Distributed Water Resources Model, *Vadose Zone Journal*, 10, 25–36, 2011.
- 655 Hall, D. K., Riggs, G. A., and Salomonson, V. V.: MODIS/Terra Snow Cover Daily L3 Global 500m Grid V005. Dataset used 2007 - 2009., digital media., 2006.
- Hostache, R., Lai, X., Monnier, J., and Puech, C.: Assimilation of spatially distributed water levels into a shallow-water flood model. Part II: Use of a remote sensing image of Mosel River, *Journal of Hydrology*, 660 390, 257–268, 2010.
- Klein, A. G., Hall, D. K., and Riggs, G. A.: Improving snow cover mapping in forests through the use of a canopy reflectance model, *Hydrol. Process.*, 12, 1723–1744, 1998.
- Lee, S., Klein, A. G., and Over, T. M.: A comparison of MODIS and NOHRSC snow-cover products for simulating streamflow using the Snowmelt Runoff Model, *Hydrol. Process.*, 19, 2951–2972, 2005.
- 665 Li, X. and Williams, M. W.: Snowmelt runoff modelling in an arid mountain watershed, Tarim Basin, China, *Hydrol. Process.*, 22, 3931–3940, 2008.
- Liston, G. E.: Interrelationships among Snow Distribution, Snowmelt, and Snow Cover Depletion: Implications for Atmospheric, Hydrologic, and Ecologic Modeling, *Journal of Applied Meteorology*, 38, 1474–1487, 1999.

- 670 Liu, Y. B. and De Smedt, F.: WetSpa Extension, A GIS-based Hydrologic Model for Flood Prediction and Watershed Management, Department of Hydrology and Hydraulic Engineering, Vrije Universiteit Brussel, pp. 66, 2004.
- Liu, Y. B., Gebremeskel, S., De Smedt, F., Hoffmann, L., and Pfister, L.: A diffusive transport approach for flow routing in GIS-based flood modeling, *Journal of Hydrology*, 283, 91 – 106, 2003.
- 675 Martinec, J.: Snowmelt - Runoff Model For Stream Flow Forecasts, *Nordic Hydrology*, 6, 145–154, 1975.
- McKay, M., Beckman, R., and Conover, W.: Comparison of Three Methods for Selecting Values of Input Variables in the Analysis of Output From a Computer Code., *Technometrics*, 21, 239–245, 1979.
- Mioduszewski, W., Querner, E. P., Slesicka, A., and Zdanowicz, A.: Basis of water management in the Valley of Lower Biebrza River, *Journal of Water and Land Development*, pp. 49–61, 2004.
- 680 Morris, M. D.: Factorial Sampling Plans For Preliminary Computational Experiments, *Technometrics*, 33, 161–174, 1991.
- Nash, J. and Sutcliffe, J.: River flow forecasting through conceptual models part I - A discussion of principles, *Journal of Hydrology*, 10, 282–290, 1970.
- Nossent, J.: Sensitivity and uncertainty analysis in view of the parameter estimation of a SWAT model of the river Kleine Nete, Belgium, Ph.D. thesis, Vrije Universiteit Brussel, 2012.
- 685 Nossent, J. and Bauwens, W.: Multi-variable sensitivity and identifiability analysis for a complex environmental model in view of integrated water quantity and water quality modeling, *Water Science and Technology*, 65, 539–549, 2012.
- Nossent, J., Tolessa Leta, O., and Bauwens, W.: Assessing the convergence of a Morris-like screening method for a complex environmental model, in: 7th International Conference on Sensitivity Analysis of Model Output. Oral presentations Proceedings, 2013.
- 690 Obled, C., Wendling, J., and Beven, K.: The Sensitivity of Hydrological Models To Spatial Rainfall Patterns - An Evaluation Using Observed Data, *Journal of Hydrology*, 159, 305–333, 1994.
- Pajnowska, H., Poźniak, R., and Wienclaw, E.: Groundwaters of the Biebrza Valley, *Polish Ecological Studies*, 10, 301–311, 1984.
- 695 Parajka, J. and Blöschl, G.: The value of MODIS snow cover data in validating and calibrating conceptual hydrologic models, *Journal of Hydrology*, 358, 240–258, 2008.
- Poelmans, L., Van Rompaey, A., and Batelaan, O.: Coupling urban expansion models and hydrological models: How important are spatial patterns?, *Land Use Policy*, 27, 965–975, 2010.
- 700 Querner, E.: Description and application of the combined surface and groundwater flow model MOGROW, *Journal of Hydrology*, 192, 158–188, 1997.
- R Development Core Team: R: A Language and Environment for Statistical Computing, R Foundation for Statistical Computing, Vienna, Austria, ISBN 3-900051-07-0, 2013.
- Rojek, M.: Evaporation from free water surface 1951-2000. Map in scale 1:2 500 000., Tech. rep., IMGW, 705 Warsaw, Poland, 2000.
- Sælthun, N.: The Nordic HBV Model, Norwegian Water Resources and Energy Administration Publication, Oslo, Norway, 7, 1996.
- Safari, A., De Smedt, F., and Moreda, F.: WetSpa model application in the Distributed Model Intercomparison Project (DMIP2), *Journal of Hydrology*, 418–419, 78–89, 2012.

- 710 Saltelli, A.: Sensitivity analysis for importance assessment, *Risk Analysis*, 22, 579–590, 2002.
- Schuermans, J. M. and Bierkens, M. F. P.: Effect of spatial distribution of daily rainfall on interior catchment response of a distributed hydrological model, *Hydrology and Earth System Sciences*, 11, 677–693, 2007.
- Sobol', I.: Sensitivity analysis for non-linear mathematical models, *Mathematical Modeling & Computational Experiment*, 1, 407–414, 1993.
- 715 Şorman, A. A., Şensoy, A., Tekeli, A. E., Şorman, A. U., and Akyürek, Z.: Modelling and forecasting snowmelt runoff process using the HBV model in the eastern part of Turkey, *Hydrol. Process.*, 23, 1031–1040, 2009.
- Stachý, J.: *Hydrological Atlas of Poland*, vol. 1, Wydawnictwo Geologiczne, Warsaw, Poland, in polish with english translation., 1987.
- Stisen, S., McCabe, M. F., Refsgaard, J. C., Lerer, S., and Butts, M. B.: Model parameter analysis using remotely  
720 sensed pattern information in a multi-constraint framework, *Journal of Hydrology*, 409, 337–349, 2011.
- Tahir, A. A., Chevallier, P., Arnaud, Y., Neppel, L., and Ahmad, B.: Modeling snowmelt-runoff under climate scenarios in the Hunza River basin, Karakoram Range, Northern Pakistan, *Journal of Hydrology*, 409, 104–117, 2011.
- Tekeli, A. E., Akyürek, Z., Arda Şorman, A., Şensoy, A., and Unal Şorman, A.: Using MODIS snow cover  
725 maps in modeling snowmelt runoff process in the eastern part of Turkey, *Remote Sensing of Environment*, 97, 216–230, 2005.
- Turanyi, T. and Rabitz, H.: *Sensitivity Analysis*, chap. Local Methods, Wiley, Chichester, 2000.
- Udnaes, H. C., Alfnes, E., and Andreassen, L. M.: Improving runoff modelling using satellite-derived snow covered area?, *Nordic Hydrology*, 38, 21–32, 2007.
- 730 van Griensven, A., Meixner, T., Grunwald, S., Bishop, T., Diluzio, M., and Srinivasan, R.: A global sensitivity analysis tool for the parameters of multi-variable catchment models, *Journal of Hydrology*, 324, 10–23, 2006.
- Verbeiren, B., Van De Voorde, T., Canters, F., Binard, M., Cornet, Y., and Batelaan, O.: Assessing urbanisation effects on rainfall-runoff using a remote sensing supported modelling strategy, *International Journal of Applied Earth Observation and Geoinformation*, 21, 92–102, 2013.
- 735 Wang, Z.-M., Batelaan, O., and De Smedt, F.: A distributed model for water and energy transfer between soil, plants and atmosphere (WetSpa), *Physics and Chemistry of The Earth*, 21, 189 – 193, 1996.
- Wassen, M. J., Okruszko, T., Kardel, I., Chormanski, J., Swiatek, D., Mioduszewski, W., Bleuten, W., Querner, E. P., El Kahloun, M., Batelaan, O., and Meire, P.: Eco-hydrological functioning of the Biebrza wetlands: Lessons for the conservation and restoration of deteriorated wetlands, *Wetlands: Functioning, Biodiversity  
740 Conservation, and Restoration*, 191, 285–310, 2006.
- Yang, J., Liu, Y., Yang, W., and Chen, Y.: Multi-Objective Sensitivity Analysis of a Fully Distributed Hydrologic Model WetSpa, *Water Resources Management*, 26, 109–128, 2012.
- Younger, P. M., Freer, J. E., and Beven, K. J.: Detecting the effects of spatial variability of rainfall on hydrological modelling within an uncertainty analysis framework, *Hydrological Processes*, 23, 1988–2003, 2009.
- 745 Zeinivand, H. and De Smedt, F.: Prediction of snowmelt floods with a distributed hydrological model using a physical snow mass and energy balance approach, *Natural hazards*, 54, 451–468, 2010.

**Table 1.** Descriptions and abbreviations of the 15 response functions (RF) which were used in the sensitivity analysis.


Description	RF abbreviation		
	yearly	winter	summer
mean simulated discharge	$\bar{q}$	$\bar{q}_w$	$\bar{q}_s$
mean simulated discharge from surface runoff	$\bar{q}_s$	$\bar{q}_{s_w}$	$\bar{q}_{s_s}$
mean simulated discharge from interflow	$\bar{q}_i$	$\bar{q}_{i_w}$	$\bar{q}_{i_s}$
mean simulated discharge from groundwater	$\bar{q}_g$	$\bar{q}_{g_w}$	$\bar{q}_{g_s}$
mean of the highest 10% simulated discharges	$\bar{q}_{high}$	-	-
mean of the lowest 10% simulated discharges	$\bar{q}_{low}$	-	-
mean simulated snowmelt	$\bar{v}_{sm}$	-	-

**Table 2.** WetSpa parameter maps used to analyse the sensitivity analysis results. The generic input maps used to derive the parameters maps are marked with + if used and - if not used.

Parameter	Abbreviation	Generic input map		
		Soil	Land-use	Elevation
slope	$slp$	-	-	+
hydraulic conductivity	$h_{con}$	+	-	-
soil field capacity	$f_{cap}$	+	-	-
maximal interception	$i_{max}$	-	+	-
minimal interception	$i_{min}$	-	+	-
pore size distribution index	$p_{ind}$	+	-	-
soil porosity	$por$	+	-	-
residual soil moisture content	$res$	+	-	-
root depth	$r_d$	-	+	-
wilting point	$w_p$	+	-	-
runoff coefficient	$r_c$	+	+	+
depression storage	$dep$	+	+	+
initial soil moisture content	$i_{sm}$	+	-	+
Thiessen polygons for temperature	$T$	from the stations		
Thiessen polygons for precipitation	$P$	from the stations		


**Table 3.**  $\rho^2$  values calculated for the WetSpa distributed parameters (rows) and the SCF sensitivity maps under different response functions (columns).  $\rho^2 \geq 0.40$  are bold; the frequency that this condition is true is summarized ( $\Sigma$ ) in the last row and column. Explanation of the response functions and parameters is presented in Tables 1 and 2.

	$\bar{q}$	$\bar{q}_w$	$\bar{q}_s$	$\bar{q}^s$	$\bar{q}^s_w$	$\bar{q}^s_s$	$\bar{q}^i$	$\bar{q}^i_w$	$\bar{q}^i_s$	$\bar{q}^g$	$\bar{q}^g_w$	$\bar{q}^g_s$	$\bar{q}^{high}$	$\bar{q}^{low}$	$\bar{v}_{sm}$	$\Sigma$
<i>slp</i>	<b>0.58</b>	<b>0.58</b>	<b>0.48</b>	0.00	0.00	0.02	<b>0.45</b>	<b>0.44</b>	0.23	<b>0.56</b>	<b>0.56</b>	<b>0.45</b>	0.36	0.12	0.09	8
<i>h_con</i>	0.00	0.00	0.00	<b>0.40</b>	<b>0.40</b>	0.28	0.16	0.15	0.11	0.00	0.00	0.00	0.01	0.00	0.00	2
<i>f_cap</i>	0.25	0.20	<b>0.41</b>	0.15	0.15	0.02	0.24	0.24	0.14	0.27	0.23	<b>0.40</b>	0.15	0.18	0.12	2
<i>i_max</i>	0.00	0.01	0.00	0.03	0.03	0.03	0.00	0.00	0.07	0.00	0.00	0.00	0.00	0.00	0.01	0
<i>i_min</i>	0.09	0.07	0.16	0.03	0.03	0.01	0.03	0.04	0.02	0.10	0.08	0.16	0.05	0.02	0.01	0
<i>p_ind</i>	0.09	0.07	0.20	0.21	0.20	<b>0.42</b>	0.00	0.00	0.01	0.08	0.06	0.18	0.06	0.18	0.20	1
<i>por</i>	0.25	0.20	<b>0.44</b>	0.03	0.04	0.00	0.16	0.16	0.10	0.26	0.22	<b>0.42</b>	0.15	0.22	0.17	2
<i>res</i>	0.25	0.20	<b>0.42</b>	0.10	0.11	0.01	0.20	0.20	0.12	0.27	0.23	<b>0.41</b>	0.15	0.19	0.13	2
<i>r_d</i>	0.00	0.01	0.00	0.12	0.12	0.08	0.00	0.00	0.04	0.00	0.00	0.01	0.00	0.00	0.01	0
<i>w_p</i>	0.25	0.21	<b>0.42</b>	0.14	0.14	0.02	0.23	0.23	0.13	0.27	0.23	<b>0.41</b>	0.15	0.18	0.12	2
<i>r_c</i>	0.03	0.02	0.11	0.30	0.30	0.12	0.11	0.10	0.04	0.05	0.03	0.12	0.02	0.08	0.06	0
<i>dep</i>	0.26	0.26	0.24	0.11	0.11	0.15	0.05	0.05	0.06	0.24	0.24	0.22	0.14	0.06	0.03	0
<i>i_sm</i>	0.07	0.06	0.10	0.00	0.00	0.00	0.07	0.07	0.00	0.07	0.06	0.10	0.05	0.04	0.00	0
<i>T</i>	0.05	0.05	0.02	0.03	0.03	0.16	0.08	0.09	0.00	0.04	0.05	0.02	0.01	0.00	<b>0.42</b>	1
<i>P</i>	0.02	0.03	0.00	0.00	0.00	0.02	0.01	0.01	0.06	0.02	0.03	0.00	0.04	0.08	0.19	0
$\Sigma$	1	1	5	1	1	1	1	1	0	1	1	5	0	0	1	

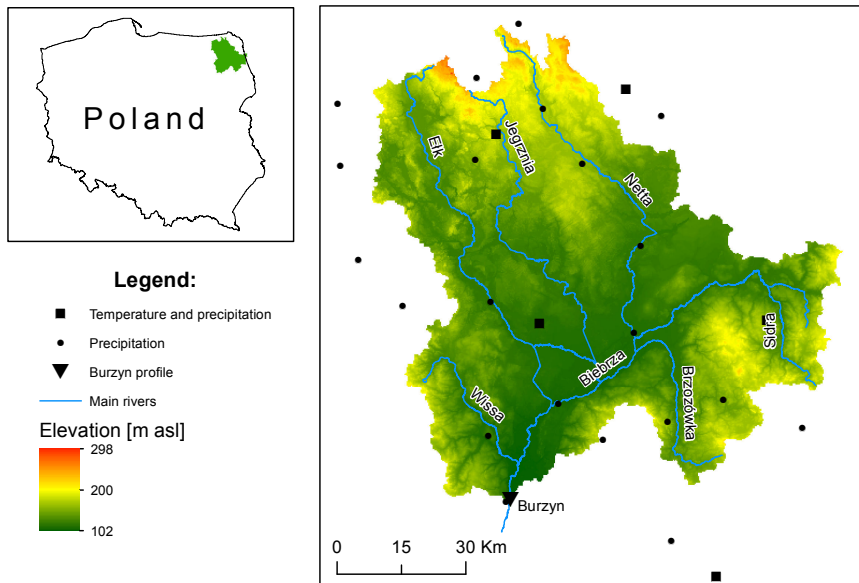


**Figure 1.** Topography of the study area and location of meteorological stations.




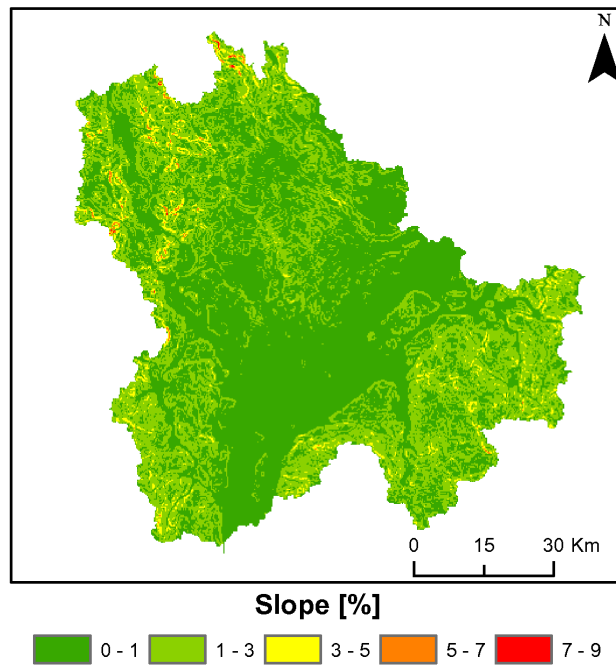


**Figure 2.** Slope map of the study area.

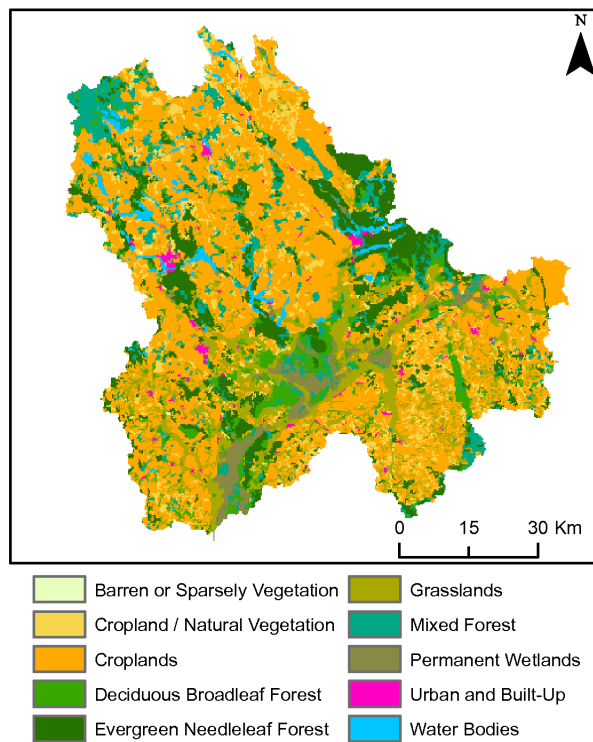


**Figure 3.** Land-use in the study area. Land-use classes are the same as used in the WetSpa model, defined by International Geosphere-Biosphere Program classification system.

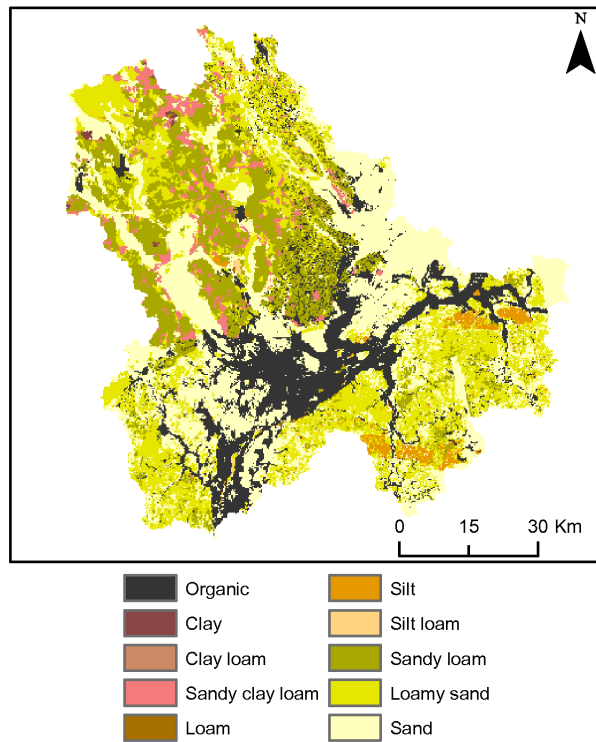


**Figure 4.** Soil texture map of the study area. Soil textures are the same as used in the WetSpa model, defined by U.S. Department of Agriculture.

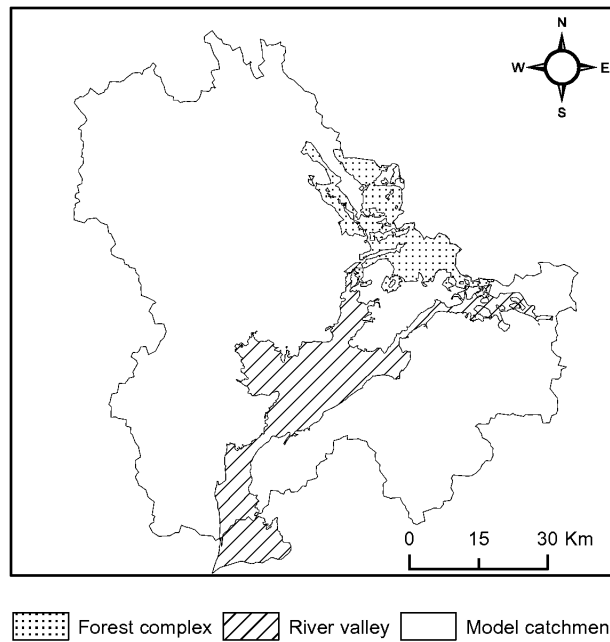


**Figure 5.** Major landscape features of the Biebrza River catchment. The Biebrza River valley runs NE-SW through the catchment with at the upstream part of the valley a large forest complex. Catchment area outside the river valley is upland/plateau with mineral soils.

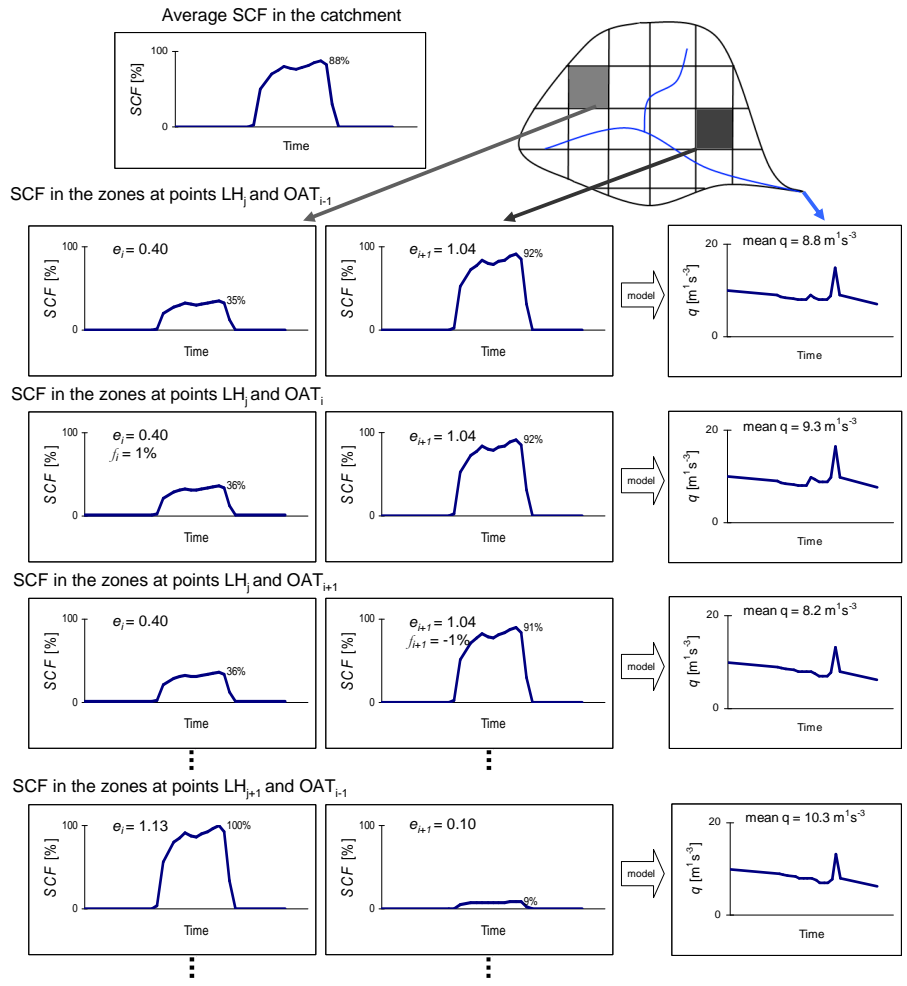


**Figure 6.** Graph illustrating the spatial LH-OAT SCF sampling for calculating the sensitivity analysis. The top row presents a spatially averaged, observed SCF for an example catchment (top left panel) and the example catchment with highlighted snow zones  $i$  and  $i + 1$  (top right panel). The next rows presents SCF in the zones  $i$  (panels in the left column) and  $i + 1$  (panels in the central column) in the advancing LH-OAT loops starting from the loop  $j - 1$  and the discharge simulated during these loops (panels in the right column). Symbols are the same as in Eq. 4:  $e_i$  and  $e_{i+1}$  represent a fraction of the SCF in the snow zones  $i$  and  $i + 1$ ,  $f$  is the fraction by which  $e$  was changed during the OAT perturbation,  $q$  is the discharge simulated at the catchment outlet.

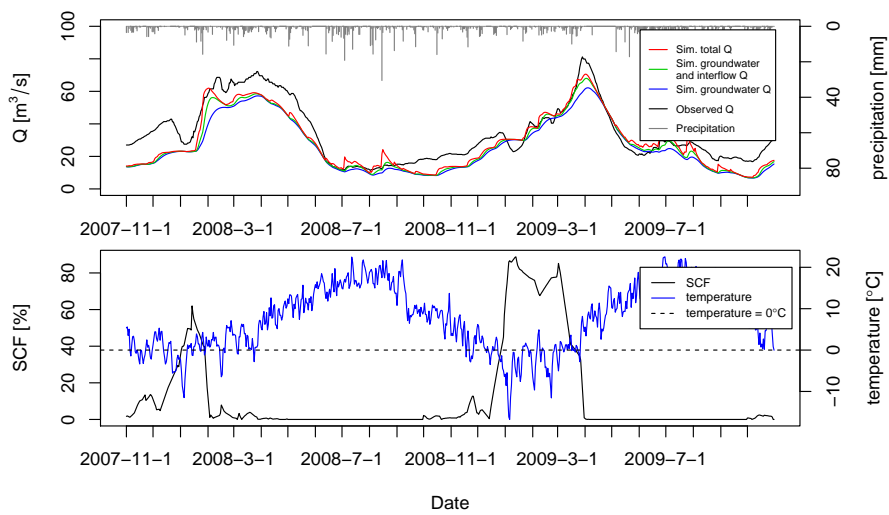

**Figure 7.** Observed and simulated daily discharge from the calibrated WetSpa for the period in which the sensitivity analysis was conducted (upper panel). Also presented is WetSpa simulated groundwater and interflow discharge as well as only groundwater discharge. Catchment average daily temperature and SCF in the same period is presented in the lower panel. The ticks on the time axis indicate the 1<sup>st</sup> day of a month.

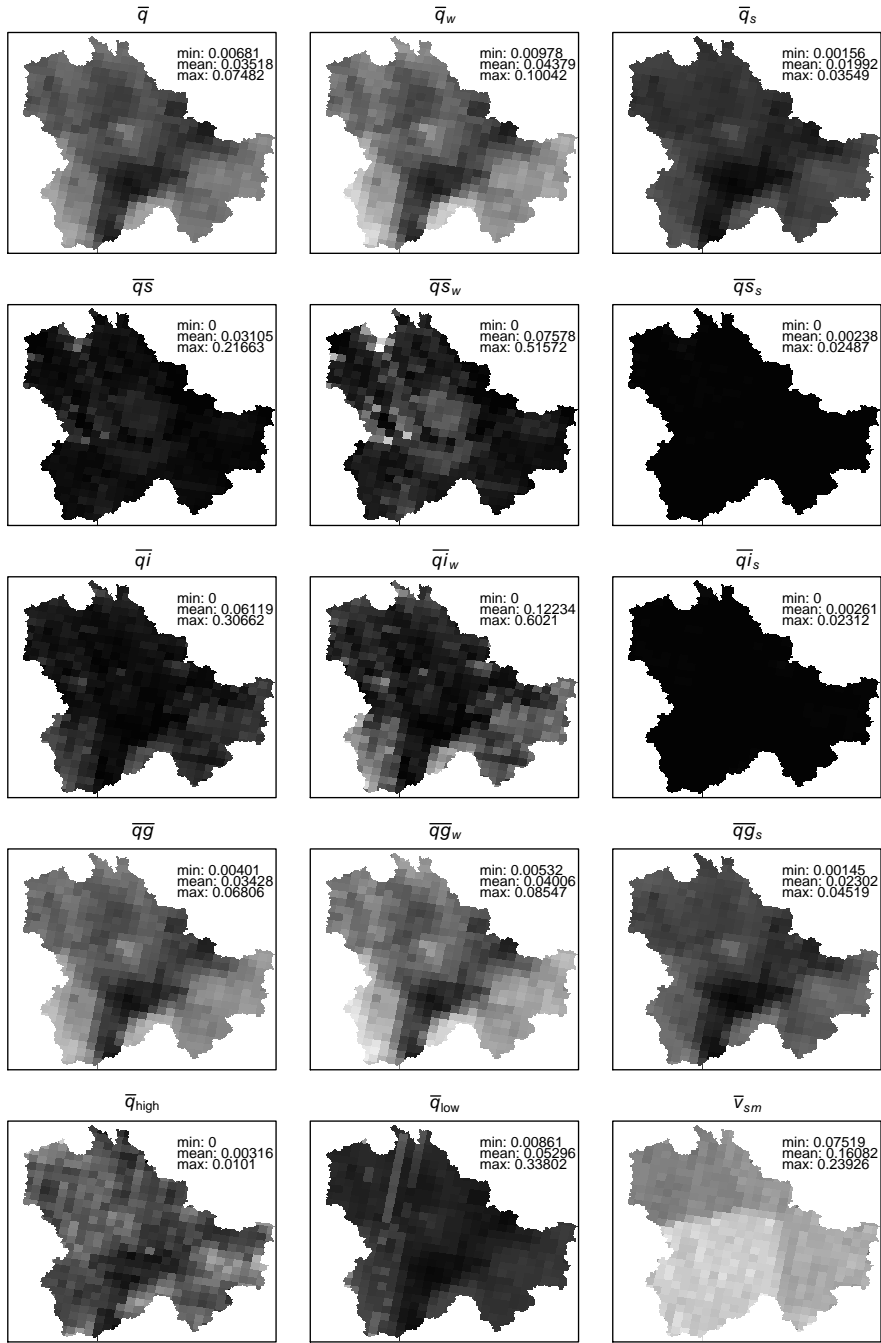

**Figure 8.** The SCF sensitivity maps showing  $s_i^*$  in snow zones of the WetSpa model for Biebrza River catchment for different response functions. The grey scale represents linearly stretched  $s_i^*$  values between minimum (black) and maximum (white); for the top four rows the grey scale is selected to match the data range of all maps in each row; in the lowest row each map has individual grey scale between the minimum and maximum values indicated on the plots (see Sect. 3.2 for details). Explanation of the response functions is presented in Table 1.

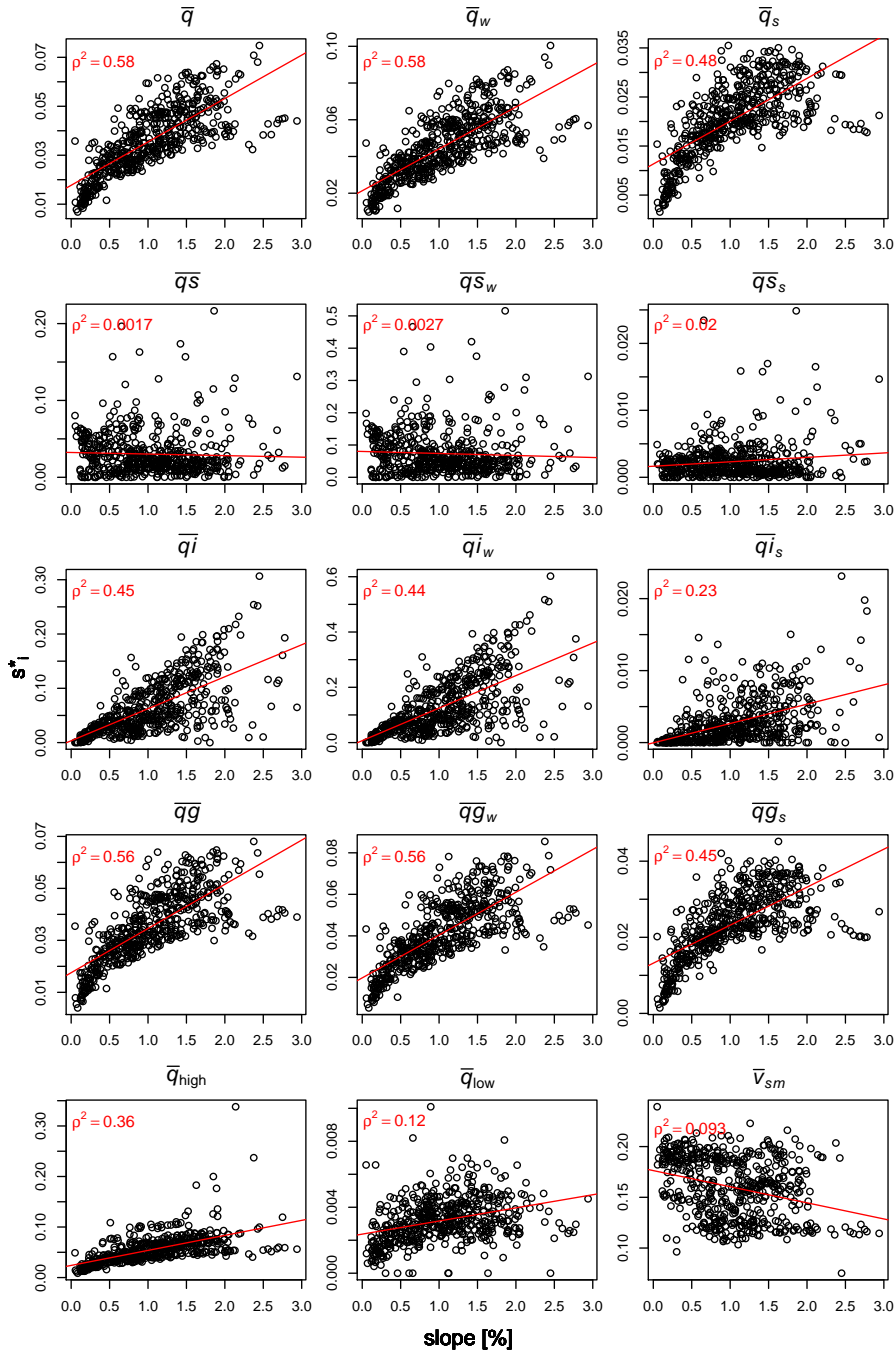

**Figure 9.** Relation between the slope and spatial sensitivity analysis results ( $s_i^*$ ) quantified with different response functions. Explanation of the response functions is presented in Table 1.