

1 **Satellite Radar Altimetry for Monitoring Small River and Lakes**  
2 **in Indonesia**

3

4 **Y.B. Sulistioadi<sup>1,5</sup>, K-H. Tseng<sup>2</sup>, C.K. Shum<sup>3,9</sup>, H. Hidayat<sup>4,7</sup>, M. Sumaryono<sup>5</sup>,**  
5 **A. Suhardiman<sup>5,6</sup>, F. Setiawan<sup>7</sup> and S. Sunarso<sup>8</sup>**

6 [1] Hydrological Sciences Laboratory, NASA Goddard Space Flight Center, Greenbelt, MD  
7 United States

8 [2] Center of Space & Remote Sensing Research, National Central University, Taiwan

9 [3] Division of Geodetic Science, School of Earth Sciences, the Ohio State University,  
10 Columbus, OH, United States

11 [4] Hydrology and Quantitative Water Management Group, Wageningen University,  
12 Wageningen, the Netherlands

13 [5] Department of Forest Science, University of Mulawarman, Samarinda, Indonesia

14 [6] Department of Global Agricultural Sciences, the University of Tokyo, Japan

15 [7] Research Center for Limnology, Indonesian Institute of Sciences, Cibinong, Indonesia

16 [8] PT Vale Indonesia, Tbk, Sorowako, Indonesia

17 [9] Institute of Geodesy and Geophysics, Chinese Academy of Sciences, Wuhan, China

18 Correspondence to: Y. B. Sulistioadi (y.b.sulistioadi@nasa.gov)

19

# 1 **Abstract**

2 Remote sensing and satellite geodetic observations are capable of hydrologic monitoring of  
3 freshwater resources. Although satellite radar altimetry has been used in monitoring water level  
4 or discharge, its use is often limited to monitoring large rivers ( $> 1$  Km) with longer interval  
5 period ( $> 1$  week) because of its low temporal and spatial resolutions (i.e., satellite revisit  
6 period) . Several studies have reported successful retrieval of water level for small rivers as  
7 narrow as 40 m. However, processing current satellite altimetry signals for such small water  
8 bodies to accurately retrieve water level remains challenging. Physically, the radar signal  
9 returned by water bodies smaller than the satellite footprint is most likely contaminated by non-  
10 water surface, which may degrade the measurement quality. In order to address this scientific  
11 challenge, we carefully selected the waveform shapes corresponding to the range measurement  
12 resulted by standard retracers for the European Space Agency's (ESA's) Envisat  
13 (Environmental Satellite) radar altimetry. We applied this approach to small (40–200 m width)  
14 and medium-sized (200–800 m width) rivers and small lakes (extent  $< 1000\text{km}^2$ ) in the humid  
15 tropics of Southeast Asia, specifically in Indonesia. This is the first study that explored the  
16 capability of satellite altimetry to monitor small water bodies in Indonesia.

17 The major challenges in this study include the size of the water bodies that are much smaller  
18 than the nominal extent of the Envisat satellite footprint (e.g.  $\sim 250$  m compare to  $\sim 1.7$  km,  
19 respectively) and slightly smaller than the along track distance (i.e.  $\sim 370$  m). We addressed this  
20 challenge by optimally using geospatial information and optical remote sensing data to define  
21 the water bodies accurately, thus minimizing the probability of non-water contamination in the  
22 altimetry measurement. Considering that satellite altimetry processing may vary with different  
23 geographical regions, meteorological conditions, or hydrologic dynamic, we further evaluated  
24 the performance of all four Envisat standard retracking procedures.

25 We found that satellite altimetry provided a good alternative or the only means in some regions,  
26 to measure the water level of medium-sized river and small lake with high accuracy (root mean  
27 square error of 0.21- 0.69 m and correlation coefficient of 0.94- 0.97). In contrast to previous  
28 studies, we found that the commonly-used Ice-1 retracking algorithm was not necessarily the  
29 best retracker among the four standard waveform retracking algorithms for Envisat radar  
30 altimetry observing inland water bodies. As a recommendation, we propose to include the  
31 identification and selection of standard waveform shapes to complete the use of standard

1 waveform retracking algorithms for Envisat radar altimetry data over small and medium-sized  
2 rivers and small lakes.

3

4

5

# 1 **1 Introduction**

2 A number of small to medium-sized rivers are poorly gauged (Alsdorf and Lettenmaier, 2003).  
3 Small rivers are defined as those with 40-200 m width and 10-100 m<sup>3</sup>/s average discharge,  
4 while medium rivers with 200-800 m width and 100-1000 m<sup>3</sup>/s average discharge (Meybeck et  
5 al. (1996)). The installation and operation of in situ measurement such as permanent gauging is  
6 costly and not a priority for developing countries such as in Indonesia. However, there is an  
7 increasing interest for continuous satellite-based monitoring of hydrologic bodies, including  
8 narrow or small rivers. Therefore, with the absence of continuously operating in-situ  
9 measurements, it is a scientific and social challenges to develop a complementary water  
10 resources monitoring system, with water level and discharge as the essential variables.

11 Space geodesy and satellite remote sensing are viable sources of observation to complement or  
12 replace in-situ measured data that is lacking or unavailable. A number of researches have  
13 demonstrated the capability of remote sensing to measure hydrological variables (Tang et al.,  
14 2009). Initiatives to develop global river and lake water level database exist to date, but none  
15 of them account for small to medium-sized rivers and lakes in the humid tropics.

16 Satellite altimetry missions were initially aimed to support oceanographic studies (Brown and  
17 Cheney, 1983). However, scientists were able to use altimetry data to retrieve water surface  
18 elevation of large rivers and lakes. These studies include those utilizing early satellite altimetry  
19 missions (Wingham and Rapley 1987, Koblinsky et.al., 1993, Morris and Gill, 1994), as well  
20 as the recent satellite altimetry missions (e.g. Birkett, 1998, Benveniste and Defrenne, 2003,  
21 Kouraev et.al, 2004, Calmant and Seyler, 2006, Frappart et.al, 2006, Cretaux et.al, 2011).

22 Application of satellite altimetry to monitor inland waters has several limitations. The long  
23 satellite repeat cycle makes the satellite potentially miss important hydrological events (e.g.  
24 flash flood) between the repeat. For instance, the repeat period of for TOPEX/Poseidon and  
25 Jason-1/2 is 10 days; 35 days for ERS-1/2, Envisat and SARAL/Altika; and 91 days for ICESat.  
26 The low spatial resolution of radar altimeter as represented by the radar altimeter footprint  
27 (about 1.7 to 3 km for calm waters), limits the measurement only to wide rivers, due to  
28 interference of returned radar signal by non-water features. Earlier studies showed that satellite  
29 radar altimetry was useful to monitor large rivers with width > 1km (Birkett, 1998, Birkett et  
30 al., 2002). However, recent studies demonstrated successful retrieval of water level of small  
31 rivers (<100 m width) (Kuo and Kao, 2011, Michailovsky et al., 2012). Nonetheless, the

1 processing of satellite altimetry measurement for small water bodies remains challenging  
2 because of its spatial and temporal limitations.

3 Early studies of satellite altimetry to retrieve water level of a river used waveform shape to  
4 match the specular characteristics that exclusively belongs to the signals returned by the river  
5 (Koblinsky et al., 1993). Specular refers to a reflection characteristic where a signal reflects  
6 into one direction, thus match the reflection by a mirror (e.g. Torrance and Sparrow, 1967). In  
7 the context of radar signal processing, this occurs when the radar signal hits calm or smooth  
8 water surface, which is represented as a peak in the return signal power (power spectra?). Along  
9 with this principle, scientists developed non-ocean retracker in the last decade. These include  
10 the offset center of gravity (OCOG) or Ice-1 (Wingham et al, 1986), , volume scattering  
11 retracker (Davis, 1993), sea ice retracker (Laxon, 1994), NASA  $\beta$ - retracker (Zwally, 1996),  
12 surface / threshold retracker (Davis, 1997) and Ice-2 (Legresy and Remy, 1997). The offset  
13 center of gravity (OCOG) or Ice-1 (Wingham et al., 1986) is a simple but robust retracker that  
14 only requires the statistics of the waveform samples and does not require any model (model-  
15 free retracker) (Bamber, 1994). The Ice-2 algorithm modifies Ocean retracker (Brown, 1977)  
16 by adding scattering distribution coefficient that describes the vertical profile of the reflecting  
17 surfaces. This coefficient accounts for the interference of the default scattering pattern as  
18 generated by snow, ice sheet, sand or vegetation (Legresy and Remy, 1997). Laxon (1994)  
19 introduced Sea Ice algorithm to specifically study sea ice elevation by: (1) characterizing the  
20 power and shapes of the radar return, (2) classifying the sea ice and determining the waveform  
21 parameters, and (3) correcting the retracked range. Ice-1, Ice-2 and Sea Ice along with the Ocean  
22 retracker (that is exclusively developed for ocean studies) are the standard retracker for  
23 European Space Agency (ESA)'s Envisat (Environmental Satellite) until the satellite  
24 decommissioned in June 2012. Recent developments of inland water retracking methods  
25 include the improvements of the threshold retracker (Davis, 1997) by Lee, (2008) and Bao et  
26 al. (2009), sub-waveform analysis (e.g. Hwang et al., 2006 and Fenoglio-Marc et al., 2009) and  
27 sub-waveform filtering and track offset correction (Tseng et al., 2012).

28 For inland water studies such as river and lake, Frappart et al. (2006) found Ice-1 as the best  
29 retracker for large rivers (e.g. Amazon River) over the other standard retracker for Envisat  
30 (e.g. Ocean, Ice-2 and Sea Ice). None of these retracker are specifically developed for inland  
31 waters. Satellite altimetry processing also varies depending on geographical regions,  
32 meteorological conditions, and hydrological dynamics of the water bodies. Up to this point, no

1 “one size fits all” method for satellite altimetry waveform retracking is readily available to  
2 measure water level of small (40–200 m width) and medium-sized (200–800 m width) rivers  
3 and lakes. Hence is the need of developing specific algorithm or additional procedure for  
4 satellite altimetry applications to study inland waters. Furthermore, there is also a need to  
5 evaluate the commonly used Ice-1-based retracker in different regions of interest

6 Since the size of the water bodies is smaller than the satellite footprint, the surrounding non-  
7 water surface often contaminates the satellite altimetry’s returned radar signal. In this study, we  
8 solved this issue by integrating geospatial information and optical remote sensing with satellite  
9 altimetry measurement to monitor small water bodies. Our study indicates that careful  
10 demarcation of water bodies reduces the contamination of return radar signal caused by the  
11 presence of non-water surface, thus improving the quality of the measurement.

12 In this study, we processed the results of Envisat standard waveform retracking procedures  
13 (Ocean, Ice-1, Ice-2 and Sea Ice) to monitor water level of a small river, a medium river and  
14 two lakes in the tropics. In addition to the standard waveform retracking procedures, we  
15 performed careful spatial and waveform shape selection and outlier detection to screen out low  
16 quality data. We then evaluated the results against in-situ measured water level to assess their  
17 accuracy.

18

## 19 **2 Study Area**

20 This study was conducted in the following water bodies in Indonesia (Figures 1 and 2):  
21 Mahakam and Karangmumus Rivers in East Kalimantan Province (Borneo Island), Lakes  
22 Matano and Towuti in South Sulawesi Province (Sulawesi Island). Karangmumus River is a  
23 tributary downstream of Mahakam River, while Lakes Matano and Towuti are part of Malili  
24 Lakes Complex. These water bodies represent different geomorphology, climate and  
25 anthropogenic situations as described below.

### 26 **2.1 Mahakam and Karangmumus Rivers**

27 The Mahakam watershed is located at 113° 40’ to 117° 30’ E longitude and 1° 00’ S to 1° 45’  
28 N latitude. Mahakam is the second largest river in the country, which stretches to ~920 km and  
29 drains an area of 77,095 km<sup>2</sup>. The Mahakam River rises in the mountainous forest ranges with  
30 dramatic elevation drops in the first hundreds kilometres of the main stem, where the formation

1 of rolling hills and steep slopes form the upstream part of this watershed. The Middle Mahakam  
2 Lake and Wetlands forms up starting from the fifth hundreds kilometres of the river length and  
3 transforms into the Mahakam Delta estuary in the last hundred kilometres (MacKinnon et al.,  
4 1996). The upstream part of Mahakam River has narrow channel width of 40-100 m with depth  
5 between 5 to 10 m, and slope greater than 2%, with forest and small patches of subsidence  
6 agricultural farms dominate the land use. The middle part has channel width of 100-300 m, 10-  
7 24 m depth and 0.5-2% slope, with extensive lowland and agricultural areas spread about  
8 everywhere along with country-style residential areas, lakes and swampy shrubs. The lower  
9 part and the Mahakam Delta has wide channel of 500-850 m width, 10-24 m depth and 0-0.5%  
10 slope. The lower sub-watershed is typically a developed area with residential areas, scarce  
11 forest patches and heavily inhabited land (Estiaty et al., 2007).

12 Karangmumus River is a narrow channel (3 to 45 m width) that is an important waterway for  
13 the residents of Samarinda City in East Kalimantan Province. The Karangmumus sub-  
14 watershed often experiences gradual increases and steady high water level during simultaneous  
15 heavy rainfall and backwater intrusion from ocean tide through the Mahakam Delta.

## 16 **2.2 Lake Matano and Lake Towuti**

17 Lake Matano is located at 121° 12' to 121° 29' E longitude and 2° 23' to 2° 34' N latitude. This  
18 lake counts as the seventh deepest lake of the world (Herdendorf, 1982) despite its small extent  
19 (164 km<sup>2</sup>). With the maximum depth of 595 m and mean water surface elevation measured at  
20 392 m, Lake Matano represents a cryptodepression (i.e. the lake bed is below the mean sea  
21 level) (Hehanussa and Haryani, 1999). Originated by tectonic process since 2–3 million years  
22 ago, this lake is one of the oldest lakes of the world. The lake hosts endemic faunas that provide  
23 remarkable examples of ecological diversification and speciation (Cristescu et al., 2010). The  
24 basins in the surrounding of Lake Matano are formed by the hardness of the rocks and the  
25 softness of uplift tectonic fault that forms limited number of alluvial plains. Lake Matano also  
26 has two flat depressions separated by a saddle. It drains through the Petea River into Lake  
27 Mahalona that is located in the same Malili Lakes complex (Vaillant et al., 1997).

28 Lake Towuti is recognized as the largest tectonic lake in Indonesia (Russel and Bijaksana,  
29 2012). Located at the downstream end of the Malili Lakes Complex, this lake covers an extent  
30 of 562 km<sup>2</sup> with 206 m depth. Similar to Lake Matano, Lake Towuti carries locally endemic  
31 fauna since this lake is also one of the ancient lakes.

# 1 **3 Materials and Methods**

## 2 **3.1 Envisat Radar Altimetry**

3 In this study we used satellite radar altimeter measurements from The European Space Agency  
4 (ESA)'s Envisat Radar Altimeter (RA-2) during the period of July 2002 to October 2010,  
5 corresponding to cycle 6 to 93 (ESA, 2007). The RA-2 determines the two-way delay of radar  
6 echo from the Earth's surface in a very high precision of less than a nanosecond. In addition, it  
7 measures the power and shape of the reflected radar pulses, which are represented by the  
8 waveforms. The RA-2 on-board signal processor averages about 100 measurements of  
9 individual echo burst at ~1800 Hz. These data, along with the waveforms, then averaged into  
10 the 18 measurements per second (18 Hz). The 18 Hz data correspond to an along-track sampling  
11 interval of ~350 m (ESA, 2011). The averaged 18 Hz waveforms are arranged into 128 gates  
12 with 3.125 nanosecond temporal resolution and presents the default tracking gate at #46 (ESA,  
13 2007). We also utilized the Envisat RA-2/Microwave Radiometer (MWR) Sensor Geophysical  
14 Data Record (SGDR) (hereafter, RA-2/MWR SGDR) Level-2 product. The RA-2/MWR SGDR  
15 contains parameters for time tagging, geo-location, output from retracers (i.e. range, wind  
16 speed, significant wave height) at 1 Hz, and other 18 Hz-parameters such as range and orbital  
17 altitude. The RA-2/MWR SGDR also contains the 18 Hz waveforms that we used in the  
18 waveform shape selection procedure. We used the 18 Hz re-tracked range to infer the water  
19 surface elevation. Before comparing the altimetry with in-situ measurements, we first corrected  
20 the instrumental (i.e. Doppler shift and oscillator drift), the geophysical (i.e. inverse barometer,  
21 polar and solid Earth tides) and the media (i.e. ionosphere and dry/wet troposphere) range in  
22 order to match the standard retracers range (Ocean, Ice-1, Ice-2 and Sea Ice) produced from  
23 the Level-2 radar altimeter product.

24 Satellite radar altimetry measures water surface elevation with respect to the reference ellipsoid.  
25 Due to the uncertainty in the relationship between the elevations of the field gage benchmark  
26 relative to the local vertical datum, we used the water level anomaly in our analysis. The  
27 anomaly was calculated by subtracting the water level mean over the study period (July 2002 –  
28 October 2010) from the observed level. Hence, it represents the fluctuation of water level  
29 relative to its mean level. In order to test the current assumption of Ice-1 as the best retracking  
30 algorithm for inland waters (Frappart et al., 2006), we compared the water level anomaly



1 obtained from water surface elevation measured by the Ocean, Ice-1, Ice-2 and Sea Ice  
2 retrackerers with those obtained from the in-situ gage measurement.

### 3 **3.2 Optical Remote Sensing and Geospatial Dataset**

4 We applied standard optical remote sensing data processing techniques in order to obtain  
5 imageries with precise position and better contrast ratio between land and water. The processing  
6 included geometric correction, development and contrast adjustment of the pseudo-natural  
7 color composite imagery from red-green-blue combination (bands 5, 4 and 3 of Landsat 5 and  
8 Landsat 7; or bands 6, 5 and 4 for the recently launched Landsat 8). We then measured river  
9 and lake width through visual interpretation of remote sensing image (i.e. through dark-blue  
10 color reflected by the water bodies in the pseudo-natural color composite of Landsat imagery)  
11 and marked the boundaries. When the object was too small to detect using visual inspection of  
12 remote sensing images, we used medium-scale (1:50,000) topographic maps released by the  
13 Indonesian Geospatial Agency to identify and mark the boundary.

14 Previous study (Sarmiento and Khan, 2010) showed that satellite altimetry measurements were  
15 less accurate when the center of satellite altimetry footprint was closer to the lakeshore. In order  
16 to test this hypotheses, we created masks with varying distances to the lakeshore (i.e. 0-500 m,  
17 500-1000 m and >1000 m). The footprint diameter of the Envisat RA-2 over a smooth surface  
18 is about 1.7 km (Rees 1990, ESA 2007). We assumed that the Envisat altimeter measurements  
19 within the last mask (i.e. > 1000 m from lakeshore) were not influenced by the surrounding  
20 non-water surface. We then analysed the performance of altimeter measurements based on these  
21 masks. As for the river, we created a mask with 5-meter buffer distance to the riverbank, in  
22 order to reduce the land surface-waveform contamination and to tolerate any geo-referencing  
23 and projection errors of the satellite imagery and topographic maps.

24

### 25 **3.3 In-situ Water Level Data**

26 Indonesia's Ministry of Public Works provided the datasets used for validation of water level  
27 of Mahakam River at Melak site (2002-2004) and Karangmumus River (2008-2010), while PT  
28 Vale Indonesia provided validation data for Lake Matano and Lake Towuti (2002-2012).  
29 Similar to the satellite altimetry data, we transformed the water level time series into water level  
30 anomaly by removing the mean water surface elevation over the period of observation.

### 1   **3.4   Waveform Shape Analysis**

2   The presence of variable land cover (e.g. vegetation in the riverbank, lakeshore or coastline, as  
3   well as islands or sandbanks within the river or lake) affects the returned radar signal in  
4   altimetry measurement (e.g. Deng and Featherstone, 2006; Berry et al, 2005). Therefore, we  
5   analysed the waveform shapes considering that the radar pulse reflected by the small water  
6   bodies might be influenced by other surface within the projected radar footprint. For the lakes,  
7   1-km distance to the lakeshore was sufficient since the radius of the Envisat footprint (half of  
8   its diameter) is about 850 m. However, this issue becomes more challenging for small and  
9   medium-sized rivers (40-800 m width), rendering the waveform produced by the processed  
10  radar pulse return unpredictable.

11  Due to the fact that inland water surface is smoother than the ocean (Birkett, 1998), we assumed  
12  that (quasi) specular shape is the standard waveform shapes for radar pulse returns reflected by  
13  inland water bodies, in contrast to the ocean-reflected diffuse shape (Koblinsky, 1993).  
14  Additional shapes of Envisat RA-2 returned radar pulse over inland water include (Berry et al.,  
15  2005): (i) quasi-Brown shape representing a transition from land to water; (ii) flat patch shape  
16  denoting intermediate surface; and (iii) complex shape indicating a mixture between water and  
17  vegetation (Dabo-Niang et al., 2007). In this study, we considered (quasi) specular, quasi-  
18  Brown and flat-patch shapes as qualified waveform to perform reliable range measurement and  
19  discard complex and non-classified shapes from further process. We assumed that the mixture  
20  of water, vegetation and or shoreline provides less accurate elevation measurements as  
21  compared to the radar signal returned by water-dominated surface. Some examples of actual  
22  waveforms that classified into “Brown-like”, specular, flat-patch, as well as complex and non-  
23  classified shapes are presented in Figure 3 panel A, B, C and D respectively. In practice, we  
24  displayed the standard waveform shapes (Brown-like, specular, flat-patch) with another  
25  window showing waveform shapes from each measurements along with their IDs. Then we  
26  noted down the IDs of measurements that matched waveform shapes for further processing. It  
27  is interesting that in order to select the most appropriate waveforms that are less contaminated  
28  by land surface, another study was offering highest weight for waveforms originated by water  
29  surface and assigned a lower weight for waveforms reflected by other land surface  
30  (Michailovsky et al., 2012). Operationally, the implementation of straightforward waveform  
31  shape qualification as presented in this study offer slightly more efficient waveform processing,  
32  especially when the algorithm for waveform geometry processing can be developed.

### 1 3.5 Outlier Removal, Validation and Performance Evaluation

2 Although the altimetry measurements that carry non-qualified waveform shapes were excluded,  
3 some measurements remained far beyond the mean and median values. In order to obtain a  
4 dataset with minimum influences from outliers, we excluded mild outliers – defined as any  
5 values outside of the the 1.5 times of the inter-quartile-range (IQR) (Kenney and Keeping, 1947;  
6 Panik, 2012). *IQR* is defined as the range between the 25% quartile value ( $Q_{0.25}$ ) and 75%  
7 quartile value ( $Q_{0.75}$ ). If we denoted  $WSE_{min}$  and  $WSE_{max}$  as the minimum and maximum  
8 water surface elevation from the Envisat radar altimetry, respectively, then:

$$\begin{aligned} IQR &= Q_{0.75} - Q_{0.25} & \text{Therefore } WSE_{min} &= Q_{0.25} - 1.5 \times IQR & (1) \\ & & WSE_{max} &= Q_{0.75} + 1.5 \times IQR \end{aligned}$$

9 Consequently, we discarded any measurements below the  $WSE_{min}$  and above the  $WSE_{max}$   
10 threshold in the further processing.

11 We used root-mean-square error (RMSE) and the coefficient of correlation ( $r$ ) as measures of  
12 performance (or validation) between satellite altimetry water level measurements and the  
13 virtual stations where in-situ measurements were available. The RMSE is a measure of how  
14 close the estimated measures from the “truth” values. It is defined as (e.g. Nagler, 2004 and Li,  
15 2010):

$$RMSE = \sqrt{\sum_{i=1}^n \frac{(x_i - y_i)^2}{n}} \quad \text{where:} \quad (2)$$

$x_i$  is the Envisat water level anomaly  
 $y_i$  is the *in-situ* measured water level anomaly

16 The Pearson correlation coefficient is the standard measure of association for continuous type  
17 of data (deSa, 2007). Therefore, we used it to measure the association between satellite  
18 altimetry and in-situ water level measurements as described in the following equation.

$$r = \frac{S_{xy}}{S_x S_y} \quad \text{with} \quad S_{xy} = \sum_{i=1}^n \frac{(x_i - \bar{x})(y_i - \bar{y})}{(n - 1)} \quad (3)$$

19 With  $S_x$  and  $S_y$  are variances for each measurement and  $n$  is the number of observations. The  
20 correlation coefficient ( $r$ ) value falls within the interval  $[-1, 1]$ , where coefficient of 0 indicates  
21 no correlation between two measurements, +1 indicates total correlation in the same direction

1 (proportional relationship) and -1 indicates total correlation in the opposite direction (inverse  
2 relationship).

3 In order to provide a comprehensive understanding on the data processing sequences in this  
4 study, Fig. 4 shows each data processing step and their relationship.

5

## 6 **4 Results and Discussion**

### 7 **4.1 Mahakam and Karangmumus River**

8 Table 1 shows that most of the radar pulse returns from both small-sized river (40-200 m width)  
9 and medium-sized river (200-800 m width) produced qualified waveforms to infer water level  
10 fluctuation. The percentage of qualified waveforms relative to all measurements within the  
11 water bodies were high (90-97%) even for a small river at virtual station UM03 (river width 54  
12 m). Interestingly, there were more missing cycles – regular satellite repeat schedule without  
13 available measurements within the water bodies – in the smaller river (UM03 site) than in the  
14 wider rivers (Melak01 and Melak02 sites).

15 For the water level measurements at Melak, we combined two virtual stations (i.e. Melak01 and  
16 Melak02) since they were just separated by 14–40 km distance and there was no drastic change  
17 in terrain and configuration of the channel (e.g. no reservoir or steep gradient) based on the  
18 topographic map and digital elevation model. Having two different satellite tracks nearby in  
19 fact increased the spatial and temporal sampling intensity for this location. Fig. 5 shows the  
20 location of the Ministry of Public Works' gage station, which was right in between these two  
21 virtual stations. Fig. 5 also indicates dynamic channel morphology in this area. The channel  
22 was heavily meandering just before and along the virtual station Melak01, which then changed  
23 into 13 km straight channel along the heavily populated Melak Town before it was back into  
24 lightly meandering channel. Fig. 6 shows the combined water level anomaly from the two  
25 virtual stations, along with the water level anomaly observed by the gage station for the period  
26 of 2002-2004.

27 To facilitate visual investigation, we presented scatter plots between water level anomaly  
28 obtained from gage measurements and those derived from the 4 different retracking algorithms  
29 We found that Ice-1 was not the best retracking algorithm for inland water body elevation  
30 measurement (Table 2),. Sea Ice retracking algorithm outperformed the other 3 standard

1 retrackers (Table 2). With the correlation coefficient of up to 0.97, satellite radar altimetry was  
2 a more suitable alternative for monitoring of the medium-sized river (200-800 m width), even  
3 for poorly-gauged basin such as the Mahakam Watershed. Compared to other studies, the  
4 magnitude of root-mean-square error (RMSE) from our study (i.e. 0.69) was just about the  
5 average RMSE obtained from other studies that deal with medium sized rivers (200-800 m  
6 width) (Table 3).

7 It is important to note that we did not adjust the magnitude of the satellite altimetry range  
8 measurements in any way. Aside from the spatial selection of the range measurements with the  
9 projected nadir footprint center within the water body and the removal of outliers, the only  
10 manipulation we performed was selecting the range measurements based on its waveform shape  
11 to strictly follow the standard waveform shape for inland water body as described in the  
12 previous studies (Koblinsky et al, 1993; Birkett, 1988; Berry et al, 2005; Dabo-Niang et al,  
13 2007). Therefore, there are several possibilities for improvement to increase the accuracy of the  
14 satellite altimetry measurement of river water level, especially for this study area. For examples  
15 are the use of other altimetry missions (e.g. Jason-1, ICESat), more detailed evaluation of  
16 retracked water elevation within a cycle and including the actual river slope into the processing.

17 In this study, we found that Envisat altimetry showed a potential to observe small-sized river.  
18 Satellite altimetry crossing at UM03 virtual station returned a high percentage of qualified  
19 measurement even with fewer measurements within the water body (i.e. 46 over 51) compared  
20 to that of other virtual stations. Figure 8 indicates the water level fluctuation at this virtual  
21 station while Figure 9 shows variable gaps that existed between the measurements, with average  
22 of 84 days and a maximum gap that lasted for 300 days (~10 months). This temporal gap was  
23 a serious problem for hydrological applications, especially those requiring the measurement of  
24 hydrological variables at short interval. Further, there was no in-situ gage station in the vicinity  
25 that provided validation data for this particular virtual station (UM03). Although we could not  
26 validate the water level retrievals at this location, this experiment showed the potential of  
27 satellite altimetry for monitoring small rivers (40-200 m width).

28 We conducted another experiment of satellite altimetry measurement over the narrow  
29 Karangmumus River (width 8-45 m). The northeast-southwest orientation of this river made it  
30 difficult to find the crossing with Envisat ground tracks. However, high resolution IKONOS  
31 image (1 m ground resolution) allowed detailed selection of the altimeter ground tracks that fall  
32 within its narrow channel. Still, the ultra-narrow channel width seriously hampered successful

1 satellite radar altimetry measurement of this study site. After careful spatial filtering and  
2 waveform shape selection procedure, we extracted only 11 water surface elevations from  
3 Karangmumus River. Figure 10 depicts the location of this experiment, while Table 4  
4 summarizes the qualified measurements.

5 Figure 11 shows the time series of the Karangmumus River water level anomaly during 2004-  
6 2006 and it is obvious that the number of retrieved water level anomaly was very limited. In  
7 addition, the in-situ measurement record from the nearest available gage stations (i.e. Pampang,  
8 Muang, Gununglingai and the outlet of the Karangmumus River) were available only during  
9 year 2008–2010. Therefore, we could not evaluate the performance of satellite altimetry  
10 measurements over this very small river. However, this result serves as preliminary indication  
11 to the range of water level magnitude in this river.

12 Presently, only few other studies indicated successful exploitation of the river with 100 m width  
13 or less. Michailovsky et al., (2012) extracted 13 useful water level measurements from a river  
14 with 40 m width and Kuo and Kao (2011) revealed the water level of Bajhang River in Taiwan  
15 with less than 100 m width with standard deviation of error of 0.31 m.

16 We therefore urge for further exploration of satellite altimetry observation to monitor small  
17 rivers supported by complete validation data.

18 To conclude this section, we demonstrated that medium size rivers as narrow as 240 m can still  
19 be monitored and validated, given the water surface boundary was accurately identified. This  
20 result expands the capability of the satellite altimetry, since previous studies showed that 1 km  
21 seems to be the ideal width to expect typical altimetry radar returns from the water surface  
22 (Birkett, 1998, Birkett et al., 2002). We also emphasize that successful retrieval of qualified  
23 satellite radar altimetry measurement in this research was very much supported by detailed  
24 geographic masking, which carefully excluded all altimetry measurements with projected nadir  
25 position outside of the water bodies.

## 26 **4.2 Lake Matano and Lake Towuti**

27 Inland water has been known to produce different, sometimes irregular, waveform shapes and  
28 pattern as compared to that of the ocean. In particular is the difference with respect to their  
29 responses to radar pulse signal transmitted by satellite based active sensor. Some examples of  
30 distinguished waveform shapes from Lake Matano and Lake Towuti at different buffer  
31 distances from the lakeshore are presented in Fig. 12. Our findings indicated that the waveform

1 shapes resulted from satellite altimetry measurement over the lakes had more variability  
2 compared to those over the small to medium-sized rivers. We suspect this was due to the fact  
3 that lakes possess larger extent of water surface and much more influenced by wind that may  
4 develop wave with some height. Fig. 12 shows the typical ocean-like, multi and low peaks,  
5 gradually rising and many other kinds of irregular patterns that were not present in the dataset  
6 from small and medium-sized rivers. Up to now, a systematic and verified classification of  
7 waveform shapes especially for inland waters does not exist, except the early development such  
8 as presented by Dabo-Niang et al. (2007). Hence is the need to further study this subject.

9 Table 5 summarizes the results of satellite altimetry waveform selection over Lake Matano and  
10 Lake Towuti. Similar to the result of satellite altimetry measurements for small to medium-  
11 sized river in the previous section, most of the radar pulse returns produced qualified waveforms  
12 that were subsequently used to compute water level anomaly at these two lakes. Our findings  
13 suggested that separation distance from the lakeshore did not significantly affect the number of  
14 qualified waveforms. For instance, the percentage of qualified waveforms for the lake surface  
15 with distance from the lakeshore of more than 1 km in Lake Matano and Lake Towuti was  
16 lower than those closer to the lakeshore (Table 5). This complex result calls for further  
17 investigation in the field of satellite altimetry application for small and medium lakes in the  
18 tropics, given the fact that the land cover does not always influence the shapes of the returned  
19 altimeter waveform.

20 Upon the completion of waveform sorting, we processed the range measurements performed  
21 by Ocean, Ice-1, Ice-2 and Sea Ice retracker and evaluated against observed water level from  
22 in-situ gage station. Fig. 13 and 14 show the satellite altimetry and in-situ measured water level  
23 anomaly at Lake Matano and Lake Towuti. These plots visually indicate that the satellite  
24 altimetry-observed water level anomalies closely matched the in-situ gaged water level  
25 anomaly. From Figs. 13 and 14, we estimated the range of water level anomaly at Lake Matano  
26 to be in the magnitude of 1.2 m, while that of Lake Towuti only ranged in the magnitude of 1.4  
27 m. Figs. 15 and 16 show the correlation between the Envisat radar altimeter measurements as  
28 processed by Ocean, Ice-1, Ice-2 and Sea Ice retracker with the gage measured water level  
29 anomaly for Lake Matano and Lake Towuti, respectively.

30 In terms of performance, Envisat radar altimetry measurements over Lake Matano and Lake  
31 Towuti performed equally well, as reflected by the lowest RMS error obtained by the best  
32 retracker for each lakes (0.21, see Table 6). Based on the performance evaluation (Table 6), our

1 results could not verify the hypothesis that shorter distance to lakeshore was associated with  
2 lower accuracy of satellite altimetry measurement. The satellite altimetry measurements of  
3 water level anomaly over Lake Matano indicated better accuracy (lower RMSE and higher  
4 correlation coefficient) with as distance between altimeter footprint and the lake shore  
5 increased; whereas measurements over Lake Towuti showed the opposite (see Figs. 17 and  
6 18). This inconclusive results further suggest the use of sample classification based on the  
7 distance to the lakeshore for future investigation,.

8 Inter-comparison between the available retrackerers (i.e. Ocean, Ice-1, Ice-2 and Sea Ice) also  
9 cannot convincingly suggest any single retracker to infer water level of the small lakes, since  
10 Ocean retracker surprisingly performed best for Lake Matano, while Ice-1 retracker performed  
11 best for Lake Towuti. An important conclusion from this study is that Ice-1 is not necessarily  
12 the best retracker to measure water level anomaly over small to medium lakes.

13 The best RMS error obtained from measurements of water level anomaly in this study (0.21 m  
14 at both Lake Matano and Lake Towuti) was quite close to the lowest RMSE in other similar  
15 studies. Table 7 states that satellite altimetry measurements over small lakes produced RMS  
16 error magnitude in the range of 30 to 50 cm, as compared to large lakes that produced RMS  
17 error as low as 3 cm. Lake Matano is in fact the smallest among all lakes listed in Table 7.

## 18 **5 Conclusions**

19 In this study we demonstrated the capability of satellite altimetry monitor the water level of  
20 medium-sized (200–800 m width) rivers in the Southeast Asia’s humid tropics with high  
21 accuracy (correlation coefficient of 0.97 and RMS error of 0.685 m). Despite its performance  
22 variability, water level anomaly inferred by Envisat radar altimetry through standard waveform  
23 retracking method was validated in this study – further highlights its capability to monitor water  
24 level fluctuations in medium rivers. In addition to the medium-sized rivers, we found that small  
25 rivers (40–200 m width) are *potentially* observable through satellite altimetry, as indicated by  
26 high percentage of qualified range measurements that we filtered based on the waveform  
27 shapes. It is important to note however, that there could possibly be a variation in the  
28 measurement capability and accuracy across different regions; therefore a specific approach  
29 should be developed for each region, as part of the development of permanent monitoring effort  
30 in those regions.



1 In contrast to the common assumption (Frappart et al. ,2006), Ice-1 is not necessarily the best  
2 retracker for monitoring small water bodies, especially for the Southeast Asia humid tropics  
3 area. We also found that Ocean retracker surprisingly performed best for retracking small lake  
4 (i.e. Lake Matano), as well as Sea Ice for Mahakam River and Ice-1 for Lake Towuti.

5 The RMS error of satellite altimetry measurement of Lake Matano and Lake Towuti, i.e. 0.21  
6 m for both locations, is about the average of small lakes being studied throughout the world. It  
7 is worth noting that Lake Matano is the smallest water bodies among any other studies of  
8 satellite altimetry measurement of water level involving lakes and reservoirs.

9 Based on challenges encountered during the experiment, we recommend the following: (1) in  
10 addition to the use of standard retrackers, we propose the selection of the range of measurements  
11 based on its waveform shape to strictly follow the standard waveform shape for inland water  
12 body (Koblinsky 1993, Birkett 1998, Berry et al, 2005, Dabo-Niang et al, 2007) for future  
13 studies involving small (40-200 m width) to medium rivers (200-800 m width), as well as small  
14 lake (e.g. those with extent less than 1000 km<sup>2</sup>), and (2) over lakes, we do not recommend to  
15 analyse the performance of the satellite altimetry retrackers based on the distance from the  
16 satellite altimetry measurements to the lakeshore.

17 Lastly, we found that geographic orientation of the river affected the application of satellite  
18 altimetry for monitoring small rivers. For instance, small (40-200 m width) and medium-sized  
19 (200-800 m width) river with north-south orientation suffered from the satellite altimetry orbit  
20 deviation, which ranges from  $\pm 1$  km relative to its theoretical orbit.

21

## 22 **Acknowledgements**

23 This research was primarily supported by the Fulbright PhD Presidential Scholarship  
24 administered by American Indonesian Exchange Foundation (AMINEF) and the Institute for  
25 International Education (IIE). In addition, this study was partially funded by grants from  
26 NASA's Application Science Program under the SERVIR project (NNX12AM85G), and by  
27 the Chinese Academy of Sciences/SAFEA International Partnership Program for Creative  
28 Research Teams (Grant No. KZZD-EW-TZ-05). The authors greatly appreciate the Ministry of  
29 Public Works of Republic of Indonesia and PT Vale Indonesia, Tbk for providing in-situ water  
30 level data used in this research. The first author is supported by an appointment to the NASA  
31 Postdoctoral Program at the NASA Goddard Space Flight Center, administered by Oak Ridge

1 Associated Universities through a contract with NASA. We thank the editor: Paola Passalacqua,  
2 anonymous referees and Radina Soebiyanto for their help in improving this manuscript.  
3

## 1 **References**

- 2 Alsdorf, D.E. and Lettenmaier, D.P.: Tracking fresh water from space, *Science*, 301, 1491-  
3 1494, 2003.
- 4 Bamber, J.L.: Ice sheet altimeter processing scheme, *Int. J. Remote Sens.*, 15, 925-938, 1994.
- 5 Bao, L., Lu, Y., and Wang, Y.: Improved retracking algorithm for oceanic altimeter waveforms,  
6 *Prog. Nat. Sci.*, 19, 195-203, 2009.
- 7 Benveniste, J. and Defrenne, D.: Radar Altimetry Processing for Inland Waters: Introduction  
8 and Background Review, Slides presented at Workshop on Hydrology from Space,  
9 Toulouse, 29 September-1 October 2003, 2003.
- 10 Berry, P. A. M., Garlick, J. D., Freeman, J. A., and Mathers, E. L.: Global inland water  
11 monitoring from multi-mission altimetry, *Geophys. Res. Lett.*, 32, L16401 (DOI  
12 10.1029/2005GLO22814), 2005.
- 13 Birkett, C.M: Contribution of the TOPEX NASA radar altimeter to the global monitoring of  
14 large rivers and wetlands, *Water Resour. Res.*, 34, 1223-1239, 1998.
- 15 Birkett, C. M., Mertes, L. A. K., Dunne, T., Costa, M. H., and Jasinski, M. J.: Surface water  
16 dynamics in the Amazon Basin: application of satellite radar altimetry, *J. Geophys. Res.*,  
17 107, LBA26 (DOI 10.1029/2001JD000609), 2002.
- 18 Brown, O. B. and Cheney, R. E.: Advances in satellite oceanography, *Rev. Geophys.*, 21 (5):  
19 1216-1230, 1983.
- 20 Calmant, S. and Seyler, F.: Continental surface waters from satellite altimetry, internal  
21 geophysics (space physics), *C.R. Geoscience*, 338, 1113-1122, 2006.
- 22 Cretaux, J.-F., Jelinski, W., Calmant, S., Kouraev, A., Vuglinski, V., Berge-Nguyen, M.,  
23 Gennero, M.-C., Nino, F., Abarca Del Rio, R., Cazenave, A., and Maisongrande, P.:  
24 SOLS: A lake database to monitor in the near real time water level and storage variations  
25 from remote sensing data, *Adv. Space Res.*, 47, 1497-1507, 2011.
- 26 Cristescu, M. E., Adamowicz, S. J., Vaillant, J. J., and Haffner, D. G.: Ancient lakes revisited:  
27 from the ecology to the genetics of speciation, *Mol. Ecol.*, 19, 4837–4851 (doi:  
28 10.1111/j.1365-294X.2010.04832.x), 2010.

- 1 Dabo-Niang, S., Ferraty, F., and Vieu, P.: On the using of modal curves for radar waveforms  
2 classification, *Computational Statistics and Data Analysis*, 51, 4878-4890, 2007.
- 3 Davis, C.H: A robust threshold retracking algorithm for measuring ice-sheet surface elevation  
4 change from satellite radar altimeters, *IEEE T. Geosci. Remote*, 35, 974-979, 1997.
- 5 De Sa, J.P.M: *Applied Statistics using SPSS, Statistica, MATLAB and R*, Springer-Verlag,  
6 Berlin, Heidelberg, ISBN 978-3-540-71971-7, 2007.
- 7 Deng, X., and W. E. Featherstone (2006), A coastal retracking system for satellite radar  
8 altimeter waveforms: Application to ERS-2 around Australia, *J. Geophys. Res.*, 111,  
9 C06012, doi:10.1029/2005JC003039. 2006
- 10 Estiaty, L.M., Susilowati, Y., Harsono, E., and Tjiptasamara, T.: *Pemodelan Spasial Fluks*  
11 *Polutan pada Sistem Daerah Aliran Sungai dan Angkutan Polutan pada Sistem Sungai,*  
12 *Studi Kasus: DAS Mahakam*, Pusat Penelitian Geoteknologi, Lembaga Ilmu  
13 Pengetahuan Indonesia, 2007 (in Indonesian).
- 14 European Space Agency (ESA): *Envisat RA2/MWR Product Handbook*, European Space  
15 Agency, 27 February 2007, 2007.
- 16 European Space Agency (ESA): *Envisat RA-2/MWR Level 2 User Manual*, Envisat Altimetry  
17 Quality Working Group, Ver. 1.4, 8 September 2011, 2011.
- 18 Fenoglio-Marc, L., Fehla, M., Ferri, L., Becker, M., Gao, Y., and Vignudelli, S.: Coastal sea  
19 surface heights from improved altimeter data in the Mediterranean Sea, *Proceedings*  
20 *GGEO2008*, Springer Verlag, IAG Symposia, 2009.
- 21 Frappart, F., Do Minh, K., L'Hermitte, J., Cazenave, A., Ramillien, G., Le Toan, T., and  
22 Mognard-Campbell, N.: Water volume change in the lower Mekong from satellite  
23 altimetry and imagery data, *Geophys. J. Int.*, 167, 570-584, 2006.
- 24 Fu, L.-L. and Cazenave, A.: *Satellite altimetry and Earth sciences: a handbook of techniques*  
25 *and applications*, Academic Press, San Diego, 2001.
- 26 Haryani, G.S. and Hehanussa, P.E.: *Pendekatan Ekohidrologi, Paradigma Baru Implementasi*  
27 *Penataan Ruang untuk Pengelolaan Danau dan Waduk*, Semiloka Nasional Pengelolaan  
28 dan Pemanfaatan Danau dan Waduk, Bogor, 1999 (in Indonesian).
- 29 Herdendorf, C.E.: Large Lakes of the World, *J. Great Lakes Res.*, 8, 379-412, 1982.

- 1 Hwang, C., Guo, J.Y., Deng, X.L., Hsu, H.Y., and Liu, Y.T: Coastal gravity anomalies from  
2 retracked Geosat/GM altimetry: improvement, limitation and the role of airborne  
3 gravity data, *J. Geod.*, 80, 204-216, 2006.
- 4 Koblinsky, C.J., Clarke, R.T., Brenner, C.A., and Frey, H.: Measurement of river water levels  
5 with satellite altimetry, *Water Resour. Res.*, 29, 1839-1848, 1993.
- 6 Kouraev, A.V., Zakharova, E.A., Samain, O., Mognard, N.M., and Cazenave, A.: Ob' river  
7 discharge from TOPEX/Poseidon satellite altimetry (1992-2002), *Remote Sens.*  
8 *Environ.*, 93, 238-245, 2004.
- 9 Kuo, C.-Y. and Kao, H.-C.: Retracked Jason-2 altimetry over small water bodies: case study of  
10 Bajhang River, Taiwan, *Mar. Geod.*, 34, 382-392, 2011.
- 11 Lee, H.: Radar altimetry methods for solid earth geodynamics studies, Ph.D. thesis, School of  
12 Earth Sciences, The Ohio State University, Columbus, Ohio, 2008.
- 13 Li, Y.: Root Mean Square Error, in: *Encyclopedia of Research Design*, edited by: Salkind, N.J.,  
14 SAGE Publications Inc., Thousand Oaks, CA, 1288-1289, 2010.
- 15 McKinnon, K., Hatta, G., Halim, H., and Mangalik, A.: *The Ecology of Kalimantan: Indonesian*  
16 *Borneo, The Ecology of Indonesia Series, Vol. 3*, Singapore: Periplus, 1996.
- 17 Meybeck, M., Friedrich, G., Thomas, R., and Chapman, D. (Eds.): *Rivers*, in: *Water Quality*  
18 *Assessments - a Guide to Use of Biota, Sediments and Water in Environmental*  
19 *Monitoring*, 2nd Edn., UNESCO/WHO/UNEP. 1992, 1996.
- 20 Michailovsky, C.I., McEnnis, S., Berry, P.A.M., Smith, R., and Bauer-Gottwein, P.: River  
21 monitoring from satellite radar altimetry in the Zambezi River basin, *Hydrol. Earth Syst.*  
22 *Sci.*, 16, 2181-2192, DOI:10.5194/hess-16-2181-2012, 2012.
- 23 Morris, C.S. and Gill, S.K.: Evaluation of the TOPEX/POSEIDON altimeter system over the  
24 Great Lakes, *J. Geophys. Res.*, 99, 24527-24539, 1994.
- 25 Nagler, J.: Root Mean Square, in: *The SAGE Encyclopedia of Social Science Research*  
26 *Methods*, edited by: Lewis-Beck, M.S., Bryman, A. and Liao, T.F., SAGE Publications,  
27 Inc., Thousand Oaks, CA: 978-79. 2004. doi:  
28 <http://dx.doi.org/10.4135/9781412950589.n871>.
- 29 Panik, M.J.: *Statistical Inference: a Short Course*, John Wiley & Sons, Hoboken, 2012.

- 1 Rees, G.: Physical Principles of Remote Sensing, Cambridge University Press, Cambridge,  
2 England, 1990.
- 3 Russel, J. and Bijaksana, S.: The Towuti Drilling Project: paleoenvironments, biological  
4 evolution, and geomicrobiology of a tropical lake, *Scientific Drilling*, 14, 68-71,  
5 doi:10.2204/iodp.sd.14.11.2012, 2012.
- 6 Sarmiento, S.E., and Khan, S.D.: "Spatial-Temporal Variability of Great Slave Lake Levels  
7 From Satellite Altimetry." *IEEE Geosci. Rem. Sens. Letters* 7, no. 3 (July 2010): 426–  
8 29. doi:10.1109/LGRS.2009.2038178, 2010.
- 9 Tang, Q., Gao, H., Lu, H., and Lettenmaier, D.: Remote sensing: hydrology, *Prog. Phys. Geogr.*,  
10 33, 490-509, 2009.
- 11 Torrance and Sparrow, 1967.
- 12 Tseng, K.-H: *Satellite Altimetry and Radiometry for Inland Hydrology, Coastal Sea-Level and*  
13 *Environmental Studies*, School of Earth Sciences, The Ohio State University,  
14 Columbus, Ohio, 2012.
- 15 Vaillant, J.J., Haffner, G.D., and Cristescu, M.E.: The Ancient Lakes of Indonesia: towards  
16 Integrated Research on Speciation, *Integr. Comp. Biol.*, 51, 634-643, 2011.
- 17 Wingham, D.J. and Rapley., C.G.: Saturation effects in the Seasat altimeter receiver, *Int. J.*  
18 *Remote Sens.*, 8, 1163-1173, 1987.
- 19 Wingham, D.J., Rapley, C.G., and Griffiths, H.G.: New techniques in satellite altimeter tracking  
20 systems, III IGARRS 1986 Symposium, Zurich, Proceedings, Noordwijk, ESTEC,  
21 Scientific and Technical Publications Branch, 1339-1344, (ESA SP-254), 1986.
- 22

1 **Table 1** Number of qualified and non-qualified altimeter measurements and outliers for  
 2 study sites at Mahakam River

Site Name	Cycles	# of Missing Cycles	Measurements in water body	Qualified Measurement		Non-qualified Measurement		# of Outlier	River width (m)
				(#)	(%)	(#)	(%)		
UM03	9 – 93	34	51	46	90.2	5	9.8	N/A	54 m
Melak01	7 – 93	8	225	220	97.8	5	2.2	8	247 m
Melak02	7 – 93	11	148	134	90.5	14	9.5	0	294 m

3

4

1 **Table 2** Performance evaluation of Envisat RA-2 radar altimetry measurements over  
 2 Melak virtual stations at Mahakam River (width 247 m)

Site Name	Cycles Covered	Validated Measurement	Number of Pass	Retracker	RMSE (m)	Correlation Coefficient
Melak	7 - 33	46	2	Ocean	0.885	0.955
				Ice-1	0.720	0.962
				Ice-2	0.724	0.966
				SeaIce	0.685	0.970

3

4 **Table 3** Summary of studies on satellite radar altimetry for water level over river

Reference	Location	River Width	Satellite / Sensor	Reported Error (m)
Koblinsky et al (1993)	Amazon Basin	N/A	Geosat	STDE: 0.31-1.68 m
Birkett, et al (1998)	Amazon Basin	3-9 km	T/P	RMSE: 0.11-0.60 m
Birkett, et al (2002)	Amazon Basin	2-6 km	T/P	RMSE: 0.40-0.60 m
Kouraev et al (2004)	Ob' River	3 km	T/P	?: 8 % (Discharge)
Frappart et al (2006)	Mekong River	450 m	Envisat,	RMSE: 0.23 m
			T/P	RMSE: 0.15 m
Birkinshaw et al (2010)	Mekong River	400 m – 1.7 km	ERS-2, Envisat	RMSE: 0.44–1.24 m
Kuo and Kao (2011)	Bajhang River	100 m	Jason-2	STDE: 0.31 m
Michailovsky et al (2012)	Zambezi River	40-380 m	Envisat	RMSE: 0.27-1.07 m
This study (2013)	Mahakam River	240-279 m	Envisat	RMSE: 0.69 m

5 \* STDE (Standard Deviation of Error), % (% difference), RMSE (Root Mean Square Error)

6

7



1 **Table 4** Qualified Envisat RA-2 altimetry measurements for Karangmumus River

Cycle	Date	ID	Longitude	Latitude	Water Level Anomaly*	Remarks
8	07/23/2002	KM08	117.181540	-0.404124	-0.07 m	
9	08/27/2002	KM10	117.194581	-0.408362	-4.52 m	Benanga Reservoir
13	01/13/2003	KM11	117.195384	-0.407573	2.94 m	Benanga Reservoir
23	12/30/2003	KM01	117.157190	-0.507934	-1.92 m	
23	12/30/2003	KM02	117.157910	-0.504634	-2.32 m	
28	06/22/2004	KM09	117.188367	-0.405981	3.63 m	47 m to field gage
37	05/03/2005	KM06	117.169721	-0.448573	-0.11 m	
37	05/03/2005	KM07	117.170441	-0.445263	-0.12 m	
39	07/12/2005	KM03	117.158610	-0.503317	-2.28 m	
42	10/25/2005	KM05	117.171486	-0.452076	4.12 m	
49	06/27/2006	KM04	117.159139	-0.501533	-0.93 m	

2

3 **Table 5** The number of qualified and non-qualified altimeter measurements and outliers  
4 over Lake Matano and Lake Towuti

Location	Width	Cycle	Distance to Shore	Measurement Within water body	Qualified		Non-Qualified		No of Outlier
					#	%	#	%	
Lake Matano	8,159	8-79	< 500 m	453	416	91.8	37	8.2	42
			500 m – 1 km	253	215	85.0	38	15.0	26
			> 1 km	989	805	81.4	184	18.6	115

Lake	28,818	8-79	< 500 m	1314	786	59.8	528	40.2	79
Towuti			500 m – 1 km	1328	764	57.5	564	42.5	64
			> 1 km	2450	1353	54.3	1137	45.7	156

1

2 **Table 6** Performance evaluation of Envisat RA-2 radar altimetry measurements over  
3 Lake Matano and Lake Towuti

Site	Lake width (m)	Cycles	Validated measurement	Re-tracker	Correlation coefficient	RMSE (m)	No / % of Outliers
Lake Matano	8,159	8 – 79					
	0 – 500 m		75	Ocean	0.214	0.981	42/387
				Ice-1	0.242	0.835	10.85%
				Ice-2	0.290	0.819	
				SeaIce	0.358	0.743	
	500 – 1000 m		71	Ocean	0.605	0.555	26/214
				Ice-1	0.538	0.624	12.15%
				Ice-2	0.723	0.458	
				SeaIce	0.745	0.417	
	> 1000 m		73	Ocean	0.692	0.493	115/805
				Ice-1	0.647	0.535	14.29%
				Ice-2	0.667	0.518	
				SeaIce	0.666	0.518	
	All		75	Ocean	0.948	0.209	183/1406
				Ice-1	0.881	0.311	13.02%
				Ice-2	0.837	0.364	
				SeaIce	0.839	0.359	

Site	Lake width (m)	Cycles	Validated measurement	Re-tracker	Correlation coefficient	RMSE (m)	No / % of Outliers
Lake Towuti	28,818	8 – 79					
	0 – 500 m		77	Ocean	0.880	0.380	79/786
				Ice-1	0.917	0.296	10.05%
				Ice-2	0.898	0.321	
				SeaIce	0.911	0.291	
	500 – 1000 m		79	Ocean	0.942	0.244	64/764
				Ice-1	0.903	0.312	8.38%
				Ice-2	0.890	0.339	
				SeaIce	0.887	0.341	
	> 1000 m		79	Ocean	0.689	0.608	156/1353
				Ice-1	0.802	0.494	11.53%
				Ice-2	0.777	0.490	
				SeaIce	0.774	0.507	
	All		80	Ocean	0.940	0.241	299/2903
				Ice-1	0.953	0.212	10.30%
				Ice-2	0.941	0.231	
				SeaIce	0.938	0.239	

1

2

1 **Table 7** Summary of studies on satellite radar altimetry for water level over lakes


Reference	Location	Lake Extent	Satellite / Sensor	Reported Error
Morris and Gill (1994a)	Superior, Ontario	Large	Geosat	RMSE: 0.09 m
	Michigan, Huron	Large	Geosat	RMSE: 0.11 m
	Erie		Geosat	RMSE: 0.13 m
	Lake St Clair		Geosat	RMSE: 0.17 m
Morris and Gill (1994b)	Great Lakes		Topex / Poseidon	RMSE: 0.03 m
Korotaev et al (2001)	Black Sea	436,402 km <sup>2</sup>	T/P, ERS-1	RMSE: 0.03 m
Mercier et al (2002)	Victoria, Tanganyika Malawi and Turkana	131-390 x 10 <sup>3</sup>	TOPEX / Poseidon	RMSE: 0.10 m
	Rukwa and Kyoga	75-80 x 10 <sup>3</sup>	TOPEX / Poseidon	RMSE: 0.50 m
Coe and Birkett (2004)	Lake Chad	2.5 x 10 <sup>6</sup> km <sup>2</sup>	TOPEX / Poseidon	RMSE: 0.21 m
Zhang et al (2006)	Dongting Lake	2,623 km <sup>2</sup>	TOPEX / Poseidon	RMSE: 0.08 m
Medina et al (2008)	Lake Izabal	717 km <sup>2</sup>	Envisat	RMSE: 0.09 m
Munyaneza et al (2009)	Lake Kivu	2,400 km <sup>2</sup>	Envisat	RMSE: 0.30 m
Cai and Ji (2009)	Poyang Lake	20,290 km <sup>2</sup>	Envisat	Mean Error: 0.31 m
Guo et al (2009)	Hulun Lake	2,339 km <sup>2</sup>	TOPEX / Poseidon	RMSE: 0.13 m

Reference	Location	Lake Extent	Satellite / Sensor	Reported Error
Troitskaya et al (2012)	Gorki Reservoir	1,358 km <sup>2</sup>	T/P, Jason-1	RMSE: 0.15 m
Tseng et al (2013)	Qinghai Lake	4,186 km <sup>2</sup>	Envisat	RMSE: 0.06 m
This study	Lake Matano	164 km <sup>2</sup>	Envisat	RMSE: 0.21 m
	Lake Towuti	562 km <sup>2</sup>	Envisat	RMSE: 0.21 m

1 \* RMSE (Root Mean Square Error)

2


3

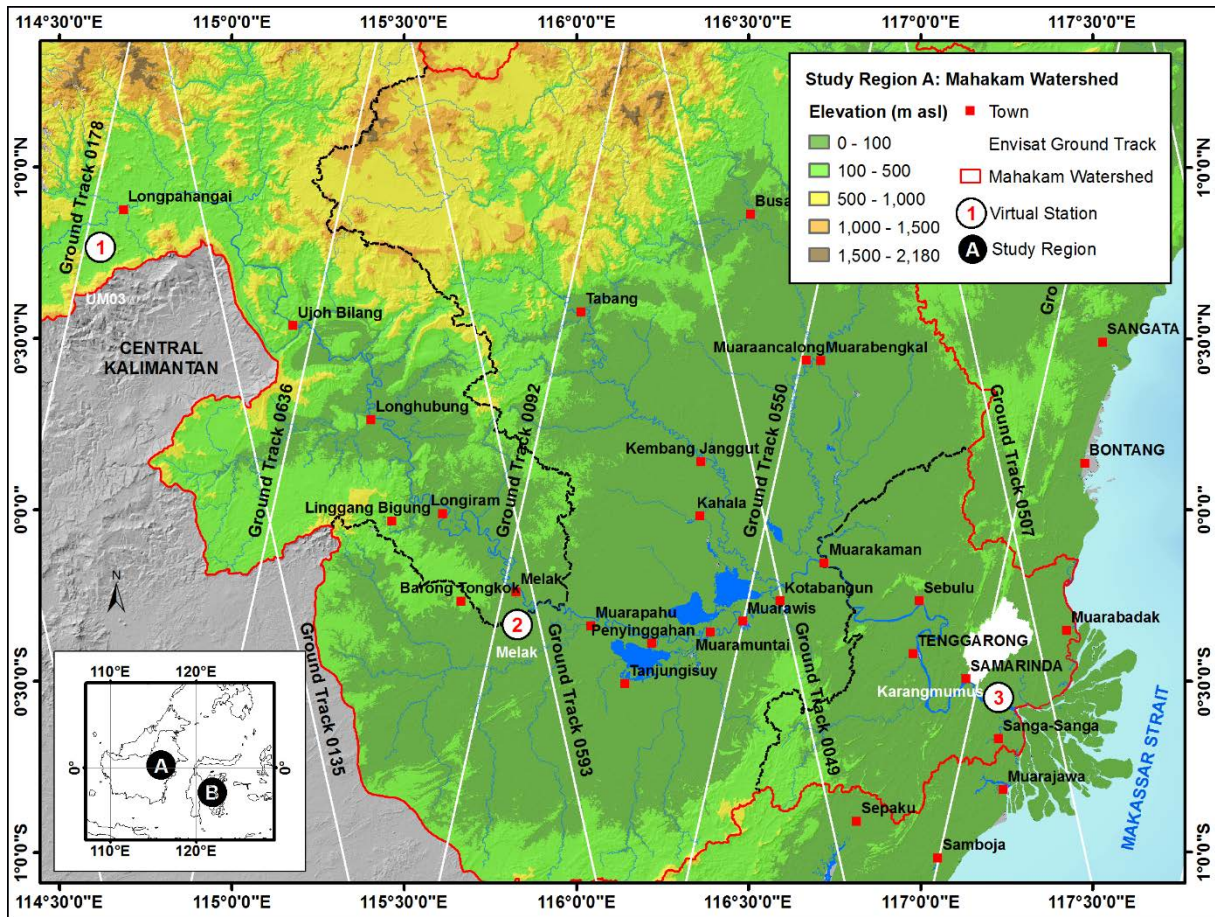

1

2 **Figure 1** Study Sites at Mahakam Watershed, East Kalimantan, Indonesia


3

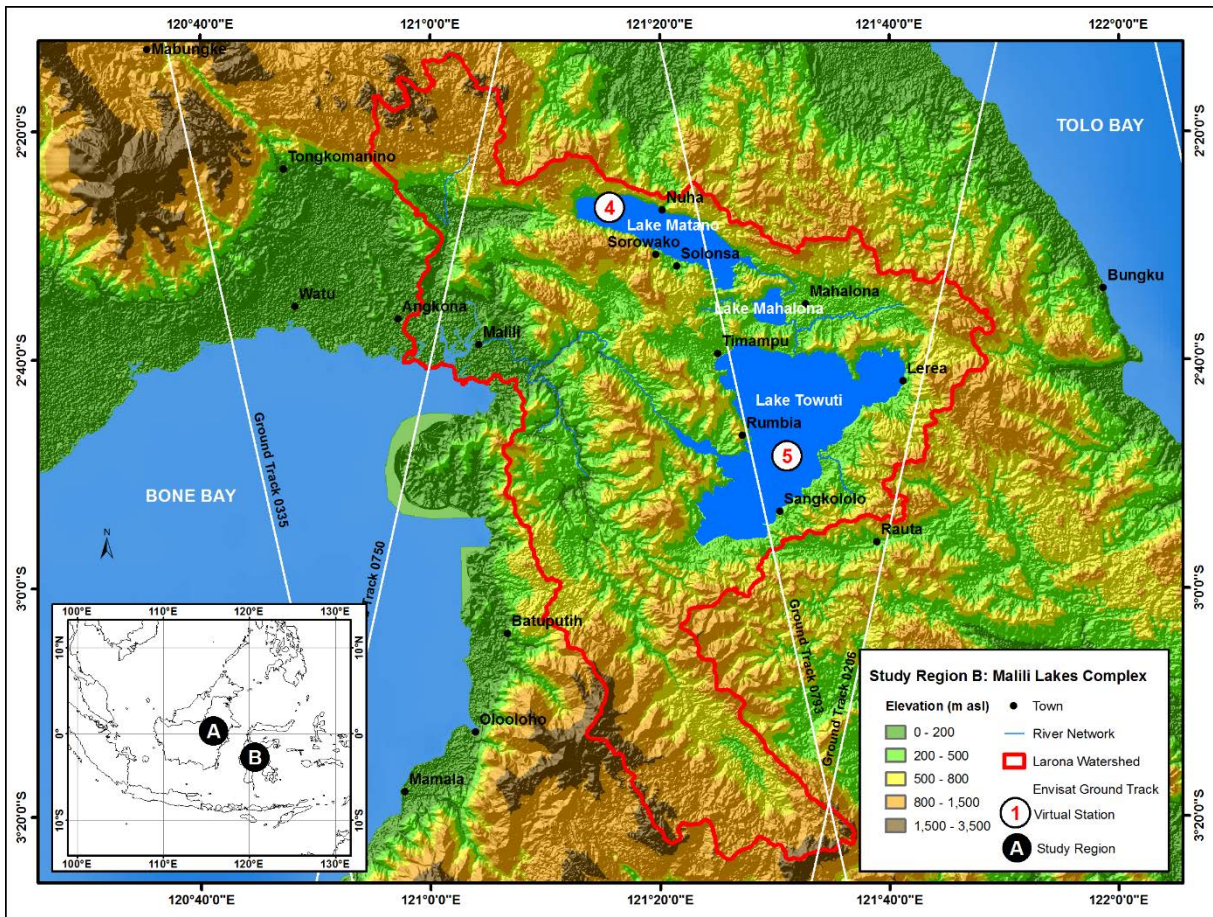


1

2 **Figure 2** Study Sites at Malili Lakes Complex, South Sulawesi, Indonesia

3

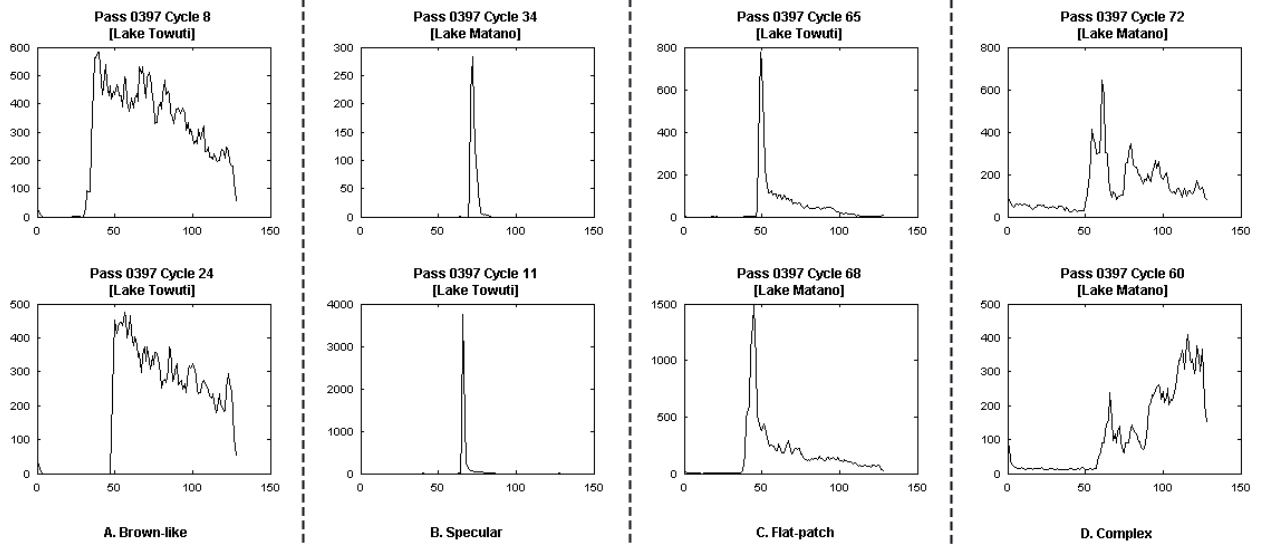



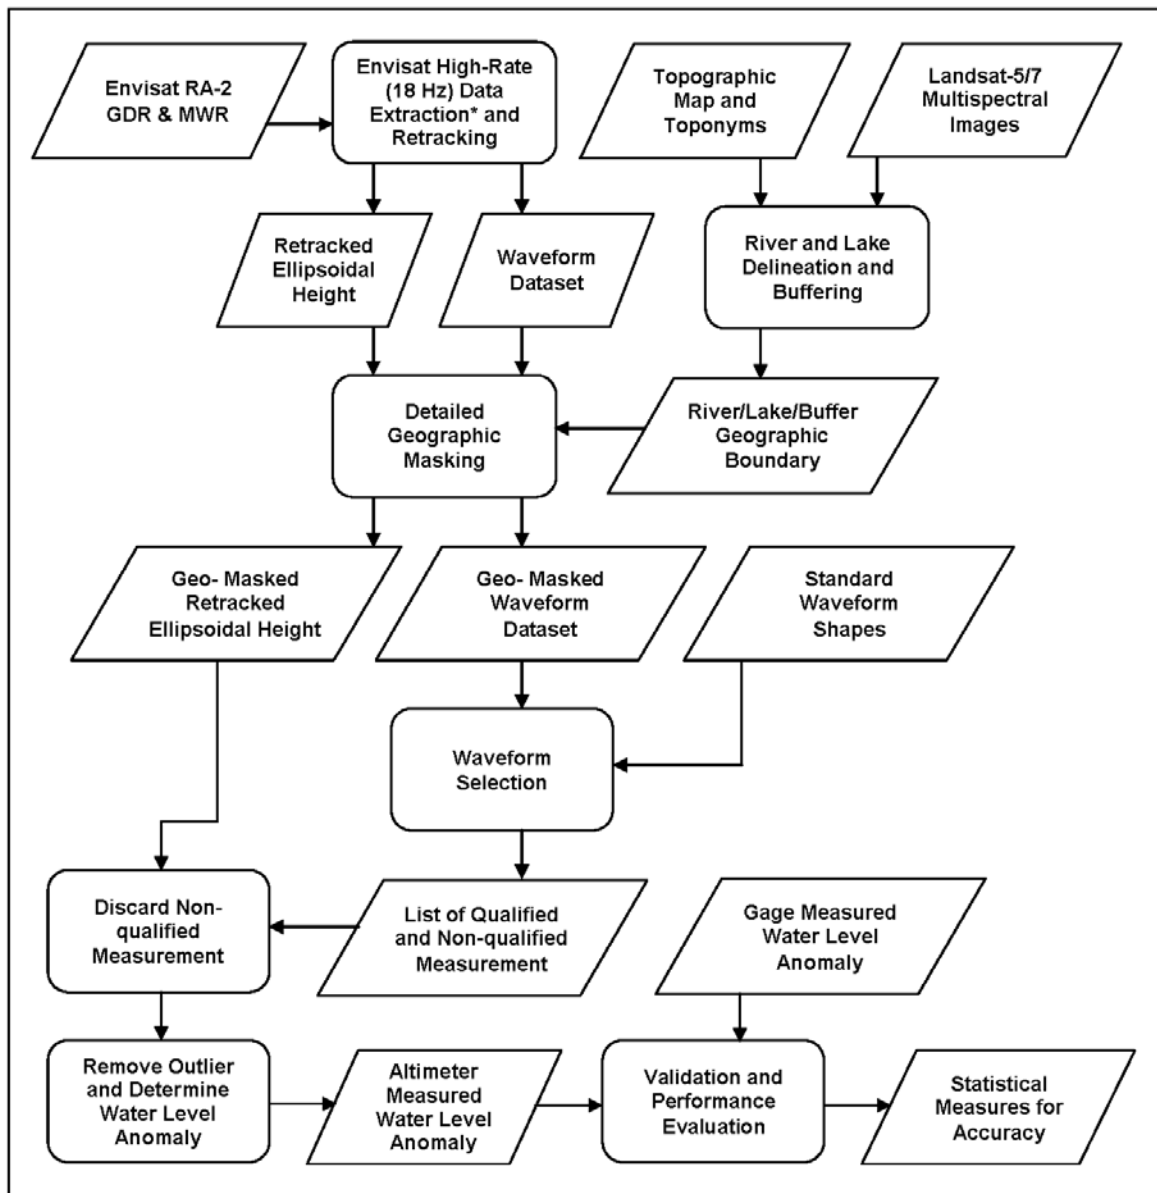


\* The initial data extraction includes rough masking based on geographic boundary while ensuring all measurements are within the land

1


2 **Figure 4** Data processing workflow

3

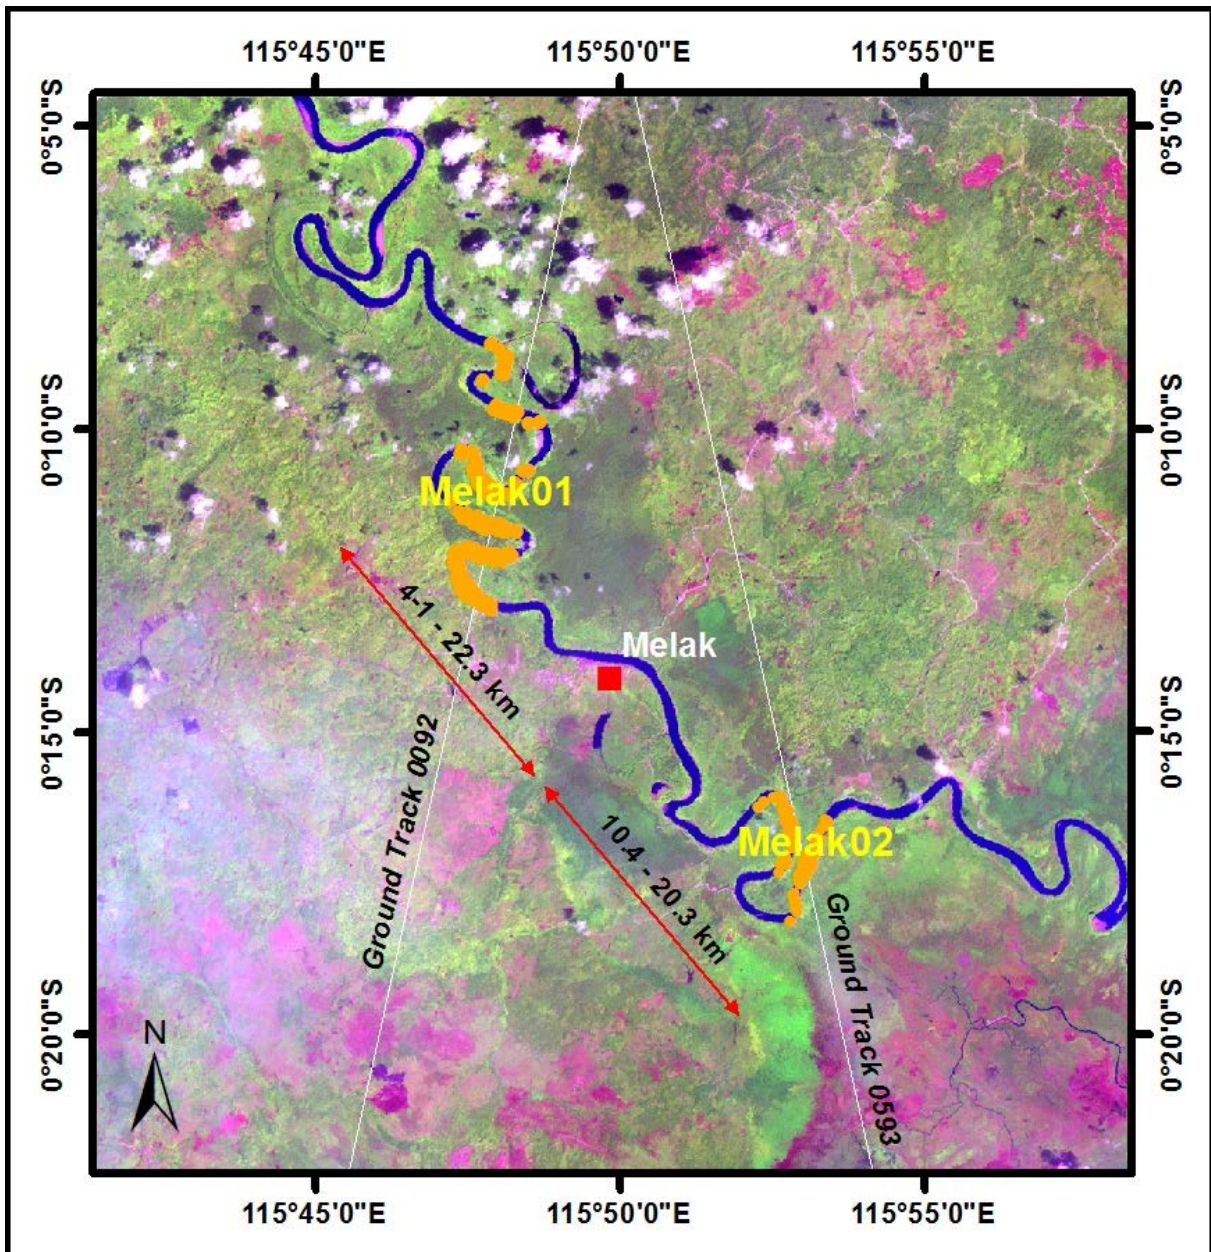

1  
2  
3  
4


**Figure 5** Location of Envisat virtual stations and in-situ water level gage stations at Melak Town

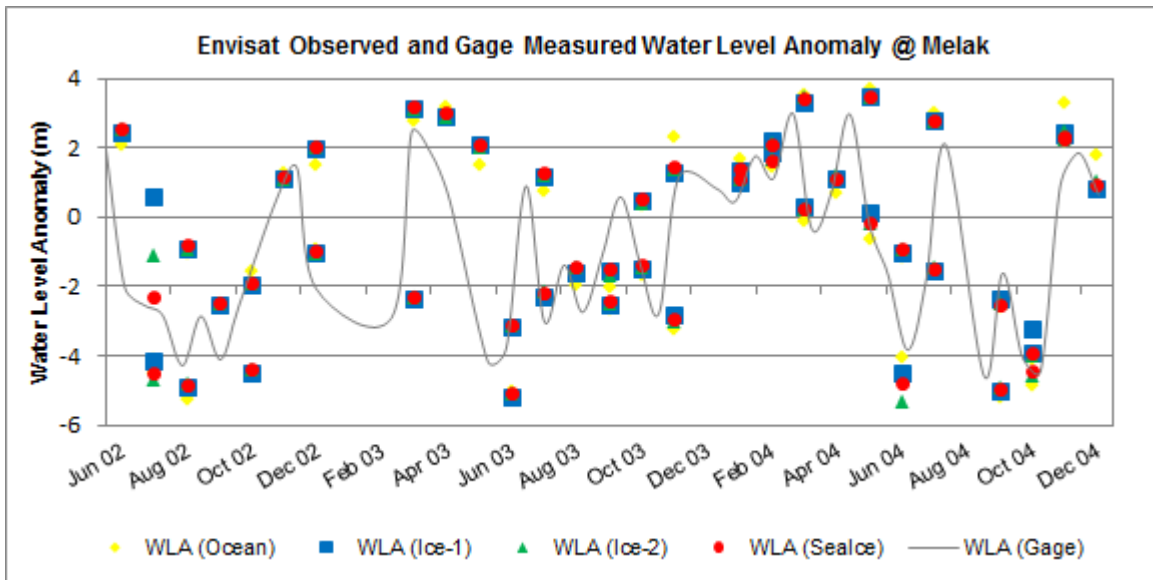

1


2 **Figure 6** Water level anomaly at Melak as observed by two Envisat passes and retracked  
 3 by four retrackers; compared with in-situ water level anomaly

4

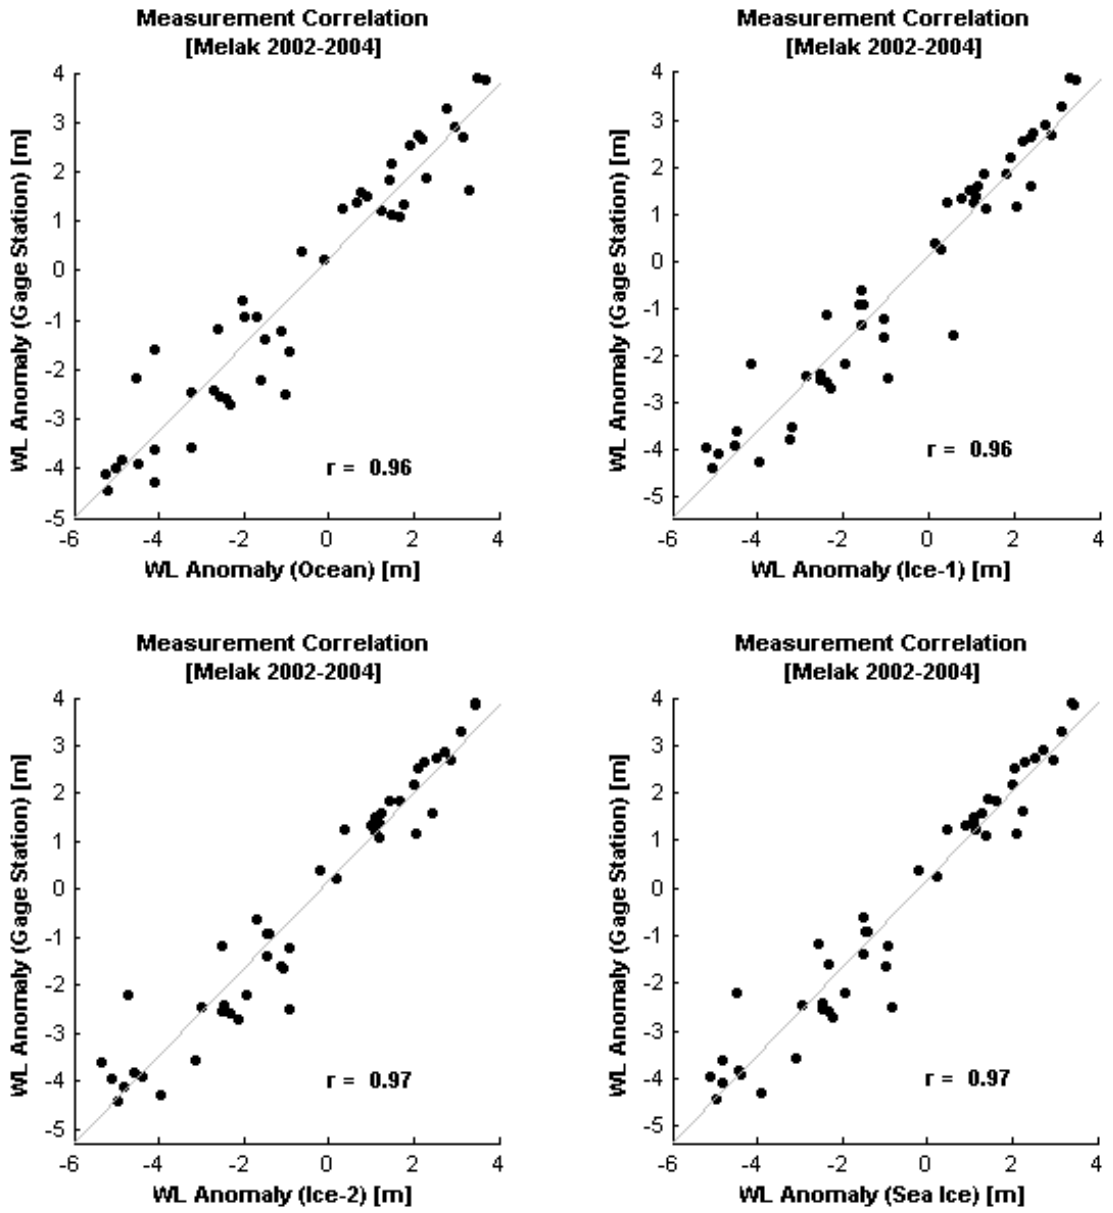


1  
2  
3  
4  
5


**Figure 7** Correlation between water level anomaly measured by Envisat altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retracers and in-situ water level measurement over Melak

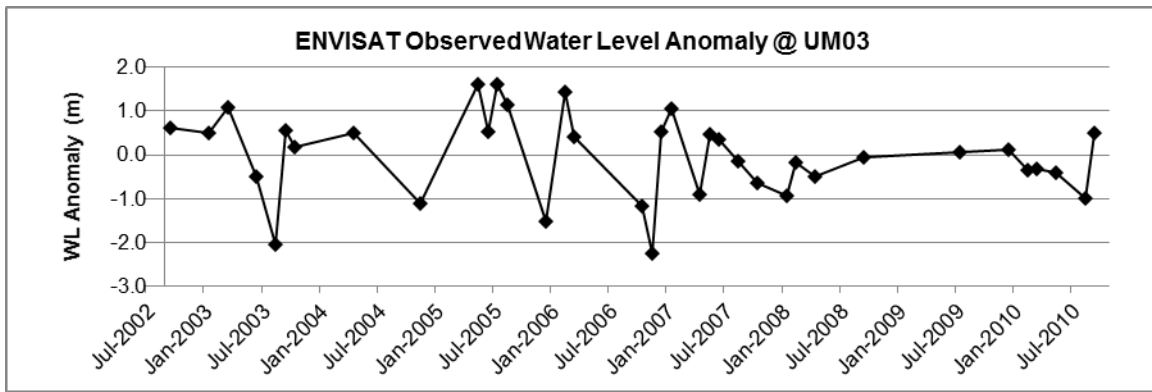


1  
 2 **Figure 8** ENVISAT observed water level anomaly at site UM03 (river width 54 m) as  
 3 measured by Envisat RA-2 and processed by Ice-1 retracker. Also shown is the  
 4 TRMM estimated precipitation for the area

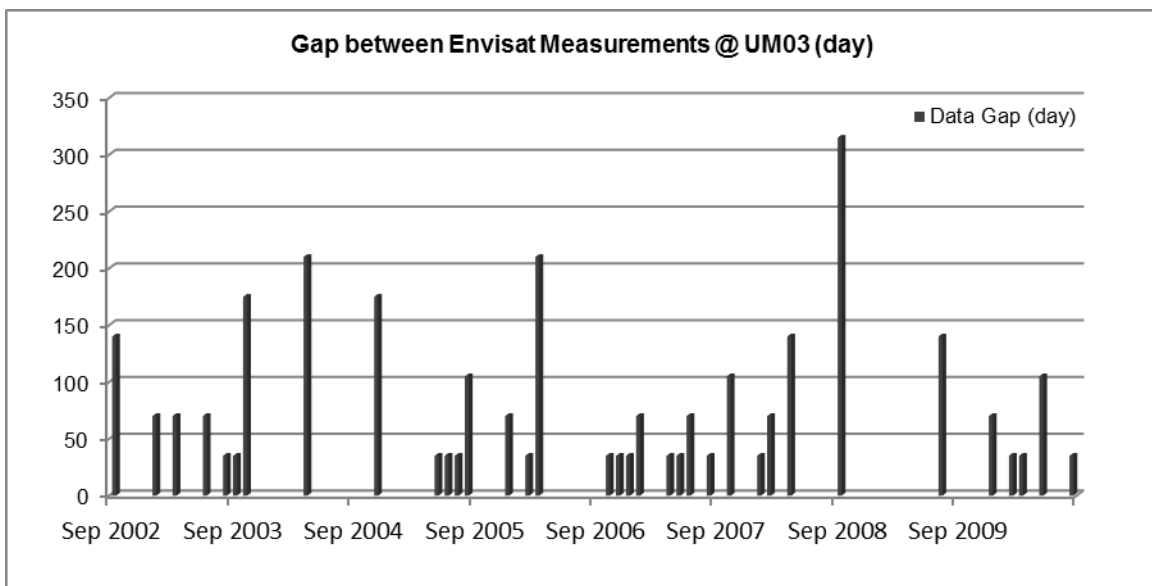


5  
 6 **Figure 9** Gap between Envisat observation of water level at over site UM03  
 7

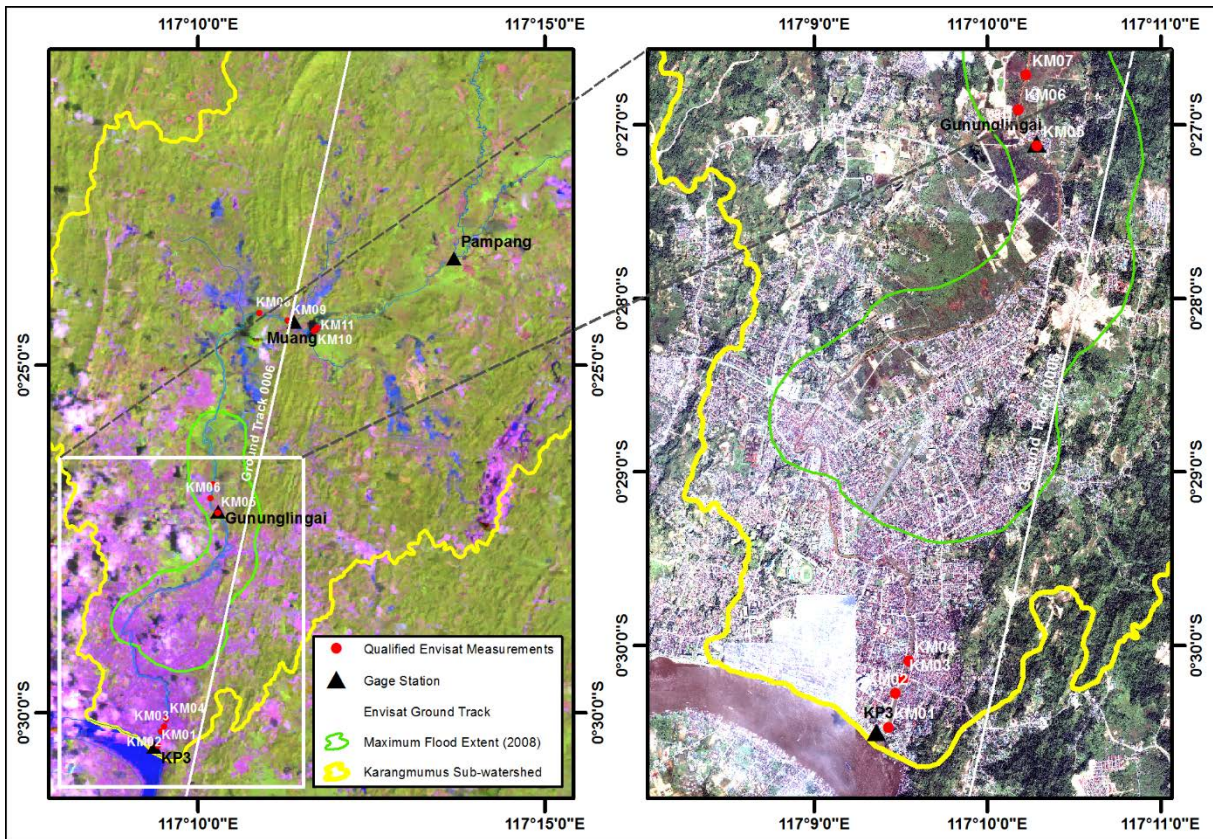

1  
 2 **Figure 10** Overview of Karangmumus Sub-watershed and Envisat ground track with  
 3 background of Landsat-7 image of January 2007 (left) and IKONOS of February  
 4 2002 (right, in the extent of white box of the left image)

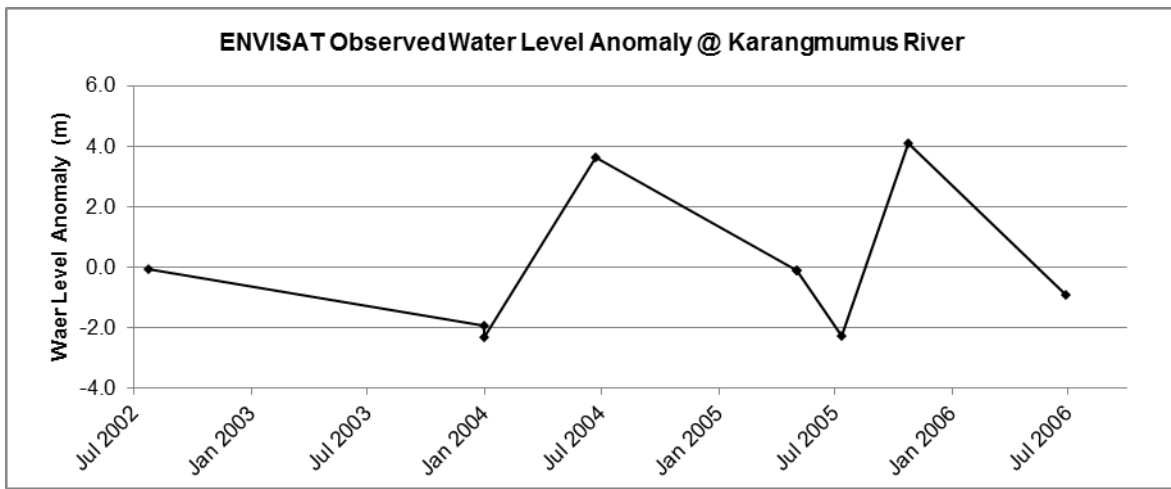


5  
 6 **Figure 11** Water level anomaly of Karangmumus River from Envisat RA-2  
 7

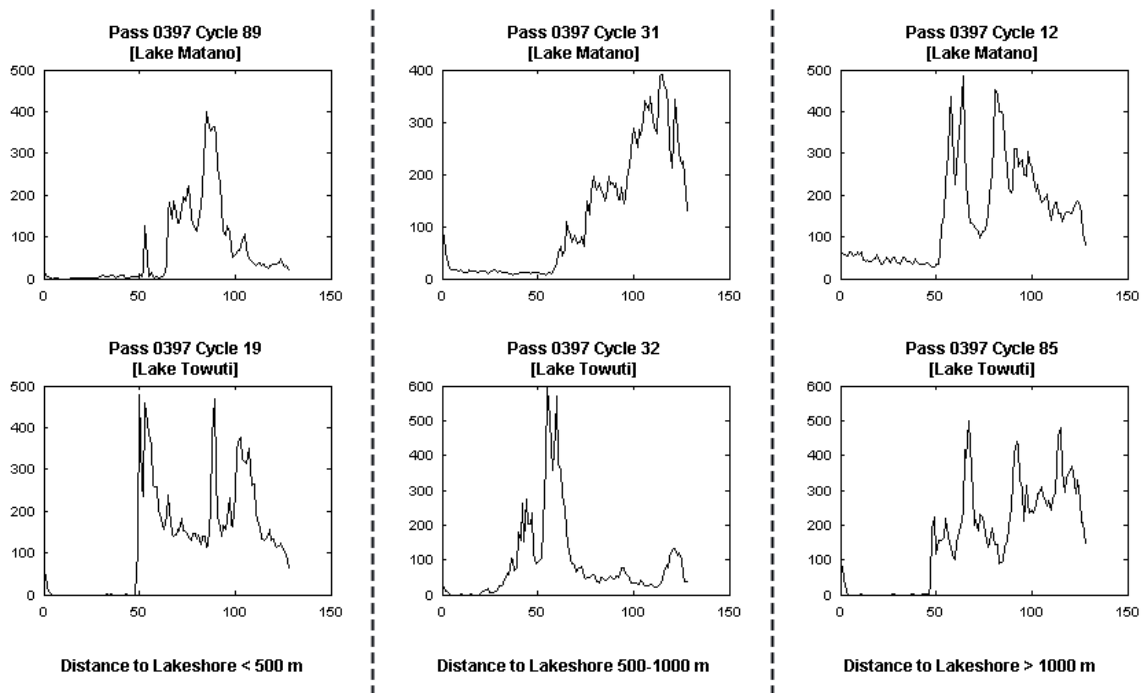


1

2 **Figure 12** Distinguished waveform shapes as reflected by Lake Matano and Lake Towuti  
 3 at different buffer distances to the lakeshore

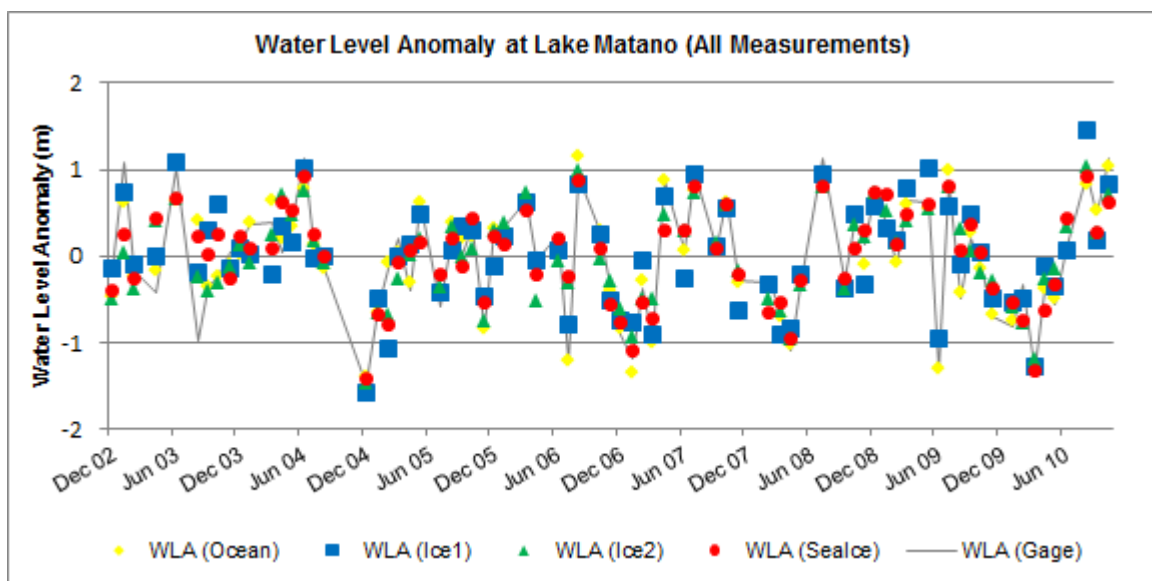

4

5 **Figure 13** Water level anomaly at Lake Matano as measured by Envisat RA-2 and  
 6 processed by all retracers, compared with in-situ measurement  
 7

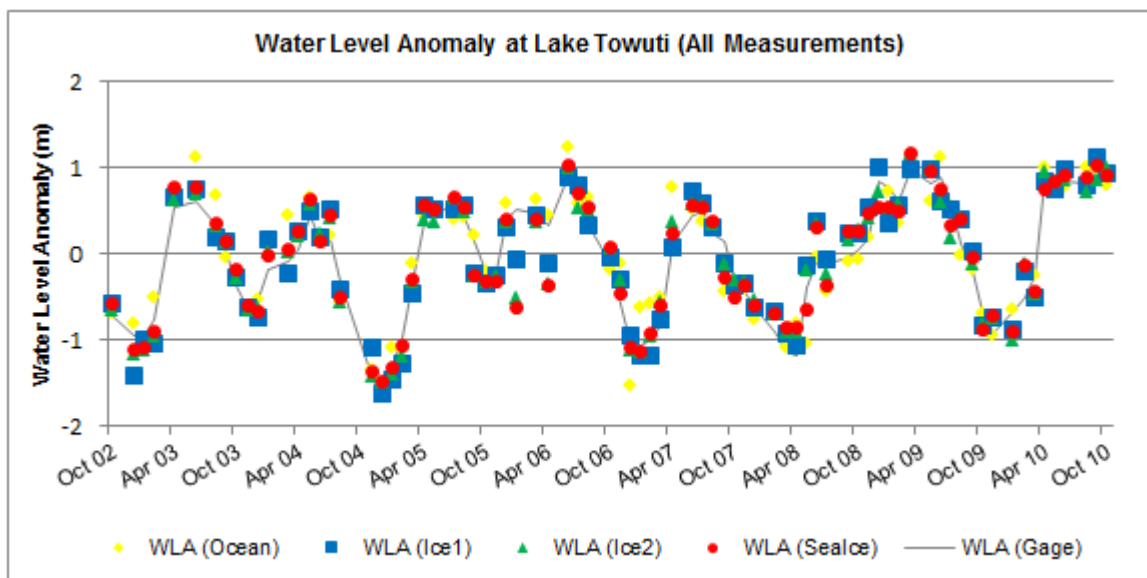


1

2 **Figure 14** Water level anomaly at Lake Towuti as measured by Envisat RA-2 and  
 3 processed by all retracers, compared with in-situ measurement


4



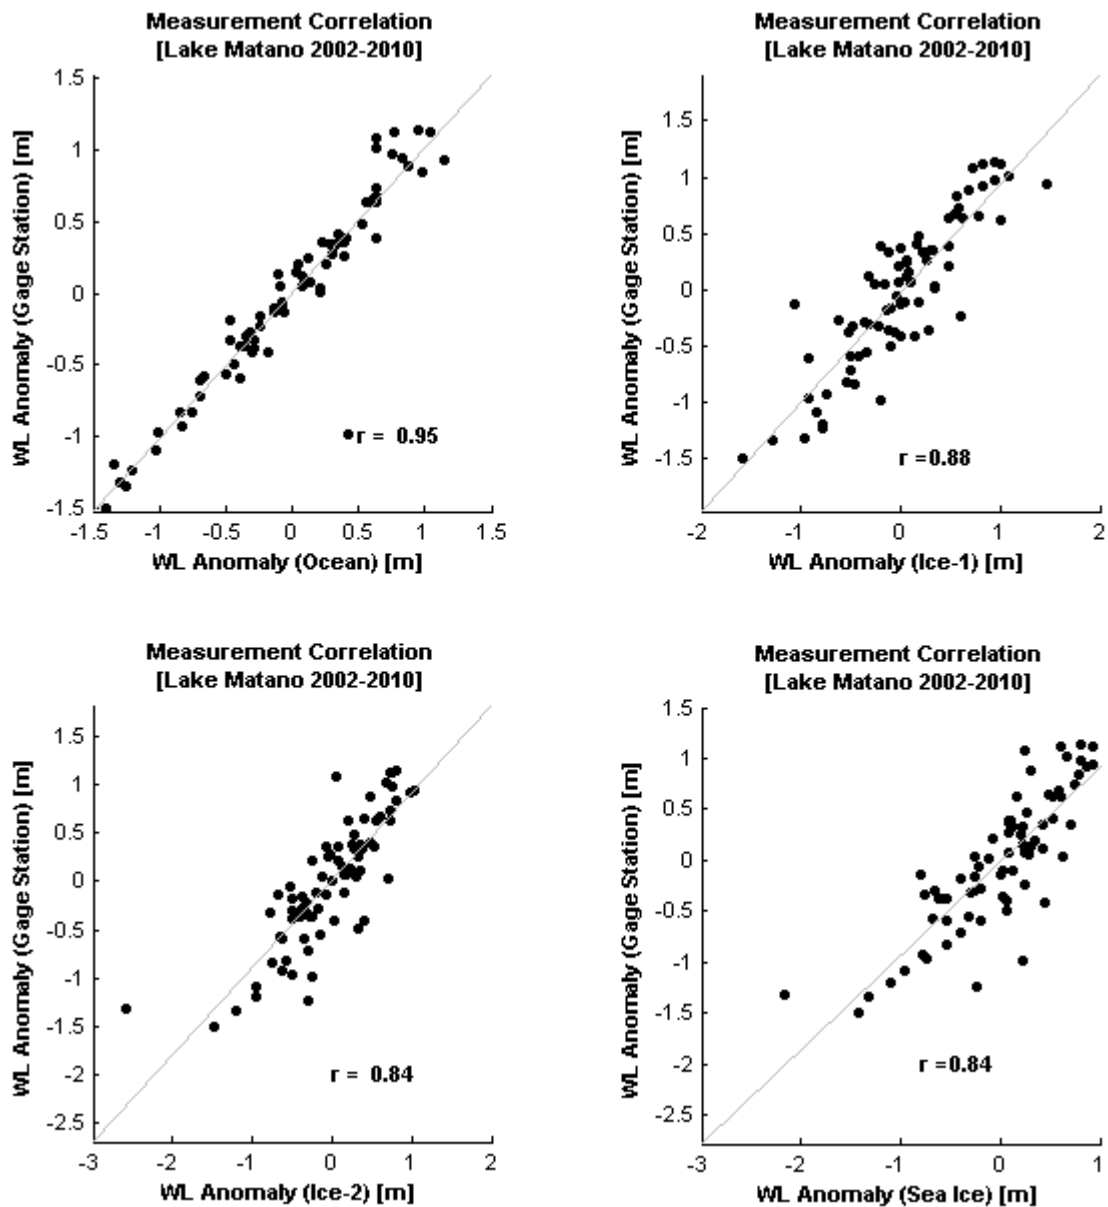



1  
2  
3  
4  
5

**Figure 15** Correlation between water level anomaly at Lake Matano as measured by Envisat RA-2 altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retrackers


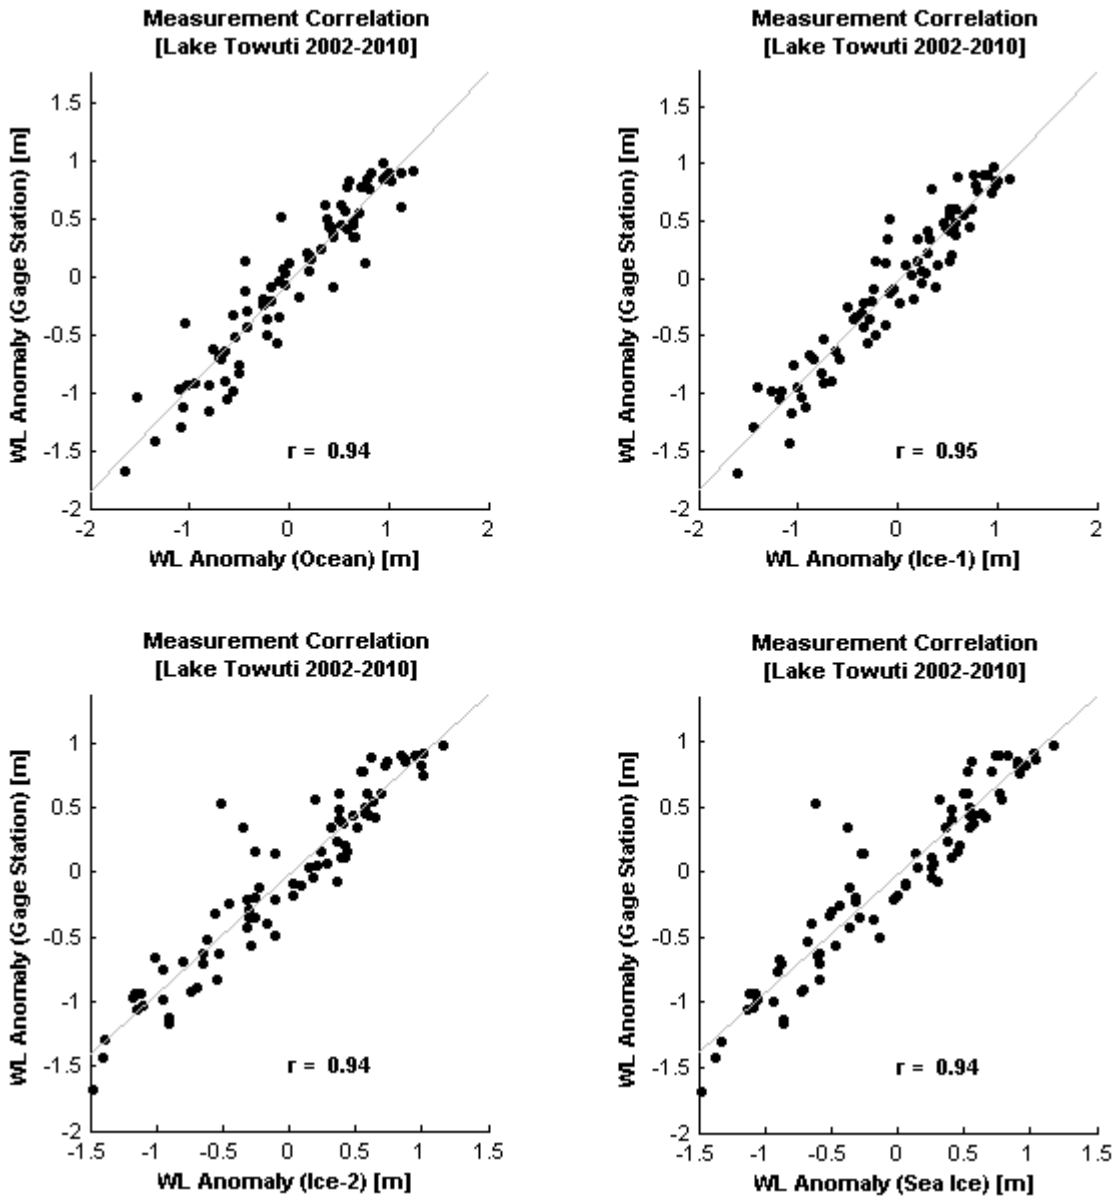


1  
2  
3  
4  
5

**Figure 16** Correlation between water level anomaly at Lake Towuti as measured by Envisat RA-2 altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retrackerers

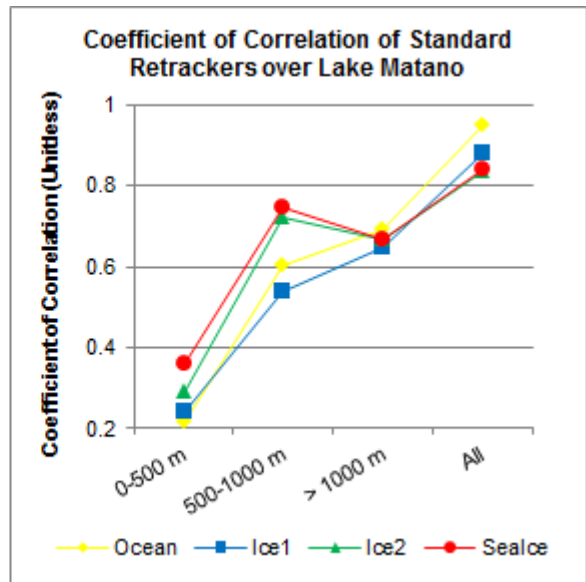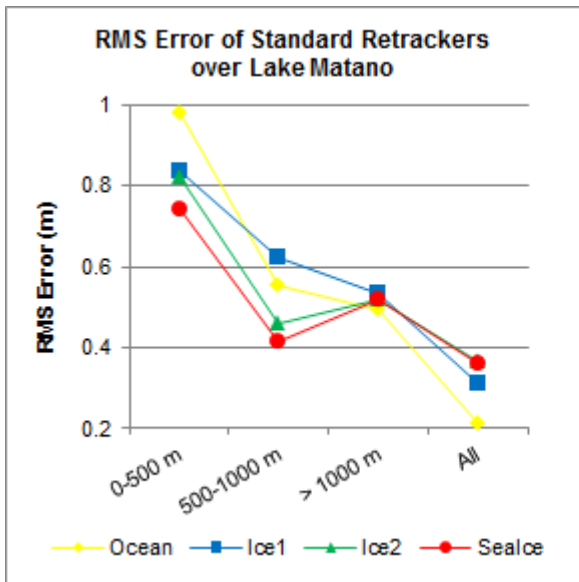

1  
 2 **Figure 17** The performance of Envisat RA-2 radar altimetry measurements over Lake  
 3 Matano, classified by the distance to the lakeshore

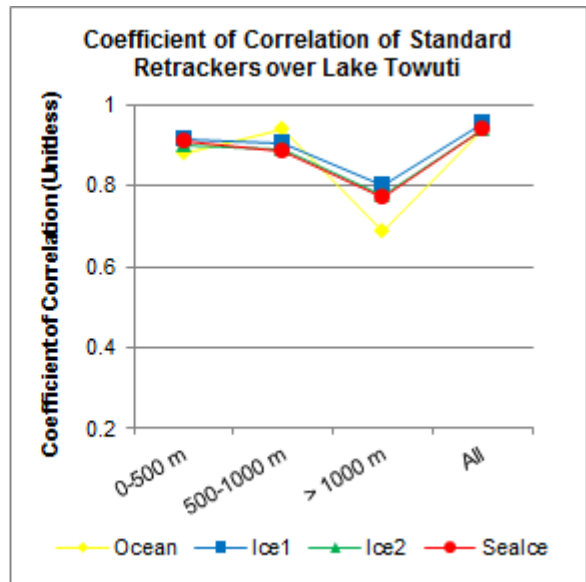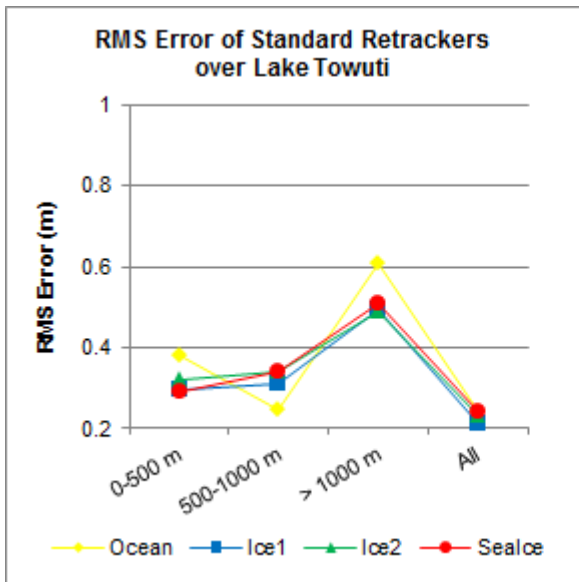

4  
 5 **Figure 18** The performance of Envisat RA-2 radar altimetry measurements over Lake  
 6 Towuti, classified by the distance to the lakeshore

1 **6 Supplementary Materials**

2

3 **Table 8** Envisat RA-2 pass, cycles and observation period for each study sites

Site #	Site Name	Longitude	Latitude	Pass	River/Lake Width	In-Situ Data	Cycle	Period
<b>Mahakam Watershed</b>								
1	UM03	114°35'10" E	0°50'02" N	89	54 m	No	6-93	2002-2010
2a	Melak01	115°53'20" E	0°17'08" S	46	247 m	Yes	6-93	2002-2010
2b	Melak02	115°47'58" E	0°11'03" S	297	294 m	Yes	6-93	2002-2010
3	Karangmumus	117°11'20" E	0°24'21" S	3	8-45 m	Yes	6-93	2002-2010
<b>Malili Lakes Complex</b>								
4	Matano	121°24'6" E	2°28'59" S	397	8,159 m	Yes	6-93	2002-2010
5	Towuti	121°23'57" E	2°30'10" S	397	28,818 m	Yes	6-93	2002-2010

4

5