

1 **Satellite Radar Altimetry for Monitoring Small River and Lakes**
2 **in Indonesia**

3

4 **Y.B. Sulistioadi^{1,5}, K-H. Tseng², C.K. Shum^{3,9}, H. Hidayat^{4,7}, M. Sumaryono⁵,**
5 **A. Suhardiman^{5,6}, F. Setiawan⁷ and S. Sunarso⁸**

6 [1] Hydrological Sciences Laboratory, NASA Goddard Space Flight Center, Greenbelt, MD
7 United States

8 [2] Center of Space & Remote Sensing Research, National Central University, Taiwan

9 [3] Division of Geodetic Science, School of Earth Sciences, the Ohio State University,
10 Columbus, OH, United States

11 [4] Hydrology and Quantitative Water Management Group, Wageningen University,
12 Wageningen, the Netherlands

13 [5] Department of Forest Science, University of Mulawarman, Samarinda, Indonesia

14 [6] Department of Global Agricultural Sciences, the University of Tokyo, Japan

15 [7] Research Center for Limnology, Indonesian Institute of Sciences, Cibinong, Indonesia

16 [8] PT Vale Indonesia, Tbk, Sorowako, Indonesia

17 [9] Institute of Geodesy and Geophysics, Chinese Academy of Sciences, Wuhan, China

18 Correspondence to: Y. B. Sulistioadi (y.b.sulistioadi@nasa.gov)

19

1 **Abstract**

2 Remote sensing and satellite geodetic observations are capable of hydrologic monitoring of
3 freshwater resources. Although satellite radar altimetry has been used in monitoring water level
4 or discharge, its use is often limited to monitoring large rivers (> 1 Km) with longer interval
5 period (> 1 week) because of its low temporal and spatial resolutions (i.e., satellite revisit
6 period) . Several studies have reported successful retrieval of water level for small rivers as
7 narrow as 40 m. However, processing current satellite altimetry signals for such small water
8 bodies to accurately retrieve water level remains challenging. Physically, the radar signal
9 returned by water bodies smaller than the satellite footprint is most likely contaminated by non-
10 water surface, which may degrade the measurement quality. In order to address this scientific
11 challenge, we carefully selected the waveform shapes corresponding to the range measurement
12 resulted by standard retracers for the European Space Agency's (ESA's) Envisat
13 (Environmental Satellite) radar altimetry. We applied this approach to small (40–200 m width)
14 and medium-sized (200–800 m width) rivers and small lakes (extent $< 1000\text{km}^2$) in the humid
15 tropics of Southeast Asia, specifically in Indonesia. This is the first study that explored the
16 capability of satellite altimetry to monitor small water bodies in Indonesia.

17 The major challenges in this study include the size of the water bodies that are much smaller
18 than the nominal extent of the Envisat satellite footprint (e.g. ~ 250 m compare to ~ 1.7 km,
19 respectively) and slightly smaller than the along track distance (i.e. ~ 370 m). We addressed this
20 challenge by optimally using geospatial information and optical remote sensing data to define
21 the water bodies accurately, thus minimizing the probability of non-water contamination in the
22 altimetry measurement. Considering that satellite altimetry processing may vary with different
23 geographical regions, meteorological conditions, or hydrologic dynamic, we further evaluated
24 the performance of all four Envisat standard retracking procedures.

25 We found that satellite altimetry provided a good alternative or the only means in some regions,
26 to measure the water level of medium-sized river and small lake with high accuracy (root mean
27 square error of 0.21- 0.69 m and correlation coefficient of 0.94- 0.97). In contrast to previous
28 studies, we found that the commonly-used Ice-1 retracking algorithm was not necessarily the
29 best retracker among the four standard waveform retracking algorithms for Envisat radar
30 altimetry observing inland water bodies. As a recommendation, we propose to include the
31 identification and selection of standard waveform shapes to complete the use of standard

1 waveform retracking algorithms for Envisat radar altimetry data over small and medium-sized
2 rivers and small lakes.

3

4

5

1 **1 Introduction**

2 A number of small to medium-sized rivers are poorly gauged (Alsdorf and Lettenmaier, 2003).
3 Small rivers are defined as those with 40-200 m width and 10-100 m³/s average discharge,
4 while medium rivers are defined as those with 200-800 m width and 100-1000 m³/s average
5 discharge (Meybeck et.al., 1996). The installation and operation of in situ measurement such
6 as permanent gauging is costly and not a priority for developing countries such as in Indonesia.
7 However, there is an increasing interest for continuous satellite-based monitoring of hydrologic
8 bodies, including narrow or small rivers. Therefore, with the absence of continuously operating
9 in-situ measurements, it is a scientific and social challenge to develop a complementary water
10 resources monitoring system, with water level and discharge as the essential variables.

11 Space geodesy and satellite remote sensing are viable sources of observation to complement or
12 replace in-situ measured data that is lacking or unavailable. A number of researchers have
13 demonstrated the capability of remote sensing to measure hydrological variables (Tang et al.,
14 2009). Initiatives to develop a global river and lake water level database exist to date, but none
15 of them accounts for small to medium-sized rivers and lakes in the humid tropics.

16 Satellite altimetry missions were initially aimed to support oceanographic studies (Brown and
17 Cheney, 1983). However, scientists were able to use altimetry data to retrieve water surface
18 elevation of large rivers and lakes. These studies include those utilizing early satellite altimetry
19 missions (Wingham and Rapley 1987, Koblinsky et.al., 1993, Morris and Gill, 1994), as well
20 as recent ones (e.g. Birkett, 1998, Benveniste and Defrenne, 2003, Kouraev et.al, 2004, Calmant
21 and Seyler, 2006, Frappart et.al, 2006, Cretaux et.al, 2011).

22 Application of satellite altimetry to monitor inland waters has several limitations. The long
23 satellite repeat cycle makes the satellite potentially miss important hydrological events (e.g.
24 flash flood) between the repeats. For instance, the repeat period for TOPEX/Poseidon and
25 Jason-1/2 is 10 days; 35 days for ERS-1/2, Envisat and SARAL/Altika; and 91 days for ICESat.
26 The low spatial resolution of radar altimeter as represented by the radar altimeter footprint
27 (about 1.7 to 3 km for calm waters), limits the measurement only to wide rivers, due to
28 interference of the returned radar signal by non-water features. Earlier studies showed that
29 satellite radar altimetry was useful to monitor large rivers with width > 1km (Birkett, 1998,
30 Birkett et al., 2002). However, recent studies demonstrated successful retrieval of water level
31 of small rivers (<100 m width) (Kuo and Kao, 2011, Michailovsky et al., 2012). Nonetheless,

1 the processing of satellite altimetry measurement for small water bodies remains challenging
2 because of its spatial and temporal limitations.

3 Early studies of satellite altimetry to retrieve water level of a river used waveform shape to
4 match the specular characteristics that exclusively belong to the signals returned by the river
5 (Koblinsky et al., 1993). Specular refers to a reflection characteristic where a signal reflects
6 into one direction, thus match the reflection by a mirror (e.g. Torrance and Sparrow, 1967). In
7 the context of radar signal processing, this occurs when the radar signal hits calm or smooth
8 water surface, which is represented as a peak in the return signal power (e.g. as represented by
9 a power spectra). Along with this principle, scientists developed non-ocean retrackerers in the
10 last decade. These include the offset center of gravity (OCO_G) or Ice-1 (Wingham et al, 1986),
11 , volume scattering retracker (Davis, 1993), sea ice retracker (Laxon, 1994), NASA β - retracker
12 (Zwally, 1996), surface / threshold retracker (Davis, 1997) and Ice-2 (Legresy and Remy,
13 1997). The offset center of gravity (OCO_G) or Ice-1 (Wingham et al., 1986) is a simple but
14 robust retracker that only requires the statistics of the waveform samples and does not require
15 any model (model-free retracker) (Bamber, 1994). The Ice-2 algorithm modifies Ocean
16 retracker (Brown, 1977) by adding scattering distribution coefficient that describes the vertical
17 profile of the reflecting surfaces. This coefficient accounts for the interference of the default
18 scattering pattern as generated by snow, ice sheet, sand or vegetation (Legresy and Remy,
19 1997). Laxon (1994) introduced the Sea Ice algorithm to specifically study sea ice elevation by:
20 (1) characterizing the power and shapes of the radar return, (2) classifying the sea ice and
21 determining the waveform parameters, and (3) correcting the retracked range. Ice-1, Ice-2 and
22 Sea Ice along with the Ocean retracker (that is exclusively developed for ocean studies) are the
23 standard retrackerers for European Space Agency (ESA)'s Envisat (Environmental Satellite) until
24 the satellite decommissioned in June 2012. Recent developments of inland water retracking
25 methods include the improvements of the threshold retracker (Davis, 1997) by Lee, (2008) and
26 Bao et al. (2009), sub-waveform analysis (e.g. Hwang et al., 2006 and Fenoglio-Marc et al.,
27 2009) and sub-waveform filtering and track offset correction (Tseng et al., 2012).

28 For inland water studies such as river and lake, Frappart et al. (2006) found Ice-1 as the best
29 retracker for large rivers (e.g. Amazon River) over the other standard retrackerers for Envisat
30 (e.g. Ocean, Ice-2 and Sea Ice). None of these retrackerers are specifically developed for inland
31 waters. Satellite altimetry processing also varies depending on geographical regions,
32 meteorological conditions, and hydrological dynamics of the water bodies. Up to this point, no

1 “one size fits all” method for satellite altimetry waveform retracking is readily available to
2 measure water level of small (40–200 m width) and medium-sized (200–800 m width) rivers
3 and lakes. Hence is the need of developing specific algorithm or additional procedures for
4 satellite altimetry applications to study inland waters. Furthermore, there is also a need to
5 evaluate the commonly used Ice-1-based retracker in different regions of interest.

6 Since the size of the water bodies is smaller than the satellite footprint, the surrounding non-
7 water surface often contaminates the satellite altimetry’s returned radar signal. In this study, we
8 solved this issue by integrating geospatial information and optical remote sensing with satellite
9 altimetry measurement to monitor small water bodies. Our study indicates that careful
10 demarcation of water bodies reduces the contamination of return radar signal caused by the
11 presence of non-water surface, thus improving the quality of the measurement.

12 In this study, we processed the results of Envisat standard waveform retracking procedures
13 (Ocean, Ice-1, Ice-2 and Sea Ice) to monitor water level of a small river, a medium river and
14 two lakes in the tropics. In addition to the standard waveform retracking procedures, we
15 performed careful spatial and waveform shape selection and outlier detection to screen out low
16 quality data. We then evaluated the results against in-situ measured water level to assess their
17 accuracy.

18

19 **2 Study Area**

20 This study was conducted in the following water bodies in Indonesia (Figures 1 and 2):
21 Mahakam and Karangmumus Rivers in East Kalimantan Province (Borneo Island), Lakes
22 Matano and Towuti in South Sulawesi Province (Sulawesi Island). Karangmumus River is a
23 tributary downstream of Mahakam River, while Lakes Matano and Towuti are part of Malili
24 Lakes Complex. These water bodies represent different geomorphology, climate and
25 anthropogenic situations as described below.

26 **2.1 Mahakam and Karangmumus Rivers**

27 The Mahakam watershed is located at 113° 40’ to 117° 30’ E longitude and 1° 00’ S to 1° 45’
28 N latitude. Mahakam is the second largest river in the country, which stretches to ~920 km and
29 drains an area of 77,095 km². The Mahakam River rises in the mountainous forest ranges with
30 dramatic elevation drops in the first hundreds kilometres of the main stem, where the formation

1 of rolling hills and steep slopes form the upstream part of this watershed. The Middle Mahakam
2 Lake and Wetlands form up starting from about fifth hundred kilometers downstream from the
3 headwater and transforms into the Mahakam Delta estuary in the last hundred kilometers of
4 Mahakam River (MacKinnon et al., 1996). The upstream part of Mahakam River has narrow
5 channel with 40-100 m width, 5 to 10 m average depth, and river bed slope greater than 2%.
6 Forest and small patches of subsidence farmlands dominate the land use of this upstream
7 portion. The middle part has medium-sized channel with 100-300 m width, 10-24 m depth and
8 0.5-2% slope. Extensive lowland and agricultural areas spread about everywhere along with
9 country-style residential areas, lakes and swampy shrubs. The lower part and the Mahakam
10 Delta has wide channel of 500-850 m width, 10-24 m depth and 0-0.5% slope. The lower sub-
11 watershed is typically a developed area with residential areas, scarce forest patches and heavily
12 inhabited land (Estiaty et al., 2007).

13 Karangmumus River is a narrow channel (3 to 45 m width) that is an important waterway for
14 the residents of Samarinda City in East Kalimantan Province. The Karangmumus sub-
15 watershed often experiences gradual increases and steady high water level during simultaneous
16 heavy rainfall and backwater intrusion from ocean tide through the Mahakam Delta.

17 **2.2 Lake Matano and Lake Towuti**

18 Lake Matano is located at 121° 12' to 121° 29' E longitude and 2° 23' to 2° 34' N latitude. This
19 lake counts as the seventh deepest lake of the world (Herdendorf, 1982) despite its small extent
20 (164 km²). With the maximum depth of 595 m and mean water surface elevation measured at
21 392 m, Lake Matano represents a cryptodepression (i.e. the lake bed is below the mean sea
22 level) (Hehanussa and Haryani, 1999). Originated by tectonic process since 2–3 million years
23 ago, this lake is one of the oldest lakes of the world. The lake hosts endemic faunas that provide
24 remarkable examples of ecological diversification and speciation (Cristescu et al., 2010). The
25 basins in the surrounding of Lake Matano are formed by the hardness of the rocks and the
26 softness of uplift tectonic fault that forms limited number of alluvial plains. Lake Matano also
27 has two flat depressions separated by a saddle. It drains through the Petea River into Lake
28 Mahalona that is located in the same Malili Lakes complex (Vaillant et al., 1997).

29 Lake Towuti is recognized as the largest tectonic lake in Indonesia (Russel and Bijaksana,
30 2012). Located at the downstream end of the Malili Lakes Complex, this lake covers an extent

1 of 562 km² with 206 m depth. Similar to Lake Matano, Lake Towuti carries locally endemic
2 fauna since this lake is also one of the ancient lakes.

3 **3 Materials and Methods**

4 **3.1 Envisat Radar Altimetry**

5 In this study we used satellite radar altimeter measurements from The European Space Agency
6 (ESA)'s Envisat Radar Altimeter (RA-2) during the period of July 2002 to October 2010,
7 corresponding to cycle 6 to 93 (ESA, 2007). The RA-2 determines the two-way delay of radar
8 echo from the Earth's surface in a very high precision of less than a nanosecond. In addition, it
9 measures the power and shape of the reflected radar pulses, which are represented by the
10 waveforms. The RA-2 on-board signal processor calculates the average of approximately 100
11 measurements of individual echo burst at ~1800 Hz. These data, along with the waveforms, are
12 averaged into the 18 measurements per second (18 Hz). The 18 Hz data correspond to an along-
13 track sampling interval of ~350 m (ESA, 2011). The averaged 18 Hz waveforms are arranged
14 into 128 gates with 3.125 nanosecond temporal resolution and presents the default tracking gate
15 at #46 (ESA, 2007). We also utilized the Envisat RA-2/Microwave Radiometer (MWR) Sensor
16 Geophysical Data Record (SGDR) (hereafter, RA-2/MWR SGDR) Level-2 product. The RA-
17 2/MWR SGDR contains parameters for time tagging, geo-location, output from retrackerers (i.e.
18 range, wind speed, significant wave height) at 1 Hz, and other 18 Hz-parameters such as range
19 and orbital altitude. The RA-2/MWR SGDR also contains the 18 Hz waveforms that we used
20 in the waveform shape selection procedure. We used the 18 Hz re-tracked range to infer the
21 water surface elevation. Before comparing the altimetry with in-situ measurements, we first
22 corrected the instrumental (i.e. Doppler shift and oscillator drift), the geophysical (i.e. inverse
23 barometer, polar and solid Earth tides) and the media (i.e. ionosphere and dry/wet troposphere)
24 range in order to match the standard retrackerers range (Ocean, Ice-1, Ice-2 and Sea Ice) produced
25 from the Level-2 radar altimeter product.

26 Satellite radar altimetry measures water surface elevation with respect to the reference ellipsoid.
27 Due to the uncertainty in the relationship between the elevations of the field gage benchmark
28 relative to the local vertical datum, we used the water level anomaly in our analysis. The
29 anomaly was calculated by subtracting the water level mean over the study period (July 2002 –
30 October 2010) from the observed level. Hence, it represents the fluctuation of water level
31 relative to its mean level. In order to test the current assumption of Ice-1 as the best retracking

1 algorithm for inland waters (Frappart et al., 2006), we compared the water level anomaly
2 obtained from water surface elevation measured by the Ocean, Ice-1, Ice-2 and Sea Ice
3 retrackers with those obtained from the in-situ gage measurement.

4 **3.2 Optical Remote Sensing and Geospatial Dataset**

5 We applied standard optical remote sensing data processing techniques in order to obtain
6 imageries with precise position and better contrast ratio between land and water. The processing
7 included geometric correction, development and contrast adjustment of the pseudo-natural
8 color composite imagery from red-green-blue combination (bands 5, 4 and 3 of Landsat 5 and
9 Landsat 7; or bands 6, 5 and 4 for the recently launched Landsat 8). We then measured river
10 and lake width through visual interpretation of the remote sensing imagery (i.e. through dark-
11 blue color reflected by the water bodies in the pseudo-natural color composite of Landsat
12 imagery) and marked the boundaries. When the object was too small to detect using visual
13 inspection of remote sensing images, we used medium-scale (1:50,000) topographic maps
14 released by the Indonesian Geospatial Agency to identify and mark the boundary.

15 Previous work (Sarmiento and Khan, 2010) showed that satellite altimetry measurements were
16 less accurate when the center of satellite altimetry footprint was closer to the lakeshore. In order
17 to test this hypothesis, we created masks with varying distances to the lakeshore (i.e. 0-500 m,
18 500-1000 m and >1000 m). The footprint diameter of the Envisat RA-2 over a smooth surface
19 is about 1.7 km (Rees 1990, ESA 2007). We assumed that the Envisat altimeter measurements
20 within the last mask (i.e. > 1000 m from lakeshore) were not influenced by the surrounding
21 non-water surface. We then analysed the performance of altimeter measurements based on these
22 masks. As for the river, we created a mask with 5-meter buffer distance to the riverbank, in
23 order to reduce the land surface-waveform contamination and to tolerate any geo-referencing
24 and projection errors of the satellite imagery and topographic maps.

25

26 **3.3 In-situ Water Level Data**

27 Indonesia's Ministry of Public Works provided the datasets used for validation of water level
28 of Mahakam River at Melak site (2002-2004) and Karangmumus River (2008-2010), while PT
29 Vale Indonesia provided validation data for Lake Matano and Lake Towuti (2002-2012).

1 Similar to the satellite altimetry data, we transformed the water level time series into water level
2 anomaly by removing the mean water surface elevation over the period of observation.

3 **3.4 Waveform Shape Analysis**

4 The presence of variable land cover (e.g. vegetation in the riverbank, lakeshore or coastline, as
5 well as islands or sandbanks within the river or lake) affects the returned radar signal in
6 altimetry measurement (e.g. Deng and Featherstone, 2006; Berry et al, 2005). Therefore, we
7 analysed the waveform shapes considering that the radar pulse reflected by the small water
8 bodies might be influenced by other surface within the projected radar footprint. For the lakes,
9 1-km distance to the lakeshore was sufficient since the radius of the Envisat footprint (half of
10 its diameter) is about 850 m. However, this issue becomes more challenging for small and
11 medium-sized rivers (40-800 m width), rendering the waveform produced by the processed
12 radar pulse return unpredictable.

13 Due to the fact that inland water surface is smoother than the ocean (Birkett, 1998), we assumed
14 that (quasi) specular shape is the standard waveform shapes for radar pulse returns reflected by
15 inland water bodies, in contrast to the ocean-reflected diffuse shape (Koblinsky, 1993).
16 Additional shapes of Envisat RA-2 returned radar pulse over inland water include (Berry et al.,
17 2005): (i) quasi-Brown shape representing a transition from land to water; (ii) flat patch shape
18 denoting intermediate surface; and (iii) complex shape indicating a mixture between water and
19 vegetation (Dabo-Niang et al., 2007). In this study, we considered (quasi) specular, quasi-
20 Brown and flat-patch shapes as qualified waveform to perform reliable range measurement and
21 discard complex and non-classified shapes from further processing. We assumed that the
22 mixture of water, vegetation and or shoreline provides less accurate elevation measurements as
23 compared to the radar signal returned by water-dominated surface. Some examples of actual
24 waveforms that classified into “Brown-like”, specular, flat-patch, as well as complex and non-
25 classified shapes are presented in Figure 3 panel A, B, C and D respectively. In practice, we
26 displayed the standard waveform shapes (Brown-like, specular, flat-patch) with another
27 window showing waveform shapes from each measurements along with their IDs. Then we
28 noted down the IDs of measurements that matched waveform shapes for further processing. It
29 is interesting that in order to select the most appropriate waveforms that are less contaminated
30 by land surface, another study was offering highest weight for waveforms originated by water
31 surface and assigned a lower weight for waveforms reflected by other land surface
32 (Michailovsky et al., 2012). Operationally, the implementation of straightforward waveform

1 shape qualification as presented in this study offer slightly more efficient waveform processing,
 2 especially when the algorithm for waveform geometry processing can be developed.

3 **3.5 Outlier Removal, Validation and Performance Evaluation**

4 Although the altimetry measurements that carry non-qualified waveform shapes were excluded,
 5 some measurements remained far beyond the mean and median values. In order to obtain a
 6 dataset with minimum influences from outliers, we excluded mild outliers – defined as any
 7 values outside of the the 1.5 times of the inter-quartile-range (IQR) (Kenney and Keeping, 1947;
 8 Panik, 2012). *IQR* is defined as the range between the 25% quartile value ($Q_{0.25}$) and 75%
 9 quartile value ($Q_{0.75}$). If we denoted WSE_{min} and WSE_{max} as the minimum and maximum
 10 water surface elevation from the Envisat radar altimetry, respectively, then:

$$IQR = Q_{0.75} - Q_{0.25} \quad \text{Therefore } WSE_{min} = Q_{0.25} - 1.5 \times IQR \quad (1)$$

$$WSE_{max} = Q_{0.75} + 1.5 \times IQR$$

11 Consequently, we discarded any measurements below the WSE_{min} and above the WSE_{max}
 12 threshold in the further processing.

13 We used root-mean-square error (RMSE) and the coefficient of correlation (r) as measures of
 14 performance (or validation) between satellite altimetry water level measurements and the
 15 virtual stations where in-situ measurements were available. The RMSE is a measure of how
 16 close the estimated measures from the “truth” values. It is defined as (e.g. Nagler, 2004 and Li,
 17 2010):

$$RMSE = \sqrt{\sum_{i=1}^n \frac{(x_i - y_i)^2}{n}} \quad \text{where:} \quad (2)$$

x_i is the Envisat water level anomaly
 y_i is the *in-situ* measured water level anomaly

18 The Pearson correlation coefficient is the standard measure of association for continuous type
 19 of data (deSa, 2007). Therefore, we used it to measure the association between satellite
 20 altimetry and in-situ water level measurements as described in the following equation.

$$r = \frac{S_{xy}}{S_x S_y} \quad \text{with} \quad S_{xy} = \sum_{i=1}^n \frac{(x_i - \bar{x})(y_i - \bar{y})}{(n - 1)} \quad (3)$$

21 With S_x and S_y are variances for each sample and n is the number of observations. The
 22 correlation coefficient (r) value falls within the interval [-1, 1], where coefficient of 0 indicates

1 no correlation between two measurements, +1 indicates total correlation in the same direction
2 (proportional relationship) and -1 indicates total correlation in the opposite direction (inverse
3 relationship).

4 In order to provide a comprehensive understanding on the data processing sequences in this
5 study, Fig. 4 shows each data processing step and their relationship.

6

7 **4 Results and Discussion**

8 **4.1 Mahakam and Karangmumus River**

9 Table 1 shows that most of the radar pulse returns from both small-sized river (40-200 m width)
10 and medium-sized river (200-800 m width) produced qualified waveforms to infer water level
11 fluctuation. The percentage of qualified waveforms relative to all measurements within the
12 water bodies were high (90-97%) even for a small river at virtual station UM03 (river width 54
13 m). Interestingly, there were more missing cycles – regular satellite repeat schedule without
14 available measurements within the water bodies – in the smaller river (UM03 site) than in the
15 wider rivers (Melak01 and Melak02 sites).

16 For the water level measurements at Melak, we combined two virtual stations (i.e. Melak01 and
17 Melak02) since they were just separated by 14–40 km distance and there was no drastic change
18 in terrain and configuration of the channel (e.g. no reservoir or steep gradient) based on the
19 topographic map and digital elevation model. Having two different satellite tracks nearby in
20 fact increased the spatial and temporal sampling intensity for this location. Fig. 5 shows the
21 location of the Ministry of Public Works' gage station, which was right in between these two
22 virtual stations. Fig. 5 also indicates dynamic channel morphology in this area. The channel
23 was heavily meandering just before and along the virtual station Melak01, which then changed
24 into 13 km straight channel along the heavily populated Melak Town before it was back into
25 lightly meandering channel. Fig. 6 shows the combined water level anomaly from the two
26 virtual stations, along with the water level anomaly observed by the gage station for the period
27 of 2002-2004.

28 To facilitate visual investigation, we presented scatter plots between water level anomaly
29 obtained from gage measurements and those derived from the 4 different retracking algorithms
30 We found that Ice-1 was not the best retracking algorithm for inland water body elevation

1 measurement (Table 2),. Sea Ice retracking algorithm outperformed the other 3 standard
2 retrackers (Table 2). With the correlation coefficient of up to 0.97, satellite radar altimetry was
3 a more suitable alternative for monitoring of the medium-sized river (200-800 m width), even
4 for poorly-gauged basin such as the Mahakam Watershed. Compared to other studies, the
5 magnitude of root-mean-square error (RMSE) from our study (i.e. 0.69) was just about the
6 average RMSE obtained from other studies that deal with medium sized rivers (200-800 m
7 width) (Table 3).

8 It is important to note that we did not adjust the magnitude of the satellite altimetry range
9 measurements in any way. Aside from the spatial selection of the range measurements with the
10 projected nadir footprint center within the water body and the removal of outliers, the only
11 manipulation we performed was selecting the range measurements based on its waveform shape
12 to strictly follow the standard waveform shape for inland water body as described in the
13 previous studies (Koblinsky et al, 1993; Birkett, 1988; Berry et al, 2005; Dabo-Niang et al,
14 2007). Therefore, there are several possibilities for improvement to increase the accuracy of the
15 satellite altimetry measurement of river water level, especially for this study area. For examples
16 are the use of other altimetry missions (e.g. Jason-1, ICESat), more detailed evaluation of
17 retracked water elevation within a cycle and including the actual river slope into the processing.

18 In this study, we found that Envisat altimetry showed a potential to observe small-sized river.
19 Satellite altimetry crossing at UM03 virtual station returned a high percentage of qualified
20 measurement even with fewer measurements within the water body (i.e. 46 over 51) compared
21 to that of other virtual stations. Figure 8 indicates the water level fluctuation at this virtual
22 station while Figure 9 shows variable gaps that existed between the measurements, with average
23 of 84 days and a maximum gap that lasted for 300 days (~10 months). This temporal gap was
24 a serious problem for hydrological applications, especially those requiring the measurement of
25 hydrological variables at short interval. Further, there was no in-situ gage station in the vicinity
26 that provided validation data for this particular virtual station (UM03). Although we could not
27 validate the water level retrievals at this location, this experiment showed the potential of
28 satellite altimetry for monitoring small rivers (40-200 m width).

29 We conducted another experiment of satellite altimetry measurement over the narrow
30 Karangmumus River (width 8-45 m). The northeast-southwest orientation of this river made it
31 difficult to find the crossing with Envisat ground tracks. However, high resolution IKONOS
32 image (1 m ground resolution) allowed detailed selection of the altimeter ground tracks that fall

1 within its narrow channel. Still, the ultra-narrow channel width seriously hampered successful
2 satellite radar altimetry measurement of this study site. After careful spatial filtering and
3 waveform shape selection procedure, we extracted only 11 water surface elevations from
4 Karangmumus River. Figure 10 depicts the location of this experiment, while Table 4
5 summarizes the qualified measurements.

6 Figure 11 shows the time series of the Karangmumus River water level anomaly during 2004-
7 2006 and it is obvious that the number of retrieved water level anomaly was very limited. In
8 addition, the in-situ measurement record from the nearest available gage stations (i.e. Pampang,
9 Muang, Gununglingai and the outlet of the Karangmumus River) were available only during
10 year 2008–2010. Therefore, we could not evaluate the performance of satellite altimetry
11 measurements over this very small river. However, this result serves as preliminary indication
12 to the range of water level magnitude in this river.

13 Presently, only few other studies indicated successful exploitation of the river with 100 m width
14 or less. Michailovsky et al., (2012) extracted 13 useful water level measurements from a river
15 with 40 m width and Kuo and Kao (2011) revealed the water level of Bajhang River in Taiwan
16 with less than 100 m width with standard deviation of error of 0.31 m.

17 We therefore urge for further exploration of satellite altimetry observation to monitor small
18 rivers supported by complete validation data.

19 To conclude this section, we demonstrated that medium size rivers as narrow as 240 m can still
20 be monitored and validated, given the water surface boundary was accurately identified. This
21 result expands the capability of the satellite altimetry, since previous studies showed that 1 km
22 seems to be the ideal width to expect typical altimetry radar returns from the water surface
23 (Birkett, 1998, Birkett et al., 2002). We also emphasize that successful retrieval of qualified
24 satellite radar altimetry measurement in this research was very much supported by detailed
25 geographic masking, which carefully excluded all altimetry measurements with projected nadir
26 position outside of the water bodies.

27 **4.2 Lake Matano and Lake Towuti**

28 Inland water has been known to produce different, sometimes irregular, waveform shapes and
29 pattern as compared to that of the ocean. In particular is the difference with respect to their
30 responses to radar pulse signal transmitted by satellite based active sensor. Some examples of
31 distinguished waveform shapes from Lake Matano and Lake Towuti at different buffer

1 distances from the lakeshore are presented in Fig. 12. Our findings indicated that the waveform
2 shapes resulted from satellite altimetry measurement over the lakes had more variability
3 compared to those over the small to medium-sized rivers. We suspect this was due to the fact
4 that lakes possess larger extent of water surface and much more influenced by wind that may
5 develop wave with some height. Fig. 12 shows the typical ocean-like, multi and low peaks,
6 gradually rising and many other kinds of irregular patterns that were not present in the dataset
7 from small and medium-sized rivers. Up to now, a systematic and verified classification of
8 waveform shapes especially for inland waters does not exist, except the early development such
9 as presented by Dabo-Niang et al. (2007). Hence is the need to further study this subject.

10 Table 5 summarizes the results of satellite altimetry waveform selection over Lake Matano and
11 Lake Towuti. Similar to the result of satellite altimetry measurements for small to medium-
12 sized river in the previous section, most of the radar pulse returns produced qualified waveforms
13 that were subsequently used to compute water level anomaly at these two lakes. Our findings
14 suggested that separation distance from the lakeshore did not significantly affect the number of
15 qualified waveforms. For instance, the percentage of qualified waveforms for the lake surface
16 with distance from the lakeshore of more than 1 km in Lake Matano and Lake Towuti was
17 lower than those closer to the lakeshore (Table 5). This complex result calls for further
18 investigation in the field of satellite altimetry application for small and medium lakes in the
19 tropics, given the fact that the land cover does not always influence the shapes of the returned
20 altimeter waveform.

21 Upon the completion of waveform sorting, we processed the range measurements performed
22 by Ocean, Ice-1, Ice-2 and Sea Ice retracers and evaluated against observed water level from
23 in-situ gage station. Fig. 13 and 14 show the satellite altimetry and in-situ measured water level
24 anomaly at Lake Matano and Lake Towuti. These plots visually indicate that the satellite
25 altimetry-observed water level anomalies closely matched the in-situ gaged water level
26 anomaly. From Figs. 13 and 14, we estimated the range of water level anomaly at Lake Matano
27 to be in the magnitude of 1.2 m, while that of Lake Towuti only ranged in the magnitude of 1.4
28 m. Figs. 15 and 16 show the correlation between the Envisat radar altimeter measurements as
29 processed by Ocean, Ice-1, Ice-2 and Sea Ice retracers with the gage measured water level
30 anomaly for Lake Matano and Lake Towuti, respectively.

31 In terms of performance, Envisat radar altimetry measurements over Lake Matano and Lake
32 Towuti performed equally well, as reflected by the lowest RMS error obtained by the best

1 retracker for each lakes (0.21, see Table 6). Based on the performance evaluation (Table 6), our
2 results could not verify the hypothesis that shorter distance to lakeshore was associated with
3 lower accuracy of satellite altimetry measurement. The satellite altimetry measurements of
4 water level anomaly over Lake Matano indicated better accuracy (lower RMSE and higher
5 correlation coefficient) with as distance between altimeter footprint and the lake shore
6 increased; whereas measurements over Lake Towuti showed the opposite (see Figs. 17 and
7 18). This inconclusive results further suggest the use of sample classification based on the
8 distance to the lakeshore for future investigation,.

9 Inter-comparison between the available retrackerers (i.e. Ocean, Ice-1, Ice-2 and Sea Ice) also
10 cannot convincingly suggest any single retracker to infer water level of the small lakes, since
11 Ocean retracker surprisingly performed best for Lake Matano, while Ice-1 retracker performed
12 best for Lake Towuti. An important conclusion from this study is that Ice-1 is not necessarily
13 the best retracker to measure water level anomaly over small to medium lakes.

14 The best RMS error obtained from measurements of water level anomaly in this study (0.21 m
15 at both Lake Matano and Lake Towuti) was quite close to the lowest RMSE in other similar
16 studies (e.g. Coe and Birkett, 2004; Munyaneza et.al., 2009; Cai and Ji, 2009). Table 7 states
17 that satellite altimetry measurements over small lakes produced RMS error magnitude in the
18 range of 30 to 50 cm, as compared to large lakes that produced RMS error as low as 3 cm. Lake
19 Matano is in fact the smallest among all lakes listed in Table 7.

20 **5 Conclusions**

21 In this study we demonstrated the capability of satellite altimetry monitor the water level of
22 medium-sized (200–800 m width) rivers in the Southeast Asia’s humid tropics with high
23 accuracy (correlation coefficient of 0.97 and RMS error of 0.685 m). Despite its performance
24 variability, water level anomaly inferred by Envisat radar altimetry through standard waveform
25 retracking method was validated in this study. This results thus confirmed its capability to
26 monitor water level fluctuations in medium rivers. In addition to the medium-sized rivers, we
27 found that small rivers (40–200 m width) are *potentially* observable through satellite altimetry,
28 as indicated by high percentage of qualified range measurements that we filtered based on the
29 waveform shapes. It is important to note however, that there could possibly be a variation in
30 the measurement capability and accuracy across different regions; therefore a specific approach
31 should be developed for each region, as part of the development of permanent monitoring effort
32 in those regions.

1 In contrast to what previously found (Frappart et al. ,2006), Ice-1 is not necessarily the best
2 retracker for monitoring small water bodies, especially for the Southeast Asia humid tropics
3 area. We also found that Ocean retracker surprisingly performed best for retracking small lake
4 (i.e. Lake Matano), as well as Sea Ice for Mahakam River and Ice-1 for Lake Towuti.

5 The RMSE of satellite altimetry measurement of Lake Matano and Lake Towuti (0.21 m for
6 both locations) falls within the range of RMSE of small lakes observed by satellite altimetry
7 throughout the world (e.g. between 0.03 to 0.50 m). It is worth noting that Lake Matano is the
8 smallest water body analysed from satellite altimetry.

9 Considering the results of this study, we recommend the following: (1) in addition to the use of
10 standard retrackers, we propose the selection of altimetry measurements based on the waveform
11 shape to filter out returned radar signals contaminated by non-water surface. We recommend
12 the selection to strictly follow the standard waveform shape for inland water body (Koblinsky
13 1993, Birkett 1998, Berry et al, 2005, Dabo-Niang et al, 2007), especially for studies involving
14 small (40-200 m width) to medium rivers (200-800 m width), as well as small lake (e.g. those
15 with extent less than 1000 km²), and (2) over lakes, we do not recommend to analyse the
16 performance of the satellite altimetry retrackers based on the distance from the satellite
17 altimetry measurements to the lakeshore.

18 Lastly, we found that geographic orientation of the river affected the application of satellite
19 altimetry for monitoring small rivers. For instance, small (40-200 m width) and medium-sized
20 (200-800 m width) river with north-south orientation suffered from the satellite altimetry orbit
21 deviation, which ranges from ± 1 km relative to its theoretical orbit.

22

23 **Acknowledgements**

24 This research was primarily supported by the Fulbright PhD Presidential Scholarship
25 administered by American Indonesian Exchange Foundation (AMINEF) and the Institute for
26 International Education (IIE). In addition, this study was partially funded by grants from
27 NASA's Application Science Program under the SERVIR project (NNX12AM85G), and by
28 the Chinese Academy of Sciences/SAFEA International Partnership Program for Creative
29 Research Teams (Grant No. KZZD-EW-TZ-05). The authors greatly appreciate the Ministry of
30 Public Works of Republic of Indonesia and PT Vale Indonesia, Tbk for providing in-situ water
31 level data used in this research. The first author is supported by an appointment to the NASA

1 Postdoctoral Program at the NASA Goddard Space Flight Center, administered by Oak Ridge
2 Associated Universities through a contract with NASA. We thank the editor: Paola Passalacqua,
3 anonymous referees and Radina Soebiyanto for their help in improving this manuscript.

4

1 **References**

- 2 Alsdorf, D.E. and Lettenmaier, D.P.: Tracking fresh water from space, *Science*, 301, 1491-
3 1494, 2003.
- 4 Bamber, J.L.: Ice sheet altimeter processing scheme, *Int. J. Remote Sens.*, 15, 925-938, 1994.
- 5 Bao, L., Lu, Y., and Wang, Y.: Improved retracking algorithm for oceanic altimeter waveforms,
6 *Prog. Nat. Sci.*, 19, 195-203, 2009.
- 7 Benveniste, J. and Defrenne, D.: Radar Altimetry Processing for Inland Waters: Introduction
8 and Background Review, Slides presented at Workshop on Hydrology from Space,
9 Toulouse, 29 September-1 October 2003, 2003.
- 10 Berry, P. A. M., Garlick, J. D., Freeman, J. A., and Mathers, E. L.: Global inland water
11 monitoring from multi-mission altimetry, *Geophys. Res. Lett.*, 32, L16401 (DOI
12 10.1029/2005GLO22814), 2005.
- 13 Birkett, C.M: Contribution of the TOPEX NASA radar altimeter to the global monitoring of
14 large rivers and wetlands, *Water Resour. Res.*, 34, 1223-1239, 1998.
- 15 Birkett, C. M., Mertes, L. A. K., Dunne, T., Costa, M. H., and Jasinski, M. J.: Surface water
16 dynamics in the Amazon Basin: application of satellite radar altimetry, *J. Geophys. Res.*,
17 107, LBA26 (DOI 10.1029/2001JD000609), 2002.
- 18 Brown, O. B. and Cheney, R. E.: Advances in satellite oceanography, *Rev. Geophys.*, 21 (5):
19 1216-1230, 1983.
- 20 Calmant, S. and Seyler, F.: Continental surface waters from satellite altimetry, internal
21 geophysics (space physics), *C.R. Geoscience*, 338, 1113-1122, 2006.
- 22 Cretaux, J.-F., Jelinski, W., Calmant, S., Kouraev, A., Vuglinski, V., Berge-Nguyen, M.,
23 Gennero, M.-C., Nino, F., Abarca Del Rio, R., Cazenave, A., and Maisongrande, P.:
24 SOLS: A lake database to monitor in the near real time water level and storage variations
25 from remote sensing data, *Adv. Space Res.*, 47, 1497-1507, 2011.
- 26 Cristescu, M. E., Adamowicz, S. J., Vaillant, J. J., and Haffner, D. G.: Ancient lakes revisited:
27 from the ecology to the genetics of speciation, *Mol. Ecol.*, 19, 4837–4851 (doi:
28 10.1111/j.1365-294X.2010.04832.x), 2010.

- 1 Dabo-Niang, S., Ferraty, F., and Vieu, P.: On the using of modal curves for radar waveforms
2 classification, *Computational Statistics and Data Analysis*, 51, 4878-4890, 2007.
- 3 Davis, C.H: A robust threshold retracking algorithm for measuring ice-sheet surface elevation
4 change from satellite radar altimeters, *IEEE T. Geosci. Remote*, 35, 974-979, 1997.
- 5 De Sa, J.P.M: *Applied Statistics using SPSS, Statistica, MATLAB and R*, Springer-Verlag,
6 Berlin, Heidelberg, ISBN 978-3-540-71971-7, 2007.
- 7 Deng, X., and W. E. Featherstone (2006), A coastal retracking system for satellite radar
8 altimeter waveforms: Application to ERS-2 around Australia, *J. Geophys. Res.*, 111,
9 C06012, doi:10.1029/2005JC003039. 2006
- 10 Estiaty, L.M., Susilowati, Y., Harsono, E., and Tjiptasamara, T.: *Pemodelan Spasial Fluks*
11 *Polutan pada Sistem Daerah Aliran Sungai dan Angkutan Polutan pada Sistem Sungai,*
12 *Studi Kasus: DAS Mahakam, Pusat Penelitian Geoteknologi, Lembaga Ilmu*
13 *Pengetahuan Indonesia, 2007 (in Indonesian).*
- 14 European Space Agency (ESA): *Envisat RA2/MWR Product Handbook*, European Space
15 Agency, 27 February 2007, 2007.
- 16 European Space Agency (ESA): *Envisat RA-2/MWR Level 2 User Manual*, Envisat Altimetry
17 Quality Working Group, Ver. 1.4, 8 September 2011, 2011.
- 18 Fenoglio-Marc, L., Fehlaui, M., Ferri, L., Becker, M., Gao, Y., and Vignudelli, S.: Coastal sea
19 surface heights from improved altimeter data in the Mediterranean Sea, *Proceedings*
20 *GGEO2008*, Springer Verlag, IAG Symposia, 2009.
- 21 Frappart, F., Do Minh, K., L'Hermitte, J., Cazenave, A., Ramillien, G., Le Toan, T., and
22 Mognard-Campbell, N.: Water volume change in the lower Mekong from satellite
23 altimetry and imagery data, *Geophys. J. Int.*, 167, 570-584, 2006.
- 24 Fu, L.-L. and Cazenave, A.: *Satellite altimetry and Earth sciences: a handbook of techniques*
25 *and applications*, Academic Press, San Diego, 2001.
- 26 Haryani, G.S. and Hehanussa, P.E.: *Pendekatan Ekohidrologi, Paradigma Baru Implementasi*
27 *Penataan Ruang untuk Pengelolaan Danau dan Waduk, Semiloka Nasional Pengelolaan*
28 *dan Pemanfaatan Danau dan Waduk*, Bogor, 1999 (in Indonesian).
- 29 Herdendorf, C.E.: Large Lakes of the World, *J. Great Lakes Res.*, 8, 379-412, 1982.

- 1 Hwang, C., Guo, J.Y., Deng, X.L., Hsu, H.Y., and Liu, Y.T: Coastal gravity anomalies from
2 retracked Geosat/GM altimetry: improvement, limitation and the role of airborne
3 gravity data, *J. Geod.*, 80, 204-216, 2006.
- 4 Koblinsky, C.J., Clarke, R.T., Brenner, C.A., and Frey, H.: Measurement of river water levels
5 with satellite altimetry, *Water Resour. Res.*, 29, 1839-1848, 1993.
- 6 Kouraev, A.V., Zakharova, E.A., Samain, O., Mognard, N.M., and Cazenave, A.: Ob' river
7 discharge from TOPEX/Poseidon satellite altimetry (1992-2002), *Remote Sens.*
8 *Environ.*, 93, 238-245, 2004.
- 9 Kuo, C.-Y. and Kao, H.-C.: Retracked Jason-2 altimetry over small water bodies: case study of
10 Bajhang River, Taiwan, *Mar. Geod.*, 34, 382-392, 2011.
- 11 Lee, H.: Radar altimetry methods for solid earth geodynamics studies, Ph.D. thesis, School of
12 Earth Sciences, The Ohio State University, Columbus, Ohio, 2008.
- 13 Li, Y.: Root Mean Square Error, in: *Encyclopedia of Research Design*, edited by: Salkind, N.J.,
14 SAGE Publications Inc., Thousand Oaks, CA, 1288-1289, 2010.
- 15 McKinnon, K., Hatta, G., Halim, H., and Mangalik, A.: *The Ecology of Kalimantan: Indonesian*
16 *Borneo, The Ecology of Indonesia Series, Vol. 3*, Singapore: Periplus, 1996.
- 17 Meybeck, M., Friedrich, G., Thomas, R., and Chapman, D. (Eds.): *Rivers*, in: *Water Quality*
18 *Assessments - a Guide to Use of Biota, Sediments and Water in Environmental*
19 *Monitoring*, 2nd Edn., UNESCO/WHO/UNEP. 1992, 1996.
- 20 Michailovsky, C.I., McEnnis, S., Berry, P.A.M., Smith, R., and Bauer-Gottwein, P.: River
21 monitoring from satellite radar altimetry in the Zambezi River basin, *Hydrol. Earth Syst.*
22 *Sci.*, 16, 2181-2192, DOI:10.5194/hess-16-2181-2012, 2012.
- 23 Morris, C.S. and Gill, S.K.: Evaluation of the TOPEX/POSEIDON altimeter system over the
24 Great Lakes, *J. Geophys. Res.*, 99, 24527-24539, 1994.
- 25 Nagler, J.: Root Mean Square, in: *The SAGE Encyclopedia of Social Science Research*
26 *Methods*, edited by: Lewis-Beck, M.S., Bryman, A. and Liao, T.F., SAGE Publications,
27 Inc., Thousand Oaks, CA: 978-79. 2004. doi:
28 <http://dx.doi.org/10.4135/9781412950589.n871>.
- 29 Panik, M.J.: *Statistical Inference: a Short Course*, John Wiley & Sons, Hoboken, 2012.

- 1 Rees, G.: Physical Principles of Remote Sensing, Cambridge University Press, Cambridge,
2 England, 1990.
- 3 Russel, J. and Bijaksana, S.: The Towuti Drilling Project: paleoenvironments, biological
4 evolution, and geomicrobiology of a tropical lake, *Scientific Drilling*, 14, 68-71,
5 doi:10.2204/iodp.sd.14.11.2012, 2012.
- 6 Sarmiento, S.E., and Khan, S.D.: "Spatial-Temporal Variability of Great Slave Lake Levels
7 From Satellite Altimetry." *IEEE Geosci. Rem. Sens. Letters* 7, no. 3 (July 2010): 426–
8 29. doi:10.1109/LGRS.2009.2038178, 2010.
- 9 Tang, Q., Gao, H., Lu, H., and Lettenmaier, D.: Remote sensing: hydrology, *Prog. Phys. Geogr.*,
10 33, 490-509, 2009.
- 11 Torrance and Sparrow, 1967.
- 12 Tseng, K.-H: *Satellite Altimetry and Radiometry for Inland Hydrology, Coastal Sea-Level and*
13 *Environmental Studies*, School of Earth Sciences, The Ohio State University,
14 Columbus, Ohio, 2012.
- 15 Vaillant, J.J., Haffner, G.D., and Cristescu, M.E.: The Ancient Lakes of Indonesia: towards
16 Integrated Research on Speciation, *Integr. Comp. Biol.*, 51, 634-643, 2011.
- 17 Wingham, D.J. and Rapley., C.G.: Saturation effects in the Seasat altimeter receiver, *Int. J.*
18 *Remote Sens.*, 8, 1163-1173, 1987.
- 19 Wingham, D.J., Rapley, C.G., and Griffiths, H.G.: New techniques in satellite altimeter tracking
20 systems, III IGARRS 1986 Symposium, Zurich, Proceedings, Noordwijk, ESTEC,
21 Scientific and Technical Publications Branch, 1339-1344, (ESA SP-254), 1986.
- 22

1 **Table 1** Number of qualified and non-qualified altimeter measurements and outliers for
 2 study sites at Mahakam River

Site Name	Cycles	# of Missing Cycles	Measurements in water body	Qualified Measurement		Non-qualified Measurement		# of Outlier	River width (m)
				(#)	(%)	(#)	(%)		
UM03	9 – 93	34	51	46	90.2	5	9.8	N/A	54 m
Melak01	7 – 93	8	225	220	97.8	5	2.2	8	247 m
Melak02	7 – 93	11	148	134	90.5	14	9.5	0	294 m

3

4

1 **Table 2** Performance evaluation of Envisat RA-2 radar altimetry measurements over
 2 Melak virtual stations at Mahakam River (width 247 m)

Site Name	Cycles Covered	Validated Measurement	Number of Pass	Retracker	RMSE (m)	Correlation Coefficient
Melak	7 - 33	46	2	Ocean	0.885	0.955
				Ice-1	0.720	0.962
				Ice-2	0.724	0.966
				SeaIce	0.685	0.970

3

4 **Table 3** Summary of studies on satellite radar altimetry for water level over river

Reference	Location	River Width	Satellite / Sensor	Reported Error (m)
Koblinsky et al (1993)	Amazon Basin	N/A	Geosat	STDE: 0.31-1.68 m
Birkett, et al (1998)	Amazon Basin	3-9 km	T/P	RMSE: 0.11-0.60 m
Birkett, et al (2002)	Amazon Basin	2-6 km	T/P	RMSE: 0.40-0.60 m
Kouraev et al (2004)	Ob' River	3 km	T/P	?: 8 % (Discharge)
Frappart et al (2006)	Mekong River	450 m	Envisat,	RMSE: 0.23 m
			T/P	RMSE: 0.15 m
Birkinshaw et al (2010)	Mekong River	400 m – 1.7 km	ERS-2, Envisat	RMSE: 0.44–1.24 m
Kuo and Kao (2011)	Bajhang River	100 m	Jason-2	STDE: 0.31 m
Michailovsky et al (2012)	Zambezi River	40-380 m	Envisat	RMSE: 0.27-1.07 m
This study (2013)	Mahakam River	240-279 m	Envisat	RMSE: 0.69 m

5 * STDE (Standard Deviation of Error), % (% difference), RMSE (Root Mean Square Error)

6

7

1 **Table 4** Qualified Envisat RA-2 altimetry measurements for Karangmumus River

Cycle	Date	ID	Longitude	Latitude	Water Level Anomaly*	Remarks
8	07/23/2002	KM08	117.181540	-0.404124	-0.07 m	
9	08/27/2002	KM10	117.194581	-0.408362	-4.52 m	Benanga Reservoir
13	01/13/2003	KM11	117.195384	-0.407573	2.94 m	Benanga Reservoir
23	12/30/2003	KM01	117.157190	-0.507934	-1.92 m	
23	12/30/2003	KM02	117.157910	-0.504634	-2.32 m	
28	06/22/2004	KM09	117.188367	-0.405981	3.63 m	47 m to field gage
37	05/03/2005	KM06	117.169721	-0.448573	-0.11 m	
37	05/03/2005	KM07	117.170441	-0.445263	-0.12 m	
39	07/12/2005	KM03	117.158610	-0.503317	-2.28 m	
42	10/25/2005	KM05	117.171486	-0.452076	4.12 m	
49	06/27/2006	KM04	117.159139	-0.501533	-0.93 m	

2

3 **Table 5** The number of qualified and non-qualified altimeter measurements and outliers
4 over Lake Matano and Lake Towuti

Location	Width	Cycle	Distance to Shore	Measurement Within water body	Qualified		Non-Qualified		No of Outlier
					#	%	#	%	
Lake Matano	8,159	8-79	< 500 m	453	416	91.8	37	8.2	42
			500 m – 1 km	253	215	85.0	38	15.0	26
			> 1 km	989	805	81.4	184	18.6	115

Lake	28,818	8-79	< 500 m	1314	786	59.8	528	40.2	79
Towuti			500 m – 1 km	1328	764	57.5	564	42.5	64
			> 1 km	2450	1353	54.3	1137	45.7	156

1

2 **Table 6** Performance evaluation of Envisat RA-2 radar altimetry measurements over
3 Lake Matano and Lake Towuti

Site	Lake width (m)	Cycles	Validated measurement	Re-tracker	Correlation coefficient	RMSE (m)	No / % of Outliers
Lake Matano	8,159	8 – 79					
	0 – 500 m		75	Ocean	0.214	0.981	42/387
				Ice-1	0.242	0.835	10.85%
				Ice-2	0.290	0.819	
				SeaIce	0.358	0.743	
	500 – 1000 m		71	Ocean	0.605	0.555	26/214
				Ice-1	0.538	0.624	12.15%
				Ice-2	0.723	0.458	
				SeaIce	0.745	0.417	
	> 1000 m		73	Ocean	0.692	0.493	115/805
				Ice-1	0.647	0.535	14.29%
				Ice-2	0.667	0.518	
				SeaIce	0.666	0.518	
	All		75	Ocean	0.948	0.209	183/1406
				Ice-1	0.881	0.311	13.02%
				Ice-2	0.837	0.364	
				SeaIce	0.839	0.359	

Site	Lake width (m)	Cycles	Validated measurement	Re-tracker	Correlation coefficient	RMSE (m)	No / % of Outliers
Lake Towuti	28,818	8 – 79					
	0 – 500 m		77	Ocean	0.880	0.380	79/786
				Ice-1	0.917	0.296	10.05%
				Ice-2	0.898	0.321	
				SeaIce	0.911	0.291	
	500 – 1000 m		79	Ocean	0.942	0.244	64/764
				Ice-1	0.903	0.312	8.38%
				Ice-2	0.890	0.339	
				SeaIce	0.887	0.341	
	> 1000 m		79	Ocean	0.689	0.608	156/1353
				Ice-1	0.802	0.494	11.53%
				Ice-2	0.777	0.490	
				SeaIce	0.774	0.507	
	All		80	Ocean	0.940	0.241	299/2903
				Ice-1	0.953	0.212	10.30%
				Ice-2	0.941	0.231	
				SeaIce	0.938	0.239	

1

2

1 **Table 7** Summary of studies on satellite radar altimetry for water level over lakes


Reference	Location	Lake Extent	Satellite / Sensor	Reported Error
Morris and Gill (1994a)	Superior, Ontario	Large	Geosat	RMSE: 0.09 m
	Michigan, Huron	Large	Geosat	RMSE: 0.11 m
	Erie		Geosat	RMSE: 0.13 m
	Lake St Clair		Geosat	RMSE: 0.17 m
Morris and Gill (1994b)	Great Lakes		Topex / Poseidon	RMSE: 0.03 m
Korotaev et al (2001)	Black Sea	436,402 km ²	T/P, ERS-1	RMSE: 0.03 m
Mercier et al (2002)	Victoria, Tanganyika Malawi and Turkana	131-390 x 10 ³	TOPEX / Poseidon	RMSE: 0.10 m
	Rukwa and Kyoga	75-80 x 10 ³	TOPEX / Poseidon	RMSE: 0.50 m
Coe and Birkett (2004)	Lake Chad	2.5 x 10 ⁶ km ²	TOPEX / Poseidon	RMSE: 0.21 m
Zhang et al (2006)	Dongting Lake	2,623 km ²	TOPEX / Poseidon	RMSE: 0.08 m
Medina et al (2008)	Lake Izabal	717 km ²	Envisat	RMSE: 0.09 m
Munyaneza et al (2009)	Lake Kivu	2,400 km ²	Envisat	RMSE: 0.30 m
Cai and Ji (2009)	Poyang Lake	20,290 km ²	Envisat	Mean Error: 0.31 m
Guo et al (2009)	Hulun Lake	2,339 km ²	TOPEX / Poseidon	RMSE: 0.13 m

Reference	Location	Lake Extent	Satellite / Sensor	Reported Error
Troitskaya et al (2012)	Gorki Reservoir	1,358 km ²	T/P, Jason-1	RMSE: 0.15 m
Tseng et al (2013)	Qinghai Lake	4,186 km ²	Envisat	RMSE: 0.06 m
This study	Lake Matano	164 km ²	Envisat	RMSE: 0.21 m
	Lake Towuti	562 km ²	Envisat	RMSE: 0.21 m

1 * RMSE (Root Mean Square Error)

2


3

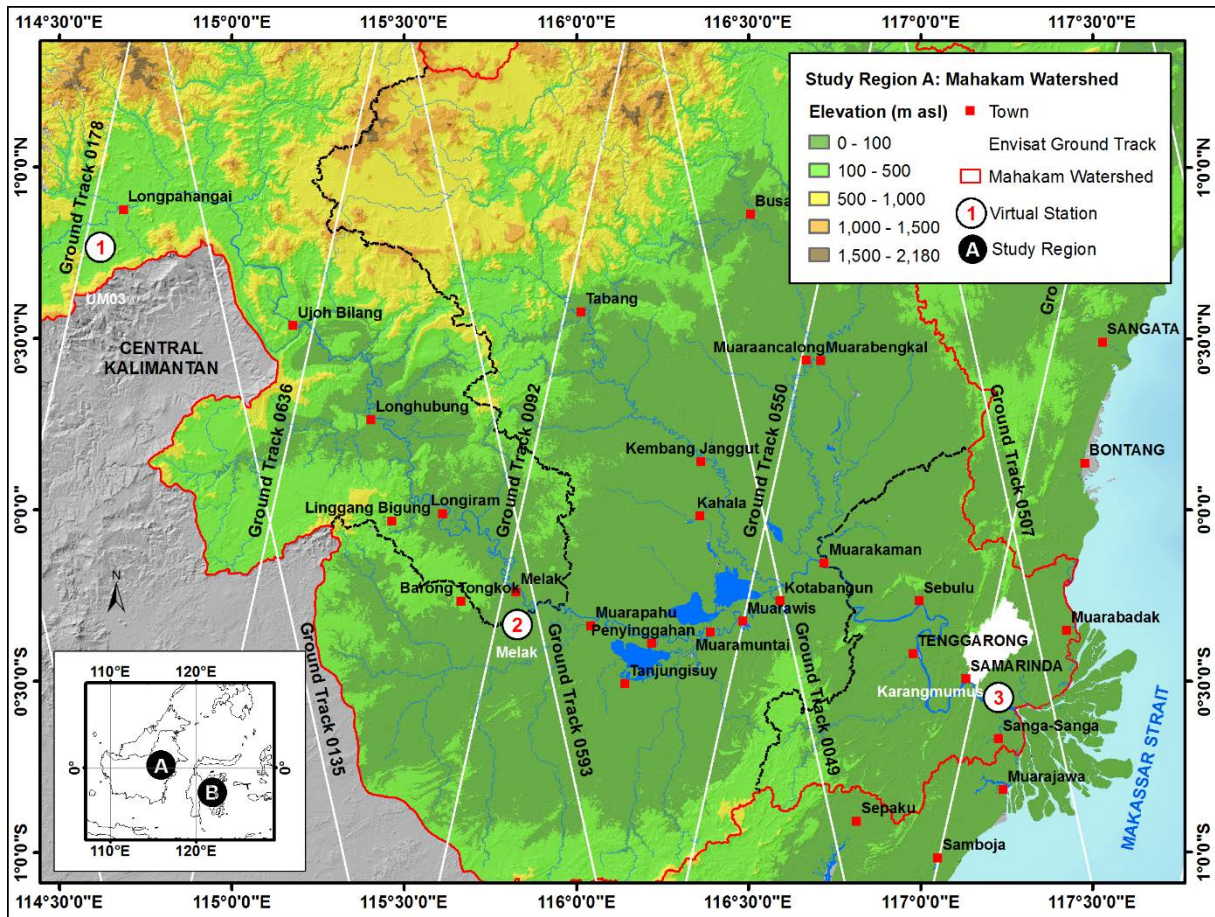

1

2 **Figure 1** Study Sites at Mahakam Watershed, East Kalimantan, Indonesia


3

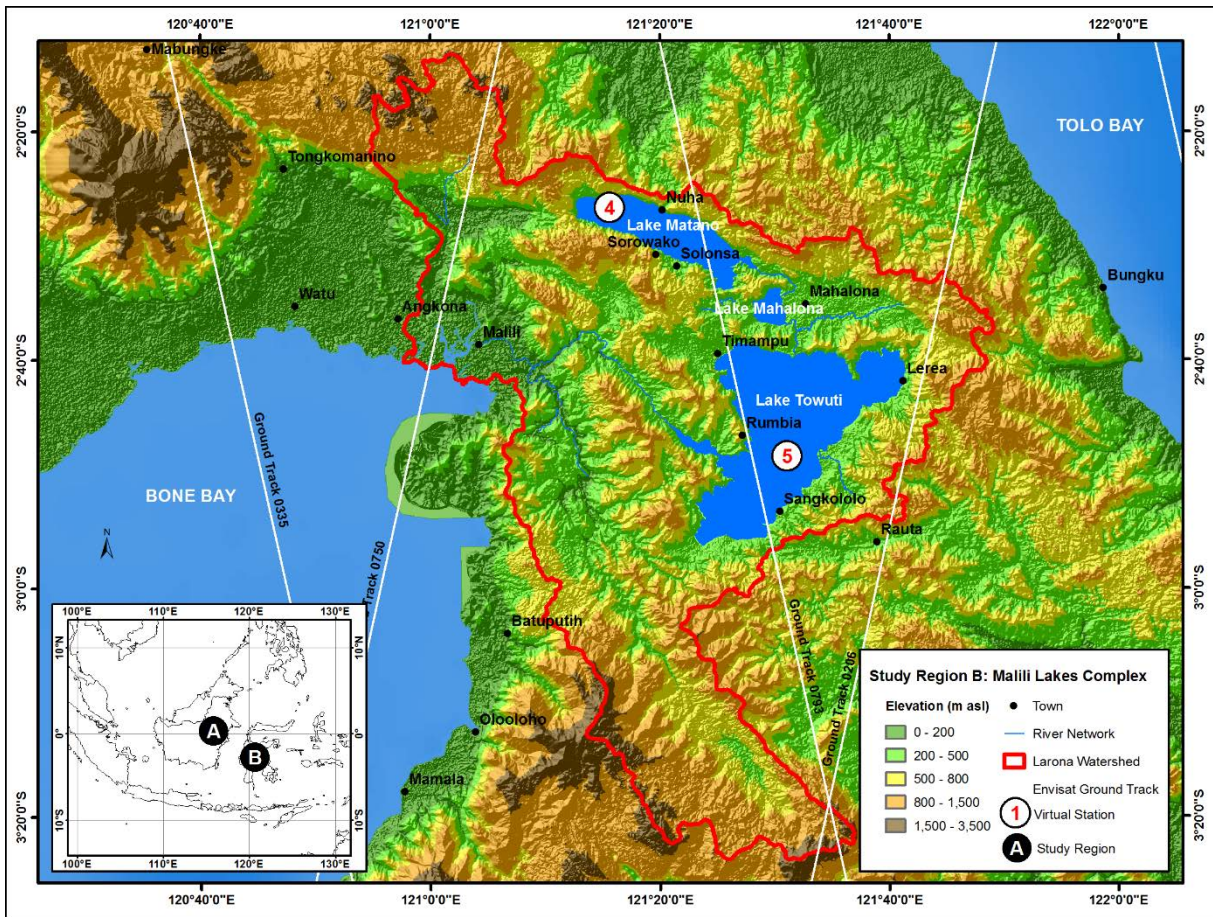


1

2 **Figure 2** Study Sites at Malili Lakes Complex, South Sulawesi, Indonesia

3

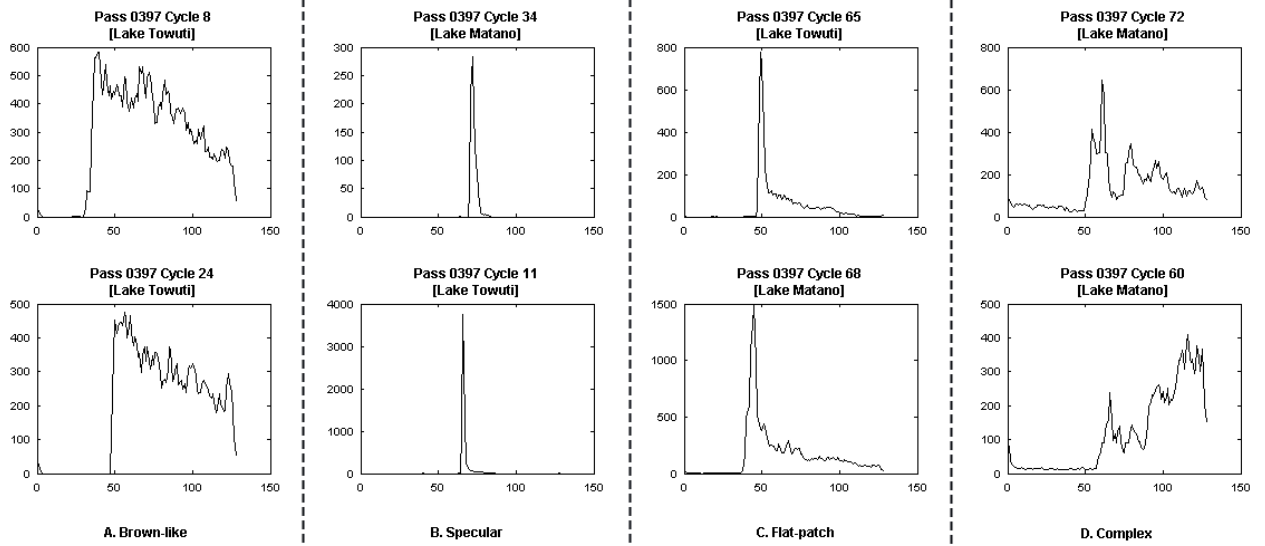

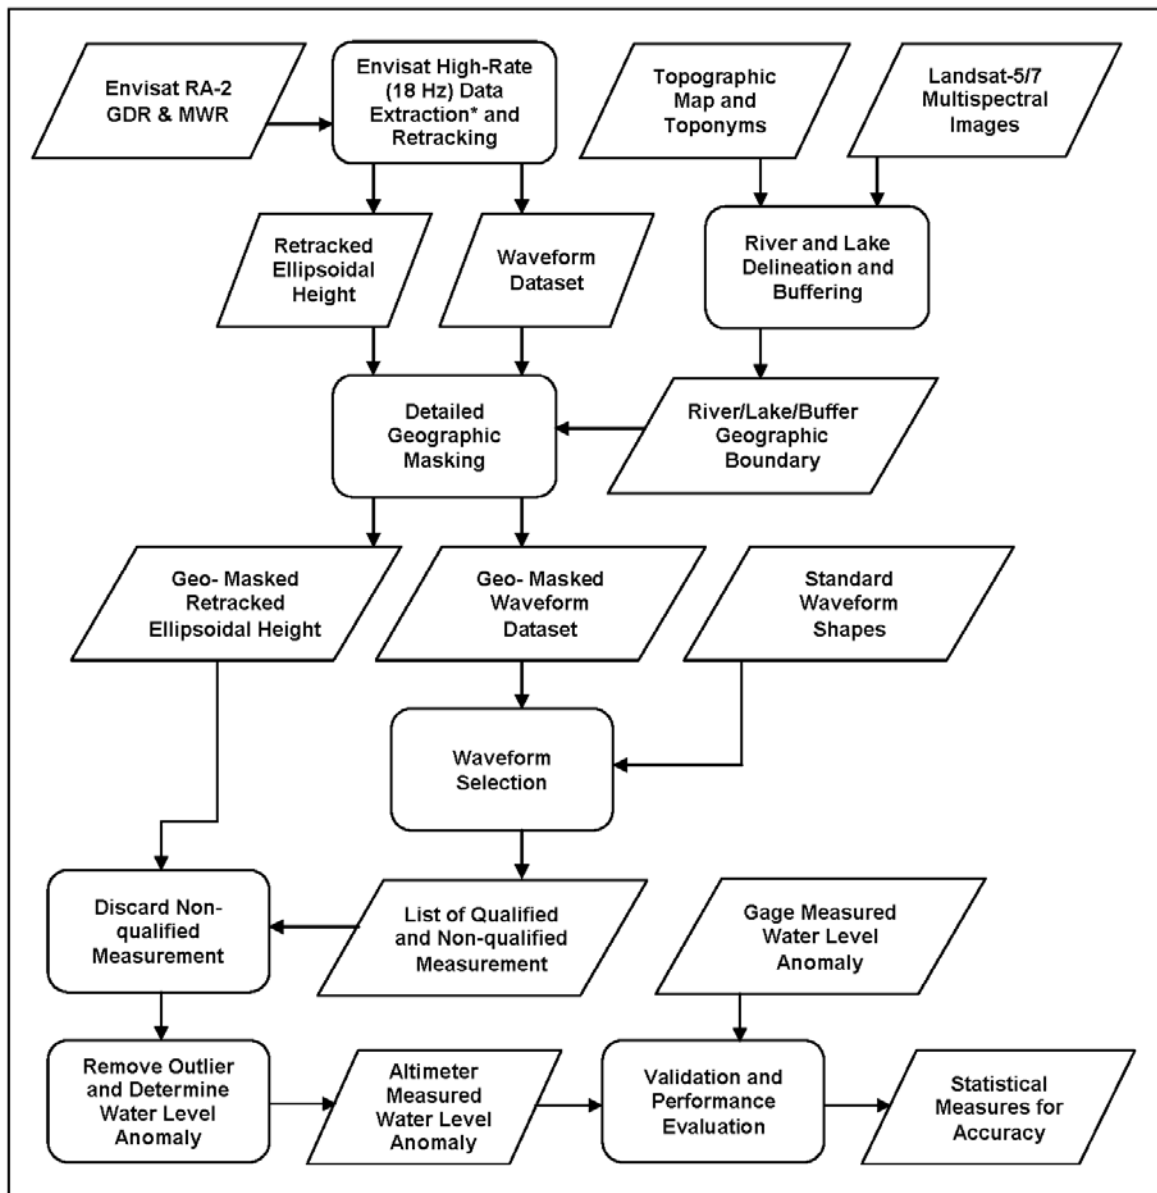


* The initial data extraction includes rough masking based on geographic boundary while ensuring all measurements are within the land

1


2 **Figure 4** Data processing workflow

3

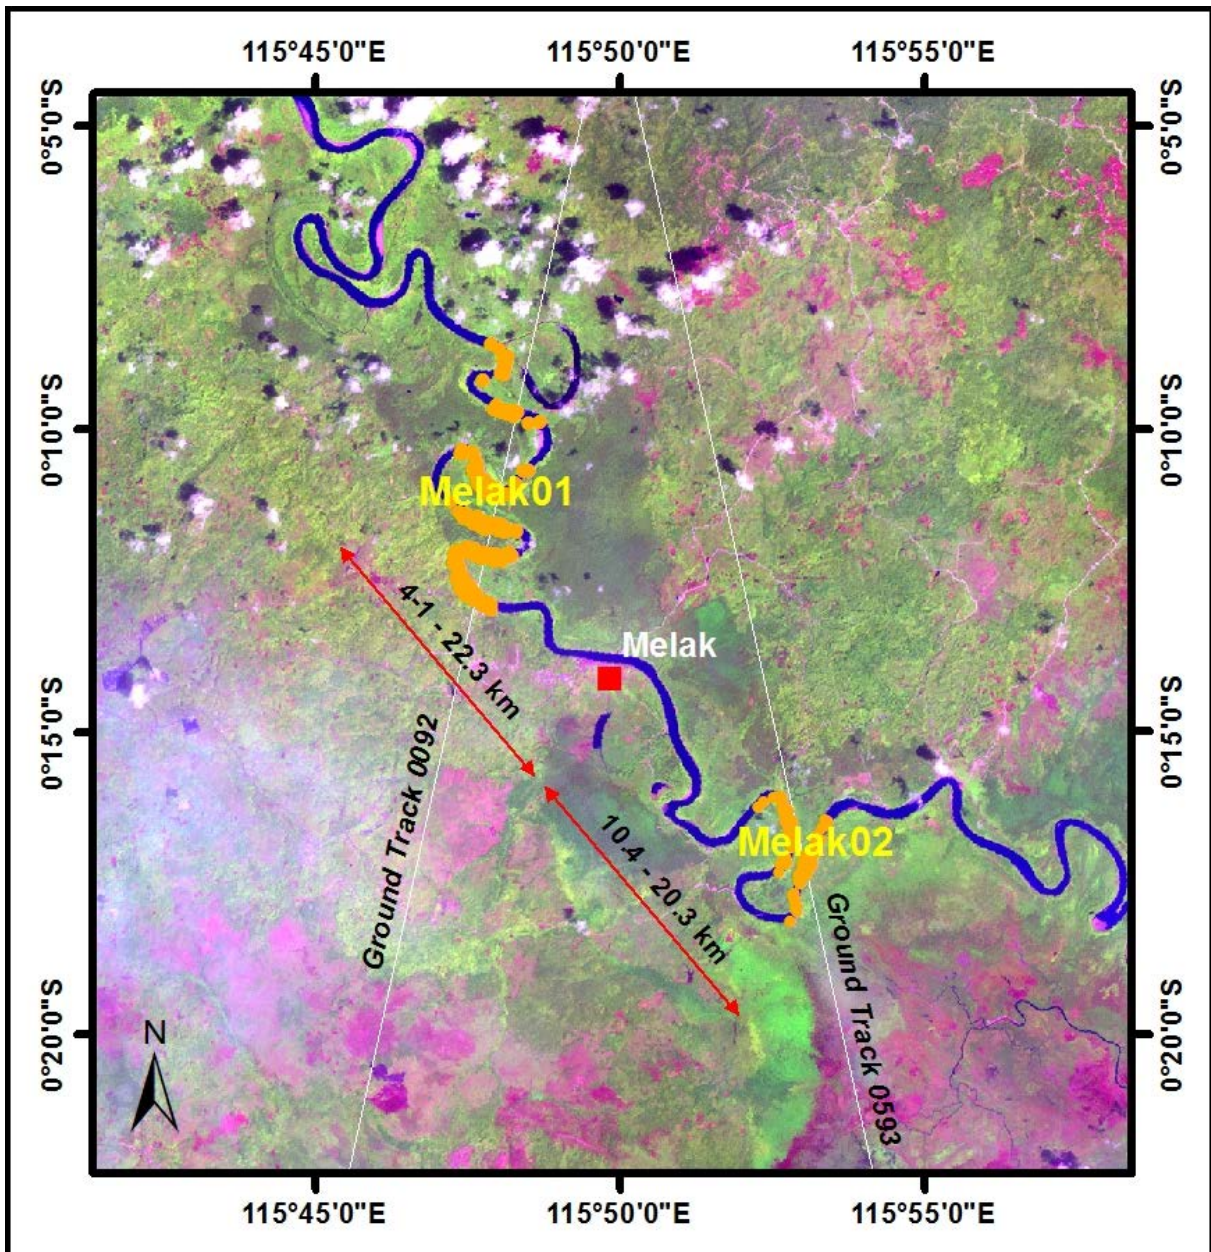

1
2
3
4


Figure 5 Location of Envisat virtual stations and in-situ water level gage stations at Melak Town

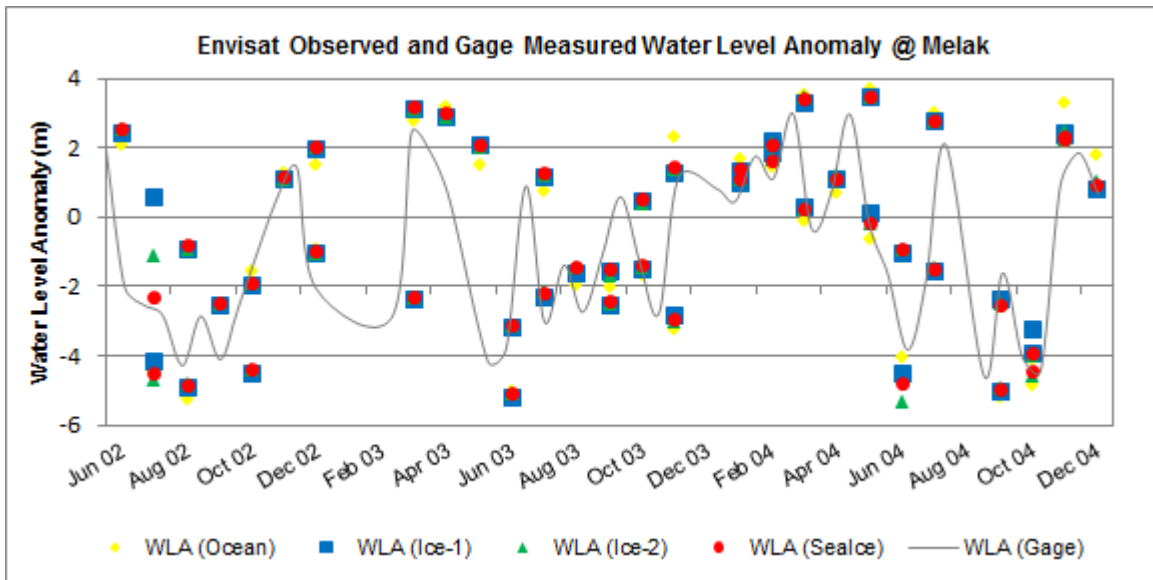

1


2 **Figure 6** Water level anomaly at Melak as observed by two Envisat passes and retracked
 3 by four retrackerers; compared with in-situ water level anomaly

4

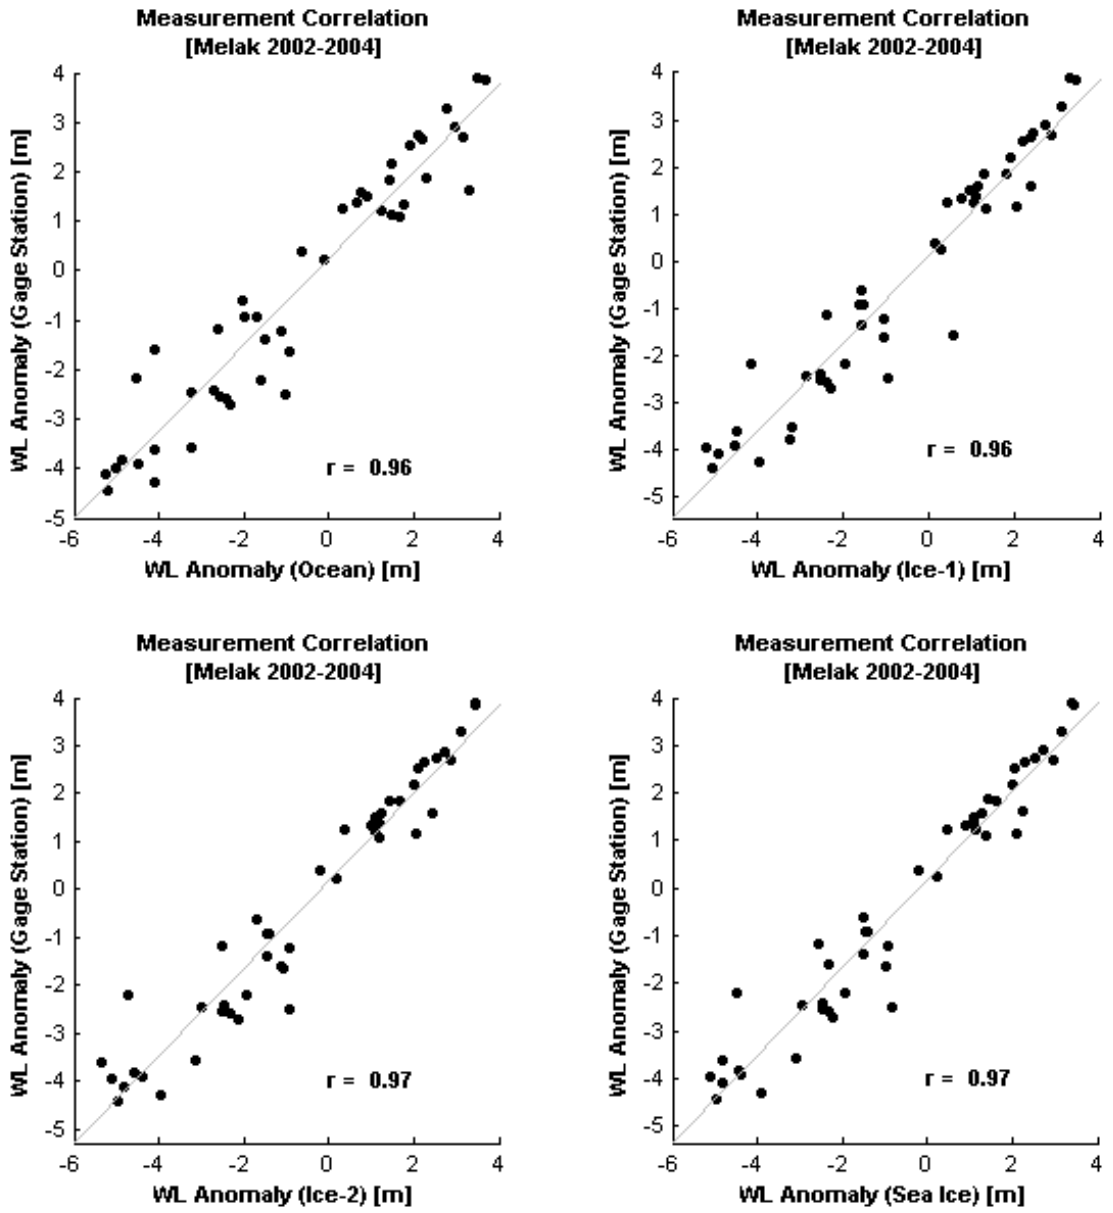


1
2
3
4
5


Figure 7 Correlation between water level anomaly measured by Envisat altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retracker and in-situ water level measurement over Melak

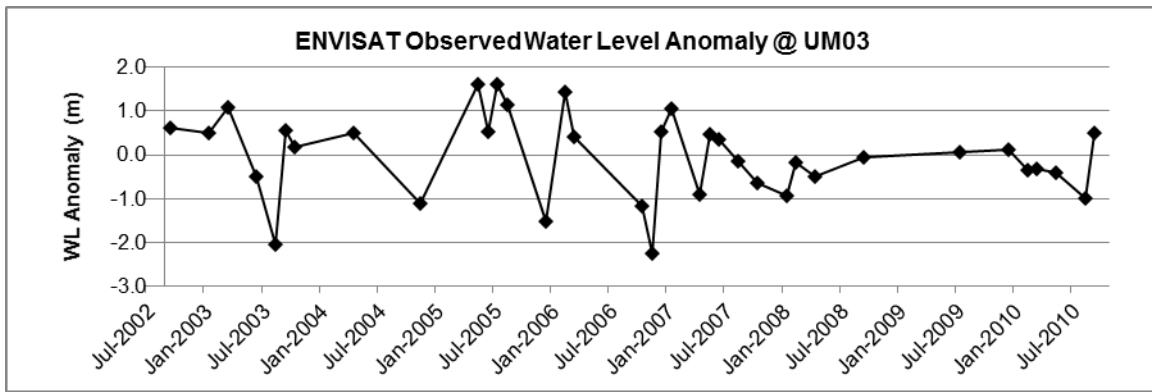


1
 2 **Figure 8** ENVISAT observed water level anomaly at site UM03 (river width 54 m) as
 3 measured by Envisat RA-2 and processed by Ice-1 retracker. Also shown is the
 4 TRMM estimated precipitation for the area

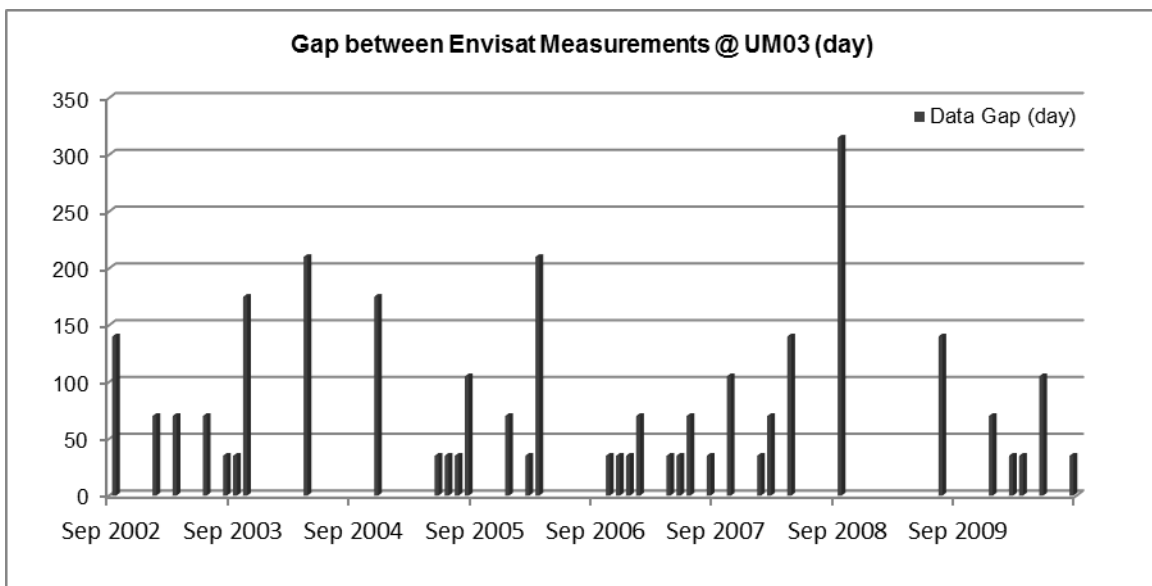


5
 6 **Figure 9** Gap between Envisat observation of water level at over site UM03
 7

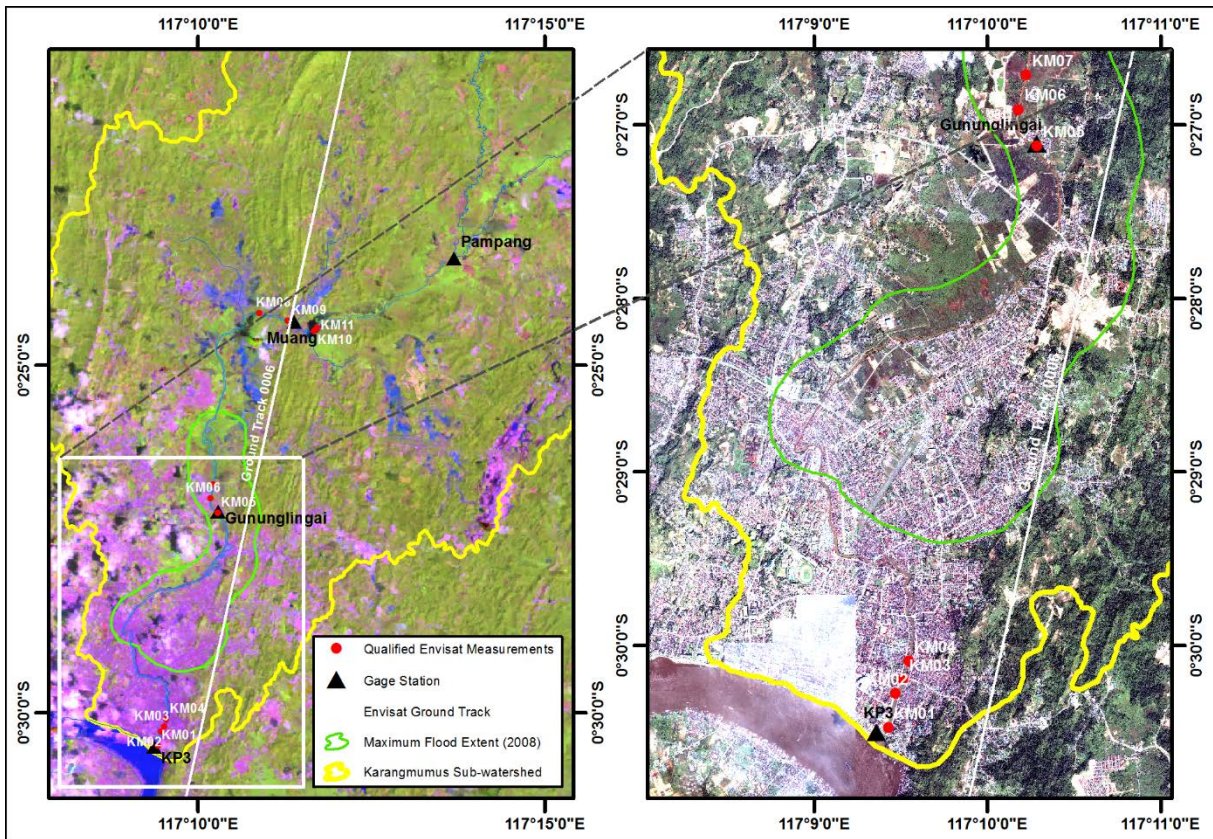

1
 2 **Figure 10** Overview of Karangmumus Sub-watershed and Envisat ground track with
 3 background of Landsat-7 image of January 2007 (left) and IKONOS of February
 4 2002 (right, in the extent of white box of the left image)

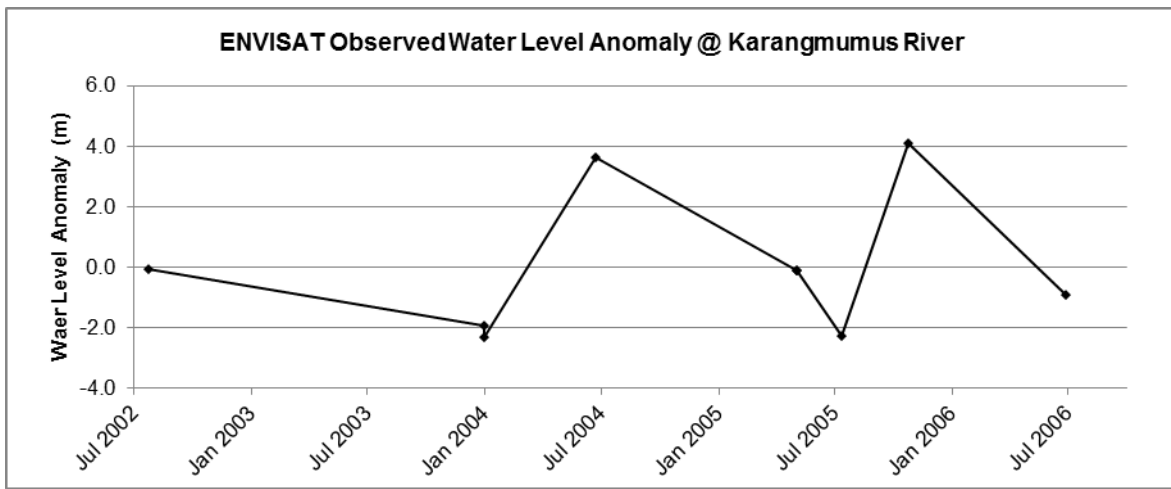


5
 6 **Figure 11** Water level anomaly of Karangmumus River from Envisat RA-2
 7

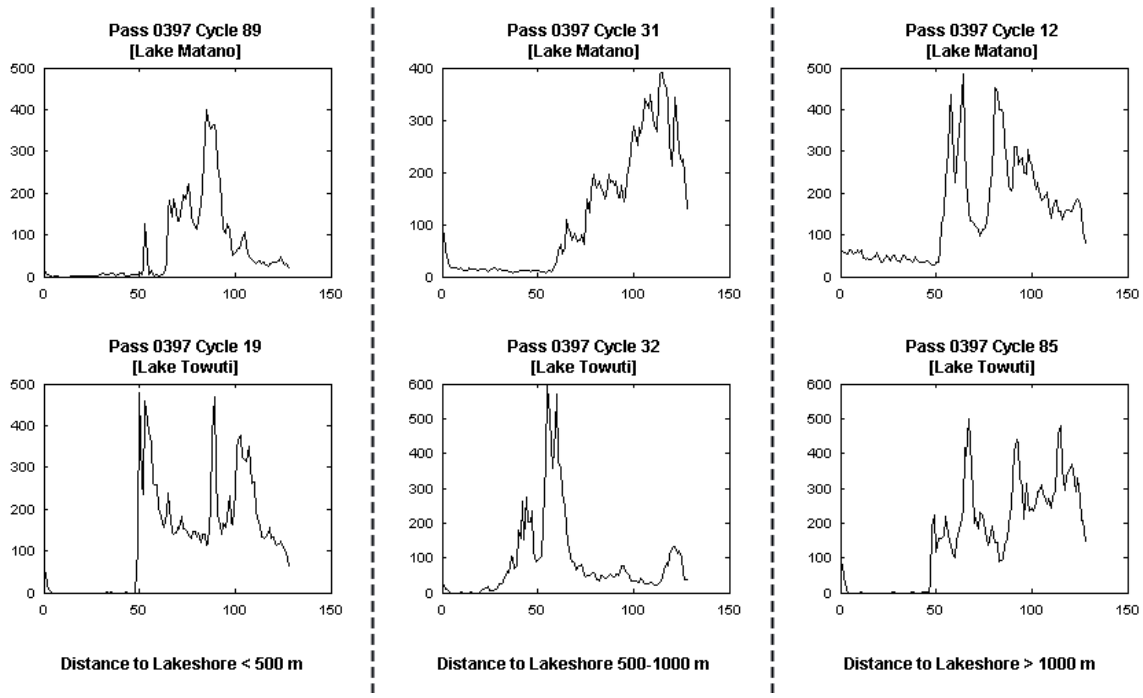


1

2 **Figure 12** Distinguished waveform shapes as reflected by Lake Matano and Lake Towuti
 3 at different buffer distances to the lakeshore

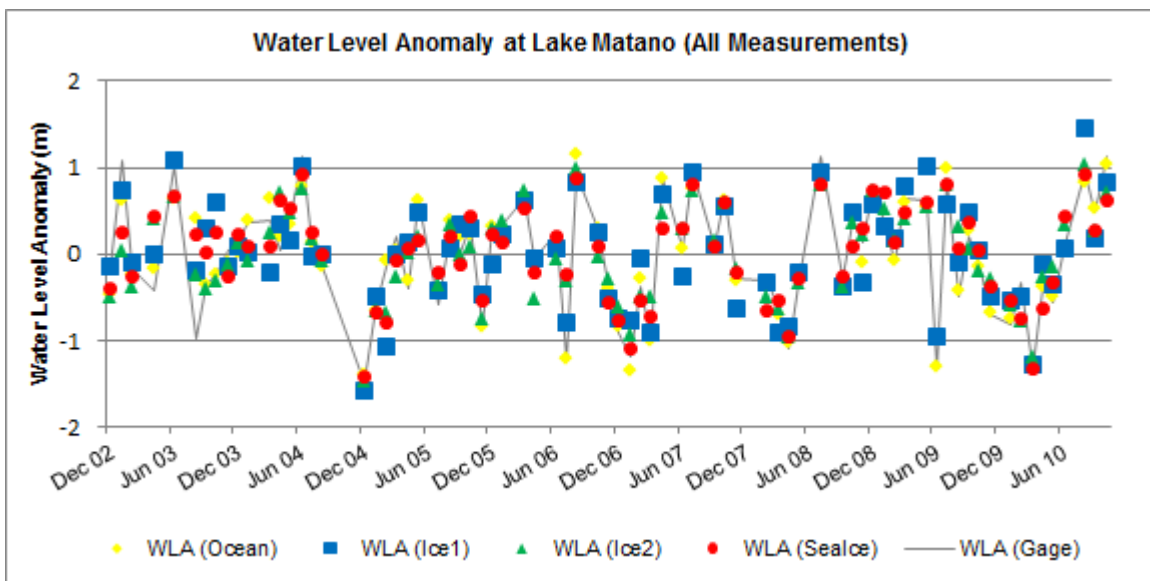

4


5 **Figure 13** Water level anomaly at Lake Matano as measured by Envisat RA-2 and
 6 processed by all retracers, compared with in-situ measurement
 7

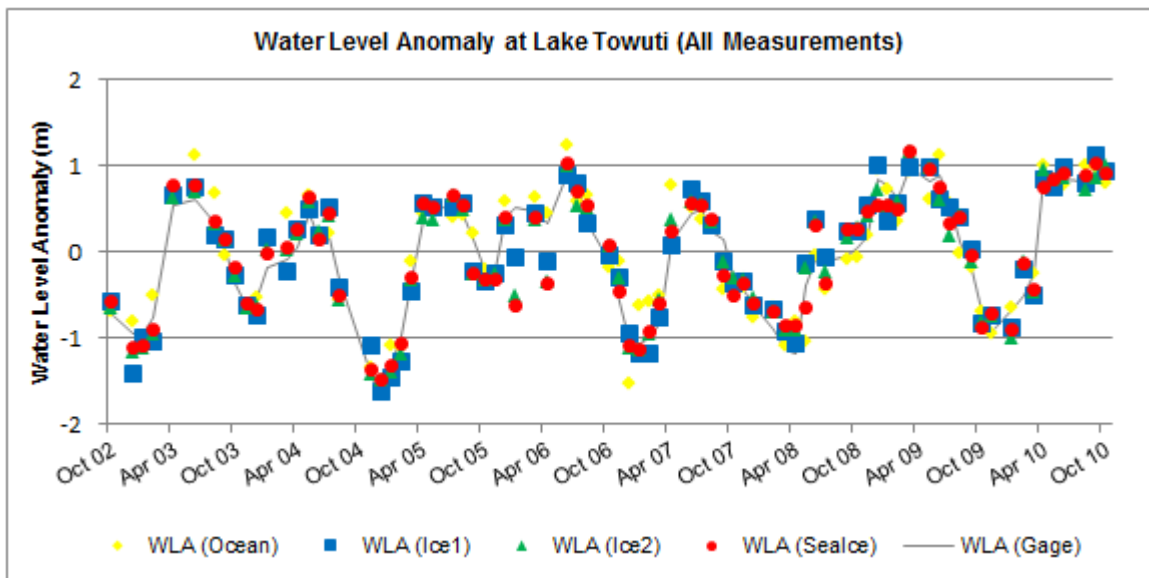

1


2 **Figure 14** Water level anomaly at Lake Towuti as measured by Envisat RA-2 and
 3 processed by all retracers, compared with in-situ measurement

4

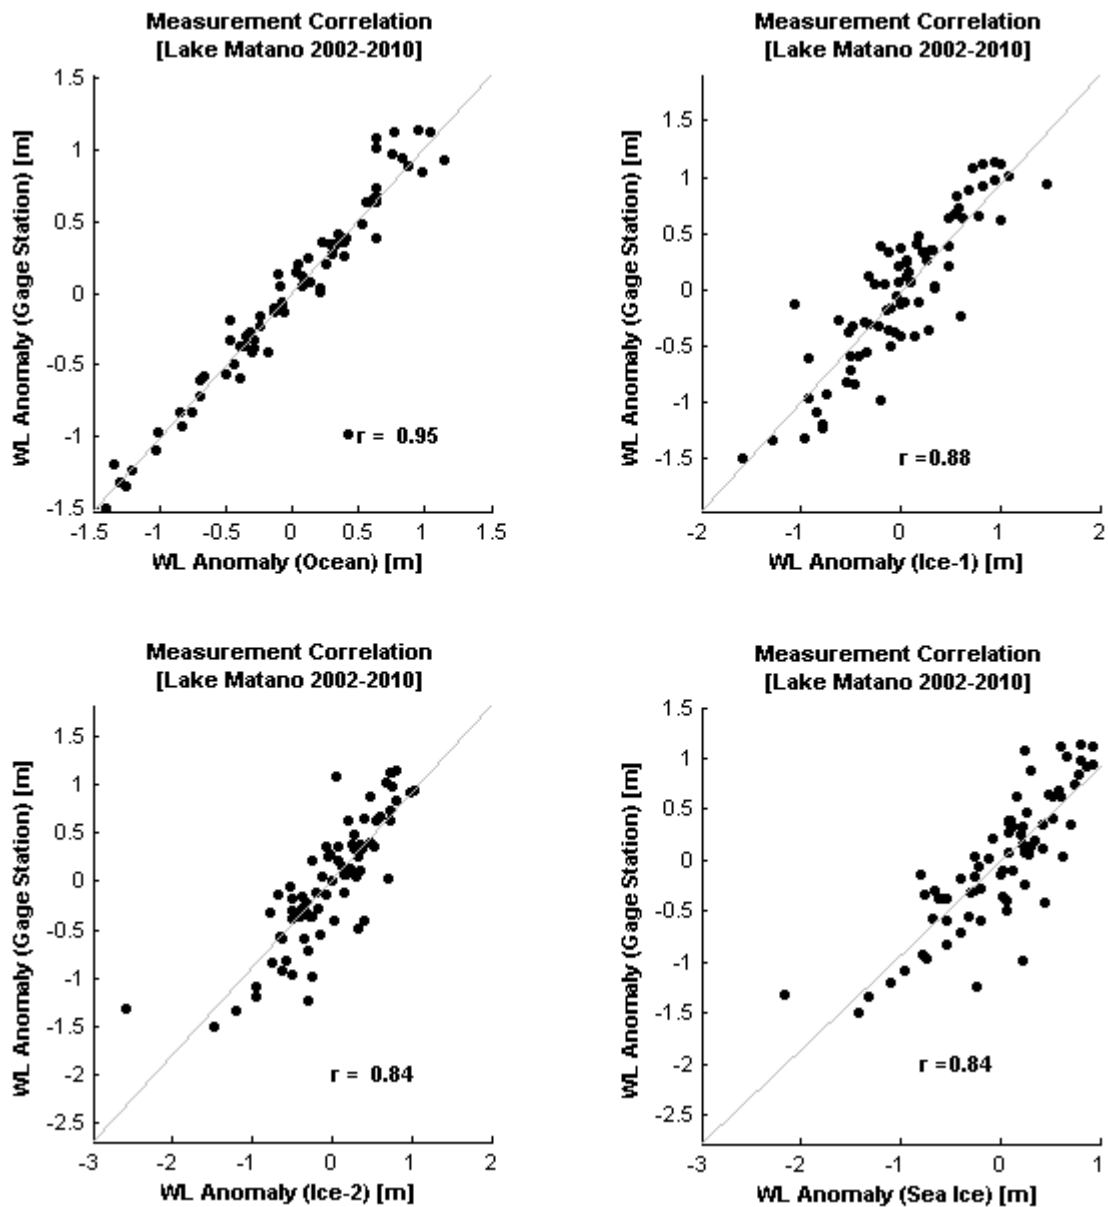



1
2
3
4
5

Figure 15 Correlation between water level anomaly at Lake Matano as measured by Envisat RA-2 altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retrackers


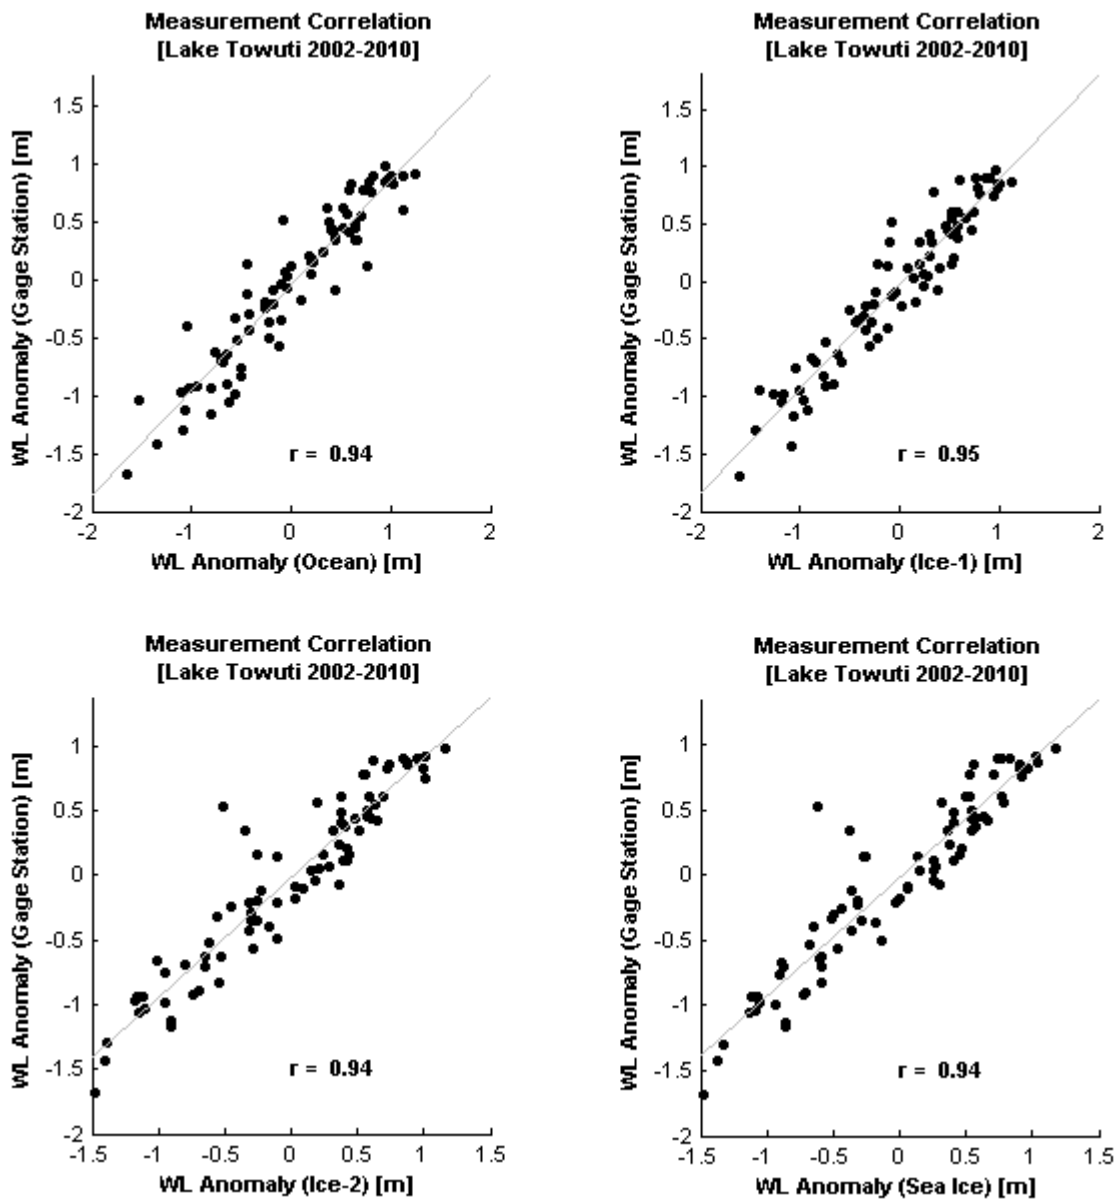


1
2
3
4
5

Figure 16 Correlation between water level anomaly at Lake Towuti as measured by Envisat RA-2 altimeter and processed with Ocean (top left), Ice-1 (top right), Ice-2 (bottom left) and Sea Ice (bottom right) retrackers

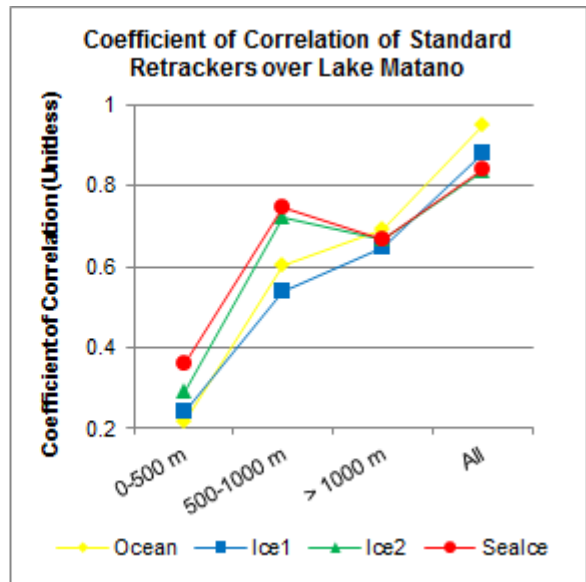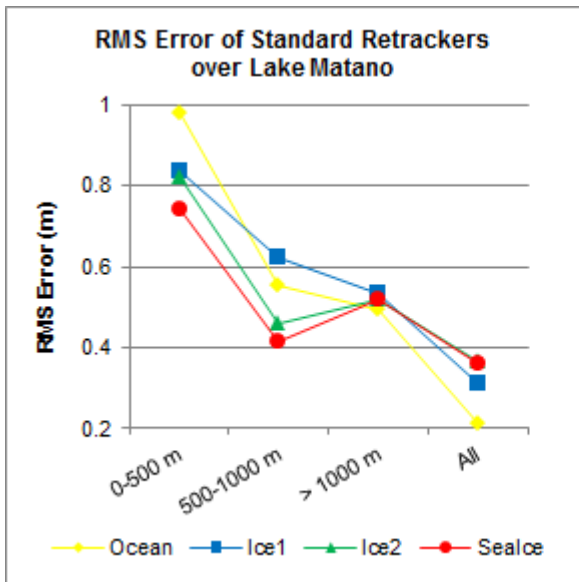

1
 2 **Figure 17** The performance of Envisat RA-2 radar altimetry measurements over Lake
 3 Matano, classified by the distance to the lakeshore

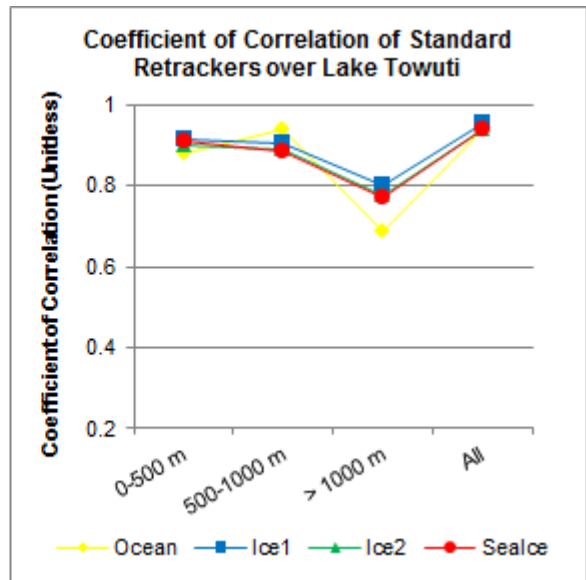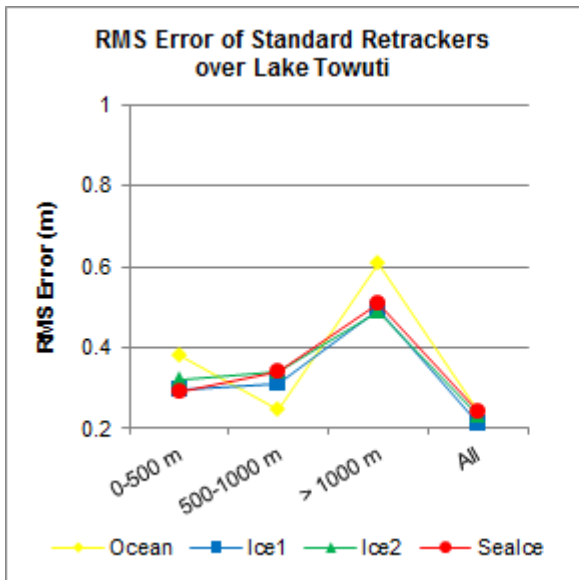

4
 5 **Figure 18** The performance of Envisat RA-2 radar altimetry measurements over Lake
 6 Towuti, classified by the distance to the lakeshore

1 **6 Supplementary Materials**

2

3 **Table 8** Envisat RA-2 pass, cycles and observation period for each study sites

Site #	Site Name	Longitude	Latitude	Pass	River/Lake Width	In-Situ Data	Cycle	Period
Mahakam Watershed								
1	UM03	114°35'10" E	0°50'02" N	89	54 m	No	6-93	2002-2010
2a	Melak01	115°53'20" E	0°17'08" S	46	247 m	Yes	6-93	2002-2010
2b	Melak02	115°47'58" E	0°11'03" S	297	294 m	Yes	6-93	2002-2010
3	Karangmumus	117°11'20" E	0°24'21" S	3	8-45 m	Yes	6-93	2002-2010
Malili Lakes Complex								
4	Matano	121°24'6" E	2°28'59" S	397	8,159 m	Yes	6-93	2002-2010
5	Towuti	121°23'57" E	2°30'10" S	397	28,818 m	Yes	6-93	2002-2010

4

5