

lineno

pdftitle=Nested stream–aquifer interfaces pdfauthor=N. Flipo et al.

title Manuscript prepared for Hydrol. Earth Syst. Sci. Discuss.

with version 4.1 of the L<sup>A</sup>T<sub>E</sub>X class copernicus\_discussions.cls.

Date: 4 July 2014

# Continental hydrosystem modelling: the concept of nested stream–aquifer interfaces

**N. Flipo<sup>1</sup>, A. Mouhri<sup>1,2,3</sup>, B. Labarthe<sup>1</sup>, S. Biancamaria<sup>4</sup>, A. Rivière<sup>1</sup>, and P. Weill<sup>1</sup>**

<sup>1</sup>MINES ParisTech, PSL Research University, Geosciences Department, Paris, France

<sup>2</sup>Sorbonne Universités, UPMC Univ Paris 06, UMR 7619 METIS, Paris, France

<sup>3</sup>CNRS, UMR 7619 METIS, Paris, France

<sup>4</sup>CNRS, LEGOS, UMR 5566 – CNRS-CNES-IRD-Université Toulouse III, Toulouse, France

Correspondence to: N. Flipo (nicolas.flipo@mines-paristech.fr)

## Abstract

abstr

Coupled hydrological-hydrogeological models, emphasising the importance of the stream-aquifer interface, are more and more used in hydrological sciences for pluri-disciplinary studies aiming at investigating environmental issues. Based on an extensive literature review, stream-aquifer interfaces are described at five different scales: local [10 cm–~ 10 m], intermediate [~ 10 m–~ 1 km], watershed [10 km<sup>2</sup>–~ 1000 km<sup>2</sup>], regional [10 000 km<sup>2</sup>–~ 1 M km<sup>2</sup>] and continental scales [> 10 M km<sup>2</sup>]. This led us to develop the concept of nested stream-aquifer interfaces, which extends the well-known vision of nested groundwater pathways towards the surface, where the mixing of low frequency processes and high frequency processes coupled with the complexity of geomorphological features and heterogeneities creates hydrological spiralling. This conceptual framework allows the identification of a hierarchical order of the multi-scale control factors of stream-aquifer hydrological exchanges, from the larger scale to the finer scale. The hyporheic corridor, which couples the river to its 3D hyporheic zone, is then identified as the key component for scaling hydrological processes occurring at the interface. The identification of the hyporheic corridor as the support of the hydrological processes scaling is an important step for the development of regional studies, which is one of the main concerns for water practitioners and resources managers.

In a second part, the modelling of the stream-aquifer interface at various scales is investigated with the help of the conductance model. Although the usage of the temperature as a tracer of the flow is a robust method for the assessment of stream-aquifer exchanges at the local scale, there is a crucial need to develop innovative methodologies for assessing stream-aquifer exchanges at the regional scale. After formulating the conductance model at the regional and intermediate scales, we address this challenging issue with the development of an iterative modelling methodology, which ensures the consistency of stream-aquifer exchanges between the intermediate and regional scales.

Finally, practical recommendations are provided for the study of the interface using the innovative methodology MIM (Measurements-Interpolation-Modelling), which is graphically de-

veloped, scaling in space the three pools of methods needed to fully understand stream–aquifer interfaces at various scales. In the MIM space, stream–aquifer interfaces that can be studied by a given approach are localized. The efficiency of the method is demonstrated with two examples. The first one proposes an upscaling framework, structured around river reaches of  $\sim 10$ -100 m, from the local to the watershed scale. The second example highlights the usefulness of space borne data to improve the assessment of stream–aquifer exchanges at the regional and continental scales. We conclude that further developments in modelling and field measurements have to be undertaken at the regional scale to enable a proper modelling of stream-aquifer exchanges from the local to the continental scale.

## 1 Introduction

intro

The emergence of a systemic view of the hydrological cycle led to the concept of continental hydrosystem (Dooge, 1968; Kurtulus et al., 2011), which “is composed of storage components where water flows slowly (e.g. aquifers) and conductive components, where large quantities of water flow relatively quickly (e.g. surface water)” (Flipo et al., 2012, p. 1). This concept merges surface and ground waters into the same hydrological system through the stream–aquifer interface. Recently, Fan et al. (2013) estimated that 22 - 32 % of the land surface is influenced by shallow groundwater. As a key transitional component characterised by a high spatio-temporal variability in terms of physical and biogeochemical processes (Brunke and Gonser, 1997; Krause et al., 2009b), this interface requires further consideration for characterising the hydrogeological behaviour of basins (Hayashi and Rosenberry, 2002), and therefore continental hydrosystem functioning (Saleh et al., 2011).

Water exchange dynamics at the stream–aquifer interface are complex and mainly depend on geomorphological, hydrogeological, and climatological factors (Sophocleous, 2002; Winter, 1998). Recent eco-hydrological publications, dedicated to stream–aquifer interfaces, claim the recognition of the complexity of the multi-scale processes taking place at the interface (Ellis et al., 2007; Hancock et al., 2005; Poole et al., 2008; Stonedahl et al., 2012).

A number of published papers address the problem of reactive transport through the stream aquifer interface. These papers imply sophisticated models, which represent the dynamics of pollutants at the local scale (Bardini et al., 2012; Chen and MacQuarrie, 2004; Doussan et al., 1997; Gu et al., 2008; Marzadri et al., 2011; Peyrard et al., 2011) fairly well, taking into account the effect of local heterogeneities, micro-topography and of sharp redox gradients on the exchanged fluxes. These models are used to investigate complex processes, such as the effect of micro-topography on flow paths and associated geochemical fluxes (Frei et al., 2012), or the potential effect of bank storage on denitrification (Gu et al., 2012), as well as the effect on the stream curvature to hyporheic biogeochemical zonation (Boano et al., 2010b). At the regional scale, coupled rainfall-runoff hydrological models and biogeochemical models are able to simulate pollutant transport and removal such as nitrates (Billen and Garnier, 2000; Oeurng et al., 2010; Seitzinger et al., 2002; Thouvenot-Korppoo et al., 2009). These models i) underestimate the absolute water flux, flowing upwards and/or downwards, through the interface, and ii) poorly simulate pollutants removal due to water fluxes through the sharp redox gradient of the hyporheic zone. This is due to their tautological nature, which does not integrate the proper physical processes, and also to their discretisation which does not account for sub-cell heterogeneities. Few applications considered the potential reversal of flow at the interface and its impact on nitrate removal at the catchment scale (Conan et al., 2003; Galbiati et al., 2006), but until today the exact quantification of the intensity of the removal due to various processes occurring at the stream-aquifer interface remains uncertain (Flipo et al., 2007a). Although certain control factors of biogeochemical processes occurring at the stream-aquifer interface are known, such as water residence time, nitrate concentration or organic matter content (Carleton and Montas, 2010; Dahm et al., 1998; Hill et al., 1998; Kjellin et al., 2007; Peyrard et al., 2011; Rivett et al., 2008; Weng et al., 2003), as well as water level fluctuations (Burt et al., 2002; Dahm et al., 1998; Hefting et al., 2004; Turlan et al., 2007), numerical models remain limited by their ability to simulate water pathways in the interface properly (Burt, 2005). Consequently, large scale biogeochemical models lack predictive abilities with regards to climate change issues or the assessment of the implementation of environmental regulatory frameworks, such as

the European Water Framework Directive (WFD) (Parliament Council of the European Union, 2000).

Although the number of papers concerning stream-aquifer interfaces exponentially increased over the last 15 years (Fleckenstein et al., 2010), they mostly focus on local scale issues, following a classic bottom-up scientific approach (Nalbantis et al., 2011). The lack of models aiming at quantifying stream aquifer exchanges at large basins' scale was already alleged by Fleckenstein et al. (2010) and Krause et al. (2011). The current review quantitatively confirms that the larger the scale (scale in the sense of model dimension), the less understood the interfaces. This is one of the major concerns for large scale river basin managers. Indeed, they have difficulties to fulfill the requirements of for instance the European WFD, especially for providing guidelines towards a good ecological status of both surface water bodies and subsurface water bodies. State-of-the-art coupled surface-subsurface models nowadays fail to integrate eco-hydrological concepts based on functionalities of morphological units (Bertrand et al., 2012; Dahl et al., 2007), mostly because they are not able yet to integrate the multi-scale nature of the stream-aquifer interfaces into a holistic view of the system.

Consequently, innovative methodologies for assessing stream-aquifer exchanges at the regional and continental scales need to be developed, which is a challenging issue for modellers (Fleckenstein et al., 2010; Graillot et al., 2014). The aim of this paper is to pave the way towards a multi-scale modelling of the stream-aquifer interface, with the ambitious goal of being able to simulate the complexity of the processes occurring at the local scale in larger scale models, i.e., at the regional scale for large basin decision makers, and also at the continental scale, which is the primary scale of interest for the assessment of the effect of climate change on hydrosystems. In other words, this paper aims at rationalising the modelling of stream-aquifer interfaces within a consistent framework that fully accounts for the multi-scale nature of the stream-aquifer exchange processes (Marmonier et al., 2012). This is a necessary primary step before assessing hydrological impacts on geochemical fluxes.

Following the attempt of Mouhri et al. (2013), who rationalised the design of a stream-aquifer interface sampling system, we first define the various scales of interest. Based on a literature review, we include the hydrologic spiralling concept of Poole et al. (2008) – which denotes the

complexity of water pathways in heterogeneous alluvial plains – into the nested groundwater pathways vision of Tóth (1963) to formulate the concept of nested stream–aquifer interfaces. This concept then permits to identify stream–aquifer interfaces as a key transitional component of continental hydrosystems (Sect. 2). We also introduce a hierarchical order of the multi-scale controlling factors of stream–aquifer hydrological exchanges, from the larger scale to the finer scale. The stream network is finally identified as the key component for scaling hydrological processes occurring at the interface. In Sect. 3, the paper focuses on the stream–aquifer interface modelling at various scales, with up-to-date methodologies. After describing the modelling approaches at the two extreme spatial scales, we emphasize which hydrological parameters and variables have to be up and downscaled around the river and also for which models. Finally, integrating the telescopic approach of Kikuchi et al. (2012) with the nested stream-aquifer interface concept, we develop the MIM (Measurements-Interpolation-Modelling) methodological framework for the design of multi-scale studies of stream-aquifer exchanges based on a more holistic view of the hydrosystem (Sect. 4). MIM is a valuable tool to define strategies for combining field measurements and modelling approaches more easily. Given the usage of the MIM methodology, we show that the scaling of processes from the local to the watershed scale is structured around river reaches of  $\sim 10\text{-}100$  m. We also analyse the question of how to model stream-aquifer exchanges at the continental scale, and investigate the usage of remote sensing data, which should improve global hydrological budgets. We conclude that further developments in modelling and field measurements have to be performed at the regional scale to enable the proper modelling of stream-aquifer exchanges from the local to the continental scale.

## **2 The concept of nested stream–aquifer interfaces**

### **2.1 Historical developments of the nested stream-aquifer interface concept**

Stream–aquifer interfaces have only been intensively surveyed for two decades (Fleckenstein et al., 2006; Marmonier et al., 2012). Its study by the eco-hydrological community led to a re-conceptualisation of its nature from the river being seen as an impervious drain that collects

the effective rainfall and transfers it to the ocean, towards a more subtle view that integrates more spatio-temporal processes in the hydrosystem functioning. Indeed, the stream–aquifer interface is now conceptualised as a filter through which water flows many times over various spatial (from centimetres to kilometres) and temporal scales (from seconds to months) before reaching the sea (Datry et al., 2008). One of the main challenges is to understand the role of the stream–aquifer interfaces in the hydro(geo)logical functioning of basins (Hayashi and Rosenberry, 2002). The multi-scale nature of the problem at hand imposes the definition of the scales of interest.

The five commonly recognised scales (in this context scale refers to the size of the studied objects) are the local, the reach, the catchment, the regional, and the continental scales (Blöschl and Sivapalan, 1995; Dahl et al., 2007; Gleeson and Paszkowski, 2013), being defined as:

- Local scale (or the experimental site scale) [ $10\text{ cm}–\sim 10\text{ m}$ ]: this scale concerns the riverbed or the hyporheic zone (HZ, see Sect. 2.2 for more details);
- Intermediate or reach scale [ $\sim 10\text{ m}–\sim 1\text{ km}$ ]: it concerns the river reach, a pond or a small lake;
- Catchment–watershed scale [ $10\text{ km}^2–\sim 1000\text{ km}^2$ ] or [ $\sim 1\text{ km}–\sim 10\text{ km}$ ]: this scale connects the stream network to its surface watershed and more broadly to the hydrosystem. This is the scale from which surface-ground water exchanges are linked to the hydrological cycle and the hydrogeological processes;
- Regional scale [ $10\,000\text{ km}^2–\sim 1\text{ M km}^2$ ] or [ $\sim 100\text{ km}–\sim 1000\text{ km}$ ]: this is the scale of water resources management, and the one for which the least is known about stream–aquifer exchange dynamics. For a conceptual analysis of the stream–aquifer interfaces, the watershed and the regional scales can be merged into a single category referred to as the regional scale (Mouhri et al., 2013). Merging these two scales is consistent with the fact that a regional basin is a collection of smaller watersheds. The distinction between the two categories is only necessary to conceptualise the scaling of processes as discussed in the final section of this paper;

- Continental scale [ $> 10 \text{ M km}^2$ ] or [ $\sim 1000 \text{ km} - \sim 10000 \text{ km}$ ]: this scale is a collection of regional scale basins. The difference with the regional scale is that there is a broader range of hydro-climatic conditions, which imposes accounting for climatic circulations.

From a conceptual point of view, stream-aquifer exchanges are driven by two main factors: the hydraulic gradient and the geological structure. The hydraulic gradient defines the water pathways (Winter, 1998), whereas the geological structure defines the conductive properties of the stream-aquifer interface (White, 1993; Dahm. et al., 2003). These two factors are fundamental for hydrogeologists, who derive subsurface flow velocities and transfer times from those factors. The time scale to be considered also varies depending on the studied object (HZ itself or a sedimentary basin functioning) (Harvey, 2002). Estimating the stream-aquifer exchanges at a sedimentary basin scale then requires the combination of various processes with different characteristic times or periods covering a wide range of temporal orders of magnitude (Blöschl and Sivapalan, 1995; Cardenas, 2008b; Flipo et al., 2012; Massei et al., 2010): hour-day for river processes, year-decade for effective rainfall, decade-century for subsurface transit time.

Mouhri et al. (2013) proposed a multi-scale framework to study stream-aquifer interfaces. Their approach is based on the observation that the two main hydrosystem components are the surface and groundwater components, which are connected by nested interfaces (Fig. 1) leading to patterns in residence time over the scales (Cardenas, 2008b). Stream-aquifer interfaces consist in alluvial plain at the regional and watershed scales (Fig. 1a and b), while within the alluvial plain, they consist in riparian zone at the reach scale (Fig. 1d). Within the riparian zone, they consist in the hyporheic zone at the local scale (Fig. 1c), and so on, until the water column-benthos interface within the river itself (Fig. 1f). The concept of nested stream-aquifer interfaces includes the hydrologic spiralling concept of Poole et al. (2008) into the nested groundwater pathways vision of Tóth (1963), recently revisited to account for multi-scale anisotropy (Zlotnik et al., 2011). Before further developing the multi-scale framework, the various descriptions of stream-aquifer interfaces are outlined from the local to the continental scale. A classification by order of importance of heterogeneity controls on stream-aquifer water exchanges is proposed in Sect. 2.6.



## 2.2 The stream–aquifer interface at the local scale – The hyporheic zone

At the local scale (plot, river cross section), the stream–aquifer interface consists in a hyporheic zone (HZ, Fig. 1c), which corresponds to an ecotone, whose extent varies dynamically in space and time. This ecotone is at the interface between two more uniform, yet contrasted ecological systems (Brunke and Gonser, 1997): the river and the aquifer. In a broad sense, the HZ is “the saturated transition zone between surface water and groundwater bodies that derives its specific physical (e.g. water temperature) and biogeochemical (e.g. steep chemical gradients) characteristics from active mixing of surface and groundwater to provide a habitat and refugia for obligate and facultative species” (Krause et al., 2009a, p. 2103). White (1993) also indicates that the HZ is located beneath the stream bed and in the stream banks that contain infiltrated stream water. Furthermore, Malard et al. (2002) identified five generic HZ configurations, that depend on the structure of the subsurface medium, and especially on the location of the impervious substratum:

1. No HZ: the stream flows directly on the impervious substratum. A perennial lateral HZ can appear in a zone of significant longitudinal curvature of the stream, for instance in the case of meanders (Sect. 2.3.1).
2. No aquifer unit: a HZ can appear due to the infiltration of the stream water towards the substratum or through the stream banks. In the former case, the substratum is located near the stream bed sediments.
3. Existence of a HZ in a connected stream–aquifer system: the HZ is created by advective water from both the stream and the aquifer unit. The impervious substratum is located beneath the aquifer unit.
4. Existence of a HZ in a disconnected stream–aquifer system: a distinct porous medium lies in-between the stream bed and the aquifer unit. This porous medium would not be saturated if the stream bed were impervious. In this configuration, two subcategories are to be found:

- a. The vertical infiltration of stream water towards the top of the aquifer unit generates a zone of mixing waters at the top of the aquifer unit, far enough below the stream bed to be disconnected from it;
- b. A perched HZ is formed below the stream bed due to the infiltration of stream water. In this particular case, the porous medium below the stream bed is either very thick or its conductive properties are so poor that the surface water may not reach the aquifer unit.

Hydro-sedimentary processes generate heterogeneous, usually layered, streambed (Hatch et al., 2010; Sawyer and Cardenas, 2009). In situ measurements revealed that the streambed permeabilities range over several order of magnitude both vertically and horizontally (Leek et al., 2009; Ryan and Boufadel, 2007; Sawyer and Cardenas, 2009; Sebok et al., 2014). These heterogeneities favour horizontal flow paths rather than vertical flow paths (Marion et al., 2008; Ryan and Boufadel, 2006), leading to a stratification of chemical concentration in the streambed (Ryan and Boufadel, 2006). Overall the heterogeneities modify both the penetration depth and the residence time of stream–aquifer exchanges (Cardenas et al., 2004; Salehin et al., 2004; Sawyer and Cardenas, 2009). The common hypothesis of an homogeneous bed therefore generates errors on the assessment of stream–aquifer exchanges (Cardenas et al., 2004; Frei et al., 2010; Kalbus et al., 2009; Irvine et al., 2012), which are difficult to estimate for real case studies due to the fact that small scale heterogeneities are difficult to assess.

Coupled to the structural heterogeneities, the micro-topography of the streambed modulates the exchanges longitudinally (Fig. 1f), due to the occurrence of advective pumping (Cardenas and Wilson, 2007a,b; Endreny et al., 2011; Janssen et al., 2012; Käser et al., 2013; Krause et al., 2012b; Munz et al., 2011; Sawyer and Cardenas, 2009; Stonedahl et al., 2010).

### **2.3 The stream–aquifer interfaces at the intermediate scale – The hyporheic corridor**

At the intermediate scale, the stream–aquifer interface consists of a complex mosaic of surface and subsurface flow paths of variable length, depth, residence time, and direction, composing

the hydrological spiralling concept of Poole et al. (2008). These flow paths are controlled by the geometrical shapes and the hydraulic properties of the structural heterogeneities. Confronted with such complexity, Brunke and Gonser (1997); Stanford and Boulton (1993) developed the concept of “hyporheic corridor”, which considers, not only the river, but also its extension as a continuum (Bencala et al., 2011; Malard et al., 2002) in the form of alluvial flow paths maintaining biodiversity patterns and ecosystem metabolism. The hyporheic corridor extends the 2-D hyporheic zone (previous section) to a dynamical 3-D system, which links the actual hydro-sedimentary behaviour of the river to its mid-term and long-term history by the means of the sediment heterogeneities within the alluvial plain and the associated water pathways.

### **2.3.1 Morphological shaping related to the hydro-sedimentary river dynamics**

At the local scale, the hyporheic exchanges are described by 2-D water pathways across the heterogeneous stream bed and river banks. However, at the reach scale, rivers develop a complex geometry, such as meander belts, which transforms the vertical 2-D understanding of hydrological processes (Fig. 1c) into a more complicated 3-D system involving lateral water pathways (Fig. 1d).

At the reach scale, hyporheic exchanges therefore develop in various geomorphological structures, such as stream curvature (Fig. 1d), as well as in-stream pool and riffle sequences and sediment bars (Fig. 1e). Each of these structures significantly affects stream-aquifer exchanges (Stonedahl et al., 2010) involving a specific transfer time (Cardenas, 2008b).

As stated by Rubin et al. (2006, 2), there is “a hierarchy of different bed form sizes in rivers”, consisting of ripples, dunes, and compound bars. These forms are related, through river morphological characteristics such as width, cross-section, and slope, to hydro-sedimentary processes taking place in the river and forming stratatasets (Bridge and Best, 1997; Paola and Borgman, 1991; Rubin et al., 2006).

Due to the longitudinal water head decrease along the flow, pool and riffle sequences are submitted, from upstream to downstream, to a head gradient, which involves water downwelling upstream riffles and water upwelling at the riffle tail (Crispell and Endreny, 2009; Frei et al., 2010; Gooseff et al., 2006; Harvey and Bencala, 1993; Gariglio et al., 2013; Kasahara and

Hill, 2006; Maier and Howard, 2011; Marzadri et al., 2011; Saenger et al., 2005; Tonina and Buffington, 2007). Due to the sequence, stream-aquifer exchanges seem to increase with the amplitude of the stream bed oscillations, until a threshold is reached (Trauth et al., 2013). Besides combined stream bed oscillating frequencies may increase the intensity of the exchanges in a complex way (Käser et al., 2013). Bedform induced hyporheic exchanges can be viewed as longitudinally 2D vertical processes. Similar 2D horizontal processes also occur in single or alternating unit bars (Burkholder et al., 2008; Cardenas, 2009a; Deforet et al., 2009; Derx et al., 2010; Marzadri et al., 2010; Shope et al., 2012) or bed form discontinuities (Hester and Doyle, 2008).

The development of a hyporheic zone inside a meander belt was recently simulated to estimate the water pathways involved by such a hyporheic flow (Boano et al., 2006; Revelli et al., 2008; Cardenas, 2008a). The numerical results of Cardenas (2008a) prove that the shape of the meander is responsible for the flow paths length and the residence time distribution within the point bar. Only few exchanges and low discharges occur in the core of the meander, while the neck is characterised by intense water exchanges between the river and the sediments (Revelli et al., 2008). The effect of successive meanders on water pathways and travel times was also simulated in a homogeneous alluvial aquifer (Cardenas, 2009a), which can help restoration projects involving channel modifications (Gomez et al., 2012). The sinuosity of the stream depends on its functioning and the characteristics of its alluvial plain.

Although the stream morphological heterogeneities are of primary importance for the quantification of the water fluxes in the hyporheic corridor (Kasahara and Wondzell, 2003; Lautz and Siegel, 2006; Tonina and Buffington, 2011; Wondzell et al., 2009), the understanding of the stream-aquifer interactions also relies on a proper characterisation of the physical flow properties of alluvial plains and their various geomorphological units (Anderson et al., 1999).

### **2.3.2 Hydrofacies related to the alluvial plain architecture**

Alluvial plains are the result of the sedimentary infilling of valleys cut into the bedrock. In Quaternary coastal settings, cutting and filling respond strongly to base-level fluctuations driven by glacioeustatic sea-level changes (Schumm, 1993; Dalrymple, 2006). For upstream alluvial

valleys beyond the influence of sea-level fluctuations, cutting and filling reflect complex interactions between climate, tectonics, sediment supply and river drainage changes (Gibling et al., 2011). Sediment heterogeneity within the alluvial plains is produced by the transport and depositional processes that have operated in different paleogeomorphic settings within the fluvial system. This results in a complex stacking of lithofacies, bounded by erosional and depositional surfaces. These lithofacies are composed of sediments ranging over a broad scale of grain size and sorting, and can be described in terms of hydraulic parameters (e.g. conductivity), defining an hydrofacies (Anderson et al., 1999; Hornung and Aigner, 1999; Klingbeil et al., 1999; Heinz et al., 2003; Fleckenstein et al., 2006). Sediment heterogeneity can thus produce sharp contrasts in hydraulic conductivity of several orders of magnitude (Miall, 1996). Different scales of sediment heterogeneity are nested within an alluvial plain (Koltermann and Gorelick, 1996): grain segregation in bedload and turbulent fluctuations of the flow produces heterogeneous cross-stratification within bedforms at the centimetre scale (Allen, 1963, 1966). Sand and gravel bar internal structures reflect the distribution of the sediment load in the water column, the succession of different flow stages, and the morphodynamic interactions with other bars and cross-bar channels (Bridge, 2006). Their sizes, highly variable but proportional to the channel size, range between several tens to several hundreds of metres. At the kilometre scale, fine overbank deposits and abandoned channels filled with high organic content clays produce sharp lithological contrasts with the coarser channelised facies.

The nature of sediment heterogeneity is closely linked to the functioning of the river channel and its associated floodplain, controlled by hydro-climatic, geologic and geomorphologic conditions at the regional scale (Nanson and Croke, 1992). The degree of heterogeneity at the regional scale between coarse channelized facies and less permeable floodplain deposits mainly depends on the ratios between the rate of lateral migration of the river channel, the rate of vertical accretion by overbank deposits, the avulsive behaviour of the fluvial system, and the degree of confinement of the floodplain (Bristow and Best, 1993; Miall, 1996). The substratum on which the channel migrates (containing the hyporheic zone), is thus composed of sediments representative either of an alluvial plain contemporaneous with present hydroclimatic conditions, or of

relict floodplain elements formed under prior river flow regimes (Brunke and Gonser, 1997; Nanson and Croke, 1992; Woessner, 2000).

The stream bed heterogeneities, coupled with the longitudinal variation of the bed, impact the dynamics of the stream-aquifer exchanges by creating complex flow paths (Salehin et al., 2004) as flow re-circulation (Cardenas et al., 2004). In the case of a meandering channel, sediment deposition on the inner meander bank results in the formation of a permeable point-bar which texture and architecture reflects the flow characteristics and the sediment size distribution within the water column. On the outer eroded bank, the sediment is composed of older deposits, which composition eventually reflects the past history of construction of the alluvial plain. This specific configuration creates asymmetrical stream aquifer interactions between the two river banks (O'Driscoll et al., 2010), and, depending on the outer bank sediment heterogeneities, can generate preferential flow paths in the alluvial plain (Peterson and Sickbert, 2006).

The spatial distribution of porosity and transmissivity, associated with sediment heterogeneities, impacts the dynamics of the stream-aquifer exchanges by creating flow recirculations both vertically across the stream bed, and horizontally across the channel banks. Along with the sediment heterogeneities, the geomorphological structures of the alluvial plain can also create preferential pathways, which can have a significant impact on stream-aquifer exchanges (Conant, 2004; Fleckenstein et al., 2006; Krause et al., 2007; Poole et al., 2002, 2008; Storey et al., 2003; van Balen et al., 2008; Weng et al., 2003; Woessner, 2000). Overall, the preferential flow paths lead to a spatially and temporally complex piezometric head distribution in the alluvial plain, especially during transitional event as floods (Bendjoudi et al., 2002; Heeren et al., 2014; Koch et al., 2011; Wondzell and Swanson, 1999; Wroblicky et al., 1998), when bank storage occurs (Whiting and Pomeranets, 1997).

## **2.4 The stream-aquifer interfaces at the regional scale – Buffering effect of alluvial plains**

The pioneer work of Tóth (1963) showed that topography, geology and climate are major control factors of hierarchically nested groundwater flow systems: local, intermediate and regional. These nested flow systems are gravity driven from uphill to downhill. The piezometric surface

of the groundwater near the alluvial plain usually flattens and becomes highly correlated to the soil surface topography (Tóth, 1962). It remains to locate the lowest piezometric level in the downhill alluvial plain, where the hyporheic corridor develops. The complex piezometric head distribution of the hyporheic corridor constitutes the boundary conditions for the exchanges between the alluvial plain and the underlying regional aquifer system. In this configuration, the river is not always representative of the lowest piezometric head in the hyporheic corridor. For instance, Curie et al. (2009) report a case study, where alluvial ground waters and stream waters were converging to a zone parallel to the stream, which acts as a drainage pathway inside the alluvial plain. In this specific case, the drainage pathway is the lowest piezometric head. It thence controls the exchanges between regional aquifer and the alluvial one.

Moreover, longitudinal changes in the width and in the depth of the alluvial plain along the hyporheic corridor modify the piezometric head gradient of the hyporheic corridor at the kilometre scale (Malard et al., 2002; Woessner, 2000), which also influences the exchanges between the alluvial plain and the regional aquifer spatially. In addition to the complex behaviour of nested flow systems, Zlotnik et al. (2011) prove that small-scale anisotropy prevents or amplifies the flow patterns due to large-scale aquifer anisotropy.

These complex interactions between, on the one side, the river network and the hyporheic corridor, and on the other side, the hyporheic corridor and the regional aquifer system, contribute to the riparian turn over mentioned by Jencso et al. (2010). It characterises the fact that alluvial aquifers behave as a buffering zone between low frequency processes occurring at the regional scale and high frequency processes occurring in the river network. The flow patterns resulting from this complex interaction can be evaluated by water transit time (Haitjema, 1995; McGuire and McDonnell, 2006) or using tracers (Macpherson and Sophocleous, 2004).

## **2.5 The stream–aquifer interface at the continental scale – The closure of the continental hydrological cycle**

At the continental scale, the complex dynamics of stream–aquifer exchanges might have consequences on the proper closure of the hydrological cycle, which partly consists in assessing groundwater and surface water pathways and travel time. Currently, a large range of satellite

data allows the remote observation of the continental hydrological cycle, temporarily from the seasonal to the decennial scale, and spatially from the sub-kilometre (Brunner et al., 2008) to the continental scale (García-García et al., 2011). Even if satellites cannot measure the stream–aquifer exchanges directly, they provide valuable ancillary data, especially for obtaining information on temporal and spatial low frequency variabilities. They might also be a source of information crucial for ungauged or poorly gage large basins, as for example the Congo river (O’Loughlin et al., 2013) or other big monsoon rivers.

For example, total water storage (e.g. surface waters and ground waters) variations can be estimated from the Gravity Recovery and Climate Experiment (GRACE) mission, launched in 2002 (Tapley et al., 2004). Examples of space borne based hydrological studies can be found in Ramillien et al. (2008), who provide an extensive review of large-scale hydrological use of the first years of GRACE data. These data have coarse spatial (300–400 km) and temporal (from 10 days to 1 month) resolutions (Ramillien et al., 2012), but cover all continental surfaces, making their use particularly suitable at continental or large river basin scales. Yet, as GRACE data correspond to changes in total water storage, they have to be coupled with ancillary information to distinguish between surface water and ground water variations.

For the specific stream–aquifer exchanges, satellite observations of water extents and water elevations might be the most straightforward data to use. Current nadir altimeter satellites provide estimates of surface elevation (but not water depth) above a given reference datum of big water bodies crossed by the satellite ground track (Calmant et al., 2008), the instrument footprint being around 1 km. These measurements have a repeatability depending on the satellite orbit, which typically ranges from 10 to 35 days. Recent attempts have also demonstrated the possibility to estimate water storage variations by combining multi-sensor measurements. Optical or radar images are used to compute water extent (Cretaux et al., 2011) and can be combined with Digital Elevation Model (DEM) or with water elevation measurements from nadir altimeters to derive storage changes and fluxes (Neal et al., 2009; Gao et al., 2012). Yet, satellites providing water surface extents and the ones measuring water elevations do not have the same repeatability and spatial coverage, introducing errors in water storage variation estimates and limiting assessment of stream–aquifer exchanges at the continental scale.



To overcome this last issue, a new space borne mission, the Surface Water and Ocean Topography (SWOT) mission, is currently being developed by NASA, CNES (French Spatial Agency), CSA (Canadian Space Agency) and UKSA (United-Kingdom Space Agency), for a planned launch in 2019. SWOT will provide maps of distributed water elevations, water extents and water slopes on two swaths of 50 km each. It will enable the observation of rivers wider than 100 m and surface areas larger than  $250\text{ m} \times 250\text{ m}$  (Rodríguez, 2012). Accuracies on water elevation and water slope will be around 10 cm and  $1\text{ cm}\cdot\text{km}^{-1}$ , respectively, after averaging over  $1\text{ km}^2$  water area (Rodríguez, 2012). From these requirements, Biancamaria et al. (2010) estimated that SWOT should be able to provide useful information to compute discharge for river reaches with drainage areas above  $70\,000\text{ km}^2$ . This preliminary assessment was recently refined by Andreadis et al. (2013), who estimate that rivers with a bank full width of 100 m have drainage area ranging from 1050 to  $50\,000\text{ km}^2$ . Although the database contains errors (reported errors on river width range from 8 to 62 %), it provides the order of magnitude of minimum drainage area that will be sampled by SWOT. Given the two swaths and its 21-day orbit, the instrument will observe almost all continental surfaces in-between  $78^\circ\text{ S}$  and  $78^\circ\text{ N}$ , allowing the sampling of all drainage areas above  $50\,000\text{ km}^2$ .

More information on the usage of these satellite data is given within the MIM framework in Sect. 4.2.

## 2.6 A multi-scale issue structured around the river network

As developed in Sect. 2.3, the hyporheic corridor, closely related to the river network, is identified as being the location where flow paths mix at all scales. Consequently, it is the location of hydrological processes scaling.

Near river groundwater flow paths are mainly controlled by regional flow paths in aquifer systems (Malard et al., 2002). Indeed, the groundwater component of hydrosystem controls the regional flows towards the alluvial plains and the rivers. Such flow paths define the total amount of water that flows in the stream–aquifer interface (Cardenas and Wilson, 2007b; Frei et al., 2009; Kalbus et al., 2009; Rushton, 2007; Storey et al., 2003). This is not a new concept as the river network corresponds to drains collecting regional groundwater (Fig. 1a), which sustain the

network during low flow period (Ellis et al., 2007; Pinder and Jones, 1969; Tóth, 1963). These large scale structural heterogeneities can also generate local conditions that favour local re-infiltration of river water towards the aquifer system (Boano et al., 2010a; Cardenas, 2009a,b; Fleckenstein et al., 2006). These re-infiltrations (Fig. 1b and c) can even constitute the main recharge of some peculiar local aquifer systems, as for instance some alluvial plain (Krause and Bronstert, 2007; Krause et al., 2007).

In second instance, the spatial distribution of the stream bed permeabilities controls the dynamics of stream–aquifer exchanges within the alluvial plain, and therefore the near-river piezometric head distribution (Calver, 2001; Fleckenstein et al., 2006; Frei et al., 2009; Genereux et al., 2008; Hester and Doyle, 2008; Kalbus et al., 2009; Käser et al., 2009; Rosenberry and Pitlick, 2009). Finally, the longitudinal morphology of the river and the topography of the river bed, consisting of a pluri-metric succession of pools and riffles (Fig. 1e), also impact the stream–aquifer exchanges (Crispell and Endreny, 2009; Frei et al., 2010; Gooseff et al., 2006; Harvey and Bencala, 1993; Kasahara and Hill, 2006; Käser et al., 2013; Maier and Howard, 2011; Tonina and Buffington, 2007), until a threshold of stream bed amplitudes is reached (Trauth et al., 2013). Likewise, the depth of the alluvial aquifer (Koch et al., 2011; Marzadri et al., 2010; Whiting and Pomeranets, 1997), and the river hydraulic regime (Cardenas and Wilson, 2007a; Munz et al., 2011; Saenger et al., 2005) influence stream–aquifer exchanges. Ultimately a very fine scale process ( $\sim$  cm–dm), due to the in-stream non hydrostatic flow induced by bedform micro-topography (Fig. 1f), increases the absolute value of the total stream–aquifer exchanges (Cardenas and Wilson, 2007a,b; Endreny et al., 2011; Janssen et al., 2012; Käser et al., 2013; Krause et al., 2012b; Sawyer and Cardenas, 2009; Stonedahl et al., 2010).

It is thus important to study the stream–aquifer exchanges in the dual perspective of regional and local exchanges; the former being controlled by regional recharge and structural heterogeneities, the latter by the longitudinal distribution of stream bed heterogeneities and the river morphology (Schmidt et al., 2006). These two types of control factors may also generate water loops within the stream–aquifer interfaces, the hyporheic corridor being the location where these processes merge (Poole et al., 2008).

### 3 Modelling stream–aquifer exchanges

A literature review of process-based modelling of stream–aquifer interfaces’ functioning is presented in Tab. 1, which synthesises 51 references. The majority of these focuses on the local scale (25), while only four consider the regional and continental scales. The remaining mostly focuses on the local-intermediate (11) and intermediate scales (11).

#### 3.1 Overview of coupled surface–subsurface hydrological models

Many hydrosystem models have been developed, and especially coupled surface–subsurface hydro(geo)logical models (Loague and VanderKwaak, 2004), with no special emphasis on stream–aquifer interfaces.

During the 1970’s and 1980’s, the first sedimentary basin’ Distributed Physically-Based Models (DPBMs) were developed based on the finite differences numerical scheme (Abbott et al., 1986; Freeze, 1971; Harbaugh et al., 2000; Ledoux et al., 1989; de Marsily et al., 1978; McDonald and Harbaugh, 1988; Parkin et al., 1996; Perkins and Sophocleous, 1999; Refsgaard and Knudsen, 1996). In this type of approach, the hydrosystem is divided into compartments, which exchange through interfaces.

Since the late 1990’s, new models based on finite elements numerical schemes have been developed (Bixio et al., 2002; Goderniaux et al., 2009; Kolditz et al., 2008; Kollet and Maxwell, 2006; Li et al., 2008; Panday and Huyakorn, 2004; Therrien et al., 2010; VanderKwaak and Loague, 2001; Weill et al., 2009). These models allow the simulation of the pressure head in 3-D instead of the former pseudo 3-D modelling of the piezometric head. However, it is not yet possible to straightforwardly simulate large hydrosystems ( $> 10\,000\text{ km}^2$ ) with a high spatio-temporal resolution for long periods of time (a few decades) (Flipo et al., 2012). This is due to the large number of elements required to simulate such hydrosystems (Gunduz and Aral, 2005), which imposes the usage of heavily parallelised codes for simulating these systems with such a spatio-temporal resolution. Only recently, a proof of concept has been published by Kollet et al. (2010), who have simulated a  $1000\text{ km}^2$  basin with a high spatio-temporal resolution.

### 3.2 Models for simulating stream–aquifer interface

Surface water–groundwater exchanges, mostly through the soil or the stream–aquifer interface, are simulated with two different models (Ebel et al., 2009; Kollet and Maxwell, 2006; LaBolle et al., 2003; Furman, 2008):

- A conductance model or first order exchange coefficient (Rushton and Tomlinson, 1979), for which the interface is described with a water conductivity value. The exchanged water flux is then calculated as the product of the conductivity by the difference of piezometric heads between the aquifer and the surface water body. Depending on the model, the difference of pressures can also be used. This model implicitly formulates the hypothesis of a vertical water flux between surface water and groundwater, whatever the mesh size. This is the most common model for simulating stream–aquifer exchanges. There are diverse conductance formulations, especially in the case of disconnected aquifers and streams (Osman and Bruen, 2002). The conductance model usually assumes an equivalent homogeneous river bed for the definition of the conductance value, which can imply estimation errors in the exchanged water fluxes compared to a more realistic heterogeneous river bed. However, if the model is appropriately calibrated with regards to the connection/disconnection status, this assumption leads to slight estimation errors (Irvine et al., 2012). Another potential drawback of the conductance model is that the conductance coefficient depends on the temperature because it implicitly integrates the fluid viscosity (Doppler et al., 2007; Engeler et al., 2011). Moreover, the validity of the first order law is critical in case of a flood when water expands in the flood plain (Doppler et al., 2007; Engeler et al., 2011).
- Continuity of pressures and fluxes at the interface. This boundary condition requires an iterative or a sequential computation, although the iterative one is more precise (Sulis et al., 2010). Sometimes the iterative process also leads to a discontinuity of the tangential component of the water velocity at the interface with the stream bed (Discacciati et al., 2002; Miglio et al., 2003; Urquiza et al., 2008). This is not a problem as this discontinuity can be interpreted as representative of the stream bed load. It should also be noted that the

validity of this approach relies on the knowledge of structural heterogeneities constitutive of the stream-aquifer interface.

Recent numerical developments allow for solving the coupled surface and subsurface equations at once with a matricial system (Gunduz and Aral, 2005; Liang et al., 2007; Peyrard et al., 2008; Qu and Duffy, 2007; Spanoudaki et al., 2009; Yuan et al., 2008). This method can be used with whatever selected stream-aquifer interface model. Its main drawback is that it is computationally demanding and usually requires a parallelised model in order to simulate a real hydrosystem.

From a conceptual point of view, the conductance model permits to better understand the hydrological processes occurring at the stream-aquifer interface (Delfs et al., 2012; Ebel et al., 2009; Liggett et al., 2012; Nemeth and Solo-Gabriele, 2003) and is equivalent to the continuity one in the case of a highly conductive interface. Moreover, it has the advantage of simplifying the definition of structural heterogeneities in models. While the conductance model is able to simulate connected or disconnected systems (Brunner et al., 2009a), Brunner et al. (2010) showed that the conductance model remains appropriate for disconnecting streams, but only if an unsaturated flow formulation is chosen. Otherwise the model leads to estimation errors for disconnecting systems.

### **3.3 Temperature as a tracer of the flow – The local scale**

The study of heat propagation is a powerful tool for assessing stream-aquifer exchanges (Anderson, 2005; Constantz, 2008; Mouhri et al., 2013) based on the temperature used as a tracer of the flow. Coupled with in situ measurements, two methods, based on heat transport governing equations, are used to quantify stream-aquifer exchanges (Anderson, 2005):

1. Analytical models (Stallman, 1965; Anderson, 2005) are widely used to invert temperature measurements solving the 1-D heat transport equation analytically under simplifying assumptions (sinusoidal or steady boundary conditions and homogeneity of hydraulic and thermal properties) (Anibas et al., 2009, 2012; Becker et al., 2004; Hatch et al., 2006;

Jensen and Engesgaard, 2011; Keery et al., 2007; Lautz et al., 2010; Luce et al., 2013; Rau et al., 2010; Schmidt et al., 2007; Swanson and Cardenas, 2011).

2. Numerical models which couple water flow equation in porous media with the heat transport equation in 2-D or 3-D. These models are divided in two categories based on the numerical scheme: finite differences (Anderson et al., 2011; Anibas et al., 2009; Constantz et al., 2002, 2013; Constantz, 2008; Ebrahim et al., 2013; Lewandowski et al., 2011; Mutiti and Levy, 2010; R uhaak et al., 2008; Schornberg et al., 2010) or finite elements (Kalbus et al., 2009; Mouhri et al., 2013). These models have the advantage of calculating spatio-temporal stream–aquifer exchanges with the capability of accounting for the heterogeneities under transient hydrodynamical and thermal conditions.

Eventually, the two approaches provide estimates of the conductance coefficient that best represents the stream–aquifer interface at the local scale.

### **3.4 The conductance model at the regional scale**

Although the usage of DPBM covers a broad range of spatial scales, only 19 publications among 183 (Flipo, 2013) concern large river basins ( $> 10\,000\text{ km}^2$ ) (Abu-El-Sha’s and Rihani, 2007; Andersen et al., 2001; Arnold et al., 1999; Bauer et al., 2006; Carroll et al., 2009; Christiaens et al., 1995; Etchevers et al., 2001; Golaz-Cavazzi et al., 2001; Gomez et al., 2003; Habets et al., 1999; Hanson et al., 2010; Henriksen et al., 2008; Kolditz et al., 2012; Ledoux et al., 2007; Lemieux and Sudicky, 2010; Monteil, 2011; Park et al., 2009; Saleh et al., 2011; Scibek et al., 2007). In addition to these publications, many regional scale models were developed with MODFLOW in the United States and China for integrated water management purposes (Rossman and Zlotnik, 2013; Zhou and Li, 2011). Except for Monteil (2011) and Pryet et al. (Sub.), none of these explicitly focus on distributed stream–aquifer exchanged water flux. Moreover, among DPBMs dedicated to stream–aquifer exchanges, only Monteil (2011) and Pryet et al. (Sub.) performed distributed estimations of stream–aquifer exchanges at the regional scale. These applications exclusively use the conductance model, for which the longitudinal distribution of the conductance along the stream network has to be calibrated (Pryet et al., Sub.).

The conductance model historically assumes vertical fluxes at the stream–aquifer interface (Krause et al., 2012a; Rushton and Tomlinson, 1979; Sophocleous, 2002). The hypothesis of vertical fluxes is discussed by Rushton (2007) based on numerical experiments that showed its limit. Indeed, at the regional scale, stream–aquifer exchanges seem to be more controlled by the horizontal permeability of the aquifer unit, than by the equivalent vertical permeabilities of both the river bed and the aquifer unit. Recently, this formulation of the conductance model proved to be suitable for the calibration of a regional modelling of stream–aquifer exchanges (Pryet et al., Sub.). As formulated by Rushton (2007), Pryet et al. (Sub.) calibrated a correction factor ( $F_{cor}$ , eq.1) :

$$Q = F_{cor} \times K_h \times W \times (H_{riv} - H_A^*) \quad (1)$$

Where  $Q$  [ $\text{m}^3 \text{s}^{-1}$ ] is the stream-aquifer flux,  $H_{riv}$  and  $H_A^*$  [m] are the hydraulic heads in the river and the calculated piezometric head, respectively, and  $W$  [m] the mesh size. The expression  $F_{cor} \times K_h \times W$  represents the conductance coefficient and  $K_h$  [ $\text{m} \cdot \text{s}^{-1}$ ] is the aquifer horizontal permeability and  $F_{cor}$  [–] an adjustable, lumped parameter called correction factor.

This model defines the conductance parameter at the regional scale based on regional properties of the aquifer system. Even if it does not allow a proper simulation of water fluxes for disconnecting systems (Brunner et al., 2009a,b), it allows the simulation of disconnected systems using a maximum infiltrated flux (Pryet et al., Sub.; Saleh et al., 2011). Indeed, stream-aquifer disconnection does not necessary occur when the water table is beneath the clogging layer representing the stream bed (as expressed in MODFLOW, Brunner et al. (2010)), but when the pressure gradient in the unsaturated zone is negligible leading to a minimum pressure at the stream bed interface and a constant stream to aquifer flux (Brunner et al., 2009a). To improve the assessment of the water flux through the unsaturated zone, which develops below the stream bed in case of a disconnected system, the maximal stream to aquifer flux could be defined as a function of both the stream bed properties and the underlying regional aquifer properties. This implies to better understand the implications of heterogeneity and clogging processes in the stream bed on disconnection (Brunner et al., 2011).

To provide accurate estimates, the conductance model has to be constrained by the piezometric head below the river and the surface water elevation. Former applications used a fixed water level throughout the simulation period (Arnold et al., 1999; Chung et al., 2010; Flipo et al., 2007b; Gomez et al., 2003; Ke, 2014; Kim et al., 2008; Monteil, 2011; Perkins and Sophocleous, 1999; Ramireddygari et al., 2000; Thierion et al., 2012). Saleh et al. (2011) showed that this methodology not only leads to biased assessments of stream–aquifer exchanges, but also to biased estimates of the near river piezometric head distributions. In addition, Diem et al. (2014) recently showed that groundwater residence times are also strongly affected by the estimation of in-stream longitudinal water level distributions. These results are due to the fact that stream–aquifer exchange rates adapt very quickly to changes in surface water levels (Koussis et al., 2007; Maier and Howard, 2011; Rosenberry et al., 2013).

Consequently, the simulation of variable surface water levels is of primary importance for the estimation of distributed stream–aquifer exchanges along the stream network at regional scale (Pryet et al., Sub.; Saleh et al., 2011). Saleh et al. (2013) recommend the usage of local 1-D Saint-Venant based hydraulic models to build rating curves for every cell of a coarser regional model (Saleh et al., 2011) that uses simpler in-stream water routing models as RAPID (David et al., 2011). Such models are then coupled with the conductance model to simulate stream–aquifer exchanges at the regional scale along thousands of kilometres of river networks with a 1 km spatial discretisation (see for instance Pryet et al. (Sub.) for such an application along 3250 km of the Paris basin river network).

### 3.5 Conceptual requirements at the continental scale

Russell and Miller (1990) achieved the first global distributed runoff calculation based on a  $4^\circ \times 5^\circ$  grid mesh coupled with a Land Surface Model (LSM) and an Atmospheric Global Circulation Model (AGCM). It appears that even at this scale the river networks play an important role in the circulation models and water transfer time. Since then, few models have been developed to simulate the main river basins in the AGCMs with a grid mesh of  $\sim 1^\circ \times 1^\circ$ , which roughly corresponds to a  $100\text{ km} \times 100\text{ km}$  resolution (Oki and Sud, 1998). Geographical Information Systems (GISs) were used to derive the river networks from Digital Elevation Models (Oki and



Sud, 1998). Jointly RRM (River Routing Models) have been developed with simple transfer approaches, assuming either a steady uniform water velocity at the global scale or a variable water velocity based on simple geomorphological laws and the Manning Formula (Arora and Boer, 1999).

5 Decharme and Douville (2007) implemented the approach with a constant in-river water velocity (assumed to be  $0.5 \text{ m s}^{-1}$ ) within the LSM, today referred to as SURFEX (Masson et al., 2013). Step by step the description of stream–aquifer exchanges was improved by:

- The introduction of a variable in-river water velocity (Decharme et al., 2008).
- A transfer time delay due to the stream–aquifer interface (Decharme et al., 2012).
- 10 – The explicit simulation with a DPBM of the worldwide largest aquifer systems coupled with the explicit simulation of the river networks draining surface basins larger than  $50\,000\text{--}100\,000 \text{ km}^2$  (Vergnes and Decharme, 2012).
- The explicit simulation of stream–aquifer exchanges based on the conductance model on a  $0.5^\circ \times 0.5^\circ$  grid mesh (Vergnes et al., 2012; Vergnes and Decharme, 2012) in agreement  
15 with the continental scale transfer time delay of 30 days introduced by Decharme et al. (2012).

As expected given the numerical experiments of Maxwell and Miller (2005), accounting for groundwater kinetics improves the global hydrological mass balance (Decharme et al., 2010; Alkama et al., 2010; Yeh and Eltahir, 2005). Although the explicit simulation of stream–aquifer  
20 exchanges with the conductance model slightly improves the models' performances in terms of spatio-temporal discharge and real evapotranspiration assessments (Vergnes et al., 2012; Vergnes and Decharme, 2012), the global calibration of the conductance parameter has to take into account the multi-scale structure of the stream–aquifer interfaces. It means that a better assessment, not only of simple DEM derived river networks, but also of the transfer time in  
25 the stream–aquifer interfaces is required, as well as the sub grid definition of dendritic river networks. Coupled with proper scaling procedures (see next section) these approaches seem to be less computationally demanding than the one proposed by Wood et al. (2011) and slightly

less over parametrised, which should permit to better solve the estimation of stream–aquifer exchanges at the continental scale.

### 3.6 Up and downscaling stream–aquifer exchanges

At the regional scale, most of the hydrogeological models are limited to take into account local processes as the effect of near river pumping, or storage in the hyporheic zone, because they require a very fine spatial discretisation, which can be incompatible with the resolution of the model or, at most, drastically decreases the efficiency of the model. Furthermore, the usage of regional models for solving local issues, as well as the reverse, leads to equifinality problems (Beven, 1989; Beven et al., 2011; Ebel and Loague, 2006; Klemes, 1983; Polus et al., 2011), boundary conditions inconsistencies (Noto et al., 2008), or computational burdens (Jolly and Rassam, 2009). The usage of local models for solving regional issues entails the same effects (Aral and Gunduz, 2003, 2006; Wondzell et al., 2009). Therefore, alternative ways of modelling are needed to simulate the behaviour of stream–aquifer interfaces at the regional scale properly (Werner et al., 2006), especially that for a given reach of river the direction of stream–aquifer exchanges can vary longitudinally (Bencala et al., 2011). The concept of nested stream–aquifer interface led to the identification of the river network, and by extension the hyporheic corridor, as the location where to scale models for the accurate simulation of hydrological processes (Sect. 2.6). On the one hand, regional surface–subsurface models allow the simulation of the hyporheic corridor and the regional aquifer. On the other hand, intermediate scale models permit the simulation of hydrological spiralling. It therefore seems relevant to explicitly simulate the alluvial plains in regional model, either with an explicit layer in pseudo 3D models as MODFLOW, or with specific parameters for 3D models based on Richards equations (Sect. 3.1). In this way, regional and intermediate models can be configured in a nested set-up, allowing the identification of model parameters using the regional model for large scale geological heterogeneities and the intermediate scale model for the smaller alluvial plain heterogeneities. This set-up is in agreement with the nested heterogeneities defined by Refsgaard et al. (2012). The coupling between a regional scale model and an intermediate scale model of the alluvial plain

requires to ensure the conservation of the mass between the two models. An iterative procedure is developed to achieve this objective (Fig. 2). At each iteration  $j$ , the procedure consists of:

1. Run the regional model.
2. Define the boundary conditions of the intermediate model with the outputs of the regional model.
3. Downscale the regional piezometric head distribution.
4. Run the intermediate model.
5. Upscale the conductance parameter at the regional scale.

The final objective of the procedure is to equalize the stream–aquifer exchanges estimated at both the regional and the intermediate scales. A pre-requisite for the application of this iterative procedure is the definition of the conductance parameter at the intermediate scale.

### 3.6.1 The conductance model at the intermediate scale

To scale the conductance model at the regional scale properly, the correction factor,  $F_{cor}$  in eq. 1, must be defined at the intermediate scale analytically. The conductance model historically assumes vertical fluxes at the stream–aquifer interface (Krause et al., 2012a; Rushton and Tomlinson, 1979; Sophocleous, 2002), so that it seems to be a proper framework for determining up and down scaling properties of stream–aquifer interfaces (Boano et al., 2009; Engdahl et al., 2010). However, this hypothesis becomes less valid for a coarse grid mesh (Mehl and Hill, 2010; Rushton, 2007). In such a case, Brunner et al. (2010) point out that the calculated piezometric head at the stream–aquifer interface does not represent the piezometric head in the hyporheic zone, but the near stream aquifer piezometric head (Fig. 3). This is due to the fact that state variables are discrete values associated to an area by an averaging over the cell (finite differences and volumes), or over the surface around the node (finite elements). Stream–aquifer exchanges are then calculated across a surface, which encompasses the river. As a consequence, the averaging induces uncertainties in the assessment of head below the river. The conductance

parameter hence is scale dependent (Vermeulen et al., 2006). Morel-Seytoux (2009) proposed to relate the exchange flux to the near-river piezometric head,  $h_c$ , (eq. 2), for which it can be assumed that the distance,  $d$ , from the river is long enough to reach the validity domain of the Dupuit-Forchheimer approximation. Using the mass conservation between the local flux at the interface and the regional flux, Morel-Seytoux (2009) expresses the flux as follows:

$$Q = k_i w \frac{1}{\frac{1}{\alpha R_w k_{sb}} [(2\alpha k_i - k_{sb})e_{sb} + k_{sb}e_{aq}] + \frac{d}{e_{aq}}} \times (h_{riv} - h_c) \quad (2)$$

Where  $k_i$  and  $k_{sb}$  [ $\text{m}\cdot\text{s}^{-1}$ ] are the horizontal aquifer permeability and vertical stream bed permeability, respectively.  $e_{aq}$  and  $e_{sb}$  [m] are the aquifer and stream-bed thicknesses.  $\alpha$  [–] is the aquifer anisotropy factor.  $R_w$  [m] is the river width,  $w$  the intermediate mesh size.

Citing Bouwer (1969) and Haitjema (1987), Morel-Seytoux (2009) indicates that  $d$  ranges between twice the thickness of the underlying aquifer unit and ten times the river width. This formulation thus refers to the intermediate scale, where the cell sizes have to be adapted to  $d$  and to the averaging of the piezometric head to ensure that the cell head value,  $h_A^*$ , corresponds to  $h_c$ .

Assuming that  $h_c \approx h_A^*$ , which can be substituted in eq. 2, the correcting factor becomes dependent on the mesh size,  $w$ :

$$f_{cor}(w) = \frac{1}{\frac{1}{\alpha R_w k_{sb}} [(2\alpha k_i - k_{sb})e_{sb} + k_{sb}e_{aq}] + \frac{f(w)}{e_{aq}}} \quad (3)$$

Where  $f$  denotes the mathematical scaling function of the  $i^{th}$  cell size, which links  $d$  and  $w$ . Under simplifying assumptions,  $f$  may be a linear function (Bouwer, 1969; Haitjema, 1987). A proper simulation of stream–aquifer exchanges therefore implies an adaptive mesh to scale the river cells to the river network from small upstream tributaries to large downstream rivers. The mesh can be derived from a DEM, which is a source of uncertainties for the assessment of stream–aquifer exchanges (Käser et al., 2014).

### 3.6.2 Downscaling the piezometric head

The downscaling procedure is adapted from Chen and Durlofsky (2006) and Mehl and Hill (2002). Assuming that the regional discharge is homogeneously distributed along the regional cells border, the intermediate piezometric head can be linearly interpolated based on the local properties of the cell coupled with the regional gradient (eq. 4):

$$h_n = h_1 + \frac{K_{eq}}{k_{eq,n}} \frac{x_n - X_1}{X_2 - X_1} (H_2 - H_1), X_1 \leq x_n \leq X_2 \quad (4)$$

Where  $X$  denotes the coordinate of the regional mesh, and  $x$  the one of the intermediate one.  $K_{eq}$  [ $\text{m}\cdot\text{s}^{-1}$ ] is the regional equivalent permeability,  $k_{eq,n}$  the equivalent permeability of the intermediate cells between  $X_1$  and  $x_n$ .  $H_n$  [m] is the regional piezometric head at point  $X_n$ , and  $h_n$  [m] the intermediate piezometric heads at point  $x_n$ . Assuming that  $h_1=H_1$ , the local piezometric head at point  $x_n$  becomes a function of regional heads. However, due to the assumptions, the downscaling procedure becomes less accurate when the dimensional difference between regional and intermediate mesh grid is high ( $W \gg w$ ).

### 3.6.3 Upscaling the conductance at the regional scale

While methodologies for the upscaling of permeability distributions already exist (Renard, 1997), it remains unclear how to upscale the conductance parameter. In order to study the scaling effects on  $F_{cor}$  (see eq. 1) an iterative modelling procedure is proposed (Fig. 2). At iteration  $j$ , the consistency of fluxes between scales is defined as follows:

$$Q_r^j = \sum_{i \in \Omega_r} q_i^j \quad (5)$$

Where  $i$  denotes the intermediate cells,  $\Omega_r$  a regional cell,  $Q_r^{j+1}$  the regional stream-aquifer flow resulting from the upscaling of iteration  $j$  and  $q_i^j$  the intermediate stream-aquifer flow at

iteration  $j$ . For  $\left|Q_r^{j+1} - Q_r^j\right| < \epsilon$ , the procedure converges,  $\epsilon$  being the convergence criterium. Otherwise, new regional conductance values are calculated using eq. 5:

$$\forall \Omega_r \in \Omega, F_{cor,r}^{j+1} = \frac{\sum_{i \in \Omega_r} q_i}{K_{eq,r}^j \cdot W \cdot (H_{riv,r} - H_r^{*,j})} \quad (6)$$

Where  $\Omega$  is the regional mesh,  $\Omega_r$  the  $r^{th}$  regional cell,  $K_{eq,r}^j$  [ $\text{m}^3 \text{s}^{-1}$ ] the estimated equivalent permeability of the  $r^{th}$  cell at iteration  $j$ ,  $W$  [m] the mesh size,  $H_{riv,r}$  and  $H_r^{*,j}$  [m] the river and piezometric heads of the  $r^{th}$  cell at the  $j^{th}$  iteration. The equivalent permeability can be updated as follows:

$$\forall \Omega_r \in \Omega, K_{eq,r}^{j+1} = - \frac{\int_{S_r} u_i^j dS}{\nabla \left( \frac{1}{V_r} \int_{V_r} h_i^{*,j} dV \right)} \quad (7)$$

Where  $S_r$  and  $V_r$  are the cross section and volume of the  $r^{th}$  regional cell, and  $\nabla$  denotes the gradient.

The study of the evolution of both  $F_{cor}$  and permeabilities under various hydrological conditions should be very informative concerning the feasibility of the conductance parameter scaling laws.

#### 4 The MIM methodology: from concepts to practice

The methodology of Mouhri et al. (2013) is hereby graphically developed, scaling in space the three pools of methods (measurements-interpolation-modelling) needed to fully understand stream-aquifer interfaces at various scales. The outcome is the MIM (Measurement-Interpolation-Modelling) methodological tool, which localises in space the type of stream-aquifer interface that can be studied by a given approach (see the five scales of interest in Fig. 4: local, reach,

watershed, regional and continental scales). From Fig. 5, it clearly appears that a better understanding of the functioning of nested stream–aquifer interfaces relies on the combination of models, in-situ networks, space borne data and interpolation techniques. MIM has the ability to clearly display the representativeness of a specific research within an holistic framework dedicated to the study of nested stream–aquifer interactions at all scales. It is a valuable tool for the definition of combined field measurements and modelling approaches. It permits the determination of the dimension of the objects, that need to be studied, to scale processes. This is illustrated in Sect. 4.1, where the size of a river reach relevant for testing up and downscaling strategies is identified. Space borne data coupled with models can also be displayed in the MIM space (Sect. 4.2), without identifying methodologies to scale processes from the watershed to the regional and continental scales (Sect. 4.3).

#### **4.1 Coupled in situ-modelling approaches: from local to watershed scale**

Fig. 5 displays the types of stream–aquifer interfaces that can be studied by the multi-scale sampling system developed by Mouhri et al. (2013), based on LOcal MONitoring Stations (LOMOS) distributed along a 6 km river network covering a 40 km<sup>2</sup> watershed. As illustrated in Fig. 5, a single LOMOS allows the monitoring, based on water pressure and temperature measurements, of stream cross-sections ranging from 0.1–~ 10 m. LOMOS data are used with coupled thermo-hydro models to determine the properties of the aquifer units and the river beds (Mouhri et al., 2013), which can be used to assess the value of the conductance at the watershed scale (Mehl and Hill, 2002; Morel-Seytoux, 2009; Vermeulen et al., 2006; Rushton, 2007). Assuming that it is possible to distribute multiple LOMOS data, and the associated conductance values, along a stream network (for instance using FO-DTS – Fibre Optic Distributed Thermal Sensors), local in situ data become the basis of a broader surface–subsurface modelling at the watershed scale. The upscaling is hence structured around stream cross-sections of ~ 1–10m with a representative reach length in the order of magnitude of 10-100 m (Fig. 5). The next experiment, aiming at determining the upscaling law for the conductance coefficient at the watershed scale, will thus be designed based on the specificities of a river stretch at this scale (i.e., the study of a riffle-pool sequence). In this specific case, the spatial rationale behind the new experiment is

an outcome of the MIM analysis, which defines the size of the objects to be studied. Identifying the size of the objects of interest also provides guidances for the determination of a relevant mesh size, which in return imposes locations where interpolations need to be performed.

## 4.2 Space borne approaches: regional and continental scales

5 Current and future satellite data are used to observe the continental water cycle and better constrain LSM (Sect. 3.5). They are thus located at the continental and regional scales on the measurement axis of the MIM space (Fig. 5). Downscaling methods are also being developed to refine current coarse optical imagery into finer resolution products, or to average data over a spatial object (for instance a river reach) to improve their accuracy (Aires et al., 2013). These  
10 methods are indicated on the interpolation axis in Fig. 5. Measurements and interpolated data can both be used in data assimilation frameworks.

Some attempts have been undertaken to force or assimilate satellite-based observations of different components of the water cycle to improve LSM water budget and river routing scheme: over the Mississippi basin (Zaitchik et al., 2008), the Arkansas river basin (Pan et al., 2008), the  
15 Amazon basin (Getirana et al., 2013), the Brahmaputra river (Michailovsky et al., 2013), and over 10 large river basins widely spread in latitude (Sahoo et al., 2011). Furtheron, Andreadis et al. (2007), Durand et al. (2008) and Biancamaria et al. (2011) have developed different assimilation schemes to correct hydrodynamic model parameters and variables using virtual SWOT observations. They have shown the potential of this new kind of spatially distributed dataset to  
20 better constrain hydraulic models.

As, stream-aquifer exchanges are very responsive to in-river water level fluctuations (Diem et al., 2014; Koussis et al., 2007; Maier and Howard, 2011; Saleh et al., 2011), the assimilation of space borne data and data products in numerical models, like the ones used by Pryet et al. (Sub.), Saleh et al. (2011) and Vergnes and Decharme (2012) (Fig. 5), should enable a better  
25 understanding of stream–aquifer interaction at very large scale.



### 4.3 Further challenges

Albeit being a breakthrough in terms of surface coverage, SWOT requirements impose restrictions on observable stream–aquifer interfaces, which can be visualised in the MIM space (Fig. 5). As SWOT will provide information for basins in average larger than 50 000 km<sup>2</sup> (Sect. 2.5), it appears in the MIM space that SWOT applications do not completely overlap other methodologies as the one previously proposed to scale processes between the local and the watershed scales. To overcome this issue, a projected airborne campaign, called AirSWOT, with a main payload similar to the one of SWOT, but with a higher spatial resolution (metric), will (i) help to determine whether regular airborne campaigns can provide a valuable tool to connect the watershed scale to the regional/continental one with the help of multi-scale modelling tools (cf. Sect. 3.6) and (ii) permit to design new in situ monitoring stations derived from the LOMOS defined by Mouhri et al. (2013) but dedicated to the watershed/regional scale, which means for river cross-sections larger than a few decametres, with a water depth of a few metres.

## 5 Conclusions

conclusions

Based on a systemic approach of hydrosystems, we propose to consider the stream–aquifer interface as a cascade of nested objects. These nested objects depend on the scale of interest. At the watershed, regional and continental scales, they consist in alluvial plains, while within the alluvial plain itself (intermediate-reach scale), they consist in hyporheic corridors including riparian zones. Within the riparian zone (local scale), they consist in HZ, and so on until the water column–benthos interface within the river itself.

Estimating stream–aquifer exchanges therefore requires to combine the modelling of various processes with different characteristic times. Stakeholders need more detailed information at the regional scale, as it is the water resources management scale. However, depending on the desired refinement of the modelling at the regional scale (i.e., number of processes taken into account), the estimation of stream–aquifer exchanges may vary significantly. It is thus crucial to develop

modelling tools which can precisely simulate stream–aquifer exchanges at the reach scale within a regional basin. These innovative modelling tools should be multi-scale modelling platforms, which implement the concept of nested stream–aquifer interfaces as the core of the coupling between regional and intermediate scale models: the former simulating the basin, the latter the alluvial plains. To achieve this, it was shown that processes scaling should be performed around the river network.

To fully estimate stream–aquifer exchanges, this multi-scale modelling tool has to be coupled with observation devices. The MIM methodology provides a powerful framework to jointly develop observation infrastructures and modelling tools, allowing the localisation of the global structure in the scale space. Although the scaling of processes was identify around the reach scale from the local to the watershed scale, airborne campaigns, as well as regional in situ systems, will have to be rationalised to connect the watershed to the regional and continental scales, which can be observed with a large diversity of satellite instruments.

*Acknowledgements.* This research is funded by CNES TOSCA SWOT project, the ONEMA NAPROM project, and structured within the “Stream–Aquifer Interfaces” workpackage of the PIREN Seine research program. We kindly thank Angela Armakola for revising the English version of the paper, as well as the two anonymous reviewers for their fruitful comments, which helped improving the paper significantly.

## References

references

Abbott, M., Bathurst, J., Cunge, J., O’Connell, P., and Rasmussen, J.: An introduction to the European Hydrological System. 1. History and philosophy of a physically based distributed modelling system, *Journal of Hydrology*, 87, 45–59, 1986.

Abu-El-Sha’s, W. and Rihani, J.: Application of the high performance computing techniques of parflow simulator to model groundwater flow at Azraq basin, *Water Resources Management*, 21, 409–425, doi:<http://dx.doi.org/10.1007/s11269-006-9023-5>, 2007.

Aires, F., Prigent, C., Papa, F., and Cretaux, J.-F.: Downscaling of the inundation extent over the Niger delta using a combination of multi-wavelength and Modis retrievals, *Journal of Hydrometeorol-*

- ogy, doi:<http://dx.doi.org/http://dx.doi.org/10.1175/JHM-D-13-032.1><http://dx.doi.org/10.1175/JHM-D-13-032.1>, 2013.
- Alkama, R., Decharme, B., Douville, H., Becker, M., Cazenave, A., Sheffield, J., Voldoire, A., Tyteca, S., and Moigne, P. L.: Global Evaluation of the ISBA-TRIP Continental Hydrological System, Part I: Comparison to GRACE Terrestrial Water Storage Estimates and In Situ River Discharges, *Journal of Hydrometeorology*, 11, 583–600, 2010.
- Allen, J.: The classification of cross-stratified units, with notes on their origin, *Sedimentology*, 2, 93–114, doi:<http://dx.doi.org/10.1111/j.1365-3091.1963.tb01204.x>[10.1111/j.1365-3091.1963.tb01204.x](http://dx.doi.org/10.1111/j.1365-3091.1963.tb01204.x), 1963.
- Allen, J.: On bed forms and palaeocurrents, *Sedimentology*, 6, 153–190, doi:<http://dx.doi.org/10.1111/j.1365-3091.1966.tb01576.x>[10.1111/j.1365-3091.1966.tb01576.x](http://dx.doi.org/10.1111/j.1365-3091.1966.tb01576.x), 1966.
- Andersen, J., Refsgaard, J., and Jensen, K.: Distributed hydrological modelling of the Senegal River Basin - model construction and validation, *Journal of Hydrology*, 247, 200–214, 2001.
- Anderson, M. P.: Heat as a Ground Water Tracer, *Ground Water*, 43, 951–968, doi:<http://dx.doi.org/10.1111/j.1745-6584.2005.00052.x>[10.1111/j.1745-6584.2005.00052.x](http://dx.doi.org/10.1111/j.1745-6584.2005.00052.x), 2005.
- Anderson, M., P., Aiken, J., S., Webb, E., K., and Mickelson, D., M.: Sedimentology and hydrogeology of two braided stream deposits, *Sedimentary Geology*, 129, 187–199, doi:[http://dx.doi.org/10.1016/S0037-0738\(99\)00015-9](http://dx.doi.org/10.1016/S0037-0738(99)00015-9)[10.1016/S0037-0738\(99\)00015-9](http://dx.doi.org/10.1016/S0037-0738(99)00015-9), 1999.
- Anderson, W. P., Storniolo, R. E., and Rice, J. S.: Bank thermal storage as a sink of temperature surges in urbanized streams, *Journal of Hydrology*, 409, 525–537, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.08.059>[10.1016/j.jhydrol.2011.08.059](http://dx.doi.org/10.1016/j.jhydrol.2011.08.059), 2011.
- Andreadis, K., Clark, E., Lettermaier, D., and Alsdorf, D.: Prospects for river discharge and depth estimation through assimilation of swath-altimetry into a raster-based hydrodynamics model, *Geophys. Res. Lett.*, 34, L10403, 2007.
- Andreadis, K., Schumann, G., and Pavelsky, T.: A simple global river bankfull width and depth database, *Water Resources Research*, 49, doi:<http://dx.doi.org/10.1002/wrcr.20440>[10.1002/wrcr.20440](http://dx.doi.org/10.1002/wrcr.20440), 2013.
- Anibas, C., Fleckenstein, J., Volze, N., Buis, K., Verhoeven, R., Meire, P., and Batelaan, O.: Transient or steady-state? Using vertical temperature profiles to quantify groundwater-surface water exchange, *Hydrological Processes*, 23, 2165–2177, doi:<http://dx.doi.org/10.1002/hyp.7289>[10.1002/hyp.7289](http://dx.doi.org/10.1002/hyp.7289), 2009.
- Anibas, C., Verbeiren, B., Buis, K., Chormański, J., De Doncker, L., Okruszko, T., Meire, P., and Batelaan, O.: A hierarchical approach on groundwater-surface water interaction in wetlands

- along the upper Biebrza River, Poland, *Hydrology and Earth System Sciences*, 16, 2329–2346, doi:<http://dx.doi.org/10.5194/hess-16-2329-2012>, 2012.
- Aral, M. and Gunduz, O.: Scale effects in large scale watershed modeling, in: *International Conference on Water and Environment*, edited by Singh, V. and Yadava, R., pp. 37–51, Allied Publishers, India, 2003.
- Aral, M. and Gunduz, O.: *Watershed Models*, chap. Large-Scale Hybrid Watershed Modeling, pp. 75–95, Taylor & Francis, Kentucky, USA, 2006.
- Arnold, J., Srinivasan, R., Muttliah, R., and Allen, P.: Continental scale simulation of the hydrologic balance, *Journal of the American Water Resources Association*, 35, 1037–1051, 1999.
- Arora, V. and Boer, G.: A variable velocity flow routing algorithm for GCMs, *J. Geophys. Res.*, 104, 30 965–30 979, 1999.
- Bardini, L., Boano, F., Cardenas, M., Revelli, R., and Ridolfi, L.: Nutrient cycling in bedform induced hyporheic zones, *Geochimica et Cosmochimica Acta*, 84, 47–61, doi:<http://dx.doi.org/10.1016/j.gca.2012.01.025>, 2012.
- Bauer, P., Gumbricht, T., and Kinzelbach, W.: A regional coupled surface water/groundwater model of the Okavango Delta, Botswana, *Water Resources Research*, 42, W04 403, doi:<http://dx.doi.org/10.1029/2005WR004234>, 2006.
- Becker, M., Georgian, T., Ambrose, H., Siniscalchi, J., and Fredrick, K.: Estimating flow and flux of ground water discharge using water temperature and velocity, *Journal of Hydrology*, 296, 221 – 233, doi:<http://dx.doi.org/10.1016/j.jhydrol.2004.03.025>, 2004.
- Bencala, K., Gooseff, M., and Kimball, B.: Rethinking hyporheic flow and transient storage to advance understanding of stream-catchment connections, *Water Resources Research*, 47, W00H03, doi:<http://dx.doi.org/10.1029/2010WR010066>, 2011.
- Bendjoudi, H., Weng, P., Guérin, R., and Pastre, J.: Riparian wetlands of the middle reach of the Seine river (France): historical development, investigation and present hydrologic functioning. A case study, *Journal of Hydrology*, 263, 131–155, 2002.
- Bertrand, G., Goldscheider, N., Gobat, J.-M., and Hunkeler, D.: Review: From multi-scale conceptualization to a classification system for inland groundwater-dependent ecosystems, *Hydrogeology Journal*, 20, 5–25, doi:<http://dx.doi.org/10.1007/s10040-011-0791-5>, 2012.
- Beven, K.: Changing ideas in hydrology. The case of physically-based model, *Journal of Hydrology*, 105, 157–172, 1989.

Beven, K., Smith, P., and Wood, A.: On the colour and spin of epistemic error (and what we might do about it), *Hydrology and Earth System Sciences*, 15, 3123–3133, doi:<http://dx.doi.org/10.5194/hess-15-3123-2011>, 2011.

5 Biancamaria, S., Andreadis, K., Durand, M., Clark, E., Rodriguez, E., Mognard, N., Alsdorf, D., Lettenmaier, D., and Oudin, Y.: Preliminary characterization of SWOT hydrology error budget and global capabilities, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 3, 6–19, doi:<http://dx.doi.org/10.1109/JSTARS.2009.2034614>, 2010.

10 Biancamaria, S., Durand, M., Andreadis, K., Bates, P., Boone, A., Mognard, N., Rodríguez, E., Alsdorf, D., Lettenmaier, D., and Clark, E.: Assimilation of virtual wide swath altimetry to improve Arctic river modeling, *Remote Sens. Environ.*, 115, 373–381, 2011.

Billen, G. and Garnier, J.: Nitrogen transfers through the Seine drainage network: a budget based on the application of the 'Riverstrahler' model, *Hydrobiologia*, 410, 139–150, 2000.

15 Bixio, A., Gambolati, G., Paniconi, C., Putti, M., Shestopalov, V., Bublías, V., Bohuslavsky, A., Kasteltseva, N., and Rudenko, Y.: Modeling groundwater-surface water interactions including effects of morphogenetic depressions in the Chernobyl exclusion zone, *Environ. Geol.*, 42, 162–177, doi:<http://dx.doi.org/10.1007/s00254-001-0486-7>, 2002.

Blöschl, G. and Sivapalan, M.: Scale issues in hydrological modelling: A review, *Hydrological Processes*, 9, 251–290, 1995.

20 Boano, F., Camporeale, C., Revelli, R., and Ridolfi, L.: Sinuosity-driven hyporheic exchange in meandering rivers, *Geophys. Res. Lett.*, 33, L18406, doi:<http://dx.doi.org/10.1029/2006GL027630>, 2006.

Boano, F., Revelli, R., and Ridolfi, L.: Quantifying the impact of groundwater discharge on the surface-subsurface exchange, *Hydrological Processes*, 23, 2108–2116, doi:<http://dx.doi.org/10.1002/hyp.7278>, 2009.

25 Boano, F., Camporeale, C., and Revelli, R.: A linear model for coupled surface-subsurface flow in meandering stream, *Water Resources Research*, 46, W07535, doi:<http://dx.doi.org/10.1029/2009WR008317>, 2010a.

30 Boano, F., Demaria, A., Revelli, R., and Ridolfi, L.: Biogeochemical zonation due to intrameander hyporheic flow, *Water Resources Research*, 46, W02511, doi:<http://dx.doi.org/10.1029/2008WR007583>, 2010b.

Bouwer, H.: Theory of seepage from open channels, vol. 5 of *Advances in Hydroscience*, Academic Press, 1969.

Bridge, J. and Best, J.: Preservation of planar laminae due to migration of low-relief bed waves over aggrading upper-stage plane beds: comparison of experimental data with theory, *Sedimentology*, 44, 253–262, 1997.

5 Bridge, J., S.: Fluvial facies models: Recent developments, chap. Facies models revisited, pp. 85–170, SEPM, Special Publication 84, 2006.

Bristow, C., S. and Best, J., L.: Braided rivers: perspectives and problems, *Geological Society, London, Special Publications*, 75, 1–11, doi:<http://dx.doi.org/10.1144/GSL.SP.1993.075.01.0110.1144/GSL.SP.1993.075.01.01>, 1993.

10 Brunke, M. and Gonser, T.: The ecological significance of exchange processes between rivers and groundwater, *Freshwater Biology*, 37, 1–33, doi:<http://dx.doi.org/10.1046/j.1365-2427.1997.00143.x>, 1997.

Brunner, P., Li, H., Kinzelbach, W., Li, W., and Dong, X.: Extracting phreatic evaporation from remotely sensed maps of evapotranspiration, *Water Resources Research*, 44, W08428, doi:<http://dx.doi.org/10.1029/2007WR006063>, 2008.

15 Brunner, P., Cook, P., and Simmons, C.: Hydrogeologic controls on disconnection between surface water and groundwater, *Water Resources Research*, 45, W01422, doi:<http://dx.doi.org/10.1029/2008WR006953>, 2009a.

Brunner, P., Simmons, C., and Cook, P.: Spatial and temporal aspects of the transition from connection to disconnection between rivers, lakes and groundwater, *Journal of Hydrology*, 376, 159–169, doi:<http://dx.doi.org/10.1016/j.jhydrol.2009.07.023>, 2009b.

20 Brunner, P., Simmons, C., Cook, P., and Therrien, R.: Modeling Surface Water-Groundwater Interaction with MODFLOW: Some Considerations, *Ground Water*, 48, 174–180, doi:<http://dx.doi.org/10.1111/j.1745-6584.2009.00644.x>, 2010.

Brunner, P., Cook, P., and Simmons, C.: Disconnected Surface Water and Groundwater: From Theory to Practice, *Ground Water*, 49, 460–467, doi:<http://dx.doi.org/10.1111/j.1745-6584.2010.00752.x>, 2011.

25 Burkholder, B. K., Grant, G. E., Haggerty, R., Khangaonkar, T., and Wampler, P. J.: Influence of hyporheic flow and geomorphology on temperature of a large, gravel-bed river, Clackamas River, Oregon, USA, *Hydrological Processes*, 22, 941–953, doi:<http://dx.doi.org/10.1002/hyp.6984>, 2008.

30 Burt, T.: A third paradox in catchment hydrology and biogeochemistry: decoupling in the riparian zone, *Hydrological Processes*, 19, 2087–2089, doi:<http://dx.doi.org/10.1002/hyp.5904>, 2005.

- Burt, T., Pinay, G., Matheson, F., Haycock, N., Butturini, A., Clement, J., Danielescu, S., Dowrick, D., Hefting, M., Hillbricht-Ilkowska, A., and Maitre, V.: Water table fluctuations in the riparian zone: comparative results from a pan-European experiment, *Journal of Hydrology*, 265, 129–148, 2002.
- 5 Calmant, S., Seyler, F., and Cretaux, J.-F.: Monitoring Continental Surface Waters by Satellite Altimetry, *Survey in Geophysics*, 29, 247–269, 2008.
- Calver, A.: Riverbed Permeabilities: Information from Pooled Data, *Ground Water*, 39, 546–553, doi:<http://dx.doi.org/10.1111/j.1745-6584.2001.tb02343.x>, 2001.
- 10 Cardenas, M.: The effect of river bend morphology on flow and timescales of surface water–groundwater exchange across pointbars, *Journal of Hydrology*, 362, 134–141, doi:<http://dx.doi.org/10.1016/j.jhydrol.2008.08.018>, 2008a.
- Cardenas, M.: Surface water-groundwater interface geomorphology leads to scaling of residence times, *Geophys. Res. Lett.*, 35, doi:<http://dx.doi.org/10.1029/2008GL033753>, 2008b.
- 15 Cardenas, M.: Stream-aquifer interactions and hyporheic exchange in gaining and losing sinuous streams, *Water Resources Research*, 45, W06469, doi:<http://dx.doi.org/10.1029/2008WR007651>, 2009a.
- Cardenas, M.: A model for lateral hyporheic flow based on valley slope and channel sinuosity, *Water Resources Research*, 45, W01501, doi:<http://dx.doi.org/10.1029/2008WR007442>, 2009b.
- 20 Cardenas, M. and Wilson, J.: Hydrodynamics of coupled flow above and below a sediment-water interface with triangular bedforms, *Advances in Water Resources*, 30, 301–313, doi:<http://dx.doi.org/10.1016/j.advwatres.2006.06.009>, 2007a.
- Cardenas, M. and Wilson, J.: Dunes, turbulent eddies, and interfacial exchange with permeable sediments, *Water Resources Research*, 43, W08412, doi:<http://dx.doi.org/10.1029/2006WR005787>, 2007b.
- 25 Cardenas, M. and Wilson, J.: Exchange across a sediment-water interface with ambient groundwater discharge, *Journal of Hydrology*, 346, 69–80, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.08.019>, 2007c.
- 30 Cardenas, M., Wilson, J., and Zlotnik, V.: Impact of heterogeneity, bed forms, and stream curvature on subchannel hyporheic exchange, *Water Resources Research*, 40, W08307, doi:<http://dx.doi.org/10.1029/2004WR003008>, 2004.

- Carleton, J. and Montas, H.: An analysis of performance models for free water surface wetlands, *Water Research*, 44, 3595–3606, doi:<http://dx.doi.org/10.1016/j.watres.2010.04.008>, 2010.
- 5 Carroll, R., Pohll, G., and Hershey, R.: An unconfined groundwater model of the Death Valley Regional Flow System and a comparison to its confined predecessor, *Journal of Hydrology*, 373, 316–328, doi:<http://dx.doi.org/10.1016/j.jhydrol.2009.05.006>, 2009.
- Chen, D. and MacQuarrie, K.: Numerical simulation of organic carbon, nitrate, and nitrogen isotope behavior during denitrification in a riparian zone, *Journal of Hydrology*, 293, 235–254, 2004.
- Chen, X. and Chen, X.: Sensitivity analysis and determination of streambed leakance and aquifer hydraulic properties, *Journal of Hydrology*, 284, 270–284, 2003.
- 10 Chen, Y. and Durllofsky, L.: Adaptive local-global upscaling for general Flow scenarios in Heterogeneous formations, *Transport in Porous Media*, 62, 157–185, 2006.
- Christiaens, K., Vanclooster, M., Mallants, D., Xevi, E., and Feyen, J.: Modelling of the water and nutrient cycle at the catchment scale using the European Hydrological System SHE 2: Nitrogen Balance, *Water*, 81, 98, 1995.
- 15 Chung, I.-M., Kim, N.-W., Lee, J., and Sophocleous, M.: Assessing distributed groundwater recharge rate using integrated surface water-groundwater modelling: application to Mihocheon watershed, South Korea, *Hydrogeology Journal*, 18, 1253–1264, doi:<http://dx.doi.org/10.1007/s10040-010-0593-1>, 2010.
- 20 Conan, C., Bouraoui, F., Turpin, N., de Marsily, G., and Bidoglio, G.: Modeling Flow and Nitrate Fate at Catchment Scale in Brittany (France), *J. Environ. Qual.*, 32, 2026–2032, 2003.
- Conant, B.: Delineating and Quantifying Ground Water Discharge Zones Using Streambed Temperatures, *Ground Water*, 42, 243–257, doi:<http://dx.doi.org/10.1111/j.1745-6584.2004.tb02671.x>, 2004.
- 25 Constantz, J.: Heat as a tracer to determine streambed water exchanges, *Water Resources Research*, 44, 1–20, doi:<http://dx.doi.org/10.1029/2008WR006996>, 2008.
- Constantz, J., Stewart, A., Niswonger, R., and Sarma, L.: Analysis of temperature profiles for investigating stream losses beneath ephemeral channels, *Water Resources Research*, 38-12, 1316, doi:<http://dx.doi.org/10.1029/2001WR001221>, 2002.
- 30 Constantz, J., Eddy-Miller, C., Wheeler, J., and Essaid, H.: Streambed exchanges along tributary streams in humid watersheds, *Water Resources Research*, 49, 2197–2204, doi:<http://dx.doi.org/10.1002/wrcr.20194>, 2013.



- Cretaux, J.-F., Berge-Nguyen, M., Leblanc, M., Rio, R. A. D., Delclaux, F., Mognard, N., Lion, C., Pandey, R.-K., Tweed, S., Calmant, S., and Maisongrande, P.: Flood mapping inferred from remote sensing data, *International Water Technology Journal*, 1, 48–62, 2011.
- 5 Crispell, J. and Endreny, T.: Hyporheic exchange flow around constructed in-channel structures and implications for restoration design, *Hydrological Processes*, 23, 1158–1168, doi:<http://dx.doi.org/10.1002/hyp.7230>, 2009.
- Curie, F., Ducharme, A., Sebilo, M., and Bendjoudi, H.: Denitrification in a hyporheic riparian zone controlled by river regulation in the Seine river basin (France), *Hydrological Processes*, 23, 655–664, doi:<http://dx.doi.org/10.1002/hyp.7161>, 2009.
- 10 Dahl, M., Nilsson, B., Langhoff, J., and Refsgaard, J.: Review of classification systems and new multi-scale typology of groundwater-surface water interaction, *Journal of Hydrology*, 344, 1–16, 2007.
- Dahm, C., Grimm, N., Marmonier, P., Valett, H., and Vervier, P.: Nutrient dynamics at the interface between surface waters and groundwaters, *Freshwater Biology*, 40, 427–451, doi:<http://dx.doi.org/10.1046/j.1365-2427.1998.00367.x>, 1998.
- 15 Dahm, C., Baker, M., Moore, D., and Thibault, J.: Coupled biogeochemical and hydrological responses of streams and rivers to drought, *Freshwater Biology*, 48, 1219–1231, doi:<http://dx.doi.org/10.1046/j.1365-2427.2003.01082.x>, 2003.
- Dalrymple, R., W.: Incised valleys in time and space: an introduction to the volume and an examination of the controls on valley formation and filling, chap. Incised valleys in time and space, pp. 5–12, SEPM, Special Publication 85, doi:<http://dx.doi.org/10.2110/pec.06.85.0005>, 2006.
- Datry, T., Dole-Olivier, M., Marmonier, P., Claret, C., Perrin, J., Lafont, M., and Breil, P.: La zone hyporhéique, une composante à ne pas négliger dans l'état des lieux et la restauration des cours d'eau, *Ingénieries - E A T*, 54, 3–18, 2008.
- 25 David, C., Habets, F., Maidment, D., and Yang, Z.-L.: RAPID applied to the SIM-France model, *Hydrological Processes*, 25, 3412–3425, doi:<http://dx.doi.org/10.1002/hyp.8070>, 2011.
- de Marsily, G., Ledoux, E., Levassor, A., Poitrinal, D., and Salem, A.: Modelling of large multilayered aquifer systems: Theory and applications, *Journal of Hydrology*, 36, 1–34, 1978.
- Decharme, B., Douville, H., Prigent, C., Papa, F., and Aires, F.: A new river flooding scheme for global climate applications: Off-line evaluation over South America, *J. Geophys. Res.*, 113, D11 110, doi:<http://dx.doi.org/10.1029/2007JD009376>, 2008.
- 30 Decharme, B., Alkama, R., Douville, H., Becker, M., and Cazenave, A.: Global Evaluation of the ISBA-TRIP Continental Hydrological System. Part II: Uncertainties in River Routing Simulation

- Related to Flow Velocity and Groundwater Storage, *Journal of Hydrometeorology*, 11, 601–617, doi:<http://dx.doi.org/10.1175/2010JHM1212.110>, 2010.
- Decharme, B., Alkama, R., Papa, F., Faroux, S., Douville, H., and Prigent, C.: Global off-line evaluation of the ISBA-TRIP flood model, *Clim. Dyn.*, 38, 1389–1412, doi:<http://dx.doi.org/10.1007/s00382-011-1054-9>, 2012.
- Decharme, R. and Douville, H.: Global validation of the ISBA sub-grid Hydrology, *Clim. Dyn.*, 29, 21–37, doi:<http://dx.doi.org/10.1007/s00382-006-0216-7>, 2007.
- Deforet, T., Marmonier, P., Rieffel, D., Crini, N., Giraudoux, P., and Gilbert, D.: Do parafluvial zones have an impact in regulating river pollution? Spatial and temporal dynamics of nutrients, carbon, and bacteria in a large gravel bar of the Doubs River (France), *Hydrobiologia*, 623, 235–250, doi:<http://dx.doi.org/10.1007/s10750-008-9661-0>, 2009.
- Delfs, J.-O., Blumensaat, F., Wang, W., Krebs, P., and Kolditz, O.: Coupling hydrogeological with surface runoff model in a Poltava case study in Western Ukraine, *Environ. Earth. Sci.*, 65, 1439–1457, doi:<http://dx.doi.org/10.1007/s12665-011-1285-4>, 2012.
- Derx, J., Blaschke, A., and Blöschl, G.: Three-dimensional flow patterns at the river-aquifer interface - a case study at the Danube, *Advances in Water Resources*, 33, 1375–1387, doi:<http://dx.doi.org/10.1016/j.advwatres.2010.04.013>, 2010.
- Diem, S., Renard, P., and Schirmer, M.: Assessing the effect of different river water level interpolation schemes on modeled groundwater residence times, *Journal of Hydrology*, 510, 393–402, doi:<http://dx.doi.org/10.1016/j.jhydrol.2013.12.049>, 2014.
- Discacciati, M., Miglio, E., and Quarteroni, A.: Mathematical and numerical models for coupling surface and groundwater flows, *Applied Numerical Mathematics*, 43, 57–74, 2002.
- Dooge, J.: The hydrologic cycle as a closed system, *International Association of Scientific Hydrology. Bulletin*, 13, 58–68, doi:<http://dx.doi.org/10.1080/02626666809493568>, 1968.
- Doppler, T., Franssen, H.-J. H., Kaiser, H.-P., Kuhlman, U., and Stauffer, F.: Field evidence of a dynamic leakage coefficient for modelling river-aquifer interactions, *Journal of Hydrology*, 347, 177–187, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.09.017>, 2007.
- Doussan, C., Poitevin, G., Ledoux, E., and Detay, M.: River bank filtration: modelling of the changes in water chemistry with emphasis on nitrogen species, *Journal of Contaminant Hydrology*, 25, 129–156, 1997.

- Durand, M., Andreadis, K., Alsdorf, D., Lettenmaier, D., Moller, D., and Wilson, M.: Estimation of bathymetric depth and slope from data assimilation of swath altimetry into a hydrodynamic model, *Geophys. Res. Lett.*, 2008.
- 5 Ebel, B. and Loague, K.: Physics-based hydrologic-response simulation: Seeing through the fog of equifinality, *Hydrol. Process.*, 20, 2887–2900, 2006.
- Ebel, B., Mirus, B. B., Heppner, C. S., VanderKwaak, J. E., and Loague, K.: First-order exchange coefficient coupling for simulating surface water-groundwater interactions: parameter sensitivity and consistency with a physics-based approach, *Hydrological Processes*, 23, 1949–1959, doi:<http://dx.doi.org/10.1002/hyp.7279>, 2009.
- 10 Ebrahim, G., Hamonts, K., van Griensven, A., Jonoski, A., Dejonghe, W., and Mynett, A.: Effect of temporal resolution of water level and temperature input on numerical simulation of groundwater-surface water flux exchange in a heavily modified urban river, *Hydrological Processes*, 27, 1634–1645, doi:<http://dx.doi.org/10.1002/hyp.9310>, 2013.
- Ellis, P., Mackay, R., and Rivett, M.: Quantifying urban river-aquifer fluid exchange processes: A multi-scale problem, *Journal of Contaminant Hydrology*, 91, 58–80, 2007.
- 15 Endreny, T., Lautz, L., and Siegel, D.: Hyporheic flow path response to hydraulic jumps at river steps: Flume and hydrodynamic models, *Water Resources Research*, 47, W02517, doi:<http://dx.doi.org/10.1029/2009WR008631>, 2011.
- Engdahl, N., Volger, E., and Weissmann, G.: Evaluation of aquifer heterogeneity effects on river flow loss using a transition probability framework, *Water Resources Research*, 46, W01506, doi:<http://dx.doi.org/10.1029/2009WR007903>, 2010.
- 20 Engeler, I., Hendricks Franssen, H., Müller, R., and Stauffer, F.: The importance of coupled modelling of variably saturated groundwater flow-heat transport for assessing river-aquifer interactions, *Journal of Hydrology*, 397, 295–305, doi:<http://dx.doi.org/10.1016/j.jhydrol.2010.12.007>, 2011.
- Etchevers, P., Golaz, C., and Habets, F.: Simulation of the water budget and the river flows of the Rhone basin from 1981 to 1994, *Journal of Hydrology*, 244, 60–85, 2001.
- Fan, Y., Li, H., and Miguez-Macho, G.: Global Patterns of Groundwater Table Depth, *Science*, 339, 940–943, doi:<http://dx.doi.org/10.1126/science.1229881>, 2013.
- 30 Fleckenstein, J., Niswonger, R., and Fogg, G.: River-Aquifer Interactions, Geologic Heterogeneity, and Low-Flow Management, *Ground Water*, 44, 837–852, doi:<http://dx.doi.org/10.1111/j.1745-6584.2006.00190.x>, 2006.

- Fleckenstein, J., Krause, S., Hannah, D., and Boano, F.: Groundwater-surface water interactions: New methods and models to improve understanding of processes and dynamics, *Advances in Water Resources*, 33, 1291–1295, doi:<http://dx.doi.org/10.1016/j.advwatres.2010.09.011>, 2010.
- 5 Flipo, N.: Modélisation des Hydrosystèmes Continentaux pour une Gestion Durable de la Ressource en Eau, Ph.D. thesis, Université Pierre et Marie Curie, Paris VI, [http://tel.archives-ouvertes.fr/docs/00/87/94/49/PDF/flipo2013\\_hdr.pdf](http://tel.archives-ouvertes.fr/docs/00/87/94/49/PDF/flipo2013_hdr.pdf), Habilitation thesis, 2013.
- Flipo, N., Even, S., Poulin, M., Théry, S., and Ledoux, E.: Modelling nitrate fluxes at the catchment scale using the integrated tool CAWAQS, *Sciences of Total Environment*, 375, 69–79, doi:<http://dx.doi.org/10.1016/j.scitotenv.2006.12.016>, 2007a.
- 10 Flipo, N., Jeannée, N., Poulin, M., Even, S., and Ledoux, E.: Assessment of nitrate pollution in the Grand Morin aquifers (France): combined use of geostatistics and physically-based modeling, *Environ. Pollut.*, 146, 241–256, doi:<http://dx.doi.org/10.1016/j.envpol.2006.03.056>, 2007b.
- 15 Flipo, N., Monteil, C., Poulin, M., de Fouquet, C., and Krimissa, M.: Hybrid fitting of a hydrosystem model: long term insight into the Beauce aquifer functioning (France), *Water Resources Research*, 48, W05 509, doi:<http://dx.doi.org/10.1029/2011WR011092>, 2012.
- Freeze, R.: Three-Dimensional, Transient, Saturated-Unsaturated Flow in a Groundwater Basin, *Water Resources Research*, 7, 347–366, 1971.
- 20 Frei, S., Fleckenstein, J., Kollet, S., and Maxwell, R.: Patterns and dynamics of river-aquifer exchange with variably-saturated flow using a fully-coupled model, *Journal of Hydrology*, 375, 383–393, doi:<http://dx.doi.org/10.1016/j.jhydrol.2009.06.038>, 2009.
- Frei, S., Lischeid, G., and Fleckenstein, J.: Effects of micro-topography on surface-subsurface exchange and runoff generation in a virtual riparian wetland - A modeling study, *Advances in Water Resources*, 33, 1388–1401, doi:<http://dx.doi.org/10.1016/j.advwatres.2010.07.006>, 2010.
- 25 Frei, S., Knorr, K., Peiffer, S., and Fleckenstein, J.: Surface micro-topography causes hot spots of biogeochemical activity in wetland systems: A virtual modeling experiment, *J. Geophys. Res.*, 117, G00N12, doi:<http://dx.doi.org/10.1029/2012JG002012>, 2012.
- 30 Furman, A.: Modeling Coupled Surface-Subsurface Flow Processes: A Review, *Vadose Zone J.*, 7, 741–756, doi:<http://dx.doi.org/10.2136/vzj2007.0065>, 2008.
- Galbiati, L., Bouraoui, F., Elorza, F., and Bidoglio, G.: Modeling diffuse pollution loading into a Mediterranean lagoon: Development and application

- of an integrated surface-subsurface model tool, *Ecol. Model.*, 193, 4–18, doi:<http://dx.doi.org/10.1016/j.ecolmodel.2005.07.036>10.1016/j.ecolmodel.2005.07.036, 2006.
- Gao, H., Birkett, C., and Lettenmaier, D.: Global monitoring of large reservoir storage from satellite remote sensing, *Water Resources Research*, 48, W09 504, doi:<http://dx.doi.org/10.1029/2012WR012063>10.1029/2012WR012063, 2012.
- García-García, D., Ummenhofer, C., and Zlotnicki, V.: Australian water mass variations from GRACE data linked to Indo-Pacific climate variability, *Remote Sens. Environ.*, 115, 2175–2183, doi:<http://dx.doi.org/10.1016/j.rse.2011.04.007>10.1016/j.rse.2011.04.007, 2011.
- Gariglio, F. P., Tonina, D., and Luce, C. H.: Spatiotemporal variability of hyporheic exchange through a pool-riffle-pool sequence, *Water Resources Research*, 49, 7185–7204, doi:<http://dx.doi.org/10.1002/wrcr.20419>10.1002/wrcr.20419, 2013.
- Genereux, D. P., Leahy, S., Mitasova, H., Kennedy, C. D., and Corbett, D. R.: Spatial and temporal variability of streambed hydraulic conductivity in West Bear Creek, North Carolina, USA, *Journal of Hydrology*, 358, 332–353, doi:<http://dx.doi.org/10.1016/j.jhydrol.2008.06.017>10.1016/j.jhydrol.2008.06.017, 2008.
- Getirana, A., Boone, A., Yamazaki, D., and Mognard, N.: Automatic parametrization of a flow routing scheme driven by radar altimetry data: evaluation in the Amazon basin, *Water Resources Research*, 49, 614–629, doi:<http://dx.doi.org/10.1002/wrcr.20077>10.1002/wrcr.20077, 2013.
- Gibling, M., R., Fielding, C., R., and Sinha, R.: Alluvial valleys and alluvial sequences: towards a geomorphic assessment, chap. From river to rock record: The preservation of fluvial sediments and their subsequent interpretation, pp. 423–447, *SEPM Special Publication No. 97*, 2011.
- Gleeson, T. and Paszkowski, D.: Perceptions of scale in hydrology: what do you mean by regional scale?, *Hydrological Sciences Journal*, 59, 1–9, doi:<http://dx.doi.org/10.1080/02626667.2013.797581>10.1080/02626667.2013.797581, 2013.
- Goderniaux, P., Brouyère, S., Fowler, H., Blenkinsop, S., Therrien, R., Orban, P., and Dassargues, A.: Large scale surface-subsurface hydrological model to assess climate change impacts on groundwater reserves, *Journal of Hydrology*, 373, 122–138, 2009.
- Golaz-Cavazzi, C., Etchevers, P., Habets, F., Ledoux, E., and Noilhan, J.: Comparison of two hydrological simulations of the Rhône basin, *Physics and Chemistry of the Earth*, 26, 461–466, 2001.
- Gomez, E., Ledoux, E., Viennot, P., Mignolet, C., Benoît, M., Bornerand, C., Schott, C., Mary, B., Billen, G., Ducharne, A., and Brunstein, D.: Un outil de modélisation intégrée du transfert des nitrates sur un système hydrologique: Application au bassin de la Seine, *La Houille Blanche*, 3-2003, 38–45, 2003.

- Gomez, J., Wilson, J., and Cardenas, M.: Residence time distributions in sinuosity-driven hyporheic zones and their biogeochemical effects, *Water Resources Research*, 48, W09533, doi:<http://dx.doi.org/10.1029/2012WR012180>, 2012.
- 5 Gooseff, M., Anderson, J., Wondzell, S., LaNier, J., and Haggerty, R.: A modelling study of hyporheic exchange pattern and the sequence, size, and spacing of stream bedforms in mountain stream networks, Oregon, USA, *Hydrological Processes*, 20, 2443–2457, doi:<http://dx.doi.org/10.1002/hyp.6349>, 2006.
- Graillet, D., Paran, F., Bornette, G., Marmonier, P., Piscart, C., and Cadilhac, L.: Coupling groundwater modeling and biological indicators for identifying river/aquifer exchanges, *SpringerPlus*, 3, 68, doi:<http://dx.doi.org/10.1186/2193-1801-3-68>, 2014.
- 10 Gu, C., Hornberger, G., Herman, J., and Mills, A.: Influence of stream-groundwater interactions in the streambed sediments on  $\text{NO}_3^-$  flux to a low-relief coastal stream, *Water Resources Research*, 44, W11432, doi:<http://dx.doi.org/10.1029/2007WR006739>, 2008.
- Gu, C., Anderson, W., and Maggi, F.: Riparian biogeochemical hot moments induced by stream fluctuations, *Water Resources Research*, 48, W09546, doi:<http://dx.doi.org/10.1029/2011WR011720>, 2012.
- 15 Gunduz, O. and Aral, M.: River networks and groundwater flow: a simultaneous solution of a coupled system, *Journal of Hydrology*, 301, 216–234, doi:<http://dx.doi.org/10.1016/j.jhydrol.2004.06.034>, 2005.
- 20 Habets, F., Noilhan, J., Golaz, C., Goutorbe, J., Lacarrère, P., Leblois, E., Ledoux, E., Martin, E., Ottlé, C., and Vidal-Madjar, D.: The ISBA surface scheme in a macroscale hydrological model applied to the Hapex-Mobilhy area Part I: Model and database, *Journal of Hydrology*, 217, 75–96, 1999.
- Haitjema, H.: Comparing a three-dimensionnal and a Dupuit-Forchheimer solution for a circular recharge area in a confined aquifer, *Journal of Hydrology*, 91, 83–101, 1987.
- 25 Haitjema, H.: On the residence time distribution in idealized watersheds, *Journal of Hydrology*, 172, 127–146, 1995.
- Hancock, P., Boulton, A., and Humphreys, W.: Aquifers and hyporheic zones: Towards an ecological understanding of groundwater, *Hydrogeology Journal*, 13, 98–111, doi:<http://dx.doi.org/10.1007/s10040-004-0421-6>, 2005.
- 30 Hanson, R., Schmid, W., Faunt, C., and Lockwood, B.: Simulation and Analysis of Conjunctive Use with MODFLOW's Farm Process, *Ground Water*, 48, 674–689, doi:<http://dx.doi.org/10.1111/j.1745-6584.2010.00730.x>, 2010.

- Harbaugh, A., Banta, E., Hill, M., and McDonald, M.: MODFLOW-2000, the U.S. Geological Survey modular ground-water model: User guide to modularization concepts and the ground-water flow process, Tech. Rep. 00-92, USGS, Denver, Colorado, USA, 2000.
- Harvey, A.: Effective timescales of coupling within fluvial systems, *Geomorphology*, 44, 175–201, 2002.
- 5 Harvey, J. and Bencala, K.: The effect of streambed topography on surface-subsurface water exchange in mountain catchments, *Water Resources Research*, 29, 89–98, 1993.
- Hatch, C., Fisher, A., Revenaugh, J., Constantz, J., and Ruehl, C.: Quantifying surface water-groundwater interactions using time series analysis of streambed thermal records: Method development, *Water Resources Research*, 42, 14 p., 2006.
- 10 Hatch, C., Fisher, A., Ruehl, C., and Stemler, G.: Spatial and temporal variations in streambed hydraulic conductivity quantified with time-series thermal methods, *Journal of Hydrology*, 389, 276–288, 2010.
- Hayashi, M. and Rosenberry, D.: Effects of Ground Water Exchange on the Hydrology and Ecology of Surface Water, *Ground Water*, 40, 309–316, 2002.
- Heeren, D. M., Fox, G. A., Fox, A. K., Storm, D. E., Miller, R. B., and Mittelstet, A. R.: Divergence and flow direction as indicators of subsurface heterogeneity and stage-dependent storage in alluvial floodplains, *Hydrological Processes*, 28, 1307–1317, doi:<http://dx.doi.org/10.1002/hyp.9674>, 2014.
- 15 Hefting, M., Clément, J., Dowrick, D., Cosandey, A., Bernal, S., Cimpian, C., Tatur, A., Burt, T., and Pinay, G.: Water table elevation controls on soil nitrogen cycling in riparian wetlands along a European climatic gradient, *Biogeochemistry*, 67, 113–134, 2004.
- Heinz, J., Kleineidam, S., Teutsch, G., and Aigner, T.: Heterogeneity patterns of Quaternary glaciofluvial gravel bodies (SW-Germany): application to hydrogeology, *Sedimentary Geology*, 158, 1–23, doi:[http://dx.doi.org/10.1016/S0037-0738\(02\)00239-7](http://dx.doi.org/10.1016/S0037-0738(02)00239-7), 2003.
- Henriksen, H., Trolldborg, L., Hojberg, A., and Refsgaard, J.: Assessment of exploitable groundwater resources of Denmark by use of ensemble resource indicators and a numerical groundwater-surface water model, *Journal of Hydrology*, 348, 224–240, 2008.
- 25 Hester, E. and Doyle, M.: In-stream geomorphic structures as drivers of hyporheic exchange, *Water Resources Research*, 44, W03417, doi:<http://dx.doi.org/10.1029/2006WR005810>, 2008.
- 30 Hill, M., Cooley, R., and Pollock, D.: A Controlled Experiment in Ground Water Flow Model Calibration, *Ground Water*, 36, 520–535, 1998.

Hornung, J. and Aigner, T.: Reservoir and aquifer characterization of fluvial architectural elements: Stubensandstein, Upper Triassic, southwest Germany, *Sedimentary Geology*, 129, 215–280, doi:[http://dx.doi.org/10.1016/S0037-0738\(99\)00103-7](http://dx.doi.org/10.1016/S0037-0738(99)00103-7).1016/S0037-0738(99)00103-7, 1999.

5 Irvine, D., Brunner, P., Hendricks Franssen, H.-J., and Simmons, G.: Heterogeneous or homogeneous? Implications of simplifying heterogeneous streambeds in models of losing streams, *Journal of Hydrology*, 424-425, 16–23, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.11.051>.1016/j.jhydrol.2011.11.051, 2012.

Janssen, F., Cardenas, M., Sawyer, A., Dammrich, T., Krietsch, J., and de Beer, D.: A comparative experimental and multiphysics computational fluid dynamics study of coupled surface-subsurface flow in bed forms, *Water Resources Research*, 48, W08 514, doi:<http://dx.doi.org/10.1029/2012WR011982>.1029/2012WR011982, 2012.

Jencso, K., McGlynn, B., Gooseff, M., Bencala, K., and Wondzell, S.: Hillslope hydrologic connectivity controls riparian groundwater turnover: Implications of catchment structure for riparian buffering and stream water sources, *Water Resources Research*, 46, W10 524, doi:<http://dx.doi.org/10.1029/2009WR008818>.1029/2009WR008818, 2010.

15 Jensen, J. and Engesgaard, P.: Nonuniform Groundwater Discharge across a Streambed: Heat as a Tracer, *Vadose Zone Journal*, 10, 98–109, doi:<http://dx.doi.org/10.2136/vzj2010.000510>.2136/vzj2010.000510.2136/vzj2010.0005, 2011.

Jolly, I. and Rassam, D.: A review of modelling of groundwater-surface water interactions in arid/semi-arid floodplains, in: 18<sup>th</sup> World IMACS / MODSIM Congress, Cairns, Australia, 2009.

20 Kalbus, E., Schmidt, C., Molson, J., Reinstorf, F., and Schirmer, M.: Influence of aquifer and streambed heterogeneity on the distribution of groundwater discharge, *Hydrology and Earth System Sciences*, 13, 69–77, 2009.

Kasahara, T. and Hill, A.: Hyporheic exchange flows induced by constructed riffles and steps in lowland streams in southern Ontario, Canada, *Hydrological Processes*, 20, 4287–4305, doi:<http://dx.doi.org/10.1002/hyp.6174>.1002/hyp.6174, 2006.

Kasahara, T. and Wondzell, S.: Geomorphic controls on hyporheic exchange flow in mountain streams, *Water Resources Research*, 39, 1005, doi:<http://dx.doi.org/10.1029/2002WR001386>.1029/2002WR001386, 2003.

30 Käser, D., Binley, A., Heathwaite, A., and Krause, S.: Spatio-temporal variations of hyporheic flow in a riffle-step-pool sequence, *Hydrological Processes*, 23, 2138–2149, doi:<http://dx.doi.org/10.1002/hyp.7317>.1002/hyp.7317, 2009.



- Käser, D., Binley, A., and Heathwaite, A.: On the importance of considering channel microforms in groundwater models of hyporheic exchange, *River Res. Applic.*, 29, 528–535, doi:<http://dx.doi.org/10.1002/rra.1618>, 2013.
- 5 Käser, D., Graf, T., Cochand, F., McLaren, R., Therrien, R., and Brunner, P.: Channel Representation in Physically Based Models Coupling Groundwater and Surface Water: Pitfalls and How to Avoid Them, *Ground Water*, p. In press, doi:<http://dx.doi.org/10.1111/gwat.12143>, 2014.
- Ke, K.-Y.: Application of an integrated surface water-groundwater model to multi-aquifers modeling in Choushui River alluvial fan, Taiwan, *Hydrological Processes*, doi:<http://dx.doi.org/10.1002/hyp.9678>, 2014.
- 10 Keery, J., Binley, A., Crook, N., and Smith, J.: Temporal and spatial variability of groundwater-surface water fluxes: Development and application of an analytical method using temperature time series, *Journal of Hydrology*, 336, 1–16, doi:<http://dx.doi.org/10.1016/j.jhydrol.2006.12.003>, 2007.
- Kikuchi, C., Ferré, T., and Welker, J.: Spatially telescoping measurements for improved characterization of ground water-surface water interactions, *Journal of Hydrology*, 446–447, 1–12, doi:<http://dx.doi.org/10.1016/j.jhydrol.2012.04.002>, 2012.
- 15 Kim, N., Chung, I., Won, Y., and Arnold, J.: Development and application of the integrated SWAT–MODFLOW model, *Journal of Hydrology*, 356, 1–16, doi:<http://dx.doi.org/10.1016/j.jhydrol.2008.02.024>, 2008.
- 20 Kjellin, J., Hallin, S., and Wörman, A.: Spatial variations in denitrification activity in wetland sediments explained by hydrology and denitrifying community structure, *Water Research*, 41, 4710–4720, doi:<http://dx.doi.org/10.1016/j.watres.2007.06.053>, 2007.
- Klemes, V.: Conceptualization and scale in hydrology, *Journal of Hydrology*, 65, 1–23, 1983.
- Klingbeil, R., Kleineidam, S., Asprien, U., Aigner, T., and Teutsch, G.: Relating lithofacies to hydrofacies: outcrop-based hydrogeological characterisation of Quaternary gravel deposits, *Sedimentary Geology*, 129, 299–310, doi:[http://dx.doi.org/10.1016/S0037-0738\(99\)00067-6](http://dx.doi.org/10.1016/S0037-0738(99)00067-6), 1999.
- 25 Koch, J., McKnight, D., and Neupauer, R.: Simulating unsteady flow, anabranching, and hyporheic dynamics in a glacial meltwater stream using a coupled surface water routing and groundwater flow model, *Water Resources Research*, 47, W05 530, doi:<http://dx.doi.org/10.1029/2010WR009508>, 2011.
- 30

- Kolditz, O., Delfs, J., Bürger, C., Beinhorn, M., and Parkee, C.: Numerical analysis of coupled hydrosystems based on an object-oriented compartment approach, *Journal of Hydroinformatics*, 10, 227–244, 2008.
- Kolditz, O., Bauer, S., Beyer, C., Böttcher, N., Dietrich, P., Görke, U.-J., Kalbacher, T., Park, C.-H., Sauer, U., Schütze, C., Shao, H., Singh, A., Taron, J., Wang, W., and Watanabe, N.: A systematic benchmarking approach for geologic CO<sub>2</sub> injection and storage, *Environ. Earth. Sci.*, 67, 613–632, doi:<http://dx.doi.org/10.1007/s12665-012-1656-5>, 2012.
- Kollet, S. J. and Maxwell, R. M.: Integrated surface-groundwater flow modeling: A free-surface overland flow boundary condition in a parallel groundwater flow model, *Advances in Water Resources*, 29, 945–958, 2006.
- Kollet, S. J., Maxwell, R. M., Woodward, C., Smith, S., Vanderborght, J., Vereecken, H., and Simmer, C.: Proof of concept of regional scale hydrologic simulations at hydrologic resolution utilizing massively parallel computer, *Water Resources Research*, 46, W04201, doi:<http://dx.doi.org/10.1029/2009WR008730>, 2010.
- Koltermann, C., E. and Gorelick, S., M.: Heterogeneity in sedimentary deposits: A review of structure-imitating, process-imitating, and descriptive approaches, *Water Resources Research*, 32, 2617–2658, doi:<http://dx.doi.org/10.1029/96WR000250>, 1996.
- Koussis, A., Akylas, E., and Mazi, K.: Response of sloping unconfined aquifer to stage changes in adjacent stream II. Applications, *Journal of Hydrology*, 338, 73–84, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.02.030>, 2007.
- Krause, S. and Bronstert, A.: The impact of groundwater-surface water interactions on the water balance of a mesoscale lowland river catchment in northeastern Germany, *Hydrological Processes*, 21, 169–184, doi:<http://dx.doi.org/10.1002/hyp.6182>, 2007.
- Krause, S., Bronstert, A., and Zehe, E.: Groundwater-surface water interactions in a North German lowland floodplain - Implications for the river discharge dynamics and riparian water balance, *Journal of Hydrology*, 347, 404–417, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.09.028>, 2007.
- Krause, S., Hannah, D., and Fleckenstein, J.: Hyporheic hydrology: interactions at the groundwater-surface water interface, *Hydrological Processes*, 23, 2103–2107, doi:<http://dx.doi.org/10.1002/hyp.7366>, 2009a.
- Krause, S., Heathwaite, L., Binley, A., and Keenan, P.: Nitrate concentration changes at the groundwater-surface water interface of a small Cumbrian River, *Hydrological Processes*, 23, 2195–2211, doi:<http://dx.doi.org/10.1002/hyp.7213>, 2009b.

- Krause, S., Hannah, D. M., Fleckenstein, J. H., Heppell, C. M., Kaeser, D., Pickup, R., Pinay, G., Robertson, A. L., and Wood, P. J.: Inter-disciplinary perspectives on processes in the hyporheic zone, *Ecohydrology*, 4, 481–499, doi:<http://dx.doi.org/10.1002/eco.17610.1002/eco.176>, 2011.
- Krause, S., Blume, T., and Cassidy, N.: Investigating patterns and controls of groundwater upwelling in a lowland river by combining fibre-optic distributed temperature sensing with observations of vertical head gradients, *Hydrology and Earth System Sciences*, 16, 1775–1792, doi:<http://dx.doi.org/10.5194/hess-16-1775-201210.5194/hess-16-1775-2012>, 2012a.
- Krause, S., Munz, M., Tecklenburg, C., and Binley, A.: The effect of groundwater forcing on hyporheic exchange: Reply to comment on ‘Munz M, Krause S, Tecklenburg C, Binley A. Reducing monitoring gaps at the aquifer-river interface by modelling groundwater-surfacewater exchange flow patterns. *Hydrological Processes*. DOI: 10.1002/hyp.8080’, *Hydrological Processes*, 26, 1589–1592, doi:<http://dx.doi.org/10.1002/hyp.927110.1002/hyp.9271>, 2012b.
- Kurtulus, B., Flipo, N., Goblet, P., Vilain, G., Tournebize, J., and Tallec, G.: Hydraulic head interpolation in an aquifer unit using ANFIS and Ordinary Kriging, in: *Studies in computational intelligence*, 343, pp. 265–273, Springer, doi:[http://dx.doi.org/10.1007/978-3-642-20206-3\\_1810.1007/978-3-642-20206-3\\_18](http://dx.doi.org/10.1007/978-3-642-20206-3_1810.1007/978-3-642-20206-3_18), 2011.
- LaBolle, E., Ahmed, A., and Fogg, G.: Review of the Integrated Groundwater and Surface-Water Model (IGSM), *Ground Water*, 41(2), 238–46, 2003.
- Lautz, L. and Siegel, D.: Modeling surface and ground water mixing in the using MODFLOW and MT3D, *Advances in Water Resources*, 29, 1618–1633, doi:<http://dx.doi.org/10.1016/j.advwatres.2005.12.00310.1016/j.advwatres.2005.12.003>, 2006.
- Lautz, L., Kranes, N., and Siegel, D.: Heat tracing of heterogeneous hyporheic exchange adjacent to in-stream geomorphic features, *Hydrological Processes*, 24, 3074–3086, doi:<http://dx.doi.org/10.1002/hyp.772310.1002/hyp.7723>, 2010.
- Ledoux, E., Girard, G., de Marsily, G., Villeneuve, J., and Deschenes, J.: Unsaturated flow in hydrologic modeling - theory and practice, chap. Spatially distributed modeling: conceptual approach, coupling surface water and groundwater., pp. 435–454, Springer, NATO ASI Ser. CNorwell, Massachusetts : Kluwer Academic, 1989.
- Ledoux, E., Gomez, E., Monget, J., Viavattene, C., Viennot, P., Ducharne, A., Benoit, M., Mignolet, C., Schott, C., and Mary, B.: Agriculture and groundwater nitrate contamination in the Seine basin. The STICS-MODCOU modelling chain, *Sciences of Total Environment*, 375, 33–47, 2007.
- Leek, R., Wu, J., Wang, L., Hanrahan, T., Barber, M., and Qiu, H.: Heterogeneous characteristics of streambed saturated hydraulic conductivity of the Touchet River, south eastern Washington, USA,

- Hydrological Processes, 23, 1236–1246, doi:<http://dx.doi.org/10.1002/hyp.7258>, 2009.
- Lemieux, J. and Sudicky, E.: Simulation of groundwater age evolution during the Wisconsinian glaciation over the Canadian landscape, *Environmental Fluid Mechanics*, 10, 91–102, 2010.
- 5 Lewandowski, J., Angermann, L., Nützmann, G., and Fleckenstein, J.: A heat pulse technique for the determination of small-scale flow directions and flow velocities in the streambed of sand-bed streams, *Hydrological Processes*, 25, 3244–3255, doi:<http://dx.doi.org/10.1002/hyp.8062>, 2011.
- Li, Q., Unger, A., Sudicky, E., Kassenaar, D., Wexler, E., and Shikaze, S.: Simulating the multi-seasonal response of a large-scale watershed with a 3D physically-based hydrologic model, *Journal of Hydrology*, 357, 317–336, 2008.
- 10 Liang, D., Falconer, R., and Lin, B.: Coupling surface and subsurface flows in a depth averaged flood wave model, *Journal of Hydrology*, 337, 147–158, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.01.045>, 2007.
- 15 Liggett, J., Werner, A., and Simmons, C.: Influence of the first-order exchange coefficient on simulation of coupled surface-subsurface flow, *Journal of Hydrology*, 414-415, 503–515, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.11.028>, 2012.
- Loague, K. and VanderKwaak, J.: Physics-based hydrologic response: platinum bridge, 1958 Edsel, or useful tool, *Hydrological Processes*, 18, 2949–2956, 2004.
- 20 Luce, C., Tonina, D., Gariglio, F., and Applebee, R.: Solutions for the diurnally forced advection-diffusion equation to estimate bulk fluid velocity and diffusivity in streambeds from temperature time series, *Water Resources Research*, 49, 1–19, doi:<http://dx.doi.org/10.1029/2012WR012380>, 2013.
- Macpherson, G. and Sophocleous, M.: Fast ground-water mixing and basal recharge in an unconfined, alluvial aquifer, Konza LTER Site, Northeastern Kansas, *Journal of Hydrology*, 286, 271–299, 2004.
- 25 Maier, H. and Howard, K.: Influence of Oscillating Flow on Hyporheic Zone Development, *Ground Water*, 49, 830–844, doi:<http://dx.doi.org/10.1111/j.1745-6584.2010.00794.x>, 2011.
- Malard, F., Tockner, K., Dole-Olivier, M.-J., and Ward, J. V.: A landscape perspective of surface-subsurface hydrological exchanges in river corridors, *Freshwater Biology*, 47, 621–640, 2002.
- 30 Marion, A., Packman, A., Zaramella, M., and Bottacin-Busolin, A.: Hyporheic flows in stratified beds, *Water Resources Research*, 44, W09433, doi:<http://dx.doi.org/10.1029/2007WR006079>, 2008.

- Marmonier, P., Archambaud, G., Belaidi, N., Bougon, N., Breil, P., Chauvet, E., Claret, C., Cornut, J., Detry, T., Dole-Olivier, M., Dumont, B., Flipo, N., Foulquier, A., Gérino, M., Guilpart, A., Julien, F., C.Maazouzi, Martin, D., Mermillod-Blondin, F., Montuelle, B., Namour, P., Navel, S., Ombredane, D., Pelte, T., Piscart, C., Pusch, M., Stroffek, S., Robertson, A., Sanchez-Pérez, J., Sauvage, S., Taleb, A., Wantzen, M., and Vervier, P.: The role of organisms in hyporheic processes : gaps in current knowledge, needs for future research and applications, *Ann. Limnol. - Int. J. Limn.*, 48, 253–266, 2012.
- Marzadri, A., Tonina, D., Bellin, A., Vignoli, G., and Tubino, M.: Semianalytical analysis of hyporheic flow induced by alternate bars, *Water Resources Research*, 46, W07531, doi:<http://dx.doi.org/10.1029/2009WR008285>, 2010.
- Marzadri, A., Tonina, D., and Bellin, A.: A semianalytical three-dimensional process-based model for hyporheic nitrogen dynamics in gravel bed rivers, *Water Resources Research*, 47, W11518, doi:<http://dx.doi.org/10.1029/2011WR010583>, 2011.
- Massei, N., Laignel, B., Deloffre, J., Mesquita, J., Motelay, A., Lafite, R., and Durand, A.: Long-term hydrological changes of the Seine River flow (France) and their relation to the North Atlantic Oscillation over the period 1950–2008, *Int. J. Climatol.*, 30, 2146–2154, doi:<http://dx.doi.org/10.1002/joc.2022>, 2010.
- Masson, V., Moigne, P. L., Martin, E., Faroux, S., Alias, A., Alkama, R., Belamari, S., Barbu, A., Boone, A., Bouyssel, F., Brousseau, P., Brun, E., Calvet, J.-C., Carrer, D., Decharme, B., Delire, C., Donier, S., Essaouini, K., Gibelin, A.-L., Giordani, H., Habets, F., Jidane, M., Kerdraon, G., Kourzeneva, E., Lafaysse, M., Lafont, S., Brossier, C. L., Lemonsu, A., Mahfouf, J.-F., Marguinaud, P., Mokhtari, M., Morin, S., Pigeon, G., Salgado, R., Seity, Y., Taillefer, F., Tanguy, G., Tulet, P., Vincendon, B., Vionnet, V., and Voldoire, A.: The SURFEXv7.2 land and ocean surface platform for coupled or offline simulation of earth surface variables and fluxes, *Geosci. Model Dev.*, 6, 929–960, 2013.
- Maxwell, R. and Miller, N.: Development of a Coupled Land Surface and Groundwater Model, *Journal of Hydrometeorology*, 6, 233–247, 2005.
- McDonald, M. and Harbaugh, A.: MODFLOW, a modular three-dimensional finite-difference groundwater flow model, chap. Book 6, chap A1, p. 586 p., *Technique of Water Resources Investigations of the US Geological Survey*, USGS Federal Center Box 25425, Denver, Colorado 80225, 1988.
- McGuire, K. and McDonnell, J.: A review and evaluation of catchment transit time modeling, *Journal of Hydrology*, 330, 543–563, doi:<http://dx.doi.org/10.1016/j.jhydrol.2006.04.020>, 2006.

- Mehl, S. and Hill, M.: Development and evaluation of a local grid refinement method for block-centred finite-difference groundwater models using shared nodes, *Advances in Water Resources*, 25, 497–511, 2002.
- Mehl, S. and Hill, M.: Grid-size dependence of Cauchy boundary condition used to simulate stream-aquifer interactions, *Advances in Water Resources*, 33, 430–442, 2010.
- Miall, A., D.: *The geology of fluvial deposits*, Springer Verlag, 1996.
- Michailovsky, C., Milzow, C., and Bauer-Gottwein, P.: Assimilation of radar altimetry to a routing model of the Brahmaputra river, *Water Resources Research*, 49, 4807–4816, doi:<http://dx.doi.org/10.1002/wrcr.20345>, 2013.
- Miglio, E., Quarteroni, A., and Saleri, F.: Coupling of free surface and groundwater flows, *Computers & Fluids*, 32, 73–83, 2003.
- Monteil, C.: Estimation de la contribution des principaux aquifères du bassin-versant de la Loire au fonctionnement hydrologique du fleuve à l'étiage, Ph.D. thesis, MINES-ParisTech, 60 bd Saint Michel, Paris, 2011.
- Morel-Seytoux, J.: The turning factor in the Estimation of stream aquifer seepage, *Ground Water*, 42, 205–212, 2009.
- Mouhri, A., Flipo, N., Rejiba, F., de Fouquet, C., Bodet, L., Goblet, P., Kurtulus, B., Ansart, P., Tallec, G., Durand, V., and Jost, A.: Designing a multi-scale sampling system of stream-aquifer interfaces in a sedimentary basin, *Journal of Hydrology*, 504, 194–206, doi:<http://dx.doi.org/10.1016/j.hydrol.2013.09.036>, 2013.
- Munz, M., Krause, S., Tecklenburg, C., and Binley, A.: Reducing monitoring gaps at the aquifer-river interface by modelling groundwater-surface water exchange flow patterns, *Hydrological Processes*, 25, 3547–3562, doi:<http://dx.doi.org/10.1002/hyp.8080>, 2011.
- Mutiti, S. and Levy, J.: Using temperature modeling to investigate the temporal variability of riverbed hydraulic conductivity during storm events, *Journal of Hydrology*, 388, 321–334, 2010.
- Nalbantis, I., Efstratiadis, A., Rozos, E., Kopsiafti, M., and Koutsoyiannis, D.: Holistic versus monomeric strategies for hydrological modelling of human-modified hydrosystems, *Hydrology and Earth System Sciences*, 15, 743–758, doi:<http://dx.doi.org/10.5194/hess-15-743-2011>, 2011.
- Nanson, G., C. and Croke, J.: A genetic classification of floodplains, *Geomorphology*, 4, 459–486, doi:[http://dx.doi.org/10.1016/0169-555X\(92\)90039-Q](http://dx.doi.org/10.1016/0169-555X(92)90039-Q), 1992.

Neal, J., Schumann, G., Bates, P., Buytaert, W., Matgen, P., and Pappenberger, F.: A data assimilation approach to discharge estimation from space, *Hydrological Processes*, 23, 3641–3649, doi:<http://dx.doi.org/10.1002/hyp.7518>, 2009.

5 Nemeth, M. and Solo-Gabriele, H.: Evaluation of the use of reach transmissivity to quantify exchange between groundwater and surface water, *Journal of Hydrology*, 274, 145–159, doi:[http://dx.doi.org/10.1016/S0022-1694\(02\)00419-5](http://dx.doi.org/10.1016/S0022-1694(02)00419-5), 2003.

Noto, L., Ivanov, V., Bras, R., and Vivoni, E.: Effects of initialization on response of a fully-distributed hydrologic model, *Journal of Hydrology*, 352, 107–125, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.12.031>, 2008.

10 Oeurng, C., Sauvage, S., and Sánchez-Pérez, J.-M.: Temporal variability of nitrate transport through hydrological response during flood events within a large agricultural catchment in south-west France, *Sciences of Total Environment*, 409, 140–149, doi:<http://dx.doi.org/10.1016/j.scitotenv.2010.09.006>, 2010.

Oki, T. and Sud, Y.: Design of total runoff integrating pathways (TRIP). A global river channel network, *Earth Interact*, 2, 1–36, 1998.

15 O’Loughlin, F., Trigg, M., Schumann, G., and Bates, P.: Hydraulic characterization of the middle reach of the Congo River, *Water Resources Research*, 49, 5059–5070, 2013.

Osman, Y. and Bruen, M.: Modelling stream-aquifer seepage in an alluvial aquifer: an improved loosing-stream package for MODFLOW, *Journal of Hydrology*, 264, 69–86, 2002.

20 O’Driscoll, M., Johnson, P., and Mallinson, D.: Geological controls and effects of floodplain asymmetry on river–groundwater interactions in the southeastern Coastal Plain, USA, *Hydrogeology Journal*, 18, 1265–1279, doi:<http://dx.doi.org/10.1007/s10040-010-0595-z>, 2010.

Pan, M., Wood, E., Wójcik, R., and McCabe, M.: Estimation of regional terrestrial water cycle using multi-sensor remote sensing observations and data assimilation, *Remote Sens. Environ.*, 112, 1282–1294, doi:<http://dx.doi.org/10.1016/j.rse.2007.02.039>, 2008.

25 Panday, S. and Huyakorn, P. S.: A fully coupled physically-based spatially-distributed model for evaluating surface/subsurface flow, *Advances in Water Resources*, 27, 361–382, doi:<http://dx.doi.org/10.1016/j.advwatres.2004.02.016>, 2004.

Paola, C. and Borgman, L.: Reconstructing random topography from preserved stratification, *Sedimentology*, 38, 553–565, 1991.

30 Park, Y.-J., Sudicky, E., Panday, S., and Matanga, G.: Implicit Subtime Stepping for Solving Nonlinear Flow Equations in an integrated Surface-Subsurface System, *Vadose Zone Journal*, 8, 825–836, doi:<http://dx.doi.org/10.2136/vzj2009.0013>, 2009.

Parkin, G., O'Donnell, G., Ewen, J., Bathurst, J., O'Connell, P., and Lavabre, J.: Validation of catchment models for predicting land-use and climate change impacts. 2. Case study for a Mediterranean catchment, *Journal of Hydrology*, 175, 595–613, 1996.

Parliament Council of the European Union: Dir. 2000/60/EC, establishing a framework for community action in the field of water policy, <http://ec.europa.eu/environment/water/water-framework/>, 2000.

Perkins, S. and Sophocleous, M.: Development of a Comprehensive Watershed Model Applied to Study Stream Yield under Drought Conditions, *Ground Water*, 37, 418–426, 1999.

Peterson, E. and Sickbert, T.: Stream water bypass through a meander neck, laterally extending the hyporheic zone, *Hydrogeology Journal*, 14, 1443–1451, 2006.

Peyrard, D., Sauvage, S., Vervier, P., Sanchez-Perez, J., and Quintard, M.: A coupled vertically integrated model to describe lateral exchanges between surface and subsurface in large alluvial floodplains with a fully penetrating river, *Hydrological Processes*, 22, 4257–4273, doi:<http://dx.doi.org/10.1002/hyp.7035>, 2008.

Peyrard, D., Delmotte, S., Sauvage, S., Namour, P., Gerino, M., Vervier, P., and Sanchez-Perez, J.: Longitudinal transformation of nitrogen and carbon in the hyporheic zone of an N-rich stream: A combined modelling and field study, *Physics and Chemistry of the Earth*, 36, 599–611, doi:<http://dx.doi.org/10.1016/j.pce.2011.05.003>, 2011.

Pinder, G. and Jones, J.: Determination of the groundwater component of peak discharge from the chemistry of total run-off, *Water Resources Research*, 5, 438–445, 1969.

Polus, E., Flipo, N., de Fouquet, C., and Poulin, M.: Geostatistics for assessing the efficiency of distributed physically-based water quality model. Application to nitrates in the Seine River, *Hydrological Processes*, 25, 217–233, doi:<http://dx.doi.org/10.1002/hyp.7838>, 2011.

Poole, G., O'Daniel, J., Jones, K., Woessner, W., Bernhardt, E., Helton, A., Stanford, J., Boer, B., and Beechie, T.: Hydrologic spiralling: The role of multiple interactive flow paths in stream ecosystems, *River Res. Applic.*, 24, 1018–1031, doi:<http://dx.doi.org/10.1002/rra.1099>, 2008.

Poole, G. C., Stanford, J. A., Frissell, C. A., and Running, S. W.: Three-dimensional mapping of geomorphic controls on flood-plain hydrology and connectivity from aerial photos, *Geomorphology*, 48, 329–347, doi:[http://dx.doi.org/10.1016/S0169-555X\(02\)00078-8](http://dx.doi.org/10.1016/S0169-555X(02)00078-8), 2002.

Pryet, A., Labarthe, B., Saleh, F., Akopian, M., and Flipo, N.: Quantification of stream-aquifer flow distribution at the regional scale with a distributed process-based model, *Water Resources Management*, Sub.



Qu, Y. and Duffy, C.: A semidiscrete finite volume formulation for multiprocess watershed simulation, *Water Resources Research*, 43, W08419, doi:<http://dx.doi.org/10.1029/2006WR005752>, 2007.

Ramillien, G., Famiglietti, J., and Wahr, J.: Detection of continental hydrology and glaciology signals from GRACE: A review, *Surveys in Geophysics*, 29, 361–374, doi:<http://dx.doi.org/10.1007/s10712-008-9048-9>, 2008.

Ramillien, G., Seoane, L., Frappart, F., Biancale, R., Gratton, S., Vasseur, X., and Bourgoigne, S.: Constrained Regional Recovery of Continental Water Mass Time-variations from GRACE-based Geopotential Anomalies over South America, *Surveys in Geophysics*, 33, 887–905, doi:<http://dx.doi.org/10.1007/s10712-012-9177-z>, 2012.

Ramireddygar, S., Sophocleous, M., Koelliker, J., Perkins, S., and Govindaraju, R.: Development and application of a comprehensive simulation model to evaluate impacts of watershed structures and irrigation water use on streamflow and groundwater: the case of Wet Walnut Creek Watershed, Kansas, USA, *Journal of Hydrology*, 236, 223–246, 2000.

Rau, G., Andersen, M., McCallum, A., and Acworth, R.: Analytical methods that use natural heat as a tracer to quantify surface water-groundwater exchange, evaluated using field temperature records, *Hydrogeology Journal*, 18, 1093–1110, 2010.

Refsgaard, J. and Knudsen, J.: Operational validation and intercomparison of different types of hydrological models, *Water Resources Research*, 32, 2189–2202, 1996.

Refsgaard, J., Christensen, S., Sonnenborg, T., Seifert, D., H, A., and Trolborg, L.: Review of strategies for handling geological uncertainty in groundwater flow and transport modeling, *Advances in Water Resources*, 36, 36–50, doi:<http://dx.doi.org/10.1016/j.advwatres.2011.04.006>, 2012.

Renard, P.: Calculating equivalent permeability : A review, *Advances in Water Resources*, 20, 253–278, 1997.

Revelli, R., Boano, F., Camporeale, C., and Ridolfi, L.: Intra-meander hyporheic flow in alluvial rivers, *Water Resources Research*, 44, W12428, doi:<http://dx.doi.org/10.1029/2008WR007081>, 2008.

Rivett, M., Buss, S., Morgan, P., Smith, J., and Bemment, C.: Nitrate attenuation in groundwater: A review of biogeochemical controlling processes, *Water Research*, 42, 4215–4232, doi:<http://dx.doi.org/10.1016/j.watres.2008.07.020>, 2008.

Rodríguez, E.: SWOT Science Requirements Document, Second Release (v. 1.1), Tech. rep., JPL, [http://swot.jpl.nasa.gov/files/swot/SWOT\\_science\\_reqs\\_release2\\_v1.14.pdf](http://swot.jpl.nasa.gov/files/swot/SWOT_science_reqs_release2_v1.14.pdf), 2012.

- Rosenberry, D. and Pitlick, J.: Local-scale variability of seepage and hydraulic conductivity in a shallow gravel-bed river, *Hydrological Processes*, 23, 3306–3318, doi:<http://dx.doi.org/10.1002/hyp.7433>, 2009.
- 5 Rosenberry, D., Sheibley, R., Cox, S., Simonds, F., and Naftz, D.: Temporal variability of exchange between groundwater and surface water based on high-frequency direct measurements of seepage at the sediment-water interface, *Water Resources Research*, 49, 2975–2986, doi:<http://dx.doi.org/10.1002/wrcr.20198>, 2013.
- Rossmann, N. and Zlotnik, V.: Review: Regional groundwater flow modeling in heavily irrigated basins of selected states in the western United States, *Hydrogeology Journal*, 21, 1173–1192, doi:<http://dx.doi.org/10.1007/s10040-013-1010-3>, 2013.
- 10 Rubin, Y., Lunt, I., and Bridge, J.: Spatial variability in river sediments and its link with river channel geometry, *Water Resources Research*, 42, W06D16, doi:<http://dx.doi.org/10.1029/2005WR004853>, 2006.
- Rühaak, W., Rath, V., Wolf, A., and Clauser, C.: 3D finite volume groundwater and heat transport modeling with non-orthogonal grids, using a coordinate transformation method, *Advances in Water Resources*, 31, 513–524, 2008.
- 15 Rushton, K.: Representation in regional models of saturated river-aquifer interaction for gaining/losing rivers, *Journal of Hydrology*, 334, 262–281, doi:<http://dx.doi.org/10.1016/j.jhydrol.2006.10.008>, 2007.
- 20 Rushton, K. and Tomlinson, L.: Possible mechanisms for leakage between aquifers and rivers, *Journal of Hydrology*, 40, 49–65, 1979.
- Russell, G. and Miller, J.: Global River Runoff Calculated from a Global Atmospheric General Circulation Model, *Journal of Hydrology*, 117, 241–254, 1990.
- Ryan, R. and Boufadel, M.: Influence of streambed hydraulic conductivity on solute exchange with the hyporheic zone, *Environ. Geol.*, 51, 203–210, doi:<http://dx.doi.org/10.1007/s00254-006-0319-9>, 2006.
- 25 Ryan, R. and Boufadel, M.: Evaluation of streambed hydraulic conductivity heterogeneity in an urban watershed, *Stoch. Environ. Res. Assess.*, 21, 309–316, doi:<http://dx.doi.org/10.1007/s00477-006-0066-1>, 2007.
- 30 Saenger, N., Kitanidis, P., and Street, R.: A numerical study of surface-subsurface exchange processes at a riffle-pool pair in the Lahn River, Germany, *Water Resources Research*, 41, W12424, doi:<http://dx.doi.org/10.1029/2004WR003875>, 2005.

- Sahoo, A., Pan, M., Troy, T., Vinukollu, R., Sheffield, J., and Wood, E.: Reconciling the global terrestrial water budget using satellite remote sensing, *Remote Sens. Environ.*, 115, 1850–1865, doi:<http://dx.doi.org/10.1016/j.rse.2011.03.009>, 2011.
- 5 Saleh, F., Flipo, N., Habets, F., Ducharne, A., Oudin, L., Viennot, P., and Ledoux, E.: Modeling the impact of in-stream water level fluctuations on stream-aquifer interactions at the regional scale, *Journal of Hydrology*, 400, 490–500, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.02.001>, 2011.
- 10 Saleh, F., Ducharne, A., Flipo, N., Oudin, L., and Ledoux, E.: Impact of river bed morphology on discharge and water levels simulated by a 1D Saint-Venant hydraulic model at regional scale, *Journal of Hydrology*, 476, 169–177, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.02.001>, 2013.
- Salehin, M., Packman, A. I., and Paradis, M.: Hyporheic exchange with heterogeneous streambeds: Laboratory experiments and modeling, *Water Resources Research*, 40, doi:<http://dx.doi.org/10.1029/2003WR002567>, 2004.
- 15 Sawyer, A. and Cardenas, M.: Hyporheic flow and residence time distributions in heterogeneous cross-bedded sediment, *Water Resources Research*, 45, W08406, doi:<http://dx.doi.org/10.1029/2008WR007632>, 2009.
- Schmidt, C., Bayer-Raich, M., and Schirmer, M.: Characterization of spatial heterogeneity of groundwater-stream water interactions using multiple depth streambed temperature measurements at the reach scale, *Hydrology and Earth System Sciences*, 3, 1419–1446, doi:<http://dx.doi.org/10.5194/hessd-3-1419-2006>, 2006.
- 20 Schmidt, C., Conant, B., Bayer-Raich, M., and Schirmer, M.: Evaluation and field-scale application of an analytical method to quantify groundwater discharge using mapped streambed temperatures, *Journal of Hydrology*, 347, 292–307, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.08.022>, 2007.
- 25 Schornberg, C., Schmidt, C., Kalbus, E., and Fleckenstein, J.: Simulating the effects of geologic heterogeneity and transient boundary conditions on streambed temperatures - Implications for temperature-based water flux calculations, *Advances in Water Resources*, 33, 1309–1319, doi:<http://dx.doi.org/10.1016/j.advwatres.2010.04.007>, 2010.
- 30 Schumm, S., A.: River response to baselevel change: Implications for sequence stratigraphy, *The Journal of Geology*, 101, 279–294, doi:<http://dx.doi.org/10.1086/648221>, 1993.

- Scibek, J., Allen, D., Cannon, A., and Whitfield, P.: Groundwater-surface water interaction under scenarios of climate change using a high-resolution transient groundwater model, *Journal of Hydrology*, 333, 165–181, doi:<http://dx.doi.org/10.1016/j.jhydrol.2006.08.005>, 2007.
- Sebok, E., Duque, C., Engesgaard, P., and Boegh, E.: Spatial variability in streambed hydraulic conductivity of contrasting stream morphologies: channel bend and straight channel, *Hydrological Processes*, In Press, doi:<http://dx.doi.org/10.1002/hyp.10170>, 2014.
- Seitzinger, S., Styles, R., Boyer, E., Alexander, R., Billen, G., Howarth, R., Mayer, B., and Breemen, N. V.: Nitrogen retention in rivers: model development and application to watersheds in the northeastern U.S.A., *Biogeochemistry*, 57/58, 199–237, 2002.
- Shope, C., Constantz, J., Cooper, C., Reeves, D., Pohl, G., and McKay, W.: Influence of a large fluvial island, streambed, and stream bank on surface water-groundwater fluxes and water table dynamics, *Water Resources Research*, 48, W06 512, doi:<http://dx.doi.org/10.1029/2011WR011564>, 2012.
- Sophocleous, M.: Interactions between groundwater and surface water: the state of the science, *Hydrogeology Journal*, 10, 52–67, doi:<http://dx.doi.org/10.1007/s10040-002-0204-x>, 2002.
- Spanoudaki, K., Stamou, A., and Nanou-Giannarou, A.: Development and verification of a 3-D integrated surface water-groundwater model, *Journal of Hydrology*, 375, 410–427, doi:<http://dx.doi.org/10.1016/j.jhydrol.2009.06.041>, 2009.
- Stallman, R.: Steady one-dimensional fluid flow in a semi-infinite porous medium with sinusoidal surface temperature, *Journal of Geophysical Research*, 70, 2821–2827, doi:<http://dx.doi.org/10.1029/JZ070i012p02821>, 1965.
- Stanford, J. and Boulton, A.: Hydrology and the distribution of hyporheos: perspectives from a mesic river and a desert stream, *Journal of the North American Benthological Society*, 1993.
- Stonedahl, S., Harvey, J., Wörman, A., Salehin, M., and Packman, A.: A multiscale model for integrating hyporheic exchange from ripples to meanders, *Water Resources Research*, 46, W12 539, doi:<http://dx.doi.org/10.1029/2009WR008865>, 2010.
- Stonedahl, S., Harvey, J., Detty, J., Aubeneau, A., and Packman, A.: Physical controls and predictability of stream hyporheic flow evaluated with a multiscale model, *Water Resources Research*, 48, W10 513, doi:<http://dx.doi.org/10.1029/2011WR011582>, 2012.
- Storey, R. G., Howard, K., and Williams, D.: Factors controlling riffle-scale hyporheic exchange flows and their seasonal changes in a gaining stream: A three-

- dimensional groundwater flow model, *Water Resources Research*, 39-2, 1034, doi:<http://dx.doi.org/10.1029/2002WR001367>, 2003.
- 5 Sulis, M., Meyerhoff, S., Paniconi, C., Maxwell, R., Putti, M., and Kollet, S.: A comparison of two physics-based numerical models for simulating surface water-groundwater interactions, *Advances in Water Resources*, 33, 456–467, doi:<http://dx.doi.org/10.1016/j.advwatres.2010.01.010>, 2010.
- Swanson, T. and Cardenas, M.: Ex-Stream: A MATLAB program for calculating fluid flux through sediment-water interfaces based on steady and transient temperature profiles, *Computers and Geosciences*, 37, 1664 – 1669, doi:<http://dx.doi.org/10.1016/j.cageo.2010.12.001>, 2011.
- 10 Tapley, B., Bettadpur, S., Ries, J., Thompson, P., and Watkins., M.: GRACE measurements of mass variability in the Earth system, *Science*, 305, 503–505, 2004.
- Therrien, R., McLaren, R., Sudicky, E., and Panday, S.: *HydroGeoSphere: A Three-Dimensionnal Numerical Model Describing Fully-integrated Subsurface and Surface Flow and Solute Transport*, Tech. rep., Université Laval and University of Waterloo, 2010.
- 15 Thierion, C., Longuevergne, L., Habets, F., Ledoux, E., Ackerer, P., Majdalani, S., Leblois, E., Lecluse, S., Martin, E., Queguiner, S., and Viennot, P.: Assessing the water balance of the Upper Rhine Graben hydrosystem, *Journal of Hydrology*, 424-425, 68–83, doi:<http://dx.doi.org/10.1016/j.jhydrol.2011.12.028>, 2012.
- 20 Thouvenot-Korppoo, M., Billen, G., and Garnier, J.: Modelling benthic denitrification processes over a whole drainage network, *Journal of Hydrology*, 379, 239–250, doi:<http://dx.doi.org/10.1016/j.jhydrol.2009.10.005>, 2009.
- Tonina, D. and Buffington, J. M.: Hyporheic exchange in gravel bed rivers with pool-riffle morphology: laboratory experiments and three-dimensional modelling, *Water Resources Research*, 43, W01 421, doi:<http://dx.doi.org/10.1029/2005WR004328>, 2007.
- 25 Tonina, D. and Buffington, J. M.: Effects of stream discharge, alluvial depth and bar amplitude on hyporheic flow in pool-riffle channels, *Water Resources Research*, 47, W08 508, 2011.
- Tóth, J.: A Theory of Groundwater Motion in Small Drainage Basins in Central Alberta, Canada, *Journal of Geophysical Research*, 67, 4375–4387, 1962.
- 30 Tóth, J.: A Theoretical Analysis of Groundwater Flow in Small Drainage Basins, *Journal of Geophysical Research*, 68, 4795–4812, 1963.
- Trauth, N., Schmidt, C., Maier, U., Vieweg, M., and Fleckenstein, J.: Coupled 3-D stream flow and hyporheic flow model under varying stream and ambient groundwater flow conditions in a

- pool-riffle system, *Water Resources Research*, 49, 1–17, doi:<http://dx.doi.org/10.1002/wrcr.20442>, 201310.1002/wrcr.20442, 2013, 2013.
- Turlan, T., Birgand, F., and Marmonier, P.: Comparative use of field and laboratory mesocosms for in-stream nitrate uptake measurement, *Ann. Limnol. - Int. J. Limn.*, 43, 41–51, doi:<http://dx.doi.org/10.1051/limn:200702610.1051/limn:2007026>, 2007.
- Urquiza, J., N'Dri, D., Garon, A., and Delfour, M.: Coupling Stokes and Darcy equations, *Applied Numerical Mathematics*, 58, 525–538, doi:<http://dx.doi.org/10.1016/j.apnum.2006.12.00610.1016/j.apnum.2006.12.006>, 2008.
- van Balen, R., Kasse, C., and Moor, J. D.: Impact of groundwater flow on meandering; example from the Geul River, The Netherlands, *Earth Surface Processes and Landforms*, 33, 2010–2028, doi:<http://dx.doi.org/10.1002/esp.165110.1002/esp.1651>, 2008.
- VanderKwaak, J. E. and Loague, K.: Hydrologic-response simulations for the R-5 catchment with a comprehensive physics-based model, *Water Resources Research*, 37, 999–1013, 2001.
- Vergnes, J.-P. and Decharme, B.: A simple groundwater scheme in the TRIP river routing model: global off-line evaluation against GRACE terrestrial water storage estimates and observed river discharges, *Hydrology and Earth System Sciences*, 16, 3889–3908, doi:<http://dx.doi.org/10.5194/hess-16-3889-201210.5194/hess-16-3889-2012>, 2012.
- Vergnes, J.-P., Decharme, B., Alkama, R., Martin, E., Habets, F., and Douville, H.: A Simple Groundwater Scheme for Hydrological and Climate Applications: Description and Offline Evaluation over France, *Journal of Hydrometeorology*, 13, 1149–1171, doi:<http://dx.doi.org/10.1175/JHM-D-11-0149.110.1175/JHM-D-11-0149.1>, 2012.
- Vermeulen, P., te Stroet, C., and Heemink, A.: Limitations to upscaling of groundwater Flow models dominated by surface water interaction, *Water Resources Research*, 42, 12 p., doi:<http://dx.doi.org/10.1029/2005WR00462010.1029/2005WR004620>, 2006.
- Weill, S., Mouche, E., and Patin, J.: A generalized Richards equation for surface/subsurface flow modelling, *Journal of Hydrology*, 366, 9–20, 2009.
- Weng, P., Sánchez-Pérez, J., Sauvage, S., Vervier, P., and Giraud, F.: Assessment of the quantitative and qualitative buffer function of an alluvial wetland: hydrological modelling of a large floodplain (Garonne River, France), *Hydrological Processes*, 17, 2375–2392, doi:<http://dx.doi.org/10.1002/hyp.124810.1002/hyp.1248>, 2003.
- Werner, A., Gallagher, M., and Weeks, S.: Regional-scale, fully coupled modelling of stream-aquifer interaction in a tropical catchment, *Journal of Hydrology*, 328, 497–510, doi:<http://dx.doi.org/10.1016/j.jhydrol.2005.12.03410.1016/j.jhydrol.2005.12.034>, 2006.

- White, D. S.: Perspectives on Defining and Delineating Hyporheic Zones, *Journal of the North American Benthological Society*, Vol. 12, No. 1, 61–69, 1993.
- Whiting, P. and Pomeranets, M.: A numerical study of bank storage and its contribution to streamflow, *Journal of Hydrology*, 202, 121–136, 1997.
- 5 Winter, T.: Relation of streams, lakes, and wetlands to groundwater flow systems, *Hydrogeology Journal*, 7, 28–45, 1998.
- Woessner, W. W.: Stream and Fluvial Plain Ground Water Interactions: Rescaling Hydrogeologic Thought, *Ground Water*, 38, 423–429, doi:<http://dx.doi.org/10.1111/j.1745-6584.2000.tb00228.x>, 2000.
- 10 Wondzell, S. and Swanson, F.: Floods, channel change, and the hyporheic zone, *Water Resources Research*, 1999.
- Wondzell, S., LaNier, J., and Haggerty, R.: Evaluation of alternative groundwater flow models for simulating hyporheic exchange in a small mountain stream, *Journal of Hydrology*, 364, 142–151, doi:<http://dx.doi.org/10.1016/j.jhydrol.2008.10.011>, 2009.
- 15 Wood, E., Roundy, J., Troy, T., van Beek, L., Bierkens, M., Blyth, E., de Roo, A., Döll, P., Ek, M., Famiglietti, J., Gochis, D., van de Giesen, N., Houser, P., Jaffé, P., Kollet, S., Lehner, B., Lettenmaier, D., Peters-Lidard, C., Sivapalan, M., Sheffield, J., Wade, A., and Whitehead, P.: Hyperresolution global land surface modeling: Meeting a grand challenge for monitoring Earth’s terrestrial water, *Water Resources Research*, 47, W05 301, doi:<http://dx.doi.org/10.1029/2010WR010090>, 2011.
- 20 Wroblicky, G., Campana, M., Valett, H., and Dahm, C.: Seasonal variation in surface-subsurface water exchange and lateral hyporheic area of two stream-aquifer systems, *Water Resources Research*, 34-3, 317–328, doi:<http://dx.doi.org/10.1029/97WR03285>, 1998.
- Yeh, P. and Eltahir, E.: Representation of Water Table Dynamics in a Land Surface Scheme. Part II: Subgrid Variability, *Journal of Climate*, 18, 1881–1901, 2005.
- 25 Yuan, D., Lin, B., and Falconer, R.: Simulating moving boundary using a linked groundwater and surface water flow model, *Journal of Hydrology*, 349, 524–535, doi:<http://dx.doi.org/10.1016/j.jhydrol.2007.11.028>, 2008.
- Zaitchik, B., Rodell, M., and Reichle, R.: Assimilation of GRACE terrestrial water storage data into a land surface model: results for the Mississippi River Basin, *J. Hydrometeorol.*, 9, 535–548, doi:<http://dx.doi.org/10.1175/2007JHM951.1>, 2008.
- 30 Zhou, Y. and Li, W.: A review of regional groundwater flow modeling, *Geoscience Frontiers*, 2, 205–214, doi:<http://dx.doi.org/10.1016/j.gsf.2011.03.003>, 2011.

Zlotnik, V., Cardenas, M., and Toundykov, D.: Effects of Multiscale Anisotropy on Basin and Hyporheic Groundwater Flow, *Ground Water*, 49, 576–583, doi:<http://dx.doi.org/10.1111/j.1745-6584.2010.00775.x>, 2011.



**Table 1.** Physically-based modelling of stream–aquifer exchanges.  
table

Ref	exch	Spec	Resolution		Scale	CS
			$\Delta x$	$\Delta t$		
Brunner et al. (2009a,b)	K	2-D V LAT	[1–100] m · [ $\leq 0.05$ ] m		perm	loc-int S
Brunner et al. (2010)	K	2-D V LAT	[1–10] m · [0.1–10] m		perm	loc-int S
Cardenas et al. (2004)	K	3-D	0.25 m · 0.25 m · 0.04 m		perm	loc S
Cardenas and Wilson (2007b,c)	P	2-D V LON	0.01 m · 0.01 m <sup>a</sup>		perm	loc S
Cardenas (2009a)	P	2-D H	NS (80 m · 45 m)		perm	loc S
Chen and Chen (2003)	K	3-D	[3–6] m · [3–6] m · [6.7–7.6] m		min	loc-int R
Derx et al. (2010)	K	3-D	[5–100] m · [5–100] m · [5–40] cm		30 min	int R
Diem et al. (2014)	K	3-D	[1–10] m · [1–10] m · [1–10] m		adapt	int R
Discacciatì et al. (2002)	P	3-D	[0.5–5] m · [0.5–5] m · [0.3–1.5] m <sup>a</sup>		perm	loc S
Doppler et al. (2007)	K	2-D H	[1–50] m · [1–50] m		1 d	int R
Ebel et al. (2009)	K	3-D	[1–20] m · [1–20] m · [0.05–0.25] m		adapt	loc-int R
Engeler et al. (2011)	K	3-D	[1–50] m · [1–50] m · [1.6–40] m		900 s	int R
Fleckenstein et al. (2006)	K	3-D	200 m · 100 m · [5–40] m		3 h	int R
Frei et al. (2009)	P	3-D	20 m × 50 m × 0.5 m		min	int S
Frei et al. (2010)	K	3-D	0.1 m × 0.1 m × 0.1 m		adapt	loc S
Gooseff et al. (2006)	K	2-D V LON	0.20 m · [0.3–0.5] m		perm	loc S
Hester and Doyle (2008)	K	2-D V LON	3 m · [0.1–0.25] m		perm	loc S
Irvine et al. (2012)	K	3-D	0.5 m · [0.5–2.6] m · [0.03–0.7] m		perm	loc S
Janssen et al. (2012)	P	2-D V LON	2 mm · 2 mm		perm	loc L
Kalbus et al. (2009)	K	2-D V LON	1 m · [0.05–0.2] m		perm	loc S
Kasahara and Wondzell (2003)	K	3-D	[0.3–0.5] m · [0.3–0.5] m · [0.15–0.3] m		perm	loc-int R
Kasahara and Hill (2006)	K	3-D	[0.6–3.5] m · [0.2–0.5] m · 0.15 m		perm	loc R
Käser et al. (2013)	P	2-D V LON	0.78 cm · [0.78–100] cm		perm	loc S
Koch et al. (2011)	K	3-D	NS (1.7 km · 200 m · 0.5 m)		1 h	int R
Krause and Bronstert (2007)	K	2-D H	[25–50] m · [25–50] m		1 h	int R
Krause et al. (2007)	K	2-D H	[25–250] m · [25–250] m		1 h	int-reg R
Lautz and Siegel (2006)	K	3-D	0.5 m · 0.5 m · [0.6–2] m		perm	loc-int R
Maier and Howard (2011)	K	2-D H	[1–7] m · [1–5] m · [0.1–10] m		perm	loc-int R
Marzadri et al. (2010)	K	3-D	[0.19–1.88] m · [0.06–0.5] m · [0.1] m		perm	loc-int S
Marzadri et al. (2011)	K	3-D	NS (16.9 m · 2.6 m · 1.6 m)		perm	loc S
Migliò et al. (2003)	P	3-D	[0.2–0.5] m · [0.2 · 0.5] m · [0.05–0.15] m <sup>a</sup>		600 s	loc S
Mouhri et al. (2013)	P	2-D V	[0.01–0.1] m · [0.01 · 0.1] m		min	loc R
Munz et al. (2011)	K	3-D	0.5 m · 0.5 m · [0.1–2.48] m		1 h <sup>†</sup>	loc R
Osman and Bruen (2002)	K	2-D V LAT	NS (360 m · 21 m)		perm	loc S
Peyrard et al. (2008)	P	2-D H	[10–40] m · [10–40] m		adapt	int R
Pryet et al. (Sub.)	K	2-D H	1 km · 1 km		1 d	reg R
Revellì et al. (2008)	K	2-D H	NS ([0.22–4.4] km · [0.19–3.8] km)		perm	int S
Rushton (2007)	K	2-D V LAT	20 m · 0.2 m		perm	loc-int S
Saenger et al. (2005)	K	V LON	0.1 m · 0.02 m		perm	loc R
Saleh et al. (2011)	K	2-D H	[1–4] km · [1–4] km · [–] m		1 j	reg R
Sawyer and Cardenas (2009)	P	2-D V LON	0.01 m · 0.005 m <sup>†</sup>		perm	loc L
Storey et al. (2003)	K	3-D	[1–8] m · [1–8] m · [0.25–0.42] m		perm	loc R
Sulis et al. (2010)	K,P	3-D	[1–80] m · [1–80] m · [0.0125–0.5] m		adapt	loc-int S
Tonina and Buffington (2007)	P	3-D	0.03 m · 0.03 m · 0.03 m		perm	loc L
Trauth et al. (2013)	P	3-D	0.2 m · 0.2 m · 0.1 m		perm	loc S
Urquiza et al. (2008)	P	2-D V LON	1 m · 1 m		perm	loc S
Vergnes et al. (2012)	K	2-D H	0.5° · 0.5°		1 d	reg R
Vergnes and Decharme (2012)	K	2-D H	0.5° · 0.5°		1 d	con R
Wondzell et al. (2009)	K	3-D	[0.125–2] m · [0.125–2] m · [0.16–0.4] m		perm	loc R


Exch (stream–aquifer exchanges<sup>\*</sup> model): K: conductance model; P: Pressure continuity; V: vertical; LAT: lateral; LON: longitudinal; H: horizontal.

Resolution: NS: not specified (total extension between parenthesis); <sup>a</sup> cell size not specified in the paper.


Spec (Specificities)  $\Delta x$  (spatial);  $\Delta t$  (temporal): perm: steady state; adapt: adaptative time step.

Scale: loc: local; int: intermediate; reg: regional; con: continental.


CS (Case Study): S: synthetic; L: lab experiment; R: real.

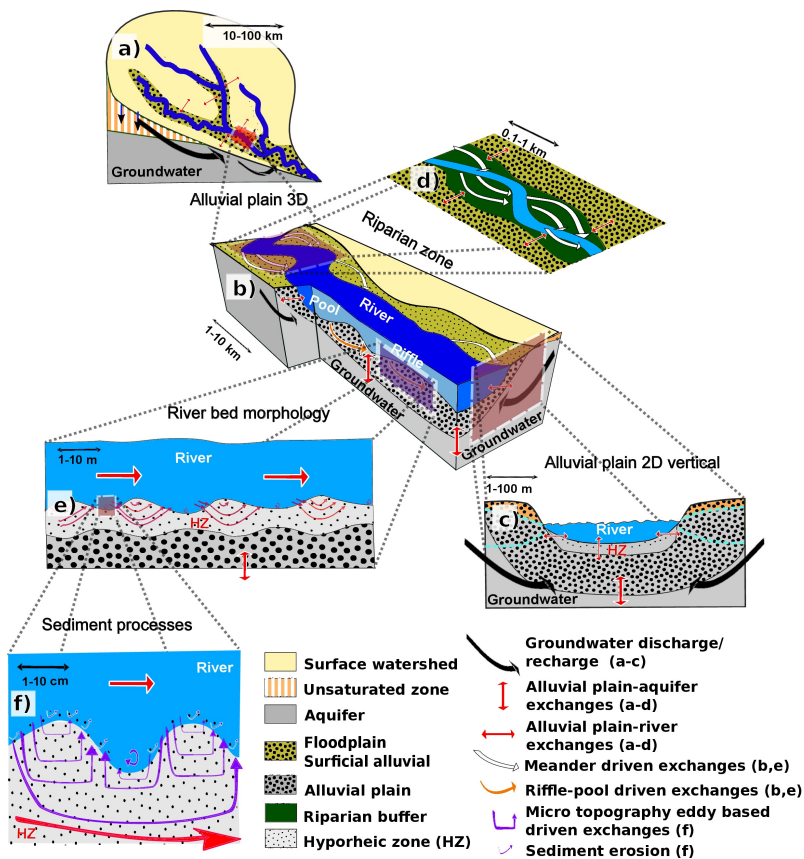


**Fig. 1.** Nested stream–aquifer interfaces: (a) watershed-basin scale (b) intermediate-reach scale in an alluvial plain (c) cross section of the stream–aquifer interface (d) meandered reach scale (e) longitudinal river-HZ exchanges (e) water column-sediment scale. Inspired by Stonedahl et al. (2010). figure

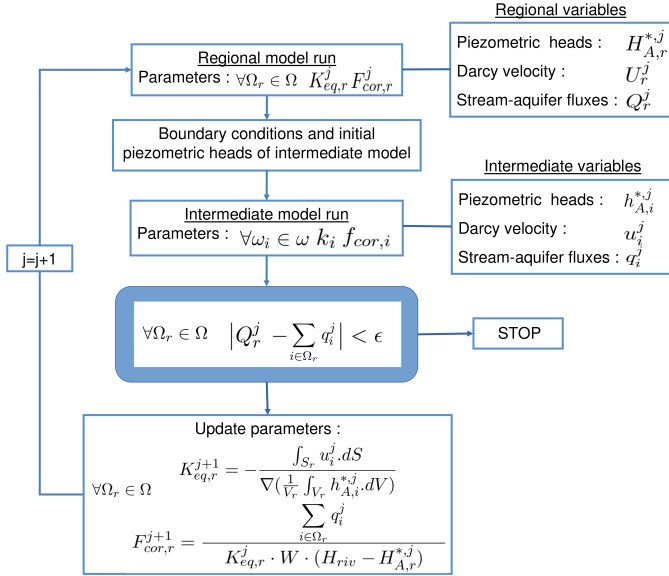


**Fig. 2.** Iterative modelling framework for coupling regional and intermediate scales.  $r$  and  $i$  indices are related to regional and intermediate scales, respectively. Capital letters represent regional parameters and variables, while lower case letters refer to intermediate ones.  $\Omega$  is the regional mesh divided in  $r \times \Omega_r$  subdomains,  $\Omega_r$  being a regional cell. In the same way,  $\omega$  is the intermediate model domain divided in  $i \times \omega_i$  subdomains,  $\omega_i$  being an intermediate cell.  $f_{cor}$  is the conductance correcting factor to upscale and  $k$  the horizontal permeability on which  $K_{eq}$  is based.  $S_r$  and  $V_r$  are the cross section and volume of  $\Omega_r$ , and  $\nabla$  denotes the head gradient.

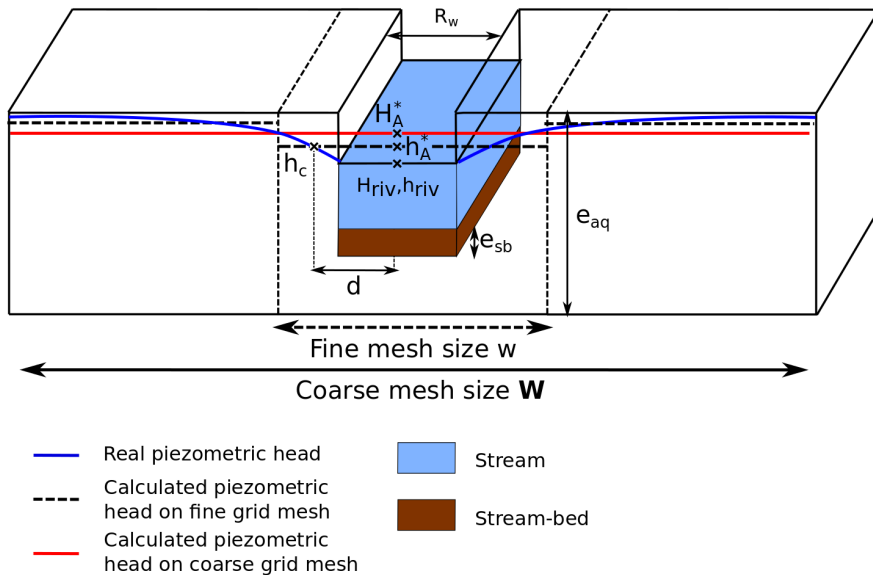

**Fig. 3.** Scaling effects on averaged near river piezometric heads.

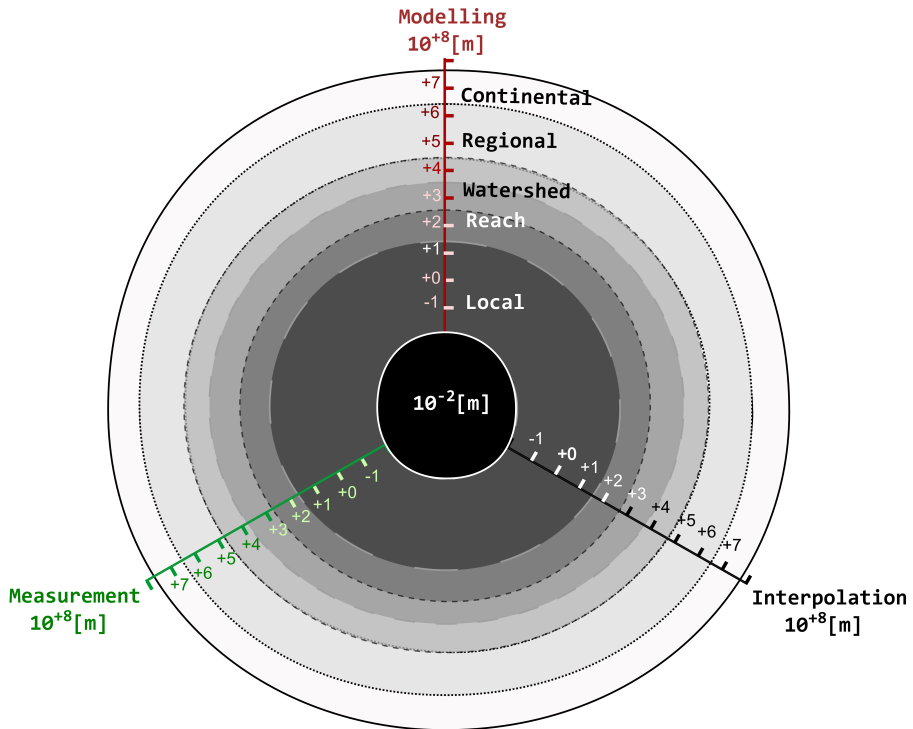

**Fig. 4.** MIM methodological space. Axis in logarithmic scale.

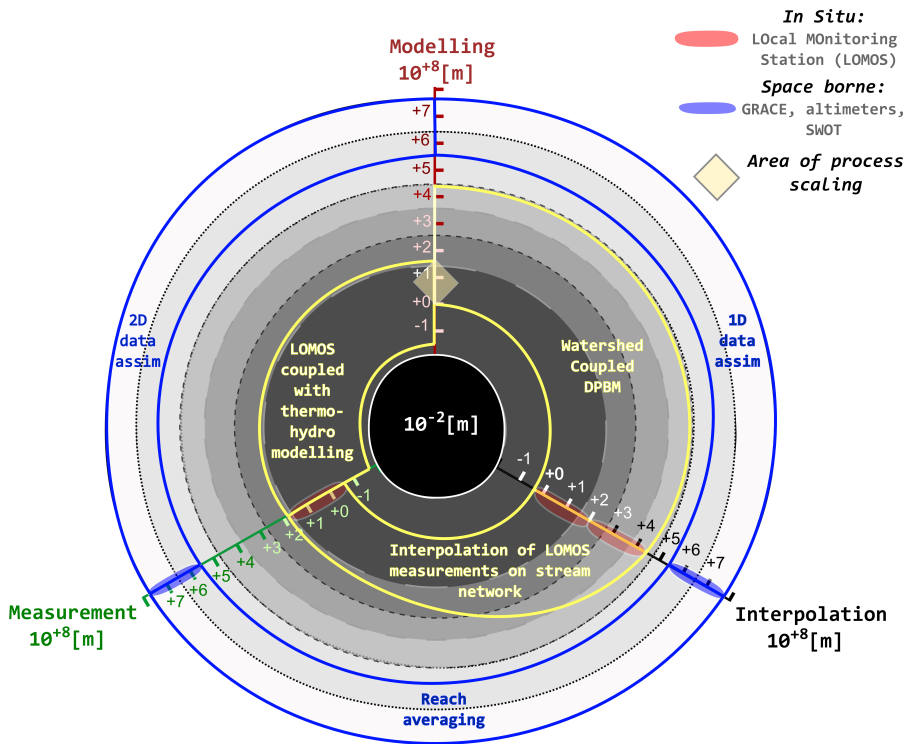

**Fig. 5.** Localisation of two approaches in the MIM methodological space. In yellow: upscaling methodology from the local to the watershed scale based on LOMOS coupled with DPBM. In blue: regional to continental scales covered by satellite data coupled to assimilation frameworks. Axis in logarithmic scale. data assim: data assimilation.