

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Divergence of reference evapotranspiration observations with windy tropical conditions

R. G. Anderson^{1,*}, D. Wang¹, R. Tirado-Corbalá¹, H. Zhang^{1,**}, and J. E. Ayars¹

¹USDA, Agricultural Research Service, San Joaquin Valley Agricultural Sciences Center, Water Management Research Unit, Parlier, California, USA

USDA, Agricultural Research Service, US Salinity Laboratory, Contaminant Fate and Transport Unit, Riverside, California, USA

now at: USDA, Agricultural Research Service, Water Management Research Unit, Fort Collins, Colorado, USA

Received: 9 May 2014 - Accepted: 1 June 2014 - Published: 17 June 2014

Correspondence to: R. G. Anderson (ray.anderson@ars.usda.gov)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Discussion Paper

Discussion Paper

Discussion Paper

Full Screen / Esc Printer-friendly Version

Interactive Discussion



HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

References

Tables

Figures



Standardized reference evapotranspiration (ET) and ecosystem-specific vegetation coefficients are frequently used to estimate actual ET. However, equations for calculating reference ET have not been well validated in tropical environments. We measured ET (ET_{FC}) using Eddy Covariance (EC) towers at two irrigated sugarcane fields on the leeward (dry) side of Maui, Hawaii, USA in contrasting climates. We calculated reference ET at the fields using the short (ET₀) and tall (ET_r) vegetation versions of the American Society for Civil Engineers (ASCE) equation. The ASCE equations were compared to the Priestley-Taylor ET (ET_{PT}) and ET_{FC}. Reference ET from the ASCE approaches exceeded ET_{FC} during the mid-period (when vegetation coefficients suggest ET_{FC} should exceed reference ET). At the windier tower site, cumulative ET_r exceeded ET_{FC} by 854 mm over the course of the mid-period (267 days). At the less windy site, mid-period ET, still exceeded ET_{EC}, but the difference was smaller (443 mm). At both sites, ET_{PT} approximated mid-period ET_{FC} more closely than the ASCE equations ((ET_{PT}-ET_{FC}) < 170 mm). Analysis of applied water and precipitation, soil moisture, leaf stomatal resistance, and canopy cover suggest that the lower observed ET_{FC} was not the result of water stress or reduced vegetation cover. Use of a custom calibrated bulk canopy resistance improved the reference ET estimate and reduced seasonal ET discrepancy relative to ET_{PT} and ET_{FC} for the less windy field and had mixed performance at the windier field. These divergences suggest that modifications to reference ET equations may be warranted in some tropical regions.

1 Introduction

Accurate estimates of evapotranspiration (ET) are needed for numerous purposes including efficient irrigation scheduling (Davis and Dukes, 2010), parameterizing and running different classes of biogeochemical and hydrologic models (Fisher et al., 2005; Zhao et al., 2013), assessing changes in regional hydrology under different cultivation

ussion Paper

Discussion Paper

Discussion Paper

Discussion Paper

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusio

References

Tables

Figures

rigaroo

I**4**

-

■



Back



Full Screen / Esc

Printer-friendly Version



Back

Printer-friendly Version

Interactive Discussion



systems (Ferguson and Maxwell, 2011; Holwerda et al., 2013; Waterloo et al., 1999), and evaluating the impacts of agricultural production on regional and global climate (Kueppers et al., 2007; Lo and Famiglietti, 2013; Puma and Cook, 2010) and hydrology (Anderson et al., 2012; Vörösmarty et al., 1998). In irrigated agriculture, underestimation of required ET can lead to sub-optimal yield due to water stress (Kang et al., 2002), whereas overestimation of ET can lead to excessive applied water, thus reducing water available for other uses or additional acreage (Perry, 2005), degrading water quality (Smith, 2000), and decreasing economic competitiveness (Hargreaves and Samani, 1984).

While accurate ET estimates are essential, ET can be challenging to measure. Numerous approaches have been developed to measure or estimate ET, including lysimeters (Meissner et al., 2010), micrometeorological methods (Anderson and Goulden, 2009; Baldocchi, 2003; Hemakumara et al., 2003), satellite remote sensing (Bastiaanssen et al., 2005; Tang et al., 2009), and water balance methods. While these approaches vary in their spatial/temporal scale and methodological assumptions and accuracy, most require significant observational costs, technical expertise, or have operational difficulties that are too high for most farmers.

Because of the difficulties in actual ET measurement, the vegetation coefficient/reference ET approach (Jensen, 1968) has gained widespread acceptance for estimating actual ET for varied applications (e.g. Arnold et al., 1998; Cristea et al., 2012). This approach involves calculating a reference ET for a standard land surface, usually grass or alfalfa, using meteorological data and relating the reference surface to the ecosystem/land cover of interest with empirical coefficient(s):

$$\mathsf{ET}_{\mathsf{A}} = \mathcal{K}_{\mathsf{c}} \cdot \mathsf{ET}_{\mathsf{0}} \tag{1}$$

where ET_{Δ} is actual ET, ET_{0} is reference ET, and K_{c} is the coefficient for the specific land cover type. Two of the most commonly used standard methods include the Food and Agricultural Organization (FAO) approach presented in Irrigation and Drainage Paper 56, hereafter referred to as FAO-56 (Allen et al., 1998), and the American Society

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Abstract

Introduction

References

Tables

Figures

Full Screen / Esc

Discussion

Pape

Discussion Paper

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of Civil Engineers approach, hereafter referred to as ASCE (Allen et al., 2005). Both approaches are based on the combination Penman-Monteith formula (Monteith, 1965) and account for ET from both solar radiation and advectively-driven ET due to wind and vapor pressure deficit (VPD). Both the FAO-56 and ASCE approaches assume 5 standard measurement conditions and surface parameters (e.g. canopy height, surface resistance, albedo, etc.), thus allowing canopy and atmospheric resistance terms to be condensed into constants. Both methods also provide scaling procedures to account for variation in meteorological measurements as well as missing or erroneous data.

Validation work of standardized reference ET equations against large weighing lysimeters with reference surfaces has been done primarily in the western continental US with low atmospheric humidity (Evett et al., 2000; Jensen et al., 1990). Internationally, most other reference ET validation has been done in Mediterranean climates with similar, low, humidity (Lecina et al., 2003; Ventura et al., 1999). Relatively little evaluation of these equations has been done in areas with higher relative humidity, presumably because of the perceived lack of use for reference ET equations in these areas. However, reference ET equations are used in more humid regions for applications such as watershed modeling (Rao et al., 2011), forecasting water demand (Tian and Martinez, 2012), and determining supplemental irrigation (Suleiman and Hoogebloom, 2007). As such, it is necessary to test these reference ET equations in regions with high relative humidity to ensure accurate ET parameterization.

One major tropical and subtropical crop that has generally high ET is sugarcane. Sugarcane is a good crop to test reference ET parameterizations because of its longer full canopy period, when actual crop ET should be at its maximum relative to reference ET equations, and high crop coefficient that generally exceeds 1. Previous research in irrigated sugarcane has found full-canopy ET rates that equal or exceed evaporation rates from open-water pans (Campbell et al., 1960; Thompson and Boyce, 1967). Since the development and implementation of reference ET equations, researchers have generally found irrigated sugarcane to have a crop coefficient (K_c) greater than 1 in Australia and Swaziland (Inman-Bamber and McGlinchey, 2003), Brazil (da Silva

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Introduction

Abstract

References

Tables **Figures**

Back

11, 6473–6518, 2014

Divergence of reference ET observations

HESSD

R. G. Anderson et al.

Title Page Introduction **Abstract** References Tables **Figures** Back Full Screen / Esc Printer-friendly Version

Interactive Discussion

et al., 2012), and Texas (Salinas and Namken, 1977). However, all of these studies found variable and differing K_c values, with Inman-Bamber and McGlinchey noting a correspondence between meteorological events and outlying daily K_c values. Sugarcane's high water use, the potential for expanded irrigation to reduce yield deficits and increase production in tropical regions (Inman-Bamber et al., 1999), and the potential for sugarcane irrigation to stress water resources during dry periods in tropical areas (Ramjeawon, 1994), make it a good case study for evaluating reference ET equations in tropical regions.

To evaluate the performance of standardized reference ET equations, we established two Eddy Covariance towers over irrigated sugarcane fields in Hawaii, USA to measure ET (ET_{EC}). We calculated reference ET using the ASCE approach for short (ET₀) and tall (ET_r) reference vegetation. The FAO-56 ET₀ was not used as it is identical to ASCE ETo for calculations on a daily time step (Irmak et al., 2006; Suleiman and Hoogenbloom, 2009). We also compared ET_{FC} to the Priestley-Taylor (PT) ET equation (ET_{PT}). Our objectives were (1) to determine if standardized reference ET equations adequately parameterized actual ET across differing microclimates, (2) determine the meteorological conditions that contribute to discrepancies in the standardized equations and (3) examine corrections to improve estimates of reference ET under relatively more humid conditions.

Methods

Study region 2.1

We evaluated reference ET approaches in two sugarcane (Saccharum officinarum L.) fields with identical cultivars (Heinz et al., 1981) at a commercial farm on Maui, Hawaii, USA (Fig. 1 and Table 1). Climatic conditions vary across the farm, with changes in precipitation, wind, solar radiation, and air temperature due to orographic effects. Normal annual precipitation ranges from 275 to 1275 mm year⁻¹ from the leeward (south)

Discussion

Paper

side to the windward (northeast) side of the plantation (Giambelluca et al., 2013). Elevations on the plantation range from near sea level to ~ 340 m. The western side of the plantation is generally windier (Table 1). Drip irrigation is used to maximize limited surface and ground water resources (Moore and Fitschen, 1990); drip tape spacing is 5 2.70 m with sugarcane rows planted 45 cm away from the tape on both sides. As is typical for Hawaii (Heinz and Osgood, 2009), sugarcane is grown on a 24 month rotation with planting and harvesting throughout most of the year. Peak ET, as determined by the length of the mid-season period, lasts significantly longer (330 days) than for sugarcane in other regions (190-220 days) (Doorenbos and Pruitt, 1977; Inman-Bamber and McGlinchey, 2003).

Eddy Covariance measurements and data analysis

We installed two micrometeorological towers in contrasting micro-climates (Fig. 1 and Table 1). These towers are at the "Windy" site (lower elevation, higher wind velocity, more constant wind direction, and sandy clay loam soil) and the "Lee" site (higher elevation, lower wind velocity, and clay soil). Field fetch in the prevailing wind directions was over 200 m for both towers. Beyond the edge of each field, Windy was surrounded by sugarcane fields on all sides for over 1500 m; Lee was bordered by non-irrigated rangeland in the non-prevailing wind directions (east and south) and contiguous sugarcane fields on the north and east. Tower instrumentation included an integrated Eddy Covariance system (EC150 - Campbell Scientific, Logan, Utah, USA¹) with an open-path infrared gas analyzer, aspirated temperature probe, attached 3-D sonic anemometer head (CSAT3A - Campbell Scientific), and enhanced barometer (PTB110 - Vaisala, Vantaa, Finland). Relative humidity and air temperature were measured by a combined temperature and relative humidity probe (HMP45C - Vaisala). Net radiation was

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page **Abstract** Introduction References

> **Tables Figures**

Back

Full Screen / Esc

¹Mention of trade names or commercial products in this publication is solely for the purpose of providing specific information and does not imply recommendation or endorsement by the US Department of Agriculture.

Pape

Discussion Paper

Discussion

Back

Printer-friendly Version

Interactive Discussion



measured with a single component net radiometer (NR-Lite2 – Kipp and Zonen, Delft, Netherlands). We corrected the single component net radiometer for the effect of wind following Cobos and Baker (2003). Ground heat flux was measured as the average of four self-calibrating heat flux plates (HFP01SC - Huskeflux, Delft, Netherlands). The plates were installed at 5 cm depth at four lateral locations perpendicular to the irrigation drip line (Sect. 2.1): 0 cm (drip line), 45 cm (sugarcane row), 75 cm, and 135 cm (mid-point between drip lines). All instruments were factory calibrated prior to deployment; data were recorded and processed on solid state dataloggers (CR3000 - Campbell Scientific).

Two Water Content Reflectometry probes (CS616 - Campbell Scientific) were installed at 20 cm depth at lateral two locations perpendicular to the drip line (45 and 135 cm) to measure soil volumetric water content (VWC). These locations were chosen to correspond with the sugarcane row (center of root zone) and halfway between sugarcane rows. VWC was measured to independently assess potential water stress in both fields. VWC was calculated using a quadratic equation with empirically determined coefficients specific to each field following the manufacturer's recommendation. For the calibration, three ~ 19 L (5 US gallon) water coolers (Internal height 46.6 cm, internal diameter 32.8 cm) were used to calibrate each soil. We inserted the probe rod vertically in the center (middle) of the experimental coolers into the soil ensuring full contact with the soil. Then, the coolers were closed with their respective lids to allow the system to equilibrate before taking account of the period readings for each VWC. For the upper 40 cm of soil in each field, we determined bulk density, porosity, and soil texture (Bouyoucus, 1962) and soil water retention characteristics (Windy field only) with samples from 3 locations within the tower footprint. Soil water retention characteristic (from saturation point to 1 bar) were determined for the Windy soil using Tempe Cells (1400 Series, Soil Moisture Equipment Corp, Santa Barbara, California, USA). Water retention characteristics could not be determined in Lee field because of the logistical difficulty and equipment risk in obtaining intact Tempe Cell samples below the surface due to rockiness at the Lee site. Permanent wilting point (PWP) was

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page Introduction Abstract References Tables **Figures** Full Screen / Esc

determined using a dew point potentiometer (WP4C, Decagon Devices, Inc., Pullman, Washington, USA). Soil water depth was determined for the upper 40 cm by converting soil VWC with porosity and subtracting PWP.

The EC150 system measured CO₂, H₂O, wind velocity, and sonic temperature at ₅ 10 Hz. Other variables were averaged to 30 min fluxes. We processed raw covariances on the datalogger and post-processed high frequency time series data with commercial software (Eddy Pro Advanced V 3.0 and 4.0 - LI-COR, Lincoln, Nebraska USA). Datalogger flux calculations were downloaded daily via cellular modem. High frequency (10 Hz) data and half hourly fluxes were transferred monthly via data card. Raw time series data were checked following Vickers and Mahrt's (1997) tests. Sonic anemometer tilt was corrected using double rotation (Kaimal and Finnigan, 1994); lags between the infrared gas analyzer and sonic anemometer were determined using maximum covariance. We corrected for density fluctuations (Webb et al., 1980), low pass filtering (Moncrieff et al., 1997), and high pass filtering (Moncrieff et al., 2004). Flux footprint lengths were calculated following Kliun et al. (2004), and quality flags were assigned following the CarboEurope standard (Mauder and Foken, 2004). We independently calculated stability (Obuhkov, 1971). After installation, tower heights were periodically adjusted to keep meteorological instrumentation ~ 3.0-3.3 m above the zero plane displacement height, which was assumed to be 67% of canopy height (Arya, 2001). Canopy height was measured biweekly, concurrent with the vegetation cover observations (Sect. 2.4).

Half-hourly fluxes with instrumentation errors flagged by the EC150 system, rainfall, or lack of turbulence (friction velocity < 0.1 m s⁻¹) were excluded. Excluded fluxes were gap-filled as a function of fluxes measured from similar meteorological periods using the Max-Planck Institute tool (http://www.bgc-jena.mpg.de/~MDlwork/eddyproc/index. php) (Reichstein et al., 2005). Gap filled fluxes were used to calculate daily and cumulative fluxes, but were excluded from half hourly analyses. We corrected fluxes for energy budget closure by regressing daily EC observed available energy against measured available energy (net radiation minus ground heat flux) and forcing the regression through the origin, preserving the daily mean Bowen ratio and adjusting each day's ET

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusior

References

Tables

Figures

Id







Full Screen / Esc

Printer-friendly Version



by the regression slope for the entire study period (Anderson and Wang, 2014; Leuning et al., 2012).

2.3 Reference ET equations

At each tower, daily and hourly reference ET was calculated using the ASCE short (ET_0) and tall (ET_r) reference equations, where short and tall refer to parameterized surfaces similar to well-watered fescue grass (short) and alfalfa (tall) with differences in the equations due to assumed leaf area index and bulk canopy resistance to ET

$$\mathsf{ET}_{\mathsf{r},0} = \frac{0.408\Delta(R_{\mathsf{n}} - G) + \gamma \frac{C_{\mathsf{n}}}{T + 273} u_2(e_{\mathsf{s}} - e_{\mathsf{a}})}{\Delta + \gamma(1 + C_{\mathsf{d}} u_2)}. \tag{2}$$

As shown in Eq. (2), $\mathrm{ET_{r,0}}$ is the reference ET type ($\mathrm{ET_r}$ or $\mathrm{ET_0}$ in $\mathrm{mm\,day}^{-1}$ or $\mathrm{mm\,h}^{-1}$ depending on time step), R_n and G are net radiation and ground heat flux ($\mathrm{MJ\,m^{-2}\,day^{-1}}$ or $\mathrm{MJ\,m^{-2}\,h^{-1}}$), γ is the psychrometric constant ($\mathrm{kPa\,^{\circ}C^{-1}}$), T is mean daily or hourly air temperature (°C), u_2 is mean daily or hourly wind speed measured at or scaled to 2 m height, e_s and e_a are mean saturation and actual vapor pressure (kPa), respectively, and C_n and C_d are empirical numerator and denominator constants that change with reference surface and time step (Table 1 in Allen et al., 2005). We scaled all meteorological variables from 3 m above the zero plane displacement to 2 m height following the ASCE procedure for adjusting meteorological measurements at non-standard height. Following ASCE, mean daily meteorological values were calculated as an average of daily minimum and maximum values as opposed to averaging all 24 h of measurements. Differences between these averaging approaches were small (mean T difference of 0.26 and 0.27 °C in Windy and Lee, respectively) Measured net radiation and ground heat fluxes were used for all calculations.

We also calculated another reference using the Priestley-Taylor (PT) equation (Priestley and Taylor, 1972). PT was chosen as a comparison because of its different treatment of advection vs. the Penman-Monteith (PM) type equations, its wide

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Ticiciolocs

Tables Figures

[4] ▶[

- ◆

Back Close

Full Screen / Esc

Printer-friendly Version



$$\mathsf{ET}_{\mathsf{PT}} = \frac{\alpha}{\lambda} \cdot \frac{\Delta(R_{\mathsf{n}} - G)}{\Delta + \nu}. \tag{3}$$

ET_{PT} is the PT ET (mm day⁻¹); Δ , γ , R_n , G are the same as in Eq. (2); λ is the latent heat of vaporization; and α is an empirical constant. We assumed that λ is 2.45 MJ mm⁻¹, which is the same as the ASCE/FAO-56 approach. We used an α of 1.26, which is widely, but not universally, representative of a well-watered surface across a variety of climates (e.g. Eichinger et al., 1996; McAneney and Itier, 1996).

2.4 Canopy cover and determination of mid-period

We measured fractional canopy cover with an optical camera to obtain an independent, conservative determination of the mid-season period (mid-period) for intercomparison of measured and reference ET. The mid-period is one of the growth/ET stages in the FAO/ASCE methodology and corresponds to maximum plant transpiration and the highest ecosystem coefficient (K_{c-mid}). In unstressed sugarcane, the mid-period coefficient should exceed 1 (Allen et al., 1998), thus measured ET should exceed reference ET. The camera (TetraCam ADC multispectral camera, TetraCam Inc., Chatsworth, California, USA) contains a single precision 3.2 megapixel image sensor optimized for capturing green, red, and near-infrared wavebands of reflected light. A telescoping pole tripod system (GeoData Systems Management Inc., Berea, Ohio, USA) was used to suspend the camera directly above the plant at a height of 7 m and aim vertically downward at nadir view. Each field was photographed every ~ 16±2 days. Ten images were taken in two lines perpendicular to the irrigation line at pre-selected sampling locations in each field at solar noon ± two hours; sampling locations were identical throughout the study. Each image was preprocessed in image processing software (LView Pro 2006 - CoolMoom Corp., Hallandale, Florida, USA) to paint out the pixels of soil, grass,

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Discussion Paper

Discussion Paper

Discussion Paper

Introduction

Conclusion

References

Tables

Figures

1.4





Back



Full Screen / Esc

Printer-friendly Version



shadow and other background. The preprocessed image was then analyzed using proprietary software (PixelWrench, TetraCam Inc.) to classify fractional vegetation cover based on threshold analysis, and the cover readings from the ten locations were averaged to determine mean and standard error of field vegetation cover. We considered the beginning of the mid-period to be the latter of the beginning date of mid-period from the FAO-56 K_c curve (Allen et al., 1998) or the date where canopy cover clearly exceeded 80 %, which has been shown to coincide with the start of mid-period (Carr and Knox, 2011). The end of the $K_{c\text{-mid}}$ period was set to 27 August 2012, which was the last date of irrigation data prior to the end of the FAO-56 mid-period. Finally we further restricted the end of the mid-period in the earlier planted field (Lee) to ensure that the length of the mid-period was identical in both fields for intercomparison purposes.

2.5 Leaf Area Index and stomatal resistance measurements

We measured Leaf Area Index (LAI) and leaf stomatal resistance in a field campaign during the mid-period for both EC fields (July 2012). LAI was measured using a nondestructive, optical plant canopy analyzer (LAI 2200, LI-COR Inc.) on 13 July in the Lee field and 16 July in the Windy field. At each of the 10 TetraCam sampling locations in each field (Sect. 2.4), we made 10 below canopy and 5 above canopy measurements with the optical canopy analyzer; we then used the manufacturer's software (FV2200, LI-COR Inc.) to determine mean and standard error of LAI for both fields. To observe leaf level stomatal resistance, we used a steady-state diffusion porometer (SC-1, Decagon Devices Inc.). At each TetraCam point, 9 leaves were measured: 3 fully sunlit upper canopy leaves near (< 20 vertical cm away from) the top visible dewlap (TVD) point (Glaz et al., 2008), 3 mid-level leaves that were attached to the cane stalk below the TVD height but which were still mostly sunlit, and 3 lower canopy leaves that were partially to mostly shaded. Porometry measurements were made in a 30 s measurement window using the porometer's automatic mode. We also repeated the stomatal resistance measurements at five of the TetraCam points in the Windy field to evaluate the larger discrepancies in reference ET observed in that field.

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

rigules

14

►I

•



Back



Full Screen / Esc

Printer-friendly Version



3.1 Fractional vegetation cover, leaf area index, and leaf stomatal resistance

Fractional vegetation cover increased rapidly in both fields after the beginning of the EC measurements (Fig. 2). Initial cover was < 20 % in Windy and < 45 % in Lee (112 and 142 days after planting (DAP), respectively). Some early TetraCam sampling dates were missed due to initial equipment failures. Vegetation cover exceeded 80 % in Lee on 3 November 2011 and 5 December 2011 in Windy (220 and 208 DAP, respectively); which we considered the onset of the mid-period. Both of these dates are later than the onset of mid-period according to the FAO-56 curve (180 DAP). Variation in cover was largest at the beginning of the study period (standard deviation of \sim 10 %) (Fig. 2). Vegetation cover was least variable near the onset of the mid-period (standard deviation < 5 %).

Mean (standard error) of measured Leaf Area Index (LAI) was 4.9 (0.2) in Windy on 13 July 2012 and 4.7 (0.3) in Lee on 16 July 2012. Midday leaf stomatal resistance ($r_{\rm s}$) observations of fully sunlit leaves in Windy (n=32) and Lee (n=21) showed substantial variation, ranging from 45 to 259 s m⁻¹ in Windy and 40 to 640 s m⁻¹ in Lee. Median $r_{\rm s}$ in Windy and Lee were 112 and 114 s m⁻¹, respectively. Mean (standard deviation) of $r_{\rm s}$ in Windy and Lee were 125 (57) s m⁻¹ and 161 (157) s m⁻¹, respectively. There were two observations in Lee of sunlit stomatal resistance of > 500 s m⁻¹. Excluding these two observations resulted in a revised mean and median $r_{\rm s}$ in Lee of 114 and 104 s m⁻¹, respectively. Mean sunlit stomatal resistance was not significantly different (p < 0.01) from 100 s m⁻¹ in either Windy (p = 0.02) or Lee (p = 0.09).

3.2 Meteorological observations

Air temperature and net radiation were similar in both Windy and Lee (Fig. 3a and c; Table 1). In Windy, mean daily air temperature ranged from 19.0 to 25.0 °C over the Study Period whereas in Lee mean daily air temperature ranged from 19.7 to 26.3 °C.

iscussion P

Discussion Paper

Discussion Paper

Discussion Paper

cc ①

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I∢

►I

•



Back

Close

Full Screen / Esc

Printer-friendly Version

Mean air temperature was higher in Windy than Lee (23.5 and 22.3 °C, respectively) with a similar, low day to day variability (standard deviation of 1.3 °C for both fields). Daily net radiation (R_n) was also similar between fields; R_n was slightly higher in Windy vs. Lee (11.5 and 10.9 MJ m⁻² day⁻¹; Fig. 3c and Table 1). Both fields showed larger relative variations in R_n (~ 10 MJ m⁻² day⁻¹) than in other meteorological observations. Wind velocities were sharply divergent between the two fields. Mean wind velocity was more than twice as high (4.6 m s⁻¹ vs. 2.0 m s⁻¹) in Windy compared to Lee (Fig. 3b; Table 1). Wind velocities were also more variable in Windy than Lee (standard deviation of 1.4 and 0.7 m s⁻¹, respectively).

Soil volumetric water content (VWC) observations in the Windy field underneath the sugar cane row/line varied from 23–30 % during the mid-period except after major rain events in December 2011 and March 2012 when they spiked to 36–37 % (Fig. 3d). At all times, VWC remained well above wilting point (12%) for both sensors (Table 1). Available plant water in the top 40 cm of the soil at minimum VWC was \sim 40 mm. Soil matric potentials in Windy near typical maximum (30%) and minimum (24%) soil VWC were -0.01 and $-0.033\,\text{MPa}$, respectively (Table 1). VWC observations between drip lines showed relatively little periodicity compared to underneath the cane row, indicating that neither irrigation events nor root depletion was impacting VWC at this location. Due to difficulties with instrument installation and instrument failure, we were not able to obtain a reliable time series of soil VWC observations in the Lee field.

From tower establishment to the end of the study period, daily EC measured evapotranspiration (ET_{EC}) ranged from 1.6 to $5.5\,\mathrm{mm\,day^{-1}}$, with a mean of $3.2\,\mathrm{mm\,day^{-1}}$, in Lee and 1.6 to $5.5\,\mathrm{mm\,day^{-1}}$, with a mean $3.8\,\mathrm{mm\,day^{-1}}$, in Windy (Fig. 4). ET_{EC} showed relatively little seasonal variation (< $3\,\mathrm{mm\,day^{-1}}$ from summer maxima to winter minima) and greater day to day variations of $1-2\,\mathrm{mm\,day^{-1}}$. Cumulatively, midperiod ET_{EC} totaled 848 mm in Lee and 1002 mm in Windy (Fig. 5). Factors contributing to higher ET_{EC} in Windy include higher wind speed, slightly higher $R_{\rm n}$, a higher mean air temperature, and lower mean daily relative humidity. However, maximum daily air

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

|d | ►|

→ -

Full Screen / Esc

Printer-friendly Version



temperature is higher near Lee than Windy. Ground heat flux was minimal (< 3% of R_n during daytime periods) at both sites during the mid-period.

Quality control checks on the EC data indicated no significant issues with ET measurements. Energy closure varied significantly between the sites, with daily energy closure of the turbulent fluxes of 75% at Lee and 97% at Windy. As data processing and instrumentation were identical between sites, the difference in energy closure is very likely due to the differences in topography and turbulence between the two fields, particularly nighttime turbulence (Anderson and Wang, 2014). Friction velocity at Windy rarely dropped below the critical threshold (0.1 m s⁻¹) at night (2.5% of the half hourly fluxes). Mean 90% footprint lengths during the Study Period determined following Kljun et al. (2004) were 158 m in Windy and 124 m in Lee, which indicate that our EC towers were observing the field of interest even during the rare periods (~7% of record) where we were observing in the short fetch direction (Table 1) such as during Kona winds (winds from the south and west). During the predominant trade wind flows (prevailing winds from the northeast), our fetch in both fields was > 200 m.

3.3 Reference ET at EC tower sites

Daily short (ET $_0$) and tall (ET $_r$) ASCE reference ET were significantly different between the two sites (Fig. 4). In Windy, ET $_0$ ranged from 1.6 to 8.1 mm day $^{-1}$ over the study period with a mean of 5.2 mm day $^{-1}$ (5.1 mm day $^{-1}$ over the mid-period). ET $_r$ ranged from 2.0 to 12.3 mm day $^{-1}$ with a mean of 7.14 mm day $^{-1}$ (7.0 mm day $^{-1}$ for mid-period). For Lee, ET $_0$ varied from 0.6 to 6.5 mm day $^{-1}$ with a mean of 4.0 mm day $^{-1}$ (3.9 mm day $^{-1}$ for mid-period). For ET $_r$, the range was 0.8 to 8.6 mm day $^{-1}$ with a mean of 5.0 mm day $^{-1}$ (4.8 mm day $^{-1}$ mid-period). The Priestley–Taylor ET (ET $_{PT}$) showed less difference between the two fields. Mean ET $_{PT}$ was slightly higher at Windy (4.3 and 4.1 mm day $^{-1}$ mid-period) than at Lee (4.0 and 3.8 mm day $^{-1}$ mid-period).

Over the course of the study, cumulative ET_0 was 1483 and 2095 mm at Lee and Windy, respectively, while cumulative ET_r was 1823 and 2855 mm (Fig. 5). Similar to the

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Joriciusion

References

Tables

Figures

14



Deale



Full Screen / Esc

Printer-friendly Version



Discussion Paper

daily values, cumulative ET_{PT} values were considerable closer, 1466 mm at Lee and 1703 mm at Windy. As expected, the cumulative difference between reference equations and ET_{FC} grew in the early portion of the study period, prior to the mid-period (Fig. 5). During the mid-period, the difference between ET_r and ET_{FC} grew significantly ⁵ larger in both EC fields. Windy also saw increasing differences between ET₀, ET_{PT}, and ET_{FC}, whereas in Lee cumulative ET₀ and ET_{PT} tracked quite closely with each other.

To further evaluate these discrepancies between reference and ET_{FC}, we calculated the cumulative difference between the 3 reference ET equations and $\mathrm{ET}_{\mathrm{EC}}$ during the mid-period (Fig. 6). ET_{PT} was the only equation with near zero cumulative difference for a substantial amount of the mid-period for both fields; ET₀ was near 0 for the Lee field from October 2011-February 2012 but not for the Windy field. Over the mid-period in Windy, the difference between cumulative ET_{FC} and ET_{PT} ranged from -40 mm in March 2012 to 92 mm at the end of the study period (August 2012) with cumulative differences of < 40 mm until July 2012. In Lee, the differences were greater, varying between -33 and 161 mm. The difference with ET₀ ranged from 0 (at beginning of mid-period) to 362 mm and 195 mm in Windy and Lee, respectively. ET, showed the greatest cumulative differences of 854 and 443 mm in Windy and Lee.

3.4 Bulk canopy resistances at EC towers, soil observations, and patterns in ET discrepancies

To examine the discrepancies between the ASCE equations (ET₀ and ET_r), the Priestley-Taylor equation (ET_{PT}), and measured ET_{FC}, we inverted the Penman-Monteith (PM) equation to calculate bulk canopy resistance (r_c) from ET_{FC} and ET_{PT} and compared the calculated r_c to the constant r_c used to calculate ET₀ and ET_r during the mid-period. The ASCE parameterization to calculate atmospheric resistance (r_2) was used in the inverted PM equation. Days with Available Energy (net radiation (R_n) - ground heat flux (G)) of $< 5 \,\mathrm{MJ}\,\mathrm{day}^{-1}$ were excluded because low radiation values would result in extreme r_c values and to avoid including days with precipitation, which

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page Introduction

Abstract

Conclusions References

Tables

Figures

Back

Full Screen / Esc

Printer-friendly Version

Discussion

Printer-friendly Version

Interactive Discussion



would bias the net radiation measurement of the NR-Lite2. r_c varied considerably between Windy and Lee for ET_{FC}. For the mid-period, mean (standard deviation) of daily r_c at Lee and Windy were 201 (47) s m⁻¹ and 145 (36) s m⁻¹, respectively (Fig. 7). With respect to ET_{PT} , mean (standard deviation (STD)) of daily r_c at Lee and Windy during the mid-period were 146 (28) s m⁻¹ and 175 (42) s m⁻¹, respectively (Fig. 8). In all cases, mean r_c values were significantly higher (> 75 s m⁻¹) than the daily r_c values used to parameterize the ET₀ and ET_r equations.

We calculated daytime and nighttime $r_{\rm c}$ to see if there was a systematic time of day difference between the fields and to examine if errors in daytime or nighttime parameterized r_c were disproportionally contributing to discrepancies in reference ET. Daily daytime and nighttime r_c were calculated for days that had at least 8 (daytime) and 4 (nighttime) non-gap filled half hourly flux measurements. For these calculations, daytime was defined as $R_n > 50 \,\mathrm{W\,m}^{-2}$ and nighttime as $R_n < -10 \,\mathrm{W\,m}^{-2}$. We used this definition to avoid including periods with near zero R_n that would blow up the inverted PM equation. Daily daytime and nighttime r_c are shown in Fig. 9. Nighttime r_c shows greater difference between towers, with mean (standard deviation) in Windy and Lee of $675 \,\mathrm{s}\,\mathrm{m}^{-1}$ (289 s m⁻¹) and 808 s m⁻¹ (445 s m⁻¹) and substantially larger absolute and relative standard deviation in r_c . For both fields, daytime and nighttime r_c was larger than the ASCE r_c parameterizations for almost all days. One other notable feature of the resistance terms was the low atmospheric resistance (r_a) ; in Windy and Lee, mean daily r_a was 17.7 and 38.6 s m⁻¹, respectively, over the study period.

We evaluated the correlation between meteorological observations and discrepancies between the ASCE tall reference ET equation (ET,) and ET_{EC} to assess the importance of the advective and radiation terms in the PM equation. The only parameter that was highly correlated to ET discrepancy (ET_r – ET_{FC}) was Vapor Pressure Deficit (VPD) with a coefficient of determination (r^2) of 0.66 (Fig. 10a). VPD showed a much stronger correlation with ET discrepancy than ET_{FC} ($r^2 = 0.19$) (Fig. 10b). Available Energy was moderately correlated with ET discrepancy ($r^2 = 0.37$) while all other tested

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page Introduction **Abstract**

References

Tables

Full Screen / Esc

3.5 Corrections to better parameterize sugarcane water use

We attempted two corrections to the ASCE reference ET approach to better parameterize sugarcane water use. One was a climatological correction to the ET coefficient ($K_{\text{c-adj}}$). Following the FAO-56 approach (Allen et al., 1998), an adjustment term (K_{adj}) was calculated

$$K_{\text{adj}} = 0.04 \cdot (u_{2 \text{ avg}} - 2) - 0.004 \cdot (\text{RH}_{\text{avg}} - 45) \cdot h_{\text{avg}}^{0.3},$$
 (4)

$$K_{\text{c-adj}} = K_{\text{c-FAO}} + K_{\text{adj}}.$$
 (5)

In Eqs. (4) and (5), $K_{\text{c-FAO}}$ is the literature mid canopy K_{c} value, $U_{\text{2 avg}}$ is mean location wind speed (m s⁻¹) at 2 m height, RH_{avg} is mean location relative humidity, and h_{avg} is average vegetation height. For our study we used average wind speed, relative humidity, and vegetation height over the mid-period to calculate these parameters in the absence of longer term climate data. The FAO-56 provides a range of mid-period K_{c} values for sugarcane (1.25–1.40) for short reference ET. For adjustment, we chose the lowest end of the range (1.25) for $K_{\text{c-FAO}}$ to enable the most conservative estimate of parameterized ET. The climatological K_{c} adjustment (K_{adj}) had relatively little impact on calculated water use. In the Windy field, K_{adj} was –0.0126 and in Lee K_{adj} was –0.0359. For both fields, the wind adjustment offset the relative humidity/vegetation height adjustment as all 3 parameters were greater than zero. The magnitude of the K_{adj} term was insufficient to account for the observed discrepancies between reference ET and ET_{FC}.

The second correction was to parameterize the ASCE-PM equation with a custom, constant, $r_{\rm c}$. To estimate a $r_{\rm c}$ value, an intermediate bulk canopy resistance of 165 s m⁻¹ was used, which was chosen as the weighted average of the $r_{\rm c}$ calculated by inverting the ET_{PT} at Windy and Lee. We then ran the full form PM equation to calculate

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

_

Figures

I₫

. . .



Back

Discussion Pape



Full Screen / Esc

Printer-friendly Version

Interactive Discussion



6489

a new reference ET (ET_{r-cane}). Cumulative differences between ET_{r-cane} and ET_{EC} are shown in Fig. 11 along with the differences between ET_{PT} and ET_{EC}. ET_{r-cane} showed some improvements over ET_{PT} in predicting measured ET between October 2011–March 2012; in particular ET_{r-cane} had less underestimation of ET (15 to 27 mm improvement) in winter and spring for both fields and had consistently better performance in the Lee field. ET_{r-cane} had worse performance than ET_{PT} during the summer in the Windy field (40 mm). The minimum cumulative difference between ET_{r-cane} and ET_{EC} was -12 mm and -18 mm in Windy and Lee, respectively. The maximum cumulative difference between ET_{r-cane} and ET_{EC} was 132 and 164 mm at the end of the study period in Windy and Lee, respectively.

4 Discussion

4.1 Is Hawaiian sugarcane representative of a fully-transpiring reference ET surface?

Well watered, full canopy, sugarcane has generally been reported to have an ET rate 1.1 to 1.4 times the ASCE/FAO-56 reference ET₀ equation (da Silva et al., 2012; Inman-Bamber and McGlinchey, 2003). Furthermore, a reference PM ET equation designed specifically for sugarcane created by McGlinchey and Inman-Bamber (1996) has a bulk canopy resistance that is slightly lower than the daily ASCE ET_r equation (40 s m⁻¹ vs. 45 s m⁻¹ for ASCE ET_r). Therefore, the significant overestimation of measured ET (ET_{EC}) by the ET₀ and ET_r equations found in this study was quite surprising. Although Windy and Lee fields had slight differences in planting dates, available soil water capacity, and fetch (Table 1), we do not believe these account for the observed ET/reference ET differences between the fields. Seasonal variation in temperature in Hawaii is quite small, wind speeds appeared to be uncorrelated to seasonality, and flux footprints during turbulent periods were well within the fetch in both fields. The quality of Eddy Covariance observations was good, especially at the Windy tower where high

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

i igai oo

17

Back

Close

Full Screen / Esc

Printer-friendly Version



turbulence, low proportion of time periods requiring gap-filling, and excellent energy budget closure indicated that the methodological requirements of the Eddy Covariance method were well satisfied (Anderson and Wang, 2014). At the Lee tower, Eddy Covariance measurements showed a more typical pattern with a larger number of gaps during still nighttime periods when ET is low. Furthermore, seasonal and annual totals of ET have been shown to be relatively insensitive to gap-filling methodologies (Alavi et al., 2006).

One hypothesis is that portions of the fields measured by our Eddy Covariance towers were under significant water stress or had less than optimal cover, and thus were not representative of a reference ET type surface. Uniformity of irrigation is a major concern with drip irrigation, particularly with sub and near surface drip lines where root development can plug or pinch drip lines, leading to insufficient irrigation (e.g. Soopramanien et al., 1990). At our field with higher ET (Windy), visible dry lines arising from pinched drip tubes appeared in parts of the field at and after the end of the study period. However, there are multiple independent lines of evidence against this hypothesis.

With respect to canopy cover, the TetraCam observations of cover (Fig. 2) show that fractional cover remained above 80%, a threshold for the mid-period $K_{\rm c}$ (Carr and Knox, 2011; Inman-Bamber and McGlinchey, 2003). More evidence for full canopy comes from the leaf area index (LAI) measurements made in July 2012 toward the end of the mid-period. In both Lee and Windy, mean LAI (4.7 and 4.9) were slightly higher than the LAI (4.5) parameterized in the ET_r equation (Allen et al., 2005). These two types of data indicate that incomplete cover is not an issue with our study sites.

Another possibility is that the sugarcane leaves are under significant water stress and thus are transpiring at a lower rate. Four factors show that the sugarcane is unlikely to be water stressed. First, porometer measurements from the July 2012 campaign of midday, sunlit, leaf stomatal resistance were not significantly $> 100 \, \mathrm{s} \, \mathrm{m}^{-1}$. The $100 \, \mathrm{s} \, \mathrm{m}^{-1}$ comes from the mean leaf level stomatal resistance of a sunlit leaf on a well-watered plant as measured by Szeicz and Long (1969) and which is used as a basis for scaling bulk canopy resistance in the ASCE and FAO-56 approaches (Allen et al.,

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

•



Back



Full Screen / Esc

Printer-friendly Version



Discussion Paper

11, 6473-6518, 2014

HESSD

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

References

Tables

Figures

Back

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

1998; 2005). Second, we compared the daily observed ET coefficient (K_c) from the day

immediately preceding a substantial irrigation or rain event (defined as > 8 mm day⁻¹) during the mid-period with daily K_c 2 and 3 days after the irrigation event using a paired

t test (n = 106 in Windy and n = 98 in Lee). We reasoned that stressed full canopy sugarcane would respond to irrigation within 3 days, but that 3 days were short enough

to avoid confounding changes due to variations in field water budgets. Neither field

showed significantly greater daily ET_{FC} following an irrigation during the mid-period

(p > 0.40 for all tests). Third, the soil volumetric water content (VWC) data from the

Windy field indicate relatively high soil moisture content; available soil water under-

neath the cane row always remained at > 50 % of available capacity. Windy's soils were also near field capacity (and far above permanent wilting point) based on matric potential at typical maximum and minimum soil VWC (Table 1). The VWC content

also argues against severe water stress that might persist after irrigation relieves the soil moisture deficit; thus if the ASCE reference ET equations and coefficients were

applicable to this situation, we should see at least some days with ET_{FC} in the range

of ET_n and ET_r (6-10 mm day⁻¹ in Windy) when soil moisture was near or above field

capacity. Fourth, measured irrigation plus precipitation as recorded by the plantation was compared to measured cumulative ET_{FC}. At all times in the Windy field, cumulative ET_{FC} was significantly less than irrigation plus precipitation. During the mid-period, cumulative irrigation and precipitation exceeded ET_{FC} by > 100 mm. In Lee, by early January 2012, cumulative precipitation and irrigation exceeded ET_{FC}; by the end of

the mid-period (July 2012), cumulative irrigation and precipitation exceeded cumulative ET_{EC} by > 100 mm. In summary, the evidence of full canopy and the lack of evidence

of water stress indicated that the mid-period sugarcane at our study fields should be

fully transpiring.

4.2 Why do the standardized ASCE reference ET equations differ between similar sites?

Without clear evidence of water stress or lack of canopy cover over the study sites, we examine some explanations for the overestimation of the ASCE ET₀ and ET_r compared to ET_{FC} and ET_{PT}. Four hypotheses include (1) scaling of leaf level stomatal resistance to whole canopy bulk resistance, (2) incorrect parameterization of daytime leaf level resistance, (3) underestimation of nighttime bulk canopy resistance, and (4) underestimation of atmospheric resistance. Scaling up leaf level resistance measurements has long been recognized as a major challenge (Bailey and Davies, 1981; Furon et al., 2007; Sprintsin et al., 2012) due to heterogeneity of environmental variables. The ASCE/FAO reference ET methods take a single layer "big leaf" approach to scaling to convert non-stressed leaf resistances (r_s) into whole canopy bulk resistances (r_c) by using an "effective LAI" where r_c is calculated by dividing r_s by effective LAI. ASCE assumes that effective LAI is equivalent to 0.5 times measured LAI, which is assumed to be 2.9 for ET₀ and 4.5 for ET, thus resulting in effective LAIs of 1.4 and 2.3, respectively. Studies of well watered crops have found effective LAIs which vary quite significantly from those assumed for the reference surface. Tolk et al. (1996) found an effective LAI of 1.3 for irrigated maize in Texas that was only 30 % of maximum measured LAI. Other studies (Alfieri et al., 2008; Mehrez et al., 1992) have assumed effective LAI as a linear function of LAI, with effective LAI equaling 50% of LAI when LAI is 6. Ultimately, the effective LAI concept is only a presumed distribution of leaves with differing r_s (Bailey and Davies, 1981); there is a possibility that the relatively unique production system in our study fields results in a different, distinctive leaf distribution with a lower effective LAI. Along with effective LAI, another leaf parameter that could be different is leaf level resistance (r_s) . Although we did not find a highly significant difference between measured r_s and the r_s assumed in the ASCE parameterizations (100 s m⁻¹), we were able to measure r_s in only one field campaign during the mid-period, where r_s observations were limited by clouds and other logistical limitations. A large number of r_s

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I∢



4



Back



Full Screen / Esc

Printer-friendly Version



observations are needed to accurately characterize r_c (Denmead, 1984); more than we could feasibly measure during our field campaign. We also note that other researchers (e.g. Zhang et al., 2008) have found non-stressed r_s values greater than $100 \, \text{s m}^{-1}$.

Two other non-biological factors could help explain the discrepancy between ASCE reference and mid-period ET_{EC}. One is nighttime $r_{\rm c}$. Both ASCE approaches assume a nighttime $r_{\rm c}$ of 200 s m⁻¹, which is based on measurements of damp soil beneath a grass lysimeter (Allen et al., 2006). Measured nighttime $r_{\rm c}$ at our fields was significantly higher. We suspect that the taller sugarcane canopy and substantial layer of trash and lodged cane minimizes bare soil water evaporation, thus increasing night-time $r_{\rm c}$. Oliver and Singels (2012) found significant decrease in soil evaporation in sugarcane with surfaces covered by crop residue. Furthermore, the minimal daytime ground heat flux (< 5 %) further reduces nighttime ET. Another factor is canopy energy storage that is considerable in high biomass systems (Anderson and Wang, 2014). Finally, we note that nighttime $r_{\rm c}$ is likely to be a locally-specific value; 200 s m⁻¹ is too low for our study region, but it is too high for other regions with significant advection (Evett et al., 2012).

Along with nighttime $r_{\rm c}$, we examined the role of atmospheric resistance ($r_{\rm a}$) in parameterizing ET, given the low observed mean $r_{\rm a}$ at Windy ($<20\,{\rm s\,m}^{-1}$) and the demonstrated importance of atmospheric resistance/conductance parameterizations in coastal tropical regions for accurate ET parameterization (e.g. Holwerda et al., 2012). Given the canopy architecture of mid-period sugarcane in our study fields, we were not certain about the equations that are commonly used to parameterize zero plane displacement height and roughness lengths, which are also used in the ASCE reference ET equations. To test the effect of $r_{\rm a}$ uncertainty, a sensitivity analysis was conducted. We used $r_{\rm a}$ that was 200 and 50 % of the original $r_{\rm a}$ and recalculated $r_{\rm c}$ for both EC towers and their adjacent weather stations. In all cases, the new $r_{\rm a}$ changed the $r_{\rm c}$ values by $<10\,{\rm s\,m}^{-1}$, with most $r_{\rm c}$ values changed by $<5\,{\rm s\,m}^{-1}$. These values are too small to explain the discrepancy between observed and parameterized $r_{\rm c}$. The presence of $r_{\rm a}$

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

onclusions References

Tables Figures

I4 ►I

Back Close

Full Screen / Esc

Printer-friendly Version



in both the numerator and denominator of the PM equation limits the impact of variation in r_a on r_c .

Finally, we note that the ASCE and FAO reference ET equations show varying sensitivity to meteorological variables depending upon climate. Multiple studies have shown spatial, seasonal, and interannual variation in the sensitivity of reference ET to meteorological inputs, with the most sensitive input (air temperature, wind velocity, relative humidity, etc.) changing depending upon season and location (e.g. Bandyopadhyay et al., 2009; Estevez et al., 2009; Gong et al., 2006; Huo et al., 2013; Irmak et al., 2006; Liang et al., 2008; Liu et al., 2014). Irmak et al. (2006) and Estevez et al. (2009) found increased sensitivity to reference ET parameterization at locations with higher wind velocities in the United States and Spain, respectively. Bandyopadhyay et al. (2009) and Huo et al. (2013) reported that decreased wind velocities accounted for the largest proportion of decreased reference ET in climatically differing regions in India and China. Across a large river basin in China (Chiang Jiang), Gong et al. (2006) showed that sensitivities of reference ET to other meteorological variables (air temperature and relative humidity) depended significantly on the spatial pattern of wind sensitivity.

5 Summary and conclusion

We investigated discrepancies between two standardized reference ET equations and Eddy Covariance measured ET at two field sites over irrigated sugarcane in Maui, Hawaii, USA. At both fields, measured daily ET during the mid-period should have approached the tall reference ET equation and exceeded the short reference ET equation. At both fields, both ASCE reference ET equations significantly overestimated midperiod ET compared to Eddy Covariance observations of ET. The Priestley–Taylor (PT) equation performed substantially better at the Windy field than the short reference ET, while the short reference ET equation and PT were more closely matched at the Lee field. We used a custom bulk canopy resistance derived from inverting PT ET; the custom cane reference ET equation had less seasonal variation in ET discrepancy.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

14

4



Back



Full Screen / Esc

Printer-friendly Version



Multiple, independent, field observations did not indicate insufficient canopy cover or plant water stress reducing ET_{FC} significantly.

This study indicated nighttime bulk canopy resistance, leaf stomatal resistance, and effective leaf area index as possible causes for the discrepancy in bulk canopy resistance (and reference ET estimates) between the ASCE reference equations and mid-period ET_{EC}. The higher bulk canopy resistances and relationship between ET discrepancies and vapor pressure deficit indicated that the ASCE equations overestimated the advective component of ET. Ultimately, validation with field methods, including micrometeorology and water balance methods, is needed to establish the accuracy of the ASCE equations in a region where they have not been tested previously. Adjusting the bulk canopy resistance to local climate to reduce the advective component of ET may make the full ASCE Penman–Monteith equation a more appropriate equation in this region.

The Priestley–Taylor (PT) equation performs better than $\mathrm{ET_r}$ or $\mathrm{ET_0}$ in our study region. The PT equation likely provides a more robust estimation of reference ET in regions with high humidity. The simplicity of the PT equation also makes it attractive for use in larger scale project planning as it has been parameterized in satellite-based ET models (e.g. Choi et al., 2011; Jin et al., 2011) and can be used in regions with a relative paucity of surface meteorological data, unlike the ASCE/FAO equations that require near surface wind speed and humidity data that are currently supplied by surface meteorological stations and which are interpolated in satellite-based approaches (Allen et al., 2007; Hart et al., 2009).

The results illustrate the importance of careful use of reference evapotranspiration equations and coefficients for assessing actual evapotranspiration in hydrologic applications. Our finding of high bulk canopy resistance and low atmospheric resistance supports Widmoser's (2009) recommendation into research on the canopy resistance/atmospheric resistance ratio. Many areas with changing hydrology (Elison Timm et al., 2011) and areas that currently and which may soon use supplemental irrigation (Baker et al., 2012; Salazar et al., 2012) are outside of the semi-arid areas where

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

I4



Back



Full Screen / Esc

Printer-friendly Version



reference evapotranspiration methods have been primarily developed and tested. As such, it will be important to ensure that the appropriate reference equation is used to parameterize evaporative demand.

Acknowledgements. Don Schukraft discussed previous meteorological investigations and observations at the farm. Jim Gartung, ARS-Parlier, assisted with the establishment of the EC tower and TetraCam measurements. David Grantz provided insight on historical evaluation of ET data for Hawaiian sugarcane. Adel Youkhana, Neil Abranyi, Jason Drogowski and the farm crew assisted with data collection and field logistical support. This research was supported by USDA-Agricultural Research Service, National Program 211: Water Availability and Watershed Management and by the US Navy, Office of Naval Research. Note: the US Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410, or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

References

Alavi, N., Warland, J. S., and Berg, A. A.: Filling gaps in evapotranspiration measurements for water budget studies: evaluation of a Kalman filtering approach, Agr. Forest Meteorol., 141, 57–66, doi:10.1016/j.agrformet.2006.09.011, 2006.

Alfieri, J. G., Niyogi, D., Blanken, P. D., Chen, F., LeMone, M. A., Mitchell, K. E., Ek, M. B., and Kumar, A.: Estimation of the minimum canopy resistance for croplands and grasslands using data from the 2002 International H₂O Project, Mon. Weather Rev., 136, 4452–4469, doi:10.1175/2008MWR2524.1, 2008.

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

I**⊲**

4



Back



Full Screen / Esc

Printer-friendly Version



- Allen, R. G., Pereira, L. S., Raes, D., and Smith, M.: Crop Evapotranspiration: Guidelines for Computing Crop Water Requirements, Food and Agriculture Organization of the United Nations, Rome, 1998.
- Allen, R. G., Walter, I. A., Elliott, R. L., Howell, T. A., Itenfisu, D., Jensen, M. E., and Snyder, R. L.: The ASCE Standardized Reference Evapotranspiration Equation, American Society of Civil Engineers, Reston, VA, 2005.
- Allen, R. G., Pruitt, W. O., Wright, J. L., Howell, T. A., Ventura, F., Snyder, R., Itenfisu, D., Steduto, P., Berengena, J., Yrisarry, J. B., Smith, M., Pereira, L. S., Raes, D., Perrier, A., Alves, I., Walter, I., and Elliott, R.: A recommendation on standardized surface resistance for hourly calculation of reference ETo by the FAO56 Penman–Monteith method, Agr. Water Manage., 81, 1–22, doi:10.1016/j.agwat.2005.03.007, 2006.
- Anderson, R. G. and Goulden, M. L.: A mobile platform to constrain regional estimates of evapotranspiration, Agr. Forest Meteorol., 149, 771–782, doi:10.1016/j.agrformet.2008.10.022, 2009.
- Anderson, R. G. and Wang, D.: Energy budget closure observed in paired Eddy Covariance towers with increased and continuous daily turbulence, Agr. Forest Meteorol., 184, 204–209, doi:10.1016/j.agrformet.2013.09.012, 2014.
 - Anderson, R. G., Lo, M.-H., and Famiglietti, J. S.: Assessing surface water consumption using remotely-sensed groundwater, evapotranspiration, and precipitation, Geophys. Res. Lett., 39, L16401, doi:10.1029/2012GL052400, 2012.
 - Arnold, J. G., Srinivasan, R., Muttiah, R. S., and Williams, J. R.: Large area hydrologic modeling and assessment Part I: Model development, J. Am. Water Resour. As., 34, 73–89, doi:10.1111/j.1752-1688.1998.tb05961.x, 1998.
 - Arya, S. P.: Introduction to Micrometeorology, Academic Press, San Diego, 2001.
- Bailey, W. G. and Davies, J. A.: Bulk stomatal resistance control on evaporation, Bound.-Lay. Meteorol., 20, 401–415, doi:10.1007/BF00122291, 1981.
 - Baker, J. M., Griffis, T. J., and Ochsner, T. E.: Coupling landscape water storage and supplemental irrigation to increase productivity and improve environmental stewardship in the US Midwest, Water Resour. Res., 48, W05301, doi:10.1029/2011WR011780, 2012.
- Baldocchi, D. D.: Assessing the eddy covariance technique for evaluating carbon dioxide exchange rates of ecosystems: past, present and future, Glob. Change Biol., 9, 479–492, doi:10.1046/j.1365-2486.2003.00629.x, 2003.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

14

4



Back



Full Screen / Esc

Printer-friendly Version



- Bandyopadhyay, A., Bhadra, A., Raghuwanshi, N. S., and Singh, R.: Temporal trends in estimates of reference evapotranspiration over India, J. Hydrol. Eng., 14, 508–515, doi:10.1061/(ASCE)HE.1943-5584.0000006, 2009.
- Bastiaanssen, W. G. M., Noordman, E. J. M., Pelgrum, H., Davids, G., Thoreson, B. P., and Allen, R. G.: SEBAL model with remotely sensed data to improve water-resources management under actual field conditions, J. Irrig. Drain. E.-ASCE, 131, 85–93, doi:10.1061/(ASCE)0733-9437(2005)131:1(85), 2005.
- Campbell, R., Chang, J.-H., and Cox, D.: Evapotranspiration of Sugar Cane in Hawaii as Measured by In-Field Lysimeters in Relation to Climate, in: Proceedings of the International Society of Sugarcane Technologists; 10th Congress, Hawaii, 3–22 May, 1959, 637–645, 1960.
- Carr, M. K. V. and Knox, J. W.: The water relations and irrigation requirements of sugar cane (*Saccharum Officinarum*): a review, Exp. Agr., 47, 1–25, doi:10.1017/S0014479710000645, 2011.
- Choi, M., Woong Kim, T., and Kustas, W. P.: Reliable estimation of evapotranspiration on agricultural fields predicted by the Priestley–Taylor model using soil moisture data from ground and remote sensing observations compared with the Common Land Model, Int. J. Remote Sens., 32, 4571–4587, doi:10.1080/01431161.2010.489065, 2011.
- Cobos, D. R. and Baker, J. M.: Evaluation and modification of a domeless net radiometer, Agron. J., 95, 177–183, 2003.
- Cristea, N. C., Kampf, S. K., and Burges, S. J.: Revised coefficients for Priestley–Taylor and Makkink–Hansen equations for estimating daily reference evapotranspiration, J. Hydrol. Eng., 18, 1289–1300, doi:10.1061/(ASCE)HE.1943-5584.0000679, 2013.
 - Davis, S. L. and Dukes, M. D.: Irrigation scheduling performance by evapotranspiration-based controllers, Agr. Water Manage., 98, 19–28, doi:10.1016/j.agwat.2010.07.006, 2010.
- Denmead, O. T.: Plant physiological methods for studying evapotranspiration: problems of telling the forest from the trees, Agr. Water Manage., 8, 167–189, doi:10.1016/0378-3774(84)90052-0, 1984.
 - Doorenbos, J. and Pruitt, W.: Crop Water Requirements, FAO Irrigation and Drainage paper 24, Land and Water Development Division, FAO, Rome, 1977.
- Eichinger, W. E., Parlange, M. B., and Stricker, H.: On the concept of equilibrium evaporation and the value of the Priestley–Taylor coefficient, Water Resour. Res., 32, 161–164, doi:10.1029/95WR02920, 1996.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures



Back



Full Screen / Esc

Printer-friendly Version



Discussion

Paper

Elison Timm, O., Diaz, H. F., Giambelluca, T. W., and Takahashi, M.: Projection of changes in the frequency of heavy rain events over Hawaii based on leading Pacific climate modes, J. Geophys. Res., 116, D04109, doi:10.1029/2010JD014923, 2011.

Estévez, J., Gavilán, P., and Berengena, J.: Sensitivity analysis of a Penman-Monteith type equation to estimate reference evapotranspiration in southern Spain, Hydrol. Process., 23, 3342-3353, doi:10.1002/hyp.7439, 2009.

Evett, S. R., Howell, T. A., Todd, R. W., Schneider, A. D., and Tolk, J. A.: Alfalfa reference ET measurement and prediction, in: National Irrigation Symposium, Proceedings of the 4th Decennial Symposium, Phoenix, Arizona, USA, 14-16 November 2000, 266-272, American Society of Agricultural Engineers, St. Joseph Mich., 2000.

Evett, S. R., Lascano, R. J., Howell, T. A., Tolk, J. A., O'Shaughnessy, S. A., and Colaizzi, P. D.: Single- and dual-surface iterative energy balance solutions for reference ET, T. ASABE, 55, 533-541, doi:10.13031/2013.41388, 2012.

Ferguson, I. M. and Maxwell, R. M.: Hydrologic and land-energy feedbacks of agricultural water management practices. Environ. Res. Lett., 6, 014006, doi:10.1088/1748-9326/6/1/014006. 2011.

Fisher, J. B., DeBiase, T. A., Qi, Y., Xu, M., and Goldstein, A. H.: Evapotranspiration models compared on a Sierra Nevada forest ecosystem, Environ. Modell. Softw., 20, 783-796, doi:10.1016/j.envsoft.2004.04.009, 2005.

Furon, A. C., Warland, J. S., and Wagner-Riddle, C.: Analysis of scaling-up resistances from leaf to canopy using numerical simulations, Agron. J., 99, 1483, doi:10.2134/agronj2006.0335, 2007.

Giambelluca, T. W., Chen, Q., Frazier, A. G., Price, J. P., Chen, Y.-L., Chu, P.-S., Eischeid, J. K., and Delparte, D. M.: Online rainfall atlas of Hawai'i, B. Am. Meteorol. Soc., 94, 313-316, doi:10.1175/BAMS-D-11-00228.1, 2013.

Glaz, B., Reed, S. T., and Albano, J. P.: Sugarcane response to nitrogen fertilization on a histosol with shallow water table and periodic flooding, J. Agron. Crop Sci., 194, 369-379, doi:10.1111/j.1439-037X.2008.00329.x, 2008.

Gong, L., Xu, C., Chen, D., Halldin, S., and Chen, Y. D.: Sensitivity of the Penman-Monteith reference evapotranspiration to key climatic variables in the Changjiang (Yangtze River) basin, J. Hydrol., 329, 620–629, doi:10.1016/j.jhydrol.2006.03.027, 2006.

Hargreaves, G. H. and Samani, Z. A.: Economic considerations of deficit irrigation, J. Irrig. Drain. E.-ASCE, 110, 343-358, doi:10.1061/(ASCE)0733-9437(1984)110:4(343), 1984.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Introduction Abstract

References

Tables **Figures**

Back

Full Screen / Esc

Printer-friendly Version

- Hart, Q. J., Brugnach, M., Temesgen, B., Rueda, C., Ustin, S. L., and Frame, K.: Daily reference evapotranspiration for California using satellite imagery and weather station measurement interpolation, Civ. Eng. Environ. Syst., 26, 19–33, 2009.
- Heinz, D. J. and Osgood, R. V.: A history of the experiment station: Hawaiian Sugar Planters' Association, Hawaiian Planters' Record, 61, 1–108, 2009.
- Heinz, D. J., Tew, T. L., Meyer, H. K., and Wu, K. K.: Registration of H65-7052 Sugarcane (Reg. No. 51), Crop Sci., 21, 634–635, doi:10.2135/cropsci1981.0011183X002100040050x, 1981.
- Hemakumara, H.., Chandrapala, L., and Moene, A. F.: Evapotranspiration fluxes over mixed vegetation areas measured from large aperture scintillometer, Agr. Water Manage., 58, 109–122, doi:10.1016/S0378-3774(02)00131-2, 2003.
- Holwerda, F., Bruijnzeel, L. A., Scatena, F. N., Vugts, H. F., and Meesters, A. G. C. A.: Wet canopy evaporation from a Puerto Rican lower montane rain forest: the importance of realistically estimated aerodynamic conductance, J. Hydrol., 414–415, 1–15, doi:10.1016/j.jhydrol.2011.07.033, 2012.
- Holwerda, F., Bruijnzeel, L. A., Barradas, V. L., and Cervantes, J.: The water and energy exchange of a shaded coffee plantation in the lower montane cloud forest zone of central Veracruz, Mexico, Agr. Forest Meteorol., 173, 1–13, doi:10.1016/j.agrformet.2012.12.015, 2013.
 - Huo, Z., Dai, X., Feng, S., Kang, S., and Huang, G.: Effect of climate change on reference evapotranspiration and aridity index in arid region of China, J. Hydrol., 492, 24–34, doi:10.1016/j.jhydrol.2013.04.011, 2013.
 - Inman-Bamber, N. G. and McGlinchey, M. G.: Crop coefficients and water-use estimates for sugarcane based on long-term Bowen ratio energy balance measurements, Field Crop. Res., 83, 125–138, doi:10.1016/S0378-4290(03)00069-8, 2003.
 - Inman-Bamber, N. G., Robertson, M. J., Muchow, R. C., Wood, A. W., Pace, R., and Spillman, M. F.: Boosting yields with limited irrigation water, Proc. Aust. Soc. Sugar Cane Techol., 21, 203–211, 1999.
 - Irmak, S., Payero, J. O., Martin, D. L., Irmak, A., and Howell, T. A.: Sensitivity analyses and sensitivity coefficients of standardized daily ASCE-Penman–Monteith equation, J. Irrig. Drain. E.-ASCE, 132, 564–578, doi:10.1061/(ASCE)0733-9437(2006)132:6(564), 2006.
- Jensen, M. E.: Water consumption by agricultural plants, in: Water Deficit and Plant Growth, vol. I, Development, Control and Measurement, vol. II, Academic Press, New York, London, 1–22, 1968.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

nclusions References

Tables Figures

4

Back Close

Full Screen / Esc

Printer-friendly Version



- HESSD
 - 11, 6473-6518, 2014
 - Divergence of reference ET observations
 - R. G. Anderson et al.
 - - Close
 - Full Screen / Esc

Back

- Printer-friendly Version
- Interactive Discussion
 - © (1)

- Jensen, M. E., Burman, R. D., and Allen, R. G.: Evapotranspiration and Irrigation Water Requirements: a Manual, American Society of Civil Engineers, New York, NY, 1990.
- Jin, Y., Randerson, J. T., and Goulden, M. L.: Continental-scale net radiation and evapotranspiration estimated using MODIS satellite observations, Remote Sens. Environ., 115, 2302–2319, doi:10.1016/j.rse.2011.04.031, 2011.
- Kaimal, J. C. and Finnigan, J. J.: Atmospheric Boundary Layer Flows: their Structure and Measurement, Oxford University Press, New York, New York, USA, 1994.
- Kang, S., Zhang, L., Liang, Y., Hu, X., Cai, H., and Gu, B.: Effects of limited irrigation on yield and water use efficiency of winter wheat in the Loess Plateau of China, Agr. Water Manage., 55, 203–216, doi:10.1016/S0378-3774(01)00180-9, 2002.
- Kljun, N., Calanca, P., Rotach, M. W., and Schmid, H. P.: A simple parameterisation for flux footprint predictions, Bound.-Lay. Meteorol., 112, 503–523, doi:10.1023/B:BOUN.0000030653.71031.96, 2004.
- Kueppers, L. M., Snyder, M. A., and Sloan, L. C.: Irrigation cooling effect: regional climate forcing by land-use change, Geophys. Res. Lett., 34, L03703, doi:10.1029/2006GL028679, 2007.
- Lecina, S., Martinez-Cob, A., Pérez, P. J., Villalobos, F. J., and Baselga, J. J.: Fixed versus variable bulk canopy resistance for reference evapotranspiration estimation using the Penman–Monteith equation under semiarid conditions, Agr. Water Manage., 60, 181–198, doi:10.1016/S0378-3774(02)00174-9, 2003.
- Leuning, R., van Gorsel, E., Massman, W. J., and Isaac, P. R.: Reflections on the surface energy imbalance problem, Agr. Forest Meteorol., 156, 65–74, doi:10.1016/j.agrformet.2011.12.002, 2012.
- Liang, L., Li, L., Zhang, L., Li, J., and Li, B.: Sensitivity of Penman–Monteith reference crop evapotranspiration in Tao'er River Basin of northeastern China, Chinese Geogr. Sci., 18, 340–347, doi:10.1007/s11769-008-0340-x, 2008.
- Liu, H., Zhang, R., and Li, Y.: Sensitivity analysis of reference evapotranspiration (ETo) to climate change in Beijing, China, Desal. Water Treat., 52, 2799–2804, doi:10.1080/19443994.2013.862030. 2014.
- Lo, M.-H. and Famiglietti, J. S.: Irrigation in California's Central Valley strengthens the southwestern US water cycle, Geophys. Res. Lett., 6, 301–306 doi:10.1002/grl.50108, 2013.

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

- Title Page

 Abstract Introduction
 - onclusions References
 - Tables Figures
 - [4
- •
- Back Clo
- Printer-friendly Version

Full Screen / Esc

- Interactive Discussion
 - © BY

- Mauder, M. and Foken, T.: Documentation and Instruction Manual of the Eddy Covariance Software Package TK2, Universitätsbibliothek Bayreuth, Bayreuth, available at: http://opus.ub.uni-bayreuth.de/volltexte/2011/800 (last access: 12 June 2014), 2011.
- McAneney, K. J. and Itier, B.: Operational limits to the Priestley–Taylor formula, Irrig. Sci., 17, 37–43, doi:10.1007/s002710050020, 1996.
- McGlinchey, M. G. and Inman-Bamber, N. G.: Predicting sugarcane water use with the Penman–Monteith equation, in: Proceedings of the International Conference on Evapotranspiration and Irrigation Scheduling, San Antonio, 592–598, ASAE, St. Joseph Mich., 3–6 November 1996, 1996.
- Mehrez, M. B., Taconet, O., Vidal-Madjar, D., and Valencogne, C.: Estimation of stomatal resistance and canopy evaporation during the HAPEX-MOBILHY experiment, Agr. Forest Meteorol., 58, 285–313, doi:10.1016/0168-1923(92)90066-D, 1992.
 - Meissner, R., Rupp, H., Seeger, J., Ollesch, G., and Gee, G. W.: A comparison of water flux measurements: passive wick-samplers versus drainage lysimeters, Eur. J. Soil Sci., 61, 609–621, doi:10.1111/j.1365-2389.2010.01255.x, 2010.
 - Moncrieff, J. B., Massheder, J. M., de Bruin, H., Elbers, J., Friborg, T., Heusinkveld, B., Kabat, P., Scott, S., Soegaard, H., and Verhoef, A.: A system to measure surface fluxes of momentum, sensible heat, water vapour and carbon dioxide, J. Hydrol., 188–189, 589–611, doi:10.1016/S0022-1694(96)03194-0, 1997.
- Moncrieff, J. B., Clement, R., Finnigan, J., and Meyers, T.: Averaging, detrending, and filtering of Eddy covariance time series, in: Handbook of Micrometeorology, vol. 29, edited by: Lee, X., Massman, W., and Law, B., Kluwer Academic Publishers, Dordrecht, 7–31, 2004.
 - Monteith, J. L.: Evaporation and environment, Sym. Soc. Exp. Biol., 19, 205–234, 1965.
 - Moore, R. C. and Fitschen, J. C.: The drip irrigation revolution in the Hawaiian sugarcane industry, in: Visions of the Future: Proceedings of the 3. National Irrigation Symposium, held in conjunction with the 11. Annual International Irrigation Exposition, 1990, Phoenix Civic Plaza, Phoenix, Arizona, ASAE, St. Joseph, Mich., 28 October–1 November, 1990.
 - Obukhov, A. M.: Turbulence in an atmosphere with a non-uniform temperature, Bound.-Lay. Meteorol., 2, 7–29, doi:10.1007/BF00718085, 1971.
- Olivier, F. and Singels, A.: The effect of crop residue layers on evapotranspiration, growth and yield of irrigated sugarcane, Water SA, 38, 77–86, doi:10.4314/wsa.v38i1.10, 2012.

Discussion Paper



Perry, C.: Irrigation reliability and the productivity of water: a proposed methodology using evapotranspiration mapping, Irrig. Drain. Systems, 19, 211–221, doi:10.1007/s10795-005-8135-z, 2005.

Priestley, C. H. B. and Taylor, R. J.: On the assessment of surface heat flux and evaporation using large-scale parameters, Mon. Weather Rev., 100, 81-92, doi:10.1175/1520-0493(1972)100<0081:OTAOSH>2.3.CO;2, 1972.

Puma, M. J. and Cook, B. I.: Effects of irrigation on global climate during the 20th century, J. Geophys. Res., 115, D16120, doi:10.1029/2010JD014122, 2010.

Ramjeawon, T.: Water resources management on the small Island of Mauritius, Int. J. Water Resour. D., 10, 143-155, doi:10.1080/07900629408722619, 1994.

Rao, L., Sun, G., Ford, C., and Vose, J.: Modeling potential evapotranspiration of two forested watersheds in the southern Appalachians, T. ASABE, 54, 2067-2078. doi:10.13031/2013.40666. 2011.

Reichstein, M., Falge, E., Baldocchi, D., Papale, D., Aubinet, M., Berbigier, P., Bernhofer, C., Buchmann, N., Gilmanov, T., Granier, A., Grunwald, T., Havrankova, K., Ilvesniemi, H., Janous, D., Knohl, A., Laurila, T., Lohila, A., Loustau, D., Matteucci, G., Meyers, T., Miglietta, F., Ourcival, J.-M., Pumpanen, J., Rambal, S., Rotenberg, E., Sanz, M., Tenhunen, J., Seufert, G., Vaccari, F., Vesala, T., Yakir, D., and Valentini, R.: On the separation of net ecosystem exchange into assimilation and ecosystem respiration: review and improved algorithm, Glob. Change Biol., 11, 1424–1439, doi:10.1111/j.1365-2486.2005.001002.x, 2005.

Salazar, M. R., Hook, J. E., Garcia y Garcia, A., Paz, J. O., Chaves, B., and Hoogenboom, G.: Estimating irrigation water use for maize in the Southeastern USA: a modeling approach, Agr. Water Manage., 107, 104-111, doi:10.1016/j.agwat.2012.01.015, 2012.

Salinas, F. and Namken, L. N.: Irrigation scheduling for sugarcane in the Lower Rio Grande Valley of Texas, Proc. Am. Soc. Sugar Cane Technol., 6, 186–191, 1977.

Da Silva, T. G. F., de Moura, M. S. B., Zolnier, S., Soares, J. M., Vieira, V. J. S., and G. F. Júnior, W.: Water requirement and crop coefficient of irrigated sugarcane in a semi-arid region, Revista Brasileira de Engenharia Agricola e Ambiental, 16, 64-71, 2012.

Smith, M.: The application of climatic data for planning and management of sustainable rainfed and irrigated crop production, Agr. Forest Meteorol., 103, 99-108, doi:10.1016/S0168-1923(00)00121-0, 2000.

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

References

Tables

Figures



Back



Printer-friendly Version

- Soopramanien, G. C., Berthelot, B., and Batchelor, C. H.: Irrigation research, development and practice in Mauritius, Agr. Water Manage., 17, 129–139, doi:10.1016/0378-3774(90)90060-C, 1990.
- Sprintsin, M., Chen, J. M., Desai, A., and Gough, C. M.: Evaluation of leaf-to-canopy upscaling methodologies against carbon flux data in North America, J. Geophys. Res., 117, G01023, doi:10.1029/2010JG001407, 2012.
- Suleiman, A. A. and Hoogenboom, G.: Comparison of Priestley–Taylor and FAO-56 Penman–Monteith for daily reference evapotranspiration estimation in Georgia, J. Irrig. Drain. E.-ASCE, 133, 175–182, doi:10.1061/(ASCE)0733-9437(2007)133:2(175), 2007.
- Suleiman, A. A. and Hoogenboom, G.: A comparison of ASCE and FAO-56 reference evapotranspiration for a 15-min time step in humid climate conditions, J. Hydrol., 375, 326–333, doi:10.1016/j.jhydrol.2009.06.020, 2009.
 - Szeicz, G. and Long, I. F.: Surface resistance of crop canopies, Water Resour. Res., 5, 622–633, doi:10.1029/WR005i003p00622, 1969.
- Tang, Q., Peterson, S., Cuenca, R. H., Hagimoto, Y., and Lettenmaier, D. P.: Satellite-based near-real-time estimation of irrigated crop water consumption, J. Geophys. Res., 114, D05114, doi:10.1029/2008JD010854, 2009.
 - Thompson, G. D. and Boyce, J. P.: Daily measurements of potential evapotranspiration from fully canopied sugarcane, Agr. Meteorol., 4, 267–279, doi:10.1016/0002-1571(67)90027-1, 1967.
 - Tian, D. and Martinez, C. J.: Forecasting reference evapotranspiration using retrospective forecast analogs in the Southeastern United States, J. Hydrometeorol., 13, 1874–1892, doi:10.1175/JHM-D-12-037.1, 2012.
 - Tolk, J. A., Howell, T. A., Steiner, J. L., and Krieg, D. R.: Corn canopy resistance determined from whole plant transpiration, in: Proceedings of the International Conference on Evapotranspiration and Irrigation Scheduling, San Antonio, 347–351, ASAE, St. Joseph Mich., 3-6 November, 1996.
 - Ventura, F., Spano, D., Duce, P., and Snyder, R. L.: An evaluation of common evapotranspiration equations, Irrigation Sci., 18, 163–170, doi:10.1007/s002710050058, 1999.
- Vickers, D. and Mahrt, L.: Quality control and flux sampling problems for tower and aircraft data, J. Atmos. Ocean. Tech., 14, 512–526, doi:10.1175/1520-0426(1997)014<0512:QCAFSP>2.0.CO;2, 1997.

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusion

References

Tables

Figures

14



Back



Full Screen / Esc

Printer-friendly Version



- 11, 6473–6518, 2014
- **HESSD**
 - **Divergence of** reference ET observations
 - R. G. Anderson et al.
 - Title Page **Abstract** Introduction References
 - Tables **Figures**
- Back
 - Full Screen / Esc
- Printer-friendly Version
- Interactive Discussion



- Vörösmarty, C. J., Federer, C. A., and Schloss, A. L.: Potential evaporation functions compared on US watersheds: possible implications for global-scale water balance and terrestrial ecosystem modeling, J. Hydrol., 207, 147–169, doi:10.1016/S0022-1694(98)00109-7, 1998.
- Waterloo, M. J., Bruijnzeel, L. A., Vugts, H. F., and Rawaga, T. T.: Evaporation from Pinus caribaea plantations on former grassland soils under maritime tropical conditions, Water Resour. Res., 35, 2133-2144, doi:10.1029/1999WR900006, 1999.
- Webb, E. K., Pearman, G. I., and Leuning, R.: Correction of flux measurements for density effects due to heat and water vapour transfer, Q. J. Roy. Meteor. Soc., 106, 85-100, doi:10.1002/qj.49710644707, 1980.
- Widmoser, P.: A discussion on and alternative to the Penman-Monteith equation, Agr. Water Manage., 96, 711-721, doi:10.1016/j.agwat.2008.10.003, 2009.
- Wright, J. L., Allen, Richard G., and Howell, T. A.: Conversion between evapotranspiration references and methods, in: National Irrigation Symposium, Proceedings of the 4th Decennial Symposium, Phoenix, Arizona, USA, 14-16 November 2000, 251-259, American Society of Agricultural Engineers, St. Joseph Mich., 2000.
- Zhang, B., Kang, S., Li, F., and Zhang, L.: Comparison of three evapotranspiration models to Bowen ratio-energy balance method for a vineyard in an arid desert region of northwest China, Agr. Forest Meteorol., 148, 1629–1640, doi:10.1016/j.agrformet.2008.05.016, 2008.
- Zhao, L., Xia, J., Xu, C., Wang, Z., Sobkowiak, L., and Long, C.: Evapotranspiration estimation methods in hydrological models, J. Geogr. Sci., 23, 359-369, doi:10.1007/s11442-013-1015-9, 2013.

20

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page		
Abstract	Introduction	
Conclusions	References	
Tables	Figures	
14	►I	
•	•	
Back	Close	
Full Screen / Esc		

Printer-friendly Version

Interactive Discussion



Table 1. Eddy Covariance field site information.

Micrometeorological site information		
Field	Lee	Windy
Latitude (° N)	20.784664	20.824633
Longitude (°W)	156.403869	156.491278
Elevation (m)	203	44
Date field planted	28 Mar 2011	11 May 2011
Date tower established	21 Jul 2011	23 Jul 2011
Begin of mid-period (cover > 80 %)	3 Nov 2011	5 Dec 2011
End of analysis	26 Jul 2012	27 Aug 2012
Natural Resource Conservation	Waiakoa very stony,	Pulehu cobbly
Service (NRCS) Soil Series	silty clay loam	silt loam
Bulk Density ^a (g cm ⁻³)	1.22	1.35
Porosity (%)	54	49
Soil texture classification ^b	Clay	Sandy clay loam
Soil texture – Sand (%)	31	51
Soil texture – Silt (%)	15	16
Soil texture – Clay (%)	54	33
Soil volumetric water content (VWC) at saturation (mm/40 cm depth)	216	196
Soil Water storage (Water content at 30 % VWC-wilting point) (mm)	60	72
Wilting Point (% VWC)	15	12
Matric potential at 30 % VWC (MPa)	NA ^c	-0.01
Matric potential at 24 % VWC (MPa)	NA	-0.033
Field Size (ha)	99.1	62.6
Field length (m) (predominant wind)	> 500	415
Field length (m) (shortest direction)	220	150
Mean meteorological observations (1 Aug 2011–31 Jul 2012)		
Mean daily air temperature (°C)	22.3	23.4
Mean minimum daily air temperature (°C)	17.8	20.4
Mean maximum daily air temperature (°C)	27.3	26.9
Mean daily wind speed (m s ⁻¹)	2.0	4.6
Mean daily net radiation (MJ m ⁻² day ⁻¹)	10.7	11.3
Mean daily relative humidity (%)	65	62

^a All reported soil properties averaged/summed over the first 40 cm of soil depth.

b Soil texture was determined in the lab using the Hydrometer method.

Matric potential not available for Lee because of extreme logistical difficulty in obtaining intact Tempe Cell samples at depth for determination of water retention characteristics.

Discussion Paper


11, 6473-6518, 2014

HESSD

Divergence of reference ET observations

R. G. Anderson et al.

Title Page





Printer-friendly Version

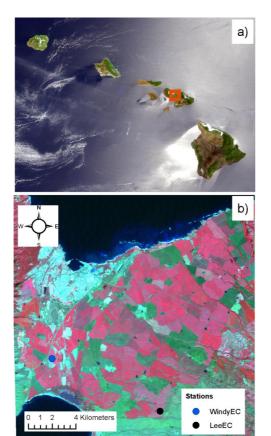


Figure 1. (a) True color image of the main Hawaiian Islands from the MODerate resolution Imaging Spectroradiometer (250 m resolution - image date: 27 May 2003). Study region is outlined in red box. (b) The Study Region on Central Maui showing the location of the Eddy Covariance (EC) towers (Windy and Lee) used in this study. Image is false color Landsat 7 (30 m resolution - image date: 5 February 2000).

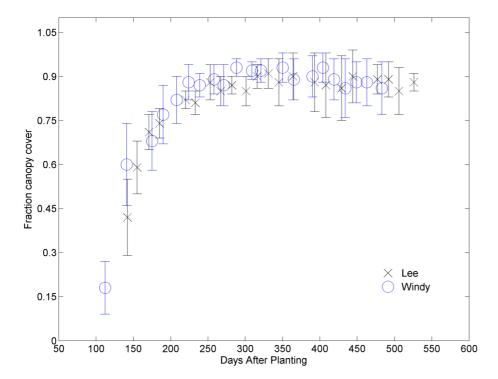


Figure 2. Measured mean and standard deviation of fractional vegetation cover from TetraCam for Windy and Lee fields.

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back



Full Screen / Esc

Printer-friendly Version



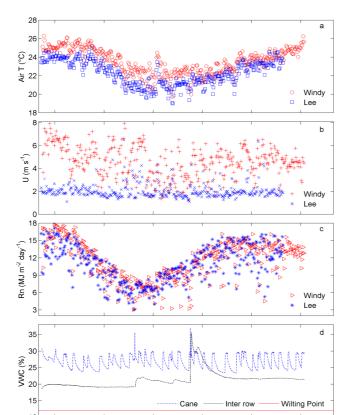


Figure 3. Meteorological and soil observations during the study period: **(a)** mean daily air temperature; **(b)** mean 24 h wind velocity; **(c)** cumulative daily net radiation; and **(d)** soil volumetric water content (VWC) data from Windy field at 20 cm depth underneath cane row (45 cm away from drip line) and inter row or midway between drip lines (137 cm away from drip line). Wilting point noted as solid red line (12 % VWC).

03-25-12

Date

06-08-12

08-22-12

01-10-12

10-27-11

08-13-11

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

Full Screen / Esc
Printer-friendly Version

Back





Full Screen / Esc

Back

Printer-friendly Version

Interactive Discussion



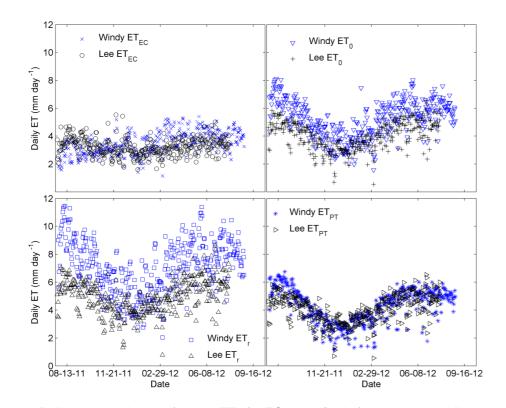


Figure 4. Daily measured and reference ETs for EC tower fields from tower establishment until the end of the study period for each field.

HESSD

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Introduction

References

Figures

Abstract

Conclusions

Tables



| Discussion Paper

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



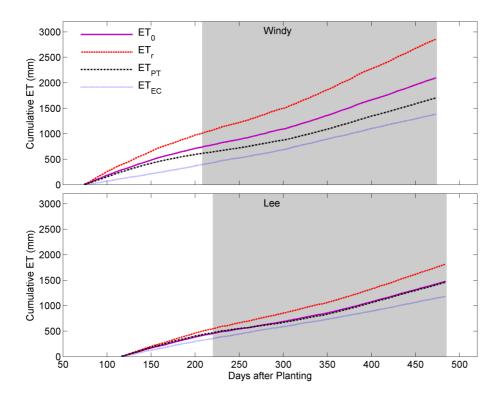


Figure 5. Cumulative measured and reference ET for Windy and Lee plotted against Days after Planting (DAP). Shaded background indicates mid-period when ground canopy cover > 80 %.

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Introduction

References

Figures

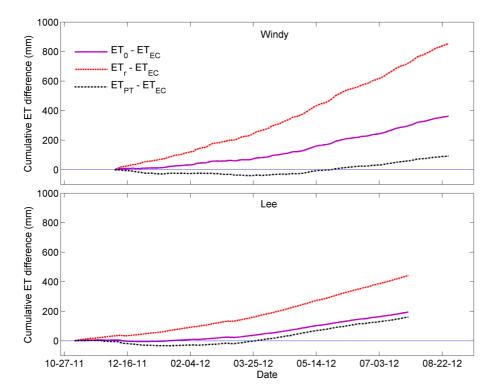


Figure 6. Cumulative difference between reference and measured ET since the beginning of the mid-period in each EC tower field.

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

Back Close

Full Screen / Esc

Printer-friendly Version



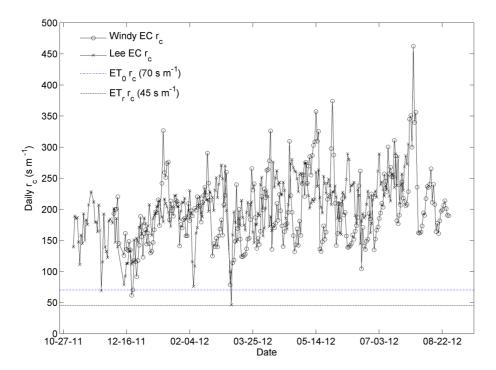


Figure 7. Calculated daily bulk canopy resistance at Windy and Lee from the EC towers for the mid-period. Dotted lines show daily time step resistances from short canopy $(ET_0 - 70 \, \text{s m}^{-1})$ and tall canopy $(ET_r - 50 \, \text{s m}^{-1})$ reference surfaces.

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Introduction

Conclusio

References

Tables

Figures

i iguico

14

•



Back



Full Screen / Esc

Printer-friendly Version



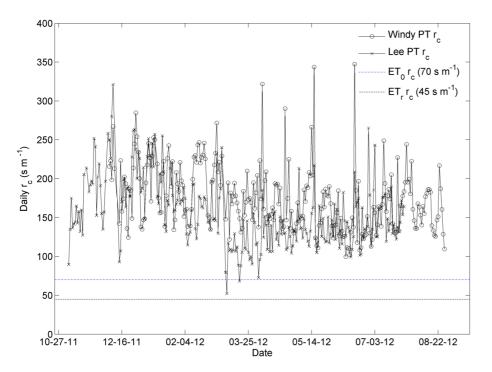


Figure 8. Calculated daily bulk canopy resistances at Windy and Lee from inverting the Priestley–Taylor (PT) ET for the mid-period. Dotted lines again show daily time step resistances from short and tall canopy for comparison.

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract

Conclusions References

Introduction

Tables Figures

I4 ►I

Back Close

Full Screen / Esc

Printer-friendly Version



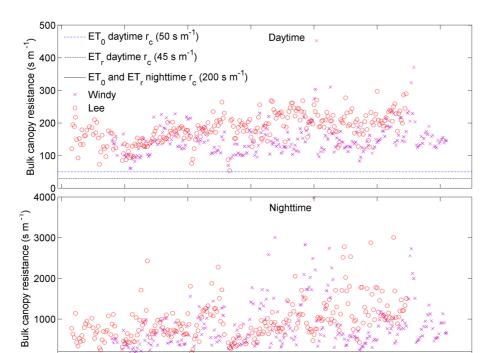


Figure 9. Calculated mean nighttime and daytime bulk canopy resistances (following Fig. 6) compared to assumed resistances.

03-25-12

Date

07-03-12

05-14-12

08-22-12

0[□] 10-27-11

12-16-11

02-04-12

HESSD

11, 6473–6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◆ ▶ I

◆ Back Close

Full Screen / Esc

Printer-friendly Version





Back

Abstract

Printer-friendly Version

Interactive Discussion



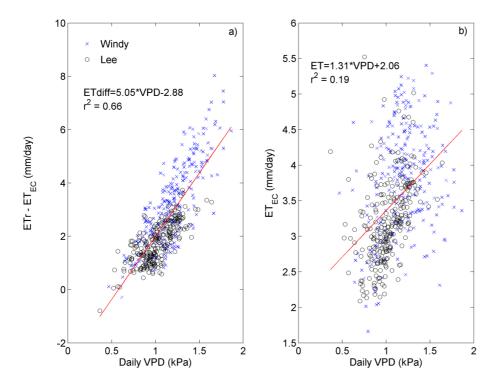


Figure 10. (a) Relationship between daily ET discrepancy (ET_r - ET_{EC}) and daily Vapor Pressure Deficit (VPD) from the beginning of the mid-period to the end of the study period. Regression equation is fitted to entire pool of data from Lee and Windy. (b) Relationship between measured ET and daily VPD. Time period and regression approach are the same as in (a).

Discussion Paper

Tables

Figures

Introduction References





HESSD

11, 6473-6518, 2014

Divergence of

reference ET

observations

R. G. Anderson et al.

Title Page

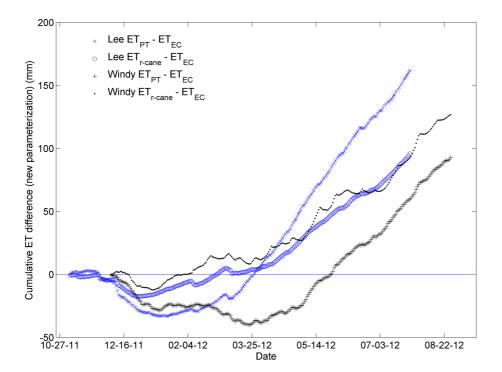


Figure 11. Cumulative difference between new reference ET (custom bulk canopy resistance of 165 s m⁻¹) and measured ET for both EC tower fields during the mid-period.

11, 6473-6518, 2014

Divergence of reference ET observations

R. G. Anderson et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I

I

I

I

Back Close

Full Screen / Esc

Printer-friendly Version

