



This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

The KULTURisk Regional Risk Assessment methodology for water-related natural hazards – Part 2: Application to the Zurich case study

P. Ronco^{1,2}, M. Bullo¹, S. Torresan², A. Critto^{1,2}, R. Olschewski³, M. Zappa⁴, and A. Marcomini^{1,2}

¹Dept. Environmental Sciences, Informatics and Statistics University Ca'Foscari Venice, Venice, Italy

²Centro Euro-Mediterraneo su i Cambiamenti Climatici (CMCC), Impacts on Soil and Coast Division, Lecce, Italy

³Swiss Federal Research Institute WSL, Economics and Social Sciences, Birmensdorf, Switzerland

⁴Swiss Federal Research Institute WSL, Mountain Hydrology and Mass Movements, Birmensdorf, Switzerland

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Received: 9 June 2014 – Accepted: 11 June 2014 – Published: 11 July 2014

Correspondence to: A. Marcomini (marcom@unive.it)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Finally, the application of the KR-RRA methodology to the Sihl River case study as well as to several other sites across Europe (not presented here), has demonstrated its flexibility and possible adaptation to different geographical and socio-economic contexts, depending on data availability and peculiarities of the sites, as well as for other hazard scenarios.

1 Introduction

Nowadays, one of the major environmental issues which is asserting more and more at global scale is the increasing threat related to natural disasters. Among the variety of natural disasters, flooding has significant impacts on human activities as it can threaten people's lives, their property, services as well as the environment. Assets at risk can include housing, transport and public service infrastructures, as well as commercial, industrial and agricultural enterprises. The health, social, economic and environmental impacts of flooding can be dramatic and have a wide community impact (Mazzorana et al., 2012). In this sense, the so called not-sustainable development can exacerbate the problems of flooding by accelerating and increasing surface water run-off, altering watercourses and removing floodplain storage (OPW, 2009). In the meantime, physical factors causes of floods are strongly connected to the hydrological cycle which is currently being intensified by changes in temperature, precipitation, glaciers and snow cover, all linked to climate change. Projected changes in precipitation regimes will also contribute to altering the intensity and frequency of rain-fed floods and possibly also of flash floods (IPCC, 2012). In Europe, floods account for the biggest share of damage inflicted by natural disasters, both on economic terms and life threat (see: statistics about natural disasters losses and frequency in Europe for the period 1980–2008, source: EM-DAT, 2009).

Particularly, in Switzerland severe flood events have occurred in many catchments in the last decade, while periods with frequent floods alternated with quieter periods have occurred during the last 150 years (Bründl et al., 2009). In northern Switzerland,

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



assessment, that is the degree to which the different receptors could be affected by the (flood) hazard. The data has been mainly provided by the GIS Centre of Canton of Zurich, the Swiss Federal Office of Topography, the Statistical Office of Canton of Zurich, the Swiss Federal Statistical Office (BFS, Bundesamt für Statistik) and the Swiss Federal Office for Agriculture (FOAG), (Bundesamt für Landwirtschaft, BLW) in raster, vector graphic or numerical format, as specified in Table 1.

For the risk assessment to agriculture and natural and semi-natural systems, the CLC dataset (EEA, 2007, with spatial resolution of 1 : 100000) has been used to spatially characterize the targets at the regional level; while for buildings, infrastructures and cultural heritage, data with a finer resolution (spatial resolution of 1 : 5000) has been used. Finally, to characterize the receptor people, the residential census data provided has been used to compute the number of people within residential cells of 25 m².

4.1 Hazard data processing

As explained by Ronco et al. (2014) in Part 1, the hazard assessment is aimed at identifying the relevant physical metrics (water depth, velocity and flood extension) coming from hydrodynamics models for the different scenarios to be investigated (baseline or alternative). The methodology makes different use of the various hazard metrics depending on the analysed receptors in order to assess the relative risk, as depicted in Table 2.

According to the DEFRA (2006) approach, followed by the KR-RRA methodology to assess the risk to people, water depth and velocity are normally computed (and mapped) by commercial, more or less sophisticated, hydraulics models. Moreover, the debris factor, that ranges between 0 and 1, respectively low and high probability that debris would lead to a significant hazard, can be easily assigned according to different ranges of water depth and velocity, as per Table 3.

However, while existing flood hazard maps can be easily used to estimate flood depth, they do provide information on flow speed very rarely (DEFRA, 2006). This is

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the case of the Sihl River valley, where patterns of flow velocities were not directly available. In fact, only hazard maps with water depth and intensity patterns (namely: the combination between water depths and velocities) grouped in range of values have been provided, without any explicit specification about the particular models that have been used to get them (see Tables 4 and 5).

The pattern of water velocity has been calculated as follow. Based on a precautionary principle (highest values of depth d and velocity v are associated to the highest level of hazard) the highest values for depth d and $v \cdot d$ product have been selected for each class (e.g: $d = 0.5$ m for the class 2 of Table 4, and $v \cdot d = 0.5 \text{ m}^2 \text{ s}^{-1}$ for class 1 of Table 5). Moreover, due to the specific range of values refereed to the case study, classes 2 and 3 of intensity have been merged as well as classes 6 and 7 of depth. Now, provided that the $v \cdot d$ product and d are known as single values, and not as a range of values as it was before, it was easy to derive the pattern of velocities (see Table 6).

5 Baseline and alternative hazard scenarios

The KULTURisk methodological framework requires the preliminary setting and analysis of different flood scenarios (baseline and alternative) where structural and/or non-structural solutions to mitigate, and possibly reduce, the risk are planned.

As request by the European Flood Directive (2007/60/EC), the baseline scenarios should be based on deterministic flood hazard maps, where flood-prone areas are classified according to different classes of frequency of the event (high, medium and low). In particular, the probability depends on the concept of return period of the hazardous event and the classification is based on the following thresholds:

- frequent event $\text{TR} < 30$ years – high probability of floods,
- average event $30 \text{ years} < \text{TR} < 100$ years – medium probability of floods,
- rare event $100 \text{ years} < \text{TR} < 300$ years – low probability of floods.

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of the lake to increase the buffering capacity of the Sihl lake during critical flood events. Furthermore a reservoir for drift wood is thought of to be realized in Langnau am Albis, too (Fig. 1). In case of being established, these prevention measures could reduce the flood risk of the Sihl to a lower level but details on the expected impact under different prevention measures have not yet been estimated. Due to this, alternative scenarios have not been considered in this study.

6 Results of the KR-RRA application to the selected receptors

The KR-RRA methodology presented in the companion paper (Part 1) has been applied to the Zurich case study by considering the whole suite of receptors at risk, namely: people; economic activities, including buildings, infrastructures and agriculture; natural and semi-natural systems and cultural heritage. Through the sub-sequential implementation of the hazard, exposure, susceptibility and risk assessments, GIS based maps and related statistics of total and receptor-related risks have been produced and presented below.

6.1 Risk to people

6.1.1 Assessment

According to the KR-RRA procedure (see the Part 1, Eq. 1) and following the (hazard) data processing presented above, the hazard scores for Sihl River case study have been calculated and reported in Table 7. The hazard scores range from 0.9 to 6, where increasing values mean an increasing hazard for people.

As far as the exposure assessment is concerned, the total population living in residential areas is of 289 029. The largest district is Altstetten (7.48 km² with 30 148 habitants), while Sihlfeld and Gewerbeschule are the most densely populated ones (11 759 and 13 163 habitants km⁻² respectively). Most of the upper part of the Sihl Valley has a lower density, with a range between 826 and 5981 habitants km⁻².

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of flooded buildings referring to different uses; the related normalization phase for buildings has been developed by considering normalized scores where values from 0 (no risk) to 1 (maximum risk) are assigned according to the different classes of risk.

6.2.2 Results

5 The GIS-based risk map (Fig. 6) points out the spatial distribution of the risk to building across the studied area. Being the intensity of phenomena lower than the fixed threshold, all the buildings affected by the flood event would be only inundated and would not suffer from dramatic structural damages. Despite this, the flooding can still have dramatic consequences on the infrastructure because many assets of primary
10 importance, such as electricity and water services, heating, are normally located at the lower ground level. The total number of buildings at risk is 3267 and the related surface area at risk is 2.2 km². The percentage of flooded buildings is around 17% while the percentage of flooded areas is almost 20% over the total surface actually covered by buildings.

15 As already mentioned, the studied area is mostly classified as residential one and almost 95% of flooded buildings belong to class 1.1.1 and 1.1.2 of CLC (Continuous and discontinuous urban fabric) while just less than 6% of inundated buildings belong to classes 1.2.1, 1.2.2, 1.4.1 and 1.4.2 (industrial or commercial units, road and rail networks and associated land, green urban areas and sport leisure facilities).
20 In particular, only 17 items are classified as infrastructures related to the supply of services (road, rail networks and associated land class) so the risk for this category is very relevant (most of them are linked to the strategic transportation network of the main railway station of Zurich city, Zurich Hauptbahnhof). Box A of Fig. 6 focuses on the districts with higher number of inundated buildings around the Zurich city centre.
25 Several small residential areas would be flooded also in the southern part of the city, namely Leimbach, Adliswil, Thalwil and Langnau am Albis. Table 12 presents the relevant data for the analysed receptor, considering the different use of buildings.

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



6.3 Risk to economic activities: infrastructures

6.3.1 Assessment

The strategic network of infrastructures have been identified using the roads and railways shapefiles, provided by the GIS Centre of Canton of Zurich. The information includes the characterization of roads, pathways and railway lines within the study area. Zurich main train station represents an important and strategic hub for the Cantonal railway network system as well as for the Swiss and European railways network systems: more than 1900 trains daily pass-by the Hauptbahnhof main train station. In fact, urban commuter rail networks are focused on the country's major cities: Zurich, Geneva, Basel, Bern, Lausanne and Neuchatel. Strategic highways and roads also run in and out Zurich city.

The flood hazard assessment to infrastructures considers the flood extension as relevant flood metric; no other flood metrics (e.g. flow velocity) have been considered because the analysis is not oriented to the evaluation of direct structural damages for infrastructures, but rather to the characterization of the loss of service. The exposure assessment step focuses on the spatial localization and distribution of the roads, railways and pathways. All these objects could be geometrically characterized by their linear extension (length) and by their extension (area). In particular, pathway routes have been considered relevant since many of them are normally used by pedestrian to connect rural area to the city centre, running along the flood prone area of the Sihl River.

6.3.2 Results

The infrastructures related risk map (Fig. 7) identifies the infrastructures potentially affected by a flood event of 300 years return period. The total extent of road, railways and pathways at risk is around 209 km out of 1540 km of infrastructures that currently

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- railway lines at Langnau-Gattikon train station in Langnau am Albis district,
- Sihlthalstrasse in some spots where the roads runs next to the Sihl River, in particular in Adliswil, Leimbach and Langnau am Albis districts.

6.4 Risk to economic activities: agriculture

6.4.1 Assessment

As already reported by Ronco et al. (2014) in Part 1, the flood hazard assessment step requires the identification of water depth and flow velocity as relevant flood metrics, while the exposure assessment to agriculture allows to identify the agricultural typologies present in the Sihl River valley according to the different classes of the CLC dataset (class 2.1.1 as Non irrigated arable land and class 2.3.1 as Pastures). The total area devoted to agriculture is 7.67 km², most of it classified as arable land. Since none of the agricultural typologies mentioned in the companion paper (Part 1) are actually present in the Sihl valley (namely: vegetables, vineyards, fruit trees and olive groves), it has been assumed that arable lands and pastures should be classified as vegetables, with similar thresholds.

As a sake of simplification and according to the overall scope of the analysis, namely a risk assessment at regional scale, it has been assumed that the agricultural typologies in the Sihl River valley have similar growing pattern (low growing plants) and, therefore, the same susceptibility score. According to Torresan et al. (2012) and to the technical evaluation of the authors, the two CLC classes of agricultural typologies have been considered similar to the class of poor vegetation and meadow (more susceptible to flood) with a score equal to 1.

6.4.2 Results

The agriculture related risk map (Fig. 9) has been elaborated according to the procedure and features of analysis introduced above. It is worth to notice that despite

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



6.5.2 Results

The natural and semi-natural systems related risk map (Fig. 10) allows to identify the area potentially affected by loss of ecosystem service caused by a 300 years return period flood event. As a result, only a limited portion of forest is at risk of inundation (0.29 km², 1.4 % of total forest areas) and two classes of risk have been identified: a very small part (625 m²) belongs to the high class of risk while the rest (around 289 000 m²) belongs to the very high class of risk.

Even if the flooded surface belongs mostly to the very high class of risk, due to the different susceptibility factors and in particular to the impermeable ground characteristics of the area and degrees of slope, the risk related to this receptor can be considered as not relevant. In fact, forests are generally stable and resilient ecosystems, while growing along rivers they are very well adapted to occasional and seasonal flooding. In addition, in the Sihl valley most of the forests are located along the hilly part of the area and this reduces their susceptibility.

In this sense, the ecological, recreational and economic functionalities of the Sihl valley forest ecosystem is not compromised by a flood event of such magnitude.

6.6 Risk to cultural heritage

6.6.1 Assessment

The hazard assessment step consists in the spatial characterization (extent) of the flooded area. Moreover, the exposure assessment requires the localisation of the cultural heritage assets in the case study area. In Sihl River valley, 416 cultural assets are present, mainly classified as ancient buildings. They include different confessional buildings such as Fraumuster, Grossmunster and the Synagogue in Zurich city centre, the Swiss National Museum, the central library of Zurich, the Rathaus (the municipal building), the Opernhaus, several ancient residential buildings and villas in the centre as well as along the Zurich lake etc.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



6.6.2 Results

The cultural heritage related risk map is shown in Fig. 11: it identifies the number of cultural assets which are supposed to be flooded in the framework of the investigated scenario. As a result, 40 items could be inundated, corresponding to the 9.13% of the total number within the area (416 items). These assets belongs to different cultural protection level (regional and cantonal). As already reported, the Swiss national museum is at risk of inundation while the districts belonging to higher class of risk (number of inundated objects between 10 and 15) are Langstrasse (close to city centre of Zurich city) and Langnau am Albis (along the lower Sihl valley).

7 Total risk index

7.1 Weighing process

The total risk index is calculated by aggregating different receptor-related risks by means of MCDA methods that allow identifying and ranking areas and hotspots at risk, within the studied area. Prior to this, a normalization process for each of the analysed receptor is performed to rescale the receptor-related risk scores into a numerical scale between 0 and 1 and, therefore, to allow comparison among (relative) risks expressed by different unit of measurement (Zabeo et al., 2011; Giupponi et al., 2013). Within this study, for people, infrastructures and cultural heritage the normalisation has been developed at CLC polygon size level. For buildings, agriculture and natural and semi-natural systems the normalization has been performed according to the relative tables and scores, as follow: flooded buildings: 0.2, destroyed agricultural: 1; natural and semi-natural systems: 1 for the very high class of risk and 0.8 for the high class of risk. Normalised risks has been assigned to raster cells of 25 m resolution that allow a better and more detailed visualization of the spatial variability of the total risk.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



lot of infrastructures and railway lines and buildings would be possibly flooded, and on the left side area of the Sihl River before it join the Limmat River, notably at risk.

It is important to underline that the application of the KULTURisk methodology at the meso-scale provides a screening analysis that allows the assessment and prioritization of targets and areas at risks in the considered region. However, a more detailed analysis (at the micro-scale) could be required in the areas considered at risk or where more specific information are available.

The total risk index represents an useful indicator which allows the visualization (total risk map) of areas more affected by a particular flood event than others, but it is highly dependent from receptor related risk analysis and weighting process.

Moreover, it is worth to notice that the final risk index aggregates scores coming from multiple heterogeneous parameters. The final decision-making process should therefore consider not only the final values of the index, but also the factors that contributed in determining that value (i.e. susceptibility indicators, hazard metrics). A correct interpretation of these factors is particularly relevant for the analysis of the potential prevention measures that could be suitable for reducing the risk for current hot spot areas (Torresan et al., 2012).

8 Conclusions

The study addressed the application of a state-of-the-art Regional Risk Assessment (RRA) methodology for flood risk assessment to a very site-specific case, namely the Sihl River valley around the city of Zurich, in Switzerland. The complete KR-RRA methodology, developed within the KULTURisk-FP7 (KR) Project for flood risks and introduced in the companion paper Part 1, followed four subsequent levels of analysis, namely the hazards, exposure, vulnerability and risk assessments. In particular, the paper described the tuning process as well as the implementation procedure that has been applied in order to assess the risk of flood for the river valley represented by a 300 years return period hazard scenario, the be considered the most conservative one.

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Yosie, T. F. and Herbst, T. D.: Using Stakeholder Processes in Environmental Decision making. An Evaluation of Lessons Learned, Key Issues, and Future Challenges, Ruder Finn, Washington, 1998.

5 Zabeo, A., Pizzol, L., Agostini, P., Critto, A., Giove, S., and Marcomini, A.: Regional risk assessment for contaminated sites, Part 1: Vulnerability assessment by multicriteria decision analysis, Environ. Int., 37, 1295–1306, 2011.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 1. Summary of the dataset used for the application of the KULTURisk RRA methodology within the Sihl River valley.

Dataset	Source
Flood hazard map (Gefahrenkartierung Hochwasser, WB_HW_IK300, IK100, IK30_F)	http://www.gis.zh.ch Canton of Zurich ^a , 2013 Kanton Zürich 1 : 5000
People in residential areas (Bevölkerung Gemeinden Quartiere) map	www.statistik.zh.ch ^b , 2011, Canton of Zurich
Building footprint map	www.gis.zh.ch ; Canton of Zurich ^a TLM3D, 2013, Kanton Zürich 1 : 5000
Roads (Strasse_CH_line) and Railways (Eisenbahn_CH_line) maps	www.gis.zh.ch ; Canton of Zurich ^a TLM3D, 2012, Kanton Zürich 1 : 5000
Switzerland CORINE Land Cover map	http://www.swisstopo.admin.ch ^c , Geographic Information System WSL, 2006, 1 : 100 000
Protected objects of historical interest map (Denkmalschutzobjekte)	http://www.gis.zh.ch Canton of Zurich ^a , 2013, Kanton Zürich 1 : 5000,
25 m Digital Elevation Model (DEM)	http://www.swisstopo.admin.ch ^c , Geographic Information System WSL, 1994, Canton of Zurich
Digital map of soil coverage of Switzerland	www.blw.admin.ch ^d , 2012, 1 : 200 000
Percentage of disable in Zurich city	www.bfs.admin.ch ^e , 2010, Canton of Zurich

^a GIS Centre of Canton of Zurich.

^b Statistical Office of Canton of Zurich.

^c Swiss Federal Office of Topography.

^d Swiss Federal Office for Agriculture.

^e Swiss Federal Statistical Office.

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 2. Flood metrics selected to assess hazard for different receptors.

HAZARD ASSEMENT	Selected flood metric	Receptor
Flood hazard	Water depth (m)	People, Buildings
	Flow velocity (m s^{-1})	People, Buildings, Agriculture
	Flood extension (km^2)	Infrastructures, Natural and Semi-Natural Systems, Cultural Heritage
	Debris Factor	People

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Table 3. Guidance for the definition of debris factor (DF) for different pattern of water depths and velocities in urban areas (DEFRA, 2006).

Flood depth (d)	Debris factor (DF) for urban areas
$d \leq 0.25$ m	0
$0.25 \text{ m} < d < 0.75$ m	1
$d \geq 0.75$ or $v > 2 \text{ m s}^{-1}$	1

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Table 4. Classification of water depths as provided by the GIS Centre of Canton of Zurich through flood hazard maps.

Depth classes	[m]
1	< 0.25
2	0.25–0.50
3	0.50–0.75
4	0.75–1.00
5	1.00–1.50
6	1.50–2.00
7	> 2.00

HESD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 5. Classification of intensity parameter (function of water depth – d , and velocity – v) as provided by the GIS Centre of Canton of Zurich through flood hazard maps.

Intensity classes	Description	Condition
1	Low	$d < 0.5 \text{ m}$ or $v \cdot d < 0.5 \text{ m}^2 \text{ s}^{-1}$
2	Medium	$0.5 < d < 2.0 \text{ m}$ or $0.5 \text{ m}^2 \text{ s}^{-1} < v \cdot d < 2.0 \text{ m}^2 \text{ s}^{-1}$
3	High	$d > 2 \text{ m}$ or $v \cdot d > 2 \text{ m}^2 \text{ s}^{-1}$

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Table 6. Computation of (single) values of velocity (v) from available data (water depths – d , debris factor – DF, and intensity – I).

Depth classes	Depth of reference (d) [m]	DF	Velocity $v = I/d$	
			Intensity class 1 ($d \cdot v = 0.5$) [m s^{-1}]	Intensity classes 2 and 3 ($d \cdot v = 2$) [m s^{-1}]
1	0.25	0	2.00	8.00
2	0.5	1	1.00	4.00
3	0.75	1	0.67	2.67
4	1	1	0.50	2.00
5	1.5	1	0.33	1.33
6 and 7	2	1	0.25	1.00

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 8. Relative risk classes and range of values for injured people.

Risk classes (R_1)	Number of injuries
Very low	1–50
Low	50–100
Medium	100–150
High	150–200
Very high	> 200

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 9. Relative risk classes and range of values for fatalities.

Risk classes (R_2)	Number of fatalities
Very low	1
Low	2
Medium	3
High	4
Very high	> 5

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Table 10.** Statistics about the buildings coverage along the Sihl River valley.

Buildings: CLC class	Total [#]	%	coverage [km ²]	% of coverage
111–112: Continuous urban fabric – Discontinuous urban fabric	18 255	94.0	8.9	83.4
121: Industrial or commercial units	780	4.0	1.4	12.9
122: Road and rail networks and associated land	100	0.5	0.3	3.1
141–142: Green urban areas – Sport leisure facilities	295	1.5	0.1	0.6
Total	19 430	100.0	10.7	100.0

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 11. Relative risk classes and range of values for buildings.

Risk classes (R_3)	Description	# of inundated buildings
Not at risk	Not inundated	16 163
Low	Inundation	3267
Medium	Partial damage	0
High	Total destruction	0

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Table 12. Statistics related to the Risk for buildings for different CLC classes.

Risk for buildings (CLC classes)	Flooded [#]	Flooded [%]	Flooded area [km ²]	Flooded area [%]
1.1.1–1.1.2: Continuous urban fabric – Discontinuous urban fabric	3075	94.1	1.8	83.4
1.2.1: Industrial or commercial units	154	4.7	0.3	12.4
1.2.2: Road and rail networks and associated land	17	0.5	0.1	4.1
1.4.1–1.4.2: Green urban areas – Sport leisure facilities	21	0.6	0.004	0.2
Total	3267	100.0	2.2	100.0

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

HESD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Table 13.** Relative risk classes and range of values for infrastructures.

Risk classes (R_4)	Length of infrastructures at risk within each district [km]
Very low	0.01–7
Low	7–14
Medium	14–21
High	21–28
Very high	28–32

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Table 14.** Relative risk classes and range of values for agriculture.

Risk classes (R_5)	Description	Agricultural areas [km ²]
Not at risk	Not inundated	7.08
Low	Inundated	0
High	Destructed	0.59

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Table 15.** Statistics related to the Risk for agriculture for different CLC classes.

Agricultural typology (CLC classes)	Description	Total area [km ²]	Flooded agricultural area [km ²]
CLC class 2.1.1	Non-irrigated arable land	7.35	0.53
CLC class 2.3.1	Pastures	0.31	0.07
Total		7.67	0.59

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 16. Weight assigned to different receptors by local relevant experts.

Receptor	Weights
Infrastructures	0.8
Buildings	0.6
People	0.4
Agriculture	0.2
Cultural Heritage	0.1
Natural and semi-natural systems	0

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 17. Total risk index classification and range of values.

Total risk classes	Score
Very low	0–0.048
Low	0.048–0.96
Medium	0.096–0.14
High	0.14–0.19
Very high	0.19–0.24

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

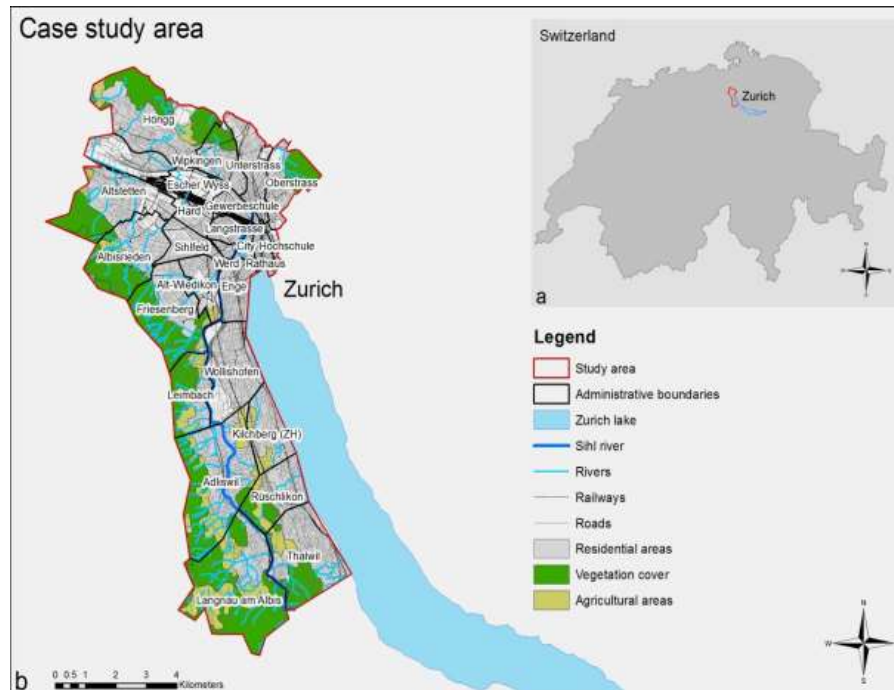


Figure 1. The case study area: (a) its location in Switzerland and (b) its main characteristics.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.



Figure 2. Sihl River flowing beneath Zurich main train station before it joins the Limmat River: **(A)** image adapted from Google map; the box at the bottom shows the critical Sihl River section in August 2005 during a flood even, source: A. Senn (WSL). **(B)** Sihl River flowing underneath Zurich main train station in August 2005 (discharge: $280 \text{ m}^3 \text{ s}^{-1}$), source: Office of Waste, Water, Energy and Air, Zürich (M. Oplatka).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

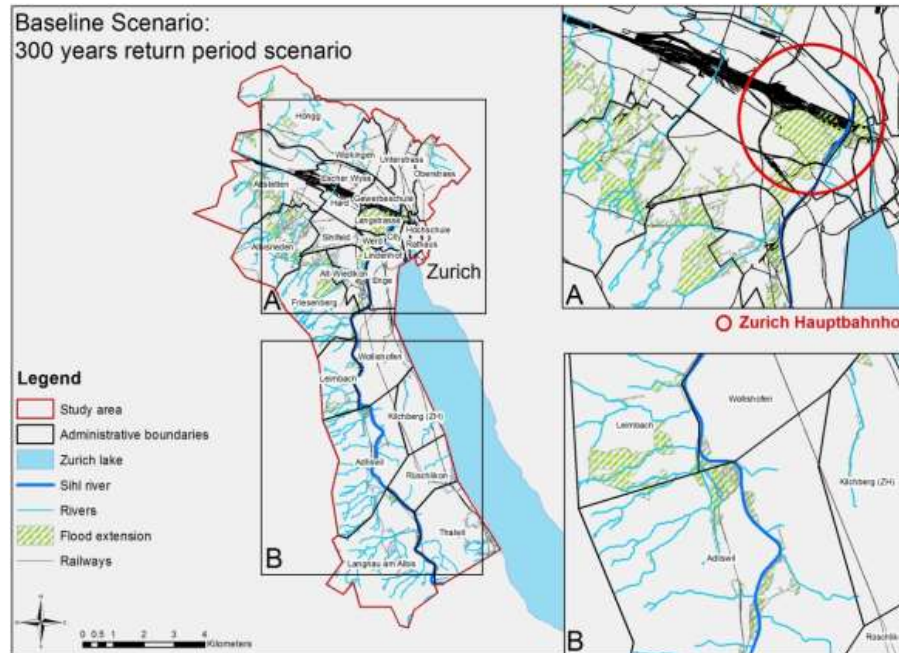


Figure 3. Baseline scenario for Sihl case study related to a flood event of 300 years return period, in box A the zoom on the Zurich main station, in box B the zoom on the upstream river valley area.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

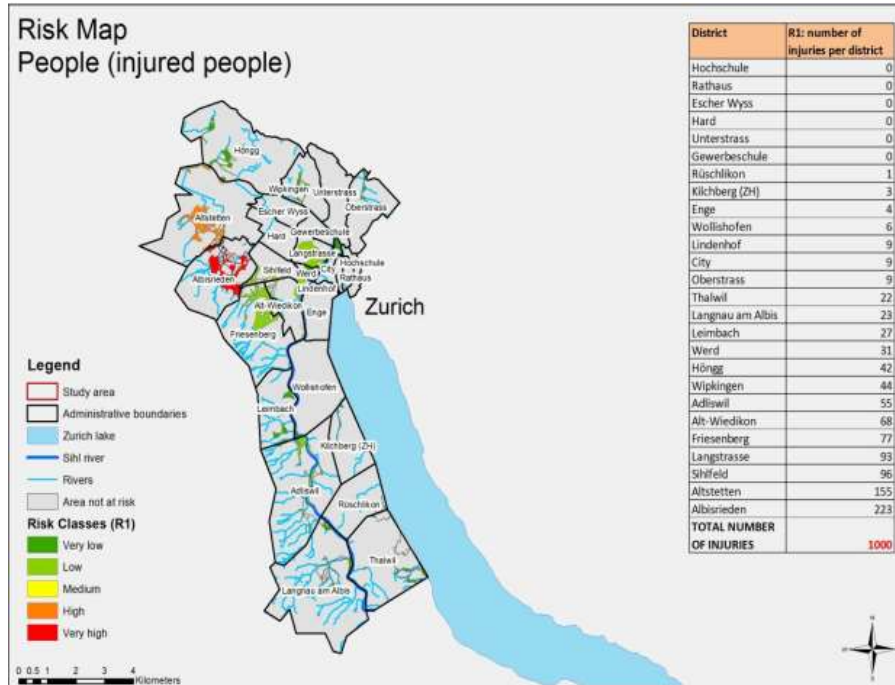


Figure 4. Relative risk map for injured people with statistics at district level.

[Title Page](#)

[Abstract](#) | [Introduction](#)

[Conclusions](#) | [References](#)

[Tables](#) | [Figures](#)

[⏪](#) | [⏩](#)

[◀](#) | [▶](#)

[Back](#) | [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



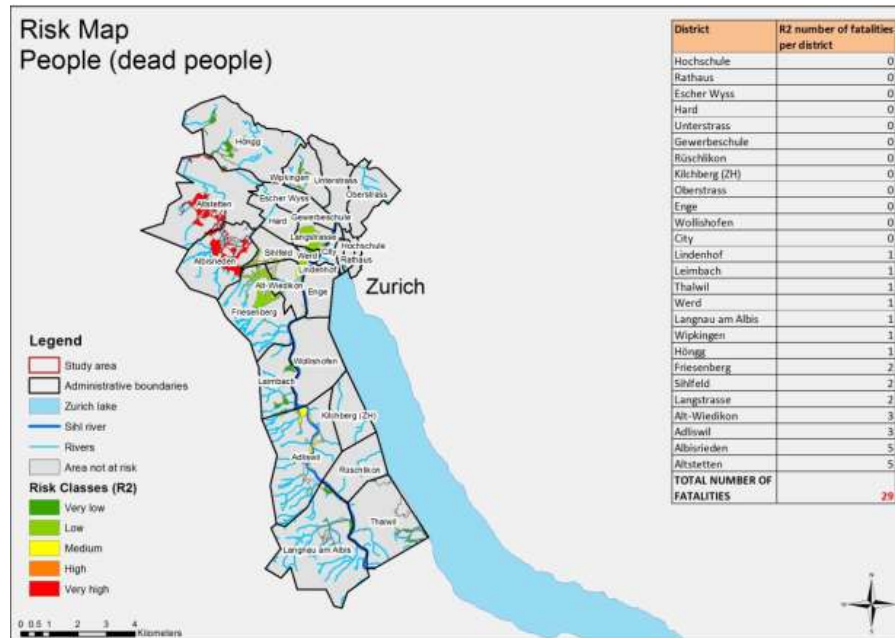


Figure 5. Relative risk map for fatalities with statistics at district level.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[⏴](#)

[⏵](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

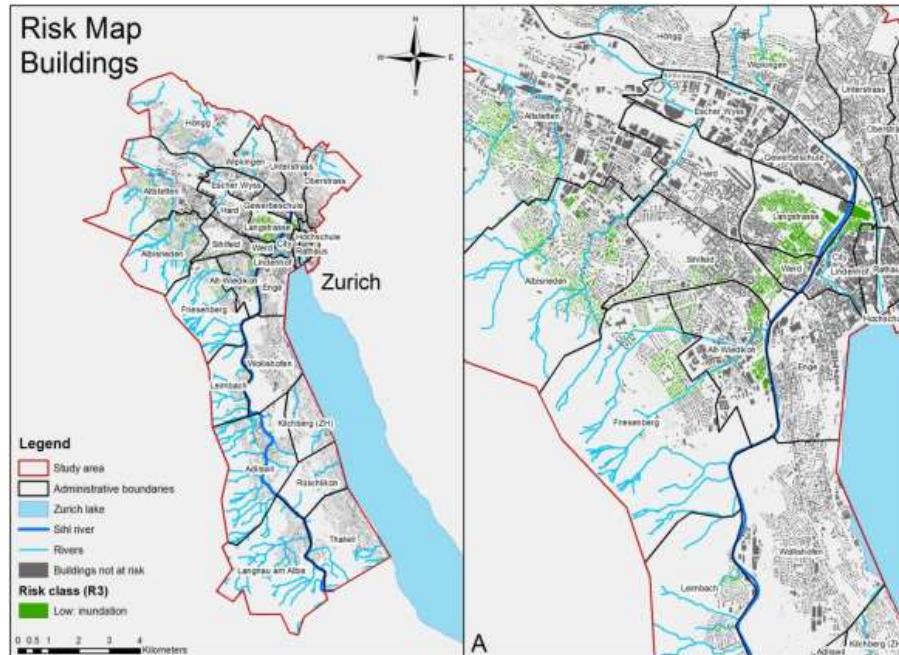


Figure 6. Relative risk map of buildings (left) and a zoom on the city centre (right).

[Title Page](#)
[Abstract](#) [Introduction](#)
[Conclusions](#) [References](#)
[Tables](#) [Figures](#)
⏪ ⏩
◀ ▶
[Back](#) [Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)



The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

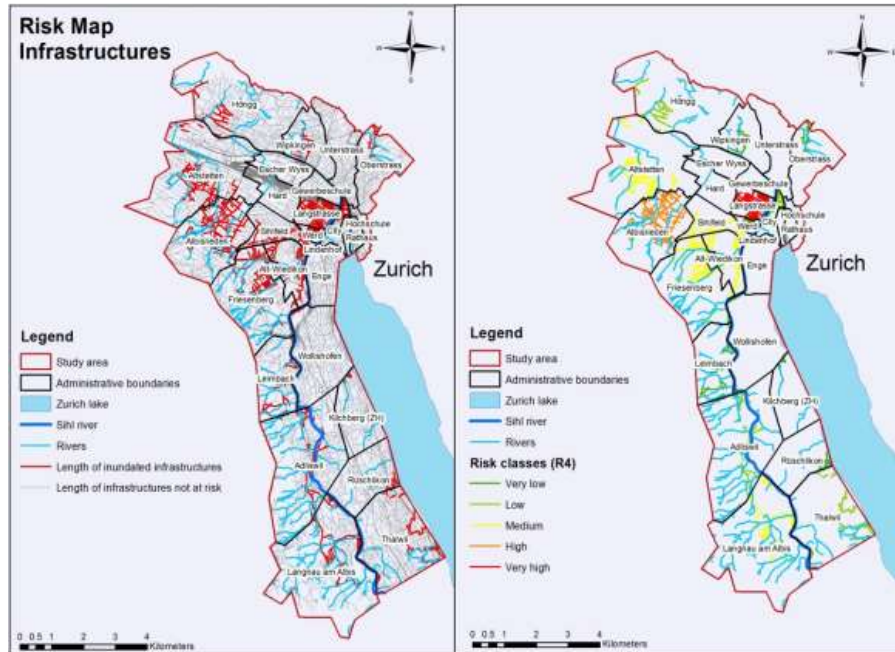


Figure 7. Exposure (left) and relative risk (right) map for infrastructures (roads, railways, pathways).

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[⏴](#)

[⏵](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

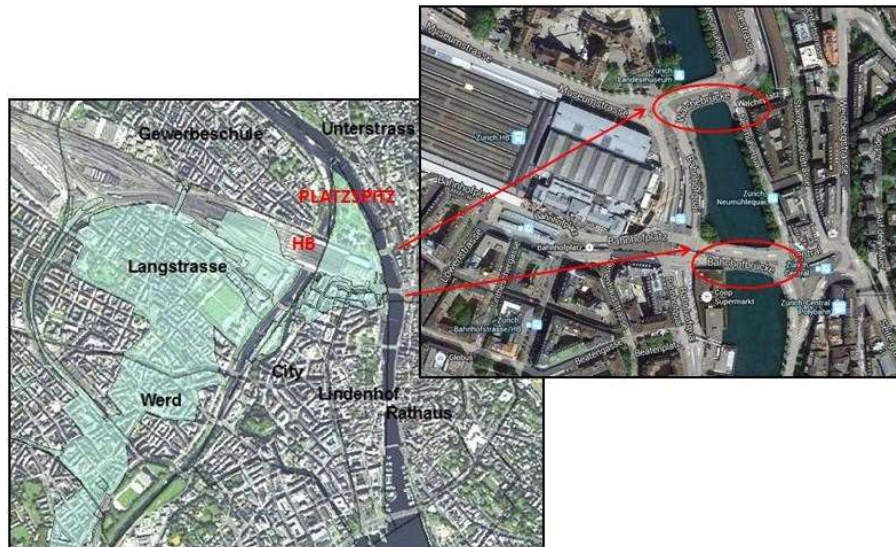


Figure 8. Some relevant infrastructures (hotspots) at risk (Langstrasse and City areas with their roads, Zurich main train station Hauptbahnhof (HB), Platzspitz, Bahnhofbrücke and Walchebrücke bridges). Source: Google maps modified.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



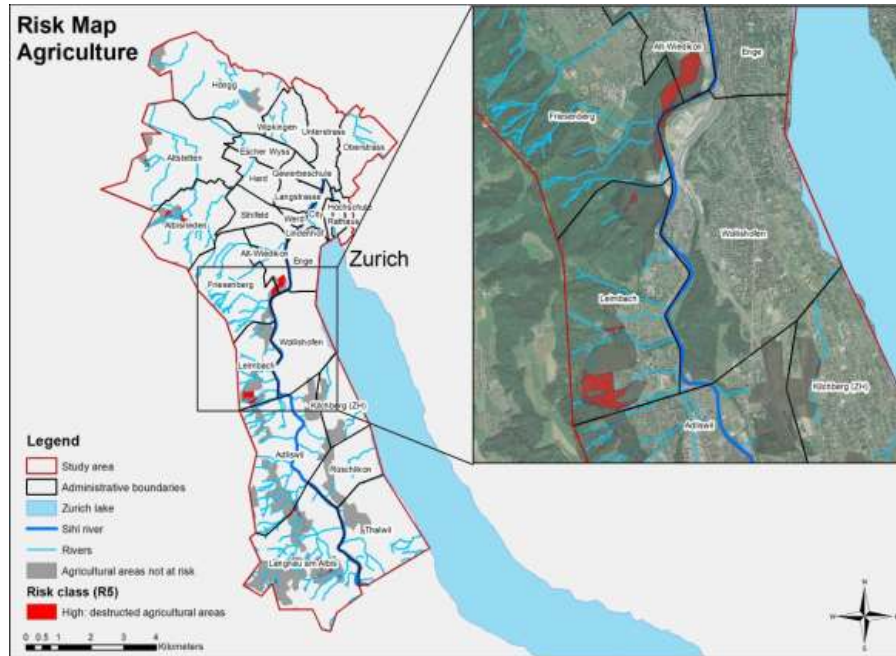


Figure 9. Relative risk map for agriculture showing flooded and destroyed agricultural areas. A zoom on the most affected area is reported.

HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[⏴](#)

[⏵](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



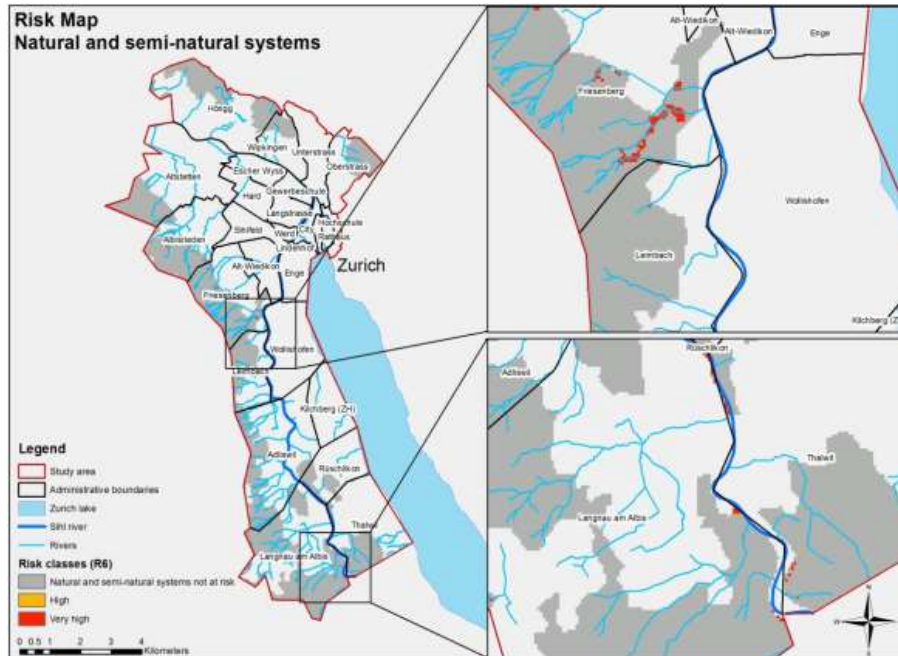


Figure 10. Relative risk map for natural and semi-natural systems (left) with two zooms showing the most affected area (right).

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

⏪ ⏩

⏴ ⏵

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



HESSD

11, 7875–7933, 2014

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

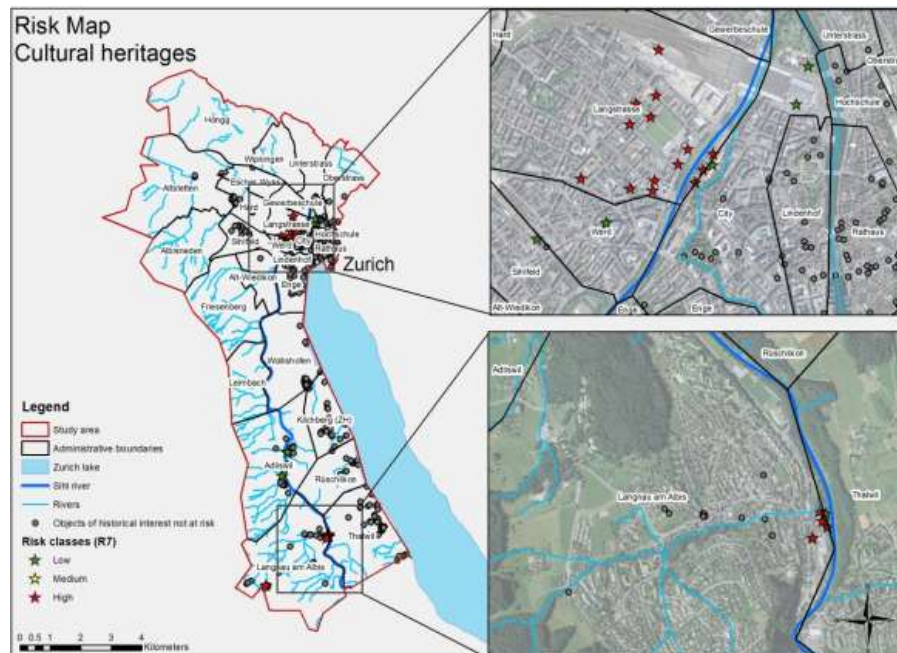


Figure 11. Relative risk map for cultural heritage (left) with two zooms (right).

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



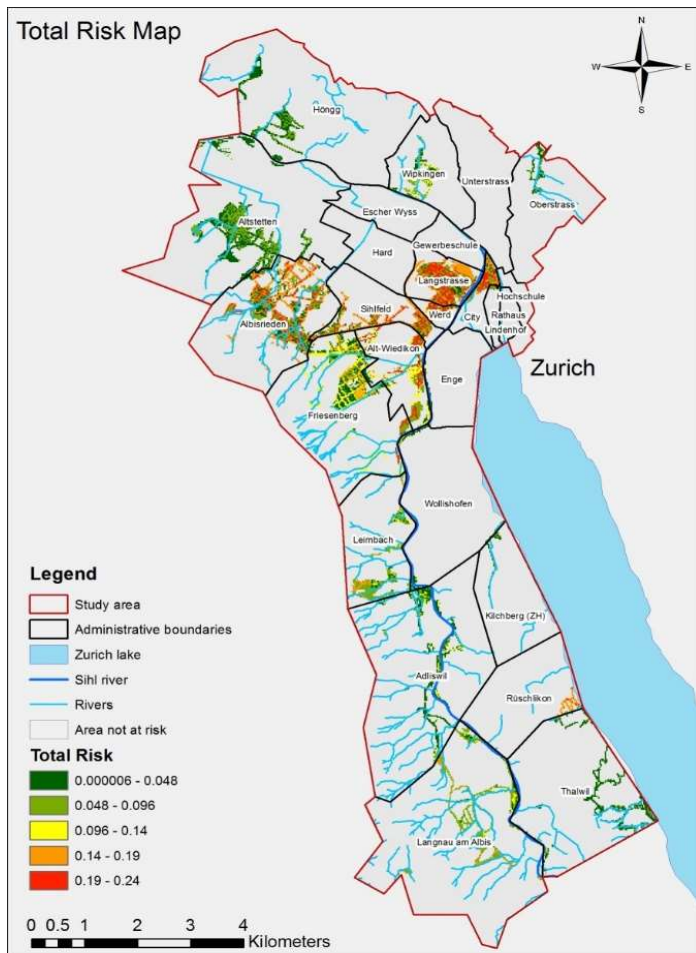


Figure 12. Total risk map for the Sihl River valley considering the 300 years return period scenario.

The KULTURisk RRA methodology for water-related natural hazards – Part 2

P. Ronco et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

