

1 Dear referee who gave the comments,

2 My co-authors and I wish to thank the reviewers and editor for the comments and  
3 suggestions which we found very useful and relevant for improving the manuscript. According to  
4 your suggestion, great modification has been made in the revised manuscript, and all these  
5 changes are explained in the following point-point response.  
6  
7

## 8 Referee 1

### 9 Abstract

- 10  
11 1) The authors should consider revising the first sentence of the abstract. The sentence  
12 does not flow well.  
13 2) End of abstract – why do the results show that caution should be taken?  
14

15 Response:

16 Re-written. In order to evaluate the impact of human activities (mainly dam building) on the Changjiang  
17 River sediment discharging into the sea, the spatial-temporal variations in the sediment load of different  
18 tributaries of the river was analyzed to reveal the quantity, grain size and composition patterns of the sediment  
19 entering the sea. The results show that the timing of reduction in the sediment load of the main stream of the  
20 Changjiang was different from those associated with downstream and upstream sections, indicating the  
21 influences of the sub-catchments. Four step-wise reduction periods were identified, i.e., 1956-1969, 1970-1985,  
22 1986-2002, and 2003-2010. The proportion of the sediment load originating from the Jinsha River continuously  
23 increased before 2003; after 2003, channel erosion in the main stream provided a major source of the sediment  
24 discharging into the sea. In addition, in response to dam construction, although mean grain size of the suspended  
25 sediment entering the sea did not change greatly with these different periods, the inter-annual variability for  
26 sediment composition or the relative contributions from the various tributaries changed considerably. Before  
27 2003, the clay, silt and sand fractions of the river load were supplied directly by the upstream parts of the  
28 Changjiang; after 2003, although the clay component may still be originated mainly from the upstream areas, the  
29 source of the silt and sand components have been shifted to a large extent to the river bed erosion of the middle  
30 reach of the river. These observations imply that the load, grain size and sediment composition deposited over the  
31 coastal and shelf water adjacent to the river mouth may have changed rapidly recently, in response to the  
32 catchment changes.  
33  
34

### 35 Intro

- 36 3) Line 91: Is there a citation for the climate change increase in sediment load?  
37

38 Response:

39 This conclusion is derived from Dai et al. (2008), they demonstrated that the contribution of dam  
40 construction and the water and soil conservative measures accounted for ~88% and  $15 \pm 5\%$  of the decline in  
41 sediment influx, respectively; and climate change is responsible for a slight increase in sediment load,  
42 approximately 3%. We delete this sentence in the revised manuscripts.  
43

44 Regional Setting

45 4) Lines 125-127: I think the authors need to use the word sediment sink in this sentence.  
46 This idea of sediment sinks and sources could be connected more throughout the paper.

47

48 Response:

49 Revised. The Dongting Lake was a major sink of the upstream sediment of the Changjiang and, due to  
50 sediment decrease from the upstream Changjiang, has become a weak sediment source to its downstream  
51 sections (Dai and Liu, 2013)

52

53 5) The description of the stations is must better.

54

55 Response:

56 Revised. The Datong gauging station is the last station along the Changjiang before going to the sea, and its  
57 hydrological records are often used to derive a represent sediment flux of the Changjiang into the adjacent East  
58 China Sea.

59

60 6) Lines 138-139: Do the authors know the years when the forest was logged?

61

62 Response:

63 The forest was continuously logged, so it is very difficult to identify the time.

64

65 7) Lines 142-144: The wording in this sentence could be improved.

66

67 Response:

68 Revised. However, due to the highly variable natural conditions of the tributaries, the effect of this  
69 campaign was different in every upstream tributary.

70

71 8) Figure 1: The map is still difficult to read, but better than it was. Could the authors  
72 make the station numbers larger in the map? I also think that the figure will be very difficult  
73 to understand in black and white or for a color blind person because all of the catchments are  
74 about the same on the grey scale. The authors also list sites that are not discussed in the  
75 paper (e.g. Puding). The authors could get rid of the station labels that are not discussed and  
76 save space for making the map more legible.

77

78 Response:

79 Revised. Although some reservoirs are not discussed in the paper (e.g. Puding), they are referred in figure 2  
80 and 4.

81

82 Materials and Methods

83 9) Line 170: Is this is daily data? Is there any data missing?

84

85 Response:

86 The flow velocities and suspended sediment concentrations is measured every day. The water discharge is  
87 the product of the cross-section area and the mean velocity on the area, and sediment flux is the product of water

88 discharge and suspended sediment concentration.

89

90 10) Lines 181-182: What does firmly controlled mean?

91

92 Response:

93 Revised. The homogeneity and reliability of the hydrological data, with an estimated daily error of 16%  
94 (Wang et al., 2007), has been strictly examined by the CWRC before release.

95

96 11) Lines 190-204: This description was a little hard to follow still. The authors should  
97 narrow down the discussion to the stations that really need description for understanding the  
98 rest of the paper.

99

100 Response:

101 Revised. This paragraph was largely narrow down: We acquired the annual sediment load data from 26  
102 hydrological stations distributed in the main reach and seven of the tributaries (for the location of these stations,  
103 see Fig.1). The dataset for these gauging stations covers a 55-year period (i.e., 1956-2010).

104

105

106 Results

107 12) Lines 263-265: Sentence needs to be revised – it is a little confusing.

108

109 Response:

110 Revised. Generally, as a consequence of dam construction, the total RSCI of the Changjiang upstream of the  
111 Datong greatly increased in 1969 and 2003, respectively.

112

113 13) Lines 266-268: Did the authors perform any statistical tests to look at the change in  
114 sediment load and increase in RSCI?

115 14) Lines 270-271: Again, I think it would be good to report some sort of statistical tests  
116 here. Can you test how much of an effect dams had on the relationship?


117

118

119 Response:

120 Revised. A new Fig.3 was supplemented.

121

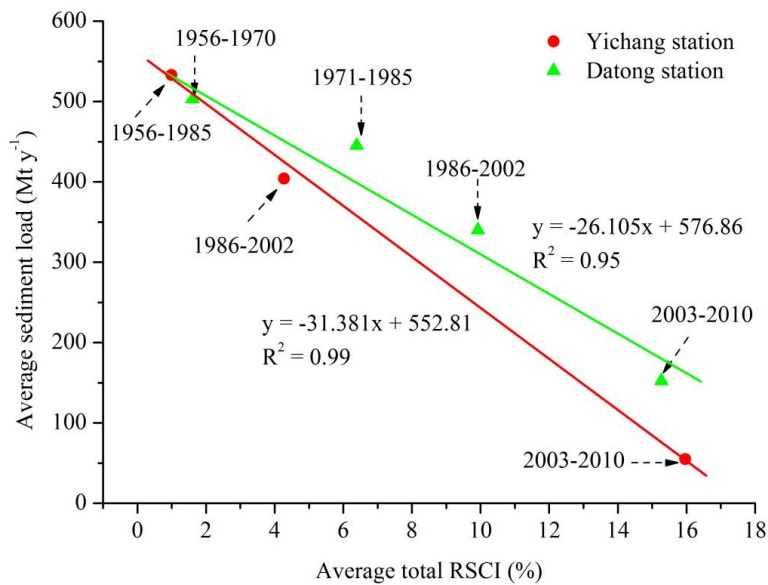

122

123 **Figure 3.** The relationship between average sediment load and total RSCI of different periods at Yichang

124 and Datong station.

125

126

127 15) Line 269 – slope needs an “e”

128

129 Response:

130 Revised.

131

132

133 16) Figure 3: I am not sure how helpful this figure is for the narrative of the manuscript. I  
134 think that Figure 2 is enough for this part of the story.

135

136 Response:

137 Deleted.

138

139

140 17) 281-285: Sentence too long and complex, and should be simplified into two sentences.

141

142 Response:

143 Revised.

144

145

146 18) Lines 277-300: This part of the discussion should be simplified. The authors should talk  
147 about the upstream rivers as a group instead of naming each one. Just point out the specific

148 rivers that did not fit the trends. The authors could refer the reader to the figures and then get  
149 rid of some text that is not easy to read through.

150

151 Response:

152 Revised.

153

154 19) Line 300: Sentence does not make sense

155

156 Response:

157 Deleted.

158

159

160 20) Lines 364 – 367: Do the authors have any measure of interannual variability?  
161 Residuals?

162

163 Response:

164 Supplemented. In addition, the degree of inter-annual variation in the upstream sediment grain size  
165 continuously decreased during the four periods at the Yichang station, i.e., the range of D50 variations is  
166 gradually narrowed (with a continuously reduced standard deviation), and the distribution range of the D50 data  
167 and sediment load moves towards the side of finer grain sizes; however, such a change is not so significant at the  
168 Datong station (Fig. 6).

169

170

171 21) Figure 6: How did the authors calculate the boxes? What do they represent?

172

173 Response:

174 This is the histogram of suspended sediment grain size, which represents the percentage content of different  
175 of different grain size. Taking the following table as example

176

177

The percentage content of different grain size

| Content (%)      |                  |       |             | Total |
|------------------|------------------|-------|-------------|-------|
| 0.0001-0.0002 mm | 0.0002-0.0003 mm | ..... | 0.9999-1 mm |       |
| 1                | 2                | ..... | 1           | 100   |

178

179

180

181 22) Lines 369 -376: Are the ranges presented standard deviations or just the total range of  
182 all of the observations? Are the daily values averaged over those years?

183

184 Response:

185 Revised. "The sediment grain size variations of the two stations also indicated that the average value of D<sub>50</sub>  
186 for the Yichang station was greater than that for the Datong station in 1960-1969, but the two stations had similar  
187 values in 1970-1985 and 1986-2002; after 2003, the average value of D<sub>50</sub> of the Yichang station was smaller than

188 that of the Datong station.”

189 The annual sediment load and grain size is a daily average for the whole year.

190

191

192 23) Lines 375-388: Again, I think the authors can simplify the text section and rely more on  
193 the figure, using the text to talk more about the general trends.

194

195 Response:

196 Revised.

197

198 Discussion

199 24) Lines 398-403: This sediment analysis seems out of place. Should be presented in the  
200 methods – Also equation did not show up in the PDF version of this paper.

201

202 Response:

203 This part is highly correlated to the topic discussed in the section of Discussion, so I think, it may be better  
204 that the equation presented here.

205

206 25) Lines 469-472: This sentence does not flow well.

207

208 Response:

209 Deleted.

## 210 Referee 2

211

212 1) The 2nd half of the abstract reads to be a little lacklustre and does not really provide the  
213 reader with the full breadth of the interesting findings reported here. This could be  
214 improved.

215

216 Response:

217 Revised.

218

219

220 2) The figures all need to be larger with larger font sizes. While they are greatly improved  
221 from the original submission, they are next to impossible to read. Please improve. This  
222 is was a huge frustration

223

224 Response:

225 Revised.

226

227 3) There are numerous grammatical and English errors throughout the text. The paper  
228 requires a thorough revision. I have made some comments below on this topic but please  
229 check carefully as there are many other issues.

230

231 Response:  
232 Revised. We made a thorough revision in grammatical and English writing throughout the paper.

233  
234

235 Other issues

236 4) Abstract, line 717. This is a very long sentence

237

238 Response:

239 Revised.

240  
241

242 5) Line 815. What do you mean by ‘discrepant’?

243

244 Response:

245 Revised.

246  
247

248 6) Figure 1 caption. This is not a sketch! Just start the caption with ‘Changjiang  
249 catchment.....’

250

251 Response:

252 Revised.

253  
254

255 7) Figure 4. The figure is extremely difficult to read. Make bigger. The dates are near  
256 impossible to read.

257

258 Response:

259 Revised.

260  
261

262 8) Line 1010. I am a little lost here. I presume you are referring to Table 1? This paragraph  
263 is difficult to comprehend. There seems to be several themes running.

264

265 Response:

266 Revised.

267  
268

269 9) Line 1023. I’m a little confused. Are you referring to Figure 6 here?

270

271 Response:

272 Revised.

273  
274

275 10) Line 1069. 'the' before 'Sediment'

276

277 Response:

278 Revised.

279

280

281 11) Line 1070. 'flowing' or 'following'?

282

283 Response:

284 Revised.

285

286

287 12) Line 1096. 'were the dominant sediment source'

288

289 Response:

290 Revised.

291

292

293 13) Line 1122 and paragraph. I found this paragraph difficult to read. I don't follow the  
294 sentence 'Considering the contribution.....'

295

296 Response:

297 Revised.

298

299

300 14) Line 1147. I don't follow what you mean by 'The increment of reservoir storage  
301 capacity.....'

302

303 Response:

304 Revised.

305

306

307

308

309

310

311

312

313

314

315

316

317



318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359

## List of changes made in the manuscript

A thorough revision in grammatical and English writing has been made throughout the paper. Due to the alteration is so much, so we have to only list major revisions in the marked-up manuscript:

### 1. Abstract

- ✓ The abstract was re-written.

### 2. Introduction

- ✓ Some minor modification has been made according to referee's comments and suggestions.

### 3. Regional setting

- ✓ Some sentences have been rectified.
- ✓ The figure 1 was re-drawn. In addition, font sizes were enlarged in all figures.

### 4. Material and method

- ✓ The description of hydrological stations within the catchment was largely narrow down.

### 5. Results

- ✓ The old figure 3 was replaced by new one.
- ✓ Some sentences have been rectified according to referee's comments and suggestions..

### 6. Discussion

- ✓ Some sentences have been rectified according to referee's comments and suggestions.
- ✓ The last paragraph of original manuscript was deleted according to referee's comments and suggestions.

360 **Variations in quantity, composition and grain size of Changjiang**  
361 **sediment discharging into the sea in response to human activities**

362

363 Jian Hua Gao<sup>a</sup>, Jianjun Jia<sup>b</sup>, Ya Ping Wang<sup>a</sup>, Yang Yang<sup>a</sup>, Jun Li<sup>c</sup>, Fenglong Bai<sup>c</sup>,  
364 Xinqing Zou<sup>a</sup>, Shu Gao<sup>a</sup>

365 a Ministry of Education Key Laboratory for Coast and Island Development, Nanjing University,  
366 Nanjing 210093, China

367 b Key Laboratory of Submarine Geo-Sciences, Second Institute of Oceanography, State Oceanic  
368 Administration, Hangzhou 310012, China

369 c Qingdao Institute of Marine Geology, Qingdao 266071, China

370

371 Abstract: In order to evaluate the impact of human activities (mainly dam building) on the  
372 Changjiang River sediment discharging into the sea, the spatial-temporal variations in the  
373 sediment load of different tributaries of the river was analyzed to reveal the quantity, grain size  
374 and composition patterns of the sediment entering the sea. The results show that the timing of  
375 reduction in the sediment load of the main stream of the Changjiang was different from those  
376 associated with downstream and upstream sections, indicating the influences of the  
377 sub-catchments. Four step-wise reduction periods were identified, i.e., 1956-1969, 1970-1985,  
378 1986-2002, and 2003-2010. The proportion of the sediment load originating from the Jinsha  
379 River continuously increased before 2003; after 2003, channel erosion in the main stream  
380 provided a major source of the sediment discharging into the sea. In addition, in response to dam  
381 construction, although mean grain size of the suspended sediment entering the sea did not change

382 greatly with these different periods, the inter-annual variability for sediment composition or the  
383 relative contributions from the various tributaries changed considerably. Before 2003, the clay,  
384 silt and sand fractions of the river load were supplied directly by the upstream parts of the  
385 Changjiang; after 2003, although the clay component may still be originated mainly from the  
386 upstream areas, the source of the silt and sand components have been shifted to a large extent to  
387 the river bed erosion of the middle reach of the river. These observations imply that the load,  
388 grain size and sediment composition deposited over the coastal and shelf water adjacent to the  
389 river mouth may have changed rapidly recently, in response to the catchment changes.

390 ~~Abstract: The impact of dam emplacement in terms of the spatial-temporal variations in the~~  
391 ~~sediment load of different tributaries of the Changjiang was analyzed. We have identified the~~  
392 ~~quantity, grain size and composition variations of the sediment entering the sea during different~~  
393 ~~periods and within different tributaries. The results show that the timing of reduction in the~~  
394 ~~sediment load of the main stream of the Changjiang was different from those associated with~~  
395 ~~downstream and upstream sections, indicating the influences of the sub-catchments. Four~~  
396 ~~step-wise reduction periods were observed, i.e., 1956-1969, 1970-1985, 1986-2002, and~~  
397 ~~2003-2010. Furthermore, the proportion of the sediment load originating from the Jinsha River~~  
398 ~~continuously increased before 2003, due to the sequential reduction in the sediment load of the~~  
399 ~~Han and Jialing Rivers. After 2003, channel erosion in the main stream of the Changjiang~~  
400 ~~became a major source of the sediment discharging into the sea. Because of the dam construction,~~  
401 ~~although mean grain size of the sediment entering the sea during the different periods did not~~  
402 ~~greatly change, the inter-annual variability, in terms of range of fluctuations, sediment~~  
403 ~~compositions and percentages of contributions of the tributaries changed considerably. Before~~

404 ~~2003, the clay, silt and sand fractions of the materials entering the sea were supplied directly by~~  
405 ~~the upstream parts of the Changjiang; after 2003, although the clay component may still be~~  
406 ~~originated mainly from the upstream areas, the source of the silt and sand components have been~~  
407 ~~shifted to a large extent to the erosion of the middle lower reach valleys. These observations~~  
408 ~~imply that caution should be taken in tracing the sediment sources, interpreting the sedimentary~~  
409 ~~records, as well as modeling the sediment dynamic processes for the estuarine, coastal and~~  
410 ~~continental shelf waters.~~

411 Keywords: grain size, sediment composition, sediment load, reservoir emplacement, Changjiang  
412 River

413

## 414 1. Introduction

415 Recently, the global sediment flux into the sea has drastically decreased under the influence  
416 of human activities (Vörösmarty et al., 2003; Walling, 2006), resulting in considerable changes  
417 in the geomorphology and eco-environment of estuarine, coastal and continental shelf regions  
418 (Syvitski et al., 2005; Gao and Wang, 2008; Gao et al., 2011). Thus, the source-sink processes  
419 and products of the catchment-coast system, including those associated with sediment transport  
420 pathways from catchment to continental margins under the impact of climate change and human  
421 activities, have received increasing attention (Driscoll and Nittrouer, 2002; Gao, 2006).

422 Because marine deposits consist of the materials from different sub-catchments, variations  
423 in the sediment characteristics at the deposition site should result from both sediment load  
424 reduction and alterations in sediment grain size and the proportion of the different sediment types  
425 originating from different tributaries (which is referred to as “sediment composition” in the

批注 [微软用户1]: Some minor modification (especially english writting) has been made according to referee's comments and suggestions

426 present study). With regard to the sediment load reduction, there have been studies about the  
427 impact of human activity (particularly large hydrologic projects) on changes in the sediment  
428 discharge into the sea, by analyzing long-term variation trends of representative rivers (i.e.,  
429 Milliman, 1997; Syvitski, 2003; Syvitski and Saito, 2007; Milliman and Farnsworth, 2011; Yang  
430 et al., 2011). However, less attention has been paid to the variations in the grain size and  
431 composition of sediment in response to human activities, together with its sedimentological and  
432 environmental effects. The importance of these two factors lies in that they reflect the sediment  
433 contribution of different sub-catchments to the marine deposits and determine the geochemical  
434 and sediment dynamic characteristics (Gao, 2007). Therefore, knowledge about the variations in  
435 the catchment sediment characteristics during different periods is critical for an accurate analysis  
436 of the sediment origin and distribution of estuary and coast-continental shelf regions and for the  
437 prediction of the response of the marine sedimentary system to climate change, sea level change,  
438 and human activities.

439 The Changjiang is one of the largest rivers in the world. A part of the sediment from the  
440 Changjiang catchment has formed a large sub-aqueous delta system of around 10,000 km<sup>2</sup>  
441 (Milliman et al., 1985); and the remainder escapes from the delta, being transported to the  
442 Yellow Sea, East China Sea, and Okinawa Trough, thereby exerting a considerable impact on the  
443 sedimentation and biochemistry of these areas (Liu et al., 2007; Dou et al., 2010). Recently, the  
444 sediment load of the Changjiang into the sea was reduced considerably in response to dam  
445 emplacement and soil water conservation projects (Yang et al., 2002). Dai et al. (2008)  
446 demonstrated that the contribution of dam construction and the water and soil conservative  
447 measures accounted for ~88% and  $15 \pm 5\%$  of the decline in sediment influx, respectively; and

448 climate change is responsible for a slight increase in sediment load, approximately 3%. The  
449 Changjiang catchment consists of numerous branches, and these tributaries are characterized by  
450 different rock properties and climate types. On the other hand, the intensity and occurrence time  
451 of human activities of these tributaries is also varied, which directly lead to different  
452 spatial-temporal patterns of the sediment yield from these tributaries (Lu et al., 2003). Thus, the  
453 sediment contribution of each tributary to the main river of the Changjiang also changed during  
454 different periods. In addition, dam construction and land cover variation also exert an important  
455 impact on changes of sediment grain size of tributaries and main river of Changjiang (Zhang and  
456 Wen, 2004). Therefore, the sediment contribution of different tributaries to the sediment load  
457 entering the sea, the grain size and composition of the sediment might vary with decreases in the  
458 sediment load of the Changjiang River.

459 In order to reveal the impacts of human activities (mainly dam construction) on the quantity,  
460 composition and grain size of Changjiang sediment discharging into the sea, this paper aims to:  
461 (1) analyze the impact of dam emplacement on the sediment load of different tributaries; (2)  
462 study the temporal-spatial variations of sediment load of the main river of the Changjiang under  
463 the impact of dams emplacement; (3) identify the quantity, grain size and composition variations  
464 of the sediment entering the sea during different periods; and (4) systematically analyze the  
465 variations in sediment load originating from tributaries within the Changjiang catchment during  
466 different historical periods.

467

## 468 2. Regional setting

469 The Changjiang, with a drainage basin area of approximately  $1.80 \times 10^6 \text{ km}^2$ , originates in

批注 [微软用户2]: Some sentences  
(especially english writting) have  
been rectified.


470 the Qinghai-Tibet Plateau and flows 6,300 km eastward toward the East China Sea. The upper  
471 reach of the river, from the upstream source to the Yichang gauging station (Fig.1a), is the major  
472 sediment-yielding area of the entire catchment (Shi, 2008). The main upstream river has four  
473 major tributaries, i.e., the Jinsha, Min, Jialing, and Wu Rivers. The upper reach region is  
474 typically mountainous, with an elevation exceeding 1,000 m above sea level (Chen et al., 2001).  
475 The mid-lower reach extends from Yichang to the Datong gauging station, with three large inputs  
476 joining the main stream in this section: the Dongting Lake drainage basin, the Hanjiang River,  
477 and the Poyang Lake drainage basin. The catchment area of this section mainly comprises  
478 alluvial plains and low hills with elevations of less than 200 m (Yin et al., 2007). The Dongting  
479 Lake is the second largest freshwater lake in China, and part of the main river flow enters  
480 Dongting Lake via five different entrances. Four tributaries enter Lake Dongting from the south  
481 and southwest, and water from Dongting Lake flows into the Changjiang main river channel at  
482 the Chenglingji gauging station (Dai et al., 2008). Therefore, the sediment load of Dongting Lake  
483 System did not directly supply to the Changjiang main river, and exerted important impacts on  
484 the silting and erosion of Dongting Lake. However, due to sediment decreasing upstream of the  
485 Changjiang, the Dongting Lake has been converting from a strong sediment sink of its upstream  
486 to a weak sediment source to its downstream (Dai and Liu, 2013), and the great decreasing of  
487 sedimentation of Dongting Lake is beneficial to slowing down the atrophy of Dongting Lake  
488 area. Poyang Lake is the largest freshwater lake in China, and it directly exchanges and interacts  
489 with the river. Poyang Lake receives runoff from 5 smaller tributaries (the Gan, Fu, Xin, Rao,  
490 and Xiu Rivers) and discharges freshwater into the Changjiang at Hukou (Shankman et al., 2006).  
491 The estuarine reach of the Changjiang extends from Datong (tidal limit) to the river mouth. The

492 local water and sediment supply from this part of river basin is much smaller in quantity in  
493 comparison with that from the upstream. Therefore, the Datong gauging station is a critical  
494 station; its records are often used to represent the sediment flux from the Changjiang to the East  
495 China Sea.

496 Due to intensified human activities, the catchment forest vegetation was continuously  
497 destroyed, and the forest coverage rate of Changjiang River Catchment greatly reduced (Xu,  
498 2000), thereby leading to the ecological environment seriously deteriorated (Lu and Higgitt,  
499 2000). Starting from the late of 1980s, a large-scale soil conservation campaign was  
500 implemented in high sediment yielding regions of the upper Changjiang catchment. However,  
501 due to the highly variable natural conditions of the tributaries, the effect of this campaign was  
502 different in every upstream tributary.~~However, due to the natural conditions difference of the~~  
503 ~~upstream Changjiang River Catchment, the effect of soil conservation campaign was discrepant~~  
504 ~~in every upstream tributary.~~ For example, the most of Jialing River watershed is hills areas, and  
505 mainly suffered from slope erosion (Zhang and Wen, 2004). In addition, its vegetation restoration  
506 rate is quite high due to the humid climate, and then the effect of vegetation recovery on  
507 reducing slope erosion is very prominent (Lei et al., 2006). Therefore, the sediment yield of  
508 Jialing River rapidly decreased since the soil conservation campaign carried out in 1980s  
509 (BSWC, 2011), and the land cover variation exerted more important impact on the sediment load  
510 reduction. The downstream Jinsha River with 782 km in length is the main sediment yield area;  
511 although its area only account for 7.8% of upstream Changjiang, the average annual sediment  
512 load reach 35.50% of that of the Yichang station (Zhang and Wen, 2004). This reach with  
513 developed landslide and debris flow, is characterized by high and steep mountains, and deep




514 valleys, which is not beneficial to vegetation restoration (Lei and Huang, 1991; Yang, 2004).  
 515 Therefore, the water and soil erosion governing effect in Jinsha River was not as obvious as that  
 516 in Jialing River (BSWC, 2011), reservoir interception is still the dominating factor leading to the  
 517 sediment load reduction.

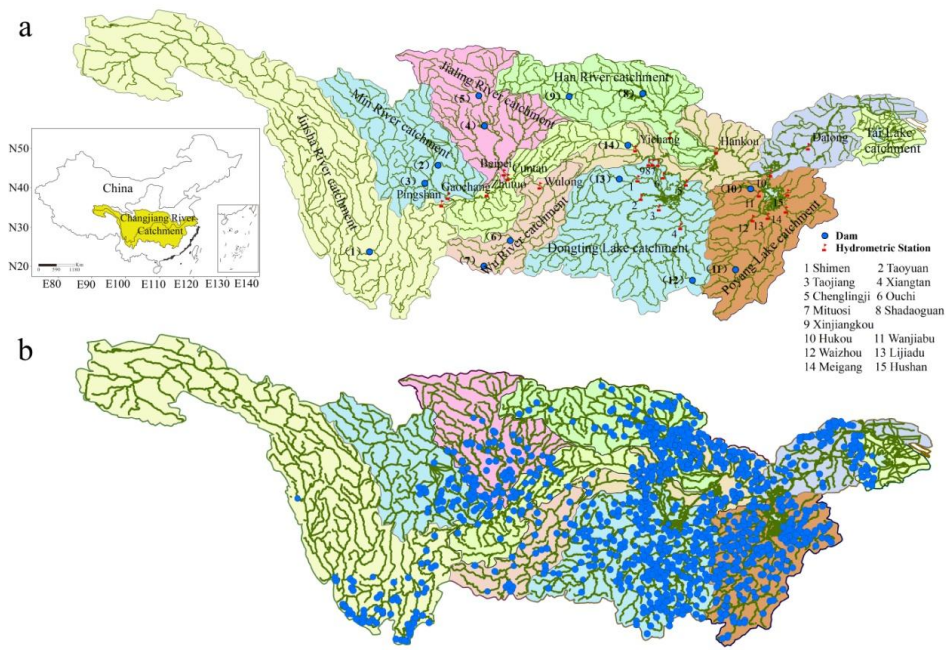

518  
 519 **Figure 1.** (a) Sketch of the Changjiang catchment and location of the hydrologic stations for the Changjiang  
 520 catchment (the numeric symbols in the figure denote some important reservoir sites, including: (1) Er'tan; (2)  
 521 Heilongtan; (3) Tongjiezi; (4) Shengzhong; (5) Baozhushi; (6) Wujiangdu; (7) Puding; (8) Danjiangkou; (9)  
 522 Ankang; (10) Zhelin; (11) Wan'an; (12) Dongjiang; (13) Jiangya; and (14) Three Gorges Dam); and (b) major  
 523 dams distributed within the Changjiang catchment.

带格式的: 字体: Times New Roman

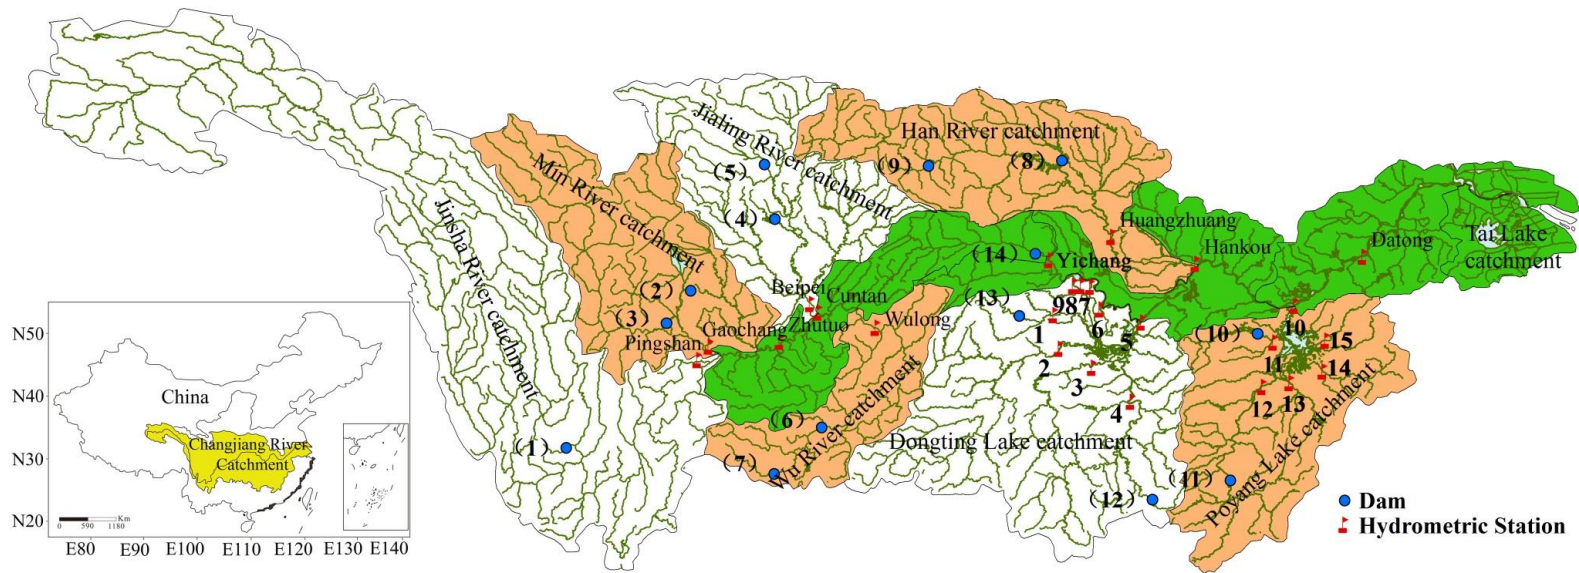

524

525

526

527

**Figure 1.** (a) The Changjiang catchment and location of the hydrologic stations for the Changjiang catchment. The numeric symbols in the figure denote some important reservoir sites, including: (1) Er'tan; (2) Heilongtan; (3) Tongjiezi; (4) Shengzhong; (5) Baozhusi; (6) Wujiangdu; (7) Puding; (8) Danjiangkou; (9) Ankang; (10) Zhelin; (11) Wan'an; (12) Dongjiang; (13) Jiangya; and (14) Three Gorges Dam).

### 3. Material and method

#### 3.1 Data sources

##### 3.1.1 Water discharge and sediment load data

The long-term discharge and sediment monitoring program over the entire catchment has been conducted since the 1950s, by the Changjiang Water Resource Commission (CWRC) under the supervision of Ministry of Water Resources, China (MWRC). These monitoring data of each station include field survey and measurement of discharge, suspended sediment concentration, suspended sediment load, and suspended sediment grain size, in accordance with Chinese national data standards (Ministry of Water Conservancy and Electric Power, 1962, 1975): 10-30 vertical profiles within the water column were selected for the measurements of each river cross-section, the number of profiles varying with the width of the river; For each profile, the water flow velocity (using a direct reading current meter) were measured at different depths (normally at surface, 0.2H, 0.6H, 0.8H and the bottom, where H is the height of the water column); Meanwhile, the water mass of the same depth were also sampled for measuring the suspended sediment concentration and grain size; the sediment grain size is measured using the settling of suspensions method. All above measurements are repeated daily at each station. The homogeneity and reliability of the hydrological data, with an estimated daily error of 16% (Wang et al., 2007), has been checked and firmly controlled by CWRC before its release. The data during the period of 1956-2001 was either published in the Yangtze River Hydrological Annals or provided directly by CWRC. After 2002, these hydrological data were posted in the Bulletin of China River Sediment published by the Ministry of Water Resources, China (BCRS, 2002-2010; available at:

批注 [微软用户3]: Some revisions in English writing were made.

<http://www.mwr.gov.cn/zwzc/hygb/zghlnsgb/>).

We acquired the annual sediment load data for 26 hydrological stations distributed in the main reach and seven of the tributaries, the location of these stations are shown in Fig.1. The dataset for these gauging stations covers a 55-year period (1956-2010). We acquired the annual sediment load data for 26 hydrological stations distributed in the main reach and seven of the tributaries. The dataset for these gauging stations covers a 55-year period (1956-2010). Five gauging stations are situated in the main reaches i.e., the Zhutuo, Cuntan, Yichang, Hankou, and Datong stations (from upstream to downstream). Four gauging stations are located at the upstream tributaries: the Pingshan station for the Jinsha River, the Gaochang station for the Min River, the Beibei station for the Jialing River, and the Wulong station for the Wu River. The Huangzhuang station is the control gauging station for the Han River. There are ten hydrological stations distributed in the Dongting Lake system: four stations are located at the four tributaries entering Lake Dongting i.e., the Xiangtan station for the Xiang River, the Taojiang station for the Zi River, the Taoyuan station for the Yuan River, and the Shimen Station for the Li River; and five stations are situated at the five different entrances where the Changjiang river discharges into Dongting Lake: the Mituoshi, Xinjiangkou, Shadaoguan, Ouchi (Kang), and Ouchi (Guan) stations; and the Chenglingji station monitors the Dongting Lake water entering the main river of the Changjiang.

Six hydrological stations are distributed in the Poyang Lake system: the Waizhou station for the Gan River, the Lijiadu station for the Fu River, the Meigang station for the Xin River, the Wanjiabu station for the Xiu River, the Hushan station for the Rao River, and the Hukou station for where the Poyang Lake water discharges toward the main river of the Changjiang.

### 3.1.2 Dam data

批注 [微软用户4]: Some revisions in English writing were made.

In the present study, the reservoirs with a storage capacity  $> 0.01 \text{ km}^3$  (i.e., “large and medium sized reservoirs” according to the MWRC) are considered. Data on reservoir emplacement during 1949-2001 were obtained from the MWRC (2001), and those built during 2002-2007 were obtained from annual reports published by the MWRC (<http://www.mwr.gov.cn/zwzc/hygb/slbgb/>). In total, we count 1,132 large and medium sized reservoirs located within the Changjiang catchment, of which 1,037 reservoirs are situated upstream of the Datong station (Fig.1b). The database includes information on reservoir storage capacity, construction and impoundment time.

Here the reservoir storage capacity index (RSCI) is defined as the ratio of the reservoir storage capacity to the annual average water discharge of the contributed catchment; thus, the total RSCI of a catchment is the ratio of total capacity of reservoir to the annual average water discharge.

## 3.2 Analytical methods

The Mann-Kendall test (M-K test) is a nonparametric method, and it has been used to analyze long-term hydro-meteorological time series trend (Mann, 1945; Kendall, 1955). This test does not assume any distribution form for the data and is as powerful as its parametric competitors (Serrano et al., 1999). Trend analysis of the sediment load changes was conducted based on this method. Before using the M-K test, the autocorrelation and partial autocorrelation functions were used to examine the autocorrelation of all hydrological data. The results indicated that there was no significant autocorrelation in the data. The modified M-K method was used to analyze variations in the sediment load data:  $X_t = (x_1, x_2, x_3, \dots, x_n)$ , where the accumulative number  $m_i$  for samples for which  $x_i > x_j$  ( $1 \leq j \leq i$ ) was calculated, and the normally distributed statistic  $d_k$  was

expressed as (Hamed and Rao, 1998)

$$d_k = \sum_{i=1}^k m_i \quad 2 \leq k \leq n \quad (1)$$

The mean and variance of the normally distributed statistic  $d_k$  were defined as

$$E[d_k] = \frac{k(k-1)}{4} \quad (2)$$

$$\text{Var}[d_k] = \frac{k(k-1)(2k+5)}{72} \quad 2 \leq k \leq n \quad (3)$$

Then, the normalized variable statistical parameter  $UF_k$  was calculated as

$$UF_k = \frac{d_k - E[d_k]}{\sqrt{\text{var}[d_k]}} \quad k = 1, 2, 3, \dots, n \quad (4)$$

where  $UF_k$  is the forward sequence, and the backward sequence  $UB_k$  was obtained using the same equation but with a retrograde sample. The C values calculated with progressive and retrograde series were named  $C_1$  and  $C_2$ . The intersection point of the two lines,  $C_1$  and  $C_2$  ( $k=1, 2, \dots, n$ ) was located within the confidence interval, providing the beginning of the step change point within the time series. Assuming normal distribution at the significant level of  $P=0.05$ , a positive Man-Kendal statistics C larger than 1.96 indicates an significant increasing trend; while a negative C value with an absolute value of lower than 1.96 indicates a significant decreasing trend.

## 4. Results


### 4.1 Stepwise variations in the reservoir storage capacity of the tributaries

The total RSCI of the seven tributaries and main stream of the Changjiang reveal stepwise increasing trends (Fig. 2). The variations in reservoir storage capacity of the four tributaries upstream the Changjiang indicated that the total RSCI of the Min River catchment is low (1.72% in 2010) and those of the Jialing and Wu Rivers rapidly increased in 1985; in response to the

批注 [微软用户5]: Some sentences have been rectified according to referee's comments and suggestions.

批注 [微软用户6]: Some revisions in English writing were made.

construction of the Er'tan reservoir, the total RSCI of the Jinsha River also rose considerably in 1998. As a result of rising in the reservoir storage capacity of the above four rivers, the total RSCI of the Changjiang catchment, upstream of the Yichang station where there were increases by 2.8% in 1985 and 16.0% in 2003, also showed the stepwise patterns.

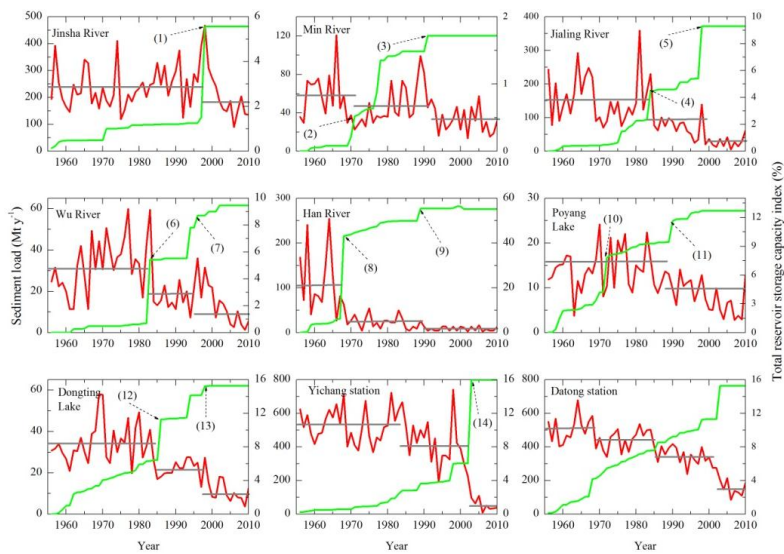

**Figure 2.** Relationship between the reduction in sediment load and the total reservoir storage capacity index

in the tributaries and the main stream. Numeric symbols represent reservoirs listed in Figure 1a.

The middle-lower reaches of the Changjiang catchment consisted of three major tributaries, namely, the Han River, Dongting Lake and Poyang Lake. The total RSCI of Han River began to increase in 1966, and greatly rose in 1968. In addition, the rapid increment in the total RSCI of Poyang Lake and Dongting Lake were also observed in 1972 and 1985, respectively. Attributing to the dam construction of the seven tributaries of the Changjiang catchment, there has been a jump in the total RSCI of the Changjiang River upstream of the Datong station in 1969 and 2003,

respectively.

The changes of the total RSCI and sediment load of the tributaries and the whole Changjiang catchment indicate that the stepwise decrease of sediment load is apparently related to the significant increase of the total RSCI. In the case of the Yichang and Datong stations, over the last few decades, there is significant negative correlation between average sediment load and total RSCI at both the Yichang and Datong stations (Fig.3), which reflected the impact dams have on the sediment load. The changes of the total RSCI and sediment load of tributaries and the whole Changjiang catchment indicate that the stepwise decrease of sediment load is highly related to the significant increase of the total RSCI. In addition, over the last few decades, the cumulative water and sediment discharge relation of each tributary continuously changed, with the slope of curve decreasing, and every turning point of the curve was closely related to dam construction (Fig. 3). The above two relationships reflected the impact dams have on sediment load.


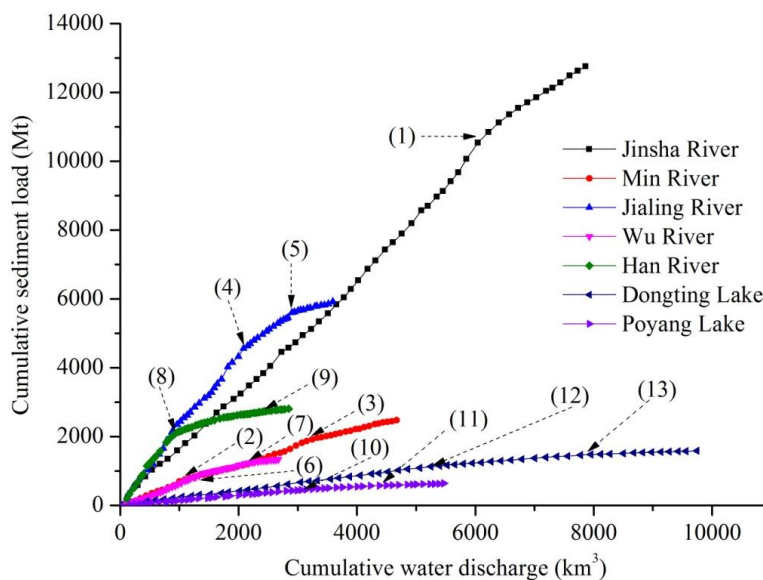


Figure 3. Cumulative water discharge-sediment load relations of the seven tributaries of the Changjiang catchment. Numeric symbols representing the reservoirs are the same as those in Figure 1a.



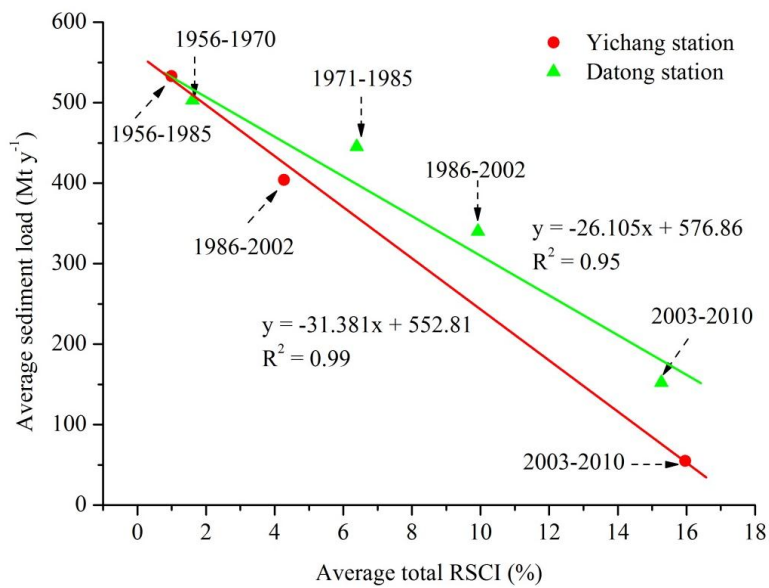

**Figure 3.** The relationship between average sediment load and total RSCI of different periods at Yichang and Datong station.


## 4.2 Spatial-temporal sediment load variations within the catchment

The trends, derived on the basis of the M-K method, of sediment load of the seven tributaries indicated that (Figs. 4 and 5): during the period of 1956-2010, the sediment load of Wu River, Jialing River, Min River and Jinsha River began to decrease in 1984, 1985, 1994 and 2001, respectively, suggesting that the downstream sediment load began to decrease earlier than the upstream sediment load in the upstream of Changjiang catchment. In addition, the M-K trends of sediment load of Jinsha River did not pass the 95% confidence test, and that of Wu River, Jialing River and Min River passed the 95% confidence test in 2004, 1990 and 2008, respectively, indicating that the sediment load variations of the three rivers appeared significant decreasing trends. In the mid-downstream of the Changjiang catchment, the sediment load Han River,


批注 [微软用户7]: Some revisions in English writing were made.

Dongting Lake and Poyang Lake began to reduce in 1966, 1984 and 1985, respectively; and the M-K trends of sediment load of the three sub-catchments exhibited significant decreasing trends (passing the 95% confidence test) in 1970, 1995 and 2000, respectively.

Due to discrepancies among the sediment load variations of the seven sub-catchments, there were significant temporal-spatial differences in the sediment load variations of the Changjiang main river: the sediment load began to decrease later in upstream locations than in downstream locations. As a result of the sediment load reducing of Jialing River and Wu River in 1985 and 1984, the sediment load upstream the Yichang station began to reduce in 1985, and passed the 95% confidence test in 1996. Impacted by sediment load decreasing of Han River beginning from 1966, the sediment load lessening trends of mid-lower reach of Changjiang main river (Hankou and Datong station) were observed in 1969. Furthermore, as a consequence of sediment load reducing of upstream and mid-lower tributaries in 1985, the sediment load of mid-lower reach of Changjiang main river began to further decrease in 1985. In addition, the M-K trends of sediment load of Datong, Hankou and Yichang station passed the 95% confidence test in 1989, 1997 and 1996, respectively, i.e., the statistical sediment load decreasing trends occurred qualitative change.

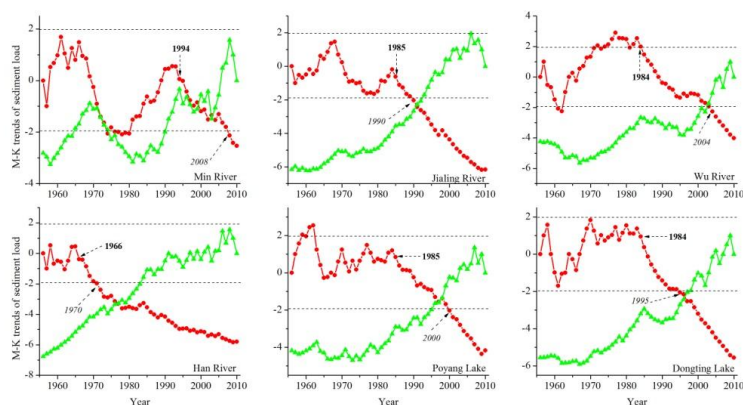

**Figure 4.** M-K trends of the sediment load for the Jinsha, Min, Jialing, Wu, and Han Rivers and the Poyang and Dongting Lake system. The symbol  $\bullet$  and  $\blacktriangle$  denotes  $C_1$  and  $C_2$ , respectively. The bold is the beginning time of sediment load decreasing; and the italics is the time when the M-K trends of the sediment load pass the 95% confidence test.

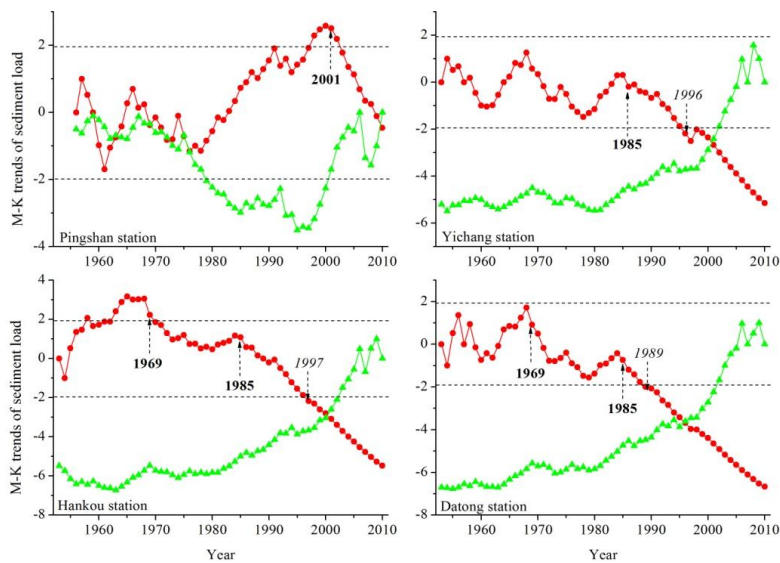

**Figure 5.** M-K trends of the sediment load for different gauging stations of the Changjiang main river. The symbol  $\bullet$  and  $\blacktriangle$  denotes  $C_1$  and  $C_2$ , respectively. The bold is the beginning time of sediment load decreasing; and the number in italics denotes the time when the M-K trends of the sediment load pass the 95% confidence test.

### 4.3 Stepwise reduction of the sediment load entering the sea

The M-K trends of sediment load variation at Datong station show that, 1969 and 1985 are two important time nodes, reflecting the beginning time of sediment load decreasing. Due to the M-K trends of the sediment load passing the 95% confidence test occurred at 1989, another important time nodes (2003) is not reflected in the M-K trends of sediment load of Datong station.

批注 [微软用户8]: Some revisions in English writing were made.

Taking into account the great impact of the Three Gorges Dam on the sediment load decreasing of the Changjiang main stream (Hu et al., 2011), the variations of the sediment load entering the sea of the Changjiang could be divided into four stepwise reduction stages, namely, 1956-1969, 1970-1985, 1986-2002, and 2003-2010.

The variations of sediment load discharging into the sea of the Changjiang (Datong station) indicated that, although the sediment load of the Datong station, with an average value of 503 Mt  $y^{-1}$ , exhibited fluctuations from 1956 to 1969, the quantity generally remained at a high level (Tab.1). Han River was ever the most important sediment source of middle reach of Changjiang main river (Yin et al., 2007); however, due to the annual sediment load supplied by the Han River decreased by 95 Mt, the sediment load of the Datong station reduced to 445 Mt in 1970-1985. Previous studies have suggested that the sediment load from the Changjiang entering the sea began to decrease in the 1980s (Yang et al., 2002); however, we demonstrate that this decreasing trend already occurred in 1970, and the impact of the reduced sediment load of the Han River on the sediment flux of the Changjiang into the sea was neglected in these previous studies. Due to the sediment load upstream Changjiang occurring decreasing trends in 1985, in term of the quantity reducing from 533 Mt  $y^{-1}$  during 1956-1985 to 404 Mt  $y^{-1}$  during 1986-2002, the sediment load entering the sea of the Changjiang lessened to 340 Mt  $y^{-1}$  during this period. With the emplacement of Three Gorges Dam in 2003, the sediment load upstream of the Changjiang decreased to 55 Mt  $y^{-1}$  during 2003-2010, and the sediment load entering the sea of the Changjiang was only 152 Mt  $y^{-1}$ .

Table 1. The mean value of sediment load of the Changjiang main river during different period

| Time      | Pingshan station<br>Mt y <sup>-1</sup> | Yichang station<br>Mt y <sup>-1</sup> | Hankou station<br>Mt y <sup>-1</sup> | Datong station<br>Mt y <sup>-1</sup> |
|-----------|--|---------------------------------------|--------------------------------------|--------------------------------------|
| 1956-1969 | 232                                    | 547                                   | 461                                  | 503                                  |
| 1970-1985 | 226                                    | 521                                   | 426                                  | 445                                  |
| 1986-2002 | 275                                    | 404                                   | 331                                  | 340                                  |
| 2003-2010 | 151                                    | 55                                    | 118                                  | 152                                  |


Overall, four stepwise reduction stage periods of the sediment load discharging into the sea of the Changjiang were observed, namely, 1956-1969, 1970-1985, 1986-2002, and 2003-2010. In addition, the sediment load into the sea between adjacent time periods gradually decreased, attributing to the sediment load decreasing of different tributaries: the sediment load reduction entering the sea during 1970-1985 was mainly caused by Han River; upstream tributaries (mainly Jialing and Wu River), together the sub-catchment of mid-lower reach (mainly Poyang Lake) were responsible for the sediment load into the sea decreasing during 1970-1985; and the sediment load discharging into the sea lessening during 2003-2010 were mainly resulted from the emplacement of the Three Gorges Dam.

#### 4.4 Variations in the grain size of the sediment entering the sea

Because most of the coarse-grained sediment is intercepted by reservoirs, the sediment grains size downstream of the reservoirs become significantly finer (Xu, 2005). The variation in the medium grain size ( $D_{50}$ ) of suspended sediments from the Yichang station (Fig. 56) indicated that the average  $D_{50}$  was 0.017 mm in 1960-1969, 0.012 mm in 1970-1985, 0.009 mm in 1986-2002, and 0.004 mm in 2003-2010, suggesting that the sediment grain size from the upstream Changjiang exhibited a continuous decreasing trend. In contrast, the decreasing trend of  $D_{50}$  from the Datong station was not as significant as that from the Yichang station during the four stages:

批注 [微软用户9]: Some revisions in English writing were made.

the average  $D_{50}$  in 1960-1969 (0.12 mm) was similar to that in 1970-1985 (0.13 mm), and a slight decreasing trend was recorded in 2002 (0.09 mm) and 2003-2010 (0.10 mm).

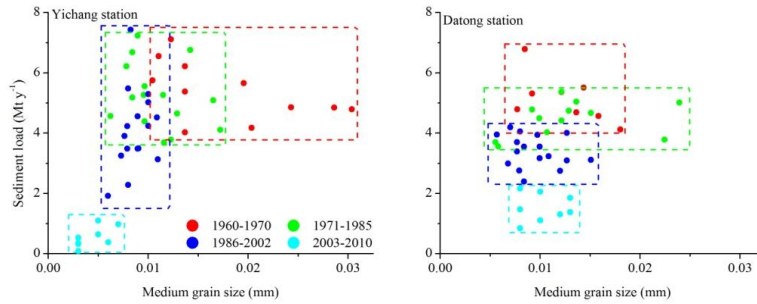

**Figure 6.** Relationship between the medium grain size of suspended sediments and the sediment load during different periods at the Yichang and Datong stations. Data are not available for the Datong station in 1968-1970, 1972-1973, and 1975.

In addition, the degree of inter-annual variation in the upstream sediment grain size continuously decreased during the four stages, i.e., the  $D_{50}$  variation interval gradually narrowed (standard deviation continuously reduced), and the distribution range of the data point of  $D_{50}$  and sediment load moved from the top left corner to the bottom right corner in the coordinate system; however, that of the Datong station generally shifted vertically downward. The sediment grain size variations of the Yichang and Datong stations in the four stages also indicated that the average value of  $D_{50}$  of the Yichang station was greater than that of the Datong station in 1960-1969, and the two stations were similar in 1970-1985 and 1986-2002; after 2003, the average value of  $D_{50}$  of the Yichang station was less than that of the Datong station. Furthermore,  $D_{50}$  ranged from 0.003-0.007 mm for Yichang station and 0.008-0.013 mm for Datong station in 2003-2010, suggesting that the  $D_{50}$  variation range of the two stations did not overlap after 2003.


In addition, the degree of inter-annual variation in the upstream sediment grain size continuously decreased during the four stages, i.e., the  $D_{50}$  variation interval gradually narrowed, and the distribution range of the data point of  $D_{50}$  and sediment load moved from the top left corner to the bottom right corner in the coordinate system; however, that of the Datong station generally shifted vertically downward. The sediment grain size variations of the Yichang and Datong stations in the four stages also indicated that the  $D_{50}$  of the Yichang station was greater than that of the Datong station in 1960–1969, and the two stations were similar in 1970–1985 and 1986–2002; after 2003, the  $D_{50}$  of the Yichang station was less than that of the Datong station. Furthermore,  $D_{50}$  ranged from 0.003–0.007 mm for Yichang station and 0.008–0.013 mm for Datong station in 2003–2010, suggesting that the  $D_{50}$  variation range of the two stations did not overlap after 2003.

Compared with sediment fraction between 1960 and 2002, the clay and silt content of Yichang station greatly increased, and the sand fraction significantly decreased after 2003 (Fig. 7); whereas, although the sand fraction of Datong station still had no obvious variation trends, the clay content increased, and the silt content reduced. In addition, before 2003, the silt and clay content appeared no obvious discrepancy between Yichang and Datong station, and the sand content fraction of Yichang station was slightly greater than that of Datong station; however, after 2003, the sand content fraction of Datong station was significantly greater than that of Yichang station, and the clay content of Datong station was less than that of Yichang station, which implied that other sediment sources (not the seven tributaries of Changjiang) supplied sand fraction to Yichang-Datong reach of the Changjiang. The above analysis suggests that although the average value of the grain size of the sediment entering the sea during the different periods did not greatly

alter, the inter-annual variation range and sediment components and origin changed considerably.

The sand fraction of the Yichang and Datong station, ranging from 30.32% and 22%–27%, respectively, remained stable from 1960 to 2002. However, the clay content fraction of the two stations increased, and the silt fraction content decreased. After 2003, the clay and silt content of Yichang station greatly increased, and the sand fraction significantly decreased (Fig. 7); whereas, although the sand fraction of Datong station still had no obvious variation trends, the clay content increased, and the silt content reduced. In addition, before 2003, the silt and clay content appeared no obvious discrepancy between Yichang and Datong station, and the sand content fraction of Yichang station was slightly greater than that of Datong station; however, after 2003, the sand content fraction of Datong station was significantly greater than that of Yichang station, and the clay content of Datong station was less than that of Yichang station, which implied that other sediment sources (not the seven tributaries of Changjiang) supplied sand fraction to Yichang–Datong reach of the Changjiang. The above analysis suggests that although the average value of the grain size of the sediment entering the sea during the different periods did not greatly alter, the inter-annual variation range and sediment components and origin changed considerably.



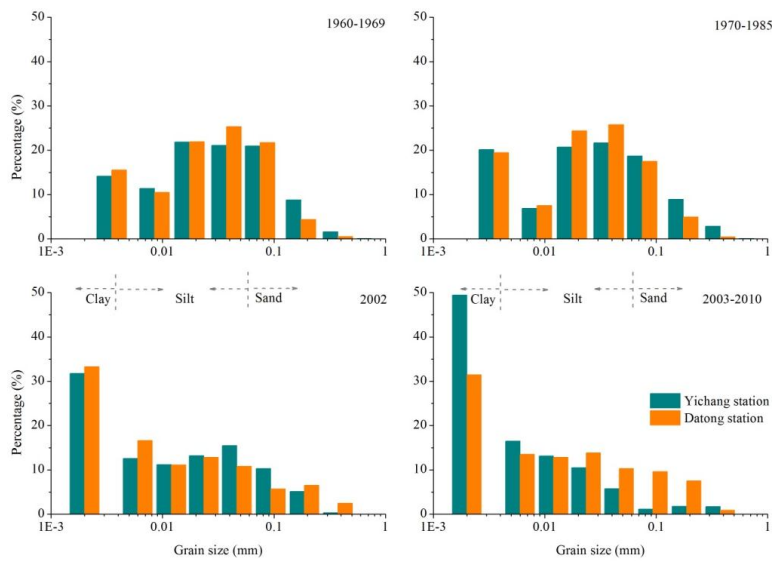

**Figure 7.** Distribution of the suspended sediment grain size of the Yichang and Datong stations in 1960-1969, 1970-1985, 2002, and 2003-2010.

## 5. Discussion

As outlined above, the Changjiang sediment load is influenced by mixing of weathering products supplied by the different sub-catchments. The spatial-temporal differences among the sub-catchments, in terms of sediment load variations, caused the sediment load reduction and changes in the sediment composition. According to the concept of sediment budget (Houben, 2012), the following equation may be used to calculate the sediment balance of the main stream Changjiang: The sediment load from the Changjiang entering the sea mixes weathering products supplied by different sub-catchments. The temporal-spatial discrepancy among the sediment load variations of sub-catchments caused the sediment load entering the sea to decrease and resulted in changes to the sediment composition. According to the concept of Sediment Budget (Houben, 2012), the following equation is used to calculating the sediment

批注 [微软用户10]: Some sentences have been rectified according to referee's comments and suggestions.

discharge balance of Changjiang main river:

$$\sum S_{input} = \Delta S + S_{output} = S_{Jinsha} + S_{Min} + S_{Jialing} + S_{Wu} + S_{Han} + S_{Poyang} \quad (5)$$

where  $\sum S_{input}$  is the sediment contribution of tributaries to the sediment load of the Changjiang main stream,  $S_{output}$  is the sediment load entering the sea of the Changjiang (Datong station),  $\Delta S$  is the quantity of deposited (+) / erosive (-) sediment of the Changjiang main stream and Dongting Lake. Therefore, the sediment contribution proportion of different tributaries to the sediment load entering the sea of the Changjiang can be expressed as:

$$\frac{S_{Jinsha}}{S_{output}} + \frac{S_{Min}}{S_{output}} + \frac{S_{Jialing}}{S_{output}} + \frac{S_{Wu}}{S_{output}} + \frac{S_{Han}}{S_{output}} + \frac{S_{Poyang}}{S_{output}} - \frac{\Delta S}{S_{output}} = 1 \quad (6)$$

The calculated results indicated that (Tab.2), in 1956-1969, the sediment load of the Datong station mainly originated from the Jinsha, Jialing, and Han Rivers, and the three rivers contributed 35.0%, 24.3%, and 19.0%, respectively, of the sediment to the Datong station. As the sediment load of the Han River decreased, the Jinsha and Jialing Rivers accounted for 46.7% and 27.6%, respectively, of the sediment load at the Datong station during the 1970-1985 period, whereas the contribution of the Han River decreased to 5.8%. During the 1986-2002 period, due to the reduced sediment yield in the Jialing River, the contribution of the Jinsha River to the sediment load of the Datong station further increased to 64.2% and that of the Jialing River decreased to 15.0%. The composition of sediment from the Changjiang entering the sea changed considerably during the 2003-2010 period due to the TGD emplacement: the sediment proportion due to channel erosion of the main river reached 48.3% and that of the Jinsha River decreased dramatically to 24.1%. In addition, the Jialing and Han Rivers only contributed 5.3% of the sediment load of the Datong station, respectively.

**Table 2.** The sediment contribution proportion (%) of different tributaries to the sediment load entering the sea of

the Changjiang.

| River/Catchment                       | 1956-1969 | 1970-1985 | 1986-2002 | 2003-2010 |
|---------------------------------------|-----------|-----------|-----------|-----------|
| Jinsha River                          | 35        | 46.7      | 64.2      | 24.1      |
| Min River                             | 8.8       | 8.6       | 10.1      | 6.1       |
| Jialing River                         | 24.3      | 27.6      | 15        | 5.3       |
| Wu River                              | 4.4       | 8.2       | 4.5       | 2.2       |
| The total of the upstream four rivers | 72.5      | 91.1      | 93.8      | 37.7      |
| Han River                             | 19        | 5.8       | 2.8       | 5.3       |
| Channel erosion                       | 6.1       | 0.9       | 1.1       | 48.3      |
| Poyang Lake                           | 2.4       | 2.2       | 2.3       | 8.7       |

The above analysis indicated that as the sediment load entering the sea decreased, although the average sediment grain size displayed no clear variations, the sediment composition changed considerably. Before 2003, the four rivers of the upstream Changjiang was the dominating sediment source to the sediment load entering the sea, and their total contribution was 72.5% during 1956-1969, 91.1% during 1970-1985, and 93.8% during 1986-2002, respectively. In addition, during this period, the variations in the sediment composition were mainly determined by the changes in the sediment contributions of the Jinsha, Jialing, and Han Rivers, i.e., with the sequential reduction in the sediment loads of the Han and Jialing Rivers, the proportion of the sediment load originating from the Jinsha River continuously increased, whereas the proportion of the sediment load from the other sub-catchments remained stable. However, after 2003, the sediment contribution of the upstream to the sediment load of the Datong station greatly decreased. The mid-lower stream channel of the Changjiang was one of major sinks of the upstream sediment (Yang et al., 2011); after 2003, channel erosion of the mid-lower portion of the main river became the greatest source of sediment load of the Datong station.

Apart from dams interception effect, the soil conservation campaign starting from 1989 and implemented for the high sediment yielding regions of the upper Changjiang basin (Hu et al.,

2011), may be another factor accelerating the decreasing trend of the sediment grain size of Yichang station. The different grain sizes of the sediment of Yichang and Datong station indicated that, the clay, silt, and sand fraction of the Yichang station were greater than those of the Datong station during 1960-1969, 1970-1985, and 1986-2002 periods (Tab. 3), which implied that the sediment fraction of clay, silt, and sand entering the sea mainly originated from the upstream Changjiang without regard to sediment exchange between the river water and the riverbed. After the emplacement of the TGD in 2003, the clay, silt, and sand fractions originating from the upstream Changjiang decreased dramatically. With regard to the amount of sediment originating from the Poyang Lake and Han River to the Changjiang main river, we still use the sediment budget concept, calculate different sediment fraction balance of Changjiang main river between Yichang-Datong reach:

$$S_{Yichang} + S_{Han} + S_{Poyang} = \Delta S + S_{datong} \quad (7)$$

The results show that, the erosive sediment of the main river channel (Yichang-Datong) and Dongting Lake contributed 13 Mt y<sup>-1</sup> of clay, 43 Mt y<sup>-1</sup> of silt, and 20 Mt y<sup>-1</sup> of sand to the sediment load of Datong station in 2003-2010, which accounted for 27.1%, 55.8% and 74.1% of the corresponding sediment component of Datong station. Considering the contribution of strong erosion of the estuarine reach (Li, 2007), the real proportion of silt, and sand fractions into the sea coming from the erosive sediment of main river channel, may be greater than 55.8% and 74.1%.

These data imply that the clay fraction at the Datong station should be originated mainly from the upstream Changjiang, and the silt and sand fractions largely consisted of the eroded sediment of the middle reach river channel.~~These data imply that the clay fraction of the sediment of Datong station mainly originated from the upstream of the Changjiang, and the silt and sand fractions~~

~~largely comprised the erosive sediment of the mid-lower reaches of the main river channel.~~

**Table 3.** Annual quantities of clay, silt, and sand at the Yichang and Datong stations during different periods.

| Time Period | Clay (Mt y <sup>-1</sup> ) |        | Silt (Mt y <sup>-1</sup> ) |        | Sand (Mt y <sup>-1</sup> ) |        |
|-------------|----------------------------|--------|----------------------------|--------|----------------------------|--------|
|             | Yichang                    | Datong | Yichang                    | Datong | Yichang                    | Datong |
| 1960-1969   | 78                         | 78     | 297                        | 291    | 172                        | 134    |
| 1970-1985   | 105                        | 86     | 257                        | 257    | 159                        | 102    |
| 1986-2002   | 128                        | 113    | 212                        | 174    | 63                         | 50     |
| 2003-2010   | 27                         | 48     | 25                         | 77     | 3                          | 27     |

~~The variations in the sediment characteristics of the Changjiang entering the sea have traditionally been slow and gradual (Saito et al., 2001); however, the load, grain size, and composition of sediment entering the sea changed rapidly in recent decades, resulting in rapid changes in characteristics of the sediment entering the sea. Generally, catchment sediments into the sea contain rich catchment environmental change information, thereby becoming an important medium for identifying previous catchment changes (Brown et al., 2009). Estuary-coastal-continental shelf areas are the final destination of catchment sediments; however, the gross sedimentary flux, terrestrial material tracing, sedimentary records interpreting, and sediment dynamically modeling of these areas are closely correlated to the sediment load entering the sea, the sediment composition and sediment grain size (Gao, 2013). Therefore, above changes will bring about more uncertainty, which deserves further investigations.~~

## 6. Conclusions

(1) The increment of reservoir storage capacity is significantly correlated with the decrease in the sediment load, which reflected the impact of dams on the sediment load of tributaries and the

entire Changjiang catchment.

(2) The patterns of sediment delivery from the sub-catchments of the Chnagjiang River have been changed, with significant spatial-temporal differences in the sediment load variations of the Changjiang main stream: four stepwise reduction stages were identified, i.e., 1956-1969, 1970-1985, 1986-2002, and 2003-2010. There was a lag of the decrease in the sediment load at upstream locations compared with those at downstream locations.

(3) Before 2003, the variations in the sediment composition in the marine areas were mainly determined by the changes in the sediment contribution made by the Jinsha, Jialing, and Han Rivers. However, after 2003, channel erosion of the main stream of the Changjiang supplied around 48.3% of the sediment load into the sea.

(4) Impacted by dam construction, although mean grain size of the sediment entering the sea during the different periods did not show clearly-defined variations, the inter-annual variation in terms of the range, sediment components and source areas, changed considerably.

(5) Before 2003, the clay, silt and sand fractions entering the sea were mainly originated from the upstream regions of the river. In contrast, after 2003, the origin of the clay component of the sediment was dominated by the upstream areas, whilst the silt and sand component were mainly supplied by the eroding bed of the middle-reach main channel of the Changjiang River.~~Before 2003, the clay, silt, and sand fractions entering the sea mainly originated from the upstream regions of the river. In contrast, after 2003, the origin of the clay component of the sediment was dominated by the upstream areas, whilst the silt and sand component were mainly supplied by the eroding bed of the main channel.~~

## Acknowledgments

The study was supported by the National Basic Research Program of China (Grant No. 2013CB956503) and the Natural Science Foundation of China (Grant Nos. 41376068).

## References

~~Brown, A.G., Carey, C., Erkens, G., Fuchs, M., Hoffmann, T., Macaire, J.J., Moldenhauer, K.M., Walling, D.E.:  
From sedimentary records to sediment budgets: Multiple approaches to catchment sediment flux.  
Geomorphology, 108, 35-47, 2009.~~

BSWC (Bulletin of soil and water conservation in China): Press of Ministry of Water Resources of the People's Republic of China. (<http://www.mwr.gov.cn/zwzc/hygb/zgstbcgb/>), 2007

Chen, Z., Li, J., Shen, H., Wang, Z. H.: Yangtze River of China: historical analysis of discharge variability and sediment flux. *Geomorphology*, 41(2), 77-91, 2001.

Dai, S.B., Lu, X.X., Yang, S.L., Cai, A.M.: A preliminary estimate of human and natural contributions to the decline in sediment flux from the Yangtze River to the East China Sea. *Quatern. Int.*, 186, 43-54, 2008.

Dai, Z., Liu, J. T.: Impacts of large dams on downstream fluvial sedimentation: An example of the Three Gorges Dam (TGD) on the Changjiang (Yangtze River). *J. Hydrol.*, 480,10-18, 2013.

Dou, Y.G., Yang, S.Y., Liu, Z.X., Clift, P.D., Yu, H., Berne, S., Shi, X.F.: Clay mineral evolution in the central Okinawa Trough since 28 ka: Implications for sediment provenance and paleoenvironmental change. *Palaeogeogr. Palaeoclimatol.*, 288, 108-117, 2010.

Driscoll, N., Nittrouer, C.: Source to Sink Studies . *Margins Newsletter*, 5, 1-24, 2002.

Gao, S., Wang, Y.P., Gao J.H.: Sediment retention at the Changjiang sub-aqueous delta over a 57 year period in response to catchment changes. *Estuar. Coast. Shelf Sci.*, 95, 29-38, 2011.

Gao, S., Wang, Y.P.: Changes in material fluxes from the Changjiang River and their implications on the adjoining continental shelf ecosystem. *Cont. Shelf Res.*, 28, 1490-1500, 2008.

Gao, S.: Catchment-coastal interaction in the Asia-Pacific region. in: Harvey, N. (Eds), *Global change and integrated coastal management: the Asian-Pacific region*. Springer, Dordrecht, pp. 67-92, 2006.

~~Gao, S.: Holocene shelf coastal sedimentary systems associated with the Changjiang River: An overview. *Acta Oceanol. Sin.*, 32(12), 4-12, 2013.~~

Gao, S.: Modeling the growth limit of the Changjiang Delta. *Geomorphology*, 85, 225-236, 2007.

Hamed, K.H., Rao, A.R.: A modified Mann-Kendall trend test for autocorrelated data. *J. Hydrol.*, 204, 182-196, 1998.

Houben, P.: Sediment budget for five millennia of tillage in the Rockenberg catchment (Wetterau loess basin, Germany). *Quatern. Sci. Rev.*, 52, 12-23, 2012.

Hu, B.Q., Wang, H.J., Yang, Z.S., Sun, X.X.: Temporal and spatial variations of sediment rating curves in the Changjiang (Yangtze River) basin and their implications. *Quatern. Int.*, 230, 34-43, 2011

Kendall, M.G.: *Rank Correlation Methods*. Griffin, London, 1955.

Lei, X.Z., Cao, S.Y., Jiang, X.H.: Impacts of soil-water conservation in Jiangling River on sedimentation of the Three Gorges Reservoir. *Journal of Wuhan University. Natural sciences edition*, 11(4), 922-928 (in Chinese, with English Abstr.), 2006

Lei, X.Z., Huang, L.L.: Discussion of soil erosion mechanism in some areas of the upper Yangtze River. *Journal of Sichuan Forestry Science and Technology*, 12(4), 9-16 (in Chinese, with English Abstr.) , 1991

Li, L.Y.: The characteristics of water and sediment discharge and river channel evolution of Datong-Xuliujing section of the Changjiang. Ph.D. Thesis, Hohai Univ. Nanjing, China (in Chinese, with English Abstr.) , 2007.

Liu, J.P., Xu, K.H., Li, A.C., Milliman, J.D., Velozzi, D.M., Xiao, S.B., Yang, Z.S.: Flux and fate of Yangtze River



- sediment delivered to the East China Sea. *Geomorphology*, 85, 208-224, 2007.
- Lu, X.X., Ashmore, P., Wang, J.: Sediment yield mapping in a large river basin: the Upper Yangtze, China. *Environ. Modelling & Software*, 18, 339-353, 2003.
- Mann, H.B.: Nonparametric tests against trend. *Econometrica*, 13, 245-259, 1945.
- Milliman, J.D., Farnsworth, K.L.: *River Discharge to the Coastal Ocean: A Global Synthesis*. Cambridge Univ. Press, Cambridge, 2011.
- Milliman, J.D., Shen, H.T., Yang, Z.S., Meade, R.H.: Transport and deposition of river sediment in the Changjiang Estuary and adjacent continental-shelf. *Cont. Shelf Res.*, 4(1-2), 37-45, 1985.
- Milliman, J.D.: Blessed dams or damned dams? *Nat.*, 388, 325-326, 1997.
- Ministry of Water Conservancy and Electric Power, P. R. C.: *Handbook for Hydrological Survey (Vol. 1-3)*. Water Conservancy and Electric Power Press, Beijing (in Chinese) , 1975.
- Ministry of Water Conservancy and Electric Power, P. R. C.: *National Standards for Hydrological Survey, (Vol. 1-3)*. China Industry Press, Beijing, 1962 (in Chinese).
- MWRC (Ministry of Water Resources, China): *The code for China Reservoir name*, Chinese Water Conservancy and Hydroelectric Press, Beijing , 2001 (In Chinese).
- ~~Saito, Y., Yang, Z.S., Hori, K.: The Huanghe (Yellow River) and Changjiang (Yangtze River) deltas: a review on their characteristics, evolution and sediment discharge during the Holocene. *Geomorphology*, 41, 219-231, 2001.~~
- Serrano, V.L., Mateos, V.L., Garcí'a, J.A.: Trend analysis of monthly precipitation over the Iberian Peninsula for the period 1921-1995. *Phys. Chem. Earth B*, 24(2), 85-90, 1999.
- Shankman, D., Heim, B.D., Song, J.: Flood frequency in China's Poyang Lake region: trends and teleconnections. *Int. J. Climatol.*, 26, 1255-1266, 2006.

- Shi, C.X.: Scaling effects on sediment yield in the upper Yangtze River: *Geogr. Res.* 27(4), 800-811, 2008 (in Chinese, with English Abstr.).
- Syvitski, J.P.M., Saito, Y.: Morphodynamics of deltas under the influence of humans. *Global Planet. Change*, 57 (3-4), 261-282, 2007.
- Syvitski, J.P.M., Vörösmarty, C., Kettner, A.J., Green, P.: Impact of humans on the flux of terrestrial sediment to the global coastal ocean. *Sci.*, 308, 376-380, 2005.
- Syvitski, J.P.M.: Supply and flux of sediment along hydrological pathways: research for the 21st century. *Global Planet. Change*, 39, 1-11, 2003.
- Vörösmarty, C.J., Meybeck, M., Fekete, B., Sharma, K., Green, P., Syvitski, J.P.M.: Anthropogenic sediment retention: Major global impact from registered river impoundments. *Global Planet. Change*, 39, 169-190, 2003.
- Walling, D.E.: Human impact on land–ocean sediment transfer by the world's rivers. *Geomorphology*, 79, 192-216, 2006.
- Wang, Z.Y., Li, Y.T., He, Y.P.: Sediment budget of the Yangtze River. *Water Resour. Res.*, 43, W04401. doi:10.1029/2006WR005012, 2007.
- Xu, J.X.: Variation in grain size of suspended load in upper Changjiang River and its tributaries by human activities. *J. Sediment Res.*, 3, 8-16, 2005 (in Chinese, with English Abstr.).
- Yang, S.L., Milliman, J.D., Li, P., Xu, K.: 50,000 dams later: Erosion of the Yangtze River and its delta. *Global Planet. Change*, 75(1), 14-20, 2011.
- Yang, S.L., Zhao, Q.Y., Belkin, I.M.: Temporal variation in the sediment load of the Yangtze River and the influences of human activities. *J. Hydrol.*, 263(1-4), 56-71, 2002.
- Yang, Z.S.: Soil erosion under different landuse types and zones of Jinsha River Basin in Yunnan Province, China.

J. Moun. Sci., 1(1), 46-56 (in Chinese, with English Abstr.) , 2004.

Yin, H.F., Liu, G.R., Pi, J.G., Chen, G.J., Li, C.G.: On the river-lake relationship of the middle Yangtze reaches.

Geomorphology, 85, 197-207, 2007.

Zhang, X., Wen, A.: Current changes of sediment yields in the upper Yangtze River and its two biggest tributaries,

China. Global Planet. Change, 41(3), 221-227, 2004.