

HESS-2014-278 - Review response (14 February 2015)

Note for editor:

Thank you for taking the time to assess our paper. As previously, we have addressed all comments by both reviewers. We note that only minor typographical corrections were requested by Referee #1 (R. Romanowicz), who is satisfied that the manuscript is improved sufficiently and is now at a “good” standard in terms of scientific significance and quality, and presentational quality. Referee #2 (anonymous) requested more clarifications corrections – we have been through and addressed each of these in turn.

There appears to be some general disagreement surrounding the transferability of the work presented in the paper – in the initial review round, Romanowicz requested (supported in the editorial summary) that the transferability to other rivers worldwide be explored. Following these suggestions, we added substantial discussion to section 4.4 (Implications for SWOT) and produced a new figure (15), which uses equation 6 (estimated error in Q given slope) to illustrate the likely implications on discharge for rivers worldwide for which published values of width and slope are available. Although this paper presents a case-study, we feel that these additions have substantially increased the significance of the work as presented. The paper represents early research into the hydraulic implications of SWOT measurements but, clearly, much more work is required – particularly once SWOT is launched. This will be a good reference point for this work.

Referee #2 appears to disagree with this. In response to his/her comments, we have now placed greater emphasis on the caveats regarding interpretation of error calculations in relation to other rivers: in particular, we state “note that other sources of error are excluded but may be significant; without full assessment of each river, figures should be used with caution” and “further work is required for a range of additional rivers with a variety of characteristics, particularly those with a high spatial and temporal variability in surface water slope and channel discharge”. We feel that these emphasised caveats are sufficient to lead readers to a balanced interpretation of the results presented in relation to other rivers.

The second issue of note is with regard the errors in surface water elevation and the use of averaging which, according to Referee #2, leads to fairly obvious conclusion regarding the reduction in error. However, there appears to be some misinterpretation by the Referee, perhaps because the presentation in the paper could have been clearer. It is important to note that 2D spatially-correlated errors were included (including long-wave length errors caused by issues such as satellite roll) – to these were added spatially random “noise” errors. The cross-sectional averaging will only deal with the latter with any reliability (and it assumes no bias, as stated). It is not clear whether cross-section averaging would lead to reduced overall error, as may be expected – but we have shown in this case that it does. We have added clarifications regarding this issue and again note that further work is required for other rivers.

All the other issues raised are relatively minor clarifications, which we have addressed in full.

Sincerely,

M. Wilson on behalf of all coauthors.

Referee #1: Renata Romanowicz (Report #2: Submitted on 28 Dec 2014)

Comments and responses:

The authors have addressed all my comments in a satisfactory manner. Some technical corrections are required in the newly added text. It has been written in a rather sloppy way. For example, in the line 727 should be ... the subject of other ..., in line 729 should be ... measurements in a, line 735 should be ...and obtained an effective ...

- Thank you for your comments. We are happy to see that we have addressed your previous concerns satisfactorily – we feel that the manuscript has improved considerably as a result and we note also that you have now rated the scientific significance, scientific quality and presentation quality as good.
- Regarding the technical corrections noted here – thank you for picking these up. We have been through all newly added text again to correct these. Specifically for these examples given: line 727 is corrected to “are the subject of other” (“of” added); line 729 – changed “into” to “in”; line 735 – corrected “and” to “an”.

Anonymous Referee #2 (Report #1: Submitted on 18 Dec 2014)

Comments and responses:

Paper was improved concerning clarity but some recommendations were not followed or fully applied. The conclusions are only for the two rivers they show and cannot be generalized. On these two rivers, the authors should provide more details in order that the readers can understand their method and finally share the results.

- Thank you for your additional comments – they have helped to greatly improve the manuscript. We tried to incorporate all previous suggestions, in conjunction with the suggestions from the other reviewer and editor. This necessitates a balancing act which may not always be satisfactory. However, we have continued to adjust the manuscript in line with your suggestions here.
- Regarding generalization of the conclusions: we disagree that our results are not transferable to other rivers, with some caveats which are already clearly stated. Results are most transferable to large, lowland rivers (which generally have low spatial and temporal variability) – this is stated at the end of the conclusions with a note concerning the need for additional work on rivers with high spatial and temporal variability. Referee #1 requested an assessment of the likely transferability of results to other rivers and, accordingly, we used published widths and slopes to provide an initial assessment for a range of rivers (based on Eq. 6, which characterizes error in discharge) – but, we state clearly “Note that other sources of error are excluded but may be significant” (caption, Figure 15). To this we now add: “without full assessment of each river, figures should be used with caution”. Thus, we present an initial characterization of the likely errors in discharge estimates

resulting directly from SWOT measurements of surface water for two challenging rivers – but state clearly the need for additional work regarding other errors. We feel that the caveats we state are sufficient to lead readers to a balanced interpretation of the results presented in relation to other rivers.

- Regarding the details of the rivers: in section 2.1 (“Virtual mission”), details of the mainstem Amazon river (Solimões) are provided, but details of the Purus were missing. We have adjusted this section accordingly and incorporate additional details:

“In the study site, peak channel discharge of the Amazon is around 120,000 m³/s, and the channel width varies between approximately 2 and 5 km. Close to its confluence with the Amazon, the Purus is characterized by extremely low water surface slopes (less than 1 cm/km) and substantial backwater effects from the main channel. Peak channel discharge is around 18,000 m³/s, with channel width varying between 0.6 and 1.7 km.”

Figure 2 explains the steps followed by the authors but some details are still missing or not clear.

- This figure was included following the suggestion of Referee #1 and is a schematic overview of the methods/ processing used, to aid readers follow the descriptions in the text and with the notation used. All steps are included in this figure, but it is not possible to include all details of methods. Where additional details were requested in this review, these have been added to the main text.

In the introduction, one paragraph was added about discharge estimates techniques: this paragraph contains some statements that can be discussed and is rather confusing and out of the scope. For instance, the high discharges (when floodplains are flooded) are poorly estimated using rating curves but the paper does not deal with these high discharges (same for vegetated channels ou very unsteady flows). I think that, for flows inside one single channel, gauging stations (if adequately monitored) can be accurate. So, I propose to cancel this paragraph or completely change it.

- This paragraph was added in response to the editor’s request to “discuss the domains and limit of application of the new method in comparison to classical ones”. It is not out of scope, since the paper is about discharge estimation and rating curves can be considered the “classical” approach. It is followed by the introduction to the use of remote sensing to obtain discharge estimates. We have adjusted the paragraph to acknowledge the poor estimation of flow using rating curves during out of bank flow. The issues of unsteady flows/ vegetated channels is already mentioned. We have included a mention of the high accuracy possible in single, simple channels.

Page 2 line 164-165: river gauges are not one dimensional: they refer either to one point or to one cross section.

- They are usually *spatially* one-dimensional (either at one point or representing a full channel cross-section) – no variability across or along channel is included. The text has been modified with this clarification.

Page 5 line 305: the word « rectangular » should be added in front of channel cross sections. It explains why the channel depth inside one cross section is single.

- Corrected

Page 5 lines 325-334: I cannot understand if across the channel, the water elevation was kept constant or not. In other words, how was performed the interpolation to a the 2-D grid ? This point should be linked to the averaging over one cross section in order to obtain the values [SWOT XS]. Without noise, are we exactly obtaining the same initial 1D value?

- Yes, it was kept constant, except where cross-sections coincided (in which case, the mean was taken). A nearest-neighbor approach was then used for interpolation. Without noise, the value obtained from a cross-section would be exactly the same as the 1D value for situations where cross-sections do not overlap (i.e. straight sections of channel); where cross-sections overlap, there will be small differences in the value obtained. The paragraph has been modified to make the procedure used clearer:

“1D channel water elevations were first mapped onto channel cross-sections perpendicular to the channel centerline. Across each cross-section, the elevation value of the channel center was maintained; however, where two or more cross-sections coincided (within 100 m), the arithmetic mean of each was used. The resulting set of cross-sections were then interpolated onto a 2D regular grid using a nearest-neighbor method at a spatial resolution of 100 m”

Another connected point is the added random noise. Because of resampling, the structure fo the noise along a cross section is not clear particularly if the length of this cross section is about 500 m. To be perfectly clear, more explanation and eventually examples of applications should be provided. (figure 7 should be one of these examples but the figure is particularly unclear, details did not really appear and what means “cycle 18 overpass 6”). Moreover, the question of the future real structure of the error for SWAT remains open (but out of the scope of the paper of course)

- Structure of noise along a cross-section: we are not certain how or why this is not clear. As stated the total error variance as applied was correct (i.e. matching the SWOT design requirements error spectrum). From the resulting SWOT images of water elevation, cross-sections were taken across the full channel width – the underlying resolution of these cross sections was determined by the image resolution (i.e. 100 m). The mean elevation value was then calculated to reduce the error.

- To aid clarity, an example cross-section has been added to Figure 7 (a)
- To clarify issues of what cycles/ overpasses refer to, the following sentence has been added to Section 4.1 (penultimate paragraph):

“Over the 22-month simulation period, there were a total of 29 orbit cycles (of 22 days each and including 6 overpasses of the domain – see Fig. 3a) providing, in total, 174 images of $h_{[SWOT\ OBS]}$.”

The caption for Figure 6 has also been adjusted to make it clearer what “cycle 18 overpass 6” means in the following, connected figure: “...for cycle 18 (at high water), for each of the 6 overpasses during the 22 day cycle”

Page 6, lines 428-438: the reach-length discharge is calculated from eq.5 but w and y are not fully defined: what are the channel width and the river depth of one reach ? I can propose several answers but the paper is mute about that.

- Good point – this is not calculation at a single location, which is one of the problems with remotely sensed methods of discharge estimation (although SWOT will reduce the length of the reach lengths required). Although equation 5 is directly from LeFavour and Alsdorf (2005), we have clarified that:
“w is the reach-averaged channel width, y is the reach-averaged river depth and S is the overall water surface slope”

Page 6 line 454 : a percentage error calculation. I understand the average of the absolute value of the difference of discharges divided by the mean discharge provided as percentage. Is it exact? If it is exact, in table 2, the values of discharges in m3/s and the % do not agree. An equation (same as for E) would have been clearer.

- Tables 1 and 2 are not directly comparable, since Table 1 gives model discharge summaries along channel at high and low water, whereas Table 2 provides average errors calculated from SWOT estimates of discharge vs. $h_{[true]}$ estimates of discharge, at all locations for all overpasses. Therefore, you cannot use the reach-length discharges in Table 1 to calculate the % error based from discharge RMS error.
- Percentages using the RMS error in hydrographs (as presented in Figure 12) divided by the mean discharge calculated from $h_{[true]}$ images (i.e. at the same spatio-temporal sampling, but without the addition of error). This is the coefficient of variation of the RMSE.
- We agree that this could have been more clearly presented and we have expanded the description in Section 3.4. As suggested, we have now included equations.

Page 7 line 545 : « assuming no bias » was added. I think it should be clarified to what the authors refer.

- Modified to “assuming no bias in the estimation of water surface elevation”

More over, the conclusion seems obvious : if we have several estimates, the average will be a better estimate than only one value if the error is randomly distributed. Here, this question is related to the structure of the noise.

- Generally, yes, given random errors it is clear that averaging will lead to a better estimate, assuming no bias. However, in this paper we are dealing with spatially-correlated errors, so it is not that straightforward – averaging won’t necessarily translate into a better estimate, depending on the underlying correlation lengths of the error vs. the length of averaging. In the conclusions we have added the following note:

“It should be noted that the errors added to water surfaces to simulate SWOT measurements of water elevation were spatially-correlated at multiple scales (according to the SWOT design requirements error spectrum and incorporating long-wavelength errors for each orbit), with added random noise on a per-pixel basis. While averaging along cross-sections will effectively reduce the random noise component (assuming no bias), it was not immediately apparent how spatially-correlated error would affect the estimation of discharge. Results here indicate that, at this scale, these errors do not greatly impact discharge accuracy - although similar assessments of other rivers is needed.”

We also added the following notes:

Section 3.2 (on obtaining SWOT observations): “We thereby obtained water surface elevation measurements for the Amazon mainstem as may be observed by SWOT, incorporating both spatially-correlated and spatially-random errors.”

Section 3.3 (on calculation of slope and discharge): “Note that, while this [cross-section averaging] may effectively reduce the random errors present, due to the inclusion of spatially-correlated errors in the SWOT water elevations, this process may not necessarily lead to an improved estimate of discharge.”

The implication for discharge estimation and how it relates to channel width and surface water slope is not obvious. We also compare the reach length estimates to the instantaneous channel discharge at a cross-section (directly from the model) (Figure 14) and illustrate up to around 18% error, resulting primarily from reach-length averaging.

Page 9 line 568: the SWOT requirements were calculated with the same method used by the authors: thus, the agreement between both is not surprising and cannot be considered as a result of the authors’ work.

- The statement is included for comparison and to illustrate the improvement gained through cross-section averaging. To make the distinction clear, “As expected from the methods used” has been added to the start of the statement of slope result without cross-section averaging.

Page 12: the difference between $Q[TRUE]$ and $Q[MODEL]$ is (maybe) linked to the use of LISFLOOD and the structure of the one 1-D model. Then, the percentages should be put forward with caution.

- Agreed, given we don't actually know the truth and can only estimate it, even our best attempt will unlikely match reality exactly – but, of course, we can never know. The following caveat has been added:

“However, the figures should be used with caution since errors may also be related to the structure of the 1D hydraulic model rather than resulting from differences with the true channel discharge at a location”.

The general point remains though – by averaging along a reach, discharge at a cross-section becomes increasingly approximate.

Pages 13 and 14: I cannot understand how the percentage error shown in Figure 15 is obtained. Without a clear explanation, the added paragraphs should be cancelled.

- See notes above.

Page 15 lines 810-811: the results are not directly transferable. The reasons to extend the authors' results to other large lowland rivers should be provided.

- This is a matter of debate, although you are correct that we do not know this for certain. The sentence has been removed. We already addressed reasons for extending the work to other rivers – this provides additional scope for readers, although figures are provided with caution (quite rightly) and additional work is needed to assess them.

Swath altimetry measurements of the mainstem Amazon River: measurement errors and hydraulic implications

M.D. Wilson¹, M. Durand², H.C. Jung³, and D. Alsdorf²

¹Department of Geography, University of the West Indies, St. Augustine, Trinidad & Tobago

²Byrd Polar Research Center and School of Earth Sciences, Ohio State University, 125 S Oval Mall, Columbus, OH 43210, United States

³Hydrological Sciences Laboratory, NASA Goddard Space Flight Center, 8800 Greenbelt Rd, Greenbelt, MD 20771, United States

Correspondence to: M.D. Wilson (matthew.wilson@sta.uwi.edu)

Abstract. The Surface Water and Ocean Topography (SWOT) mission, scheduled for launch in 2020, will provide a step-change improvement in the measurement of terrestrial surface water storage and dynamics. In particular, it will provide the first, routine two-dimensional measurements of water surface elevations. In this paper, we aimed to (i) characterize and illustrate in two-dimensions the errors which may be found in SWOT swath measurements of terrestrial surface water, (ii) simulate the spatio-temporal sampling scheme of SWOT for the Amazon, and (iii) assess the impact of each of these on estimates of water surface slope and river discharge which may be obtained from SWOT imagery. We based our analysis on a “virtual mission” for a ~260 km reach of the central Amazon (Solimões) River, using a hydraulic model to provide water surface elevations according to SWOT spatio-temporal sampling to which errors were added based on a two-dimension height error spectrum derived from the SWOT design requirements. We thereby obtained water surface elevation measurements for the Amazon mainstem as may be observed by SWOT. Using these measurements, we derived estimates of river slope and discharge and compared them to those obtained directly from the hydraulic model. We found that cross-channel and along-reach averaging of SWOT measurements using reach lengths of greater than 4 km for the Solimões and 7.5 km for Purus reduced the effect of systematic height errors, enabling discharge to be reproduced accurately from the water height, assuming known bathymetry and friction. Using cross-section averaging and 20 km reach lengths, results show Nash-Sutcliffe model efficiency values of 0.99 for the Solimões and 0.88 for the Purus, with 2.6% and 19.1% average overall error in discharge, respectively. We extend the re-

sults to other rivers worldwide and infer that SWOT-derived discharge estimates may be more accurate for rivers with larger channel widths (permitting a greater level of cross-section averaging and the use of shorter reach lengths) and higher water surface slopes (reducing the proportional impact of slope errors on discharge calculation).

1 Introduction

The hydrological cycle is of fundamental importance to life and society and river gauges have long formed a basis our hydrological understanding, often providing real-time measurement capabilities of river stage or discharge and information for water management and flood warning. Yet existing in-situ gauge networks are unevenly distributed globally, with a distinct lack of measurements obtained in developing countries, particularly for areas with low population (Vorosmarty et al., 2001; Shiklomanov et al., 2002). In addition, gauging stations are highly variable in their accuracy and are under threat. The United States has around 7,000 stream gauges but, even so, more than 20% of basins are not gauged adequately (USGS, 1998), contributing to an insufficient knowledge of available national water resources (NSTC, 2004).

Over the latter half of the 20th century, increasing numbers of gauging stations in the United States with 30 or more years of record were discontinued each year; in the mid-1990s, this represented about 4% of the long-record stations being discontinued (USGS, 1998). The situation globally is substantially worse than in the United States, with much of the globally significant discharge occurring in sparsely gauged catchments (Alsdorf et al., 2003). The gauge density in the

Amazon, expressed as number of gauges per unit discharge, is around 4 orders of magnitude less than what is typical in the eastern United States (Alsdorf et al., 2007b). World-
 65 worldwide, Fekete and Vörösmarty (2007) indicate that the amount
 of data available through the Global Runoff Data Centre
 (GRDC) is in sharp decline, and now stands at less than 600
 discharge monitoring stations, down from a peak of around
 5,000 in 1980.

70 In order to obtain estimates of discharge from gauge
 measurements of river stage, a rating curve is usually con-
 structed for each station. This relates observed water level
 to discharge estimated from flow measurements and river
 cross-sectional area collected previously across the chan-
 75 nel for a range of different stages. ~~Rating curves~~ While
flows inside simple channels may be estimated accurately
using rating curves, they are widely acknowledged to be
 a limited method to estimate discharge (e.g. Clarke et al.,
 2000; Domeneghetti et al., 2012) ~~since they include errors~~
 80 , particularly during periods of flooding where out-of-bank
flow is poorly represented. Sources of error include (i)
inaccuracies in measurements of river flow and stage used
 in rating curve construction, ~~errors resulting from (ii)~~ the
 necessary interpolation or extrapolation of the rating curve
 85 to the measured stage, and ~~errors from any (iii)~~ unsteady
 flow conditions or seasonal variations in roughness through
 changes to vegetation or other conditions (Di Baldassarre
 and Montanari, 2009). Improvements to discharge measure-
 ments in rating curve construction are now possible using
 90 Acoustic Doppler Current Profiler (ADCP) (for exam-
 ple, see Oberg and Mueller, 2007), ~~however,~~ However,
 the primary challenge remains: multiple measurements are
 required throughout the hydrograph in order to obtain ac-
 curate estimates, which may be expensive, time-consuming
 95 or impractical, particularly for remote sites. ~~High~~ In
particular, high discharge during flood events ~~, in particular,~~
 may be poorly estimated ~~, due to errors in extrapolation~~
(Di Baldassarre and Claps, 2010) resulting from rating curve
extrapolation (Di Baldassarre and Claps, 2010), which is
 100 necessary due to limited opportunities or the increased
 difficulty and hazard of obtaining measurements during high
 flows.

Remote sensing has been shown to be a valuable addi-
 tion to ground-based gauges, with the added benefit of being
 105 able to reduce data access issues in international river basins,
 which contribute to greater than 50% of global surface flows
 (Wolf et al., 1999) and where obtaining information about
 upstream flows can be politically challenging (e.g. Hossain
 et al., 2007). Satellite altimetry, in particular, has been used
 110 extensively to obtain water elevations of inland river and lake
 systems, including data from ERS, TOPEX/POSEIDON, En-
 visat and Jason 1 and 2 (e.g. Berry et al., 2005; Birkett, 1998).
 For example, Birkett et al. (2002) used TOPEX/POSEIDON
 altimetry data to analyze surface water dynamics along the
 115 Amazon River and characterized the spatially and tempo-
 rally variable surface-water gradient as between 1.5 cm/km

downstream to 4.0 cm/km upstream. Satellite altimetry has
 also been used to estimate river discharge. Birkinshaw et al.
 (2012) estimated discharge for the Mekong and Ob Rivers
 using ENVISAT altimetry over 50 km river reaches, based
 on the Manning's resistance formulation of Bjerklie et al.
 (2003), and were able to obtain Nash-Sutcliffe efficiency
 values of 0.86 to 0.90. Papa et al. (2012) used Jason-2 al-
 timetry data to estimate flux from the Ganga-Brahmaputra
 Rivers, based on in-situ rating curves relating water-elevation
 to discharge, and obtained errors of 6.5% and 13% for the
 Brahmaputra and Ganga rivers, respectively.

A limitation of profiling satellite altimetry for the analy-
 sis of river hydrology is that the nadir viewing geometry and
 narrow field of view leads to an incomplete coverage and a
 long revisit time. Currently operational satellite altimeters in-
 clude the Ocean Surface Topography Mission (OSTM) on
 the Jason-2 platform (Lambin et al., 2010) which, as with
 its predecessors Jason-1 and Topex/Poseidon, has an orbital
 repeat-time of around 10 days and a ground track spacing of
 315 km at the equator (Seyler et al., 2013). For rivers in the
 Amazon basin, the OSTM altimeter has been found by Seyler
 et al. (2013) to have a mean Root Mean Square (~~RMS~~-~~error~~
 110 Error (RMSE) of ± 0.31 m for rivers over 400 m wide. Us-
 ing two parallel tracks to calculate water-surface slope, as
 is needed for the estimation of instantaneous discharge in the
 absence of in-situ rating curves, this ~~RMS-error~~ RMSE
 would lead to a maximum water-surface slope error of around 2 mm
 per kilometer (calculated using $2 \times 0.31 \text{ m} / 315 \text{ km}$). How-
 ever, this represents an average slope over a large river dis-
 tance and does not reflect the likely spatial variability or cur-
 vature in the water-surface due to a coarse spatial resolution.
 Although ascending and descending tracks may be combined
 to represent better this variability, errors in the estimate of
 water-surface slope and, hence, discharge would increase. In
 addition, to calculate water-surface slope, temporal interpo-
 lation of data in different tracks is needed, increasing errors
 particularly for smaller rivers with higher temporal variabil-
 ity or during periods of highly variable flow, such as flood
 events.

These limitations mean that, for the majority of rivers,
 satellite altimetry does not provide sufficient detail to cap-
 ture the full spatial or temporal complexity of river hydrology.
 Profiling altimetry was shown by Alsdorf et al. (2007b)
 to miss entirely 32% of rivers in a global database, compared
 to only 1% of rivers being missed by an imager (based on the
 Terra 16-day repeat cycle, 120 km swath, $\sim 98^\circ$ inclination
 and sun-synchronous orbit).

In common with river gauges, measurements obtained
 by profiling altimetry are usually spatially one-dimensional
 115 (i.e. they are either at one point or represent a full channel
cross-section), meaning that no information on water sur-
 face area or two-dimensional patterns in water surface slope
 are provided. However, Synthetic Aperture Radar (SAR) in-
 terferometry work by Alsdorf et al. (2007a) has shown that
 water flow is both spatially and temporally complex, requir-

ing two-dimensional, multi-temporal measurements to capture sufficiently. This means that our current, operational remote sensing has a limited capability for an important component of the water surface (Alsdorf et al., 2007b). Remote sensing has been used with some success to characterize hydraulic variables including surface water area and elevation, water slope and temporal changes. However, none of the existing technologies are able to provide each commensurately, as needed to model accurately the water cycle (Alsdorf et al., 2007b).

The forthcoming Surface Water and Ocean Topography (SWOT) mission (Durand et al., 2010) aims to overcome existing limitations in remote sensing by using a swath-altimetry approach to measure surface water elevation in two-dimensions, providing both surface water area and elevation simultaneously. Such measurements may allow water surface slopes to be derived instantaneously and, therefore, potentially could provide estimates of river and floodplain discharge. The main objective of the work presented in this paper was to investigate the hydraulic implications of potential measurement errors in SWOT imagery (independently to other potential errors) for a reach of the mainstem Amazon River and one of its tributaries.

2 The Surface Water and Ocean Topography mission

Recommended for launch by the National Research Council Decadal Survey (NRC, 2007), SWOT will provide a substantial improvement in the availability of data on terrestrial surface water storage and dynamics, achieving near-global water elevation measurements in large rivers and their large floodplains. The SWOT sensor is a Ka-band radar interferometer which will allow mapping of surface water extent and elevation at a spatial resolution of around 70–250 m, at centimetric vertical precision when averaged over targets of interest, every 2–11 days depending on the latitude (Durand et al., 2010; Rodríguez, 2014). Thus, SWOT will provide the first, routine two-dimensional measurements of water surface elevation, allowing the analysis of floodplain hydrodynamics and the estimation of river discharge. While SWOT will not replace a ground-based river gauge network, it will allow large ungauged rivers to be sampled and increase the level of detail and availability in river flow estimates. In addition, the two-dimensional measurements of surface water provided by SWOT will allow the detailed observation of floodplain and wetland hydrodynamics (Durand et al., 2010).

The approach used by SWOT is similar to that of LeFavour and Alsdorf (2005) and Kiel et al. (2006), who used Shuttle Radar Topography Mission (SRTM) elevation data of the water surface to obtain slopes of the Amazon and Ohio rivers and, subsequently, to estimate channel discharge. However, for the Amazon, LeFavour and Alsdorf (2005) found vertical errors 5.51 m in water surface elevations from C-band SRTM data, meaning that a long reach length of 733 km

was required to reduce errors in derived water surface slopes to 1.5 cm/km for the accurate estimation of channel discharge (6.2% error at Manacapuru; 7.6% at Itapeua). For SWOT, the science requirements are for a vertical precision of 10 cm in measurements of water surface elevation and derived water surface slopes with errors of no more than 1 cm/km when averaged over a 10 km reach length (Rodríguez, 2014). For comparison, using the simple method of LeFavour and Alsdorf (2005) to determine an appropriate reach length ($2\sigma/S_{\min}$, where σ denotes the vertical precision of the measurements and S_{\min} denotes the minimum slope required), indicates that, using the SWOT vertical precision of 10 cm, to achieve water surface slope errors of no more than 1 cm/km, reach lengths of 20 km may be required; for 1.5 cm/km, reach lengths of 13.3 km. However, this simple method may be overly conservative and does not take into account the potential for averaging over channel cross-sections. In this paper, we explore the implications of the SWOT science-requirements on the derivation of water surface slope and subsequent estimation of channel discharge.

2.1 Virtual mission

We used a “virtual mission” study of two-dimensional observations of water surface elevation as may be obtained by SWOT, for the estimation of discharge on a ~260 km reach of the central Amazon River (Solimões) and one of its tributaries (Purus) in Brazil (Fig. 1a). The Amazon is a globally significant river, carrying around 20% of total global continental runoff (Richey et al., 1989) with a monomodal flood pulse passing annually down the river. The middle reaches of the Amazon are characterized by very low water surface slopes of between 1 and 3 cm/km and significant backwater effects (Meade et al., 1991), ~~with peak channel flow in the study site. In the study site, peak channel discharge of the Amazon is around 120,000 m³/s. This, and the channel width varies between approximately 2 and 5 km. Close to its confluence with the Amazon, the Purus is characterized by extremely low water surface slopes (less than 1 cm/km) and substantial backwater effects from the main channel. Peak channel discharge is around 18,000 m³/s, with channel width varying between 0.6 and 1.7 km.~~

The combination of low water surface slope combined with high discharge in these rivers makes the estimation of discharge from SWOT challenging since surface water slope errors may have a proportionately large impact. Here, we assessed the likely accuracy which may be possible, assuming knowledge of other factors such as channel geometry. Specifically, we aimed to: (i) characterize and illustrate in two-dimensions the errors which may be found in SWOT swath altimetry measurements of terrestrial surface water; (ii) simulate the spatio-temporal sampling scheme of SWOT for the Amazon; and (iii) assess the impact of each on estimates of water surface slope and river discharge which may be obtained from SWOT imagery. Note that, presently, the per-

formance of the SWOT instrument in the case of flooded vegetation is unknown, thus throughout this paper the words “floodplain” and “wetland” reference those conditions of a clear view of the sky without any flooded vegetation.

We utilized the hydrodynamic model of Wilson et al. (2007) and Trigg et al. (2009) for the same reach of the Amazon. We used this model to generate water surface elevation “truth” images for a 22-month period comprising more than a full flood cycle (Fig. 1b-c). These “truth” images were then temporally sampled to match the orbital characteristics of SWOT, and 2D errors as defined by the SWOT design requirements were added. Thus, we obtained estimates of surface water heights as may be observed by SWOT. From both the “truth” images and the simulated SWOT observations, estimates of river slope and discharge were then derived. A schematic summary of the virtual mission and methods used is shown in Fig. 2, with details provided in the following section.

3 Methods

3.1 Generation of water surface “truth” images from hydrodynamic modeling

In order to generate water elevation “truth” images, the hydrodynamic model code LISFLOOD-FP (Bates and De Roo, 2000) was used. LISFLOOD-FP consists of a 1D representation of the river channel which comprises of a series of channel cross-sections and a 2D floodplain representation. The formulation of LISFLOOD-FP used here was the one-dimensional diffusive wave formulation of Trigg et al. (2009) for channel flow (floodplain flow was excluded), allowing complex channel bathymetry and back propagation of flow. A detailed series of rectangular channel cross-sections were used (124 for the Solimões and 48 for the Purus), with an average along-channel spacing of 2.4 km and each representing the average bed-elevation for that location. Channel flow was implemented in the form:

$$\frac{\partial Q}{\partial x} + \frac{\partial A}{\partial t} = q \quad (1)$$

$$S_0 - \frac{n^2 P^{4/3} Q^2}{A^{10/3}} - \left[\frac{\partial y}{\partial x} \right] = 0 \quad (2)$$

where Q is the volumetric flow rate in the channel, A the cross-sectional area of the flow, P is the wetted perimeter (approximated by channel width), n is the Manning friction coefficient, S_0 is the channel bed slope, q is the lateral flow into and out of the channel, y is the channel depth, x is the distance along the river and t is time (Trigg et al., 2009). Note that S_0 is written here so as to be greater than zero in the usual case where the bed elevation decreases in the

downstream direction. The diffusion term, $[\partial y / \partial x]$, allows channel flow to respond to both the channel bed slope and the water surface slope. This diffusive wave approximation of the full 1D Saint Venant equations is solved using an implicit Newton-Raphson scheme.

In order to create “truth” images of water surface elevation ($h_{\text{[TRUE]}}$), 1D channel water elevations were first mapped onto channel cross-sections perpendicular to the channel centerline. Across each cross-section, the elevation value of the channel center was maintained; however, where two or more cross-sections coincided (within 100 m), the arithmetic mean of each was used. The resulting set of cross-sections were then interpolated onto a 2D regular grid using a nearest-neighbor method at a spatial resolution of 100 m. This was selected to approximately match the design requirements of SWOT as specified by Rodríguez (2014), although resolution will vary across the swath. While this method excluded potential minor cross-channel variation in water surface elevation, variation along-channel was incorporated fully, including any backwater effects.

Upstream boundary conditions (channel discharge) for the Solimões (Fig. 1b) and Purus (Fig. 1c) were derived from rating curves and river stage measurements at in-situ gauges at Itapeua and Aruma (Fig. 1a), respectively, using data provided by the Agência Nacional de Águas (ANA), Brazil, for the period 1 June 1995 to 31 March 1997. River stage measured at Manacapuru was used as the downstream boundary condition. The model developed allowed the inclusion of a detailed river bathymetry (Fig. 1d), obtained in a field survey by Wilson et al. (2007) and described in detail by Trigg et al. (2009). In the study reach, the Solimões varies in width from around 1.6 km to 5.6 km, with minimum bed elevation between -26.5 and 8.0 m (vertical datum: EGM96); the width of the Purus varies from 0.6 to 1.7 km, with minimum bed elevation between -9.8 and 9.5 m. Friction parameters for the model were obtained through a calibration based on the minimization of ~~RMS error~~ RMSE calculated from river levels from four gauging stations internal to the model domain and model water surface elevation obtained at a temporal resolution of 12 hours (Trigg et al., 2009).

3.2 Obtaining SWOT observations

Water surface elevations obtained from LISFLOOD-FP were used as “truth” onto which SWOT sampling and errors could be added, thereby allowing us to assess their hydraulic implications. Water surfaces were obtained from the model according to the SWOT spatio-temporal sampling scheme from an orbit with 78° inclination, 22 day repeat, 97 km altitude, and 140 km swath width. The reach length was sufficient to be covered by 6 swaths in total in each 22 day cycle (3 ascending, 3 descending), with each ground location being observed 2 or 3 times (Fig. 3a). Since the site is close to the equator, this represents the minimum frequency in sampling which may be obtained by SWOT.

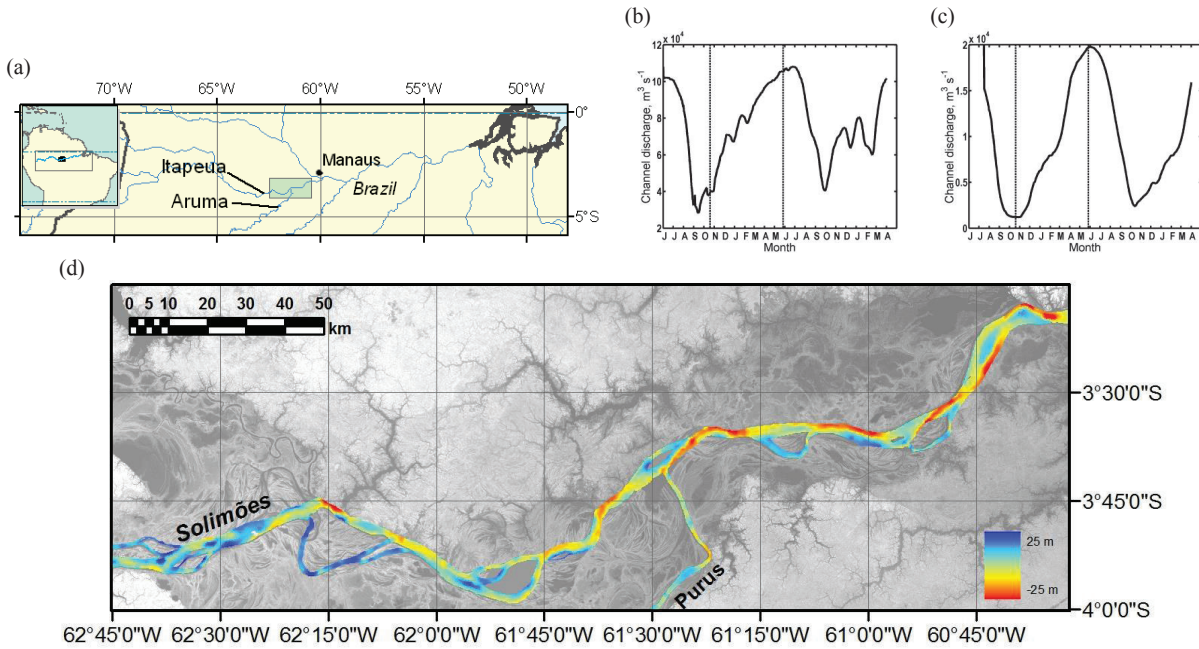


Figure 1. Study area: (a) location of site in the central Amazon, Brazil; (b) Solimões and (c) Purus inflow hydrographs; and (d) SRTM elevation fused with river bathymetry used in the hydraulic model.

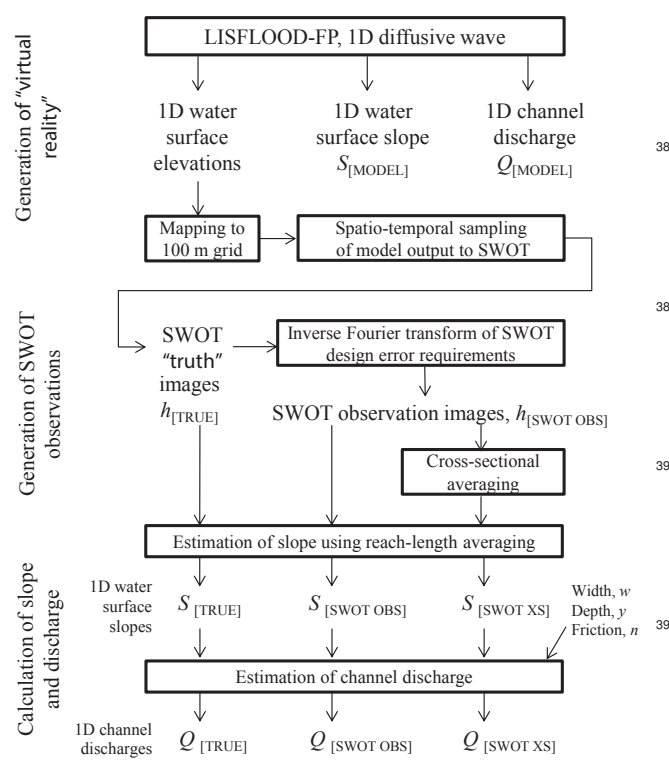


Figure 2. Schematic diagram of the methods used in this paper.

Onto the water surface images, errors were added based on a two-dimension height error spectrum derived from the SWOT design requirements (Fig. 3b). 2D spatially-correlated SWOT errors were generated by inverse Fourier transform of the design requirements error spectrum (Rodríguez, 2014). Separate error fields each at 500 m spatial resolution (resolution limited by computational power) were generated for each overpass in order to include long-wavelength errors. Error fields were then resampled to model resolution (100 m), adding random noise in order to ensure that the total error variance (spectral, integral of the design requirements error spectrum) was correct.

We thereby obtained water surface elevation measurements for the Amazon mainstem as may be observed by SWOT, incorporating both spatially-correlated and spatially-random errors. Using these measurements, we derived estimates of river slope and discharge and compared them to those obtained directly from the hydraulic model. For completeness, we also compared discharge computed directly from the model output, i.e. the water surface slope prior to adding slope errors. This allowed us to characterize the error in water surface slope and discharge estimates from both the SWOT spatio-temporal sampling scheme and from the instrument measurement error.

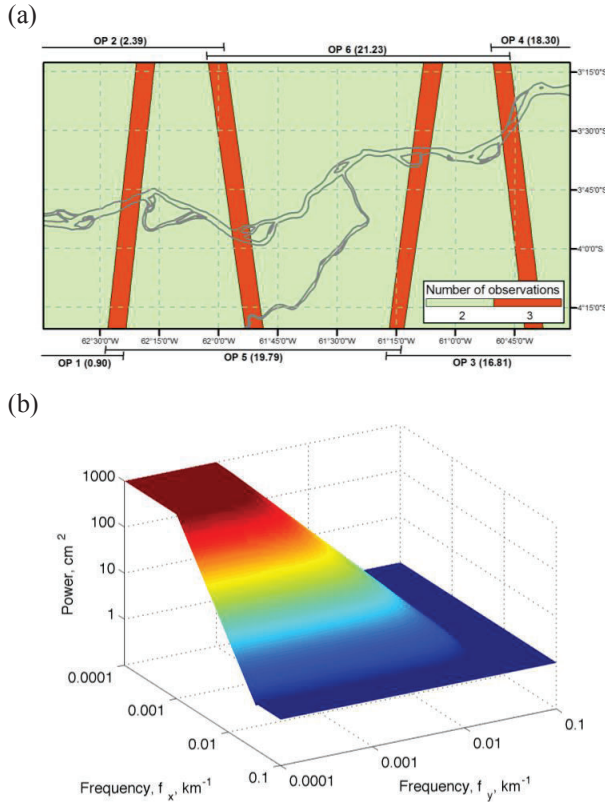


Figure 3. (a) spatio-temporal sampling for a given cycle, including overpass timings (days from cycle start) during each 22-day cycle; (b) 2D SWOT science requirements height error spectrum.

3.3 Calculation of slope and discharge from water surface elevations

Initially, single-pixel SWOT water surface elevation measurements ($h_{[\text{SWOT OBS}]}$) were extracted along the channel centerline and used to calculate water surface slope ($S_{[\text{SWOT OBS}]}$). Note that the water surface slope is mathematically equal to the sum of the bed slope (S_0) and downstream changes in water depth $[\partial y / \partial x]$:

$$S = S_0 - \frac{\partial y}{\partial x} \quad (3)$$

S was derived by along-reach averaging through the fitting of 1D polynomials using least square estimation to moving windows placed on the surface water heights:

$$S = -\frac{\sum xh - k\bar{x}\bar{h}}{\sum x^2 - k\bar{x}^2} \quad (4)$$

where k is the number of data points included in the moving window and x is the distance of the water elevation observation, h , along the channel; the negative sign constrains the slopes to be greater than zero in the usual case

when h is decreasing in the downstream direction. The size of the moving windows used ranged from 0.5 km up to 20 km, with larger windows leading to greater along-channel smoothing of the data. This process was then repeated using cross-section averages of SWOT water elevation measurements ($h_{[\text{SWOT XS}]}$), extracted by taking the arithmetic mean of pixels across-channel in a direction perpendicular to the channel centerline. Note that, while this may effectively reduce the random errors present, due to the inclusion of spatially-correlated errors in the SWOT water elevations, this process may not necessarily lead to an improved estimate of discharge. $S_{[\text{SWOT XS}]}$ was then calculated from $h_{[\text{SWOT XS}]}$ in the same way as $S_{[\text{SWOT OBS}]}$. For comparison and to assess accuracy of derived estimates of Q , true slope ($S_{[\text{TRUE}]}$) was also calculated using water surface elevation “truth” images ($h_{[\text{TRUE}]}$) using Eq. (4).

For each water surface slope ($S_{[\text{SWOT OBS}]}$, $S_{[\text{SWOT XS}]}$, $S_{[\text{TRUE}]}$) at each reach-length, discharge along the length of the channel was derived, following the method of LeFavour and Alsdorf (2005):

$$Q = \frac{1}{n} w y^{5/3} S^{1/2} \quad (5)$$

where w is the reach-averaged channel width, y is the reach-averaged river depth and S is the overall water surface slope. In this paper, we assume that channel friction, width and bed elevation are known. Thus, the focus here is on the impact of errors in observations of water surface elevation and the derived estimates of water surface slope on the estimation of discharge. Errors in Q were approximated using first-order error propagation, via a Taylor series expansion:

$$\sigma_Q \approx \frac{\partial Q}{\partial S} \sigma_S = \frac{1}{2} Q \frac{\sigma_S}{S}. \quad (6)$$

Note that we have here isolated the uncertainty in Q that derives from S . Hydrographs of discharge over time for given points on the channel were then extracted, with the temporal frequency of these determined by the SWOT sampling scheme. Thus, for most locations on the channel, two values of Q were available in each 22-day cycle.

3.4 Accuracy assessment of SWOT derived discharge

In addition to the discharge error approximation (σ_Q) calculated in Eq. (6), hydrographs of channel discharge obtained using along-reach averaging ($Q_{[\text{SWOT OBS}]}$) and with added cross-section averaging ($Q_{[\text{SWOT XS}]}$) were directly compared to hydrographs obtained using the “true” water surface elevation ($Q_{[\text{TRUE}]}$) using a percentage error calculation and the Nash-Sutcliffe model

efficiency coefficient (Nash and Sutcliffe, 1970). RMSE was calculated for each hydrograph using:

$$E_{RMSE} = 1 - \frac{\sum_{t=1}^T (Q_{[TRUE]}^t - Q_{[PRED]}^t)^2}{\sum_{t=1}^T (Q_{[TRUE]}^t - \overline{Q_{[TRUE]}^t})^2} \sqrt{\frac{\sum_{t=1}^T (Q_{[TRUE]}^t - Q_{[PRED]}^t)^2}{T}} \quad (7)$$

where $Q_{[TRUE]}^t$ is the “observed” channel discharge derived from “true” water surface elevations at time t and $Q_{[PRED]}^t$ is channel discharge derived from SWOT observations (either $Q_{[SWOT\ OBS]}$ or $Q_{[SWOT\ XS]}$). Values of E and T is the number of data in the timeseries. RMSE was then expressed as a percentage of mean $Q_{[TRUE]}$:

$$CV_{[RMSE]} = RMSE \cdot (Q_{[TRUE]})^{-1} \quad (8)$$

Finally, the Nash-Sutcliffe model efficiency coefficient (Nash and Sutcliffe, 1970) was calculated using:

$$E = 1 - \frac{\sum_{t=1}^T (Q_{[TRUE]}^t - Q_{[PRED]}^t)^2}{\sum_{t=1}^T (Q_{[TRUE]}^t - \overline{Q_{[TRUE]}^t})^2} \quad (9)$$

where values of E range between $-\infty$ and 1.0, with 1.0 indicating a perfect match between $Q_{[TRUE]}$ and $Q_{[PRED]}$ and values less than zero indicating that the mean of $Q_{[TRUE]}$ is a better predictor of true channel discharge than $Q_{[PRED]}$ (Legates and McCabe, 1999). Generally, values of E between 0.0 and 1.0 are considered as acceptable levels of performance (Moriassi et al., 2007).

4 Results and discussion

4.1 Model output and generation of SWOT images

The LISFLOOD-FP model was run for the full 22-month period between 1 June 1995 and 31 March 1997, taking around 82 hours to complete on a dual-processor compute server. The Manning’s friction coefficient, n , used was 0.032 for the Solimões and 0.034 for the Purus, obtained from model calibration by Trigg et al. (2009). The overall root-mean-square error (RMSE) of the model ranged between 0.1 and 0.9 m (please see Trigg et al., 2009, for details). Model validation consisted of a comparison of model water levels with an independent set of satellite altimetry data, with RMS error (RMSE) found to be 1.26 m and 1.42 m for the Solimões and Purus rivers, respectively (Trigg et al., 2009).

1D channel profiles outputs from the LISFLOOD-FP model are shown in Fig. 4 for low water (September 15,

Table 1. Summary of along-channel variability in modelled water surface slope and channel discharge at low and high water.

	Water level	Minimum	Maximum	Mean	Standard deviation	
Solimões	Slope (cm/km)	Low	0.15	9.57	1.37	1.53
		High	0.69	7.43	2.19	0.95
	Discharge (m ³ /s)	Low	19,765	32,068	26,346	2,137.9
		High	69,918	116,030	99,783	9,372.3
Purus	Slope (cm/km)	Low	-0.12	4.99	0.5	1.02
		High	0.17	3.01	0.52	0.35
	Discharge (m ³ /s)	Low	-2,649	5,314	958	1,276.4
		High	6,665	19,276	13,466	2,958.9

1995) and high water (June 21, 1996), including the water surface elevation, water surface slope and channel discharge, and are summarised in Table 1. There was substantial along-channel variation in water surface slope and channel discharge for the both the Solimões and the Purus at low and high water. This along-channel variability may make the accurate estimation of discharge using reach-averaged estimates of slope a considerably greater challenge.

Fig. 5 indicates water elevation at the upstream and downstream ends of the Solimões and Purus reaches and average water surface slopes throughout the 22-month simulation period. Generally, water surface slope is lowest during the falling limb of the hydrograph and highest during the rising limb. Average water surface slope for the Solimões rose quickly to its maximum level of 2.9 cm/km during the low water period (September to November, 1995), immediately after the river level at the upstream end of the channel started to rise. The maximum water surface slope in the Purus of 1.29 cm/km occurred during the low water period (October, 1995), when backwater effects from the main Solimões channel were less important.

As detailed in Section 3.2, “truth” images of water surface elevation, $h_{[TRUE]}$, were generated from LISFLOOD-FP according to the SWOT spatio-temporal sampling scheme and 2D errors were then added to these according to the 2D SWOT science requirements height error spectrum, providing SWOT images of water surface height observations, $h_{[SWOT\ OBS]}$. Over the 22-month simulation period, there were a total of 29 orbit cycles (of 22 days each and including 6 overpasses of the domain - see Fig. 3a) providing, in total, 174 images of $h_{[SWOT\ OBS]}$. An example set of six overpasses from a SWOT orbit cycle at high water (cycle 18) is shown in Fig. 6, illustrating the extent of channel which may be observed. Note that here we are focused on the main channels and have not attempted to map water elevations in the forest floodplain. A detailed inset image of the Purus/Solimões confluence for cycle 18, overpass 6 is shown in Fig. 7, illustrating the image of $h_{[SWOT\ OBS]}$ alongside the corresponding image of $h_{[TRUE]}$ and 2D SWOT height errors.

Values of SWOT water surface height observations were extracted from images of $h_{[SWOT\ OBS]}$ along the channel cen-

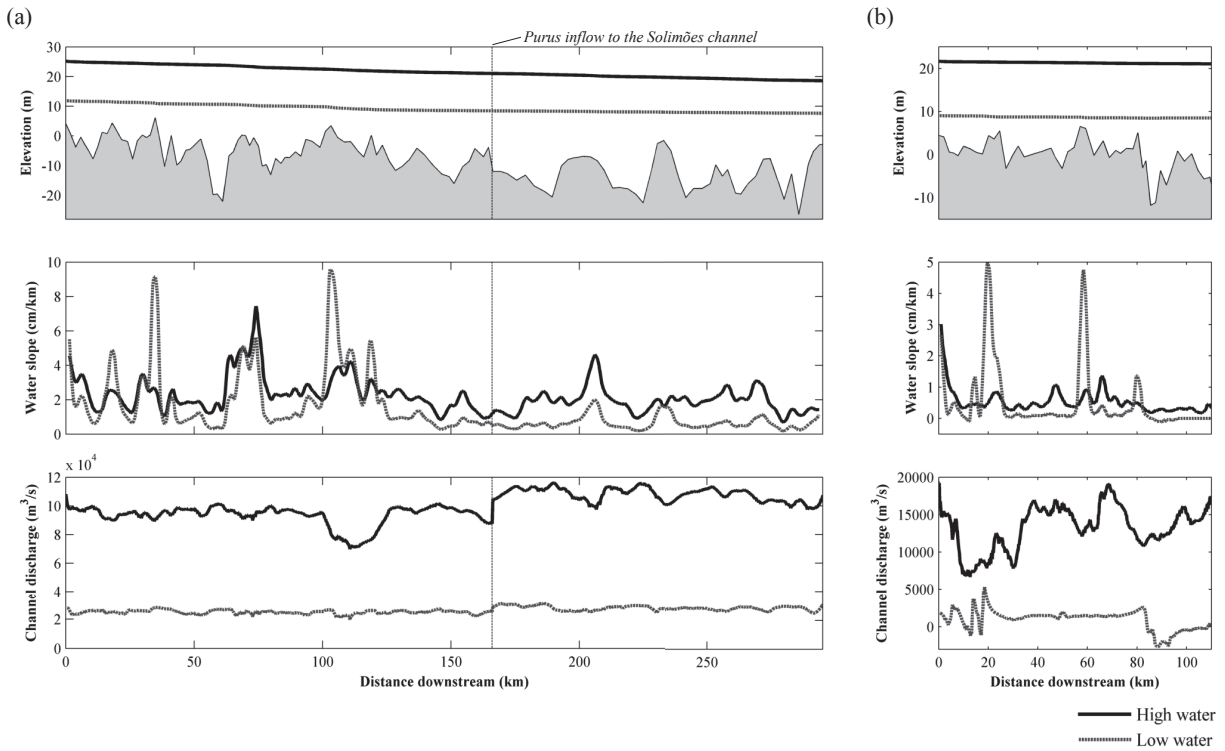


Figure 4. LISFLOOD-FP model output: 1D channel profiles at high and low water for (a) the Solimões and (b) Purus rivers. Top: water surface elevations along the channel (channel bed topography is shown in gray shaded area); middle: water surface slope; bottom: channel discharge. The vertical line in the plots in (a) indicates the location of the Purus inflow to the Solimões.

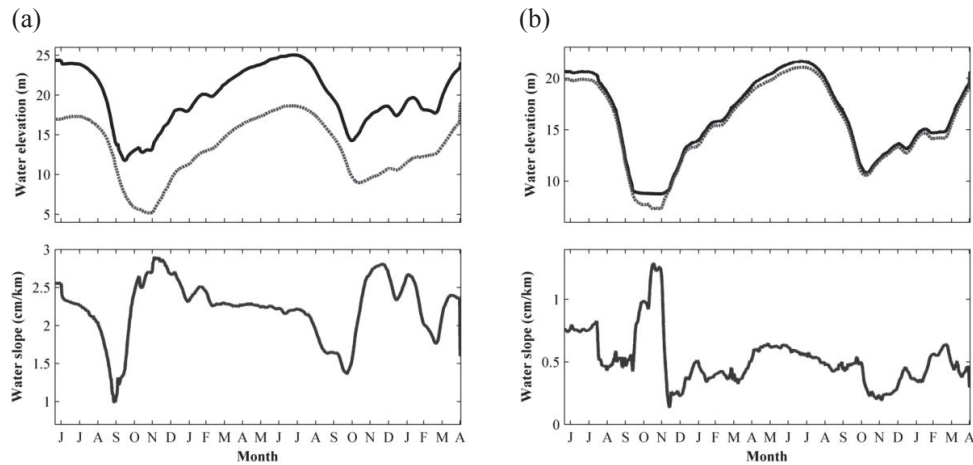


Figure 5. LISFLOOD-FP model output: 1D channel profiles through time for (a) the Solimões and (b) the Purus rivers. Top plots: water elevations at the upstream (solid line) and downstream (dotted line) end of the study reach; bottom plots: average water surface slope through time.

terline and, in addition, averages of channel cross-sections taken perpendicular to the channel centerline were calculated (545 $h_{[SWOT\ XS]}$), plotted against distance downstream for high water (cycle 18) in Fig. 8. In these profiles, the tighter clustering of the cross-section averages to the true channel water elevation profile indicates that by taking a cross-section

average, errors in water surface height observations were reduced (assuming no bias in the estimation of water surface elevation).

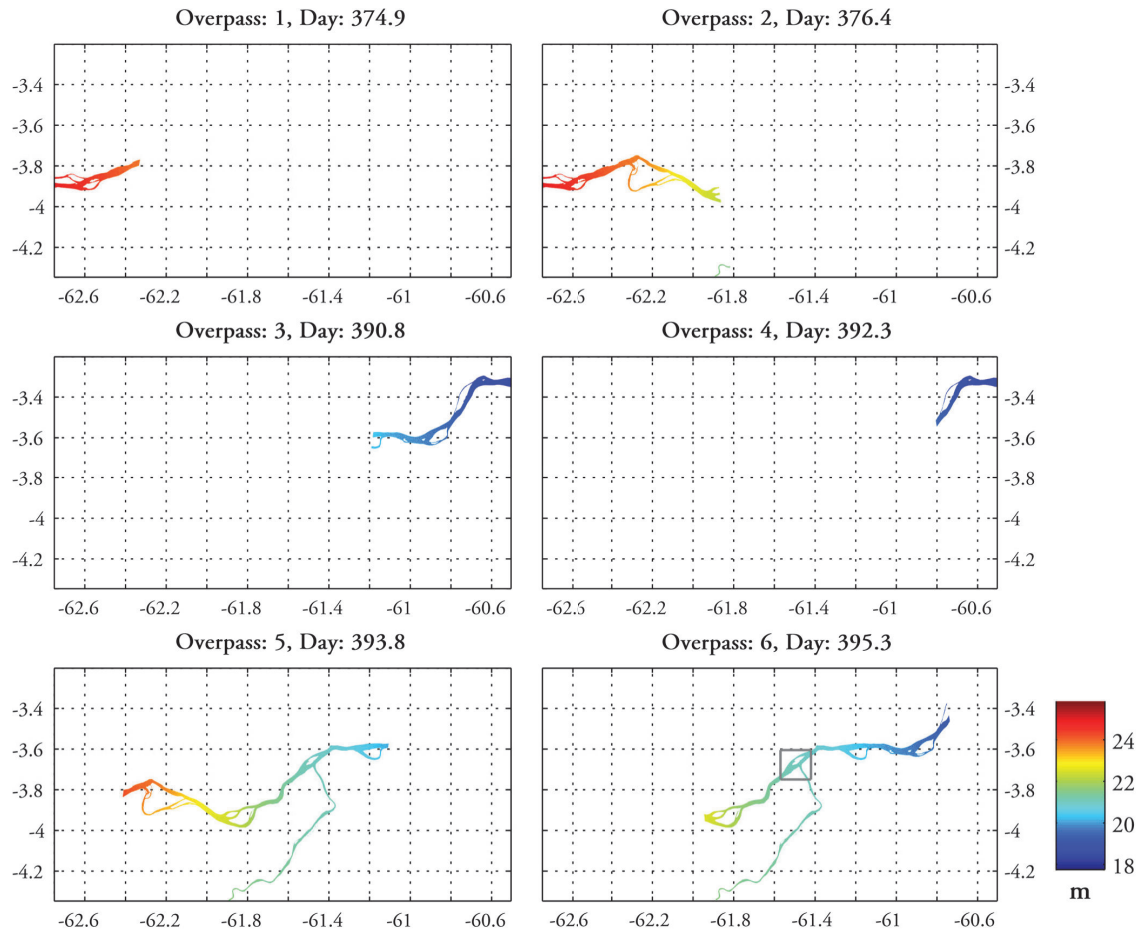


Figure 6. SWOT water elevation measurements derived from hydraulic model output (Figs. 4 and 5) and science requirements (Fig. 3) for cycle 18 (at high water), for each of the 6 overpasses 1 to 6, during the 22 day cycle. The box shown in overpass 6 indicates the area shown in detail in Fig. 7.

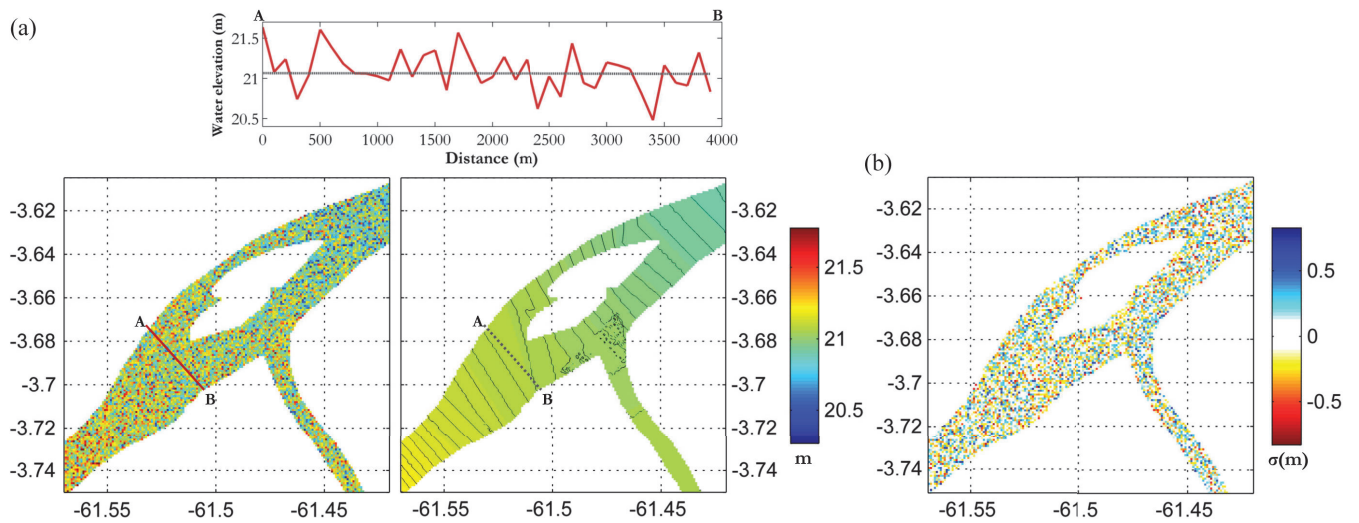


Figure 7. (a) detail-Detail of 2D SWOT water surface elevation for cycle 18, overpass 6 (left) and corresponding “truth” water surface (right) with added 1 cm contours. Cross-sections of water surface elevation between points A and B are shown for illustrative purposes ($h_{\text{SWOT_OBS}}$ is the solid red line; h_{TRUE} is the dotted gray line). (b) 2D SWOT errors generated by inverse Fourier transform of the spectrum (see Fig. 3b).

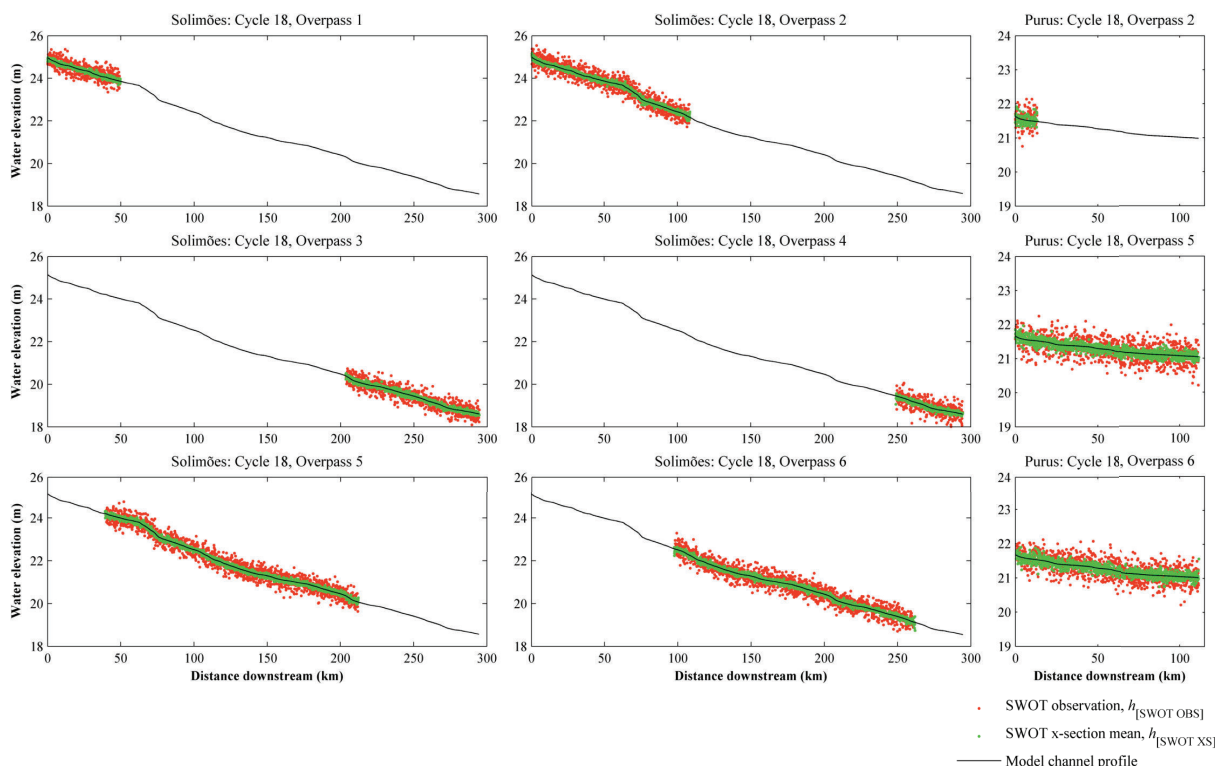


Figure 8. The 2D heights (Fig. 6) were transferred to 1D for both the Solimões and Purus by extracting values of $h_{i[\text{SWOT OBS}]}$ along the channel centerline; to reduce errors, averages of cross-sections taken perpendicular to the channel centerline were also calculated ($h_{i[\text{SWOT XS}]}$).

4.2 Water surface slopes

Fig. 9 illustrates along-channel water surface slope as calculated using $h_{i[\text{SWOT XS}]}$ for high water (cycle 18, overpass 6), using reach-lengths between 5 and 20 km. As the length of averaging increased, errors in $S_{i[\text{SWOT XS}]}$ reduced substantially when compared to $S_{i[\text{TRUE}]}$. Overall error in the estimation of water surface slope decreased quickly with increasing reach-lengths (Fig. 10): for the Solimões, without averaging across channel ($S_{i[\text{SWOT OBS}]}$) and with a short reach lengths of 0.5 km, errors in slope were high at 86.4 cm/km. These errors dropped quickly as more data were included in the estimation of slope, reducing to 0.33 cm/km at 20 km. Averaging across channel in addition to along reach lengths ($S_{i[\text{SWOT XS}]}$) led to a further drop in errors, with 0.09 cm/km error at 20 km reach lengths. Slope errors were similar for the Purus without cross-section averaging (91.0 cm/km at 0.5 km; 0.31 at 20 km), and were moderately higher than the Solimões with cross-section averaging (0.13 cm/km at 20 km) due to the narrower channel width (Table 2). The science-requirement for the SWOT sensor is that river slopes are measured with errors less than 1 cm per km when averaged for 10 km reach length (Rodríguez, 2014). For As expected from the methods used, for both the Solimões and Purus, without cross-section averaging ($S_{i[\text{SWOT OBS}]}$), reach-lengths of ~10 km were required to achieve this level of

accuracy; with cross-section averaging ($S_{i[\text{SWOT XS}]}$) accuracies better than 1 cm/km were achieved using shorter reach lengths of ~4 km and ~5 km for the Solimões and Purus, respectively. For 10 km reach lengths, incorporating cross-section averaging, water slope errors of 0.26 and 0.37 cm per km, respectively, were achieved.

4.3 Channel discharge

In Fig. 11, along-channel discharge estimates for high water (cycle 18, overpass 6) are shown for $Q_{i[\text{SWOT XS}]}$ using reach lengths between 5 and 20 km. As with errors in slope, as reach lengths increased, the errors in estimated discharge decreased. The LISFLOOD-FP modeled discharge ($Q_{i[\text{MODEL}]}$) is also shown for reference. Note that $Q_{i[\text{TRUE}]}$ is different to $Q_{i[\text{MODEL}]}$ since it does not take into account the full diffusive wave approximation of the Saint Venant equations (Section 3.1) and is a reach length average rather than an instantaneous discharge for a particular location.

Using reach lengths of 20 km, full discharge hydrographs were constructed for $Q_{i[\text{SWOT XS}]}$ for several locations along the Solimões and Purus channels, and are compared to hydrographs for $Q_{i[\text{TRUE}]}$ and $Q_{i[\text{MODEL}]}$ in Fig. 12. $Q_{i[\text{SWOT XS}]}$ matched well $Q_{i[\text{TRUE}]}$ throughout the 22-month hydrograph, including both rising and falling flood wave. As with slope errors, the error in estimated discharge dropped quickly as

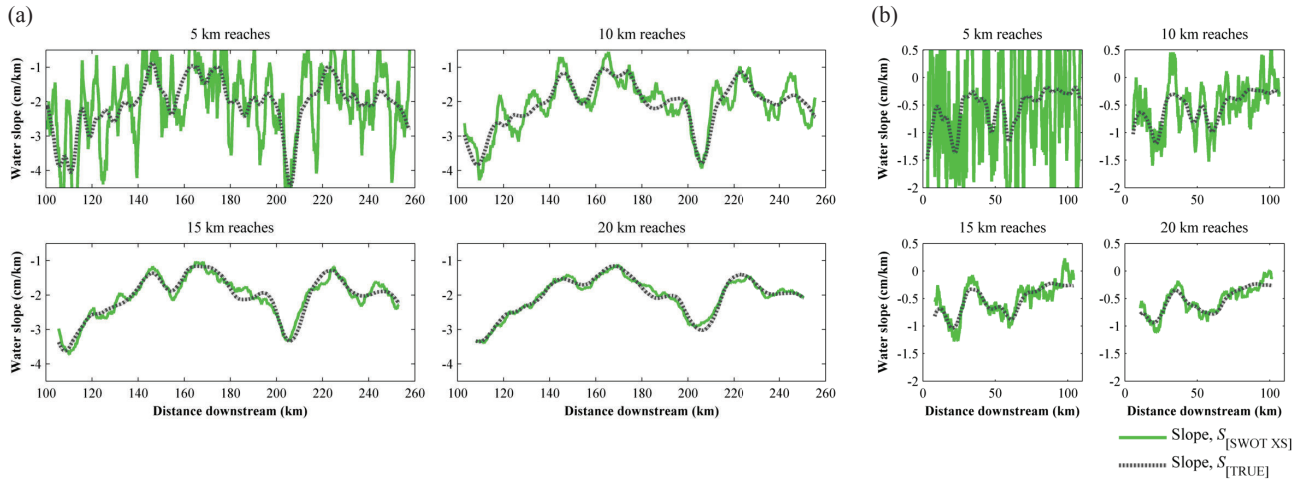


Figure 9. Slope errors: the effect of averaging along channel using reach lengths between 5 and 20 km for the (a) Solimões and (b) Purus rivers. Plots show cycle 18 (high water), overpass 6.

Table 2. Summary of errors in slope (S) and discharge (Q) for the Solimões and Purus channels, obtained using reach length averaging of direct SWOT observations along the channel centerline ([OBS]) and with additional cross-section averaging ([XS]).

		Reach length (km)		
Error		5	10	20
Solimões	$S_{[SWOT\ OBS]}$ σ_s , cm/km	2.55	0.91	0.33
	$S_{[SWOT\ XS]}$ σ_s , cm/km	0.72	0.26	0.09
	RMSE, m ³ /s	34,180	18,900	7,190
	$Q_{[SWOT\ OBS]}$ CV, %	48.5	26.1	9.7
	E	-1.92	0.23	0.89
	RMSE, m ³ /s	15,670	5,950	1,960
	$Q_{[SWOT\ XS]}$ CV, %	22.2	8.3	2.6
	E	0.46	0.93	0.99
Purus	$S_{[SWOT\ OBS]}$ σ_s , cm/km	2.57	0.9	0.31
	$S_{[SWOT\ XS]}$ σ_s , cm/km	1.05	0.37	0.13
	RMSE, m ³ /s	9,682	5,211	2,795
	$Q_{[SWOT\ OBS]}$ CV, %	130.9	67.9	35.1
	E	-8.17	-0.92	0.57
	RMSE, m ³ /s	5,764	3,189	1,493
	$Q_{[SWOT\ XS]}$ CV, %	76	40.9	19.1
	E	-1.34	0.44	0.88

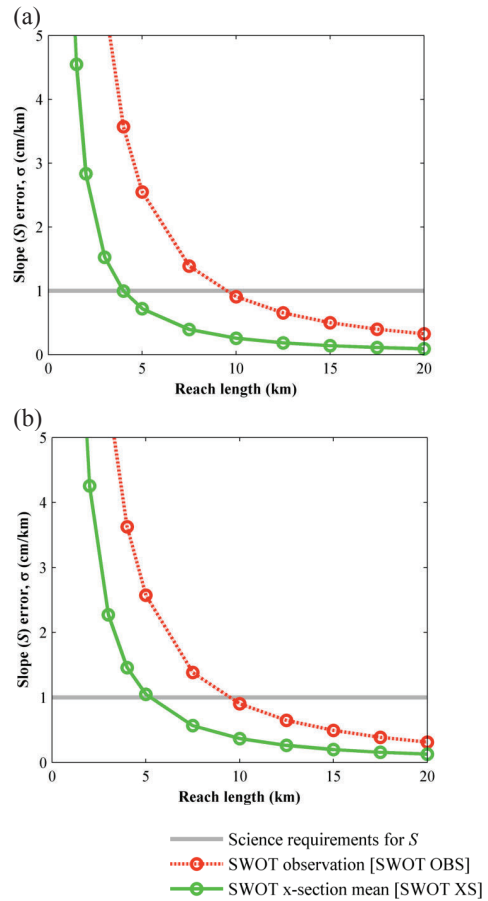


Figure 10. The effect of reach-length averaging on errors in the water surface slope estimation for (a) the Solimões and (b) the Purus rivers.

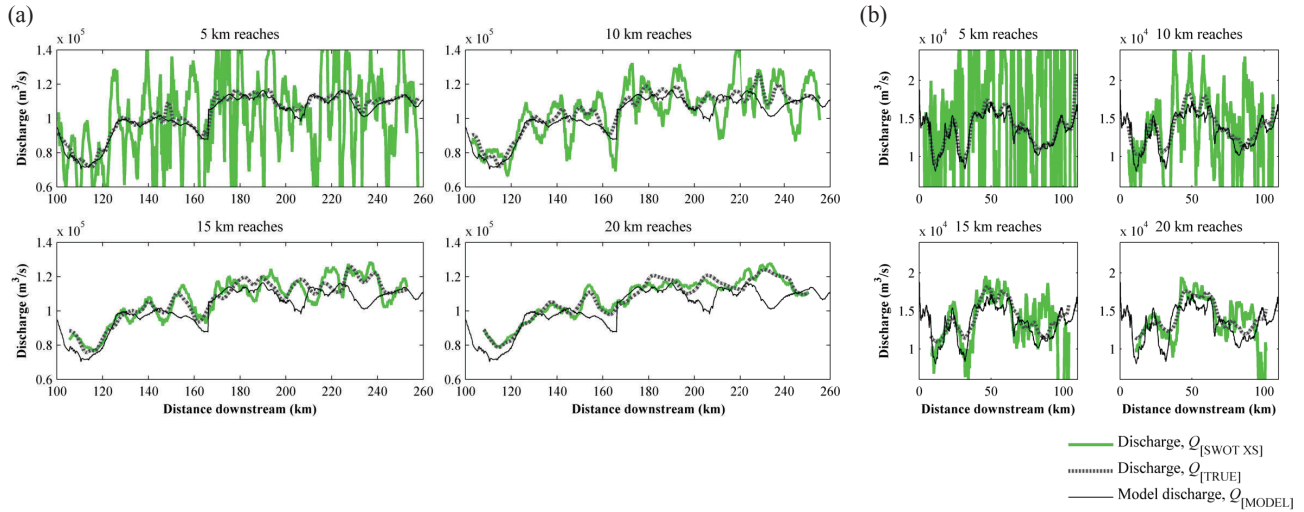


Figure 11. Discharge estimates accounting for slope errors but neglecting width, depth, and friction errors for reach lengths between 5 and 20 km for the (a) Solimões and (b) Purus rivers. Plots show cycle 18 (high water), overpass 6.

the length of reach length averaging increased (Fig. 13).⁶³⁰ Without averaging water surface elevations across channel ($Q_{[\text{SWOT OBS}]}$), errors (CV) were 48.5% of the mean Solimões discharge at 5 km reach lengths, reducing to 9.7% at 20 km. Averaging across channel in addition to along reach lengths ($Q_{[\text{SWOT XS}]}$) led to a further drop in errors, with 22.2% error⁶³⁵ at a reach lengths of 5 km, reducing to 2.6% at 20 km. Discharge errors for the Purus without cross-section averaging were 130.9% of the mean Purus discharge at 5 km, reducing to 35.1% at 20 km; with cross-section averaging errors were 76.0% at 5 km, reducing to 19.1% at 20 km. Discharge errors⁶⁴⁰ are summarised in Table 2.

Nash-Sutcliffe efficiency coefficient (E) values for with increasing reach length averaging are shown in Fig. 13c. On the Solimões, for $Q_{[\text{SWOT OBS}]}$, E was -1.92 at reach lengths of 5 km, increasing to 0.89 at 20 km; for $Q_{[\text{SWOT XS}]}$, E was 0.46 at 5 km, increasing to 0.99 at 20 km. For the Purus, values of E were lower: for $Q_{[\text{SWOT OBS}]}$, E was -8.17 at reach lengths of 5 km, increasing to 0.57 at 20 km; for $Q_{[\text{SWOT XS}]}$, E was -1.34 at 5 km, increasing to 0.88 at 20 km. Negative values of the Nash-Sutcliffe efficiency coefficient indicate that the prediction of discharge is no better than the mean value of the observations: consequently, using cross-section averaging, reach lengths of ~ 4 km were required to achieve positive values of E (indicating “acceptable” levels of accuracy) for the Solimões; for the Purus, ~ 7.5 km reach lengths were required. High values of E (> 0.8) were achieved with reach lengths greater than ~ 7.5 km for the Solimões and ~ 17.5 km for the Purus, indicating high accuracy in the estimation of discharge.⁶⁵⁰

The above accuracy assessment of SWOT-derived discharge compares estimates obtained using SWOT observations of water elevation to those obtained using “true” water surface elevations, based on the channel discharge approxi-

mation in Eq. (5), which does not take into account the full diffusive wave approximation of the Saint Venant equations shown in (1) and (2). To characterize error introduced by Eq. (5), $Q_{[\text{TRUE}]}$ and $Q_{[\text{SWOT}]}$ were also compared using E to channel discharge obtained directly from LISFLOOD-FP, using $Q_{[\text{MODEL}]}$ in place of $Q_{[\text{TRUE}]}$ in Eq. (9) (Fig. 14). Thus, we were able to characterize errors in estimates of channel discharge introduced directly by errors in SWOT observations, as well as errors introduced by the calculation of Q using reach length averaging of the water surface in the calculation of water surface slope. Errors in $Q_{[\text{TRUE}]}$ were low with a minimum error of 2,418 m³/s (3.5%, $E = 0.99$) for the Solimões at a reach length of 0.75 km, and 486 m³/s (6.8%, $E = 0.99$) for the Purus at a reach length of 3 km. However, as the reach length used increased, the errors in $Q_{[\text{TRUE}]}$ also increased. At reach lengths of 20 km, errors for the Solimões were 5,690 m³/s (8.3%, $E = 0.87$) and 1,238 m³/s (18.1%, $E = 0.89$) for the Purus. This increase in error with reach length is a primarily a result of the reach length averaging used for the calculation of water surface slope in Eq. (4), as compared to the instantaneous discharge obtained at a single cross-section from the LISFLOOD-FP model output. These However, the figures should be used with caution since errors may also be related to the structure of the 1D hydraulic model rather than resulting from differences with the true channel discharge at a location. Irrespective of this, results illustrate that there may be an optimal reach length for the estimation of instantaneous discharge, beyond which further averaging will lead to reductions in the accuracy of estimated discharge. For the Solimões, using cross-section averaging ($Q_{[\text{SWOT XS}]}$), maximum accuracy occurred using reach lengths of 12.5 km (6,258 m³/s error, 9.1%, $E = 0.89$), beyond which accuracy decreased slightly. For comparison, at this reach length, errors in $Q_{[\text{TRUE}]}$ were 4.7%, indicating

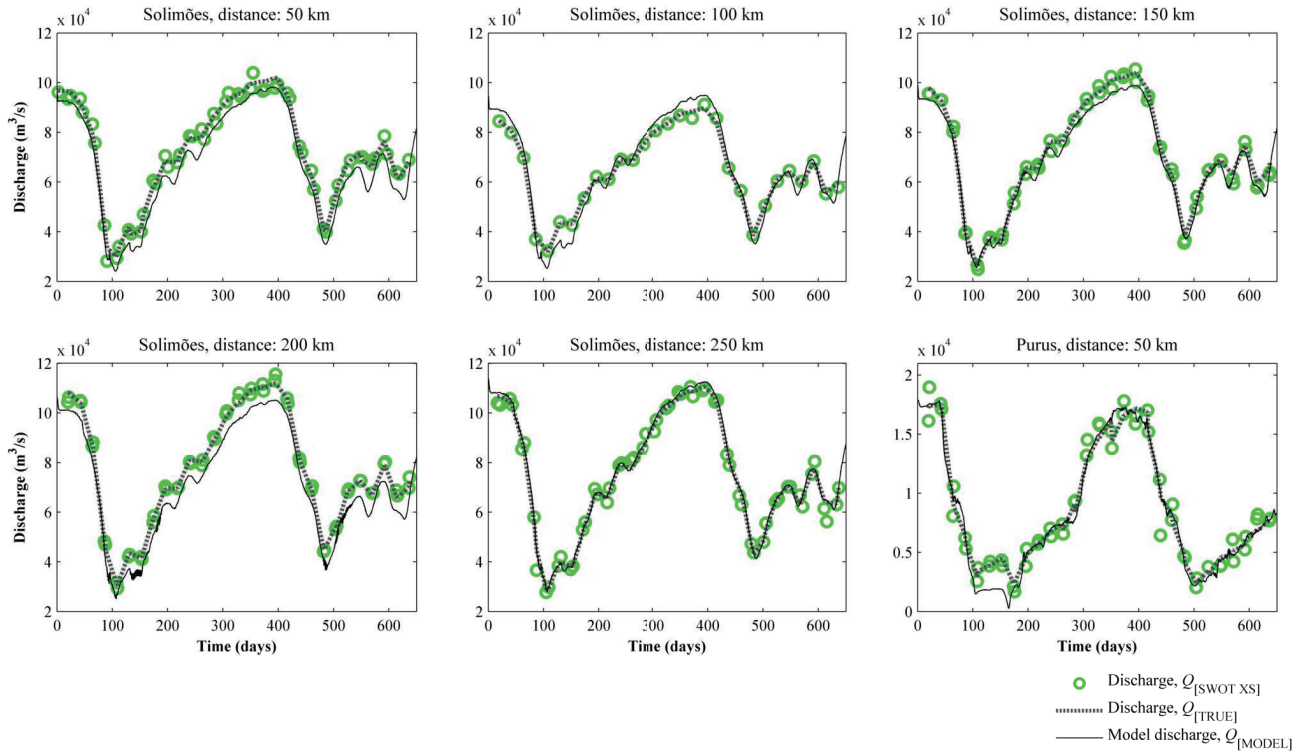


Figure 12. Reconstruction of channel discharge hydrographs from cross-section averaged SWOT observations ($Q_{[SWOT\ XS]}$) for the Solimões and Purus channels using 20 km reach lengths, compared to discharge obtained using water elevation “truth” images ($Q_{[TRUE]}$) and the original modeled channel discharge ($Q_{[MODEL]}$).

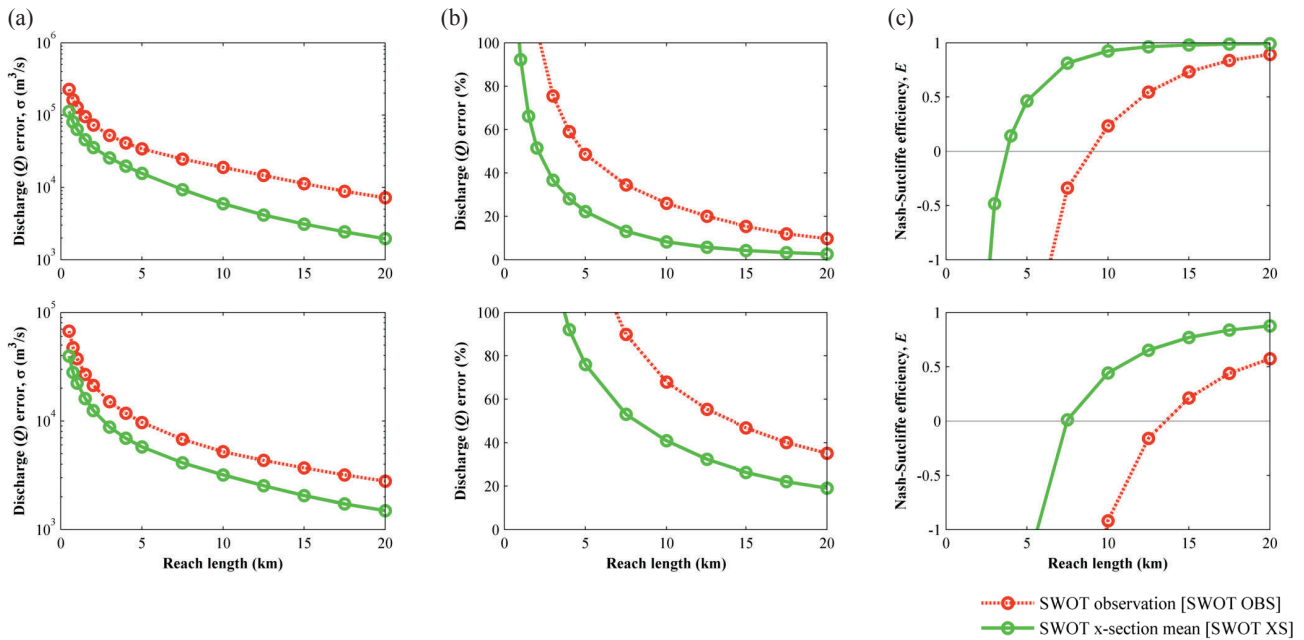


Figure 13. Errors in discharge (Q) as related to reach-length averaging, calculated against slope and discharge obtained using water elevation “truth” images ($Q_{[TRUE]}$): (a) absolute discharge error; (b) error expressed as a percentage of mean discharge; and (c) Nash-Sutcliffe efficiency coefficient. The horizontal line in (c) represents the level of “acceptable” error in modeled discharge estimates. Top row: Solimões; bottom row: Purus.

that around 4.4% of the error was contributed from SWOT height errors with the remainder resulting from the method used to calculate discharge.

4.4 Implications for SWOT

These results indicate that discharge may be obtained accurately from SWOT measurements on large, lowland rivers, assuming sufficient knowledge of channel bathymetry and frictional properties. The error in discharge of 2.6% for the Solimões using cross-channel averaging and 20 km reach lengths compares favorably with the error of ~6-8% obtained by LeFavour and Alsdorf (2005) for the same section of river using SRTM data and 733 km reach lengths. When comparing against instantaneous discharge obtained directly from model output, errors were moderately higher with accuracies of 9.1% obtained at reach lengths of 12.5 km. This suggests that SWOT data will provide both an improvement in accuracy of discharge estimates and a substantial increase in the level of along-channel detail. Since SWOT will provide 2D measurements of surface water, we were able to use cross-channel averaging to substantially improve accuracy due to the improved representation of channel water surface elevations and subsequent reductions in water surface slope errors. For the Purus, accuracy in discharge estimates was lower, which is likely to have been in large part due to the narrower width of the river leading to a reduction in averaging of height errors and consequently higher slope errors, combined with the very low water surface slopes on the river leading to a proportionately higher impact of slope errors when calculating discharge.

~~Examples of other~~ The results presented here may be extended to other large rivers which may be observable by SWOT ~~are shown in via Eq. (6). In~~ Fig. 15. ~~Here, rivers are plotted according to their approximate width and water surface slopes obtained from published sources. The~~, the percentage error in calculated discharge, Q , resulting from errors in SWOT derived water surface slope are indicated for selected rivers, with approximate widths and water surface slopes obtained from published sources. These errors were derived from Eq. (6) using 10 km reach lengths to estimate water surface slope ~~and~~, incorporating the effects of cross-channel averaging of water surface elevation. ~~Note that, as~~ As channel width increases, error in discharge decreases since greater averaging of water surface elevation is possible (water surface elevation errors will decrease by $1/\sqrt{n}$, where n is the number of pixels being averaged (Rodríguez, 2014)); as water surface slope decreases, error in discharge increases since water surface slope errors become proportionately more important according to Eq. (6). From this, we can infer that discharge estimates may be more accurate for rivers with: (i) larger channel widths which permit a greater level of cross-section averaging and the use of shorter reach lengths; and (ii) higher water surface slopes, since ~~from~~ Eq. (6), the relative error in discharge decreases as slope in-

creases. Conversely, discharge estimation accuracy is likely to be lowest for narrow rivers with low slopes, although further research is required to quantify errors for rivers at this scale.

It is important to note that the errors presented here ~~represent only~~ only represent the contribution to overall error in reach-averaged discharge which may be added by SWOT observations of water surface elevation. Other errors ~~such as those contributed by friction or bathymetry errors, or resulting from along-channel variability in discharge~~, are excluded but may be significant and further research is required to characterize their contribution ~~(e.g. errors contributed by friction or bathymetry, or resulting from along-channel variability in discharge)~~. Other than surface water slope and elevation, parameters required in the estimation of discharge (i.e. channel width, roughness and bed elevation or channel depth) are the subject of other recent studies. For example, Durand et al. (2008) used data assimilation of synthetic SWOT measurements ~~into~~ in a hydraulic model to estimate river bathymetric slope and depth for the same river reach as presented in this paper, obtaining ~~RMS errors~~ RMSE of 0.3 cm/km and 0.56 m, respectively. Similarly, Yoon et al. (2012) estimated river bathymetry for the Ohio River, United States, obtaining an ~~RMS error~~ RMSE of 0.52 m and ~~obtained and an~~ effective reach-averaged river roughness to within 1% of the true value. Finally, Durand et al. (2014) illustrates the use of a Bayesian algorithm to estimate river bathymetry and roughness based on observations of river h and S with high accuracy for the River Severn, United Kingdom, and the subsequent estimation of channel discharge. When compared to gauge estimates of discharge, Durand et al. (2014) obtained an accuracy of 10% in discharge estimation for in-bank flows, assuming known lateral inflows, decreasing to 36% without this assumption. The work presented in this paper builds on these studies in that it is the first to directly assess the implications of errors in surface water slope derived from SWOT observations of water elevation on the estimation of discharge, independent of other factors.

As with other studies, the error analysis presented here excluded layover and vegetation effects, as may be found in wetlands and floodplains, or along the edges of rivers. These effects are likely to be greatest for narrower rivers with bank vegetation. In addition, research presented here did not incorporate effects of the temporal sampling scheme on the accuracy of hydrograph estimation. For large rivers with discharge which changes relatively slowly, such as the Amazon and its sub-basins, errors introduced by SWOT temporal sampling are likely to be minimal. However, for smaller rivers with higher discharge variability, this sampling may be significant. Further research is required in this area, although it is likely that there will be an optimum level of width, slope and discharge variability for discharge estimation.

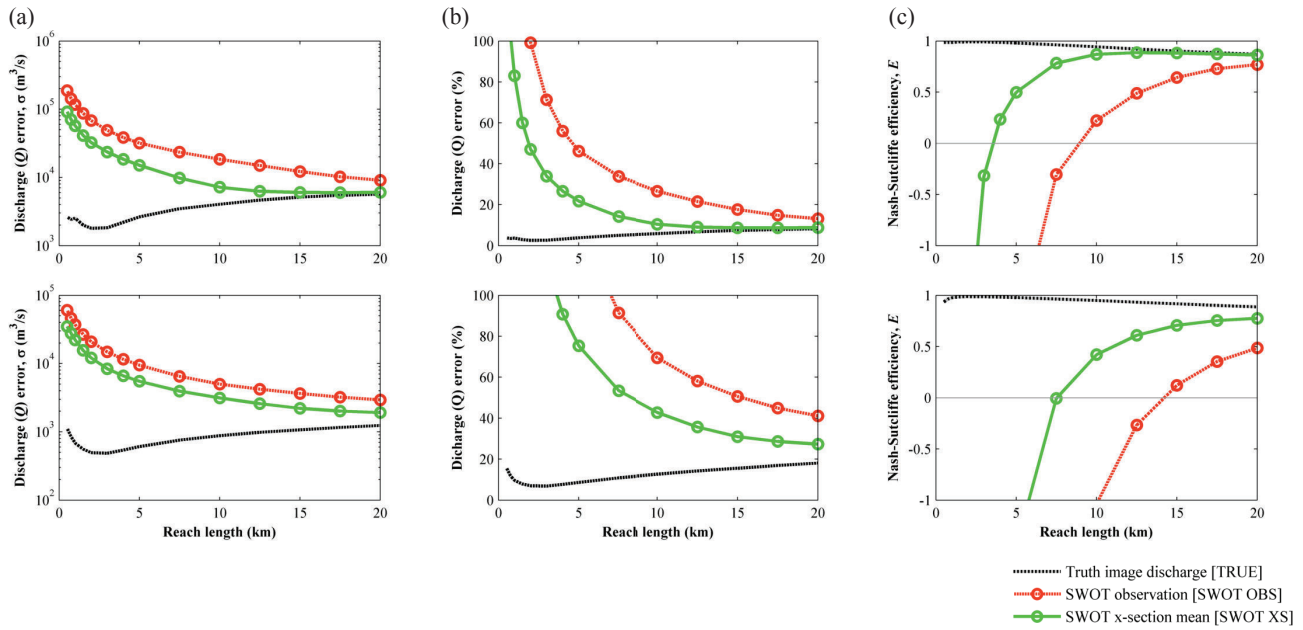


Figure 14. Errors in discharge (Q) calculated against model discharge (Q_{MODEL}): (a) absolute discharge error; (b) error expressed as a percentage of mean discharge; and (c) Nash-Sutcliffe efficiency coefficient. Top row: Solimões; bottom row: Purus.

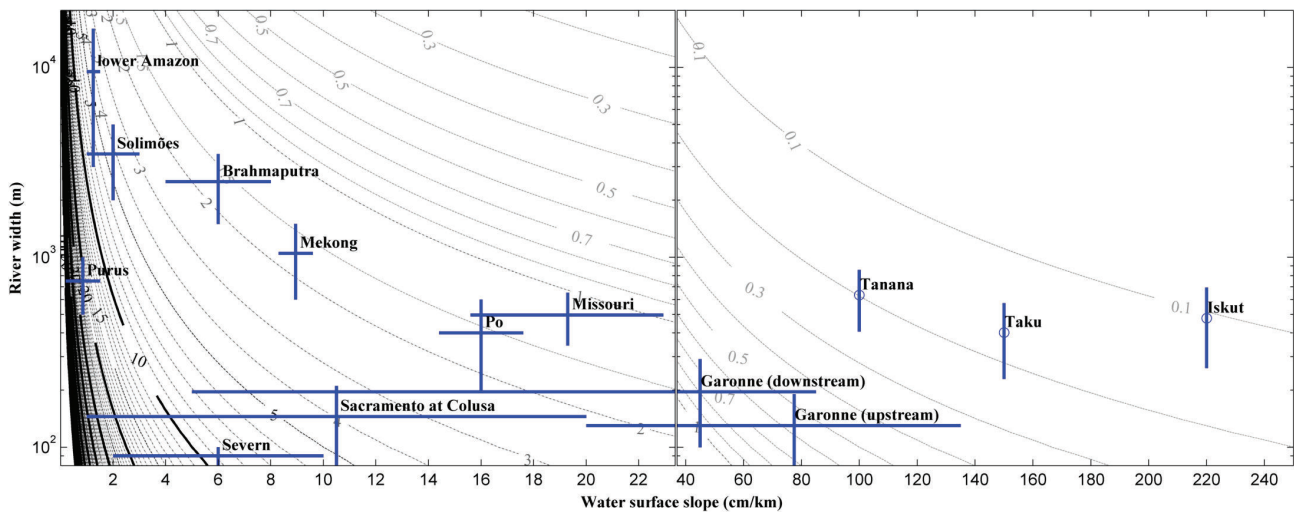


Figure 15. Examples of global rivers which may be observable by SWOT. Contours represent the percentage error in reach-averaged discharge (Q), calculated according to Eq. 6, contributed by errors in water surface slope derived from SWOT observations, when using 10 km reach lengths and cross-channel averaging. Note that other sources of error are excluded but may be significant; [without full assessment of each river, figures should be used with caution](#). Sources used to obtain values of river width and water surface slopes were: Solimões, Purus rivers (Brazil) from this paper; lower Amazon river (Brazil) from Meade et al. (1985); Missouri and Tanana rivers (United States), Iskut and Taku rivers (Canada) from Bjerklie et al. (2005); Brahmaputra river (India) from Jung et al. (2010); Niger river (Mali) from Neal et al. (2012); Mekong river (Thailand/ Laos) from Birkinshaw et al. (2012); Severn river (United Kingdom) from Durand et al. (2014); Po river (Italy) from Schumann et al. (2010); and Sacramento at Colusa (United States) and Garonne (France) rivers from unpublished model estimates.

770 **5 Conclusions**

In this paper, we used a “virtual mission” study of two-dimensional water surface elevations which may be obtained by SWOT for a reach of the central Amazon River in Brazil

775 and investigated the implications of errors in such measurements on the estimation of water surface slope and channel discharge. The following remarks can be made following our work:

1. Using 1D polynomials with least squares estimation fitted to water elevations obtained from channel centerlines, the SWOT design requirement of slope errors less than 1 cm per km when averaged for 10 km (Rodríguez, 2014) was achieved for both the Solimões and Purus Rivers.
2. Shorter reach lengths (~4 km and ~5 km for the Solimões and Purus, respectively) were required to achieve the design level of accuracy when additionally averaging SWOT water surface height estimates across-channel; for 10 km reach lengths, higher accuracies were achieved (water slope errors of 0.26 and 0.37 cm per km for the Solimões and Purus, respectively). This indicates that the accuracy of water surface slopes estimates will be higher for rivers with wider channels, particularly those several times wider than the ~70-250 m nominal spatial resolution (Durand et al., 2010; Rodríguez, 2014).
3. SWOT data are promising for the estimation of Amazonian river discharge, with low errors in estimates (9.1% for instantaneous estimates, or 2.6% for reach-averaged discharge estimates). Discharge hydrographs could be re-constructed accurately from SWOT imagery based on the specified temporal sampling scheme (Figure 3; Rodríguez, 2014) although, for rivers with a higher discharge variability, temporal sampling is likely to be a significant source of error for hydrograph estimation.
4. A high proportion of the errors found in the instantaneous estimates derived from the method used to calculate discharge from water surface slopes, rather than from SWOT errors, suggesting that improvements to the estimation of discharge may be possible.

It should be noted that the errors added to water surfaces to simulate SWOT measurements of water elevation were spatially-correlated at multiple scales (according to the SWOT design requirements error spectrum and incorporating long-wavelength errors for each orbit), with added random noise on a per-pixel basis. While averaging along cross-sections will effectively reduce the random noise component (assuming no bias), it was not immediately apparent how spatially-correlated error would affect the estimation of discharge. Results here indicate that, at this scale, these errors do not greatly impact discharge accuracy - although similar assessments of other rivers is needed.

Overall, these findings indicate that forthcoming SWOT imagery shows considerable promise for the hydraulic characterization of large rivers such as the Amazon, although further work is required for a range of additional rivers with a variety of characteristics, particularly those with a high spatial and temporal variability in surface water slope and channel discharge. ~~However, for large, lowland rivers, the results are directly transferable.~~

~~It should also be noted that,~~ A final note of caution: in this paper, we assumed knowledge of channel friction, width and bed elevation in the calculation of discharge, ~~and excluded since our aim was to characterize the impact of SWOT observations and their associated errors independently of these issues.~~ We also excluded the potential effects of vegetation on errors in SWOT surface water heights. Further work is needed to assess the relative importance of each of these factors on the estimation of channel discharge.

Acknowledgements. This research was completed while M. D. Wilson was a visiting researcher at the School of Earth Sciences, Ohio State University. The authors would like to thank the two referees, R. Romanowicz and one anonymous, for their careful reviews and valuable recommendations which have improved the quality of this manuscript.

References

- Alsdorf, D., Lettenmaier, D., and Vörösmarty, C.: The Need for Global, Satellite-based Observations of Terrestrial Surface Waters, *Eos, Transactions American Geophysical Union*, 84, 269–275, doi:10.1029/2003EO290001, 2003.
- Alsdorf, D., Bates, P., Melack, J., Wilson, M., and Dunne, T.: Spatial and temporal complexity of the Amazon flood measured from space, *Geophysical Research Letters*, 34, 1–5, doi:10.1029/2007GL029447, 2007a.
- Alsdorf, D., Rodríguez, E., and Lettenmaier, D.: Measuring surface water from space, *Reviews of Geophysics*, 45, 1–24, doi:10.1029/2006RG000197, 2007b.
- Bates, P. and De Roo, A.: A simple raster-based model for flood inundation simulation, *Journal of Hydrology*, 236, 54–77, doi:10.1016/S0022-1694(00)00278-X, 2000.
- Berry, P. A. M., Garlick, J. D., Freeman, J., and Mathers, E.: Global inland water monitoring from multi-mission altimetry, *Geophysical Research Letters*, 32, doi:10.1029/2005GL022814, 2005.
- Birkett, C.: Contribution of the TOPEX NASA Radar Altimeter to the global monitoring of large rivers and wetlands, *Water Resources Research*, 34, 1223–1239, doi:10.1029/98WR00124, 1998.
- Birkett, C., Mertes, L., Dunne, T., Costa, M., and Jasinski, M.: Surface water dynamics in the Amazon Basin: Application of satellite radar altimetry, *Journal of Geophysical Research*, 107, 8059, doi:10.1029/2001JD000609, 2002.
- Birkinshaw, S. J., Moore, P., Kilsby, C., O'Donnell, G. M., Hardy, A., and Berry, P. A. M.: Daily discharge estimation at ungauged river sites using remote sensing, *Hydrological Processes*, 28, 1043–1054, doi:10.1002/hyp.9647, 2012.
- Bjerklie, D., Lawrence, S., Vorosmarty, C., Bolster, C., and Congalton, R.: Evaluating the potential for measuring river discharge from space, *Journal of Hydrology*, 278, 17–38, doi:10.1016/S0022-1694(03)00129-X, 2003.
- Bjerklie, D. M., Moller, D., Smith, L. C., and Dingman, S. L.: Estimating discharge in rivers using remotely sensed hydraulic information, *Journal of Hydrology*, 309, 191–209, doi:10.1016/j.jhydrol.2004.11.022,

- <http://linkinghub.elsevier.com/retrieve/pii/S0022169404005724>, 2005.
- 885 Clarke, R. T., Mendiondo, E. M., and Brusa, L. C.: Uncertainties in mean discharges from two large South American rivers due to rating curve variability, *Hydrological Sciences Journal*, 45, 221–236, doi:10.1080/0262666009492321, <http://www.tandfonline.com/doi/abs/10.1080/0262666009492321>, 2000.
- 890 Di Baldassarre, G. and Claps, P.: A hydraulic study on the applicability of flood rating curves, *Hydrology Research*, 42, 10, doi:10.2166/nh.2010.098, <http://www.iwaponline.com/nh/042/nh0420010.htm>, 2010.
- Di Baldassarre, G. and Montanari, a.: Uncertainty in river discharge observations: a quantitative analysis, *Hydrology and Earth System Sciences*, 13, 913–921, doi:10.5194/hess-13-913-2009, <http://www.hydrol-earth-syst-sci.net/13/913/2009/>, 2009.
- 955 Domeneghetti, a., Castellarin, a., and Brath, a.: Assessing rating-curve uncertainty and its effects on hydraulic model calibration, *Hydrology and Earth System Sciences*, 16, 1191–1202, doi:10.5194/hess-16-1191-2012, <http://www.hydrol-earth-syst-sci.net/16/1191/2012/>, 2012.
- 900 Durand, M., Andreadis, K. M., Alsdorf, D. E., Lettenmaier, D. P., Moller, D., and Wilson, M.: Estimation of bathymetric depth and slope from data assimilation of swath altimetry into a hydrodynamic model, *Geophysical Research Letters*, 35, 1–5, doi:10.1029/2008GL034150, <http://www.agu.org/pubs/crossref/2008/2008GL034150.shtml>, 2008.
- 905 Durand, M., Fu, L.-L., Lettenmaier, D., Alsdorf, D., Rodríguez, E., and Esteban-Fernandez, D.: The Surface Water and Ocean Topography Mission: Observing Terrestrial Surface Water and Oceanic Submesoscale Eddies, *Proceedings of the IEEE*, 98, 766–779, doi:10.1109/JPROC.2010.2043031, 2010.
- 910 Durand, M., Neal, J., Rodríguez, E., Andreadis, K. M., Smith, L. C., and Yoon, Y.: Estimating reach-averaged discharge for the River Severn from measurements of river water surface elevation and slope, *Journal of Hydrology*, 511, 92–104, doi:10.1016/j.jhydrol.2013.12.050, <http://linkinghub.elsevier.com/retrieve/pii/S002216941400002X>, 2014.
- 915 Fekete, B. M. and Vörösmarty, C.: The current status of global river discharge monitoring and potential new technologies complementing traditional discharge measurements, in: *Predictions in Ungauged Basins: PUB Kick-off (Proceedings of the PUB Kick-off meeting held in Brasilia, 20–22 November 2002)*. IAHS Publ. 309, November 2002, pp. 129–136, IAHS, Wallingford, UK, 2007.
- 920 Hossain, F., Katiyar, N., Hong, Y., and Wolf, A.: The emerging role of satellite rainfall data in improving the hydro-political situation of flood monitoring in the under-developed regions of the world, *Natural Hazards*, 43, 199–210, doi:10.1007/s11069-006-9094-x, 2007.
- 930 Jung, H. C., Hamski, J., Durand, M., Alsdorf, D., Hossain, F., Lee, H., Hossain, A. K. M. A., Hasan, K., Khan, A. S., and Hoque, A. Z.: Characterization of complex fluvial systems using remote sensing of spatial and temporal water level variations in the Amazon, Congo, and Brahmaputra Rivers, *Earth Surface Processes and Landforms*, 35, 294–304, doi:10.1002/esp.1914, <http://doi.wiley.com/10.1002/esp.1914>, 2010.
- 935 Kiel, B., Alsdorf, D., and Lefavour, G.: Capability of SRTM C- and X-band DEM Data to Measure Water Elevations in Ohio and the Amazon, *Photogrammetric Engineering & Remote Sensing*, 72, 1–8, 2006.
- Lambin, J., Morrow, R., Fu, L.-L., Willis, J. K., Bonekamp, H., Lillibrige, J., Perbos, J., Zaouche, G., Vaze, P., Bannoura, W., Parisot, F., Thouvenot, E., Coutin-Faye, S., Lindstrom, E., and Mignogno, M.: The OSTM/Jason-2 Mission, *Marine Geodesy*, 33, 4–25, doi:10.1080/01490419.2010.491030, 2010.
- LeFavour, G. and Alsdorf, D.: Water slope and discharge in the Amazon River estimated using the shuttle radar topography mission digital elevation model, *Geophysical Research Letters*, 32, 1–5, doi:10.1029/2005GL023836, 2005.
- Legates, D. R. and McCabe, G. J.: Evaluating the use of “goodness-of-fit” Measures in hydrologic and hydroclimatic model validation, *Water Resources Research*, 35, 233–241, doi:10.1029/1998WR900018, 1999.
- Meade, R. H., Dunne, T., Richey, J. E., DE M Santos, U., and Salati, E.: Storage and remobilization of suspended sediment in the lower Amazon river of Brazil, *Science*, 228, 488–90, doi:10.1126/science.228.4698.488, <http://www.ncbi.nlm.nih.gov/pubmed/17746891>, 1985.
- Meade, R. H., Rayol, J. M., Conceição, S. C., and Natividade, J. R. G.: Backwater effects in the Amazon River basin of Brazil, *Environmental Geology and Water Sciences*, 18, 105–114, doi:10.1007/BF01704664, 1991.
- Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel, R. D., and Veith, T. L.: Model Evaluation Guidelines for Systematic Quantification of Accuracy in Watershed Simulations, *Transactions of the ASABE*, 50, 885–900, doi:10.13031/2013.23153, 2007.
- Nash, J. and Sutcliffe, J.: River flow forecasting through conceptual models part I — A discussion of principles, *Journal of Hydrology*, 10, 282–290, doi:10.1016/0022-1694(70)90255-6, 1970.
- Neal, J., Schumann, G., and Bates, P.: A subgrid channel model for simulating river hydraulics and floodplain inundation over large and data sparse areas, *Water Resources Research*, 48, n/a–n/a, doi:10.1029/2012WR012514, <http://doi.wiley.com/10.1029/2012WR012514>, 2012.
- NRC: Earth science and applications from space: National imperatives for the next decade and beyond, National Academies Press, Washington, DC, available from: http://www.nap.edu/catalog.php?record_id=11820 (accessed 1 Aug 2014), 2007.
- NSTC: Science and technology to support fresh water availability in the United States, Tech. Rep. November, National Science and Technology Council, Committee on Environment and Natural Resources, subcommittee on Water Availability and Quality, Washington, DC, available from: <http://water.usgs.gov/owq/swaq.pdf> (accessed 1 Aug 2014), 2004.
- Oberg, K. and Mueller, D. S.: Validation of Streamflow Measurements Made with Acoustic Doppler Current Profilers, *Journal of Hydraulic Engineering*, 133, 1421–1432, doi:10.1061/(ASCE)0733-9429(2007)133:12(1421), [http://ascelibrary.org/doi/abs/10.1061/\(ASCE\)0733-9429\(2007\)133:12\(1421\)http://ascelibrary.org/doi/abs/10.1061/%28ASCE%290733-9429%282007%29133%3A12%281421%29](http://ascelibrary.org/doi/abs/10.1061/(ASCE)0733-9429(2007)133:12(1421)http://ascelibrary.org/doi/abs/10.1061/%28ASCE%290733-9429%282007%29133%3A12%281421%29), 2007.
- Papa, F., Bala, S. K., Pandey, R. K., Durand, F., Gopalakrishna, V. V., Rahman, A., and Rossow, W. B.: Ganga-Brahmaputra river discharge from Jason-2 radar altimetry: An update to the long-term satellite-derived estimates of continental freshwater forcing

- flux into the Bay of Bengal, *Journal of Geophysical Research*, 117, C11 021, doi:10.1029/2012JC008158, 2012.
- 1000 Richey, J. E., Nobre, C., and Deser, C.: Amazon river discharge and climate variability: 1903 to 1985., *Science (New York, N.Y.)*, 246, 101–3, doi:10.1126/science.246.4926.101, 1989.
- 1005 Rodríguez, E.: Surface Water and Ocean Topography Mission (SWOT): Science Requirements Document, Tech. rep., NASA Jet Propulsion Laboratory, available from: http://swot.jpl.nasa.gov/files/swot/SWOT_Science_Requirements_Document.pdf (accessed 1 Aug 2014), 2014.
- 1010 Schumann, G., Di Baldassarre, G., Alsdorf, D., and Bates, P. D.: Near real-time flood wave approximation on large rivers from space: Application to the River Po, Italy, *Water Resources Research*, 46, 1–8, doi:10.1029/2008WR007672, <http://www.agu.org/pubs/crossref/2010/2008WR007672.shtml>, 2010.
- 1015 Seyler, F., Calmant, S., Silva, J. S. D., Moreira, D. M., Mercier, F., and Shum, C.: From TOPEX/Poseidon to Jason-2/OSTM in the Amazon basin, *Advances in Space Research*, 51, 1542–1550, doi:10.1016/j.asr.2012.11.002, 2013.
- 1020 Shiklomanov, A. I., Lammers, R., and Vörösmarty, C.: Widespread decline in hydrological monitoring threatens Pan-Arctic research, *Eos, Transactions American Geophysical Union*, 83, 13–17, doi:10.1029/2002EO000008, 2002.
- 1025 Trigg, M., Wilson, M. D., Bates, P. D., Horritt, M. S., Alsdorf, D. E., Forsberg, B. R., and Vega, M. C.: Amazon flood wave hydraulics, *Journal of Hydrology*, 374, 92–105, doi:10.1016/j.jhydrol.2009.06.004, 2009.
- USGS: A New Evaluation of the USGS Streamgaging Network: A Report to Congress, Tech. rep., United States Geological Survey, available from: <http://water.usgs.gov/streamgaging/report.pdf> (accessed 1 Aug 2014), 1998.
- 1030 Vorosmarty, C., Askew, A., Grabs, W., Barry, R. G., Birkett, C., Doll, P., Goodison, B., Hall, A., Jenne, R., Kitaev, L., Landwehr, J., Keeler, M., Leavesley, G., Schaake, J., Strzpek, K., Sundarvel, S. S., Takeuchi, K., and Webster, F.: Global water data: A newly endangered species, *Eos, Transactions American Geophysical Union*, 82, 54–54, doi:10.1029/01EO00031, 2001.
- 1035 Wilson, M., Bates, P., Alsdorf, D., Forsberg, B., Horritt, M., Melack, J., Frappart, F., and Famiglietti, J.: Modeling large-scale inundation of Amazonian seasonally flooded wetlands, *Geophysical Research Letters*, 34, 1–6, doi:10.1029/2007GL030156, 2007.
- 1040 Wolf, A. T., Natharius, J. A., Danielson, J. J., Ward, B. S., and Pender, J. K.: International River Basins of the World, *International Journal of Water Resources Development*, 15, 387–427, doi:10.1080/07900629948682, 1999.
- 1045 Yoon, Y., Durand, M., Merry, C. J., Clark, E. a., Andreadis, K. M., and Alsdorf, D. E.: Estimating river bathymetry from data assimilation of synthetic SWOT measurements, *Journal of Hydrology*, 464–465, 363–375, doi:10.1016/j.jhydrol.2012.07.028, <http://linkinghub.elsevier.com/retrieve/pii/S0022169412006294>, 2012.