

Dear Dr Stamm,

Many thanks for considering our manuscript for re-submission. We have edited the manuscript accordingly and have addressed your comments. Changes to the manuscript are highlighted in bold type and figure 3 has been changed as requested. Point by point responses to your comments are included below.

Kind regards,

Sophie Sherriff (on behalf of all co-authors)

In your response to a comment by Reviewer 1 concerning p. 2723 you make the comparison to other catchments and call them "similar". However, it seems that some of these catchment have very different soil properties (i.e. loess). The notion of "similar" is misleading if it goes without a further qualification. Please mention that some of them differ substantially in soil erodibility.

Response: We have added a sentence to the text as follows:

The variability of average SSYs may be partly described by catchment size (x axis) but furthermore according to physical attributes such as soil type which controls soil erodibility.

On p. 2717, L. 4, you refer to "spurious" peaks. How do you know that they are actually spurious? Just because of lack of a discharge signal? Please explain.

Response: Sentence added to clarify intended point.

T-SSC rating curves were developed for each sensor using water samples collected at the respective positions ($ISCO_{OUT}$ and $ISCO_{IN}$) and applied to the raw turbidity set. Low quality data capture attributed to spurious readings (a short-term increase in T output not associated with a known environmental process such as accompanying rise in Q or equipment maintenance), saturation of the T_{IN} sensor or missing data at T_{OUT} due to delivery system blockages did not undergo correction such that comparisons between methodologies could be made.

Fig. B: It is difficult to precisely locate the data gaps in the measured time series and to keep the different lines appart. I'd suggest that you display the data in a log scale and draw lines indicating the data gaps across the entire y axis range.

Response: Figure B (now Figure 3 in the revised manuscript) has been edited as recommended by the editor.

~~Identifying the controls of soil loss in~~ Investigating suspended sediment dynamics in contrasting agricultural

catchments using ex situ turbidity-based suspended sediment monitoring

Sherriff, S.C.^{1,2}, Rowan, J.S.², Melland, A.R.³, Jordan, P.^{4,5}, Fenton, O.¹, Ó hUallacháin, D.¹

Addresses/affiliations:

¹Johnstown Castle Research Centre, Teagasc, Wexford, Ireland

²School of the Environment, University of Dundee, Dundee, DD1 4HN, Scotland, UK

³National Centre for Engineering in Agriculture, University of Southern Queensland, Toowoomba, Australia

⁴School of Environmental Sciences, Ulster University, Coleraine, Co. Derry, BT52 1SA, UK

⁵Agricultural Catchments Programme, Johnstown Castle Research Centre, Teagasc, Wexford, Ireland

Correspondence: sophie.sherriff@teagasc.ie

Abstract

Soil erosion and suspended sediment (SS) pose risks to chemical and ecological water quality. Agricultural activities may accelerate erosional fluxes from bare, poached or compacted soils, and enhance connectivity through modified channels and artificial drainage networks. Storm-event fluxes dominate SS transport in agricultural catchments; therefore, high temporal-resolution monitoring approaches are required but can be expensive and technically challenging. Here, the performance of in situ turbidity-sensors, conventionally installed submerged at the river bankside, is compared with installations where river water is delivered to sensors ex situ, i.e. within instrument kiosks on the riverbank, at two experimental catchments (Grassland B and Arable B). ~~The in-situ and ex-situ installations gave comparable results when calibrated against storm-period, depth-integrated SS data, with total loads at Grassland B estimated at 12828 t and 15435 t, and 22554 t and 24852 t at Arable B, respectively. Calibrated against storm-period depth-integrated SS data, both systems gave comparable results; using the ex situ and in situ methods respectively, total load at Grassland B was estimated at 128±28 t and 154±35 t, and 225±54 t and 248±52 t at Arable B.~~ The absence of spurious turbidity ~~readings~~ ^{peaks} relating to bankside debris around the in situ sensor and its greater security, make the ex situ sensor more robust. The ex situ approach was then used to characterise SS dynamics and fluxes in five intensively managed agricultural catchments in Ireland which feature a range of landscape characteristics and land use pressures. Average annual suspended sediment concentration (SSC) was below the Freshwater Fish Directive (78/659/EEC ~~FFD~~) guideline of 25 mg L⁻¹, and the continuous hourly record demonstrated that exceedance occurred less than 12% of the observation year. Soil drainage class and proportion of arable land were key controls determining flux rates, but all catchments reported a high degree of inter-annual variability associated with variable precipitation patterns compared to the long-term average. Poorly-drained soils had greater sensitivity to runoff and soil erosion, particularly in catchments with periods of bare soils. Well drained soils were less sensitive to erosion even on arable land; however, under extreme rainfall conditions, all bare soils remain a high sediment loss risk. Analysis of storm-period and seasonal dynamics (over the long term) using high resolution monitoring would be beneficial to further explore the impact of landscape, climate and land use characteristics on SS export.

Keywords: Suspended sediment; stage-discharge; turbidity calibration; flux determinations; agricultural land use

1 Introduction

Excessive supply of fine sediments ($<125\ \mu\text{m}$) and sediment-associated pollutants are detrimental to aquatic ecosystems (Wood and Armitage, 1997; Collins et al., 2011; Kemp et al., 2011). Elevated suspended sediment (SS) concentrations decrease light penetration and can reduce primary productivity. Deposition of sediments onto river channel beds also degrades habitat quality for benthic species and spawning fish (Bilotta and Brazier, 2008). In the European Union, the Water Framework Directive (WFD – OJEU, 2000) requires that water quality meet a “good” standard, but no binding environmental standards yet exist for SS across Member States (Brils, 2008; Collins and Anthony, 2008). In rivers, the EU Freshwater Fish Directive (FFD – OJEU, 2006) introduced a mean annual threshold of $25\ \text{mg L}^{-1}$, but this was subsequently repealed. Phosphorus (P) targets are, however, binding and because of its strong affinity for particulate transport, catchment sediment fluxes are an essential area of research.

Agriculture is commonly linked with elevated rates of soil erosion (Foster et al., 2011; Glendell and Brazier, 2014), but the degree to which sediment exports from catchments can be attributed to specific land-management practices is challenging to measure (Rowan et al., 2012). Catchments exhibit complex responses to different land uses, (e.g. arable or grazing practices) which are further influenced by climate, landscape setting and topographic controls (Wass and Leeks, 1999). A comprehensive evaluation of the extent of erosion and elevated sediment supply, therefore, requires a robust determination of sediment flux (Navratil et al., 2011), knowledge of the sources and fate of fine sediments within the system (Walling, 2005), and an appreciation of the risks that elevated concentrations present to aquatic ecosystems (Bilotta and Brazier, 2008). A full evaluation of the extent of erosion and elevated sediment supply, therefore, requires a robust determination of the fluxes (amount and timing of sediment delivery) (Navratil et al., 2011); greater knowledge of the sources and fate of fine sediments within the system (Walling, 2005); and a better appreciation of the risks that elevated concentrations present to aquatic ecosystems (Bilotta and Brazier, 2008). This evidence base can be used to better inform integrated land, water and sediment management strategies.

Sediment losses from agricultural areas are commonly attributed to arable practices (Walling et al., 1999; Wass and Leeks, 1999; Freebairn et al., 2009; Van Oost et al., 2009; Duvert et al., 2010), especially where bare or freshly tilled soils are exposed to rainfall-runoff processes (Regan et al., 2012). Arable farming typically involves the mechanical redistribution of soil through ploughing and seed bed preparation, and via erosion from

compacted and/or bare fields and down-slope tramlines (Chambers and Garwood, 2000; Withers et al., 2006; Boardman et al., 2009; Silgram et al., 2010; Regan et al., 2012; Soane et al., 2012). Over-grazed grassland soils are also an ~~increasingly acknowledged~~important sediment source (Bilotta et al., 2010) and critical to the transport of particle-bound pollutants, such as P (Haygarth et al., 2006). Poaching of soils by livestock, particularly cattle wintered outside, results in loss of soil structure and compaction around gates, drinking troughs and, where access is not restricted, channel banks (Trimble and Mendel, 1995; Evans et al., 2006).

Erosion risk is conditioned by physical catchment characteristics (soil type and hydrology), and erodibility determined by ~~physiography~~topography (slope length, steepness and shape, ground cover and soil management). Soil drainage class, for example, is dictated by landscape position ~~whereby~~such that well-drained soils, such as Brown Earths and Podzols commonly located on hillslopes, contribute sediment predominantly through sub-surface pathways such as relocation of fine surface sediments vertically and/or horizontally through the soil profile, preferential flow through macropores (Chapman et al., 2001; Deasy et al., 2009). Conversely, poorly-drained soils, such as Gleys (surface and groundwater) and silt and clay dominated alluvial soils in proximity to watercourses, are at greater risk of overland-flow generation and surface soil erosion due to reduced infiltration capacity. The installation of surface and sub-surface drains ~~can also~~is also suggested to alter natural flow pathways (Ibrahim et al., 2013). Drainage installation and maintenance, for example, can result in faster quick-flow, resulting in an increased likelihood of more frequent, higher magnitude and short duration sediment transfers associated with storm runoff (Wiskow and van der Ploeg, 2003; Deasy et al., 2009; Florsheim et al., 2011).

To accurately quantify sediment fluxes from complex catchments, field monitoring programmes require three considerations. Firstly, robust flow and sediment concentration data capable of accurately describing short-term fluxes (Navratil et al., 2011). ~~Firstly, that flow and sediment concentration data are sufficiently robust; therefore, capable of accurately describing short term fluxes (Navratil et al., 2011).~~ Secondly, the duration of the measurements must be sufficiently long to be 'representative' of either stationary long-term averages (inclusive of natural variability), or to reveal temporal trends of increasing or decreasing loads or concentrations. Capturing crucial high magnitude, low ~~frequency~~recurrence interval events is, therefore, vital to generating meaningful flux determinations (Walling and Webb, 1988; Wass and Leeks, 1999). Thirdly, monitoring programmes need to be operationally cost-effective.

102
103 ~~Sediment load estimation based on In-stream sampling of sediment concentrations using manual depth-~~
104 ~~integrating samplers during selected flow events to establish SSC concentration-discharge rating~~
105 ~~curvesrelationships~~, has been widely superseded by catchment outlet, near-continuous turbidity monitoring
106 (Lewis, 2003; Jarstram et al., 2010; Melland et al., 2012a). The latter requires turbidity sensors, loggers and
107 infrastructure that copes with issues such as debris interference, bio-fouling, power outages and equipment/data
108 security (Wass and Leeks, 1999; Jordan et al., 2007; Owen et al., 2012). Assessment of new monitoring
109 strategies, compared to traditional in situ turbidity-SSC monitoring programmes, is essential to assess
110 improvements, limitations, and validate their implementation.

111
112 There have been relatively few sediment flux investigations in Ireland ([Melland et al., 2012a](#); Harrington and
113 Harrington, 2013; ~~Melland et al., 2012a~~; Thompson et al., 2014). Initially regulated and managed through the
114 Nitrates Directive (OJEU, 1991; 2007), the transfer of diffuse agricultural pollutants across the EU is now
115 primarily integrated into obligations under the WFD. In Ireland, soil conservation issues also fall under the
116 Nitrates Directive regulations, but the impact of SS in rivers is commonly compared to the repealed FFD target
117 due to the absence of explicit sediment targets within the WFD.

118
119 As part of an experiment to evaluate the Nitrates Directive in Ireland, a common experimental design across six
120 agricultural catchments included high temporal-resolution measurements of river nutrient and sediment exports
121 (Wall et al., 2011). Using these catchments and data, the aims of this study were, (1) to assess the efficacy of a
122 novel ex situ SS monitoring technique in two catchments, and (2) to investigate annual average sediment
123 concentrations and loads in relation to soil drainage class and land use in five monitored catchments. One
124 catchment, situated in low-relief karst terrain was omitted from this study due to intermittent runoff combined
125 with very low SS concentrations (cf. Mellander et al., 2012).

126

127

2.1.1 Study location

Suspended sediment monitoring was conducted in five catchments (Table 1) across Ireland (Fig. 1). Catchments were selected to represent the main intensive agricultural land use types in Ireland, dominant hydrological pathways (surface or sub-surface) at a scale where headwater to channel hydrological process were detectable (Fealy et al., 2010). The characteristics of individual catchments which are summarised as follows:

Grassland A catchment (7.9 km²) is located in south-west Ireland (51°38'N 8°47'W). Catchment soils are predominantly shallow well-drained Brown Earths and Podzols with loam dominating the texture of A- and B-horizons, and smaller areas of sSurface-water Gleys at the base of hillslopes. A coarse loamy drift with siliceous stone subsoil Soils isare underlain by Devonian old red sandstones and mudstones from the Toe Head and Castlehaven formations (Sleeman and Pracht, 1995), which form an unconfined productive aquifer (Mellander et al., 2014). Sub-surface water pathways are therefore dominant. Land management is predominantly grazed intensive by cattle for intensive dairy production and smaller areas of beef production with an average catchment stocking rate of 1.98 livestock units (LU) ha⁻¹ dairy, with some beef production and additionally minor areas of arable land use are present (Table 1).

Formatted: Superscript

Grassland B catchment (11.0 km²) is located in south-east Ireland (52°36'N, 6°20'W). Soil type is predominantly poorly-drained Groundwater Gleys in the catchment lowlands with a clay loam texture in A- and B-horizons resulting from a clayey calcareous Irish Sea till subsoil. The uplands contained smaller areas of well-drained Brown Earths, confined to the upper catchment, these soils are underlain by drift deposits with siliceous stones. The underlying geology is permeable, dominated by Ordovician volcanics and metasediments of the Campile formation (Tietzsch-Tyler et al., 1994), which form a productive aquifer with faults (Mellander et al., 2012). Artificial drainage is a key feature including open drains, defined here as ditches, and closed, sub-surface piped drains (predominantly 80 mm diameter). Grassland B is considered to be dominated by overland flow pathways (Shore et al., 2013; Mellander et al., 2012; Shore et al., 2013) except for areas of well-drained soils featuring sub-surface transport pathways. Land management is predominantly grass-based with for dairy, and beef cattle grazing, and also sheep enterprises (Shore et al., 2013) with stocking rate of 1.04 LU ha⁻¹. Arable crops such as spring barley are common on the well-drained soils which are unmanaged between harvest and ploughing for following crop.

Formatted: Superscript

158 Grassland C catchment (3.3 km²) is located in north-~~east-central~~ Ireland (54°~~40~~¹'N, 6°51'W). Soils are mainly
159 deep and moderate- to poorly-drained characterised by a loam A-horizon texture and clay loam B-horizon, and
160 areas of shallow well-drained soils in the upper catchment areas ~~underlain predominately by Lower Palaeozoic~~
161 ~~shale tills~~. The geology is Silurian metasediments and volcanics of the Shercock Formation (Geraghty et al.,
162 1997), which create an unproductive aquifer. Overland flow and near-surface pathways are, therefore, dominant
163 here. Land use is principally grass-based for dairy ~~cattle~~, sheep and beef ~~cattle grazing~~ (~~stocking rate 1.00 LU~~
164 ~~ha⁻¹~~).

Formatted: Superscript

166 Arable A catchment (11.2 km²) is located in south-east Ireland (52°34'N, 6°36'W). Soils are predominantly
167 shallow well-drained Brown Earths with loam texture dominating the A- and B-horizons, and limited areas of
168 poorly-drained Groundwater Gleys around the stream corridor to the east of the catchment (Melland et al.,
169 2012a). ~~Subsoils predominantly comprise fine loamy drift with siliceous stones over~~~~Geology comprises~~ slate
170 and silt stones of the Oaklands Formation (Tietzsch-Tyler et al., 1994), which produces a poorly-productive
171 aquifer. The well-drained soils result in below-ground hydrological transfers, particularly bedrock fissure-flow
172 (Mellander et al., 2012). Artificial drainage is limited to the poorly-drained soil areas and comprises of open
173 ditches and sub-surface piped drainage. Land ~~use~~ is dominated by spring barley (~~land is unmanaged between~~
174 ~~cropping cycles and crop rotation is limited~~) with areas of permanent grassland for beef ~~cattle~~ and sheep ~~grazing~~
175 in more poorly-drained areas (Melland et al., 2012a) ~~at 0.40 LU/ha~~.

177 Arable B catchment (9.5 km²) is located in ~~north-east-central~~ Ireland (53°49'N, 6°27'W). The soil type is a
178 complex pattern of poor- to moderately-drained soils (Melland et al., 2012a). Loam soil texture dominates the
179 A-horizon and clay loams are dominant in the B-horizon. ~~Subsoil is dominated by fine till containing siliceous~~
180 ~~stones with fluvioglacial sediments located near-channel~~. Soils are underlain by calcareous greywacke and
181 banded mudstone geology (McConnell et al., 2001) and produce a poorly productive aquifer (Mellander et al.,
182 2012). Hydrologically, surface pathways dominate; however, below-ground pathways may also be important
183 especially during winter (Melland et al., 2012a; Mellander et al., 2012). Artificial drainage is dominant,
184 particularly in the poorly-drained catchment areas. Arable land is dominated by winter-sown cereals, but also
185 comprises maize and potatoes. ~~These areas are unmanaged between cropping cycles; however, crop rotation is~~
186 ~~more common than at Arable A due to the wider range of crop types~~. Additional areas of permanent grassland
187 are utilised for dairy ~~cattle~~, beef ~~cattle~~, and sheep ~~grazing~~ (~~0.77 LU ha⁻¹~~).

Formatted: Superscript

23 Materials and methods

23.1 Suspended sediment monitoring

Monitoring for SS at catchment outlets was initiated in 2009 for Grassland B, Arable A and Arable B catchments and 2010 for Grassland A and Grassland C catchments. All catchments had identical instrumentation deployed for temporally high-resolution nutrient, conductivity, temperature and turbidity data capture using bankside analysers mains powered at 230V (Fig. 2 - Wall et al., 2011; Jordan et al., 2012; Melland et al., 2012b). Turbidity (T) data were collected using a turbidity sensor (Solitax, Hach-Lange, Germany; range 0-4000 NTU; factory calibrated to 1000 NTU) and SC1000 controller at 10 min intervals. The sensors were located out-of-stream (ex situ) in a rapidly and continuously circulating header tank (~~30 m³ hr⁻¹~~) with river water delivered from the channel by an in-stream pump (30 m³ hr⁻¹) located on the channel bed. The instrument tank was assumed well-mixed as no particulate deposition occurred. Turbidity probes were fitted with wipers to prevent biological fouling, and checked monthly against deionised water (0 NTU) and a 20 NTU Formazin turbidity standard. Synchronised discharge data ($Q - m^3 s^{-1}$) were calculated from ~~converted~~-vented pressure-transducer stage measurements (OTT Orpheus-mini; OTT Germany). Stage height was converted to Q using velocity-area measurements (OTT Acoustic Doppler Current meter; OTT Germany)-rated-collected over non-standard flat-v weirs (custom made, Corbett Concrete, Ireland) and -WISKI-SKED software (Grassland A, $R^2=0.96$, n=272; Grassland B, $R^2=1$, n=166 (Mellander et al., 2015); Grassland C, $R^2=0.95$ and 0.97 , n=316; Arable A, $R^2=1$, n=376 (Mellander et al., 2015); Arable B, $R^2=0.94$ and 1 , n=493). Both Grassland C and Arable B had changing controls at higher discharges and WISKI-SKED provided two parts to the curves with two R^2 coefficients.

Turbidity units (NTU) were field-calibrated to SSC ($mg L^{-1}$) using a combination of regular low-flow samples (at least fortnightly since programme initiation) and intensive sampling during-~~discrete~~, high magnitude flow events with elevated SSCs. In all cases, water samples were collected from the instrument tank either manually, or using a programmable automatic water sampler (ISCO 6712; ISCO Inc. USA) with 1 m pumping tube (pump capacity $\sim 0.9 m^3 s^{-1}$) at predefined intervals of 30- or 60-mins according to the specific storm characteristics. High SSC data capture was further targeted in Grassland B and Arable B using a turbidity-stratified sampling programme, whereby collection of 1000 ml samples were triggered when T measurements were within threshold turbidity bands of 140 to 160 NTU, 240 to 260 NTU, 480 to 530 NTU and 700 to 800 NTU. ~~this~~ This circumvented~~ing~~ the need to pre-set water samplers according to forecasted event characteristics. Water samples were stored at 4°C on return to the laboratory before a sub-sample (minimum 100 ml) was processed for SSC.

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Font: (Default) Times New Roman, 10 pt

218 Whatman GF/C glass-fibre filter papers (1.2 μ m) were pre-dried at 105°C for 1 hr, cooled in a desiccator and
219 weighed before being used for vacuum filtration. Sediment concentrations were calculated from the weight of
220 residue retained on the filter post-filtration once dried >12 hr at 105°C and cooled in a desiccator.

221

222 23.2 Method comparison

223 In order to compare the ex situ sampling methodology described above with the conventional in situ monitoring
224 approach, additional instrumentation to measure T was installed in Grassland B and Arable B from September to
225 December 2012, and December 2012 to March 2013 respectively. A turbidimeter (T_{IN}) (Analite, McVan,
226 Australia, range 0-1000 NTU) fitted with a wiper blade to prevent biological fouling and automatic pumping
227 sampler ($ISCO_{IN}$) intake were positioned in situ, adjacent to the channel edge, in proximity to the bankside
228 analyser pump intake (1 m and 4 m upstream, respectively in both catchments), but sufficiently distant not to
229 affect, or to be affected by the ex situ instrumentation. The turbidity sensor T_{IN} and the $ISCO_{IN}$ intake at
230 Grassland B were approximately 20 cm above the channel bed and 15 cm from the bank edge. At Arable B, T_{IN}
231 and the $ISCO_{IN}$ intake were positioned approximately 10 cm from the bank edge and 10 cm above the channel
232 bed. T_{IN} and $ISCO_{IN}$ sample collection was synchronised to replicate the ex situ turbidity sensor (T_{OUT}) and
233 pumping sampler ($ISCO_{OUT}$) programme as described above. T-SSC rating curves were developed for each
234 sensor using water samples collected at the respective positions ($ISCO_{OUT}$ and $ISCO_{IN}$) and applied to the raw
235 turbidity set. Low quality data capture attributed to spurious readings (a short-term increase in T output not
236 associated with a known environmental process such as an accompanying rise in Q or equipment maintenance),
237 saturation of the T_{IN} sensor or missing data at T_{OUT} due to delivery system blockages did not undergo correction
238 such that comparisons between methodologies could be made. Five storm-flow events were captured in
239 Grassland B and two in Arable B for T-SSC calibration. Due to the location settings, the in situ automatic water
240 sampler was fitted with a 7 m long intake tube in both catchments.

241

242 Depth integrated water samples were manually collected (n=~~225~~171) from a bridge over each investigated
243 channel during flood events, using a depth-integrating SS sampler (US DH-48, Rickly Hydrological; USA).
244 These samples were used firstly to investigate the cross-sectional variability in sediment transportation, and
245 secondly to provide a validation dataset to assess and compare the efficacy of estimated SSC using at in situ and
246 ex situ T sensors. Samples were collected using two strategies; 1) depth-integrated samples taken at 20 cm
247 intervals across the channel width in rapid succession, and 2) samples taken at coarser widths roughly 1 m

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

248 ~~intervals and multiple depth positions~~. All samples were processed for SSC as described above. Due to the
 249 sampling approach used, consecutive depth-integrated samples reflected the event trend (either the rising or
 250 falling sedigraph limb) plus the cross-sectional trend. The event effect was de-trended using SSC estimated from
 251 the ex situ turbidimeter. The average change in SSC during transect sampling at T_{OUT} was 16.3 mg/l (range 0.1 –
 252 81.94 mg/l), average transect time was 22 mins.

Formatted: Subscript

253
 254 Where sufficient sample volume and sediment concentration existed, samples were analysed for particle size
 255 distribution using laser diffraction (Malvern Mastersizer 2000G, Malvern, UK). Samples were circulated for 2
 256 min (pump speed 2000 rpm, stirrer speed 800 rpm) before analysis with no pre-treatment, i.e., physical or
 257 chemical dispersant, to broadly replicate the ‘effective particle size’ measured by the turbidity sensor. To assess
 258 the effect of automatic sampler tube length, laboratory prepared SSC samples were collected using the two
 259 intake pump lengths (1 m and 7 m) used in-field. Ten 500 ml sub-samples (at 5-, 10-, 25-, 50-, 100-, 250-, 500-,
 260 750- and 1000-mg L⁻¹) were collected from homogenised 10 litre mixtures using each pump length and
 261 processed for SSC. A non-parametric Mann-Whitney U-test was conducted to compare SSC values collected at
 262 ISCO_{IN} (SSC ISCO_{IN}) and ISCO_{OUT} (SSC ISCO_{OUT}), and particle size characteristics at the two study sites.

264 2.3 Suspended sediment rating curve construction

265 Data pairs for T-SSC calibration for each individual site (each catchment outlet over complete time series) and
 266 method comparison investigations were statistically assessed using SAS 9.3 (SAS Institute Inc., USA). Two
 267 regression equations; power (Eq. 1) and split linear (Eq. 2), were assessed using the mean square error (MSE) of
 268 the SSC predictions.

269	Power	$SSC = aT^b$	Eq. 1
-----	-------	--------------	-------

270	Split linear	Where $T < n$ $SSC = aT$	Eq. 2
-----	--------------	--------------------------	-------

$$\text{Where } T > n \quad SSC = c(b_1 - b_2) + b_2T$$

271 The intercept was set at zero for all regressions and was considered not to compromise fit at the upper end of the
 272 dataset (cf. Thompson et al., 2014). Power relationships provided the best fit in Grassland A, Grassland B,
 273 Grassland C and Arable A, whereas the split linear relationship considerably improved fit at Arable B (Table 2).

274 Using the selected curves, continuous turbidity measurements were computed to SSC and, using discharge data,
 275 were converted to instantaneous sediment load ($SSL - t \text{ s}^{-1}$) and yield ($SSY - t \text{ km}^{-2} \text{ yr}^{-1}$).

276 | 34 Results and discussion

277 | 34.1 Method comparison

278 | Dataset completeness was similar in both T records (98-99%); however, the timing and nature of spurious
279 | and/or missing T data were dissimilar (Fig 3). Spurious data at T_{IN} coincided with random peaks possibly
280 | relating to local debris interference around the sensor which is a frequent problem in T analysis (Lewis and
281 | Eads, 2001). This trend was not recorded at T_{OUT} , suggesting that the ex situ approach was less vulnerable to
282 | local in-stream debris interference (Jansson ~~et al.~~, 2002). Missing data at T_{IN} during periods of high sediment
283 | concentration was attributed to sensor saturation at Arable B-. The T_{OUT} probe estimated 5% of the total
284 | sediment load was delivered whilst T_{IN} was saturated. Sporadically, pump blockages occurred in T_{OUT} at Arable
285 | B due to extreme debris transport in the channel (Melland et al., 2012b)-. data collection was ordinarily restored
286 | in less than 2 hr. At T_{IN} , 6% of the total load was delivered during this period. The ex situ turbidity monitoring
287 | may be at greater risk of delivery system blockages, especially during key periods of elevated turbidity and
288 | sediment transfer. These short periods are critical for sediment transport as they are responsible for the majority
289 | of the annual sediment load (Walling and Webb, 1988; Lawler et al., 2006; Estrany et al., 2009; Navratil et al.,
290 | 2011). Other key issues such as bio-fouling trends were not found in either dataset, reflecting the sub-weekly
291 | frequency of maintenance at these sites.

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

292 |
293 | Estimated sediment metrics (Table 23) during both monitoring periods showed discrepancies between the two
294 | measurement locations. Suspended sediment load estimated by ex situ equipment was 83% and 91% of in situ at
295 | Grassland B and Arable B, respectively, and mean SSC at SSC_{OUT} was 85% of SSC_{IN} at both locations.
296 | Differences in raw T output between the sensors were negated by calibration with SSC; however, the SSC of
297 | water samples from in situ ($SSC_{ISCO_{IN}}$) and ex situ ($SSC_{ISCO_{OUT}}$) measurement locations showed consistent
298 | differences. Samples at $SSC_{ISCO_{OUT}}$ were 90% and 94% of $SSC_{ISCO_{IN}}$ at Grassland B and Arable B
299 | catchments respectively. The differences in SSC and loads between the two approaches was not statistically
300 | significant, as confirmed by the non-parametric Mann-Whitney between $SSC_{ISCO_{OUT}}$ and $SSC_{ISCO_{IN}}$
301 | ($p>0.05$).

302 |
303 |
304 | Particle size analysis of event samples showed that the proportion of silt and sand particles changed through the
305 | events, whereas clay remained consistent. The greater density of sand particles compared to silts and clays;

~~can be suggested to greatly~~ impact SSC, and ~~are also suggested to~~ be oversampled by pumped samples such as the ISCO_{IN} approach (Horowitz, 2008). The percentage of sand (or sand-sized aggregates) between SSC ISCO_{IN} and SSC ISCO_{OUT} did not differ significantly ($p > 0.05$). Additionally, the ratio of the sand-sized fraction between simultaneous samples at ISCO_{IN} and ISCO_{OUT} showed no consistent evidence of over- or under-collection by either collection method. The hypothesis that inadequate sample collection ~~using either method~~ could affect ~~the differences between~~ SSCs at ISCO_{IN} and ISCO_{OUT} is unlikely, as contrasts between the sand-sized fractions seemed to be event specific. ~~The proportion of sand-sized material collected at both ISCO_{IN} and ISCO_{OUT} was negatively related to Q which differs from the positive relationship found elsewhere (Grangeon et al., 2012).~~

Formatted: Subscript

Formatted: Subscript

Differences between SSC ISCO_{IN} and SSC ISCO_{OUT} could not be directly attributed to diverging particle-size of the collected samples ($p > 0.05$), or the pump length of the water sample collection ($p > 0.05$ - Fig 4), or the position of the sample intake within the cross section (Fig 5). It is possible that the proximity of the ISCO_{IN} pump intake to the channel bank could influence the relationship; however, differences could additionally result from methodological dissimilarities which could not be tested in isolation, i.e. the piped-delivery of river water to the ex situ instrument tank. The impact of elevated SSCs from ISCO_{IN}, compared to ISCO_{OUT} on the calibration of turbidity sensors T_{IN} and T_{OUT}, and the consequential prediction of high-resolution turbidity-based SSC record is discussed below.

3.2 Method validation

Samples collected from the channel cross-section were used to test the accuracy of predicted SSC using calibrated turbidity sensors at in situ and ex situ locations. The average SSC from each cross-sectional, depth-integrated set of measurements was plotted onto the rating curve over the method comparison monitoring period (Fig. 62). At Grassland B, measured SSCs plot within the 95% confidence intervals of predicted SSC using both methodologies using the simultaneous T values. This trend is repeated for the majority of samples at Arable B; ~~although however~~, some data points plot outside of the 95% confidence intervals for both in situ and ex situ method datasets. In the case that these out of range values were consistently higher or lower than the predicted values, this may suggest a systematic error due to sampling strategy; however, both upper and lower confidence limits were exceeded by the SSC values (Fig. 62c and 62d). Therefore, the error associated with the measurement method was generally less than that encapsulated within the 95% prediction intervals of the T to

SSC calibration curve and consequently, both measurement approaches can be accepted as accurate for the estimation of SS metrics in these catchments. The suitability of ex situ water monitoring equipment installation must consider programme specific research objectives. Melland et al. (2012b) stated that for policy evaluation studies including multiple water quality parameters in addition to SSC, the improved resolution, accuracy and precision, in particular for hydrologically dynamic catchments, justified the increased financial costs of initial installation of ex situ instrumentation.

3.3 Suspended sediment metrics in five agricultural catchments

High magnitude SSCs were of short duration in all five catchments (e.g. Fig 3 for Grassland B and Arable B) (Fig. 3), but such periods are typically critical to cumulative annual SSY (Fig. 7b - Walling and Webb, 1988; Navratil et al., 2011). Grassland B and Arable B had a large proportion (80% of the monitoring period) of sediment transported at SSCs between 1 and 10 mg L⁻¹, and shorter periods of concentrations ≥10 mg L⁻¹ for 15% and 20% of the monitoring period respectively (Fig. 37). In the remaining catchments, low concentrations of <1 mg L⁻¹ were more common and occurred ~~between 25 and 40% over 50%~~ of the time. High concentrations (≥10 mg L⁻¹) were limited to ~~less than only~~ 10% of the monitoring period. Overall, however, the FFD average annual SSC guideline was not exceeded in any monitoring year in any of the catchments (Table 43). The highest mean SSC of up to 17 mg L⁻¹ was recorded at Grassland B and Arable B and the remaining catchments reported very low values of <6 mg L⁻¹. Accordingly, the instantaneous exceedance of the FFD guideline (Table 43) occurred during extremely short time periods (1-11% of sampled time per year). The values here are similar to those reported by Thompson et al. (2014) in two other ~~intensively managed~~~~predominantly improved~~ grassland catchments in Ireland; 8% exceedance was reported in a moderately-drained catchment in Co. Down and 18% exceedance in a poorly-drained catchment in Co. Louth. Although ~~the~~ instantaneous ~~exceedance of the~~ FFD ~~exceedance~~ metrics have been reported in other sediment studies (Glendell et al., 2014; Peukert et al., 2014; Thompson et al., 2014), the transferability of ~~this~~~~such~~ coarse thresholds (compliance to which requires an undefined annual sample number) to high-resolution SS data is questionable.

Average SSYs in the five catchments were 8.5, 24.7, 11.6, 12.0 and 24.4 t km⁻² yr⁻¹ at Grassland A, Grassland B, Grassland C, Arable A and Arable B respectively. Figure 48 illustrates average annual SSYs from Ireland, the United Kingdom (UK) and the wider Atlantic climatic region of Europe (Vanmaercke et al. 2011). The variability of average SSYs may be partly described by catchment size (x axis) but, furthermore, according to

physical attributes such as soil type which controls soil erodibility Values from catchments assessed in this study. These values align with existing data on SSY in Ireland (cf. Huang and O'Connell, 2000; Jordan et al., 2002; Harrington and Harrington, 2013; Thompson et al., 2014), and are consistently low compared with the UK and Europe. Considering the agricultural intensity of these catchment, (for example, Grassland A is within the highest region of milk yield in Ireland (Läppe and Hennessy, 2012), and crop yields across Ireland are internationally high (Melland et al., 2012a)), these values are particularly low.

Catchment observations suggest high landscape complexity, comprising small and irregularly shaped fields, separated by a dense network of hedgerows and vegetated ditches (Table 1) reduced water and sediment connectivity potential between hillslopes and the channel network. Efficient drainage can be considered to reduce the spatial extent and temporal stability of connected areas and, considering the over-engineered nature of these ditch networks, encouraged sediment deposition (Shore et al., 2014). Furthermore, lower slope-lengths reduce the hillslope erosion potential (Lal, 1988), and sediment trapping and soil erosion prevention by root binding of hedgerows was observed.

In the UK, Cooper et al. (2008) suggested annual average 'target' and threshold 'investigation' SSY values be based upon drainage class and catchment terrain characteristics. Grassland A and Arable A qualify as lowland well-drained catchments and, on average, fall well below target and investigation SSY of 20 and 50 t km⁻² yr⁻¹ respectively. Grassland B, Grassland C and Arable B, categorised as lowland predominantly poorly-drained catchments, on average, fall below target and investigation thresholds of 40 and 70 t km⁻² yr⁻¹, respectively. Total SSY data for individual years (Table 43), however, indicate variability and exceeded respective SSY target values at: Grassland B in 2009 and 2012, Arable A in 2012 and Arable B in 2011 and 2012.

Higher average SSC, intra-annual period of FFD exceedance, and average SSY in catchments Grassland B and Arable B are suggested to result from poorer soil drainage. During rainfall events, soils are rapidly saturated and critical overland flow pathways established, and consequently, eroded particles within these connected areas are transported through the catchment (Mellander et al., 2012; Shore et al., 2013). The SSC responses here suggest, as in other catchments with impeded drainage, that high overland-flow potential is also associated with a notable proportion of sediment delivered at lower concentrations over a longer period, through surface and sub-surface flow pathways such as through macropores and tile drains (e.g., Deasy et al., 2009; Melland et al., 2012a).

[Ibrahim et al., 2013 Mellander et al., 2015](#)) resulting in increased average SSCs. In catchments Grassland A and Arable A, sub-surface flow pathways dominate, due to well-drained soils reducing the likelihood of overland flow and consequently surface soil losses. [Furthermore, at Arable A, Mellander et al., \(2015\) found weather bedrock formed groundwater pathways further decreasing surface pathway initiation.](#) Consequently, SSCs, intra-annual period of FFD exceedance, and SSYs were low. Conversely, Grassland C more accurately reflects the sediment characteristics of the well-drained catchments despite the moderate- to poorly-drained soils. Near complete cover of permanent pasture here was considered to sufficiently reduce sediment source availability and transport of sediment to the watercourse.

Generalisations can be made in relation to the overriding controls on SSY across the monitored catchments (Fig. [59](#)). Inter-catchment comparisons [here](#) used data from hydrological years 2010 to 2013, where data were available for all five catchments. Sediment delivery was enhanced by the combined effect of an overland-flow dominated transport system (poorly-drained soils) and, to a lesser extent, source availability (arable soils with potentially lengthy periods of bare ground cover [\(Regan et al., 2012\)](#) or seasonally thinly vegetated grassland soils [\(cf. Bilotta et al., 2010\)](#)). Catchments that possess better drainage characteristics and/or permanent crop cover have greater resilience to extreme sediment losses. In catchments such as Arable A, where good-drainage is combined with high source availability, the risk associated with sediment transport during extreme rainfall events and years was, ~~nevertheless~~[however](#), high. Similarly, poorly-drained soils stabilised by permanent pasture should be maintained and periods of bare cover should be avoided.

High inter-annual variability was evident, particularly with regard to SSY (Table [43](#)). The annual SSY [coefficient of variation \(CV%\)](#) were 67%, 76%, 79%, 83% and 50% in Grassland A, Grassland B, Grassland C, Arable A and Arable B, respectively. Notably, in Grassland B and Arable B catchments, the inter-annual SSY ranges of 41.7, and 26.2 t km⁻² yr⁻¹, respectively, were greater than average annual inter-catchment SSY of 24.0 t km⁻² yr⁻¹. The variability found within each of the five monitoring catchment was comparable to the results of Vanmaercke et al., (2012) who reported CV% ranging from 6-313% (median 75%) in 726 catchments worldwide. The catchment with the lowest inter-annual SSY (11.0 t km⁻² yr⁻¹), Grassland A, received the least variable rainfall input and total discharge.

425 Inter-annual SSY variability results from strong seasonality ~~combining due to~~ the timing and character of
426 rainfall events, ~~in relation to~~ soil moisture deficit and land management, ~~this in turn~~ which conditions sediment
427 availability in critical source areas. Analysis of shorter term sediment losses i.e., at seasonal, monthly and event
428 scales would also provide empirical evidence to inform both high level policy considerations and local decision
429 making. Additionally, assessment of seasonal transfers are likely to have greater ecological significance as mean
430 annual thresholds such as SSC (through the FFD), and SSY may underestimate the seasonality fluctuations of
431 risk of sediments to aquatic ecosystems (Thompson et al., 2014). Sensitivity to sediment is species-specific and
432 dependent upon life stage (Collins et al., 2011); therefore, shorter-term metrics such as the timing, magnitude,
433 duration and frequency of sediment transfers are important concepts to consider. Existing static thresholds may,
434 therefore, be considered ecologically irrelevant, particularly when utilised as an instantaneous threshold for
435 high-resolution data. Future discussion regarding sediment targets requires an assessment of multiple species
436 and habitat quality. This task is particularly complicated where ecological condition is subject to multiple-
437 stressors such as nutrients (Bilotta and Brazier, 2008), bed substrate quality (Kemp et al., 2011) and time lag of
438 water quality response to pollutant mitigation measures (Fenton et al., 2011; Vero et al., 2014).

439
440 Overall, ~~the~~ annual average sediment metrics ~~reported here~~ from small catchments (~10 km²) with dominant land
441 uses representative of main land use types in Ireland reported here are internationally low. Considering the
442 spatial dominance and intensity of agricultural land use and high effective rainfall in the study catchments, this
443 is perhaps unexpected particularly considering the small scale of study. As previously discussed, the complexity
444 of landscape features (e.g., fields, hedgerows, ditches) which are representative of the wider Irish agricultural
445 landscape (Deverell et al., 2009) can be expected to decrease the likelihood of field-scale soil erosion, and/or
446 increase the opportunity for interception and deposition of mobile particles, ~~i.e., reducing the sediment delivery~~
447 ~~ratio by retaining sediment on the~~ land or within the hydrological network ~~(Borselli et al., 2008)~~. The Irish
448 landscape may, therefore, improve the resilience of agricultural soils to soil loss. However, even ~~with from~~
449 modest SSY, the potential for other specific risks to ecologically sensitive habitats, from SS deposition in rivers
450 for example, will need a cautionary approach. Therefore, identification of the specific mechanisms promoting
451 soil conservation or sediment retention in multiple catchments with contrasting physical and land use
452 characteristics is will be important. This is particularly relevant for water and agricultural policy, as the
453 prevention of environmental degradation and maintenance and/or sustainable intensification of agricultural
454 production are simultaneously considered. Furthermore, other sediment sources, for example, from channel

Formatted: Superscript

455 banks and road networks may contribute significant proportions of the annual load (Collins et al., 2013; Rowan
456 et al., 2012; Sherriff et al., 2014). Assessment of such sources could be a useful insight to prioritise sediment
457 management strategies (Wilson et al., 2008).

458 | ~~45~~ Conclusions

459 | This study assessed the accuracy and reliability of an ex situ, turbidity-based methodology to estimate
460 | suspended sediment fluxes in multiple monitored catchments. Applying the method, annual SSC, FFD
461 | exceedance and SSY data in five catchments were further investigated in relation to physical catchment
462 | characteristics and land management. The key findings ~~are~~were:

- 463 | • Suspended sediment metrics between in situ and ex situ methodologies were not significantly different
464 | from in-stream cross-sectional, depth-integrated samples in two monitoring catchments.
- 465 | • The ex situ methodology reported less sensitivity to spurious data peaks; however, periods of extreme
466 | large debris transport increased the sensitivity of the ex situ instrumentation to short-term blockages.
- 467 | • All catchments reported mean annual SSCs of less than the FFD threshold of 25 mg L⁻¹ and short-term
468 | exceedance of 1-11% of sampled time.
- 469 | • Inter-annual variability of SSY was strong due to the ~~seasonality of~~ timing and character of rainfall
470 | events in relation to land management.
- 471 | • Average annual SSYs in all five Irish catchments reported here were low in comparison to ~~equivalent~~
472 | ~~catchments~~ similar catchments and landscape settings elsewhere in Europe. Farming practices
473 | favouring relatively small fields, a high density of field boundaries including ditches, with low
474 | consequent connectivity are likely to explain this.
- 475 | • Within the study catchments, SSY was higher in catchments dominated by poorly-drained soils than
476 | those with well-drained soils. Furthermore, on poorly-drained soils, catchments ~~coincident~~ with a
477 | greater proportion of arable land use reported the highest annual average SSY.
- 478 | • ~~The sediment loss risk on w~~Well drained soils dominated by arable crops did, however, show the
479 | potential to supply significant quantities of sediment ~~when extreme climatic conditions coincided with~~
480 | ~~bare soils.~~
- 481 | • Complexity of ~~the~~ landscape features (hedgerows, drainage ditches and irregular field sizes) may
482 | provide resilience to soil erosion and/or sediment transport despite spatial dominance and intensity of
483 | agriculture and these will be important considerations for future management (such as sustainable
484 | intensification) and/or SS mitigation in Ireland and elsewhere.

485 |
486 | These findings illustrate that interactions between climate, landscape and land use regulate the supply of
487 | sediments from Irish agricultural catchments. Whilst the current SSYs are low by international standards, key

questions still remain regarding the impact of land use on the magnitude and frequency characteristics of sediment transfers at shorter timescales. ~~This includes both~~ Seasonal and storm-event scale sediment transfers ~~may better, which are important to~~ inform erosion risk ~~due~~ and to better detection of sediment pulses moving into the channel network particularly within ecologically sensitive periods. Further to this, seasonal sediment provenance and field-scale soil loss assessments within this land management and landscape framework are crucial to quantify the contributions made from specific agricultural and other sediment sources.

Acknowledgements

This study was funded by the Walsh Fellowship Programme, Teagasc, Ireland allied to the University of Dundee, UK, and the Teagasc Agricultural Catchments Programme (funded by the Department of Agriculture, Food and the Marine, Ireland). We thank Hugo McGrogan (Ulster University) for supplying and programming additional turbidity and pump-sampling equipment and Agricultural Catchments Programme colleagues for technical support. We finally acknowledge support from the farmers and landowners of the study catchments and two anonymous reviewers for comments on this manuscript.

503 References

- 504 Bilotta, G. S., and Brazier, R. E.: Understanding the influence of suspended solids on water quality and aquatic
505 biota, *Water Res.*, 42, 2849-2861, 2008.
- 506 Bilotta, G. S., Krueger, T., Brazier, R. E., Butler, P., Freer, J., Hawkins, J. M. B., Haygarth, P. M., Macleod, C.
507 J. A., and Quinton, J. N.: Assessing catchment-scale erosion and yields of suspended solids from improved
508 temperate grassland, *J. Environ. Monit.*, 12, 731-739, 2010.
- 509 Boardman, J., Shephard, M. L., Walker, E., and Foster, I. D. L.: Soil erosion and risk-assessment for on- and
510 off-farm impacts: A test case using the Midhurst area, West Sussex, UK, *J. Environ. Manage.*, 90, 2578-2588,
511 2009.
- 512 Borselli, L., Cassi, P., and Torri, D.: Prolegomena to sediment and flow connectivity in the landscape: A GIS
513 and field numerical experiment, *Catena*, 75, 268-277, 2008.
- 514 Brils, J.: Sediment Monitoring and the [European](#) Water Framework Directive, *Annali dell'Istituto Superiore di*
515 *Sanita* 44, 218-223, 2008.
- 516 Chambers, B. J., and Garwood, T. W. D.: Monitoring of water erosion on arable farms in England and Wales.
517 1990–94, *Soil Use Manag.*, 16, 93-99, 2000.
- 518 Collins, A. L., and Anthony, S. G.: Assessing the likelihood of catchments across England and Wales meeting
519 ‘good ecological status’ due to sediment contributions from agricultural sources, *Environ. Sci. Policy*, 11, 163-
520 170, 2008.
- 521 Collins, A. L., Naden, P. S., Sear, D. A., Jones, J. I., Foster, I. D. L., and Morrow, K.: Sediment targets for
522 informing river catchment management: international experience and prospects, *Hydrol. Process.*, 25, 2112-
523 2129, 2011.
- 524 Collins, A. L., Williams, L. J., Zhang, Y. S., Marius, M., Dungait, J. A. J., Smallman, D. J., Dixon, E. R.,
525 Stringfellow, A., Sear, D. A., Jones, J. I., and Naden, P. S.: Catchment source contributions to the sediment-
526 bound organic matter degrading salmonid spawning gravels in a lowland river, southern England, *Sci. Total*
527 *Environ.*, 456–457, 181-195, 2013.
- 528 Cooper, D., Naden, P., Old, G., Laizé, C.: Development of guideline sediment targets to support
529 management of sediment inputs into aquatic systems, Natural England Research Report NERR008,
530 CEH Wallingford, pp. 96, 2008.
- 531 Deasy, C., Brazier, R. E., Heathwaite, A. L., and Hodgkinson, R.: Pathways of runoff and sediment transfer in
532 small agricultural catchments, *Hydrol. Process.*, 23, 1349-1358, 2009.

533 Duvert, C., Gratiot, N., Evrard, O., Navratil, O., Némery, J., Prat, C., and Esteves, M.: Drivers of erosion and
 534 suspended sediment transport in three headwater catchments of the Mexican Central Highlands, *Geomorphol.*,
 535 123, 243-256, 2010.
 536 Estrany, J., Garcia, C., and Batalla, R. J.: Suspended sediment transport in a small Mediterranean agricultural
 537 catchment, *Earth Surf. Process. Landf.*, 34, 929-940, 2009.
 538 Evans, D. J., Gibson, C. E., and Rossell, R. S.: Sediment loads and sources in heavily modified Irish
 539 catchments: A move towards informed management strategies, *Geomorphol.*, 79, 93-113, 2006.
 540 Fenton, O., Schulte, R.P.O., Jordan, P., Lalor, S.T.J., Richards, K.G.: Time lag: a methodology for estimation of
 541 vertical and horizontal travel and flushing timescales to nitrate threshold concentrations in Irish aquifers,
 542 *Environ. Sci. Policy*, 14, 419-431, 2011.
 543 Florsheim, J. L., Pellerin, B. A., Oh, N. H., Ohara, N., Bachand, P. A. M., Bachand, S. M., Bergamaschi, B. A.,
 544 Hernes, P. J., and Kavvas, M. L.: From deposition to erosion: Spatial and temporal variability of sediment
 545 sources, storage, and transport in a small agricultural watershed, *Geomorphol.*, 132, 272-286, 2011.
 546 Foster, I.D.L., Dearing, J.A., and Appleby, P.G.: Historical trends in catchment sediment yields: a case study
 547 from lake-sediment records in Warwickshire, UK, *Hydrolog. Sci. J.*, 31, 3, 427-443, 1986.
 548 Foster, I., Collins, A., Naden, P., Sear, D., Jones, J., and Zhang, Y.: The potential for paleolimnology to
 549 determine historic sediment delivery to rivers, *J. Paleolimnol.*, 45, 287-306, 2011.
 550 Freebairn, D.M., Wockner, G.H., Hamilton, N.A., and Rowland, P.: Impact of soil conditions on hydrology and
 551 water quality for a brown clay in the north-eastern cereal zone of Australia, *Aust. J. Soil Res.*, 47, 389-402,
 552 2009.
 553 Gay, A., Cerdan, O., Delmas, M., and Desmet, M.: Variability of suspended sediment yields within the Loire
 554 river basin (France), *J. Hydrol.*, 519, 1225-1237, 2014.
 555 Geraghty, M., Farrelly, I., Claringbold, K., Jordan, C., Meehan, R., and Hudson, M.: Geology of Monaghan-
 556 Carlingford. A geological description to accompany the Bedrock Geology 1:100,000 Scale Map Series, Sheet
 557 8/9, Monaghan-Carlingford, Geological Survey of Ireland: Dublin, Ireland, 1997.
 558 Glendell, M., and Brazier, R. E.: Accelerated export of sediment and carbon from a landscape under intensive
 559 agriculture, *Sci. Total Environ.*, 476-477, 643-656, 2014.
 560 Glendell, M., Extence, C., Chadd, R., and Brazier, R.E.: Testing the pressure-specific invertebrate index (PSI)
 561 as a tool for determining ecologically relevant targets for reducing sedimentation in streams, *Freshwater Biol.*,
 562 59, 353-367, 2014.

563 Grangeon, T., Legout, C., Esteves, M., Gratiot, N., and Navratil, O.: Variability of the particle size of suspended
 564 sediment during highly concentrated flood events in a small mountainous catchment, *J. Soils Sed.*, 12, 1549-
 565 1558, 2012.

566 Harlow, A., Webb, B. W., and Walling, D. E.: Sediment yields in the Exe Basin: a longer-term perspective,
 567 *Sediment Dynamics and the Hydromorphology of Fluvial Systems*, Dundee, UK, 2006.

568 Harrington, S. T., and Harrington, J. R.: An assessment of the suspended sediment rating curve approach for
 569 load estimation on the Rivers Bandon and Owenabue, Ireland, *Geomorphology*, 185, 27-38, 2013.

570 Haygarth, P. M., Bilotta, G. S., Bol, R., Brazier, R. E., Butler, P. J., Freer, J., Gimbert, L. J., Granger, S. J.,
 571 Krueger, T., Macleod, C. J. A., Naden, P., Old, G., Quinton, J. N., Smith, B., and Worsfold, P.: Processes
 572 affecting transfer of sediment and colloids, with associated phosphorus, from intensively farmed grasslands: an
 573 overview of key issues, *Hydrol. Process.*, 20, 4407-4413, 2006.

574 Horowitz, A. J.: Determining annual suspended sediment and sediment-associated trace element and nutrient
 575 fluxes, *Sci. Total Environ.*, 400, 315-343, 2008.

576 Huang, C. C., and O'Connell, M.: Recent land-use and soil-erosion history within a small catchment in
 577 Connemara, western Ireland: evidence from lake sediments and documentary sources, *Catena*, 41, 293-335,
 578 2000.

579 Ibrahim, T. G., Fenton, O., Richards, K. G., Fealy, R. M., and Healy, M. G.: Spatial and temporal variations of
 580 nutrient loads in overland flow and subsurface drainage from a marginal land site in south-east Ireland, *Biol.*
 581 *Environ.*, 113B, 169-186, 2013.

582 Jansson, M. B.: Determining sediment source areas in a tropical river basin, Costa Rica, *Catena*, 47, 63-84,
 583 2002.

584 Jastram, J. D., Zipper, C. E., Zelazny, L. W., and Hyer, K. E.: Increasing Precision of Turbidity-Based
 585 Suspended Sediment Concentration and Load Estimates, *J. Environ. Qual.*, 39, 1306-1316, 2010.

586 Jordan, P., Rippey, B., and John A.N.: The 20th century whole-basin trophic history of an inter-drumlin lake in
 587 an agricultural catchment, *Sci. Total Environ.*, 297, 161-173, 2002.

588 Jordan, P., Arnscheidt, A., McGrogan, H., and McCormick, S.: Characterising phosphorus transfers in rural
 589 catchments using a continuous bank-side analyser, *Hydrol. Earth Syst. Sci.*, 11, 372-381, 2007.

590 Jordan, P., Melland, A. R., Mellander, P. E., Shortle, G., and Wall, D.: The seasonality of phosphorus transfers
 591 from land to water: Implications for trophic impacts and policy evaluation, *Sci. Total Environ.*, 434, 101-109,
 592 2012.

593 Kemp, P., Sear, D., Collins, A., Naden, P., and Jones, I.: The impacts of fine sediment on riverine fish, *Hydrol.*
594 *Process.*, 25, 1800-1821, 2011.

595 Lppe, D., and Hennessy, T.: The capacity to expand milk production in Ireland following the removal of milk
596 quotas, *Irish J. Agr. Food Res.*, 51, 1-11, 2012.

597 Lawler, D. M., Petts, G. E., Foster, I. D. L., and Harper, S.: Turbidity dynamics during spring storm events in an
598 urban headwater river system: The Upper Tame, West Midlands, UK, *Sci. Total Environ.*, 360, 109-126, 2006.

599 Lewis, J.: Turbidity-controlled sampling for suspended sediment load estimation, edited by: Bogen, J., Fergus,
600 T., and Walling, D.E., *Proceedings of the Oslo Symposium*, Jun 2002, IAHS Publication 337, 13-20, 2003.

601 Lewis, J., and Eads, R.: Turbidity threshold sampling for suspended sediment load estimation, in: *Proceedings*
602 *of the seventh federal interagency sedimentation conference*, Technical committee of the subcommittee on
603 sedimentation, Reno, 25-29th March 2001, 8 pp., 2001.

604 McManus, J., and Duck, R.W.: Regional variations of fluvial sediment yield in eastern Scotland, edited
605 by: Walling, D.E., and Webb, B.W., *Proceedings of the Exeter Symposium*, Jul 1996, IAHS Publication
606 236, 157-161, 1996.

607 McConnell B., Philcox, M., and Geraghty, M.: *Geology of Meath: A geological description to accompany the*
608 *bedrock geology 1:100,000 scale map series, Sheet 13, Meath*. Geological Survey of Ireland: Dublin, Ireland,
609 2001.

610 Melland, A. R., Mellander, P. E., Murphy, P. N. C., Wall, D. P., Mechan, S., Shine, O., Shortle, G., and Jordan,
611 P.: Stream water quality in intensive cereal cropping catchments with regulated nutrient management, *Environ.*
612 *Sci. Policy*, 24, 58-70, 2012a.

613 Melland, A.R., Ryan, D., Shortle, G., and Jordan, P.: A cost:benefit evaluation of in-situ high temporal
614 resolution stream nutrient monitoring, *World Congress on Water, Climate and Energy*, Dublin,
615 2012b.

616 Mellander, P.-E., Melland, A. R., Jordan, P., Wall, D. P., Murphy, P. N. C., and Shortle, G.: Quantifying
617 nutrient transfer pathways in agricultural catchments using high temporal resolution data, *Env. Sci. Policy*, 24,
618 44-57, 2012.

619 Mellander, P.-E., Melland, A. R., Murphy, P. N. C., Wall, D. P., Shortle, G., and Jordan, P.: Coupling of surface
620 water and groundwater nitrate-N dynamics in two permeable agricultural catchments, *J. Agr. Sci.*, 152, 107-124,
621 2014.

622 Milliman, J.D., and Syvitski, J.P.M.: Geomorphic/Tectonic control of sediment discharge to the ocean: the
623 importance of small mountainous rivers, *J. Geol.*, 100, 5, 525-544, 1992.

624 Navratil, O., Esteves, M., Legout, C., Gratiot, N., Nemery, J., Willmore, S., and Grangeon, T.: Global
625 uncertainty analysis of suspended sediment monitoring using turbidimeter in a small mountainous river
626 catchment, *J. Hydrol.*, 398, 246-259, 2011.

627 Oeurng, C., Sauvage, S., and Sánchez-Pérez, J.-M.: Dynamics of suspended sediment transport and yield in a
628 large agricultural catchment, southwest France, *Earth Surf. Process. Landf.*, 35, 1289-1301, 2010.

629 OJEU: Council Directive 91/676/EEC of 12 December 1991 concerning the protection of waters against
630 pollution caused by nitrates from agricultural sources, EU, Brussels, 1991.

631 OJEU: Establishing a Framework for Community Action in the Field of Water Policy (Water Framework
632 Directive), 2000/60/EC, EU, Brussels, 2000.

633 OJEU: Council Directive 2006/44/EC of the 6 September 2006 on the quality of fresh waters needing protection
634 or improvement in order to support fish life, EU, Brussels, 2006.

635 OJEU: Commission Decision 2007/697/EC of 22 October 2007 granting a derogation requested by Ireland
636 pursuant to Council Directive 91/676/EEC concerning the protection of water against pollution caused by
637 nitrates from agricultural sources, EU, Brussels, 2007.

638 Owen, G. J., Perks, M. T., Benskin, C. M. H., Wilkinson, M. E., Jonczyk, J., and Quinn, P. F.: Monitoring
639 agricultural diffuse pollution through a dense monitoring network in the River Eden Demonstration Test
640 Catchment, Cumbria, UK, *Area*, 44, 443-453, 2012.

641 Peukert, S., Griffith, B.A., Murray, P.J., Macleod, C.J.A., and Brazier, R.E.: Intensive Management in
642 Grasslands Causes Diffuse Water Pollution at the Farm Scale, *J. Environ. Qual.*, 43, 2009-2023, 2014.

643 Regan, J.T., Fenton, O., and Healy, M. G.: A review of phosphorus and sediment release from Irish tillage soils,
644 the methods used to quantify losses and the current state of mitigation practice, *Biol. Environ.*, 112B, 1-25,
645 2012.

646 Rowan, J. S., Black, S., and Franks, S. W.: Sediment fingerprinting as an environmental forensics tool
647 explaining cyanobacteria blooms in lakes, *Appl. Geogr.*, 32, 832-843, 2012.

648 Sherriff, S.C., Rowan, J.R., Franks, S.W., Walden, J., Melland, A.R., Jordan, P., Ó hUallacháin, D.:
649 Sediment Fingerprinting, TRResearch, Summer 2014, 40-41, 2014.

650 Shore, M., Murphy, P. N. C., Jordan, P., Mellander, P. E., Kelly-Quinn, M., Cushen, M., Mehan, S., Shine, O.,
651 and Melland, A. R.: Evaluation of a surface hydrological connectivity index in agricultural catchments, *Environ.*
652 *Model. Software*, 47, 7-15, 2013.

653 Silgram, M., Jackson, D. R., Bailey, A., Quinton, J., and Stevens, C.: Hillslope scale surface runoff, sediment
654 and nutrient losses associated with tramline wheelings, *Earth Surf. Process. Landf.*, 35, 699-706, 2010.

655 Sleeman, A.G., and Pracht, M.: *Geology of South Cork, Sheet 25*. Geological Survey of Ireland: Dublin,
656 Ireland, 1995.

657 Soane, B. D., Ball, B. C., Arvidsson, J., Basch, G., Moreno, F., and Roger-Estrade, J.: No-till in northern,
658 western and south-western Europe: A review of problems and opportunities for crop production and the
659 environment, *Soil Till. Res.*, 118, 66-87, 2012.

660 Thompson, J., Cassidy, R., Doody, D. G., and Flynn, R.: Assessing suspended sediment dynamics in relation to
661 ecological thresholds and sampling strategies in two Irish headwater catchments, *Sci. Total Environ.*, 468-469,
662 345-357, 2014.

663 Tietzsch-Tyler, D., Sleeman, A.G., McConnell, B.J., Daly, E.P., Flegg A.M., O'Connor P.J., Warren W.P.:
664 *Geology of Carlow-Wexford, Sheet 19*. Geological Survey of Ireland: Dublin, Ireland, 1994.

665 Trimble, S. W., and Mendel, A. C.: The cow as a geomorphic agent — A critical review, *Geomorphol.*, 13, 233-
666 253, 1995.

667 Van Oost, K., Cerdan, O., and Quine, T. A.: Accelerated sediment fluxes by water and tillage erosion on
668 European agricultural land, *Earth Surf. Process. Landf.*, 34, 1625-1634, 2009.

669 Vanmaercke, M., Poesen, J., Verstraeten, G., de Vente, J., and Ocakoglu, F.: Sediment yield in Europe: Spatial
670 patterns and scale dependency, *Geomorphol.*, 130, 142-161, 2011.

671 Vanmaercke, M., Poesen, J., Radoane, M., Govers, G., Ocakoglu, F., and Arabkhedri, M.: How long should we
672 measure? An exploration of factors controlling the inter-annual variation of catchment sediment yield, *J. Soils*
673 *Sed.*, 12, 603-619, 2012.

674 Vero, S.E., Ibrahim, T.G., Creamer, R.E., Grant, J., Healy, M.G., Henry, T., Kramers, G., Richards, K.G.,
675 Fenton, O.: Consequences of varied soil hydraulic and meteorological complexity on unsaturated zone time lag
676 estimates, *J. Contam. Hydrol.*, 170, 53-67, 2014.

677 Verstraeten, G., and Poesen, J.: Factors controlling sediment yield from small intensively cultivated catchments
678 in a temperate humid climate, *Geomorphol.*, 40, 123-144, 2001.

679 Wall, D., Jordan, P., Melland, A. R., Mellander, P. E., Buckley, C., Reaney, S. M., and Shortle, G.: Using the
 680 nutrient transfer continuum concept to evaluate the European Union Nitrates Directive National Action
 681 Programme, *Env. Sci. Policy*, 14, 664-674, 2011.
 682 Walling, D. E.: Tracing suspended sediment sources in catchments and river systems, *Sci. Total Environ.*, 344,
 683 159-184, 2005.
 684 Walling, D. E., and Webb, B. W.: The reliability of rating curve estimates of suspended sediment yield: some
 685 further comments, *Sediment budgets*, Porto Alegre, 337-350, 1988.
 686 Walling, D. E., Owens, P. N., and Leeks, G. J. L.: Fingerprinting suspended sediment sources in the catchment
 687 of the River Ouse, Yorkshire, UK, *Hydrol. Process.*, 13, 955-975, 1999.
 688 Walling, D. E., Russell, M. A., Hodgkinson, R. A., and Zhang, Y.: Establishing sediment budgets for two small
 689 lowland agricultural catchments in the UK, *Catena*, 47, 323-353, 2002.
 690 Wass, P. D., and Leeks, G. J. L.: Suspended sediment fluxes in the Humber catchment, UK, *Hydrol. Process.*,
 691 13, 935-953, 1999.
 692 Wilson, C.G., Kuhnle, R.A., Bosch, D.D., Steiner, J.L., Starks, P.J., Tomer, M.D., and Wilson, G.V.:
 693 Quantifying relative contributions from sediment sources in Conservation Effects Assessment Project
 694 watersheds, *J. Soil Water Conserv.*, 63, 523-532, 2008.
 695 Wiskow, E., and van der Ploeg, R. R.: Calculation of drain spacings for optimal rainstorm flood control, *J.*
 696 *Hydrol.*, 272, 163-174, 2003.
 697 Withers, P. J. A., Hodgkinson, R. A., Bates, A., and Withers, C. M.: Some effects of tramlines on surface
 698 runoff, sediment and phosphorus mobilization on an erosion-prone soil, *Soil Use Manage.*, 22, 245-255, 2006.
 699 Wood, P. J., and Armitage, P. D.: Biological effects of fine sediment in the lotic environment, *Environ.*
 700 *Manage.*, 21, 203-217, 1997.
 701 Zabaleta, A., Martínez, M., Uriarte, J. A., and Antigüedad, I.: Factors controlling suspended sediment yield
 702 during runoff events in small headwater catchments of the Basque Country, *Catena*, 71, 179-190, 2007.
 703

704 Tables

705 Table 1. Summary of study catchments.

Catchment	Size (km ²)	30-year average rainfall ^a (mm yr ⁻¹)	Median slope (°)	Dominant soil drainage class/ <i>flow pathway</i>	Land-use	Landscape complexity features			
						Field size (ha)	Maximum down-slope length (m)	Hedgerow density (km ² /km ²)	Ditch density (km/km ²)
Grassland A	7.9	1228	4	Well-drained <i>Sub-surface</i>	89% grassland predominantly for dairy <u>cattle</u> ; 5% arable	<u>2.00</u>	<u>170</u>	<u>0.061</u>	<u>1.7</u>
Grassland B	11.5	906	3	Poorly-drained <i>Surface</i>	77% grassland- for dairy <u>cattle</u> , beef <u>cattle</u> and sheep; 12% spring crops 2% winter crops	<u>3.04</u>	<u>189</u>	<u>0.011</u>	<u>5.7^b</u>
Grassland C	3.3	960	6	<u>Moderately- to poorly- drained</u> Poorly drained <i>Surface</i>	94% grassland for beef <u>cattle</u> , dairy <u>cattle</u> and sheep	<u>1.12</u>	<u>114</u>	<u>0.044</u>	<u>2.6</u>
Arable A	11.2	906	3	Well-drained <i>Sub-surface</i>	54% arable predominantly spring crops; 39% grassland mainly <u>for</u> beef <u>cattle</u> and sheep	<u>3.32</u>	<u>194</u>	<u>0.011</u>	<u>1.3^b</u>
Arable B	9.4	758	3	Moderately- to <u>Poorly- drained</u> <i>Surface</i>	24% winter crops; 29% grazing for beef <u>cattle</u> and sheep; 19% dairy <u>cattle</u> grazing	<u>2.70</u>	<u>200</u>	<u>0.011</u>	<u>2.3</u>

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

706 ^a1981-2010 mean annual rainfall

707 ^bfrom Shore et al., (2013)

708

Formatted: Font: 10 pt, Superscript

Formatted: Font: 10 pt

Formatted: Superscript

Formatted: Font: 10 pt

709 Table 2: Turbidity- Suspended sediment calibration dataset summary and rating curve equations and fit
710 parameters

<u>Catchment</u>	<u>Data points</u>	<u>Calibrated turbidity range (NTU)</u>	<u>Maximum measured turbidity in NTU (number of data points outside calibrated range)^a</u>	<u>Calibration equation</u>	<u>MSE</u>
<u>Grassland A</u>	<u>247</u>	<u>0.044-725</u>	<u>1074 (n=7)</u>	<u>$SSC=0.6636T^{1.1045}$</u>	<u>495</u>
<u>Grassland B</u>	<u>443</u>	<u>0.506-577</u>	<u>1179 (n=37)</u>	<u>$SSC=0.5657T^{1.1109}$</u>	<u>580</u>
<u>Grassland C</u>	<u>339</u>	<u>1.170-154</u>	<u>1225 (n=207)</u>	<u>$SSC=0.4341T^{1.2148}$</u>	<u>38</u>
<u>Arable A</u>	<u>231</u>	<u>1.177-767</u>	<u>2730 (n=30)</u>	<u>$SSC=0.4119T^{1.1456}$</u>	<u>891</u>
<u>Arable B</u>	<u>242</u>	<u>0.75-1853</u>	<u>1853 (n=0)</u>	<u>Where $T < 432.2$</u> <u>$SSC=1.1320T$</u> <u>Where $T > 432.2$</u> <u>$SSC=0.5288+0.6032T$</u>	<u>1335</u>

711 ^aNumber of data points at 10 min resolution
712

Table 32. Suspended sediment metrics estimated using in-situ and ex-situ turbidity based SSC estimation methods.

Catchment	Total load (t) ^a		Mean concentration (mg L ⁻¹)		Max concentration (mg L ⁻¹)	
	SSL _{OUT}	SSL _{IN}	SSC _{OUT}	SSC _{IN}	SSC _{OUT}	SSC _{IN}
Grassland B	128±28	154±35	13.7	16.2	1010	1188
Arable B	225±54	248±52	29.1	34.1	2043	89923 ^b


Note: ^a confidence intervals are the coefficient of variance of the mean prediction, ^b T_{IN} sensor saturated at 1000 NTU

719 Table 34. Annual rainfall, discharge and suspended sediment flux summary for five catchments. Monitoring years correspond to hydrologic years (October to September).

Year	Grassland A				Grassland B			Grassland C				Arable A				Arable B		
	2010	2011	2012	2009	2010	2011	2012	2010	2011	2012	2009	2010	2011	2012	2009	2010	2011	2012
Rainfall (mm yr ⁻¹)	1045	1139	1097	1278	800	1155	920	965	1234	969	1240	763	1102	827	896	742	1049	844
Runoff (mm yr ⁻¹)	443	633	608	643	330	504	382	424	727	575	750	366	517	473	383	319	521	542
Mean SSC (mg L ⁻¹)	4.60	3.88	5.15	14.32	5.48	7.64	11.65	4.42	4.09	3.48	5.95	2.60	4.07	5.58	9.36	9.60	10.42	17.42
Max SSC (mg L ⁻¹)	707	467	966	1020	426	882	707	419	813	462	773	224	737	2141	494	707	688	1120
>25 mg L ⁻¹ (% of ST*)	3.22	2.25	3.08	11.29	4.88	5.64	7.78	2.38	2.39	2.11	3.84	1.14	1.91	2.77	6.34	6.18	6.12	11.30
SSY (tonnes km ⁻² yr ⁻¹)	3.95	6.61	14.92	48.39	6.65	13.46	30.08	6.07	22.28	6.52	17.44	2.11	5.22	23.10	15.59	15.97	24.20	41.81

720 *ST=sampled time

Formatted Table

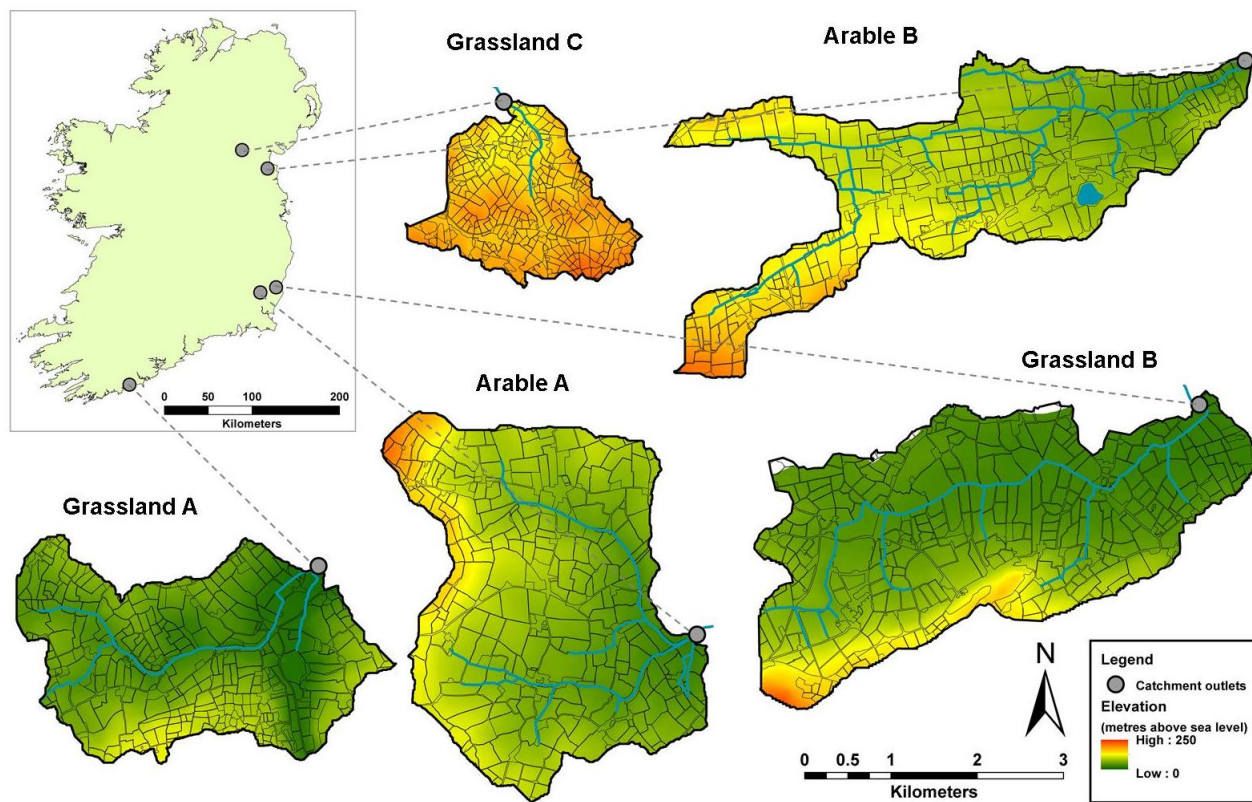

722
723 | **Figure 1.** Map of catchment monitoring locations and study catchments with topographic and field size information.



724

725

Figure 2: Picture of in situ and ex situ suspended sediment and discharge instrumentation at Grassland B.

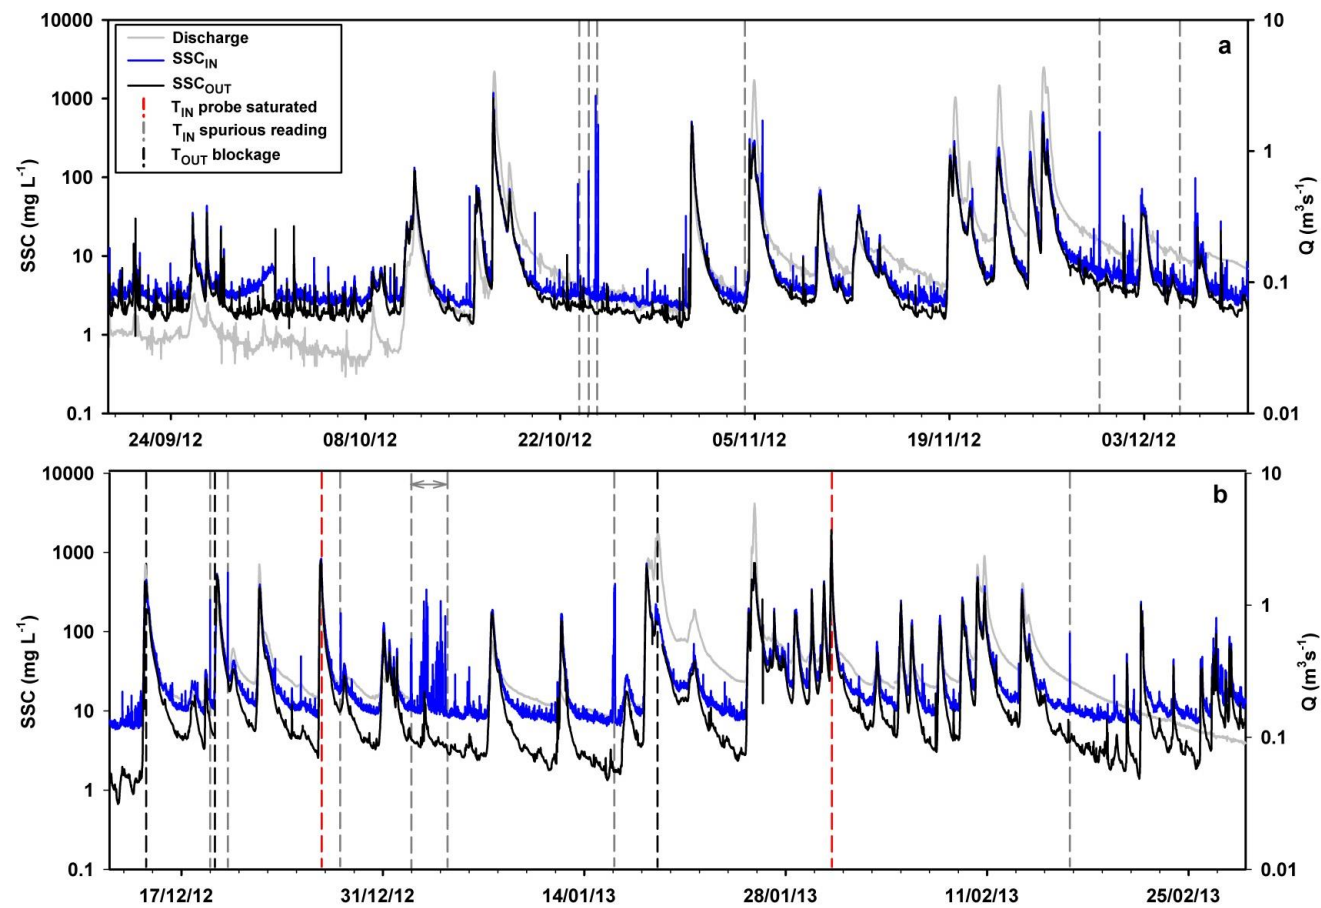


Figure 3: Raw turbidity output of T_{IN} and T_{OUT} sensors (converted to SSC) and discharge at a) Grassland B and, b) Arable B. Periods of missing data are annotated by dashed lines.



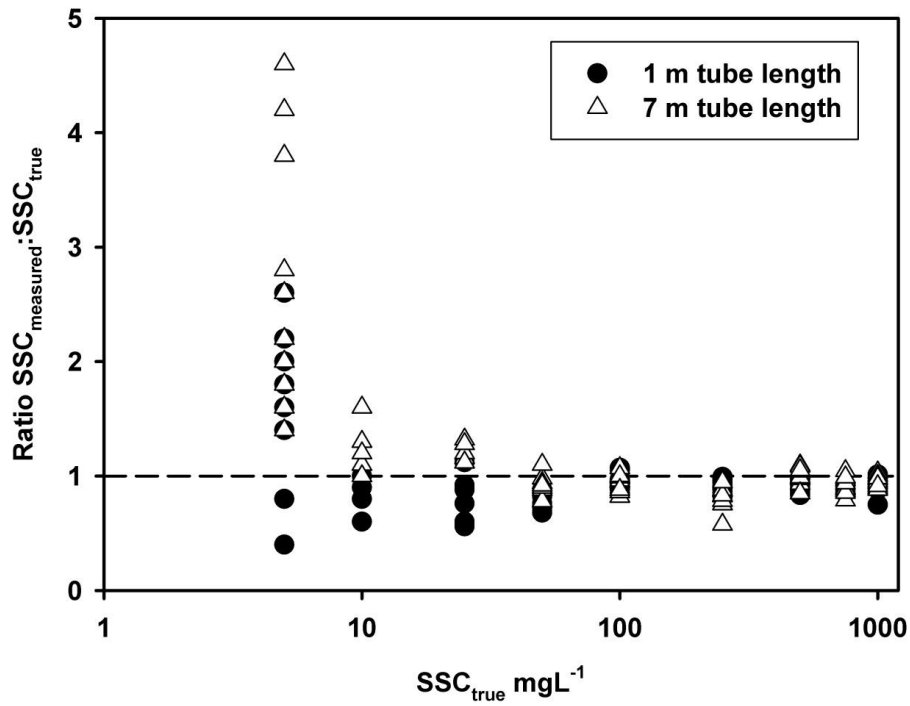


Figure 4: Suspended sediment concentration of samples collected from known concentration mixtures (SSC_{true}) using ISCO water samplers with 1m and 7m tube lengths.

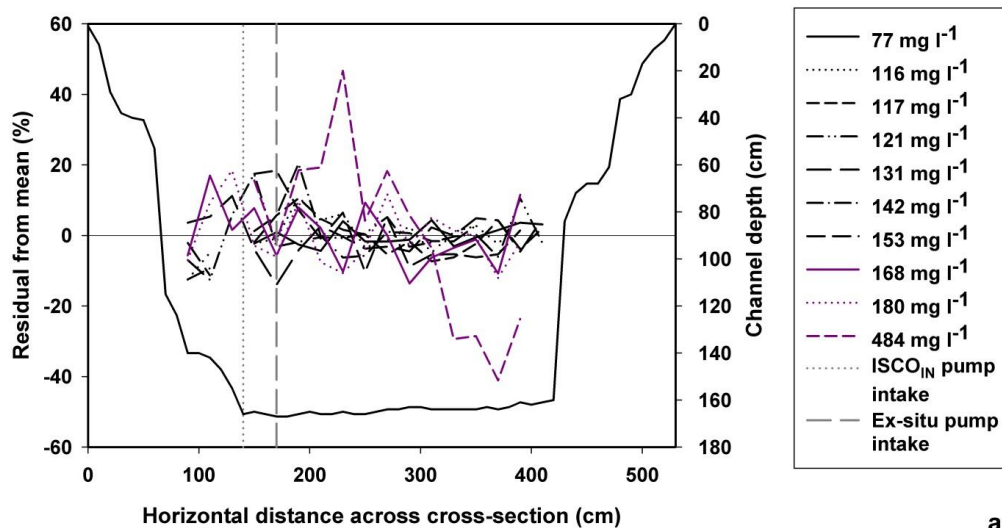

a

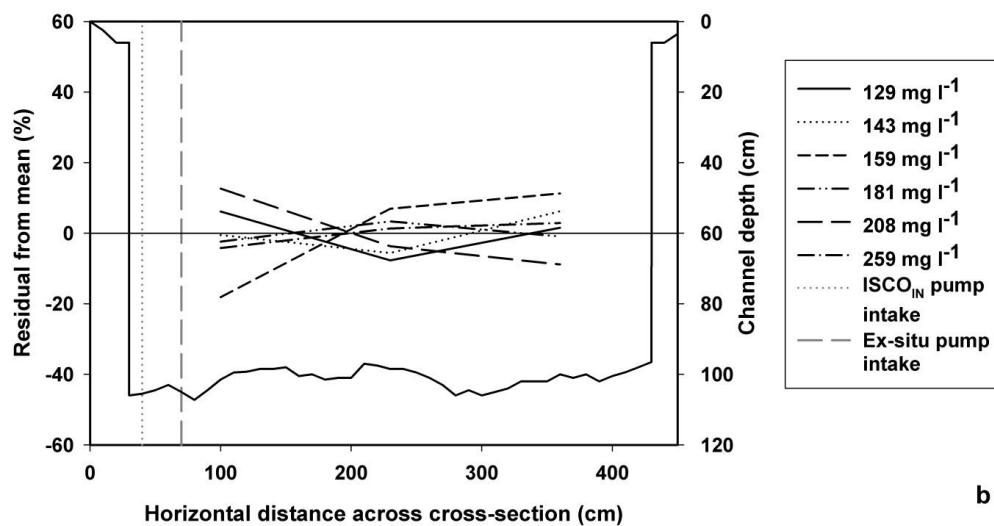

b

Figure 5: Variability of instantaneous depth-integrated SSC measurements across the channel cross section compared to the mean transect SSC a US DH-48 sediment sampler at a) Grassland B and, b) Arable B.

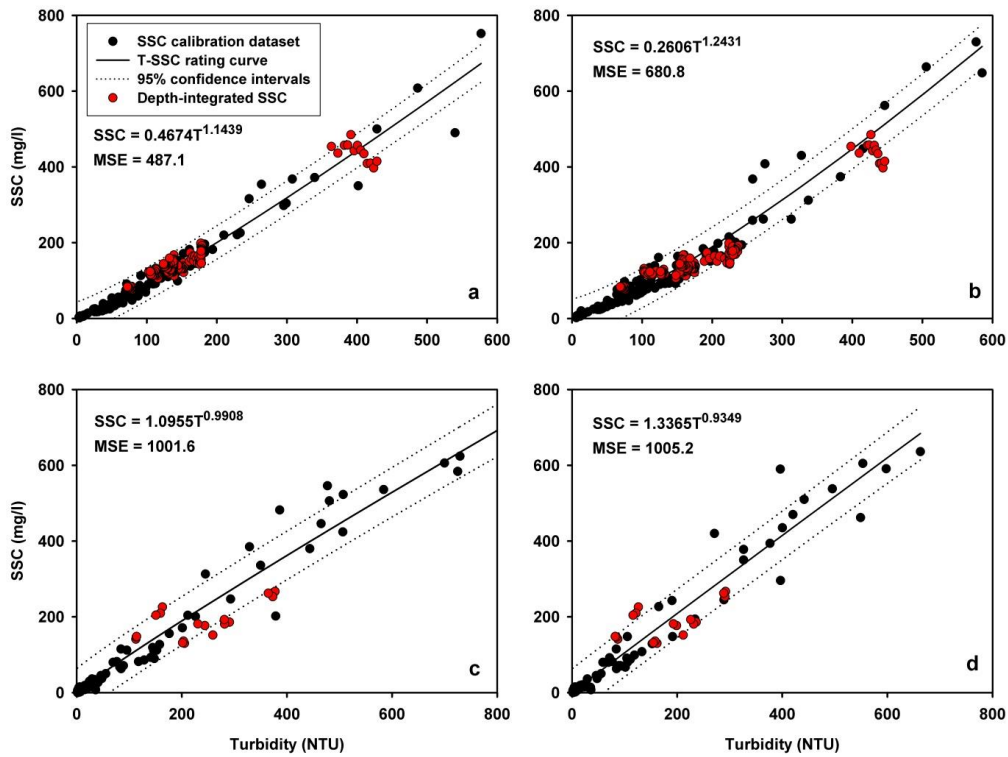


Figure 6. Turbidity-suspended sediment concentration rating curves, confidence intervals, calibration data and cross-section ~~averaged~~ depth-integrated suspended sediment concentration samples for, a) Grassland B T_{OUT}, b) Grassland B T_{IN}, c) Arable B T_{OUT}, d) Arable B T_{IN}.

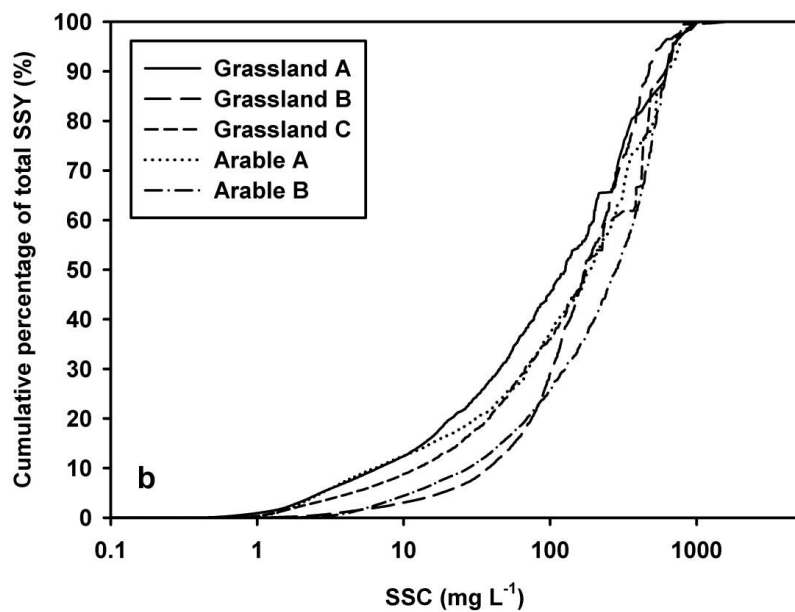
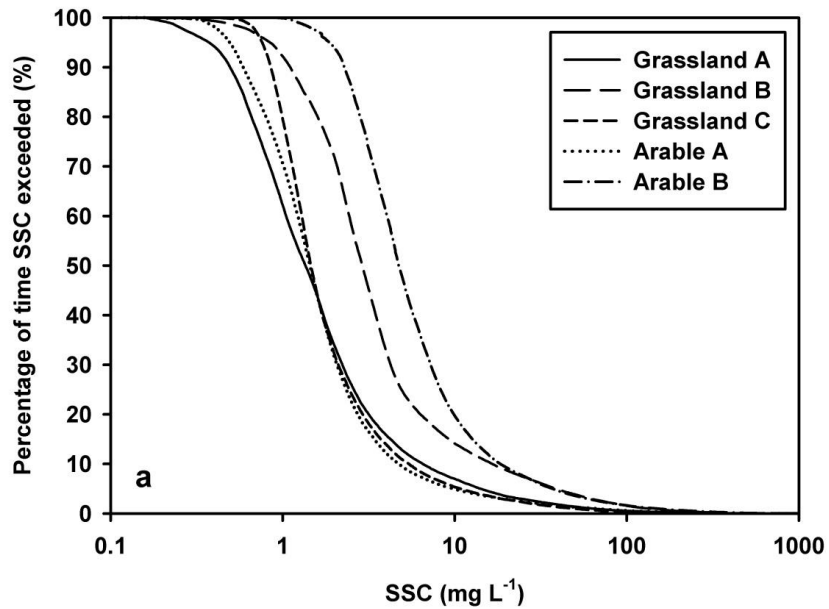


Figure 7. Frequency-duration graphs of, a) suspended sediment concentration exceedance with time and, b) Cumulative percentage of suspended sediment yield with exceedance of suspended sediment concentration.

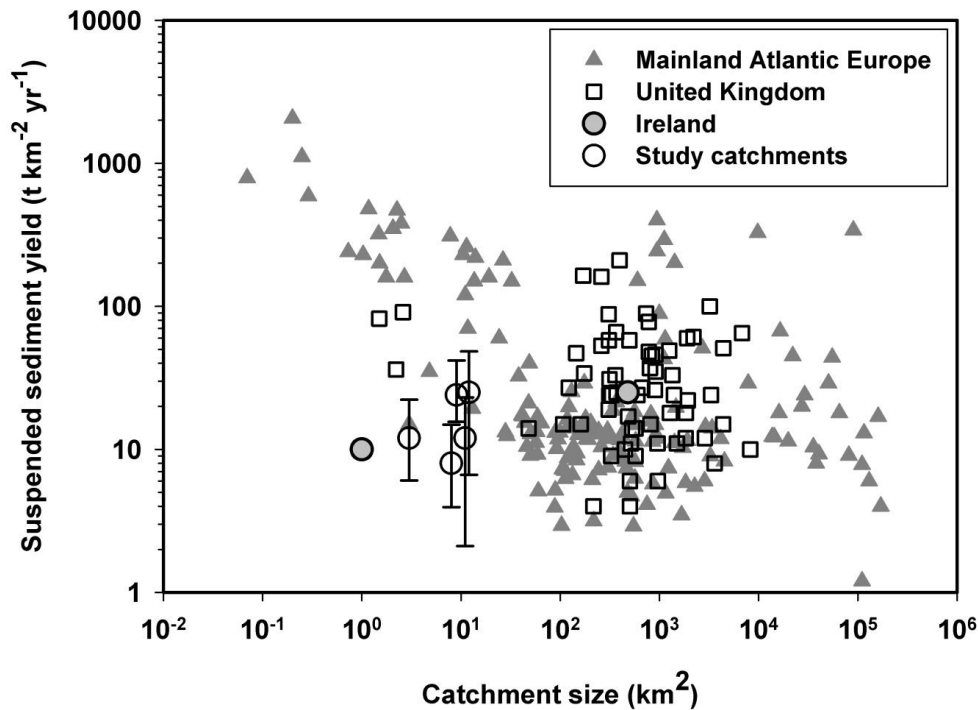


Figure 8. Catchment size and suspended sediment yield of European river catchments, [study catchments displayed with inter annual range](#). Sources: Foster et al. (1986); Milliman and Syvitski (1992); McManus and Duck (1996); Wass and Leeks (1999); Huang and O'Connell (2000); Verstraeten and Poesen (2001); Jordan et al. (2002); Walling et al. (2002); Harlow et al. (2006); Oeurng et al. (2010); Zabaleta et al. (2007); Gay et al. (2014).

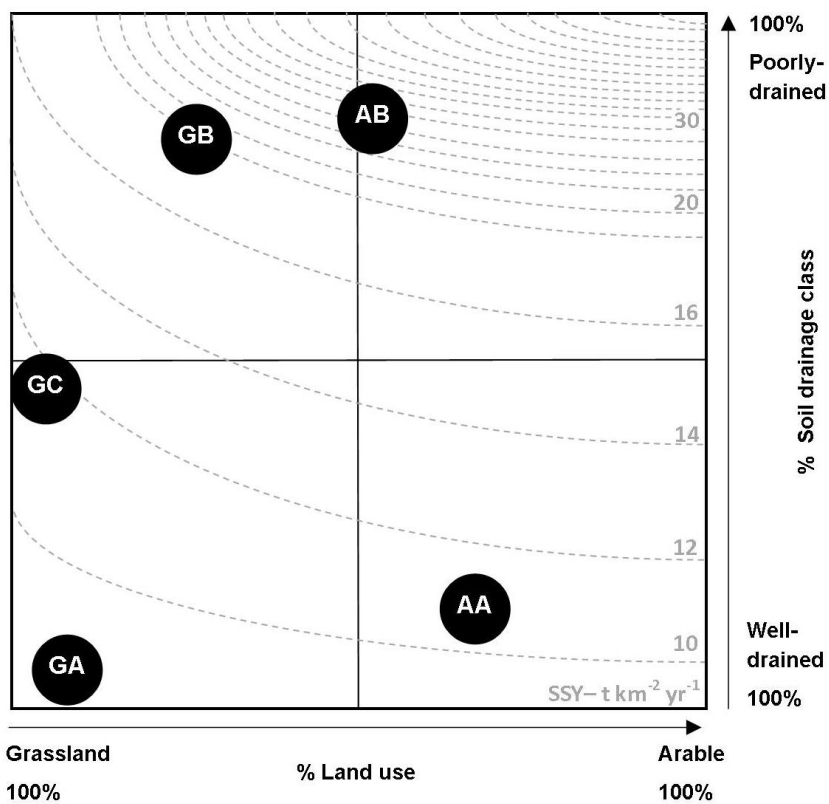


Figure 9. Conceptual diagram of suspended sediment yield as represented by iso-lines according to land use and dominant soil drainage class. Catchment abbreviations: GA- Grassland A, GB- Grassland B, GC- Grassland C, AA- Arable A, AB- Arable B.