

Dear Editor,  
please find attached the new version of the manuscript "Estimation of flood warning runoff thresholds in ungauged basins with asymmetric error functions",  
which I am submitting following the last comments received from the Editor and the Referee.

I would like to warmly thank the Reviewer and the Editor, for taking time in reading again and suggesting improvements to the paper.

I report below the Editor's and Referee's comments, in Italic and blue font, followed by my replies.

In the revised manuscript I highlighted in green the changes with respect to the previously revised version.

Thank you very much for your kind consideration of this revised version of our manuscript.  
Sincerely yours,  
Elena Toth

### **Editor's Comments**

*The paper has now gone out for re-review after the first round of comments and revisions. The reviewer found that the manuscript is suitable for publication subject to minor revision. I agree with this assessment and I would now request that the author revise or respond to the minor revisions noted by the review.*

*I would also ask the author add labels to the axes in the figures and explain any abbreviations in the table and figure captions. In particular, figures 4 and 5 are missing labels on the figures*

Thank you for having highlighted that I uploaded the scatterplots without the labels identifying the models and also missing the axis titles: I have added them in the revised Figure 5.

In Figure 4 I have added the title of the y-axis.

The abbreviations are reported in the text, but of course I may repeat them in the captions.

### **Referee's Comment**

*I thank the author for taking into consideration the comments I made on the manuscript and coming up with an updated version. Although I may not fully agree with the replies given to some of the issues I raised, I feel that the manuscript is just fine given that its objective is more on demonstrating an approach for estimating a given flood level. Nevertheless, I would like to make the following comments and suggestions:*

I do thank the Referee: indeed the data set is certainly not the best one and also part of the analysis is based on subjective choices, but indeed, as the Referee highlights, the main objective is mainly to demonstrate the feasibility of the proposed approach and much more information would be needed on the study catchments in order to provide reliable estimates of the actual thresholds.

*• In my view, the suggestion in Cunnane (1987) not to extrapolate statistical inference beyond a return period of 2 times the sample length does not mean that one can use very short records for inference as long as one keeps the return period within 2 times the sample length. I would remove that part of the text.*

At p. 8, lines 7-10, I have changed:

“Even the shortest records (and actually only 9 of the locations have less than 8 years 4 of data) should be sufficient for such a short return period, for example according to the 5 classical guideline by Cunnane (1987), that suggests not to extrapolate statistical inference 6 beyond a return period of 2 times the sample length.”

in

”Even if of course it would be preferable having longer time-series, only 9 of the locations have actually less than 8 years of data and the records are deemed to be sufficient for such a short return period.”

*• It is fine to use three classes of catchment descriptors to sample representative catchments from for the three groups. However, I find the reasoning given for the choice of three classes less than convincing. Is it the dimension of the input variables or the variability that should be considered for deciding the number of classes?*

The choice is indeed totally subjective; I first chose a parsimonious model and then verified that the resulting sets were not too dissimilar in terms of information content ( a different choice could certainly have been made, but, again, the main objective of the paper is to show the possible approach and not estimating actual flood values).

I have removed the reference to input dimension in the paper at p. 9, ll. 21-22.

*• I find the MAE and RMSE as defined in the manuscript (Equations 4 and 5, respectively) not so robust as goodness-of-fit measures for the particular study presented in the manuscript. The  $q^2$  values vary between 10 – 1000m<sup>3</sup>/s (page 8, line 10). Given this wide range of the magnitudes at the stations, the measures can be misleading unless the errors are brought to a similar scale.*

I do agree that, in principle, the use of relative errors might be a more proper way to both set up (training) and evaluating the performances of this kind of models, but, since in the present application the costs are weighted in respect to the ‘not-relative’ errors in the loss functions, I believe that showing the total error, plus the scatterplot may suffice. In a future study, it would be interesting to use a (asymmetric) cost function based on relative errors and then, consistently, analyse the results in the same way.

# 1 Estimation of flood warning runoff thresholds in ungauged 2 basins with asymmetric error functions

3 E. Toth<sup>1</sup>

4 [1]{Department DICAM, School of Engineering, University of Bologna, Bologna, Italy }

5 Correspondence to: E. Toth (elena.toth@unibo.it)

6

## 7 Abstract

8 In many real-world flood forecasting systems, the runoff thresholds for activating warnings or  
9 mitigation measures correspond to the flow peaks with a given return period (often the 2-year  
10 one, that may be associated with the bankfull discharge). At locations where the historical  
11 streamflow records are absent or very limited, the threshold can be estimated with regionally-  
12 derived empirical relationships between catchment descriptors and the desired flood quantile.  
13 Whatever is the function form, such models are generally parameterised by minimising the  
14 mean square error, that assigns equal importance to overprediction or underprediction errors.

15 Considering that the consequences of an overestimated warning threshold (leading to the risk  
16 of missing alarms) generally have a much lower level of acceptance than those of an  
17 underestimated threshold (leading to the issuance of false alarms), the present work proposes  
18 to parameterise the regression model through an asymmetric error function, that penalises  
19 more the overpredictions.

20 The estimates by models (feedforward neural networks) with increasing degree of asymmetry  
21 are compared with those of a traditional, symmetrically-trained network, in a rigorous cross-  
22 validation experiment referred to a database of catchments covering the Italian country. The  
23 analysis shows that the use of the asymmetric error function can substantially reduce the  
24 number and extent of overestimation errors, if compared to the use of the traditional square  
25 errors. Of course such reduction is at the expense of increasing underestimation errors, but the  
26 overall accurateness is still acceptable and the results illustrate the potential value of choosing  
27 an asymmetric error function when the consequences of missed alarms are more severe than  
28 those of false alarms.

## 1   **1   Introduction**

2   In the operation of flood forecasting systems, it is necessary to determine the values of  
3   threshold runoff that trigger the issuance of flood watches and warnings. Such critical values  
4   might be used for threshold-based flood alert based on real-time data measurements along the  
5   rivers (WMO, 2011) or for identifying in advance, through a rainfall-runoff modelling chain,  
6   the rainfall quantities that will lead to surpass such streamflow levels, as in the Flash Flood  
7   Guidance Systems framework (Carpenter et al., 1999; Ntelekos et al., 2006; Reed et al., 2007;  
8   Norbiato et al., 2009).

9   A runoff threshold should correspond to a ‘flooding flow’, that is to a value that may produce  
10   flood damages, and it is very difficult to determine on a regional or national scale: it may be  
11   defined as a flow that just exceeds bankfull conditions, but in practice, both in gauged and in  
12   ungauged river sections, such conditions are arduous to quantify due to the lack of local  
13   information (Reed et al., 2007; Hapuarachchi et al., 2011).

14   In absence of more sophisticated physically-based approaches, based on detailed information  
15   of each specific cross-section that are rarely available due to limited field surveys, the  
16   literature suggests to estimate the bankfull flow as the flood having a 1.5 to 2 years return  
17   period (Carpenter et al., 1999; Reed et al., 2007; Harman et al., 2008; Wilkerson, 2008;  
18   Hapuarachchi et al. 2011; Cunha et al., 2012; Ward et al., 2013) and a flow that is slightly  
19   higher than bankfull may be identified with the 2-year return period flood (Carpenter et al.,  
20   1999; Reed et al., 2007).

21   Many operational systems all around the world adopt a statistically-based definition of the  
22   flooding flow and the flows associated with given return periods are used as threshold stages  
23   for activating flood warning procedures.

24   The 2-year recurrence is used by many River Forecast Services in the United States, as  
25   suggested by Carpenter et al. (1999), also due to the fact that “*the good national coverage of*  
26   *the 2-yr return period flows that the U.S. Geological Survey (USGS) maintains nationwide*  
27   *supports its use*” (Ntelekos et al., 2006), as well as in British Columbia (Canada).

28   However, the floods with different annual exceedance probabilities, associated with different  
29   levels of risk, are also frequently adopted in operational real-time flood warning systems: for  
30   example in the Czech Republic, flood watch usually corresponds to a 1- to 5-year flow return  
31   period (Daňhelka and Vlasák, 2013). In Italy, where a national directive issued in 2004

1 introduces a system articulated on at least two levels of flow thresholds, many Regions have  
2 identified the alert levels as flood quantiles with return periods of 2, 5 or 10 years (e.g. the  
3 Abruzzo, Lombardia, Puglia Regions). In the South of France, the AIGA flood warning  
4 system compares real-time peak discharge estimated along the river network (on the basis of  
5 rainfall field estimates and forecasts) to flood frequency estimates of given return periods  
6 (with three categories: yellow for values ranging from the 2-year to the 10-year flood, orange  
7 for between the 10 and the 50-year flood, and red for peaks exceeding the 50-year flood) in  
8 order to provide warnings to the national and regional flood forecasting offices (Javelle et al.,  
9 2014).

10 For river sections where the streamflow gauges are newly installed or where historical rating  
11 curves are not available, the observations of the annual maxima are absent or very limited and  
12 it is not possible obtaining a reliable estimate of flood quantiles on the basis of statistical  
13 analyses of series of observed flood peak discharges.

14 For these ungauged or poorly gaged basins, the peak flow of given frequency to be associated  
15 with the watch/warning threshold can be estimated transferring information from data-rich  
16 sites to data-poor ones, as it is done in the corpus of methodologies applied in RFFA  
17 (Regional Flood Frequency Analysis) at ungauged sites, that have always received  
18 considerable attention in the hydrologic literature (Bloeschl et al., 2013). Among the possible  
19 approaches (statistical and process-based) to predict floods in ungauged basins, many  
20 researchers have traditionally applied regression-like regionalisation methods for i) the  
21 estimation of the index flood (Darlymple, 1960), usually defined as either the mean or the  
22 median (that is the 2-year return period quantile) of the annual maximum flood series, or for  
23 ii) the direct estimate of other quantiles of annual maxima in ungauged basins (Stedinger and  
24 Lu, 1995; Salinas et al., 2013). Such methods are based on the assumption that there is a  
25 relationship between catchment properties and the flood frequency statistics and are  
26 implemented through a regression-type model that relates the flood quantile or the index flood  
27 to a number of relevant morpho-climatic indexes. Linear or power (often linearized through a  
28 log-transformation) forms, with either a multiplicative or additive error term, are the most  
29 commonly used functions (see e.g. Stedinger and Tasker, 1985; GREHYS, 1996; Pandey and  
30 Nguyen, 1999; Brath et al., 2001; Kjeldsen et al., 2001, 2014; Bocchiola et al., 2003; Merz  
31 and Bloeschl, 2005; Griffis and Stedinger, 2007; Archfield et al., 2013; Smith et al., 2015).

1 In order to allow more flexibility to the model structure (whose ‘true’ form is of course not  
2 known), the international literature has recently proposed methods based on the use of  
3 artificial neural networks (ANN), providing a non-linear relationship between the input and  
4 output variables without having to define its functional form a priori. Successful applications  
5 of ANN for the estimation of index floods or flood quantiles at ungauged sites are reported in  
6 Muttiah et al., 1997; Hall et al., 2002; Dawson et al., 2006; Shu and Burn, 2004; Shu and  
7 Ouarda, 2008; Singh et al., 2010; Simor at al., 2012; Aziz et al., 2013.

8 Both the traditional power form or linear regression methods and the neural networks models  
9 are generally parameterized by minimizing the mean or root mean of the squared errors, that  
10 is a symmetric function assigning the same importance to overestimation and underestimation  
11 errors.

12 Nevertheless, the consequences of under or overestimating the runoff threshold when used for  
13 early warning are extremely different.

14 Adopting a watch threshold that is higher than the runoff/stage that actually produces flooding  
15 damages would in fact lead to missing such events, failing to issue an alarm. Underestimating  
16 the runoff threshold may instead determine the issue of false alarms.

17 False alarms may certainly lead to money losses and also “undermine the credibility of the  
18 warning organisation but are generally much less costly than an unwarned event.” (UCAR,  
19 2010): in fact the costs of failing to issue an alarm grow rapidly in a real emergency, since a  
20 totally missed event has strongly adverse effects on preparedness. Not only the costs of false  
21 warnings are commonly much smaller than the avoidable losses of a flood, but they cannot  
22 match up to indirect and/or intangible flood damages such as loss of lives or serious injuries  
23 (Pappenberger et al., 2008; Verkade and Werner, 2011).

24 Furthermore, regarding the effects of false alarms, “in opposition to ‘cry wolf’ effect, for  
25 some they may provide an opportunity to check procedures and raise awareness, much like a  
26 fire practice drill.” (Sene, 2013)

27 Overall, false alarms have usually a higher level of acceptance than misses and this entails  
28 that the estimate of flood warning thresholds should be cautionary, so as to reduce,  
29 conservatively, the number of missed alarms.

30 For the development of watches and warnings it is therefore important to obtain estimates as  
31 accurate as possible, minimising both positive and negative errors, but, considering that an

1 error will always be present, it is better underpredicting rather than overpredicting the  
2 threshold estimate, for safety reasons.

3 To obtain a conservative estimate of the thresholds, penalising more the predictions that  
4 exceed the “observed” values (in the present case represented by the quantile estimate based  
5 on the statistical analysis of observed flow peaks) than those that underestimate them, in the  
6 present work it is proposed, for the first time to the Author’s knowledge, a parameterisation  
7 algorithm that weights asymmetrically the positive or negative errors, in order to decrease the  
8 consistency of overestimation and therefore the risk of missing a flooding occurrence.

9 It is important to underline that the proposed asymmetric error function is here applied for  
10 optimising a neural network model for predicting the 2-year return period flood (due to its  
11 association with the bankfull conditions) but it might be used to improve any other kind of  
12 methodology for the estimate of flood warning thresholds associated to any return period.

13 Section 2 presents the asymmetric error functions; the next one describes the information  
14 available in a database covering the entire Italian country and the identification of the subsets  
15 to be used for a rigorous cross-validation approach. Section 4 presents the implementation of  
16 the models for estimating the 2-year return period flood in ungauged catchments, consisting in  
17 artificial neural networks calibrated using respectively the symmetric square error and the  
18 asymmetric error functions. The results are presented and then discussed in section 5 and  
19 section 6 concludes.

## 20 **2 The asymmetric error function**

21 The scientific literature on forecasting applications, in any scientific area, adopts almost  
22 exclusively an objective function based on the sum or mean of the squared discrepancies, that  
23 is a symmetric quadratic function, due to the well-established good statistical properties of the  
24 minimum mean square error estimator.

25 On the other hand, in economics as well as in engineering and other many fields, there are  
26 cases where the forecasting problem is inherently non-symmetric and, in the financial  
27 forecasting literature, the use of mean squared error, even if still widely applied, is nowadays  
28 not always accepted.

29 Error (or loss) functions devised to keep into account an asymmetric behaviour have been  
30 proposed, such as the linear-exponential, the double linear and the double quadratic  
31 (Christoffersen and Diebold 1996; Diebold and Lopez 1996; Granger 1999; Granger and

1 Pesaran 2000; Elliot et al. 2005; Patton and Timmerman, 2006). In particular, Elliot et al.  
2 (2005) recently presented a family of parsimoniously parameterized error functions that nests  
3 mean squared error loss as a special case (Patton and Timmerman, 2006).

4 Such function, adapted from Elliot et al. (2005) and defining the error  $\varepsilon$  as the prediction  
5 minus the observed value (that is, a negative error corresponds to underestimation, a positive  
6 one to overestimation), reads:

$$7 \quad L(p, \alpha) = 2 \cdot [\alpha + (1 - 2\alpha) \cdot \mathbf{1}\{\varepsilon > 0\}] \cdot |\varepsilon|^p, \quad (1)$$

8 where  $\mathbf{1}(\cdot)$  is a unit indicator, equal to one when  $\varepsilon > 0$  and zero otherwise;  $p$  is a positive  
9 integer that amplifies the larger errors (corresponding to a quadratic error when equal to 2)  
10 and  $\alpha \in (0,1)$  is a parameter representing the degree of asymmetry.

11 For  $\alpha < 0.5$  the function penalises more the overestimation errors ( $\varepsilon > 0$ ), while for  $\alpha > 0.5$   
12 more weight is given to negative forecast errors (under-predictions); for  $\alpha = 0.5$  the loss  
13 weights symmetrically positive and negative errors.

14 When  $p = 2$  and  $\alpha \neq 0.5$ , the error becomes the asymmetric double quadratic (Quad-Quad)  
15 loss function (see Christoffersen and Diebold 1996), that is used in the present work for a fair  
16 comparison with the traditional mean square error estimator. When  $p = 2$  and  $\alpha = 0.5$ , Eq. (1)  
17 corresponds in fact to the ‘traditional’, symmetric, square error:

$$18 \quad L(2,0.5) = \varepsilon^2 \quad (2)$$

19 Figure 1 shows the asymmetric Quad-Quad loss function (with  $\alpha$  varying from 0.1 to 0.9)  
20 compared with the squared error (SE).

21 In the water engineering field, the asymmetric Elliot error function with quadratic  
22 amplification ( $p = 2$ ) has been recently applied to parameterise a model for estimating the  
23 expected maximum scour at bridge piers, in order to obtain safer design predictions through  
24 the reduction of underestimation errors by Toth (2015).

25 It should be noted that the proposed methodology is a deterministic one, where an optimal  
26 point forecast is obtained by minimizing the conditional expectation of the future loss; such  
27 framework has not the pros of a probabilistic one in terms of quantification of the  
28 uncertainties of the prediction, but it aims at identifying the optimal value for the threshold in  
29 terms of operational utility.



1 In Section 4, the asymmetric quadratic error function is proposed for optimizing the  
2 parameters of an input-output model, based on artificial neural networks, between the input  
3 variables summarising a set of catchment descriptors (obtainable also for ungauged river  
4 sections) and the 2-year return period flood, thus warranting that overestimation errors, that  
5 would increase the risk of missing flood warnings, are weighted more than underestimation  
6 ones.

### 7 **3 Available information: the national data set of Italian catchments**

8 The case study refers to a database of almost 300 catchments scattered all over the Italian  
9 peninsula, compiled within the national research project “CUBIST – Characterisation of  
10 Ungauged Basins by Integrated uSe of hydrological Techniques” (Claps et al., 2008).

#### 11 **3.1 Input and output variables**

12 The 12 geomorphological and climatic descriptors are listed in Table 1a. The dataset  
13 unfortunately lacks information on other hydrological properties (e.g. on soils, land-cover,  
14 vegetation) and the climatic characterisation is very limited (for example information on  
15 extreme rainfall would be extremely important), but ~~it was not possible to obtain~~  
16 ~~homogeneous information on these characteristics nationwide and~~ the CUBIST set is  
17 currently the only database available in the Italian hydrologists community at national scale.

18 The dataset is described in Di Prinzio et al. (2011), where, following a catchment  
19 classification procedure based on multivariate techniques, the descriptors were used to infer  
20 regional predictions of mean annual runoff, mean maximum annual flood and flood quantiles  
21 through a linear multiregression model.

22 As described in such work, in order to reduce the high-dimensionality of the  
23 geomorphological and climatic descriptors set, a Principal Components (PC) analysis was  
24 applied, obtaining a set of derived uncorrelated variables. The PC variables are as many as the  
25 original variables, but they are ordered in such a way that the first component has the greatest  
26 variability, the second accounts for the second largest amount of variance in the data and is  
27 uncorrelated with the first and so forth. In the present data set, the first three principal  
28 components explain more than three quarters of the total variance (see Di Prinzio et al., 2011)  
29 and such three first PCs are here chosen as input variables to the models described in the  
30 following, assuming that they may adequately represent, in a parsimonious manner, the main  
31 features of the study catchments.

1 The data base, in addition to the morpho-pluviometric information, includes the annual  
2 maxima flow records for periods ranging from 5 to 63 years, whose median values,  
3 corresponding to the 2-year return period, represent the output variable to be simulated by the  
4 models. Even if of course it would be preferable having longer time-series, only 9 of the  
5 locations have actually less than 8 years of data and the records are deemed to be sufficient  
6 for such a short return period.

7 The data set covers a great diverseness of hydrological, physiographic and climatic properties  
8 and in order to partially reduce such heterogeneity, it was decided to limit the analysis to  
9 catchments having a 2-year flood included in the range 10-1000 m<sup>3</sup>/s, that is 267 over the  
10 original 296 basins.

### 11 **3.2 Identification of balanced cross-validation subsets with SOM clustering of** 12 **input data**

13 As will be detailed in Section 4, the database is to be divided in three disjoint subsets (called  
14 training, cross-validation and test sets) in order to allow a rigorous independent validation and  
15 also to increase the generalization abilities of the model when encountering records different  
16 from those used in the calibration (or ‘training’) phase, following an ‘early stopping’  
17 parameterisation procedure.

18 The way in which the data are divided may have a strong influence on the performance of the  
19 model and it is important that each one of the three sets contains all representative patterns  
20 that are included in the dataset. As proposed in the recent literature (Kocjancic and Zupan,  
21 2001; Bowden et al., 2002; Shahin et al., 2004) a self-organising map (SOM) may be applied  
22 to this aim. The SOM is a data-driven classification method based on unsupervised artificial  
23 neural networks that may be applied for several clustering purposes (for hydrological  
24 applications see, for example, Minns and Hall, 2005; Kalteh et al, 2008).

25 In the recent years, SOMs were also successfully applied for catchments classification either  
26 based on geo-morpho-climatic descriptors (Hall and Minns, 1999; Hall et al., 2002; Srinivas  
27 et al., 2008; Di Prinzio et al., 2011) or based on hydrological signatures (Chang et al., 2008;  
28 Ley et al., 2011; Toth, 2013); however, it is important to underline that the clustering is not  
29 carried out here in order to identify a pooling group of similar catchments for developing a  
30 region-specific model, but for the optimal division of the available data for the

1 parameterization and independent testing of a single model to be applied over the entire study  
2 area.

3 The SOM is in fact used to cluster similar data records together: an equal number of data  
4 records is then sampled from each cluster, ensuring that records from each class (that is  
5 catchments with different features) are represented in the training, validation and test sets,  
6 that, as a result, have similar statistical properties (Bowden et al., 2002; Shahin et al., 2004).

7 A SOM (Kohonen, 1997) organizes input data through non-linear techniques depending on  
8 their similarity. It is formed by two layers: the input layer contains one node (neuron) for each  
9 variable in the data set. The output-layer nodes are connected to every input through  
10 adjustable weights, whose values are identified with an iterative training procedure. The  
11 relation is of the competitive type, matching each input vector with only one neuron in the  
12 output layer, through the comparison of the presented input pattern with each of the SOM  
13 neuron weight vectors, on the basis of a distance measure (here the Euclidean one). In the  
14 trained (calibrated) SOM, all input vectors that activate the same output node belong to the  
15 same class.

16 In the present application, the dimension of the input layer is equal to three (that is, the first  
17 three principal components of the catchments descriptors); as far as the output layer is  
18 concerned, there is not a predefined number of classes; ~~and, given the small dimension of the~~  
19 ~~input variables,~~ it was here chosen a parsimonious output layer formed by three nodes in a  
20 row, each one corresponding to a class.

21 The three resulting clusters are formed respectively by 121, 70 and 76 catchments; each  
22 cluster is then divided into three parts, and one third is assigned to the training, validation and  
23 test sets respectively. Overall, the training, validation and test sets are therefore equally  
24 numerous (91, 88 and 88 records respectively) and formed by the same proportion of  
25 catchments belonging to each of the clusters, having eventually a similar information content,  
26 as shown by the similar statistics of the three variables in the three sets represented in Figure  
27 2.

28

## 4 Development of symmetric and asymmetric artificial neural networks models for estimating the 2-year return period flows at ungauged sites

### 4.1 Feedforward Artificial Neural Networks

Artificial neural networks are massively parallel and distributed information processing systems, composed by nodes, arranged in layers, that are able to infer a non-linear input-output relationship. ANN, and in particular feedforward networks have been widely used in many hydrological applications (see for example the recent review papers by Maier et al., 2010 and by Abrahart et al., 2012) and the readers may refer to the abundant literature for details on their characteristics and implementation.

Three different layer types can be distinguished: input layer, connecting the input information, one or more hidden layers, for intermediate computations, and an output layer, producing the final output; adjacent layers are connected through multiplicative weights and, in each node, the sum of weighted inputs and a threshold (called bias) is passed through a non-linear function known as an activation.

The models here applied are networks formed by one hidden layer, with tan-sigmoid activation functions, and a single output node (corresponding to the estimated flood with 2-year return period), with a linear activation function.

The identification of the network's weights and biases (called training procedure) is carried out with a non-linear optimization, searching the minimum of an error (or learning) function measuring the discrepancy between predicted and observed values, and feedforward networks are generally trained with a learning algorithm known as BackPropagation (Rumelhart et al. 1994) based on steepest descent or on more efficient quasi-newton methods.

In order to avoid overfitting, that degrades the generalisation ability of the model, the Early Stopping or Optimal Stopping procedure was applied (see, for example, Coulibaly et al., 2000). For applying Early Stopping, the available data have been divided into three disjoint subsets with a similar information content, as described in Section 3.2: a training set, an early-stopping validation set and a test set. While the network is parameterised minimising the error function on the training set, the error function on the early-stopping validation set is also monitored; if the error function on such second set increases continuously for a specific number of iterations, this is a sign of overfitting of the training set: the training is then stopped and network parameters at the lowest validation error are returned. The third set (test set) is

1 not used in any way during the parameterization phase, but it is used for out-of-sample,  
2 independent evaluation of the resulting models.

### 3 **4.2 Implementation of the symmetric model**

4 Neural networks, including those applied in the recent hydrological literature for the  
5 estimation of index floods or flood quantiles at ungauged sites, are traditionally trained  
6 minimizing the square error function, which is symmetrical about the y-axis and negative or  
7 positive discrepancies of the same magnitude result in the same function value.

8 In the present work, the results obtained by a network trained with a ‘conventional’ square  
9 error function are compared with those obtained when parameterising the network through the  
10 minimisation of an asymmetric loss function, that takes into account both over and  
11 underestimation discrepancies but penalizes more the overprediction errors, since the  
12 consequences of missing alarms are more severe than those of false alarms.

13 For both type of models, the output values (2-year flood values) are rescaled as a function of  
14 the overall minimum and maximum values to the [-0.95,+0.95] range, to facilitate the  
15 optimization algorithms and also avoid saturation problems by accommodating possible  
16 extreme values occurring outside the range of available data (Dawson and Wilby, 2001). Each  
17 implemented architecture is randomly initialized for ten times to help avoiding local optima:  
18 the parameter set that results in the minimum error function on the early stopping validation  
19 data (second set) is chosen as the trained network.

20 The first implemented model is obtained through the minimization of the traditional,  
21 symmetric mean squared error, applying the quasi-Newton Levenberg-Marquardt  
22 BackPropagation algorithm (Hagan and Menhaj 1994), widely applied and regarded as one of  
23 the most efficient neural network training algorithms.

24 The input variables are the first three principal components of the catchment descriptors, so  
25 the input layer is formed by three nodes; the output node corresponds to the estimated flood  
26 with 2-year return period; as far as the dimension of the hidden layer is concerned, there is,  
27 unfortunately, no definitive established methodology for its determination, because the  
28 optimal network architecture is highly problem-dependent: different architectures with a  
29 number of hidden nodes varying from 2 to 6 were set up and the mean squared error of the  
30 estimates issued for the third, independent set resulted the lowest with the hidden layer  
31 formed by 3 nodes.

1 The architecture with three input nodes, three hidden nodes and 1 output node, represented in  
2 Figure 3, is therefore the network finally chosen; the network parameterized minimising the  
3 symmetric mean square error function will be denoted as ANN-Symm, and its results will be  
4 in Section 5 compared with those of the asymmetric models having the same architecture but  
5 a different error function.

### 6 **4.3 Implementation of asymmetric models with varying degree of asymmetry**

7 The Quad-Quad loss function described in Section 2 is here applied for calibrating the  
8 network parameters of the asymmetric models. The learning function to be minimized is  
9 therefore the average value of the double quadratic errors (Mean Quad-Quad Error, *MQQE*),  
10 obtainable averaging the  $M$  (number of records in the set) errors given by Eq. (1) when  $p=2$ :

$$11 \quad MQQE = \frac{2}{M} \sum_{j=1}^M [\alpha - (1 - 2\alpha) \cdot \mathbf{1}\{\varepsilon > 0\}] \cdot |\varepsilon_j|^2 \quad (3)$$

12 The value of  $\alpha$ , corresponding to the degree of asymmetry of the loss function, cannot be  
13 fixed a priori, since such choice should be based on a location-specific cost-benefit analysis,  
14 keeping into account the avoidable losses (that is the direct and indirect losses, provided they  
15 may be quantifiable, that may be prevented by mitigation actions following an alarm issue)  
16 and the cost of the mitigation measures themselves. Such analysis is acknowledged to be  
17 extremely difficult, especially since it involves also intangible costs such as life losses, but  
18 also warning credibility issues; furthermore, the costs may change over time and are also  
19 dependent on the warning lead-time (see e.g. Martina et al., 2006; Verkade and Werner, 2011,  
20 Montesarchio et al., 2011/2014).

21 For this reason, in the present application, different asymmetric networks, with  $\alpha$  varying  
22 from 0.4 to 0.1, are implemented, in order to compare the results obtainable with a different  
23 asymmetry degree, that is a different extent of importance given to over/underestimation  
24 errors. Such asymmetrically trained network are in the following denoted as “Asymm- 0.4”,  
25 “Asymm- 0.3”, “Asymm- 0.2”, “Asymm- 0.1”.

26 The training of the four asymmetric networks, based on the minimisation of the Mean Quad-  
27 Quad Error, is carried out through the generalization of the backpropagation algorithm  
28 proposed by Crone (2002) and applied by Silva et al. (2010), that may be used for  
29 parameterising artificial neural networks with any differentiable (analytically or numerically)  
30 error function.

## 1 5 Results and discussion

### 2 5.1 Goodness-of-fit measures and plots

3 As described in section 4.2, the neural networks are trained over the standardized (rescaled)  
4 output values of the training and cross-validation sets and they are successively used for  
5 predicting the output over the independent test set: such ANN output values are then scaled  
6 back, obtaining the predictions  $Q_{2,p}$ .

7 The performances of the models are therefore evaluated through a set of indexes that describe  
8 the prediction error,  $\varepsilon$ , that is the difference between predictions,  $Q_{2,p}$  issued by the models (as  
9 a function of morpho-climatic attributes only) and the ‘observed’ 2-year flood values (the  
10 median of historical annual maxima),  $Q_{2,o}$ , on the third set (test set), formed by  $N=91$   
11 catchments distributed all over the country, whose data have not been used in any capacity in  
12 the models’ development.

13 The following error statistics have been computed:

14 *MAE (mean absolute error)*

$$15 \quad MAE = \frac{\sum_{i=1}^N |\varepsilon(i)|}{N}, \quad (4)$$

16 *RMSE (root mean square error)*

$$17 \quad RMSE = \sqrt{\frac{\sum_{i=1}^N (\varepsilon(i))^2}{N}}, \quad (5)$$

18 MAE and RMSE both represent a symmetric accuracy, corresponding to the distance of the  
19 predictions from the observations independently of the error sign (and the RMSE, being  
20 quadratic, emphasizes more the larger errors).

21 In order to keep into account the differences in sign of the errors, representing the extent of  
22 overpredictions as compared to underpredictions, the overall percentage of positive errors  
23 (Over%), is computed:

24 *Over% (percentage of overestimates)*

$$1 \quad \text{Over}\% = \frac{\{i=1, \dots, N | Q_{2,p}(i) > Q_{2,o}(i)\}}{N} \quad (6)$$

2 Such metric shows the general tendency of the model to overestimate (or to underestimate,  
3 since  $100 - \text{Over}\%$  represents, conversely, the proportion of underpredictions), but these  
4 indexes do not distinguish among errors of different magnitude, since they count also  
5 predictions that may be only barely above (or below) the targets, that is very good predictions,  
6 with minimum errors.

7 It is therefore computed also the number of the ‘high’ overestimation errors, keeping into  
8 account only the more relevant, and therefore potentially more dangerous, overpredictions. It  
9 was here considered as ‘high overprediction’ an estimate that is more than 30% higher than  
10 the corresponding target value:

11 *OverH%* (percentage of high overprediction errors)

$$12 \quad \text{OverH}\% = \frac{\{i=1, \dots, N | Q_{2,p}(i) > 1.3 \cdot Q_{2,o}(i)\}}{N} \quad (7)$$

13 The more conservative is the threshold estimate, the lower is the value of *OverH%*.

14 On the other hand, even if - as discussed - generally less crucial in terms of consequences,  
15 also the number of high underestimation errors should be monitored, since excessively low  
16 values imply the tendency of the model to establish thresholds leading to the issuance of too  
17 many false alarms.

18 *UnderH%* (percentage of high underprediction errors):

$$19 \quad \text{UnderH}\% = \frac{\{i=1, \dots, N | Q_{2,p}(i) < 0.7 \cdot Q_{2,o}(i)\}}{N} \quad (8)$$

20 In addition to the goodness-of-fit measures (reported in Table 2), the boxplot of the errors  
21 (predicted minus observed quantiles) is shown in Figure 4: the bottoms and tops of the  
22 rectangular boxes are respectively the lower and the upper quartiles, the horizontal segment  
23 inside the box is the median and the whiskers represent the 5th and 95th percentiles.



1 The results may be evaluated also through the scatterplots of predicted (y-axis) vs observed  
2 (x-axis) quantiles, shown in Figure 5 that shows every prediction  $Q_{2,p}$  in respect to the  
3 corresponding ‘observation’  $Q_{2,o}$ .

4

## 5 **5.2 Discussion of the results**

6 The boxplot (Fig. 4) allows to visually assess both the accuracy and the tendency to  
7 over/underestimate of the models: the boxes should be compact and close to the dotted line  
8 representing zero error but at the same time it is better if the data lie below such line, thus  
9 indicating that the method do not tend to overpredict the thresholds and the warning system is  
10 therefore less subject to miss a potentially dangerous flood.

11 It may be seen that for the network that was trained minimising the traditional Square Error  
12 (ANN-Symm) In Fig.4, the box and whiskers are centred on the zero-error line and the  
13 quantiles (top/bottom of the box, top/bottom whiskers) are at a similar distance from such  
14 line, again showing that the errors are equally distributed among overestimation and  
15 underestimations. The box is compact, demonstrating the good accurateness of the method for  
16 a substantial part of the test set, but, due to the symmetric disposition of the errors, many  
17 overestimation errors, also remarkably high, are issued, as shown by the position of the upper  
18 whisker.

19 Analysing Table 2, the relatively good accuracy of the ANN-Symm model is demonstrated by  
20 the values of the MAE and RMSE, that are the lowest among the implemented models. The  
21 symmetric distribution of the overall errors is shown by an Over% close to 50% and the  
22 similar values of the OverH% (34%) and UnderH% (32%) confirm that also the high relative  
23 errors are equally split among over and underestimates.

24 Such results were expected since the training is based on a symmetric loss function, but the  
25 consequence is that the ANN-Symm model issues a remarkable number of significant  
26 overprediction errors, in fact for about one third of the test catchments the estimates are more  
27 than 30% higher than the observations.

28 The analysis of Table 2 shows that the asymmetrically trained networks tend, for decreasing  $\alpha$   
29 values, to reduce the number of overestimations (positive errors). For the overall errors this is  
30 shown by the different proportion of over/underestimations, that moves from a value that

1 corresponds, approximately, to a balance, to a much more skewed distribution of positive vs  
2 negative errors, with Over% decreasing up to 31%.

3 At the same time, and more importantly, the number of positive (overestimation) errors larger  
4 than 30% substantially decreases with  $\alpha$ , with OverH% reaching a value that is much lower  
5 than that of the ANN-Symm model when  $\alpha$  arrives at 0.1 (18% vs 34%).

6 Conversely, as expected, the more asymmetric is the network, the higher are the  
7 underprediction errors, as shown by the values of UnderH%: the number of significant  
8 negative errors gradually increases from one third up to 47% of the total.

9 Also the accuracy (given by the total amount of the discrepancies independently of their sign)  
10 deteriorates when the asymmetry is more pronounced, but the drop is moderate and the  
11 RMSE and MAE values are not so far from those of the ANN-Symm network.

12 Looking at the parallel boxplots (Fig. 4), it may be seen that the boxes become less compact  
13 and, as expected, their position shifts downwards with increasing asymmetry. The length of  
14 the upper whiskers substantially decrease with  $\alpha$  but the length of the lower whiskers does not  
15 increase at the same rate, thus compensating for the fact that the boxes are taller for the more  
16 asymmetric models. It follows that the global distances from the 5% to the 95% percentiles  
17 (given by the distance between the ends of the top and bottom whiskers) are very close for the  
18 symmetric (ANN-Symm) and for the two most asymmetric networks, thus showing that the  
19 variability of the errors for the vast majority (middle 90%) of the data is similar. On the other  
20 hand, overall, the errors are moving towards the underestimation side for increasing  
21 asymmetry (as confirmed also by the corresponding median values) and for Asymm-04, the  
22 upper part of the box indicates that only about one quarter of the errors are overestimations.

23 It may be noted, in particular from the scatterplots (Fig. 5), that, for both symmetric and  
24 asymmetric models, the errors are not negligible: this is due to the shortcomings of the  
25 available data set but mainly to the intrinsic limitations of a regional approach applied to the  
26 extreme variability of the study area. As already underlined in Section 3.1, the national data  
27 set lacks important information that may help to characterise the hydrological behaviour and  
28 the phenomena governing formation of extreme flows. In addition to the unavoidable risk of  
29 erroneous data, the absence in the database of additional influences certainly further hampers  
30 the possibility to obtain a reliable relationship with the flood quantiles. Most importantly, the  
31 data set covers the entire Italian peninsula, characterised by extremely different hydro-

1 climatic settings (from Alpine to Mediterranean ones) and this high heterogeneity is certainly  
2 an additional reason that limits the performance.

3 Notwithstanding the limitations of the dataset, that affect equally all the proposed models, the  
4 results demonstrate that the use of the double quadratic error function, even if at the expense  
5 of more substantial underestimation errors, can substantially decrease the number and extent  
6 of overestimation errors, if compared to the use of the traditional square errors.

7 In the application to a specific cross section, the degree of asymmetry might be identified as  
8 proportional to the “risk averseness” of the situation: the more the impact of false alarms is,  
9 comparatively, small, the more the decision-makers are reluctant to the consequences  
10 (economic and social) of a flood and, rather than risking a missed alarm, can accept many  
11 cases of false alarm with the associated costs.

## 12 **6 Conclusions**

13 A crucial issue in the operation of flood forecasting/warning systems at ungauged locations is  
14 how to assess the possible impacts of the forecasted flows, that is the identification of  
15 streamflow values that may actually cause flooding, to be associated to thresholds that trigger  
16 the issuance of flood watches and warnings. The values that may produce damaging  
17 conditions (or “flooding flows”), when in absence of detailed local information on each cross-  
18 section, are in many parts of the world estimated as the peak floods having a certain return  
19 period, often the 2-year one, that is generally associated with the bankfull discharge.

20 For locations where the gauges are new or where historical rating curves are not available, the  
21 series of past annual flow maxima are absent or very limited, and the peak flow of given  
22 frequency to be associated with the watch/warning threshold can be estimated with  
23 regionally-derived empirical relationships, such as those that may be applied for the  
24 estimation of the index flood at ungauged sites. Such regression-like methods consist in a  
25 relation between a set of catchment descriptors that may be obtained also for ungauged sites  
26 and the desired flood quantile; linear or power forms are the most commonly used functions,  
27 but recent studies have successfully applied artificial neural network models, due to their  
28 flexibility, to flood quantile and index flood estimation.

29 Whatever is the function form, such models are generally parameterised by minimising the  
30 mean square error, that assigns equal weight to overprediction or underprediction errors,  
31 whereas, instead, the consequences of such errors are extremely different when the estimates

1 are to be used as warning threshold. In fact, false alarms (due to an underprediction of the  
2 warning threshold) generally have a much higher level of acceptance than misses (that would  
3 derive from an overestimated threshold).

4 For this reason, in the present work, the regression model (a feed-forward neural network) is  
5 parameterised minimising an asymmetric error function (of the double quadratic type), that  
6 penalizes more the overestimation than the underestimation discrepancies. The predictions of  
7 models with increasing degree of asymmetry are compared with those of a traditional (trained  
8 on the symmetric mean of square errors) neural network, in a rigorous cross-validation  
9 experiment referred to a database of catchments covering all the Italian country.

10 The results confirm, as expected, that the more asymmetric is the network, the more  
11 numerous and higher are the underprediction errors, and the less numerous and less severe are  
12 the overestimation errors. As also expectable, the symmetric accuracy decreases when the  
13 asymmetry is more pronounced, but the drop is moderate and the RMSE and MAE values are  
14 not so far from those of the traditionally trained network.

15 Undoubtedly, the nature of the regional approach, as well as the shortcomings of the dataset  
16 and the extreme heterogeneity of the study area, generate errors much greater than those  
17 obtainable with detailed local studies. On the other hand, where no alternatives exist, the  
18 proposed methodology may provide a preliminary estimate of the threshold runoff that do not,  
19 ~~prudentially~~, overestimate the actual flooding flow.

20 Notwithstanding the acknowledged limitations of the dataset, that affect equally all the  
21 proposed models, the analysis shows that the use of the asymmetric error function  
22 substantially reduces the number and extent of overestimation errors, if compared to the use  
23 of the traditional square errors. Of course such reduction is at the expense of increasing  
24 underestimation errors, but the overall precision is still acceptable and the study highlights the  
25 potential benefit of choosing an asymmetric error function when the consequences of missed  
26 alarms are more severe than those of false alarms.

27 Minimising the asymmetric error function has the purpose of optimizing the threshold from  
28 an operational point of view, in a deterministic framework: future analyses may be devoted to  
29 investigate the uncertainty of the issued predictions, since a probabilistic approach (provided  
30 that the methodology is able to include all sources of uncertainty and its quality may be  
31 objectively assessed) may provide very valuable insights for a more complete evaluation of  
32 the model, supplementing the information provided by point-value predictions.

1 It is important to highlight that the asymmetric error function is used, in this study, to  
2 parameterise a neural network, but of course it might be used to optimize any other model or  
3 equation, when aiming at obtaining conservative estimates, for safety reasons.

4 The appropriate degree of asymmetry might be identified depending on the risk-averseness of  
5 the specific flood-prone context. The quantification of risk aversion is extremely difficult and  
6 case-specific: it should keep into account that the perception of society may be very different  
7 from a technical appraisal of the involved costs and it should include also indirect, intangible  
8 and long-term impacts. More research on the societal perception in different contexts would  
9 greatly improve the process of risk-based decision-making (Merz et al., 2009), including the  
10 choices concerning flood-warning thresholds. Hopefully, in the next years, a more direct  
11 collaboration between the hydrologic and socio-economic research communities, as  
12 auspicated in the new Panta Rhei science initiative (Montanari et al., 2013; Javelle et al.,  
13 2014), will provide a progress in this direction.

14

## 15 **Acknowledgements**

16 The author thanks Monica Di Prinzio and Attilio Castellarin for the elaboration of the dataset  
17 carried out in 2011 within the Italian National Programme CUBIST.

18 The present work was developed within the framework of the Panta Rhei Research Initiative  
19 of the International Association of Hydrological Sciences (IAHS), Working Group on “Data-  
20 driven hydrology”.

21

## 22 **References**

23 Abrahart, R.J., Anctil, F., Coulibaly, P., Dawson, C.W., Mount, N.J., See, L.M., Shamseldin,  
24 A.Y., Solomatine, D.P., Toth, E., and Wilby, R.L.: Two decades of anarchy? Emerging  
25 themes and outstanding challenges for neural network river forecasting, *Progress in Physical*  
26 *Geography*, 36(4), 480–513, doi:10.1177/0309133312444943, 2012.

27 Archfield, S.A., Pugliese, A., Castellarin, A., Skøien, J.O., and Kiang, J.E.: Topological and  
28 canonical kriging for design flood prediction in ungauged catchments: an improvement over a  
29 traditional regional regression approach?, *Hydrol. Earth Syst. Sci.*, 17, 1575-1588, 2013.

1 Aziz, K., Rahman, A., Fang, G., and Shreshtha, S.: Application of Artificial Neural Networks  
2 in Regional Flood Frequency Analysis: A Case Study for Australia, *Stochastic Environment*  
3 *Research & Risk Assessment*, 28, 541-554, DOI 10.1007/s00477-013-0771-5, 2013.

4 Bloeschl, G., Sivapalan M., Wagener, T, Viglione A. and Savenije, H. (Eds): Runoff prediction  
5 in ungauged basins: Synthesis across processes, places and scales, Cambridge University  
6 Press, New York, USA, 2013.

7 Bocchiola, D., De Michele, C., and Rosso, R.: Review of recent advances in index flood  
8 estimation, *Hydrol. Earth Syst. Sci.*, 7, 83–296, doi:10.5194/hess-7-283-2003, 2003.

9 Bowden, G. J., Maier, H. R., and Dandy, G. C.: Optimal division of data for neural network  
10 models in water resources applications, *Water Resour. Res.*, 38(2), 1010,  
11 10.1029/2001WR000266, 2002.

12 Brath, A., Castellarin, A., Franchini, M., and Galeati, G.: Estimating the index flood using  
13 indirect methods, *Hydrological Sciences Journal*, 46(3), 399-418, 2001.

14 Carpenter, T. M., Sperflage J. A., Georgakakos K. P., Sweeney T., and Fread D. L.: National  
15 threshold runoff estimation utilizing GIS in support of operational flash flood warning  
16 systems, *J. Hydrol.*, 224, 21–44, 1999.

17 Chang, F. J., Tsai, M. J., Tsai, W. P., and Herricks, E. E.: Assessing the Ecological Hydrology  
18 of Natural Flow Conditions in Taiwan, *J. Hydrol.*, 354, 75–89, 2008.

19 Christoffersen P.F., and Diebold F.X.: Further results on forecasting and model selection  
20 under asymmetric loss, *J App Econom*, 11, 561–571, 1996.

21 Claps and the CUBIST Team, Development of an Information System of the Italian basins for  
22 the CUBIST project, *Geophysical Research Abstracts*, 10, EGU2008-A-12048, 2008.

23 Coulibaly, P., Anctil, F., and Bobee, B.: Daily reservoir inflow forecasting using artificial  
24 neural networks with stopped Training Approach, *J. Hydrol.*, 230, 244–257, 2000.

25 Crone, S.F.: Training Artificial Neural Networks using Asymmetric Cost Functions, in:  
26 *Proceedings of the 9th International Conference on Neural Information Processing*  
27 *(ICONIP'02)*, 18-22 november 2002, Singapore, Vol. 5, IEEE, Singapore, 2374- 2380, 2002.

28 Cunha, L. K., Krajewski W.F., and Mantilla R.: A framework for flood risk assessment under  
29 nonstationary conditions or in the absence of historical data, *J. Flood Risk Manage.*, 4(1), 3–  
30 22, 2011.

- 1 Cunnane, C.: Review of statistical models for flood frequency estimation, in V. P. Singh  
2 (Ed.), Hydrologic frequency modeling, Springer Netherlands, 49-95, 1987.
- 3 Dalrymple, T.: Flood frequency analyses., Water Supply Paper 1543-A. U.S. Geological  
4 Survey, Reston, Virginia, USA, 1960.
- 5 Daňhelka, J., and Vlasák, T: Evaluation of Real-time Flood Forecasts in the Czech Republic,  
6 2002-2012, Czech Hydrometeorological Institute Report, last access date: 17 June 2015,  
7 2013. ([http://www.chmi.cz/files/portal/docs/poboc/CB/pruvodce/vyhodnoceni\\_en.html](http://www.chmi.cz/files/portal/docs/poboc/CB/pruvodce/vyhodnoceni_en.html))
- 8 Dawson, C.W., Abrahart, R.J., Shamseldin, A.Y., and Wilby R.L.: Flood estimation at  
9 ungauged sites using artificial neural networks, *J Hydrol.*, 319, 391–409, 2006.
- 10 Dawson C. and Wilby, R.: Hydrological modelling using artificial neural networks, *Progress*  
11 *in Physical Geography*, 25, 1, 80–108, 2001.
- 12 Di Prinzio, M., Castellarin, A., and E. Toth E.: Data-driven catchment classification:  
13 application to the PUB problem, *Hydrology and Earth System Sciences*, 15, 1921-1935, 2011.
- 14 Diebold, F. X., and Lopez, J. A.: Forecast Evaluation and Combination, in G. S. Maddala and  
15 C. R. Rao (Eds.), *Handbook of Statistics*, Vol. 14, Amsterdam, 241-268, 1996.
- 16 Elliott, G., Komunjer, I., and Timmermann, A.: Estimation and Testing of Forecast  
17 Rationality under Flexible Loss, *Review of Economic Studies*, 72(4), 1107-1125, 2005.
- 18 Granger, C. W. J.: Outline of Forecast Theory Using Generalized Cost Functions, *Spanish*  
19 *Economic Review*, 1, 161-173, 1999.
- 20 Granger, C. W. J., and Pesaran, M. H.: A Decision Theoretic Approach to Forecast  
21 Evaluation, in W. S. Chan, W. K. Li and H. Tong (Eds.) *Statistics and Finance: An Interface*,  
22 Imperial College Press, London, 261-278, 2000.
- 23 GREHYS (Groupe de recherche en hydrologie statistique): Presentation and review of some  
24 methods for regional flood frequency analysis, *J. Hydrol.*, 186, 63–84, 1996.
- 25 Griffis, V. W., and Stedinger, J. R.: The use of GLS regression in regional hydrologic  
26 analyses, *J. Hydrol.*, 344(1–2), 82–95, 2007.
- 27 Hagan, M. T., and Menhaj, M. : Training feedforward networks with the Marquardt  
28 algorithm, *IEEE T.Neural Networ.* 5(6), 989-993, 1994.

- 1 Hall, M.J., and Minns A.W.: The classification of hydrologically homogeneous regions,  
2 *Hydrol. Sci. J.* 44(5), 693–704, 1999.
- 3 Hall, M.J., Minns, A.W., and Ashrafuzzaman, A.K.M.: The application of data mining  
4 techniques for the regionalization of hydrological variables, *Hydrology and Earth System*  
5 *Sciences*, 6(4), 685–694, 2002.
- 6 Hapuarachchi, H. A. P., Wang, Q. J., and Pagano, T. C.: A review of advances in flash flood  
7 forecasting, *Hydrol. Process.*, 25, 2771–2784, 2011.
- 8 Harman C., Stewardson M., and DeRose R.: Variability and uncertainty in reach bankfull  
9 hydraulic geometry, *J Hydrol.*, 351, (1–2), 13–25, 2008.
- 10 Javelle, P., Demargne, J., Defrance, D., Pansu, J., and Arnaud, P.: Evaluating flash flood  
11 warnings at ungauged locations using post-event surveys: a case study with the AIGA  
12 warning system. *Hydrological Sciences Journal*, 59 (7), 1390–1402, 2014.
- 13 Kalteh, A.M., Hjorth, P., and R. Berndtsson, R.: Review of the self-organizing map (SOM)  
14 approach in water resources: Analysis, modelling and application, *Environmental Modelling*  
15 *& Software*, 23, 835-845, 2008.
- 16 Kjeldsen, T. R., Smithers, J. C., and Schulze, R. E.: Flood frequency analysis at ungauged  
17 sites in the KwaZulu-Natal Province, South Africa, *Water S.A.*, 27(3), 315-324, 2001.
- 18 Kjeldsen, T. R., Jones, D. A., and Morris, D. G.: Using multiple donor sites for enhanced  
19 flood estimation in ungauged catchments, *Water Resources Research*, 50 (8), 6646–6657,  
20 2014.
- 21 Kocjancic, R., and Zupan, J.: Modeling of the river flowrate: the influence of the training set  
22 selection, *Chemom. Intell. Lab. Syst.*, 54, 21–34, 2000.
- 23 Kohonen, T.: *Self-Organizing Maps*, 2nd ed., Springer, Berlin, ISBN 3-540-62017-6, 1997.
- 24 Ley, R., Casper, M. C., Hellebrand, H., and Merz, R.: Catchment classification by runoff  
25 behaviour with self-organizing maps (SOM), *Hydrol. Earth Syst. Sci.*, 15, 2947–2962,  
26 doi:10.5194/hess-15-2947-2011, 2011.
- 27 Maier, H.R., Jain A., Dandy, G.C., and Sudheer, K.P.: Methods used for the development of  
28 neural networks for the prediction of water resource variables in river systems: Current status  
29 and future directions, *Environmental Modelling & Software*, 25(8), 891-909, DOI:  
30 10.1016/j.envsoft.2010.02.003, 2010.



1 Martina M.L.V., Todini E., and Libralon A.: A Bayesian decision approach to rainfall  
2 thresholds based flood warning, *Hydrology and Earth System Sciences*, 10, 1-14, 2006

3 Merz, B., Elmer, F., and Thielen, A. H.: Significance of “high probability/low damage”  
4 versus “low probability/high damage” flood events, *Nat. Hazards Earth Syst. Sci.*, 9, 1033–  
5 1046, doi:10.5194/nhess-9-1033-2009, 2009.

6 Merz, R., and Blöschl, G.: Flood frequency regionalisation—Spatial proximity vs. catchment  
7 attributes, *J. Hydrol.*, 302, 283–306, 2005.

8 Minns A.W., and Hall M.J.: Artificial neural network concepts in hydrology. In *Encyclopedia*  
9 *of Hydrological Sciences*, Anderson MG, McDonnell JJ (eds). John Wiley and Sons:  
10 Chichester, UK, pp. 307-320, 2005.

11 Montanari, A., Young, G., Savenije, H.H.G., Hughes, D., Wagener, T., Ren, L.L.,  
12 Koutsoyiannis, D., Cudennec, C., Toth, E., Grimaldi, S., Blöschl, G., Sivapalan, M., Beven,  
13 K., Gupta, H., Hipsey, M., Schaeffli, B., Arheimer, B., Boegh, E., Schymanski, S.J., Di  
14 Baldassarre, G., Yu, B., Hubert, P., Huang, Y., Schumann, A., Post, D.A., Srinivasan, V.,  
15 Harman, C., Thompson, S., Rogger, M., Viglione, A., McMillan, H., Characklis, G., Pang, Z.,  
16 and Belyaev, V: *Panta Rhei-Everything Flows: Change in hydrology and society-The IAHS*  
17 *Scientific Decade 2013-2022*, *Hydrological Sciences Journal*, 58(6), 1256-1275, 2013.

18 Montesarchio, V., Ridolfi, E., Russo, F., and Napolitano, F.: Rainfall threshold definition  
19 using an entropy decision approach and radar data, *Nat. Hazards Earth Syst. Sci.*, 11, 2061-  
20 2074, doi:10.5194/nhess-11-2061-2011, 2011.

21 Muttiah R.S., Srinivasan R., and Allen, P.M.: Prediction of two year peak stream discharges  
22 using neural networks, *J Am Water Resour Assoc*, 33(3), 625–630, 1997.

23 Norbiato, D., Borga, M., and Dinale, R.: Flash flood warning in ungauged basins by use of the  
24 flash flood guidance and model-based runoff thresholds, *Meteorol. Appl.*, 16, 65–75,  
25 doi:10.1002/met.126, 2009.

26 Ntelekos, A. A., Georgakakos, K.P., and Krajewski, W.F.: On the uncertainties of flash flood  
27 guidance: Towards probabilistic forecasting of flash floods, *J. Hydrometeorol.*, 7(5), 896–915,  
28 doi:10.1175/JHM529.1, 2006.

29 Pandey, G.R., and Nguyen, V-T-V.: A comparative study of regression based methods in  
30 regional flood frequency analysis, *Journal of Hydrology*, 225, 92-101, 1999.

1 Pappenberger, F., Bartholmes, J., Thielen, J., Cloke, H., Buizza, R., and de Roo, A.: New  
2 dimensions in early flood warning across the globe using grand-ensemble weather  
3 predictions, *Geophys. Res. Lett.*, 35, L10404, doi:10.1029/2008GL033837, 2008.

4 Patton, A.J., and Timmermann. A.: Properties of Optimal Forecasts under Asymmetric Loss  
5 and Nonlinearity, *Journal of Econometrics*, 140(2), 884–918, 2007.

6 Reed, S., Schaake, J., and Zhang, Z.: A distributed hydrologic model and threshold frequency  
7 based method for flash flood forecasting at ungauged locations, *J. Hydrol.*, 337(3–4), 402–  
8 420, 2007.

9 Rumelhart, D.E., Widrow, B, and Lehr, M.A.: The basic ideas in neural networks.  
10 *Communications of the ACM*, 37(3), 87-92, 1994.

11 Salinas, J.L.O., Laaha, G.; Rogger, M., Parajka, A., Viglione, A., Sivapalan, M., and Blöschl,  
12 G.: Comparative assessment of predictions in ungauged basins – Part 2. Flood and low flow  
13 studies, *Hydrol. Earth Syst. Sci.*, 17, 2637–2652, 2013.

14 Sene, K.: *Flash floods: forecasting and warning*, Springer, Dordrecht, 385 p. ISBN:  
15 9789400751637, 2013.

16 Shahin, M., Maier, H., and Jaksa, M. : *Data Division for Developing Neural Networks*  
17 *Applied to Geotechnical Engineering*, *J. Comput. Civ. Eng.*, 18(2), 105–114, 2004.

18 Shu C., and Burn, D.H.: Artificial neural network ensembles and their application in pooled  
19 flood frequency analysis. *Water Resour. Res* 40(9):W09301. doi:10.1029/2003WR002816,  
20 2004.

21 Shu C., and Ouarda T.B.M.J.: Regional flood frequency analysis at ungauged sites using the  
22 adaptive neuro-fuzzy inference system, *J Hydrol*, 349, 31–43, 2008.

23 Silva, D.G.E., Jino, M., and de Abreu, B.T.: Machine learning methods and asymmetric cost  
24 function to estimate execution effort of software testing, in: *Proc. Third International*  
25 *Conference on Software Testing, Verification and Validation (ICST)*, Paris, 7-9 April 2010,  
26 IEEE, New York, 275-284, 2010.

27 Simor V., Hlavcova K., Silvia Kohnova S., and Szolgay J.: Application of Artificial Neural  
28 Networks for estimating index floods, *Contributions to Geophysics and Geodesy*, 42/4, 295–  
29 311, 2012.

1 Singh, K.K., Pal, M. and Singh V.P.: Estimation of Mean Annual Flood in Indian Catchments  
2 Using Backpropagation Neural Network and M5 Model Tree, *Water Resour Manage*, 24,  
3 2007–2019, DOI 10.1007/s11269-009-9535-x, 2010.

4 Smith, A., Sampson, C., and P. Bates, P.: Regional flood frequency analysis at the global  
5 scale, *Water Resour. Res.*, 51, 539–553, doi:10.1002/2014WR015814, 2015.

6 Srinivas, V.V., Tripathi, S., Rao, A.R., and Govindaraju R.S.: Regional flood frequency  
7 analysis by combining self-organizing feature maps and fuzzy clustering, *J. Hydrol.*, 348(1–  
8 2), 148–166, 2008.

9 Stedinger, J. R., and Lu, L.: Appraisal of regional and index flood quantile estimators,  
10 *Stochastic Hydrol. Hydraul.*, 9(1), 49–75, 1995

11 Stedinger, J. R., and Tasker, G. D.: Regional hydrologic analysis 1. Ordinary, weighted, and  
12 generalized least squares compared, *Water Resour. Res.*, 21(9), 1421–1432, 1985.

13 Toth, E.: Catchment classification based on characterisation of streamflow and precipitation  
14 time series, *Hydrology and Earth System Sciences*, 17, 1149-1159, doi:10.5194/hess-17-  
15 1149-2013, 2013.

16 Toth, E.: Asymmetric Error Functions for Reducing the Underestimation of Local Scour  
17 around Bridge Piers: Application to Neural Networks Models., *J. Hydraul. Eng.*, 141(7),  
18 04015011, doi: 10.1061/(ASCE)HY.1943-7900.0000981, 2015.

19 UCAR (University Corporation for Atmospheric Research): Flash Flood Early Warning  
20 System Reference Guide 2010, ISBN 978-0-615-37421-5, last access date: 17 June 2015, 2010  
21 ([http://www.meted.ucar.edu/communities/hazwarnsys/ffewsrsg/FF\\_EWS.pdf](http://www.meted.ucar.edu/communities/hazwarnsys/ffewsrsg/FF_EWS.pdf)).

22 Verkade, J. S., and Werner, M. G. F.: Estimating the benefits of single value and probability  
23 forecasting for flood warning, *Hydrol. Earth Syst. Sci.*, 15, 3751–3765, doi:10.5194/hess-15-  
24 3751-2011, 2011.

25 Ward, P.J., Jongman, B., Sperna Weiland, F.C., Bouwman, A., van Beek, R., Bierkens,  
26 M.F.P., Ligtoet, W., and Winsemius, H.C.: Assessing flood risk at the global scale: Model  
27 setup, results, and sensitivity, *Environmental Research Letters* 8, 44019, doi:10.1088/1748-  
28 9326/8/4/044019, 2013.

1 Wilkerson G.V.: Improved bankfull discharge prediction using 2-year recurrence-period  
2 discharge, J Am Water Resour Assoc., 44(1), 243–258, DOI: 10.1111/j.1752-  
3 1688.2007.00151.x, 2008.

4 WMO, Manual on flood forecasting and warning, WMO Series No. 1072, 142 pp, ISBN: 978-  
5 92-631-1072-5, last access date: 17 June 2015, 2011.  
6 (<http://www.wmo.int/pages/prog/hwrp/publications.php>)

7

1 **Tables**

2

3 Table 1. Geomorphological and climatic descriptors of the CUBIST database of Italian  
4 catchments

---

1	Long - UTM longitude of catchment centroid
2	Lat - UTM latitude of catchment centroid
3	A - Catchment drainage area
4	P - Catchment perimeter
5	zmax - Maximum elevation of the catchment area
6	zmin - Elevation of the catchment outlet
7	zmean - Mean elevation of the catchment area
8	L - Length of the Maximum Drainage Path
9	SL - Average slope along the Maximum Drainage Path
10	SA - Catchment average slope
11	$\Phi$ - Catchment orientation
12	MAP - Mean Annual Precipitation

---

5

6

7 Table 2. Goodness-of-fit criteria of the 2-year floods estimates obtained by the symmetric and  
8 asymmetric networks on the independent test set of catchments.

---

Model\Index	MAE ( $m^3/s$ )	RMSE( $m^3/s$ )	Over%	OverH%	UnderH%
<i>Symm</i>	98	133	46%	34%	32%
Asymm-04	104	147	42%	32%	35%
Asymm-03	105	152	41%	30%	37%
Asymm-02	108	162	36%	27%	41%
Asymm-01	115	178	31%	18%	47%

---

9

10

1 **Figure Captions**

2 Figure 1. Asymmetric Quad-Quad loss function (with  $\alpha$  varying from 0.1 to 0.9) compared with  
3 the Squared Error (SE).

4

5 Figure 2: Mean value (red dash) and the bars comprised between the 90% and 10% percentiles of  
6 the resulting training, cross-validation and testing sets, for each of the three input variable (PC1,  
7 PC2 and PC3).

8

9 Figure 3. Architecture of the chosen network, with three input nodes, three hidden nodes and 1  
10 output node.

11

12 Figure 4. Parallel box-plots of the errors ( $\epsilon=Q_{2,o}-Q_{2,p}$ ) of the 2-year floods estimates obtained  
13 by symmetric and asymmetric networks on the independent test set of catchments.

14

15 Figure 5. Scatterplots of the predicted (y-axis) vs observed (x-axis) 2-year floods estimates on the  
16 independent test set of catchments, for the symmetric and asymmetric models.

17

Figure 1. Asymmetric Quad-Quad loss function (with  $\alpha$  varying from 0.1 to 0.9) compared with the Squared Error (SE).

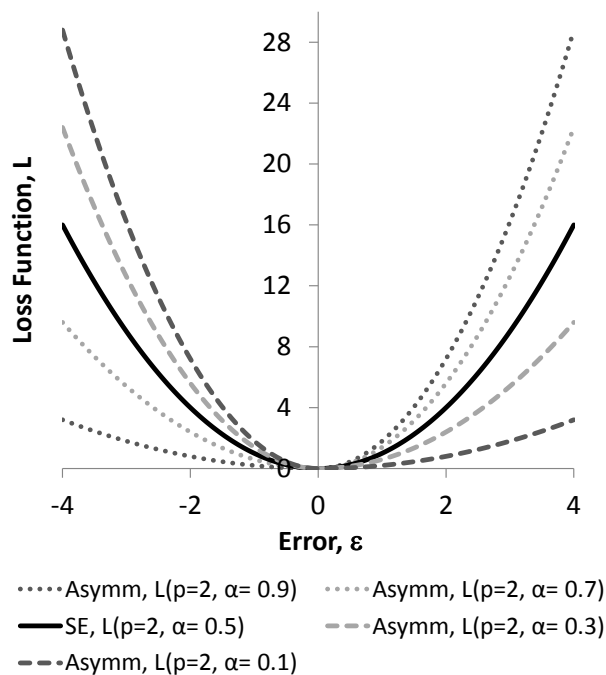


Figure 2: Mean value (red dash) and the bars comprised between the 90% and 10% percentiles of the resulting training, cross-validation and testing sets, for each of the three input variable (PC1, PC2 and PC3).

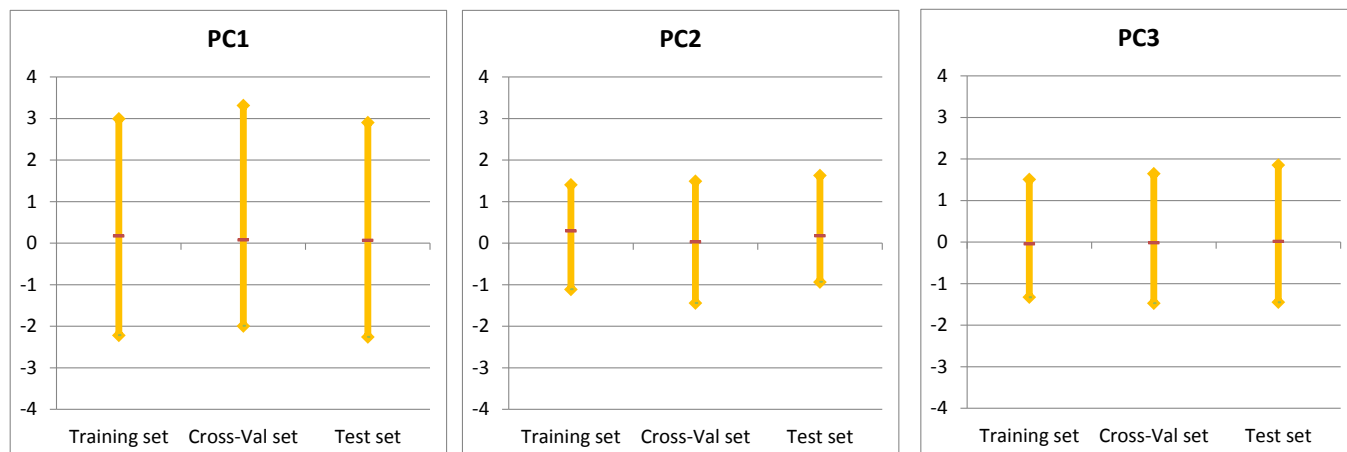


Figure 3. Architecture of the chosen network, with three input nodes, three hidden nodes and 1 output node.

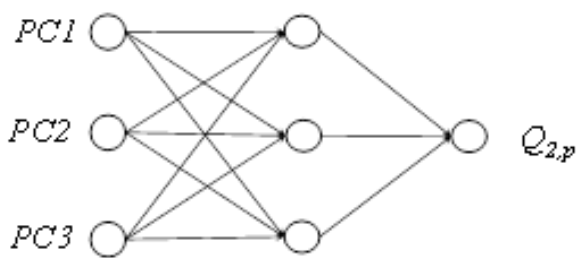


Figure 4. Parallel box-plots of the errors ( $\epsilon=Q_{2,o}-Q_{2,p}$ ) of the 2-year floods estimates obtained by symmetric and asymmetric networks on the independent test set of catchments.

(added title of y-axis)

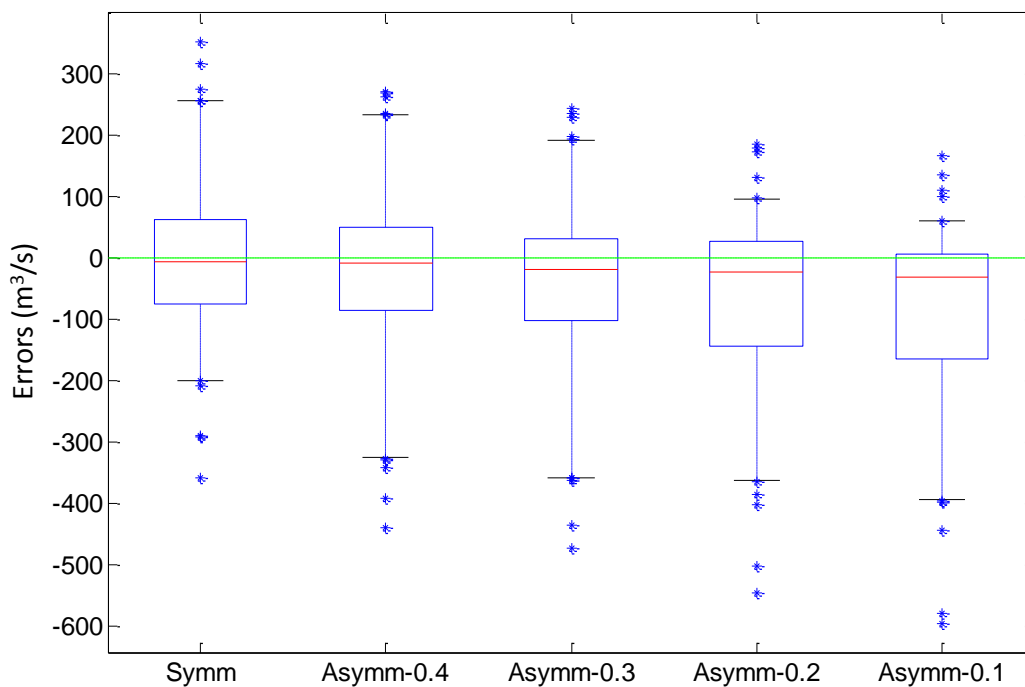




Figure 5. Scatterplots of the predicted (y-axis) vs observed (x-axis) 2-year floods estimates on the independent test set of catchments, for the symmetric and asymmetric models.

(added title of x- and y-axis)

