



This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Estimation of flood warning runoff thresholds in ungauged basins with asymmetric error functions

E. Toth

Department DICAM, School of Engineering, University of Bologna, Bologna, Italy

Received: 15 May 2015 – Accepted: 29 May 2015 – Published: 22 June 2015

Correspondence to: E. Toth (elena.toth@unibo.it)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Abstract

In many real-world flood forecasting systems, the runoff thresholds for activating warnings or mitigation measures correspond to the flow peaks with a given return period (often the 2-year one, that may be associated with the bankfull discharge). At locations where the historical streamflow records are absent or very limited, the threshold can be estimated with regionally-derived empirical relationships between catchment descriptors and the desired flood quantile. Whatever is the function form, such models are generally parameterised by minimising the mean square error, that assigns equal importance to overprediction or underprediction errors.

Considering that the consequences of an overestimated warning threshold (leading to the risk of missing alarms) generally have a much lower level of acceptance than those of an underestimated threshold (leading to the issuance of false alarms), the present work proposes to parameterise the regression model through an asymmetric error function, that penalises more the overpredictions.

The estimates by models (feedforward neural networks) with increasing degree of asymmetry are compared with those of a traditional, symmetrically-trained network, in a rigorous cross-validation experiment referred to a database of catchments covering the Italian country. The analysis shows that the use of the asymmetric error function can substantially reduce the number and extent of overestimation errors, if compared to the use of the traditional square errors. Of course such reduction is at the expense of increasing underestimation errors, but the overall accurateness is still acceptable and the results illustrate the potential value of choosing an asymmetric error function when the consequences of missed alarms are more severe than those of false alarms.

1 Introduction

In the operation of flood forecasting systems, it is necessary to determine the values of threshold runoff that trigger the issuance of flood watches and warnings. Such critical

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



values might be used for threshold-based flood alert based on real-time data measurements along the rivers (WMO, 2011) or for identifying in advance, through a rainfall–runoff modelling chain, the rainfall quantities that will lead to surpass such streamflow levels, as in the Flash Flood Guidance Systems framework (Carpenter et al., 1999; Ntelekos et al., 2006; Reed et al., 2007; Norbiato et al., 2009).

A runoff threshold should correspond to a “flooding flow”, that is to a value that may produce flood damages, and it is very difficult to determine on a regional or national scale: it may be defined as a flow that just exceeds bankfull conditions, but in practice, both in gauged and in ungauged river sections, such conditions are arduous to quantify due to the lack of local information (Reed et al., 2007; Hapuarachchi et al., 2011).

In absence of more sophisticated physically-based approaches, based on detailed information of each specific cross-section that are rarely available due to limited field surveys, the literature suggests to estimate the bankfull flow as the flood having a 1.5 to 2-year return period (Carpenter et al., 1999; Reed et al., 2007; Harman et al., 2008; Wilkerson, 2008; Hapuarachchi et al., 2011; Cunha et al., 2012; Ward et al., 2013) and a flow that is slightly higher than bankfull may be identified with the 2-year return period flood (Carpenter et al., 1999; Reed et al., 2007).

Many operational systems all around the world adopt a statistically-based definition of the flooding flow and the flows associated with given return periods are used as threshold stages for activating flood warning procedures.

The 2 years recurrence is used by many River Forecast Services in the United States, as suggested by Carpenter et al. (1999), also due to the fact that “*the good national coverage of the 2-yr return period flows that the U.S. Geological Survey (USGS) maintains nationwide supports its use*” (Ntelekos et al., 2006), as well as in British Columbia (Canada).

However, the floods with different annual exceedance probabilities, associated with different levels of risk, are also frequently adopted in real-word flood warning systems: for example in the Czech Republic, flood watch usually corresponds to a 1- to 5-year flow return period (Daňhelka and Vlasák, 2013). In Italy, where a national directive

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



issued in 2004 introduces a system articulated on at least two levels of flow thresholds, many Regions have identified the alert levels as flood quantiles with return periods of 2, 5 or 10 years (e.g. the Abruzzo, Lombardia, Puglia Regions). In the South of France, the AIGA flood warning system compares real-time peak discharge estimated along the river network (on the basis of rainfall field estimates and forecasts) to flood frequency estimates of given return periods (with three categories: yellow for values ranging from the 2-year to the 10-year flood, orange for between the 10 and the 50-year flood, and red for peaks exceeding the 50-year flood) in order to provide warnings to the national and regional flood forecasting offices (Javelle et al., 2014).

For river sections where the streamflow gauges are newly installed or where historical rating curves are not available, the observations of the annual maxima are absent or very limited and it is not possible obtaining a reliable estimate of flood quantiles on the basis of statistical analyses of series of observed flood peak discharges.

For these ungauged or poorly gaged basins, the peak flow of given frequency to be associated with the watch/warning threshold can be estimated with regionalisation methods, such as those usually applied in RFFA (Regional Flood Frequency Analysis) at ungauged sites and that have always received considerable attention in the hydrologic literature (Bloeschl et al., 2013). These analyses, transferring information from data-rich sites to data-poor ones, are traditionally applied for (i) the estimation of the index flood (Darlymple, 1960), usually defined as either the mean or the median (that is the 2-year return period quantile) of the annual maximum flood series, or for (ii) the direct estimate of other quantiles of annual maxima in ungauged basins (Stedinger and Lu, 1995; Salinas et al., 2013).

Such approaches are based on the assumption that there is a relationship between catchment properties and the flood frequency statistics and are implemented through a regression-type model that relates the flood quantile or the index flood to a number of relevant morpho-climatic indexes. Linear or power (often linearized through a log-transformation) forms, with either a multiplicative or additive error term, are the most commonly used functions (see e.g. Stedinger and Tasker, 1985; GREHYS, 1996;

Pandey and Nguyen, 1999; Brath et al., 2001; Kjeldsen et al., 2001, 2014; Bocchiola et al., 2003; Merz and Bloeschl, 2005; Griffis and Stedinger, 2007; Archfield et al., 2013; Smith et al., 2015).

In order to allow more flexibility to the model structure (whose “true” form is of course not known), the international literature has recently proposed methods based on the use of artificial neural networks (ANN), providing a non-linear relationship between the input and output variables without having to define its functional form a priori. Successful applications of ANN for the estimation of index floods or flood quantiles at ungauged sites are reported in Muttiah et al., 1997; Hall et al., 2002; Dawson et al., 2006; Shu and Burn, 2004; Shu and Ouarda, 2008; Singh et al., 2010; Simor et al., 2012; Aziz et al., 2013.

Both the traditional power form or linear regression methods and the neural networks models are generally parameterized by minimizing the mean or root mean of the squared errors, that is a symmetric function assigning the same importance to overestimation and underestimation errors.

Nevertheless, the consequences of under or overestimating the runoff threshold when used for early warning are extremely different.

Adopting a watch threshold that is higher than the runoff/stage that actually produces flooding damages would in fact lead to missing such events, failing to issue an alarm. Underestimating the runoff threshold may instead determine the issue of false alarms.

False alarms may certainly lead to money losses and also “undermine the credibility of the warning organisation but are generally much less costly than an unwarned event.” (UCAR, 2010): in fact the costs of failing to issue an alarm grow rapidly in a real emergency, since a totally missed event has strongly adverse effects on preparedness. Not only the costs of false warnings are commonly much smaller than the avoidable losses of a flood, but they cannot match up to indirect and/or intangible flood damages such as loss of lives or serious injuries (Pappenberger et al., 2008; Verkade and Werner, 2011).

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Furthermore, regarding the effects of false alarms, “in opposition to “cry wolf” effect, for some they may provide an opportunity to check procedures and raise awareness, much like a fire practice drill.” (Sene, 2013).

Overall, false alarms have usually a higher level of acceptance than misses and this entails that the estimate of flood warning thresholds should be cautionary, so as to reduce, conservatively, the number of missed alarms.

For the development of watches and warnings it is therefore important to obtain estimates as accurate as possible, minimising both positive and negative errors, but, considering that an error will always be present, it is better underpredicting rather than overpredicting the threshold estimate, for safety reasons.

To obtain a conservative estimate of the thresholds, penalising more the predictions that exceed the “observed” values (in the present case represented by the quantile estimate based on the statistical analysis of observed flow peaks) than those that underestimate them, in the present work it is proposed, for the first time to the Author’s knowledge, a parameterisation algorithm that weights asymmetrically the positive or negative errors, in order to decrease the consistency of overestimation and therefore the risk of missing a flooding occurrence.

It is important to underline that the proposed asymmetric error function is here applied for optimising a neural network model for predicting the 2-year return period flood (due to its association with the bankfull conditions) but it might be used to improve any other kind of methodology for the estimate of flood warning thresholds associated to any return period.

Section 2 presents the asymmetric error functions; the next one describes the information available in a database covering the entire Italian country and the identification of the subsets to be used for a rigorous cross-validation approach. Section 4 presents the implementation of the models for estimating the 2-year return period flood in ungauged catchments, consisting in artificial neural networks calibrated using respectively the symmetric square error and the asymmetric error functions. The results are presented and then discussed in Sect. 5 and Sect. 6 concludes.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



2 The asymmetric error function

The scientific literature on forecasting applications, in any scientific area, adopts almost exclusively an objective function based on the sum or mean of the squared discrepancies, that is a symmetric quadratic function, due to the well-established good statistical properties of the minimum mean square error estimator.

On the other hand, in economics as well as in engineering and other many fields, there are cases where the forecasting problem is inherently non-symmetric and, in the financial forecasting literature, the use of mean squared error, even if still widely applied, is nowadays not always accepted.

Error (or loss) functions devised to keep into account an asymmetric behaviour have been proposed, such as the linear-exponential, the double linear and the double quadratic (Christoffersen and Diebold, 1996; Diebold and Lopez, 1996; Granger, 1999; Granger and Pesaran, 2000; Elliot et al., 2005; Patton and Timmerman, 2006). In particular, Elliot et al. (2005) recently presented a family of parsimoniously parameterized error functions that nests mean squared error loss as a special case (Patton and Timmerman, 2006).

Such function, defining the error ε as the observed value minus the prediction (that is, a positive error corresponds to underestimation, a negative one to overestimation), reads:

$$L(p, \alpha) = 2 \cdot [\alpha + (1 - 2\alpha) \cdot \mathbf{1}\{\varepsilon < 0\}] \cdot |\varepsilon|^p, \quad (1)$$

where $\mathbf{1}\{\cdot\}$ is a unit indicator, equal to one when $\{\varepsilon < 0\}$ and zero otherwise; p is a positive integer that amplifies the larger errors (corresponding to a quadratic error when equal to 2) and $\alpha \in (0, 1)$ is a parameter representing the degree of asymmetry.

For $\alpha < 0.5$ the function penalises more the overestimation errors ($\varepsilon < 0$), while for $\alpha > 0.5$ more weight is given to positive forecast errors (under-predictions); for $\alpha = 0.5$ the loss weights symmetrically positive and negative errors.

When $p = 2$ and $\alpha \neq 0.5$, the error becomes the asymmetric double quadratic (Quad-Quad) loss function (see Christoffersen and Diebold, 1996), that is used in the present

Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



work for a fair comparison with the traditional mean square error estimator. When $p = 2$ and $\alpha = 0.5$, Eq. (1) corresponds in fact to the “traditional”, symmetric, square error:

$$L(2, 0.5) = \varepsilon^2 \quad (2)$$

Figure 1 shows the asymmetric Quad-Quad loss function (with α varying from 0.1 to 0.9) compared with the squared error (SE).

In the water engineering field, the asymmetric Elliot error function with quadratic amplification ($p = 2$) has been recently applied to parameterise a model for estimating the expected maximum scour at bridge piers, in order to obtain safer design predictions through the reduction of underestimation errors by Toth (2015).

In Sect. 4, the asymmetric quadratic error function is proposed for optimizing the parameters of an input–output model, based on artificial neural networks, between the input variables summarising a set of catchment descriptors (obtainable also for ungauged river sections) and the 2-year return period flood, thus warranting that overestimation errors, that would increase the risk of missing flood warnings, are weighted more than underestimation ones.

3 Available information: a national data set of Italian catchments

The case study refers to a database of almost 300 catchments scattered all over the Italian peninsula, compiled within the national research project “CUBIST – Characterisation of Ungauged Basins by Integrated use of hydrological Techniques” (Claps et al., 2008).

3.1 Input and output variables

The 12 geomorphological and climatic descriptors include: longitude and latitude of catchment centroid; area, perimeter, average slope and orientation of the catchment area; minimum, maximum and mean altitude; length and average slope of maximum

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



drainage path and mean annual precipitation. The dataset unfortunately lacks information on other hydrological properties (e.g. on soils, land-cover, vegetation) and the climatic characterisation is very limited (for example information on extreme rainfall would be extremely important), but it was not possible to obtain homogeneous information on these characteristics nationwide.

The dataset is described in Di Prinzio et al. (2011), where, following a catchment classification procedure based on multivariate techniques, the descriptors were used to infer regional predictions of mean annual runoff, mean maximum annual flood and flood quantiles through a linear multiregression model.

As described in such work, in order to reduce the high-dimensionality of the geomorphological and climatic descriptors set, a Principal Components (PC) analysis was applied, obtaining a set of derived uncorrelated variables. The PC variables are as many as the original variables, but they are ordered in such a way that the first component has the greatest variability, the second accounts for the second largest amount of variance in the data and is uncorrelated with the first and so forth. In the present data set, the first three principal components explain more than three quarters of the total variance (see Di Prinzio et al., 2011) and such three first PCs are here chosen as input variables to the models described in the following, assuming that they may adequately represent, in a parsimonious manner, the main features of the study catchments.

The data base, in addition to the morpho-pluviometric information, includes the annual maxima flow records for periods ranging from 5 to 63 years, whose median values, corresponding to the 2-year return period, represent the output variable to be simulated by the models.

The data set covers a great diverseness of hydrological, physiographic and climatic properties and in order to partially reduce such heterogeneity, it was decided to limit the analysis to catchments having a 2-year flood included in the range $10\text{--}1000\text{ m}^3\text{ s}^{-1}$, that is 267 over the original 296 basins.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



3.2 Identification of balanced cross-validation subsets with SOM clustering of input data

As will be detailed in Sect. 4, the database is to be divided in three disjoint subsets (called training, cross-validation and test sets) in order to allow a rigorous independent validation and also to increase the generalization abilities of the model when encountering records different from those used in the calibration (or “training”) phase, following an “early stopping” parameterisation procedure.

The way in which the data are divided may have a strong influence on the performance of the model and it is important that each one of the three sets contains all representative patterns that are included in the dataset. As proposed in the recent literature (Kocjancic and Zupan, 2001; Bowden et al., 2002; Shahin et al., 2004) a self-organising map (SOM) may be applied to this aim. The SOM is a data-driven classification method based on unsupervised artificial neural networks that may be applied for several clustering purposes (for hydrological applications see, for example, Minns and Hall, 2005; Kalteh et al., 2008).

In the recent years, SOMs were also successfully applied for catchments classification either based on geo-morpho-climatic descriptors (Hall and Minns, 1999; Hall et al., 2002; Srinivas et al., 2008; Di Prinzio et al., 2011) or based on hydrological signatures (Chang et al., 2008; Ley et al., 2011; Toth, 2013); however, it is important to underline that the clustering is not carried out here in order to identify a pooling group of similar catchments for developing a region-specific model, but for the optimal division of the available data for the parameterization and independent testing of a single model to be applied over the entire study area.

The SOM is in fact used to cluster similar data records together: an equal number of data records is then sampled from each cluster, ensuring that records from each class (that is catchments with different features) are represented in the training, validation and test sets, that, as a result, have similar statistical properties (Bowden et al., 2002; Shahin et al., 2004).

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



A SOM (Kohonen, 1997) organizes input data through non-linear techniques depending on their similarity. It is formed by two layers: the input layer contains one node (neuron) for each variable in the data set. The output-layer nodes are connected to every input through adjustable weights, whose values are identified with an iterative training procedure. The relation is of the competitive type, matching each input vector with only one neuron in the output layer, through the comparison of the presented input pattern with each of the SOM neuron weight vectors, on the basis of a distance measure (here the Euclidean one). In the trained (calibrated) SOM, all input vectors that activate the same output node belong to the same class.

In the present application, the dimension of the input layer is equal to three (that is, the first three principal components of the catchments descriptors); as far as the output layer is concerned, there is not a predefined number of classes and, given the small dimension of the input variables, it was here chosen a parsimonious output layer formed by three nodes in a row, each one corresponding to a class.

The three resulting clusters are formed respectively by 121, 70 and 76 catchments; each cluster is then divided into three parts, and one third is assigned to the training, validation and test sets respectively. Overall, the training, validation and test sets are therefore equally numerous (91, 88 and 88 records respectively) and formed by the same proportion of catchments belonging to each of the clusters, having eventually a similar information content.

4 Development of symmetric and asymmetric artificial neural networks models for estimating the 2-year return period flows at ungauged sites

4.1 Feedforward artificial neural networks

Artificial neural networks are massively parallel and distributed information processing systems, composed by nodes, arranged in layers, that are able to infer a non-linear input–output relationship. ANN, and in particular feedforward networks have

been widely used in many hydrological applications (see for example the recent review papers by Maier et al., 2010 and by Abrahart et al., 2012) and the readers may refer to the abundant literature for details on their characteristics and implementation.

Three different layer types can be distinguished: input layer, connecting the input information, one or more hidden layers, for intermediate computations, and an output layer, producing the final output; adjacent layers are connected through multiplicative weights and, in each node, the sum of weighted inputs and a threshold (called bias) is passed through a non-linear function known as an activation.

The models here applied are networks formed by one hidden layer, with tan-sigmoid activation functions, and a single output node (corresponding to the estimated flood with 2-year return period), with a linear activation function.

The identification of the network's weights and biases (called training procedure) is carried out with a non-linear optimization, searching the minimum of an error (or learning) function measuring the discrepancy between predicted and observed values, and feedforward networks are generally trained with a learning algorithm known as Back-Propagation (Rumelhart et al., 1994) based on steepest descent or on more efficient quasi-newton methods.

In order to avoid overfitting, that degrades the generalisation ability of the model, the Early Stopping or Optimal Stopping procedure was applied (see, for example, Coulibaly et al., 2000). For applying Early Stopping, the available data have been divided into three disjoint subsets with a similar information content, as described in Sect. 3.2: a training set, an early-stopping validation set and a test set. While the network is parameterised minimising the error function on the training set, the error function on the early-stopping validation set is also monitored; if the error function on such second set increases continuously for a specific number of iterations, this is a sign of overfitting of the training set: the training is then stopped and network parameters at the lowest validation error are returned. The third set (test set) is not used in any way during the parameterization phase, but it is used for out-of-sample, independent evaluation of the resulting models.

Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4.2 Implementation of the symmetric model

Neural networks, including those applied in the recent hydrological literature for the estimation of index floods or flood quantiles at ungauged sites, are traditionally trained minimizing the square error function, which is symmetrical about the y-axis and negative or positive discrepancies of the same magnitude result in the same function value.

In the present work, the results obtained by a network trained with a “conventional” square error function are compared with those obtained when parameterising the network through the minimisation of an asymmetric loss function, that takes into account both over and underestimation discrepancies but penalizes more the overprediction errors, since the consequences of missing alarms are more severe than those of false alarms.

For both type of models, the output values are standardized into the $[-1; 1]$ interval to facilitate the optimization algorithms and each implemented architecture is randomly initialized for ten times to help avoiding local optima: the parameter set that results in the minimum error function on the early stopping validation data (second set) is chosen as the trained network.

The first implemented model is obtained through the minimization of the traditional, symmetric mean squared error, applying the quasi-Newton Levenberg–Marquardt BackPropagation algorithm (Hagan and Menhaj, 1994), widely applied and regarded as one of the most efficient neural network training algorithms.

The input variables are the first three principal components of the catchment descriptors, so the input layer is formed by three nodes; the output node corresponds to the estimated flood with 2-year return period; as far as the dimension of the hidden layer is concerned, there is, unfortunately, no definitive established methodology for its determination, because the optimal network architecture is highly problem-dependent: different architectures with a number of hidden nodes varying from 2 to 6 were set up and the mean squared error of the estimates issued for the third, independent set resulted the lowest with the hidden layer formed by 3 nodes.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



The architecture with three input nodes, three hidden nodes and 1 output node is therefore the network finally chosen; the network parameterized minimising the symmetric mean square error function will be denoted as ANN-Symm, and its results will be in Sect. 5 compared with those of the asymmetric models having the same architecture but a different error function.

4.3 Implementation of asymmetric models with varying degree of asymmetry

The Quad-Quad loss function described in Sect. 2 is here applied for calibrating the network parameters of the asymmetric models. The learning function to be minimized is therefore the average value of the double quadratic errors (Mean Quad-Quad Error, MQQE), obtainable averaging the errors given by Eq. (1) when $\rho = 2$:

$$MQQE = \frac{2}{M} \sum_{j=1}^M [\alpha - (1 - 2\alpha) \cdot \mathbf{1}\{\varepsilon_j < 0\}] \cdot |\varepsilon_j|^2 \quad (3)$$

The value of α , corresponding to the degree of asymmetry of the loss function, cannot be fixed a priori, since such choice should be based on a location-specific cost-benefit analysis, keeping into account the avoidable losses (that is the direct and indirect losses, provided they may be quantifiable, that may be prevented by mitigation actions following an alarm issue) and the cost of the mitigation measures themselves. Such analysis is acknowledged to be extremely difficult, especially since it involves also intangible costs such as life losses, but also warning credibility issues; furthermore, the costs may change over time and are also dependent on the warning lead-time (see e.g. Martina et al., 2006; Verkade and Werner, 2011; Montesarchio et al., 2011, 2014).

For this reason, in the present application, different asymmetric networks, with α varying from 0.4 to 0.1, are implemented, in order to compare the results obtainable with a different asymmetry degree, that is a different extent of importance given to over/underestimation errors. Such asymmetrically trained network are in the following denoted as “Asymm-0.4”, “Asymm-0.3”, “Asymm-0.2”, “Asymm-0.1”.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



The training of the four asymmetric networks, based on the minimisation of the Mean Quad-Quad Error, is carried out through the generalization of the backpropagation algorithm proposed by Crone (2002) and applied by Silva et al. (2010), that may be used for parameterising artificial neural networks with any differentiable (analytically or numerically) error function.

5 Results and discussion

5.1 Goodness-of-fit measures and plots

The performances of the networks are evaluated through a set of indexes that describe the prediction error, ε , that is the difference between the “observed” 2-year flood value (the median of historical annual maxima), $Q_{2,o}$, and the prediction, $Q_{2,p}$, issued by the models (as a function of morpho-climatic attributes only), on the third set (test set), formed by $N = 91$ catchments distributed all over the country, whose data have not been used in any capacity in the models’ development.

The following error statistics have been computed:

MAE (mean absolute error).

$$MAE = \frac{\sum_{i=1}^N |\varepsilon(i)|}{N} \quad (4)$$

RMSE (root mean square error).

$$RMSE = \sqrt{\frac{\sum_{i=1}^N (\varepsilon(i))^2}{N}} \quad (5)$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



MAE and RMSE both represent a symmetric accuracy, corresponding to the distance of the predictions from the observations independently of the error sign (and the RMSE, being quadratic, emphasizes more the larger errors).

In order to keep into account the differences in sign of the errors, representing the extent of overpredictions as compared to underpredictions, the overall percentage of negative errors (Over%), is computed:
Over% (percentage of overestimates).

$$\text{Over}\% = \frac{|\{i = 1, \dots, N | Q_{2,p}(i) > Q_{2,o}(i)\}|}{N} \quad (6)$$

Such metric shows the general tendency of the model to overestimate (or to underestimate, since 100-Over% represents, conversely, the proportion of underpredictions), but these indexes do not distinguish among errors of different magnitude, since they count also predictions that may be only barely above (or below) the targets, that is very good predictions, with minimum errors.

It is therefore computed also the number of the “high” overestimation errors, keeping into account only the more relevant, and therefore potentially more dangerous, overpredictions. It was here considered as “high overprediction” an estimate that is more than 30 % higher than the corresponding target value:

OverH% (percentage of high overprediction errors).

$$\text{OverH}\% = \frac{|\{i = 1, \dots, N | Q_{2,p}(i) > 1.3 \cdot Q_{2,o}(i)\}|}{N} \quad (7)$$

The more conservative is the threshold estimate, the lower is the value of OverH%.

On the other hand, even if – as discussed – generally less crucial in terms of consequences, also the number of high underestimation errors should be monitored, since excessively low values imply the tendency of the model to establish thresholds leading to the issuance of too many false alarms.

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



UnderH% (percentage of high underprediction errors).

$$\text{UnderH\%} = \frac{\{j = 1, \dots, N | Q_{2,p}(j) < 0.7 \cdot Q_{2,o}(j)\}}{N} \quad (8)$$

In addition to the goodness-of-fit measures (reported in Table 1), the boxplot of the errors (observed minus predicted scour) is shown in Fig. 2: the bottoms and tops of the rectangular boxes are respectively the lower and the upper quartiles, the horizontal segment inside the box is the median and the whiskers represent the 5th and 95th percentiles.

5.2 Discussion of the results

The boxplot (Fig. 2) allows to visually assess both the accuracy and the prudence of the estimates: the boxes should be compact and close to the dotted line representing zero error but at the same time it is better if the data lie above such line, thus indicating that the method do not tend to overpredict the thresholds and the warning system is therefore less subject to miss a potentially dangerous flood.

It may be seen that for the network that was trained minimising the traditional Square Error (ANN-Symm) the box and whiskers are centred on the zero-error line and the quantiles (top/bottom of the box, top/bottom whiskers) are at a similar distance from such line, showing that the errors are equally distributed among overestimation and underestimations. The box is compact, demonstrating the good accurateness of the method for a substantial part of the test set, but, due to the symmetric disposition of the errors, many overestimation errors, also remarkably high, are issued, as shown by the position of the bottom whisker.

Analysing Table 1, the relatively good accuracy of the ANN-Symm model is demonstrated by the values of the MAE and RMSE, that are the lowest among the implemented models. The symmetric distribution of the overall errors is shown by an Over% close to 50% and the similar values of the OverH% (34%) and UnderH% (32%) confirm that also the high relative errors are equally split among over and underestimates.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Such results were expected since the training is based on a symmetric loss function, but the consequence is that the ANN-Symm model issues a remarkable number of significant overprediction errors, in fact for about one third of the test catchments the estimates are more than 30 % higher than the observations.

5 The analysis of Table 1 shows that the asymmetrically trained networks tend, for decreasing α values, to reduce the number of overestimations (negative errors). For the overall errors this is shown by the different proportion of over/underestimations, that moves from a value that corresponds approximately to a balance to a much more skewed distribution of negative and positive errors, with Over% decreasing up to 31 %.

10 At the same time, and more importantly, the number of negative (underestimation) errors larger than 30 % substantially decreases with α , with OverH% reaching a value that is much lower than that of the ANN-Symm model when α arrives at 0.4 (18 % vs. 34 %).

15 Conversely, as expected, the more asymmetric is the network, the higher are the underprediction errors, as shown by the values of UnderH%: the number of significant positive errors gradually increases from one third up to 47 % of the total.

Also the accuracy (given by the total amount of the discrepancies independently of their sign) deteriorates when the asymmetry is more pronounced, but the drop is moderate and the RMSE and MAE values are not so far from those of the ANN-Symm network.

20 Looking at the parallel boxplots (Fig. 2), it may be seen that the boxes (having an height similar to the ANN-Symm one for low α values) become less compact (on the side of the positive errors) for α equal to 0.3 and 0.4, but they are all still very close to the zero-error line and, correctly, their position shifts upwards with increasing asymmetry, so that for $\alpha = 0.4$, the bottom part of the box indicates that only about one quarter of the errors are overestimations. The length of the lower whiskers substantially decrease with α but the length of the upper whiskers does not increase at the same rate, thus compensating for the fact that the boxes are taller for α equal to 0.3 and 0.4. It follows that the global distances from the 5 to the 95 % percentiles (given

by the distance between the ends of the top and bottom whiskers) are very close for the symmetric (ANN-Symm) and for the two most asymmetric networks (Asymm-0.3 and Asymm-0.4), thus showing that the variability of the errors for the vast majority (middle 90 %) of the data is similar, even if, overall, the errors are moving towards the underestimation side for increasing α (as confirmed also by the corresponding median values).

It may be noted that, for both symmetric and asymmetric models, the errors not negligible: this is partly due to the intrinsic limitations of a regional approach but probably mainly to the shortcomings of the available data set and to the extreme variability of the study area.

As already underlined in Sect. 3.1, the national data set lacks important information that may help to characterise the hydrological behaviour and the phenomena governing formation of extreme flows. In addition to the unavoidable risk of erroneous data, the absence in the database of additional influences certainly further hampers the possibility to obtain a reliable relationship with the flood quantiles. Furthermore, the data set covers the entire Italian peninsula, characterised by extremely different hydro-climatic settings and this high heterogeneity is certainly an additional reason that limits the performance.

Notwithstanding the limitations of the dataset, that affect equally all the proposed models, the results demonstrate that the use of the double quadratic error function, even if at the expense of more substantial underestimation errors, can substantially decrease the number and extent of overestimation errors, if compared to the use of the traditional square errors.

In the application to a specific cross-section, the degree of asymmetry might be identified as proportional to the “risk averseness” of the situation: the more the impact of false alarms is, comparatively, small, the more the decision-makers are reluctant to the consequences (economic and social) of a flood and, rather than risking a missed alarm, can accept many cases of false alarm with the associated costs.

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



6 Conclusions

A crucial issue in the operation of flood forecasting/warning systems at ungauged locations is how to assess the possible impacts of the forecasted flows, that is the identification of streamflow values that may actually cause flooding, to be associated to thresholds that trigger the issuance of flood watches and warnings. The values that may produce damaging conditions (or “flooding flows”), when in absence of detailed local information on each cross-section, are in many parts of the world estimated as the peak floods having a certain return period, often the 2-year one, that is generally associated with the bankfull discharge.

For locations where the gauges are new or where historical rating curves are not available, the series of past annual flow maxima are absent or very limited, and the peak flow of given frequency to be associated with the watch/warning threshold can be estimated with regionally-derived empirical relationships, such as those usually applied in regional flood frequency analysis at ungauged sites. Such methods consist in a relation between a set of catchment descriptors that may be obtained also for ungauged sites and the desired flood quantile; linear or power forms are the most commonly used functions, but recent studies have successfully applied artificial neural network models, due to their flexibility, to flood quantile and index flood estimation.

Whatever is the function form, such models are generally parameterised by minimising the mean square error, that assigns equal weight to overprediction or underprediction errors, whereas, instead, the consequences of such errors are extremely different when the estimates are to be used as warning threshold. In fact, false alarms (due to an underprediction of the warning threshold) generally have a much higher level of acceptance than misses (that would derive from an overestimated threshold).

For this reason, in the present work, the regression model (a feed-forward neural network) is parameterised minimising an asymmetric error function (of the double quadratic type), that penalizes more the overestimation than the underestimation discrepancies. The predictions of models with increasing degree of asymmetry are

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



compared with those of a traditional (trained on the symmetric mean of square errors) neural network, in a rigorous cross-validation experiment referred to a database of catchments covering all the Italian country.

The results confirm, as expected, that is that the more asymmetric is the network, the more numerous and higher are the underprediction errors, and the less numerous and less severe are the overestimation errors. As also expectable, the symmetric accuracy decreases when the asymmetry is more pronounced, but the drop is moderate and the RMSE and MAE values are not so far from those of the traditionally trained network.

Undoubtedly, the nature of the regional approach, as well as the shortcomings of the dataset and the extreme heterogeneity of the study area, generate errors much greater than those obtainable with detailed local studies. On the other hand, where no alternatives exist, the proposed methodology may provide a preliminary estimate of the threshold runoff that do not, prudentially, overestimate the actual flooding flow.

Notwithstanding the acknowledged limitations of the dataset, that affect equally all the proposed models, the analysis shows that the use of the asymmetric error function substantially reduces the number and extent of overestimation errors, if compared to the use of the traditional square errors. Of course such reduction is at the expense of increasing underestimation errors, but the overall precision is still acceptable and the study highlights the potential benefit of choosing an asymmetric error function when the consequences of missed alarms are more severe than those of false alarms.

It is important to highlight that the asymmetric error function is used, in this study, to parameterise a neural network, but of course it might be used to optimize any other model or equation, when aiming at obtaining conservative estimates, for safety reasons.

The appropriate degree of asymmetry might be identified depending on the risk-averseness of the specific flood-prone context. The quantification of risk-aversion is extremely difficult and case-specific: it should keep into account that the perception of society may be very different from a technical appraisal of the involved costs and it should include also indirect, intangible and long-term impacts. More research on

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bowden, G. J., Maier, H. R., and Dandy, G. C.: Optimal division of data for neural network models in water resources applications, *Water Resour. Res.*, 38, 1010, doi:10.1029/2001WR000266, 2002.

Brath, A., Castellarin, A., Franchini, M., and Galeati, G.: Estimating the index flood using indirect methods, *Hydrolog. Sci. J.*, 46, 399–418, 2001.

Carpenter, T. M., Sperfslage, J. A., Georgakakos, K. P., Sweeney, T., and Fread, D. L.: National threshold runoff estimation utilizing GIS in support of operational flash flood warning systems, *J. Hydrol.*, 224, 21–44, 1999.

Chang, F. J., Tsai, M. J., Tsai, W. P., and Herricks, E. E.: Assessing the ecological hydrology of natural flow conditions in Taiwan, *J. Hydrol.*, 354, 75–89, 2008.

Christoffersen, P. F. and Diebold, F. X.: Further results on forecasting and model selection under asymmetric loss, *J. Appl. Econom.*, 11, 561–571, 1996.

Claps and the CUBIST Team: Development of an Information System of the Italian basins for the CUBIST project, *Geophysical Research Abstracts*, 10, EGU2008-A-12048, 2008.

Coulibaly, P., Anctil, F., and Bobee, B.: Daily reservoir inflow forecasting using artificial neural networks with stopped Training Approach, *J. Hydrol.*, 230, 244–257, 2000.

Crone, S. F.: Training artificial neural networks using asymmetric cost functions, in: *Proceedings of the 9th International Conference on Neural Information Processing (ICONIP'02)*, 18–22 November 2002, Singapore, Vol. 5, IEEE, Singapore, 2374–2380, 2002.

Cunha, L. K., Krajewski, W. F., and Mantilla, R.: A framework for flood risk assessment under nonstationary conditions or in the absence of historical data, *J. Flood Risk Manage.*, 4, 3–22, 2011.

Dalrymple, T.: *Flood Frequency Analyses*, Water Supply Paper 1543-A, U. S. Geological Survey, Reston, Virginia, USA, 1960.

Daňhelka, J. and Vlasák, T.: Evaluation of Real-time Flood Forecasts in the Czech Republic, 2002–2012, Czech Hydrometeorological Institute Report, available at: http://www.chmi.cz/files/portal/docs/poboc/CB/pruvodce/vyhodnoceni_en.html (last access: 17 June 2015), 2013.

Dawson, C. W., Abrahart, R. J., Shamseldin, A. Y., and Wilby, R. L.: Flood estimation at ungauged sites using artificial neural networks, *J. Hydrol.*, 319, 391–409, 2006.

Di Prinzio, M., Castellarin, A., and Toth, E.: Data-driven catchment classification: application to the pub problem, *Hydrol. Earth Syst. Sci.*, 15, 1921–1935, doi:10.5194/hess-15-1921-2011, 2011.

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- Diebold, F. X. and Lopez, J. A.: Forecast evaluation and combination, in: Handbook of Statistics, Vol. 14, edited by: Maddala, G. S. and Rao, C. R., Amsterdam, 241–268, 1996.
- Elliott, G., Komunjer, I., and Timmermann, A.: Estimation and testing of forecast rationality under flexible loss, *Rev. Econ. Stud.*, 72, 1107–1125, 2005.
- 5 Granger, C. W. J.: Outline of forecast theory using generalized cost functions, *Span. Econ. Rev.*, 1, 161–173, 1999.
- Granger, C. W. J. and Pesaran, M. H.: A decision theoretic approach to forecast evaluation, in: *Statistics and Finance: an Interface*, edited by: Chan, W. S., Li, W. K., and Tong, H., Imperial College Press, London, 261–278, 2000.
- 10 GREHYS (Groupe de recherche en hydrologie statistique): Presentation and review of some methods for regional flood frequency analysis, *J. Hydrol.*, 186, 63–84, 1996.
- Griffis, V. W. and Stedinger, J. R.: The use of GLS regression in regional hydrologic analyses, *J. Hydrol.*, 344, 82–95, 2007.
- Hagan, M. T. and Menhaj, M.: Training feedforward networks with the Marquardt algorithm, *IEEE T. Neural Networ.*, 5, 989–993, 1994.
- 15 Hall, M. J. and Minns, A. W.: The classification of hydrologically homogeneous regions, *Hydrolog. Sci. J.*, 44, 693–704, 1999.
- Hall, M. J., Minns, A. W., and Ashrafuzzaman, A. K. M.: The application of data mining techniques for the regionalisation of hydrological variables, *Hydrol. Earth Syst. Sci.*, 6, 685–694, doi:10.5194/hess-6-685-2002, 2002.
- 20 Hapuarachchi, H. A. P., Wang, Q. J., and Pagano, T. C.: A review of advances in flash flood forecasting, *Hydrol. Process.*, 25, 2771–2784, 2011.
- Harman, C., Stewardson, M., and DeRose, R.: Variability and uncertainty in reach bankfull hydraulic geometry, *J. Hydrol.*, 351, 13–25, 2008.
- 25 Javelle, P., Demargne, J., Defrance, D., Pansu, J., and Arnaud, P.: Evaluating flash flood warnings at ungauged locations using post-event surveys: a case study with the AIGA warning system, *Hydrolog. Sci. J.*, 59, 1390–1402, 2014.
- Kalteh, A. M., Hjorth, P., and R. Berndtsson, R.: Review of the self-organizing map (SOM) approach in water resources: analysis, modelling and application, *Environ. Modell. Softw.*, 23, 835–845, 2008.
- 30 Kjeldsen, T. R., Smithers, J. C., and Schulze, R. E.: Flood frequency analysis at ungauged sites in the KwaZulu-Natal Province, South Africa, *Water S. A.*, 27, 315–324, 2001.

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- Kjeldsen, T. R., Jones, D. A., and Morris, D. G.: Using multiple donor sites for enhanced flood estimation in ungauged catchments, *Water Resour. Res.*, 50, 6646–6657, 2014.
- Kocjancic, R. and Zupan, J.: Modeling of the river flowrate: the influence of the training set selection, *Chemom. Intell. Lab. Syst.*, 54, 21–34, 2000.
- 5 Kohonen, T.: *Self-Organizing Maps*, 2nd edn., Springer, Berlin, ISBN 3-540-62017-6, 1997.
- Ley, R., Casper, M. C., Hellebrand, H., and Merz, R.: Catchment classification by runoff behaviour with self-organizing maps (SOM), *Hydrol. Earth Syst. Sci.*, 15, 2947–2962, doi:10.5194/hess-15-2947-2011, 2011.
- 10 Maier, H. R., Jain, A., Dandy, G. C., and Sudheer, K. P.: Methods used for the development of neural networks for the prediction of water resource variables in river systems: current status and future directions, *Environ. Modell. Softw.*, 25, 891–909, doi:10.1016/j.envsoft.2010.02.003, 2010.
- Martina, M. L. V., Todini, E., and Libralon, A.: A Bayesian decision approach to rainfall thresholds based flood warning, *Hydrol. Earth Syst. Sci.*, 10, 413–426, doi:10.5194/hess-10-413-2006, 2006.
- 15 Merz, B., Elmer, F., and Thieken, A. H.: Significance of “high probability/low damage” versus “low probability/high damage” flood events, *Nat. Hazards Earth Syst. Sci.*, 9, 1033–1046, doi:10.5194/nhess-9-1033-2009, 2009.
- Merz, R. and Blöschl, G.: Flood frequency regionalisation – Spatial proximity vs. catchment attributes, *J. Hydrol.*, 302, 283–306, 2005.
- 20 Minns, A. W. and Hall, M. J.: Artificial neural network concepts in hydrology, in: *Encyclopedia of Hydrological Sciences*, edited by: Anderson, M. G. and McDonnell, J. J., John Wiley and Sons, Chichester, UK, 307–320, 2005.
- Montanari, A., Young, G., Savenije, H. H. G., Hughes, D., Wagener, T., Ren, L. L., Koutsoyannis, D., Cudennec, C., Toth, E., Grimaldi, S., Blöschl, G., Sivapalan, M., Beven, K., Gupta, H., Hipsey, M., Schaeffli, B., Arheimer, B., Boegh, E., Schymanski, S. J., Di Baldassarre, G., Yu, B., Hubert, P., Huang, Y., Schumann, A., Post, D. A., Srinivasan, V., Harman, C., Thompson, S., Rogger, M., Viglione, A., McMillan, H., Characklis, G., Pang, Z., and Belyaev, V.: *Panta Rhei – everything flows: change in hydrology and society – the IAHS scientific decade 2013–2022*, *Hydrolog. Sci. J.*, 58, 1256–1275, 2013.
- 30 Montesarchio, V., Ridolfi, E., Russo, F., and Napolitano, F.: Rainfall threshold definition using an entropy decision approach and radar data, *Nat. Hazards Earth Syst. Sci.*, 11, 2061–2074, doi:10.5194/nhess-11-2061-2011, 2011.

**Estimation of flood
warning runoff
thresholds**

E. Toth

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[⏪](#)[⏩](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Muttiah, R. S., Srinivasan, R., and Allen, P. M.: Prediction of two year peak stream discharges using neural networks, *J. Am. Water Resour. As.*, 33, 625–630, 1997.
- Norbiato, D., Borga, M., and Dinale, R.: Flash flood warning in ungauged basins by use of the flash flood guidance and model-based runoff thresholds, *Meteorol. Appl.*, 16, 65–75, doi:10.1002/met.126, 2009.
- 5 Ntelekos, A. A., Georgakakos, K. P., and Krajewski, W. F.: On the uncertainties of flash flood guidance: towards probabilistic forecasting of flash floods, *J. Hydrometeorol.*, 7, 896–915, doi:10.1175/JHM529.1, 2006.
- Pandey, G. R. and Nguyen, V.-T.-V.: A comparative study of regression based methods in regional flood frequency analysis, *J. Hydrol.*, 225, 92–101, 1999.
- 10 Pappenberger, F., Bartholmes, J., Thielen, J., Cloke, H., Buizza, R., and de Roo, A.: New dimensions in early flood warning across the globe using grand-ensemble weather predictions, *Geophys. Res. Lett.*, 35, L10404, doi:10.1029/2008GL033837, 2008.
- Patton, A. J. and Timmermann, A.: Properties of optimal forecasts under asymmetric loss and nonlinearity, *J. Econometrics*, 140, 884–918, 2007.
- 15 Reed, S., Schaake, J., and Zhang, Z.: A distributed hydrologic model and threshold frequency based method for flash flood forecasting at ungauged locations, *J. Hydrol.*, 337, 402–420, 2007.
- Rumelhart, D. E., Widrow, B., and Lehr, M. A.: The basic ideas in neural networks, *Commun. ACM*, 37, 87–92, 1994.
- 20 Salinas, J. L., Laaha, G., Rogger, M., Parajka, J., Viglione, A., Sivapalan, M., and Blöschl, G.: Comparative assessment of predictions in ungauged basins – Part 2: Flood and low flow studies, *Hydrol. Earth Syst. Sci.*, 17, 2637–2652, doi:10.5194/hess-17-2637-2013, 2013.
- Sene, K.: *Flash Floods: Forecasting and Warning*, Springer, Dordrecht, 385 pp., ISBN: 9789400751637, 2013.
- 25 Shahin, M., Maier, H., and Jaksa, M.: Data division for developing neural networks applied to geotechnical engineering, *J. Comput. Civil Eng.*, 18, 105–114, 2004.
- Shu, C. and Burn, D. H.: Artificial neural network ensembles and their application in pooled flood frequency analysis, *Water Resour. Res.*, 40, W09301, doi:10.1029/2003WR002816, 2004.
- 30 Shu, C. and Ouarda, T. B. M. J.: Regional flood frequency analysis at ungauged sites using the adaptive neuro-fuzzy inference system, *J. Hydrol.*, 349, 31–43, 2008.

Estimation of flood warning runoff thresholds

E. Toth

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Silva, D. G. E., Jino, M., and de Abreu, B. T.: Machine learning methods and asymmetric cost function to estimate execution effort of software testing, in: Proc. Third International Conference on Software Testing, Verification and Validation (ICST), Paris, 7–9 April 2010, IEEE, New York, 275–284, 2010.

5 Simor, V., Hlavcova, K., Kohnova, S., and Szolgay, J.: Application of artificial neural networks for estimating index floods, *Contributions to Geophysics and Geodesy*, 42, 295–311, 2012.

Singh, K. K., Pal, M., and Singh, V. P.: Estimation of mean annual flood in Indian catchments using backpropagation neural network and M5 model tree, *Water Resour. Manag.*, 24, 2007–2019, doi:10.1007/s11269-009-9535-x, 2010.

10 Smith, A., Sampson, C., and Bates, P.: Regional flood frequency analysis at the global scale, *Water Resour. Res.*, 51, 539–553, doi:10.1002/2014WR015814, 2015.

Srinivas, V. V., Tripathi, S., Rao, A. R., and Govindaraju, R. S.: Regional flood frequency analysis by combining self-organizing feature maps and fuzzy clustering, *J. Hydrol.*, 348, 148–166, 2008.

15 Stedinger, J. R. and Lu, L.: Appraisal of regional and index flood quantile estimators, *Stoch. Hydrol. Hydraul.*, 9, 49–75, 1995.

Stedinger, J. R. and Tasker, G. D.: Regional hydrologic analysis, 1. Ordinary, weighted, and generalized least squares compared, *Water Resour. Res.*, 21, 1421–1432, 1985.

Toth, E.: Catchment classification based on characterisation of streamflow and precipitation time series, *Hydrol. Earth Syst. Sci.*, 17, 1149–1159, doi:10.5194/hess-17-1149-2013, 2013.

20 Toth, E.: Asymmetric error functions for reducing the underestimation of local scour around bridge piers: application to neural networks models, *J. Hydraul. Eng.*, 141, 04015011, doi:10.1061/(ASCE)HY.1943-7900.0000981, 2015.

UCAR (University Corporation for Atmospheric Research): Flash Flood Early Warning System Reference Guide 2010, ISBN 978-0-615-37421-5, available at: http://www.meted.ucar.edu/communities/hazwarnsys/ffwrsrg/FF_EWS.pdf (last access: 17 June 2015), 2010.

25 Verkade, J. S. and Werner, M. G. F.: Estimating the benefits of single value and probability forecasting for flood warning, *Hydrol. Earth Syst. Sci.*, 15, 3751–3765, doi:10.5194/hess-15-3751-2011, 2011.

30 Ward, P. J., Jongman, B., Sperna Weiland, F. C., Bouwman, A., van Beek, R., Bierkens, M. F. P., Ligtoet, W., and Winsemius, H. C.: Assessing flood risk at the global scale: model setup, results, and sensitivity, *Environ. Res. Lett.*, 8, 44019, doi:10.1088/1748-9326/8/4/044019, 2013.

Wilkerson, G. V.: Improved bankfull discharge prediction using 2-year recurrence-period discharge, J. Am. Water Resour. As., 44, 243–258, doi:10.1111/j.1752-1688.2007.00151.x, 2008.

5 WMO: Manual on Flood Forecasting and Warning, WMO Series No. 1072, 142 pp., ISBN: 978-92-631-1072-5, available at: <http://www.wmo.int/pages/prog/hwrrp/publications.php> (last access: 17 June 2015), 2011.

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Estimation of flood warning runoff thresholds

E. Toth

Table 1. Goodness-of-fit criteria of the 2-year floods estimates obtained by the symmetric and asymmetric networks on the independent test set of catchments.

Model / Index	MAE ($\text{m}^3 \text{s}^{-1}$)	RMSE ($\text{m}^3 \text{s}^{-1}$)	Over%	OverH%	UnderH%
Symm	98	133	46 %	34 %	32 %
Asymm-04	104	147	42 %	32 %	35 %
Asymm-03	105	152	41 %	30 %	37 %
Asymm-02	108	162	36 %	27 %	41 %
Asymm-01	115	178	31 %	18 %	47 %

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



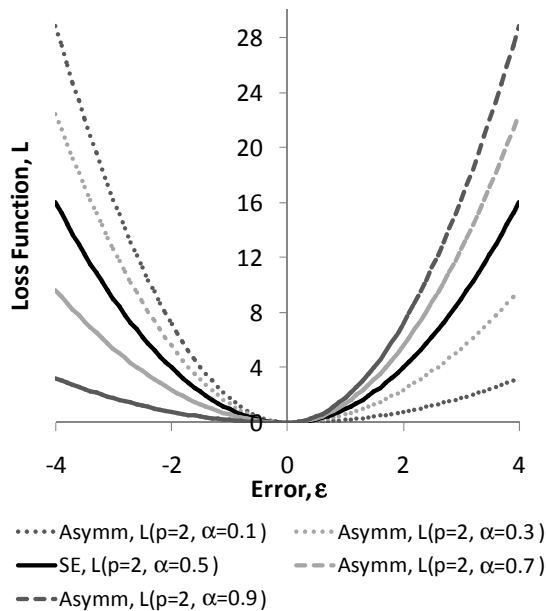


Figure 1. Asymmetric Quad-Quad loss function (with α varying from 0.1 to 0.9) compared with the Squared Error (SE). (Figure taken from Toth, 2015.)

HESSD

12, 6011–6041, 2015

Estimation of flood warning runoff thresholds

E. Toth

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[◀](#) [▶](#)

[◀](#) [▶](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Estimation of flood warning runoff thresholds

E. Toth

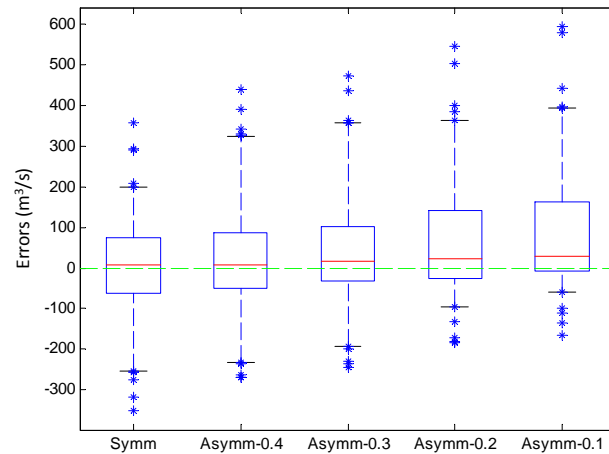


Figure 2. Parallel box-plots of the errors ($\varepsilon = Q_{2,0} - Q_{2,p}$) of the 2 year floods estimates obtained by symmetric and asymmetric networks on the independent test set of catchments.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

