

1 **Technical Note: Initial assessment of a multi-method**
2 **approach to spring-flood forecasting in Sweden**

3

4 **J. Olsson¹, C. B. Uvo², K. Foster^{1,2} and W. Yang¹**

5 [1] Research & Development (hydrology), Swedish Meteorological and Hydrological
6 Institute, 601 76 Norrköping, SWEDEN

7 [2] Department of Water Resources Engineering, Lund University, Box 118, 221 00 Lund,
8 SWEDEN

9 Correspondence to: J. Olsson (jonas.olsson@smhi.se)

10

1 **Abstract**

2 Hydropower is a major energy source in Sweden and proper reservoir management prior to
3 the spring-flood onset is crucial for optimal production. This requires accurate forecasts of the
4 accumulated discharge in the spring-flood period (i.e. the spring-flood volume, SFV).
5 Today's SFV forecasts are generated using a model-based climatological ensemble approach,
6 where time series of precipitation and temperature from historical years are used to force a
7 calibrated and initialised set-up of the HBV model. In this study, a number of new approaches
8 to spring-flood forecasting, that reflect the latest developments with respect to analysis and
9 modelling on seasonal time scales, are presented and evaluated. Three main approaches,
10 represented by specific methods, are evaluated in SFV hindcasts for the Swedish river
11 Vindelälven over a 10-year period with lead times between 0 and 4 months. In the first
12 approach, historically analogue years with respect to the climate in the period preceding the
13 spring flood are identified and used to compose a reduced ensemble. In the second, seasonal
14 meteorological ensemble forecasts are used to drive the HBV model over the spring-flood
15 period. In the third approach, statistical relationships between SFV and the large-scale
16 atmospheric circulation are used to build forecast models. None of the new approaches
17 consistently outperform the climatological ensemble approach, but for early forecasts
18 improvements of up to 25% are found. This potential is reasonably well realised in a multi-
19 method system, which over all forecast dates reduced the error in SFV by ~4%. This
20 improvement is limited but potentially significant for e.g. energy trading.

21

22 **1 Introduction**

23 In Sweden, seasonal (or long-term) hydrological forecasts are used primarily by the
24 hydropower industry for dam regulation and production planning (e.g. Arheimer et al., 2011).
25 The forecasts may be used to optimise the balance between a sufficiently large water volume
26 for optimal power production and a sufficient remaining capacity to safely handle sudden
27 inflows. In northern Sweden, the spring-flood forecast is the most important seasonal
28 hydrological forecast and it generally covers the main snowmelt period in May, June and July.
29 Traditionally, discharge and spring-flood forecasting at seasonal time scales have been based
30 on two approaches. The first utilises statistical relationships between accumulated discharge
31 during the forecasting period and predictors such as snow water equivalent and accumulated

1 precipitation that represent the hydrological state at the forecast date (e.g. Garen, 1992;
2 Pagano et al., 2009). The other approach is based on a hydrological model, which is initialised
3 with observed data up to the forecast issue date and then forced with historical meteorological
4 inputs over the forecasting period (e.g. Day, 1985; Franz et al., 2003). In addition, hybrid
5 approaches, applying model-derived information in the statistical regression, have been
6 proposed (e.g. Nilsson et al., 2006; Rosenberg et al., 2011).

7 Recently, substantial progress has been made in the field of seasonal climate forecasting. It
8 may be distinguished between dynamical and statistical approaches. In the dynamical
9 approach, numerical atmospheric models (global circulation models - GCMs) have been
10 developed to predict seasonal climate, i.e. the average climate for three consecutive months,
11 several months ahead (Goddard et al., 2001). The scientific basis of such predictions is that
12 the sea surface temperature (SST), that characteristically evolves slowly, drives the
13 predictable part of the climate. Consequently, providing to a GCM model the information
14 about the variations in SST makes possible the forecast of seasonal climate. The SST
15 information may be provided to the GCM by using the SST field as a boundary condition or
16 by coupling the GCM to an ocean model that will then provide the necessary SST
17 information. GCM seasonal forecasts may be downscaled dynamically (e.g. Graham et al.
18 2007; Bastola et al. 2013; Bastola and Misra, 2014) or statistically (e.g. Uvo and Graham,
19 1998; Landman et al 2001; Nilsson et al. 2008), to better represent regional interests.

20 An early attempt to use climate model output for hydrological forecasting in a coastal
21 Californian basin during winter 1997/1998 was made by Kim et al. (2000). They found an
22 overall decent agreement between simulated and observed discharge. Low (high) flows were
23 however systematically overestimated (underestimated), which was attributed primarily to
24 climate model precipitation bias. To tackle this problem of climate model biases, Wood et al.
25 (2002) proposed bias-correction by a percentile-based mapping of the climate model output to
26 the climatological distributions of the input variables. Recently, several investigations have
27 focused on the relative role of uncertainties in the initial state and in the climate forecast,
28 respectively, for the hydrological forecast skill (e.g. Li et al., 2009; Shukla and Lettenmaier,
29 2011).

30 In a climate-based statistical approach, connections between climate phenomena that affects
31 the large-scale atmospheric circulation and the subsequent hydro-meteorological development
32 in specific locations are identified and utilised (e.g. Jónsdóttir and Uvo, 2009). Such

1 connections are known as teleconnections as they link phenomena occurring in widely
2 separated regions of the world. The impacts of the El Niño-Southern Oscillation on the
3 tropical climate are the most commonly use of such teleconnections in seasonal forecast
4 (Troccoli, 2010). Teleconnections can be also the basis for seasonal forecast in high latitudes
5 such as the impacts of the North Atlantic Oscillation in the winter climate in Scandinavia (e.g.
6 Uvo, 2003) and the more recently identified impacts of the Scandinavian Pattern on summer
7 climate in southern Sweden (Engström, 2011; Foster and Uvo, 2012; Foster et al. 2015).
8 Teleconnection indices have also been used as predictors in regression-based approaches to
9 seasonal hydrological forecasting (e.g. Robertson and Wang, 2012).

10 In light of the above described progress of the field, it is time to explore ways of updating
11 operational practices by incorporating the new knowledge acquired and methods developed.
12 The objective of this study has been to develop, test and evaluate new approaches to spring-
13 flood forecasting in Sweden. The current spring-flood forecasting practice at the Swedish
14 Meteorological and Hydrological Institute (SMHI) is an example of the traditional model-
15 based approach. It is a climatological ensemble approach based on the HBV hydrological
16 model (e.g. Bergström, 1976; Lindström et al., 1997). The main scientific hypothesis
17 examined is that the application of large-scale climate data (historical and forecasted) can
18 improve forecast skill, as compared with today's procedure. A secondary hypothesis is that a
19 combination of approaches provides an added value, as compared with each individual
20 approach. Three different approaches have been tested and evaluated: (1) identifying analogue
21 historical years that resemble the weather in the current year, (2) using meteorological
22 seasonal forecasts as input to the HBV model and (3) applying statistical relationships
23 between large-scale circulation variables and spring-flood volume. The new approaches were
24 evaluated for the spring-flood forecasts 2000-2010 issued in January, March and May for the
25 river Vindelälven in Sweden.

26

27 **2 Material**

28 **2.1 Study area, local data and models**

29 The catchment of the river Vindelälven has been used for testing spring-flood forecast.
30 Vindelälven is unregulated and two stations were selected for evaluation of the forecast
31 methods; Sorsele located in the upstream part of the basin and Vindeln at basin outlet (Fig.

1 1a). The catchment's elevation range is ~260-840 m.a.s.l. and ~5% of the area consists of
2 lakes. The annual mean temperature is -0.7°C and precipitation ~780 mm. Fig. 2a shows the
3 mean annual hydrograph for station Vindeln (1981-2010, which is the period of interest in
4 this study. In January-February the temperature is generally below -10°C and very little runoff
5 is generated. Melting generally starts in late April and the subsequent spring flood extends
6 throughout July, followed by elevated discharge levels also in August-October.

7 In this study we focus on forecasts of the *accumulated discharge in the spring-flood period*
8 (May-July), which is the key variable delivered to the hydropower industry. This quantity will
9 in the following be referred to as SFV (spring-flood volume). The mean SFV at station
10 Vindeln (Table 1), corresponds to an average discharge in the spring-flood period of ~ 380
11 m³/s. SFV has a pronounced inter-annual variability, which is illustrated by its range (Table 1)
12 and frequency distribution (Fig. 2b).

13 The HBV model (Bergström, 1976; Lindström et al., 1997) was set up and calibrated for
14 Vindelälven, divided into 18 sub-catchments with a mean size of 740 km². HBV is a rainfall-
15 runoff model which includes conceptual numerical descriptions of hydrological processes at
16 basin scale. The general water balance in the HBV model can be expressed as

$$17 \quad P - E - R = \frac{d}{dt} [SP + SM + UZ + LZ + VL] \quad (1)$$

18 where P denotes precipitation, E evapotranspiration, R runoff, SP snow pack, SM soil
19 moisture, UZ and LZ upper and lower groundwater, respectively, and VL the volume of lakes.
20 Input data are normally daily observations of P, air temperature T and monthly estimates of
21 potential evapotranspiration; output is daily Q. Temperature data are used for calculations of
22 snow accumulation and melt and possibly potential evaporation. The model consists of
23 subroutines for meteorological interpolation, snow accumulation and melt, evapotranspiration
24 estimation, a soil moisture accounting procedure, routines for runoff generation and finally, a
25 simple routing procedure between sub-basins and lakes. Applying the model necessitates
26 calibration of a number of free parameters, generally about 10.

27 For historical simulation and calibration, daily P and T inputs for the Vindelälven basin were
28 aggregated to basin scale from gridded fields (4×4 km²), created by optimal interpolation with
29 altitude and wind taken into account (e.g. Johansson, 2002). These data, as well as Q
30 observations, are available since 1961. The HBV set-up used in this experiment is the
31 continuously updated and re-calibrated version used operationally, conceivably representing

1 the optimal performance currently attainable. The calibration is mainly based on the historical
2 period prior to the evaluation period (1961-1999), but some re-calibration has been done also
3 later.

4 The overall accuracy of the HBV calibration expressed in terms of the Nash-Sutcliffe
5 efficiency (NSE) and the relative volume error (RVE) in period Oct 1999 - Sep 2010 are
6 given in Table 1. Values of NSE ~0.9 and only a few percent volume error imply an
7 accurately calibrated model with limited scope for improvement.

8 **2.2 Large-scale atmospheric data**

9 For the definition of circulation patterns (Sect. 3.1), the ERA40 data set (Uppala et al., 2005) ,
10 with resolution of $1^\circ \times 1^\circ$, was used during 1961-2002 while ERAINTERIM (Dee et al., 2011),
11 with a $0.75^\circ \times 0.75^\circ$ resolution, was used during 2003-2010. The domain is shown in Fig. 1a.
12 For the teleconnection-based method studies (Sect. 3.1), monthly indices of the North Atlantic
13 Oscillation, Scandinavian Pattern and East Atlantic Pattern were collected from the Climate
14 Prediction Center (Climate Prediction Center, 2015).

15 The atmospheric seasonal forecast data used in this work were obtained from the European
16 Centre for Medium-Range Weather Forecasts (ECMWF). Two model combinations were
17 available: the ECMWF IFS (Integrated Forecast System, version 3) coupled with a 1° version
18 of the HOPE ocean model, and the ARPEGE atmospheric model coupled with the variable-
19 resolution ($0.33\text{-}2^\circ$) ORCA ocean model. Atmospheric seasonal forecasts were used in two
20 different forms; seasonal averages from both IFS and Arpege were used in the statistical
21 downscaling Sect. 3.1) and daily time series from IFS were used in the dynamical modelling
22 (Sect. 3.1).

23 - Seasonal averages. These data are the ensemble means of the different predicted fields
24 covering the domain 75°W to 75°E and 80°N to 20°N with a $2^\circ \times 2^\circ$ resolution. The predicted
25 fields considered were: 2m T, 10m meridional wind velocity, meridional wind stress, 10m
26 zonal wind velocity, zonal wind stress, surface sensible heat flux, surface latent heat flux,
27 total precipitation, 850hPa T, 850hPa specific humidity, 850hPa meridional wind velocity,
28 850hPa zonal wind velocity, and 850hPa geopotential height. The number of ensemble
29 members per field is 11 for the period 1982-2006 (IFS) or 1982-2007 (Arpege) and 41 for the
30 remaining years until 2010. The domain is shown in Fig. 1a.

1 - Daily time series. These data are the forecasted daily values of 2 m T and the accumulated
2 total P from the forecast issue date to the forecasting period. These data spanned a period
3 from 2000-2010 and had a domain covering 11°E to 23°E and 55°N to 70°N with a 1°×1°
4 resolution. Fig. 1a shows this 1°×1° grid in relation to Sweden.

5

6 **3 Experimental set-up**

7 Three new approaches to seasonal hydrological forecasting are presented and compared to the
8 current climatological ensemble procedure currently applied at SMHI: analogue ensemble,
9 dynamical modelling and statistical downscaling. All methods are described in detail in the
10 Supplement; below only brief outlines are given.

11 Figure 3 shows a schematic of the “temporal set-up” of the experiments. A key issue in
12 seasonal forecasting is the lead time (green area in Fig. 3), i.e. the period between the forecast
13 issue date and the start of the forecasting period (blue area). It may be expected that the
14 relative skill of the different approaches depend on the lead time. Generally, the main gain of
15 statistical approaches is expected for long lead times. When approaching the forecasting
16 period, the representation of the hydro-meteorological state in the HBV model becomes
17 gradually more important and the relative skill of the current procedure is likely to increase.
18 To assess the relative skill for different lead times, we evaluate historical forecasts (re-
19 forecasts) issued on 1 January (1/1), 1 March (1/3) and 1 May (1/5) in the period 2000-2010.

20 **3.1 Methods**

21 Climatological ensemble (CE): In this procedure, HBV is initialised by driving it with
22 observed meteorological inputs (P and T) for a spin-up period up to the forecast issue date.
23 Then, all available historical daily P and T series in the period from the forecast issue date to
24 the end of the forecasting period are used as input to HBV, generating an ensemble of spring-
25 flood forecasts. See further Supplement, Sect. 1.

26 Analogue ensemble (AE): The hypothesis is that it is possible to identify a reduced set of
27 historical years (an analogue ensemble) that describes the weather in the coming forecasting
28 period better than the full historical ensemble used in CE. Two methods for identifying
29 analogue years are used, both based on analyses of large-scale atmospheric conditions 1-6
30 months prior to the forecast issue date (Fig. 3). (1) Teleconnection indices (TCI): evolution of

1 indices representing different climate phenomena. (2) Circulation patterns (CP): frequencies
2 of weather types that describe the large-scale atmospheric state. The analogue ensemble is
3 then used in the same way as the full ensemble in the CE method. See further Supplement,
4 Sect. 2.

5 Dynamical modelling (DM): HBV is initialised as in the CE method. Then T and P from
6 meteorological seasonal forecasts (Sect. 2.2) are converted to HBV input and used to drive the
7 model in the forecasting period. See further Supplement, Sect. 3.

8 Statistical downscaling (SD): Statistical relationships between forecasted large-scale
9 circulation variables (predictors) and SFV (predictand) are identified. The predictors are
10 defined in the 3-month period following the forecast issue date (Fig. 3). See further
11 Supplement, Sect. 4.

12 **3.2 Evaluation**

13 As described in the Supplement, all methods generate ensemble forecasts (although the AE
14 approach may become deterministic if only one analogue year is found). The ensemble size,
15 however, varies between methods as well as between years for the same method (Supplement,
16 Table S1). Although probabilistic forecasts are generally more useful than deterministic ones,
17 for this initial assessment, with only an 11-year evaluation period, we consider it sufficient
18 with a deterministic evaluation. Thus, from all ensemble forecasts the median forecast is
19 calculated and used in the subsequent analysis, neglecting any impact of ensemble size on the
20 skill of the median (e.g. Buizza and Palmer, 1998).

21 Forecast performance is assessed by $MARE_F$, the mean absolute value of the relative error of
22 a certain forecast (or simulation) F, defined as

$$23 \quad MARE_F = \frac{1}{11} \sum_{y=2000}^{2010} ARE_F^y \quad (2)$$

24 where y denotes year and ARE_F^y the absolute value of the relative error

$$25 \quad ARE_F^y = \left| 100 * \left(\frac{SFV_F^y - SFV_{OBS}^y}{SFV_{OBS}^y} \right) \right| \quad (3)$$

26 where OBS denotes observation.

1 To quantify the gain of the new forecast approaches (Sects. 3.2-3.4), their MARE-values are
 2 compared with the MARE obtained using the current CE procedure ($MARE_{CE}$) by calculating
 3 the relative improvement RI (%) according to

$$4 \quad RI_F = 100 * \left(\frac{MARE_{CE} - MARE_F}{MARE_{CE}} \right) \quad (4)$$

5 where a positive RI indicates that the error of the new approach is smaller than the error in the
 6 CE procedure, and vice versa, and RI=100% implies a perfect forecast.

7 As an additional performance measure, we use the frequency of years FY^+ (%) in which the
 8 new approach performs better (i.e. has a lower ARE) than the CE procedure. This may be
 9 expressed as

$$10 \quad FY_F^+ = 100 * \left(\frac{1}{11} \sum_{y=2000}^{2010} H^y \right) \quad (5)$$

11 where H is the Heaviside function defined by

$$12 \quad H^y = \begin{cases} 0, & AE_{CE}^y < AE_F^y \\ 1, & AE_{CE}^y > AE_F^y \end{cases} \quad (6)$$

13 As expected considering the short 11-year evaluation period, MARE is sensitive to single
 14 years with a high ARE-value. As shown in the results below (Sect. 4), in several cases this
 15 makes RI negative even if the new approach outperforms CE in most years (i.e. $FY^+ > 50$).
 16 Thus, in this study we consider FY^+ to be the most relevant measure of forecast performance,
 17 although in practice this should be determined together with end-users of the forecasts, based
 18 on e.g. the impacts of very inaccurate forecasts.

19 **3.3 Baseline simulations with climatological ensemble (CE)**

20 Before testing the new forecasting approaches, the performance of HBV model and the
 21 climatological ensemble procedure (CE) was assessed (Table 1). In simulation mode, i.e.
 22 using the actually observed values of P and T in each year, the MARE of SFV is 7-8%. This
 23 quantifies the HBV model error and corresponds to having a perfect meteorological forecast.
 24 In CE forecast mode, i.e. using P and T from all historical years as input and calculate the
 25 median SFV, the average MARE decreases gradually from ~ 20% in the 1/1-forecasts to ~9%
 26 in the 1/5-forecasts, which thus quantifies the improvement when approaching the spring-
 27 flood period.

1 The differences in Table 1 between MARE for simulations and CE forecasts, respectively,
2 represent the part of the total error that is related to the meteorological input. In Vindelälven,
3 this part decreases from 12.1 percentage points in the 1/1-forecasts (which corresponds to
4 ~60% of the total error) to 1.8 points in the 1/5-forecasts (~20%). The relative impact of the
5 HBV model error thus increases with decreasing lead time, which implies that the scope for
6 improving the baseline forecasts decreases with decreasing lead time. It should be emphasised
7 that two out of the three new forecast approaches tested here (AE and DM) aim at improving
8 the meteorological input. They can thus only improve the forecasts in that respect; the HBV
9 model error remains. The third method (SD), however, aims at improving total performance.

10

11 **4 Results from single methods**

12 An overview of the results of each approach is given in Table 2. The numbers after
13 approaches TCI and CP correspond to the best performing version of each approach.

14 Concerning the AE approach, both the TCI and the CP approach are based on analyses of the
15 large-scale climatic conditions 1 to 6 months before the forecast date (see Supplement). The
16 aim was to identify the number of months of prior climatic information, N, that generates the
17 best performance when averaged over all forecast dates. Using TCI to identify analogue years
18 proved to be difficult and the reduced ensemble generated did generally not outperform CE
19 for the SFV forecasts. Even the best performing TCI version, using 6 months' prior climate
20 information (N=6; TCI6), consistently had a higher MARE than CE although it outperformed
21 CE for most of the 11 years in station Sorsele (Table 2). For the 1/1-forecasts, N=6 was
22 clearly superior but for the later forecasts N=1 and N=2 produced a similar performance.

23 The CP method turned out more successful and the resulting SFV forecasts on 1/1 and 1/3 for
24 the best performing version (N=3; CP3) clearly outperformed CE in both stations (Table 2).
25 SFV was more accurately forecasted than with CE in 3/4 of all years. For the 1/5-forecasts,
26 however, CP was less accurate than CE. For the 1/1- and 1/3-forecasts, N=3 was clearly
27 superior but for the 1/5-forecasts N=2 and N=4 performed slightly better.

28 Overall, the DM approach of using ECMWF seasonal forecasts of T and P as inputs to the
29 HBV model did not improve performance as compared with the CE procedure (Table 2). In
30 total, a similar performance to CE was found in station Sorsele but the accuracy in station

1 Vindeln was consistently lower. In the 1/5-forecasts, however, DM is the overall best
2 performing new approach.

3 The SD method outperformed CE in the 1/1-forecasts with an RI of almost 20% in both
4 stations (Table 2). For the 1/3- and 1/5-forecasts the SD method has FY^+ -values > 50 in
5 station Sorsele but RI-values of $\sim -65\%$. This implies that the SD-forecast is generally better
6 than CE but that it may also be very wrong.

7 The performance of the SD method is heavily affected by whether the climatic features in the
8 forecasting data were encountered in the training period dataset. If the forecasted conditions
9 are outside the range encountered in the training period, the SD method has the tendency to
10 produce forecasts that differ drastically from the observations. This can be dealt with by either
11 increasing the length of the training dataset or by analysing the year in question and
12 determining if there were similar years in the training period which would give an indication
13 as to how the method might perform.

14 With very few exceptions, the new approaches performed better in the upper part of the
15 catchment (Sorsele) than in the outlet (Vindeln). This has not been analysed in any depth, but
16 it is likely related to the more clear-cut spring flood in the upper part with very little prior
17 runoff. In the outlet, melting episodes before the spring-flood onset lead to temporary
18 increased runoff and a reduction of the snow pack. These episodes, and their impacts, are
19 likely very difficult to capture in seasonal forecasts.

20

21 **5 Composing a multi-method system**

22 A multi-method forecast approach consists in combining forecasts resulting from different
23 methods to reach a more reliable estimate of the forecast probability distribution. This
24 technique has been used since early 1990s for developing seasonal climate forecast (Tracton
25 and Kalnay, 1993) and has proved to provide more skilful results than a simple model forecast
26 (Hagedorn et al., 2005; among many others).

27 There are many possible ways of combining or merging multi-method forecasts, ranging from
28 simple rank-based methods to more sophisticated statistical concepts. In light of the limited
29 material available in this study, we restricted ourselves to testing two conceptually straight-
30 forward ways of combining the forecasts: a median approach (Sect. 5.1) and a weighted
31 approach (Sect. 5.2). Further, the value of using transparent and easily communicated

1 approaches should not be underestimated when the target is operational forecasting and its
2 associated end-user interaction.

3 In each approach, two method ensembles are tested. The first ensemble, denoted NEW,
4 represents the new approaches to spring-flood forecasting considered in the study and thus
5 includes approaches AE, DM and SD. As only one approach to analogue ensemble generation
6 should be included, the best performing one for each forecast date was used, i.e. CP for 1/1
7 and 1/3 and TCI for 1/5 (Table 2). The CP method is, however, not directly applicable in
8 operational forecasting as it is based on ERA reanalyses that are only available with a time lag
9 of several months. Further, the TCI approach does not outperform CE in the 1/5-forecasts.
10 Therefore we also consider a second ensemble that represents what is attainable operationally.
11 In this ensemble, denoted OPE, AE is replaced by CE and thus no attempt to identify
12 analogue years is made here.

13 **5.1 Median multi-method**

14 As three forecasts are available, the median approach amounts to using the second member in
15 the ranked forecast ensemble. For the NEW ensemble, RI indicates a clear improvement in
16 the 1/1-forecasts as compared with CE, but no improvement in terms of FY^+ . The 1/3-
17 forecasts are better than CE 60% of the time and MARE is slightly reduced on average. The
18 1/5-forecasts are slightly better than CE in Sorsele but slightly worse in Vindeln. On average,
19 a slight improvement over CE is found. In the OPE ensemble, the 1/1-forecasts perform
20 slightly better than the NEW ensemble but the 1/3-forecasts clearly worse, as expected from
21 the good performance of CP in these forecasts (Table 2). Overall the performance of the OPE
22 ensemble is very similar to the NEW ensemble.

23 In total, a reduction of MARE by up to 25% appears attainable for the 1/1-forecasts by the
24 median approach. At the later forecast issue dates, a limited improvement in terms of both RI
25 and FY^+ was attained for Sorsele but not for Vindeln. Over all forecast dates and stations, a
26 slight improvement over CE is indicated. In some cases, the median multi-method performs
27 slightly better than each of the single methods included, generally because very inaccurate
28 single forecasts become eliminated.

1 5.2 Weighted multi-method

2 This approach consists of applying weights w between 0 and 1 to the different forecasts and
3 then adding them together. The spring-flood volume forecasted by the weighted multi-
4 method, SFV_{FW} , is thus defined as

$$5 \quad SFV_{FW} = \sum_{f=1}^3 w_f \cdot SFV_f \quad \text{with} \quad \sum_{f=1}^3 w_f = 1 \quad \text{and} \quad w_f \geq 0 \quad (7)$$

6 where the index f refers to the three different forecast methods available in each of the
7 ensembles NEW and OPE.

8 One set of weights are chosen for each forecast date. The selection of weights was made
9 based on the evaluations performed in Table 2. With three forecast methods available (in each
10 ensemble), the best performing method (defined by considering both RI and FY^+) was
11 assigned the highest weight 0.5 (3/6), the second best performing method the intermediate
12 weight 0.33 (2/6) and the worst performing method the lowest weight 0.17 (=1/6).

13 The weighted NEW set outperforms CE in the 1/1- and 1/3-forecasts for both stations; only
14 the 1/5-forecasts for station Vindeln become notably better by CE. In the OPE set, similarly to
15 the median forecast, the 1/3-forecast is notably worse than the NEW set but still with $FY^+ > 50$;
16 the 1/5-forecasts are very similar. In total, weighting is not able to improve the result as
17 compared with median approach in terms of RI. However, over all combinations of forecast
18 dates and stations except the 1/5-forecast in station Vindeln, the weighted forecasts perform
19 better than CE in most years. The 1/1-forecasts are better than CE in almost 2/3 of all years
20 with a consistent MARE-reduction of 15-20% in both stations.

21 It should be emphasised that the same data were thus used both to estimate the weights and to
22 assess the performance of the weighted model, as the 10-year period is too short for proper
23 split-sample calibration and validation. Limited testing however indicated good performance
24 of the fixed-weight approach also for independent validation data. Besides using fixed
25 weights it was also tested to estimate optimal weights based on historical performance. This
26 however turned out unfeasible in this study due to the limited historical data available and the
27 associated tendency of overfitting to the calibration data.

28

1 **6 Concluding remarks**

2 None of the new approaches consistently outperformed the CE method, although
3 improvement was indicated. The largest improvement was found for the 1/1- and 1/3-
4 forecasts using an analogue ensemble based on circulation patterns and for the 1/1-forecasts
5 using statistical downscaling. In these cases the new approach may outperform the CE
6 method up 75% of the time with an error reduction of ~20%. In the 1/5-forecasts, none of the
7 new methods clearly outperformed the CE method. By combining the different methods in a
8 multi-method, an overall slight improvement over CE was attained, with a performance for
9 single forecast dates and stations rather close to the best performing individual method. The
10 overall error reduction attainable by the multi-method, ~4%, may sound limited but it must be
11 emphasised that every percent of forecast improvement potentially corresponds to large
12 financial revenues in energy trading activities. For spring-flood forecasts early in the season,
13 particularly in January, the multi-method clearly outperformed the CE method.

14 It must be emphasised that these results were obtained in a preliminary feasibility study with
15 limited data and overall basic versions of the used methods. Future studies need to include
16 longer test periods and more stations as well as refined and better tailored versions of the
17 forecast methods. One limitation concerns inhomogeneities of data and forecasts in the study
18 period, e.g. the shift from ERA40 to ERA Interim in 2003 and the shift from 11 to 41
19 ensemble members in the seasonal forecasts in 2006/2007. A new ECMWF IFS version (4) is
20 now available, but preliminary tests indicate a rather similar performance of SFV forecasts by
21 the approaches concerned, as compared with using the version 3 data as done here. Using bias
22 correction of the P and T input in the DM procedure would likely improve performance, as
23 demonstrated by e.g. Wood et al. (2002), although such pre-processing has limitations in an
24 operational context when new model versions are released. Incorporating hydrological model
25 data, in particular snow information, in the SD method has shown promising results in
26 preliminary tests, especially for improving the forecasts close to the spring-flood period.
27 Development and testing along these lines are ongoing.

28

29 **Author contribution**

30 C.B.U. and K.F. designed and implemented the TCI and SD approaches. W.Y. designed and
31 implemented the CP approach. J.O. designed and implemented the DM approach and the

1 multi-method composition. J.O. prepared the manuscript with contributions from mainly
2 C.B.U. but also W.Y and K.F.

3

4 **Acknowledgements**

5 The study was performed in research projects funded by Elforsk AB and the Swedish
6 Research Council Formas. Many thanks to Johan Södling, Jonas German and Barbro
7 Johansson for technical assistance as well as fruitful discussion. Constructive and detailed
8 reviews of the original manuscript by Peter Krahe, Massimiliano Zappa, Renaud Marty and
9 Philippe Crochet are gratefully acknowledged.

10

1 **References**

- 2 Arheimer, B., Lindström, G., and Olsson, J.: A systematic review of sensitivities in the
3 Swedish flood-forecasting system, *Atmos. Res.*, 100, 275-284, 2011.
- 4 Bastola, S. and Misra, V.: Evaluation of dynamically downscaled reanalysis precipitation data
5 for hydrological application, *Hydrol. Proc.*, 28, 1989-2002, 2014.
- 6 Bastola, S., Misra, V., and Li, H. Q.: Seasonal hydrological forecasts for watersheds over the
7 southeastern United States for the boreal summer and fall seasons, *Earth Interact.*, 17, 1-22,
8 2013.
- 9 Bergström, S.: Development and application of a conceptual runoff model for Scandinavian
10 catchments, SMHI Reports RHO, No. 7, Norrköping, Sweden, 1976.
- 11 Buizza, R. and Palmer, T. N.: Impact of ensemble size on ensemble prediction. *Mon. Weather*
12 *Rev.*, 126, 2503-2518, 1998.
- 13 Climate Prediction Center: <http://www.cpc.ncep.noaa.gov/data/teledoc/telecontents.shtml>, last
14 access: 12 November 2015.
- 15 Day, G.: Extended streamflow forecasting using NWSRFS, *J. Water Resour. Plann. Manage.*,
16 111, 157–170, 1985.
- 17 Dee, D. P., Uppala, S. M., Simmons, A. J., Berrisford, P., Poli, P., Kobayashi, S., Andrae, U.,
18 Balmaseda, M. A., Balsamo, G., Bauer, P., Bechtold, P., Beljaars, A. C. M., van de Berg, L.,
19 Bidlot, J., Bormann, N., Delsol, C., Dragani, R., Fuentes, M., Geer, A. J., Haimberger, L.,
20 Healy, S. B., Hersbach, H., Hólm, E. V., Isaksen, L., Kållberg, P., Köhler, M., Matricardi, M.,
21 McNally, A. P., Monge-Sanz, B. M., Morcrette, J.-J., Park, B.-K., Peubey, C., de Rosnay, P.,
22 Tavolato, C., Thépaut, J.-N., and Vitart, F.: The ERA-Interim reanalysis: configuration and
23 performance of the data assimilation system, *Q. J. Roy. Meteor. Soc.*, 137, 553–597, 2011.
- 24 Engström, J.: The effect of Northern Hemisphere teleconnections on the hydropower
25 production in southern Sweden, M.Sc. thesis, Department of Earth and Ecosystem Sciences,
26 Physical Geography and Ecosystems Analysis, Lund University, 2011.
- 27 Foster, K. and Uvo, C. B.: Regionalisation of Swedish hydrology. XXVII Nordic Hydrology
28 Conference, Oulu, 2012.

- 1 Foster, K., Olsson, J., and Uvo, C.B.: The spatial and temporal effect of selected
2 teleconnection phenomena on Swedish hydrology, *Clim. Dyn.*, submitted, 2015.
- 3 Franz, K. J., Hartmann, H. C., Sorooshian, S., and Bales, R.: Verification of National Weather
4 Service ensemble streamflow predictions for water supply forecasting in the Colorado River
5 basin, *J. Hydrometeorol.*, 4, 1105–1118, 2003.
- 6 Garen, D.: Improved techniques in regression-based streamflow volume forecasting, *J. Water
7 Resour. Plann. Manage.*, 118, 654–670, 1992.
- 8 Goddard, L., Mason, S. J., Zebiak, S. E., Ropelewski, C. F, Basher, R., and Cane, M. A.:
9 Current approaches to seasonal-to-interannual climate predictions, *Int. J. Climatol.*, 21, 1111–
10 1152, 2001.
- 11 Graham, L. P., Andreasson, J., and Carlsson, B.: Assessing climate change impacts on
12 hydrology from an ensemble of regional climate models, model scales and linking methods -
13 a case study on the Lule River basin, *Climatic Change*, 81, 293-307, 2007.
- 14 Hagedorn, R., Doblas-Reyes, F., and Palmer, T.: The rationale behind the success of
15 multi-model ensembles in seasonal forecasting–I. Basic concept, *Tellus A*, 57, 219-233, 2005.
- 16 Johansson, B.: Estimation of areal precipitation for hydrological modelling, Ph.D. thesis,
17 Earth Sciences Centre, Göteborg University, Report nr. A76., 2002.
- 18 Jónsdóttir, J. F. and Uvo, C.B.: Long term variability in Icelandic hydrological series and its
19 relation to variability in atmospheric circulation over the North Atlantic Ocean, *Int. J.
20 Climatol.*, 29, 1369-1380, 2009.
- 21 Kim, J., Miller, N. L., Farrara, J. D., and Hong, S.-Y.: A seasonal precipitation and stream
22 flow hindcast and prediction study in the western United States during the 1997/98 winter
23 season using a dynamic downscaling system. *J. Hydrometeorol.*, 1, 311-329, 2000.
- 24 Landman, W. A., Mason, S. J., Tyson, P. D., and Tennant, W. J.: Statistical downscaling of
25 GCM simulations to streamflow, *J. Hydrol.*, 252, 221-236, 2001.
- 26 Li, H., Luo, L., Wood, E. F., and Schaake, J.: The role of initial conditions and forcing
27 uncertainties in seasonal hydrologic forecasting, *J. Geophys. Res.*, 114, D04114,
28 doi:10.1029/2008JD010969, 2009.
- 29 Lindström, G., Johansson, B., Persson, M., Gardelin, M., and Bergström, S.: Development
30 and test of the distributed HBV-96 hydrological model, *J. Hydrol.*, 201, 272-288, 1997.

1 Nilsson, P., Uvo, C. B., and Berndtsson, R.: Monthly runoff simulation: comparison of a
2 conceptual model, neural networks and a combination of them, *J. Hydrol.*, 321, 344-363,
3 2006.

4 Nilsson, P., Uvo, C. B., Landman, W., and Nguye, T. D.: Downscaling of GCM forecasts to
5 streamflow over Scandinavia, *Hydrol. Res.*, 39, 17-25, 2008.

6 Pagano, T. C., Garen, D. C., Perkins, T. R., and Pasteris, P. A.: Daily updating of operational
7 statistical seasonal water supply forecasts for the western U.S., *J. Am. Water Resour. As.*, 45,
8 767-778, 2009.

9 Robertson, D. E. and Wang, Q. J.: A Bayesian approach to predictor selection for seasonal
10 streamflow forecasting, *J. Hydrometeorol.*, 13, 155-171, 2012.

11 Rosenberg, E. A., Wood, A. W., and Steinemann, A. C.: Statistical applications of physically
12 based hydrologic models to seasonal streamflow forecasts, *Water Resour. Res.*, 47, W00H14,
13 doi:10.1029/2010WR010101, 2011.

14 Shukla, S. and Lettenmaier, D. P.: Seasonal hydrologic prediction in the United States:
15 understanding the role of initial hydrologic conditions and seasonal climate forecast skill,
16 *Hydrol. Earth Syst. Sci.*, 15, 3529-3538, doi:10.5194/hess-15-3529-2011, 2011.

17 Tracton, M. S. and Kalnay, E.: Operational ensemble prediction at the National
18 Meteorological Center: practical aspects, *Weather Forecast.*, 8, 379-398, 1993.

19 Troccoli, A.: Seasonal climate forecasting, *Meteorol. Appl.*, 17, 251-268, 2010.

20 Uppala, S. M., K allberg, P. W., Simmons, A. J., Andrae, U., Bechtold, V. D. C., Fiorino, M.,
21 Gibson, J. K., Haseler, J., Hernandez, A., Kelly, G. A., Li, X., Onogi, K., Saarinen, S., Sokka,
22 N., Allan, R. P., Andersson, E., Arpe, K., Balmaseda, M. A., Beljaars, A. C. M., Berg, L. V.
23 D., Bidlot, J., Bormann, N., Caires, S., Chevallier, F., Dethof, A., Dragosavac, M., Fisher, M.,
24 Fuentes, M., Hagemann, S., H olm, E., Hoskins, B. J., Isaksen, L., Janssen, P. A. E. M., Jenne,
25 R., McNally, A. P., Mahfouf, J.-F., Morcrette, J.-J., Rayner, N. A., Saunders, R. W., Simon,
26 P., Sterl, A., Trenberth, K. E., Untch, A., Vasiljevic, D., Viterbo, P., and Woollen, J.: The
27 ERA-40 re-analysis. *Q. J. Roy. Meteor. Soc.*, 131, 2961-3012, 2005.

28 Uvo, C. B.: Analysis and regionalization of northern European winter precipitation based on
29 its relationship with the North Atlantic Oscillation, *Int. J. Climatol.*, 23, 1185-1194, 2003.

1 Uvo, C. B. and Graham, N.: Seasonal runoff forecast for northern South America: a statistical
2 model, *Water Resour. Res.*, 34, 3515-3524, 1998.

3 Wood, A. W., Maurer, E. P., Kumar, A., and Lettenmaier, D.: Long-range experimental
4 hydrologic forecasting for the eastern United States, *J. Geophys. Res.*, 107, 4429,
5 doi:10.1029/2001JD000659, 2002.

6

7

8

- 1 Table 1. Basin and station characteristics including overall performance of the HBV model.
- 2 MARE (%) of SFV estimated by simulation (SIM) and by climatological ensemble (CE)
- 3 forecasts (F) with different issue dates (1/1, 1/3, 1/5). All values represent 2000-2010.

Station	Area (km ²)	HBV		SFV (m ³ *10 ⁹) Min / Mean / Max	MARE _{SIM}	MARE _{CE}		
		NSE	RVE			F 1/1	F 1/3	F 1/5
Sorsele	6 054	0.89	3.2	1.61 / 2.30 / 2.77	6.8	19.2	11.6	9.5
Vindeln*	11 846	0.91	1.5	2.26 / 3.18 / 4.11	8.2	20.0	13.2	9.0

- 4 *Basin outlet
- 5

1 Table 2. Relative improvement RI (%) and frequency of years with a better performance FY⁺
 2 (%) of the new forecasting approaches TCI6, CP3, DM and SD, as compared with the
 3 climatological ensemble CE (boldface indicates better performance than CE).

		TCI6		CP3		DM		SD	
		RI	FY ⁺	RI	FY ⁺	RI	FY ⁺	RI	FY ⁺
1/1	Sorsele	-6.6	55	1.4	75	7.6	45	18.4	55
	Vindeln	-9.0	45	13.0	75	-13.5	45	17.3	55
1/3	Sorsele	-1.2	64	19.2	70	-17.3	45	-63.3	55
	Vindeln	-10.4	45	36.2	80	-18.5	45	-29.4	45
1/5	Sorsele	-6.6	55	-9.9	33	1.3	55	-66.8	64
	Vindeln	-21.9	45	-31.3	33	-12.0	36	-90.3	27
Average		-9.3	52	4.8	61	-8.7	45	-35.7	50

4

5

1 Table 3. Relative improvement RI (%) and frequency of years with a better performance FY⁺
 2 (%) for the median and weighted multi-method approaches, as compared with the
 3 climatological ensemble CE (boldface indicates better performance than CE).

		Median				Weighted			
		NEW		OPE		NEW		OPE	
		RI	FY ⁺	RI	FY ⁺	RI	FY ⁺	RI	FY ⁺
1/1	Sorsele	20.9	50	25.3	56	20.1	55	18.2	64
	Vindeln	5.8	50	12.5	56	15.7	64	12.9	64
1/3	Sorsele	5.9	60	-4.2	56	13.3	64	-7.2	55
	Vindeln	-0.1	60	-10.7	43	3.8	55	-10	55
1/5	Sorsele	3.7	55	7.9	67	-5.0	55	-0.6	55
	Vindeln	-15.6	36	-5.2	33	-23.3	36	-13.5	45
Average		3.4	52	4.3	52	4.1	55	0.0	56

4
5
6
7
8
9
10
11
12
13
14
15

1 **Figure captions**

2 Figure 1. Domain used in the CP method, ECMWF IFS grid (blue dots), Vindelälven
3 catchment (yellow), stations Sorsele (S) and Vindeln (V) (a). Domain used in the SD method
4 (b).

5 Figure 2. Mean annual Q cycle (a) and SFV frequency distribution (b) for station Vindeln in
6 the period 1961-1999.

7 Figure 3. Temporal set-up of the experiments. Vertical black lines; forecast dates. Blue area:
8 spring-flood period. Green area: lead time. Red area: full historical period used in the
9 selection of analogue years (CP, TCI). Black arrows: time periods (1-6 months back in time)
10 tested in the selection of analogue years (CP, TCI). Yellow arrows: time period (3 months
11 ahead) used to calculate the predictors in the SD method. White arrows: forecasting periods in
12 which the HBV model was run using full historical ensemble (CE), reduced analogue
13 ensemble (CP, TCI) and ECMWF forecasts (DM).

14

15

16

17

18

19

20

21

22


23

24

25


26

27

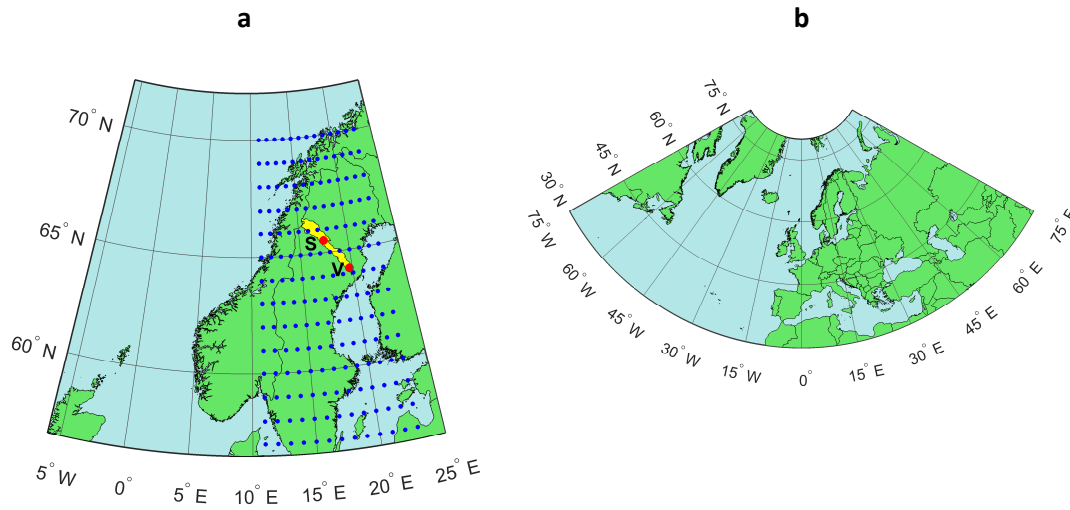


1 Figure 1. Domain used in the CP method, ECMWF IFS grid (blue dots), Vindelälven
 2 catchment (yellow), stations Sorsele (S) and Vindeln (V) (a). Domain used in the SD method
 3 (b).

- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18

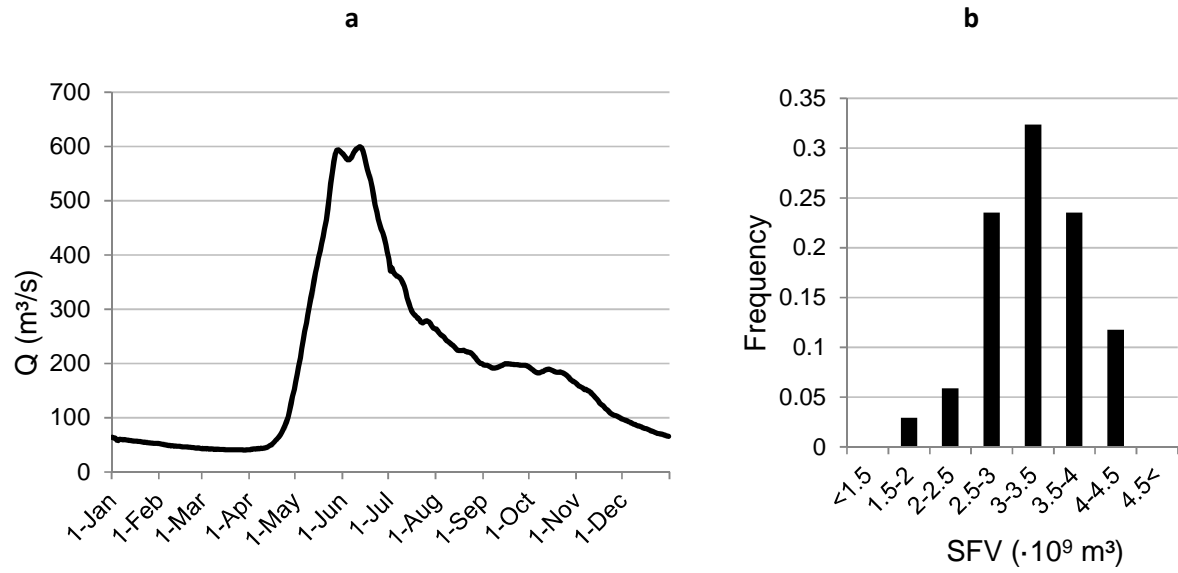

1 Figure 2. Mean annual Q cycle (a) and SFV frequency distribution (b) for station Vindeln in
 2 the period 1961-1999.

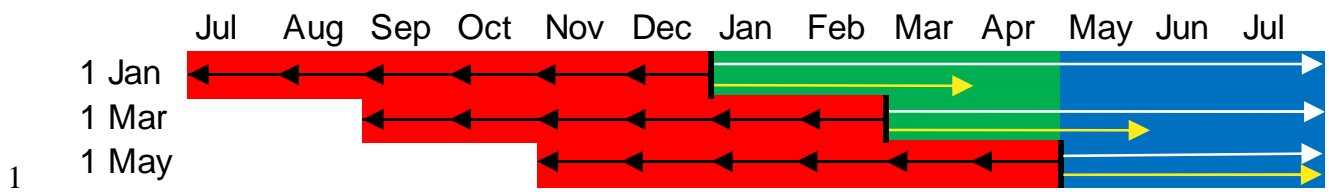

2 Figure 3. Temporal set-up of the experiments. Vertical black lines; forecast dates. Blue area:
 3 spring-flood period. Green area: lead time. Red area: full historical period used in the
 4 selection of analogue years (CP, TCI). Black arrows: time periods (1-6 months back in time)
 5 tested in the selection of analogue years (CP, TCI). Yellow arrows: time period (3 months
 6 ahead) used to calculate the predictors in the SD method. White arrows: forecasting periods in
 7 which the HBV model was run using full historical ensemble (CE), reduced analogue
 8 ensemble (CP, TCI) and ECMWF forecasts (DM).

9