

# A two-parameter Budyko function to represent conditions under which evapotranspiration exceeds precipitation

Peter Greve<sup>1,2</sup>, Lukas Gudmundsson<sup>1</sup>, Boris Orlowsky<sup>1</sup>, and Sonia I. Seneviratne<sup>1</sup>

<sup>1</sup>Institute for Atmospheric and Climate Science, ETH Zurich, Zurich, Switzerland

<sup>2</sup>Center for Climate Systems Modeling (C2SM), ETH Zurich, Zurich, Switzerland

*Correspondence to:* Peter Greve (peter.greve@env.ethz.ch)

**Abstract.** A comprehensive assessment of the partitioning of precipitation ( $P$ ) into evapotranspiration ( $E$ ) and runoff ( $Q$ ) is of major importance for a wide range of socio-economic sectors. For climatological averages, the Budyko framework provides a simple first order relationship to estimate water availability represented by the ratio  $E/P$  as a function of the aridity index ( $E_p/P$ , with  $E_p$  denoting potential evaporation). However, the Budyko framework is limited to steady-state conditions, being a result of assuming negligible storage change in the land water balance. Processes leading to changes in the terrestrial water storage at any spatial and/or temporal scale are hence not represented. Here we propose an analytically derived modification of the Budyko framework including a new parameter explicitly representing additional water available to evapotranspiration besides instantaneous precipitation. The modified framework is comprehensively analyzed, showing that the additional parameter leads to a rotation of the original water supply limit. We further evaluate the new formulation in an example application at mean seasonal time scales, showing that the extended framework is able to represent conditions in which monthly to annual evapotranspiration exceeds monthly to annual precipitation.

## 15 1 Introduction

The Budyko framework serves as a tool to estimate mean annual water availability as a function of aridity. It is widely-used and well-established within the hydrological community, both due to its simplicity and long history, combining experience from over a century of hydrological research. Budyko (1956, 1974) derived a formulation of the function based on findings of Schreiber (1904) and Ol'Dekop (1911), but also several other formulations have been postulated, which, however,

are numerically very similar (Schreiber, 1904; Ol’Dekop, 1911; Turc, 1955; Mezentsev, 1955; Pike, 1964; Fu, 1981; Choudhury, 1999; Zhang et al., 2001, 2004; Porporato et al., 2004; Yang et al., 2008; Donohue et al., 2012; Wang and Tang, 2014; Zhou et al., 2015b). Many of these formulations are empirically derived and only few are analytically determined from simple phenomenological assumptions (Fu, 1981; Milly, 1994; Porporato et al., 2004; Zhang et al., 2004; Yang et al., 2007; Zhou et al., 2015b). Numerous studies further assess controls determining the observed systematic scatter within the Budyko space. This scatter is, however, inherent, being also justified by the existence of free parameters within analytically-derived formulations of the Budyko curve (Fu, 1981; Choudhury, 1999; Zhang et al., 2004; Yang et al., 2007). A variety of catchment and climate characteristics, such as e.g. vegetation (Zhang et al., 2001; Donohue et al., 2007; Williams et al., 2012; Li et al., 2013; Zhou et al., 2015a), seasonality characteristics (Milly, 1994; Potter et al., 2005; Gentine et al., 2012; Chen et al., 2013; Berghuijs et al., 2014), soil properties (Porporato et al., 2004; Shao et al., 2012; Donohue et al., 2012), and topographic controls (Shao et al., 2012; Xu et al., 2013) have been proposed to exert a certain influence on the scatter within the Budyko space. Also more complex approaches to combine various controls (Milly, 1994; Gentine et al., 2012; Donohue et al., 2012; Xu et al., 2013) have been considered. Nonetheless, until present no conclusive statement on controls determining the scatter within the Budyko space has been made. In a recent assessment, Greve et al. (2015) further suggested a probabilistic Budyko framework by assuming that the combined influence of all possible controls is actually nondeterministic and follows a probability distribution instead.

In this study we make use of the formulation introduced by Fu (1981) and Zhang et al. (2004). They derived a functional form between  $E/P$  and  $\Phi = E_p/P$  at mean annual catchment scales analytically from simple physical assumptions,

$$\frac{E}{P} = 1 + \Phi - (1 + (\Phi)^\omega)^{\frac{1}{\omega}}, \quad (1)$$

where  $\omega$  is a free model parameter. The original formulation introduced by Budyko (1956, 1974) is best represented by setting  $\omega = 2.6$  (Zhang et al., 2004). The obtained function is subject to two physical constraints constituting both the water demand and supply limits. The water demand limit represents  $E$  being limited by  $E_p$ , whereas the water supply limit determines  $E$  to be limited by  $P$  (see Fig. 1). To maintain the supply limit, steady-state conditions are required. Therefore, the storage term ( $dS/dt$ ) in the land water balance equation at catchment scales

$$\frac{dS}{dt} = P - E - Q \quad (2)$$

is assumed to be zero, which is generally a valid assumption at mean annual scales. It is further important to note that groundwater flow is not included in equation 2 and neglected throughout the following analysis. However, the assumption of negligible storage changes constitutes a major

limitation to the original Budyko framework. As a consequence, the framework is not valid under  
55 conditions in which additional storage water besides instantaneous  $P$  is available to  $E$  and  $E > P$ .  
We note here that by instantaneous  $P$  (from here on just referred to as  $P$ ) we mean all  $P$  within  
the considered time interval. Conditions under which the framework is not valid can occur e.g.  
at sub-annual or inter-annual time scales due to changes in terrestrial water storage terms such as  
60 soil moisture, groundwater or snow storage. Additional water might be also introduced by land-  
scape changes (Jaramillo and Destouni, 2014), human interventions (Milly et al., 2008) or phase  
changes of water within the system or supplied through precipitation (Jaramillo and Destouni, 2014;  
Berghuijs et al., 2014). Also long-term changes in soil moisture may happen, e.g. under transient  
climate change (Wang, 2005; Orłowsky and Seneviratne, 2013). Only few assessments addressed  
65 this limitation and provided further insights on how the Budyko hypothesis could be extended to  
conditions under which  $E$  exceeds  $P$  (Zhang et al., 2008; Chen et al., 2013). Nonetheless, so far a  
theoretical incorporation of conditions in which  $E > P$  into the Budyko framework is missing. Here  
we aim to address this issue by analytically deriving a new, modified Budyko formulation from basic  
phenomenological assumptions by using the approach of Fu (1981) and Zhang et al. (2004).

## 2 Deriving a modified formulation

### 70 2.1 Preliminary Assumptions

In the following we will make use of the concept of potential evapotranspiration, which provides  
an estimate of the amount of water that would be evaporated under conditions of a well-watered  
surface. Fu (1981) and Zhang et al. (2004) suggested that for a given potential evaporation, the rate of  
change in evapotranspiration as a function of the rate of change in precipitation ( $\partial E/\partial P$ ) increases  
75 with residual potential evaporation ( $E_p - E$ ) and decreases with precipitation. Similar assumptions  
were made regarding the rate of change in evapotranspiration as a function of the rate of change in  
potential evaporation ( $\partial E/\partial E_p$ ) by considering residual precipitation ( $P - E$ ). Hence, both ratios  
can be written as

$$\frac{\partial E}{\partial P} = f(x) \tag{3a}$$

$$80 \quad \frac{\partial E}{\partial E_p} = g(y) \tag{3b}$$

with

$$x = \frac{E_p - E}{P} \tag{4a}$$

$$y = \frac{P - E}{E_p} \quad (4b)$$

Considering  $E_p$  being a natural constraint of  $E$ , it follows that

$$85 \quad \left. \frac{\partial E}{\partial P} \right|_{x=0} = 0. \quad (5)$$

The original approach of Fu (1981) further assumes that  $P$  is a natural constraint of  $E$ , constituting the following boundary condition

$$\left. \frac{\partial E}{\partial E_p} \right|_{y=0} = 0. \quad (6)$$

The coupled boundary conditions 5 and 6 mathematically represent the supply and demand limit  
 90 of the Budyko framework (see Fig. 1). Considering the definitions of  $x$  and  $y$  given by equation 4,  $x = 0$  yields that  $E = E_p$  and  $y = 0$  yields  $E = P$ . Equation 5 thus states that conditional on  $x = 0$ , i.e  $E = E_p$ , no further change in  $E$  occurs no matter how  $P$  changes, since  $E$  is already limited by  $E_p$  (constituting the demand limit). Equation 6 states that conditional on  $y = 0$ , i.e  $E = P$ , no further change in  $E$  occurs no matter how  $E_p$  changes, since  $E$  is already limited by  $P$  (constituting  
 95 the supply limit). In case  $x \neq 0$  or  $y \neq 0$ , the gradients  $\partial E/\partial P$  or  $\partial E/\partial E_p$  are not (necessarily) zero.

The boundary condition 6 further requires steady-state conditions and is consequently considered to be valid at mean annual catchment scales (such that  $P - E \geq 0$ ) only. However, as mentioned in the introduction, a wealth of possible mechanisms and processes can induce conditions in which  $E$   
 100 exceeds  $P$ . In such cases,  $E_p$  remains the only constraint of  $E$ . Consequently, since we explicitly aim to account for conditions of  $E \geq P$ , the value  $y = (P - E)/E_p$  (see equation 4) is not necessarily positive, but larger than -1 since we assume that  $E \leq E_p$ . The minimum value of  $y$ , denoted as  $y_{min}$ , thus lies within the interval between -1 and 0 and depends on the additional amount of water being available for  $E$  besides water supplied by  $P$ . For convenience we define  $y_0 = -y_{min}$  (and thus  
 105  $y_0 \in [0, 1]$ ). As a consequence the boundary condition 6 is then redefined as

$$\left. \frac{\partial E}{\partial E_p} \right|_{-y_0} = 0. \quad (7)$$

## 2.2 Solution

Solving the system of the differential equations 3a,b using boundary condition 5 and the new condition 7 yields the following solution (details are provided in Appendix A):

$$110 \quad E = E_p + P - ((1 - y_0)^{\kappa-1} E_p^\kappa + P^\kappa)^{\frac{1}{\kappa}} \quad (8)$$

with  $\kappa$  being a free model parameter. It follows

$$\frac{E}{P} = F(\Phi, \kappa, y_0) = 1 + \Phi - \left(1 + (1 - y_0)^{\kappa-1} (\Phi)^\kappa\right)^{\frac{1}{\kappa}}. \quad (9)$$

Similar to the traditional Budyko approach a free model parameter (named  $\kappa$  to avoid confusion with the traditional  $\omega$ ) is obtained. The second parameter  $y_0$ , as introduced in the previous section, is directly related to the new boundary condition. Hence, in contrast to  $\kappa$ , which is a mathematical constant,  $y_0$  has a physical interpretation as it accounts for additional water (i.e. storage water). However, similar to the  $\omega$ -parameter in Fu's equation,  $\kappa$  can be interpreted as an integrator of the variety of factors other than the aridity index that influence the partitioning of  $P$  into  $Q$  and  $E$ .

### 3 Characteristics of the modified framework

The newly derived formulation given (equation 9) is similar to the classical solution (equation 1), but includes  $y_0$  as a new parameter. For different values of  $y_0$  and  $\kappa = 2.6$  (corresponding to the best fit to the original Budyko function with  $\omega = 2.6$  in Fu's equation), Fig. 2 shows a set of curves providing insights on the basic characteristics of the modified equation.

In case  $y_0 = 0$  (being the original boundary condition), the obtained curve corresponds to the steady-state framework of Fu (1981) and Zhang et al. (2004). This shows that both model formulations are consistently transferable. If  $y_0 > 0$ , the supply limit is systematically exceeded. The exceedance of the supply limit increases with increasing  $y_0$ . If  $y_0 = 1$ , the curve follows the demand limit. All curves are further continuous and strictly increasing.

Taking a closer look at the underlying boundary conditions and definitions (see section 2.1) reveals that  $y_0$  explicitly accounts for the maximum amount of additional water (besides water supplied through  $P$ ) at a certain location and within a certain time period that is available to  $E$ . Since  $y_{min}$  is defined to be the minimum of  $y = (P - E)/E_p$ , the quantity  $y_0 = -y_{min}$  physically represents the maximum fraction of  $E$  relative to  $E_p$ , which is not originating from  $P$ . A larger fraction consequently results in higher  $y_0$ -values and thus in a stronger exceedance of the original supply limit.

Further details on  $y_0$  are provided in section 4.

The partial derivative  $\partial F(\Phi, \kappa, y_0)/\partial \Phi$  under varying  $\kappa$  and for three preselected values of  $y_0$  is illustrated in Fig. 3. The sensitivity  $\partial F(\Phi, \kappa, y_0)/\partial \Phi$  for different values of  $y_0$  and  $\kappa$  shows the effect of the parameter choice on changes in  $E/P$  relative to changes in  $\Phi$ . In general, the sensitivity is largest for small  $\Phi$  (humid conditions), due to the fact that changes in  $E/P$  basically follow the demand limit (resulting in a sensitivity close to 1) regardless of parameter set  $(\kappa, y_0)$ . For different parameter settings, the sensitivity generally decreases with increasing  $\Phi$ . For small values of  $y_0$  (close to zero), sensitivity becomes smallest with increasing  $\Phi$ , since small values of  $y_0$  indicate conditions similar to the classical solution (equation 1). Further, the smallest sensitivity is reached

for large values of  $\kappa$ . Large values of  $y_0$  (close to 1) indicate conditions mainly constrained by the demand limit, thus implying a sensitivity close to 1.

A similar analysis is performed for varying values of  $\kappa$  under three preselected levels of  $y_0$  (see Fig. 4). For  $y_0 = 0$  (steady-state conditions), the sensitivity  $\partial F/\partial \Phi$  is under humid conditions ( $\Phi < 1$ ) rather large, since changes in  $E/P$  are mainly constrained by demand limit. This especially applies for large values of  $\kappa$ . Under more arid conditions ( $\Phi > 1$ ), the Budyko curve slowly converges towards the (horizontal) supply limit, resulting in a near-zero sensitivity. For  $y_0 = 0.2$ , denoting conditions relatively similar to steady-state conditions, the decrease in sensitivity with increasing  $\Phi$  is weaker, whereas for  $y_0 = 0.8$ , denoting conditions where  $E$  is mainly constraint by the demand limit, sensitivity is large for large  $\kappa$ -values and decreases rather slowly with increasing  $\Phi$ .

#### 4 Interpreting the new parameter $y_0$

The new parameter  $y_0$  is, in contrast to  $\kappa$ , physically well defined. The combination of equation 4b and 7 shows that  $y_0$  is explicitly related to the amount of additional water (besides water supplied through  $P$ ), which is available to  $E$ . If we rewrite equation 4b with respect to  $y_0$

$$y_0 = -y_{min} = -\left(\frac{P-E}{E_p}\right)_{min} \leq -\frac{P_{min} - E_{max}}{E_p}, \quad \text{if } P_{min} - E_{max} < 0, \quad (10)$$

where  $P_{min}$  and  $E_{max}$  are chosen in order to minimize  $y_{min}$  for a given  $E_p$ , we obtain a linear equation in terms of aridity index

$$\left(\frac{E}{P}\right)_{max} = y_0 \left(\frac{E_p}{P_{min}}\right) + 1, \quad (11)$$

which constitutes the mathematical interpretation of  $y_0$  within the modified framework. That is, that  $y_0$  determines the maximum slope of the upper limit, against which the obtained curve from equation 9 asymptotically converges to if  $\kappa \rightarrow \infty$  (see Fig. 5). Physically,  $y_0$  determines the maximum  $E/P$  that is reached in relation to  $\Phi$  within a certain time period and spatial domain. It thus represents an estimate of the maximum amount of additional water that contributes to  $E$  and originates from other sources than  $P$ . Technically speaking,  $y_0$  determines the slope of the upper limit such that all possible pairs  $(\Phi, E/P)$  are just below the line  $y_0\Phi + 1$ . It is further important to note that for mean annual conditions ( $P - E \geq 0$ ),  $y_0 = 0$  is considered, which results in a zero slope and thus determines the original supply limit of 1. Please also note, that this approach is not valid if  $P_{min} = 0$ .

However, the actual slope  $m$  of the upper limit is smaller than  $y_0$ , but directly related to both  $y_0$  and  $\kappa$  as follows (see Appendix B for more information)

$$m = 1 - (1 - y_0)^{1 - \frac{1}{\kappa}}. \quad (12)$$

175 The relative difference between the maximum slope  $y_0$  and the actual slope  $m$  of the upper limit (being the ratio of  $y_0/m$ ) is thus determined following the relationship

$$\frac{y_0}{m} = (1 - y_0)^{1/k}. \quad (13)$$

The ratio  $y_0/m$  as a function of both  $y_0$  and  $\kappa$  is illustrated in Fig. 6. For small  $\kappa$  and large  $y_0$  (close to 1), the difference between the actual slope  $m$  and the maximum slope  $y_0$  is large, whereas for 180 large  $\kappa$  the actual slope  $m$  converges towards  $y_0$ . However, in any case,  $y_0$  determines the maximum overshoot allowed with respect to the original supply limit at  $y_0 = 0$ .

## 5 Example application: Seasonal carryover effects in terrestrial water storage

At monthly time scales, changes in terrestrial water storage (due to changes in water storage components such as soil moisture, snow or groundwater) potentially play an important role in  $E$  and  $Q$  and are by no means negligible. Such changes can provide a significant source of additional water 185 that is (besides  $P$ ) available to  $E$ . Here we analyse the climatological mean seasonal cycle of  $E/P$  by using gridded, monthly data estimates of  $P$ ,  $E$  and  $E_p$ . This allows us to evaluate the capability of the obtained framework (given by equation 9) to represent additional water sources at such time scales.

190 We employ the following, well-established, gridded data products: (i) the Global Precipitation Climatology Project (GPCP)  $P$  dataset (Adler et al., 2003), (ii) an  $E_p$  estimate (Sheffield et al., 2006, 2012) based on the Penman-Monteith  $E_p$  algorithm (Monteith, 1965; Sheffield et al., 2012) with the stomatal conductance set to zero and aerodynamic resistance defined after (Maidment, 1992), and (iii) the LandFlux-Eval  $E$  dataset (Mueller et al., 2013). All data is bilinearly interpolated to a unified 195  $1^\circ$ -grid and the mean seasonal cycle for the 1990-2000 period is calculated at gridpoint-scale. Please note that the combination of datasets used here is arbitrary and only used to illustrate the capability of the newly developed framework to represent the climatological mean annual cycle of  $E/P$ .

We estimate the parameter set  $(\kappa, y_0)$  from equation 9 by minimizing the residual sum of squares (see Fig. 7). This means that at every gridpoint 12 monthly climatologies of  $E/P$  (representing the 200 mean seasonal cycle of  $E/P$ ) are used to determine one specific parameter set (for all months).

To evaluate the modified framework, the derived parameter sets at each gridpoint are used in equation 9 to compute mean seasonal cycles of  $E/P$ . The correlation between the computed and the observed seasonal cycle is shown in Fig. 8a. The correlations are relatively large in most regions. Largest correlations ( $>0.9$ ) are found in most mid to high latitude and tropical areas, clearly showing 205 the capability of the modified formulation to represent the seasonal cycle in  $E/P$ . Correlations are generally somewhat lower in drier regions, especially in parts of Africa and Central Asia, probably occurring due to more complex seasonal patterns in  $E/P$  and phenology, which is not considered

here. Using instead Fu's original equation (or setting  $y_0 = 0$ ) to estimate the mean seasonal cycle of  $E/P$  shows overall lower correlations, especially in semi-arid regions (Fig. 8b).

210 Taking a closer look at the mean seasonal cycle for example gridpoints in (i) Central Europe (humid climate) and (ii) Africa (semi-arid climate) clearly shows the improvement gained through the use of the modified formulation (Fig. 9). In Central Europe, additional water is available in the early summer months due to e.g. depletion of soil moisture or snow melt, resulting in values of  $E/P$  exceeding the original supply limit. The modified formulation has the ability to represent this  
215 exceedance, whereas the original formulation is naturally bounded to 1. This is even more evident for the example grid point in Africa, showing a large overshoot of the original supply limit under dry season conditions.

## 6 Conclusions

In conclusion we present an extension to the Budyko framework that explicitly accounts for conditions under which  $E$  is also driven by other water sources than  $P$  (i.e. changes in water storage).  
220 The original Budyko framework is limited to mean annual catchment scales that constitute  $P$  and  $E_p$  to be natural constraints of  $E$ . Here we assume that the boundary condition constituted by  $E_p$  remains overall valid, whereas the boundary condition constituted by  $P$  is also subject to additional water stemming from other sources. Such additional water could e.g. originate from changes in the  
225 terrestrial water storage, landscape changes and human interventions.

In order to account for such additional water, we modified the set of equations underlying the derivation of Fu's equation (Fu, 1981; Zhang et al., 2004) and obtained a similar formulation including an additional parameter. The additional parameter is physically well defined and technically rotates the original supply limit upwards. Similar to the original Budyko framework, the derived two-  
230 parameter Budyko model represents the influence of first-order controls (namely  $P$  and  $E_p$ ) on water availability. The integrated influence of second-order controls (like e.g. vegetation, topography, etc.) is, comparable to Fu's equation, represented by the first parameter. Analyzing such controls in Fu's formula was subject to numerous studies, but no conclusive assessment was conducted until present. Assessing the combined influence of climatic and catchment controls is hence clearly beyond the  
235 scope of this study. However, the additional second parameter of the modified formulation  $y_0$  does have a clear physical interpretation as it represents a measure of the maximum amount of additional water being (besides  $P$ ) available to  $E$  at a certain location and within a particular time period.

Besides this study, a limited number of previous studies assessed the Budyko hypothesis under conditions of  $E$  exceeding  $P$ , especially at seasonal time scales. In a top-down approach, Zhang  
240 et al. (2008) was showing that the Budyko model has to be extended in order to model the water balance on shorter than mean annual time scales. Their extended Budyko model (which was also based on Fu (1981)) was showing good performance in modeling monthly  $Q$ , but includes four



additional parameters that require extensive calibration. Chen et al. (2013) further introduced an approach (referring to Wang (2012)) that is based on replacing  $P$  by effective precipitation, which is the difference between  $P$  and soil water storage change. This allows to extend the framework to seasonal time scales, but requires explicit knowledge of changes in the soil water storage. In our approach we, however, provide an analytical derivation of an extension to Fu's equation that is able to account for conditions under which  $E$  exceeds  $P$  by including only one additional parameter. However, the framework is also subject to some limitations. The estimation of the parameter  $y_0$  is, similar to the estimation of the  $\omega$  in Fu's equation (Fu, 1981), nontrivial and the parameter apparently varies in space and potentially also in time, therefore questioning steady-state assumptions. The framework is further not capable to directly estimate  $Q$ . Since in contrast to the original Budyko framework changes in terrestrial water storage are not negligible, the runoff ratio  $Q/P$  can not be assessed through  $1 - E/P$ . Hence, explicit knowledge of changes in the terrestrial water storage is required, therefore aggravating assessments of  $Q$ .

The new framework was validated for the special case of average seasonal changes in water storage by using monthly climatologies of global, gridded standard estimates of  $P$ ,  $E$  and  $E_p$ . The computed gridpoint-specific seasonal cycle of  $E/P$  using the modified framework did adequately represent mean seasonal storage changes for many parts of the world. However, the application of the modified framework is by no means limited to this case and could be extended to a variety of climatic conditions under which additional water besides  $P$  is available to  $E$ .

## Appendix A: Complete Solution

Equations 3, 5 and 7 form a system of differential equations. A necessary condition to solve this system is

$$\frac{\partial f(x)}{\partial E_p} + \frac{\partial f(x)}{\partial E} g(y) = \frac{\partial g(y)}{\partial P} + \frac{\partial g(y)}{\partial E} f(x) \quad (\text{A1})$$

Combining equation A1 with equation 4 yields

$$\frac{\partial f(x)}{\partial E_p} = \frac{\partial f(x)}{\partial E_p} \frac{\partial x}{\partial x} = \frac{1}{P} \left( 1 - \frac{\partial E}{\partial E_p} \right) \frac{\partial f(x)}{\partial x} = \frac{1}{P} (1 - g(y)) \frac{\partial f(x)}{\partial x} \quad (\text{A2a})$$

$$\frac{\partial f(x)}{\partial E} = \frac{\partial f(x)}{\partial E} \frac{\partial x}{\partial x} = \frac{1}{P} \left( \frac{\partial E_p}{\partial E} - 1 \right) \frac{\partial f(x)}{\partial x} = \frac{1}{P} \left( \frac{1}{g(y)} - 1 \right) \frac{\partial f(x)}{\partial x} \quad (\text{A2b})$$

$$\frac{\partial g(y)}{\partial P} = \frac{\partial g(y)}{\partial P} \frac{\partial y}{\partial y} = \frac{1}{E_p} \left( 1 - \frac{\partial E}{\partial P} \right) \frac{\partial g(y)}{\partial y} = \frac{1}{E_p} (1 - f(x)) \frac{\partial g(y)}{\partial y} \quad (\text{A2c})$$

$$270 \quad \frac{\partial g(y)}{\partial E} = \frac{\partial g(y)}{\partial E} \frac{\partial y}{\partial y} = \frac{1}{E_p} \left( \frac{\partial P}{\partial E} - 1 \right) \frac{\partial g(y)}{\partial y} = \frac{1}{E_p} \left( \frac{1}{f(x)} - 1 \right) \frac{\partial g(y)}{\partial y} \quad (\text{A2d})$$

Substituting the factors in equation A1 with those given in equations A2 gives:

$$\begin{aligned} \frac{\partial f(x)}{\partial x} \left( (1 - g(y)) + \left( \frac{1}{g(y)} - 1 \right) g(y) \right) &= \frac{P}{E_p} \frac{\partial g(y)}{\partial y} \left( (1 - f(x)) + \left( \frac{1}{f(x)} - 1 \right) f(x) \right) \\ (1 - g(y)) \frac{\partial f(x)}{\partial x} &= \frac{P}{E_p} (1 - f(x)) \frac{\partial g(y)}{\partial y} \end{aligned} \quad (\text{A3})$$

275 Expanding  $P/E_p$  yields under consideration of equations 4

$$\frac{P}{E_p} = \frac{\frac{E_p + P - E}{E_p}}{\frac{E_p + P - E}{P}} = \frac{1 + \frac{P - E}{E_p}}{1 + \frac{E_p - E}{P}} = \frac{1 + y}{1 + x} \quad (\text{A4})$$

From equation A3 and equation A4 follows

$$\begin{aligned} (1 - g(y)) \frac{\partial f(x)}{\partial x} &= \frac{1 + y}{1 + x} (1 - f(x)) \frac{\partial g(y)}{\partial y} \\ \frac{1 + x}{1 - f(x)} \frac{\partial f(x)}{\partial x} &= \frac{1 + y}{1 - g(y)} \frac{\partial g(y)}{\partial y} \end{aligned} \quad (\text{A5})$$

where each side is a function of  $x$  or  $y$  only. Assuming the result of each side is  $\alpha$  it follows

$$\frac{1 + x}{1 - f(x)} \frac{\partial f(x)}{\partial x} = \alpha \quad (\text{A6a})$$

$$\frac{1 + y}{1 - g(y)} \frac{\partial g(y)}{\partial y} = \alpha \quad (\text{A6b})$$

285 Integrating equation A6a under consideration of the boundary condition given by equation 5 leads to the following expression for  $f(x)$

$$\begin{aligned} \int_0^x \frac{1}{1 - f(t)} \frac{\partial f(t)}{\partial t} dt &= \alpha \int_0^x \frac{1}{1 - t} dt \\ [-\ln(1 - f(t))]_0^x &= \alpha [\ln(1 + t)]_0^x \\ \ln(1 - f(x)) &= -\alpha \ln(1 + x) \\ 1 - f(x) &= (1 + x)^{-\alpha} \\ f(x) &= 1 - (1 + x)^{-\alpha} \end{aligned} \quad (\text{A7})$$

Integrating equation A6b is different from the traditional solution given in Zhang et al. (2004), as we are using the new boundary condition given by equation 7

$$\begin{aligned}
& \int_{-y_0}^y \frac{1}{1-g(t)} \frac{\partial g(t)}{\partial t} dt = \alpha \int_{-y_0}^y \frac{1}{1-t} dt \\
295 \quad & [-\ln(1-g(t))]_{-y_0}^y = \alpha [\ln(1+t)]_{-y_0}^y \\
& \ln(1-g(y)) - \ln(1-g(-y_0)) = \alpha (\ln(1-y_0) - \ln(1+y)) \\
& \ln(1-g(y)) = \alpha \ln\left(\frac{1-y_0}{1+y}\right) \\
& 1-g(y) = \left(\frac{1-y_0}{1+y}\right)^\alpha \\
300 \quad & g(y) = 1 - \left(\frac{1-y_0}{1+y}\right)^\alpha \tag{A8}
\end{aligned}$$

Considering the expansion from equation A4 finally gives

$$\partial E / \partial P = 1 - (1+x)^{-\alpha} = 1 - \left(\frac{P}{E_p + P - E}\right)^\alpha \tag{A9}$$

$$\partial E / \partial E_0 = 1 - (1-y_0)^\alpha (1+y)^{-\alpha} = 1 - (1-y_0)^\alpha \left(\frac{E_0}{E_0 + P - E}\right)^\alpha \tag{A10}$$

In the next step, equation A9 is integrated over  $P$ . As equation A9 is identical to those in Zhang et al. (2004), we follow their substitution approach. It follows

$$E = E_0 + P - (k + P^{\alpha+1})^{\frac{1}{\alpha+1}} \tag{A11}$$

where  $k$  is a function of  $E_0$  only. Differentiate equation A11 with respect to  $E_0$  gives an estimate of  $\partial E / \partial E_0$ , which used with equation A10 determines  $k$

$$\frac{\partial E}{\partial E_0} = 1 - \frac{1}{\alpha+1} (k + P^{\alpha+1})^{-\frac{\alpha}{\alpha+1}} \frac{\partial k}{\partial E_0} = 1 - (1-y_0)^\alpha \left(\frac{E_0}{E_0 + P - E}\right)^\alpha \tag{A12}$$

This leads under consideration of equation A11 to the following expression

$$\begin{aligned}
\frac{\partial k}{\partial E_0} &= (\alpha + 1)(1 - y_0)^\alpha \left( \frac{E_0}{E_0 + P - E} \right)^\alpha (k + P^{\alpha+1})^{\frac{\alpha}{\alpha+1}} \\
&= (\alpha + 1)(1 - y_0)^\alpha \left( \frac{E_0}{E_0 + P - (E_0 + P - (k + P^{\alpha+1})^{\frac{1}{\alpha+1}})} \right)^\alpha (k + P^{\alpha+1})^{\frac{\alpha}{\alpha+1}} \\
&= (\alpha + 1)(1 - y_0)^\alpha E_0^\alpha \\
k &= (\alpha + 1)(1 - y_0)^\alpha \int E_0^\alpha dE_0
\end{aligned}$$

$$315 \quad k = (1 - y_0)^\alpha E_0^{\alpha+1} + C \quad (\text{A13})$$

with  $C$  being an integration constant. Substituting equation A13 back into equation A11, one obtains the following expression

$$E = E_0 + P - ((1 - y_0)^\alpha E_0^{\alpha+1} + C + P^{\alpha+1})^{\frac{1}{\alpha+1}} \quad (\text{A14})$$

320 and as  $\lim_{P \rightarrow 0} E = 0$  follows  $C = 0$ . Substituting  $\kappa = \alpha + 1$  finally gives

$$E = E_p + P - ((1 - y_0)^{\kappa-1} E_p^\kappa + P^\kappa)^{\frac{1}{\kappa}} \quad (\text{A15})$$

and further provides by writing  $\Phi = E_p/P$

$$\frac{E}{P} = 1 + \Phi - (1 + (1 - y_0)^{\kappa-1} (\Phi)^\kappa)^{\frac{1}{\kappa}} \quad (\text{A16})$$

$$F\left(\frac{E}{E_p}, \kappa, y_0\right) = \frac{E}{E_p} = 1 + \frac{P}{E_p} - \left( (1 - y_0)^{\kappa-1} + \left(\frac{P}{E_p}\right)^\kappa \right)^{\frac{1}{\kappa}} \quad (\text{A17})$$

## 325 **Appendix B: Solution of the actual slope**

The actual slope  $m$  of the upper limit against which the obtained Budyko curve is converging to is smaller than  $y_0$ . We introduced equation 12 to calculate  $m$  and in the following we provide the complete solution in order to obtain equation 12.

330 The value of  $m$  is the slope of the linear function  $m\Phi + 1$  that forms the asymptote to  $F(\Phi, \kappa, y_0)$  given by equation 9. Hence,

$$\lim_{\Phi \rightarrow \infty} [F(\Phi, \kappa, y_0) - (m\Phi + 1)] = 0. \quad (\text{B1})$$

Using equation 9 and dividing by  $\Phi$  yields

$$\lim_{\Phi \rightarrow \infty} \left[ \frac{(1 + (1 - y_0)^{\kappa-1} (\Phi)^\kappa)^{\frac{1}{\kappa}}}{\Phi} + 1 - m \right] = 0. \quad (\text{B2})$$

By raising the term in brackets to the power of  $\kappa$  one obtains

$$335 \quad \lim_{\Phi \rightarrow \infty} [(1 - m)^\kappa - \Phi^{-\kappa} (1 + \Phi^\kappa (1 - y_0)^{\kappa-1})] = 0, \quad (\text{B3})$$

and it follows

$$\lim_{\Phi \rightarrow \infty} [(1 - m)^\kappa - (1 - y_0)^{\kappa-1} - \Phi^{-\kappa}] = 0. \quad (\text{B4})$$

Since  $\Phi^{-\kappa} \rightarrow 0$  for  $\Phi \rightarrow \infty$  we obtain

$$(1 - m)^\kappa = (1 - y_0)^{\kappa-1}. \quad (\text{B5})$$

340 Solving for  $m$  yields

$$m = (1 - y_0)^{1 - \frac{1}{\kappa}}. \quad (\text{B6})$$

*Acknowledgements.* The Center for Climate Systems Modeling (C2SM) at ETH Zurich is acknowledged for providing technical and scientific support. We acknowledge partial support from the ETH Research Grant CH2-01 11-1, EU-FP7 EMBRACE and the ERC DROUGHT-HEAT Project.


## 345 References

- Adler, R. F., Huffman, G. J., Chang, A., Ferraro, R., Xie, P., Janowiak, J., Rudolf, B., Schneider, U., Curtis, S., Bolvin, D., Gruber, A., Susskind, J., Arkin, P., and Nelkin, E. (2003). The version-2 global precipitation climatology project (GPCP) monthly precipitation analysis (1979-present). *J. Hydrometeor.*, 4:1147–1167.
- Berghuijs, W. R., Woods, R. A., and Hrachowitz, M. (2014). A precipitation shift from snow towards rain leads to a decrease in streamflow. *Nature Climate Change*, 4(7):583–586.
- 350 Budyko, M. (1956). The Heat Balance of the Earth's Surface. (in Russian).
- Budyko, M. (1974). Climate and life. *Academic Press*, (New York, USA).
- Chen, X., Alimohammadi, N., and Wang, D. (2013). Modeling interannual variability of seasonal evaporation and storage change based on the extended Budyko framework. *Water Resources Research*, 49(9):6067–6078.
- 355 Choudhury, B. (1999). Evaluation of an empirical equation for annual evaporation using field observations and results from a biophysical model. *Journal of Hydrology*, 216(1–2):99–110.
- Donohue, R. J., Roderick, M. L., and McVicar, T. R. (2007). On the importance of including vegetation dynamics in Budyko's hydrological model. *Hydrol. Earth Syst. Sci.*, 11(2):983–995.
- Donohue, R. J., Roderick, M. L., and McVicar, T. R. (2012). Roots, storms and soil pores: Incorporating key ecohydrological processes into Budyko's hydrological model. *Journal of Hydrology*, 436–437:35–50.
- 360 Fu, B. (1981). On the calculation of the evaporation from land surface (in Chinese). *Sci. Atmos. Sin.*, 1(5):23–31.
- Gentine, P., D'Odorico, P., Lintner, B. R., Sivandran, G., and Salvucci, G. (2012). Interdependence of climate, soil, and vegetation as constrained by the Budyko curve. *Geophysical Research Letters*, 39(19)
- 365 Greve, P., Gudmundsson, L., Orlowsky, B., and Seneviratne, S. I. (2015). Introducing a probabilistic Budyko framework. *Geophysical Research Letters*, 42(7):2015GL063449.
- Jaramillo, F. and Destouni, G. (2014). Developing water change spectra and distinguishing change drivers worldwide. *Geophysical Research Letters*, page 2014GL061848.
- Li, D., Pan, M., Cong, Z., Zhang, L., and Wood, E. (2013). Vegetation control on water and energy balance within the Budyko framework. *Water Resources Research*, 49(2):969–976.
- 370 Budyko, D.R. (1992). Handbook of Hydrology. (McGraw-Hill Inc., New York)
- Mezentsev, V. (1955). More on the computation of total evaporation (Yechio raz o rastchetie srednevo sumarnovo ispareniiia). *Meteorog. i Gridrolog.*, 5:24–26.
- Milly, P. C. D. (1993). An analytic solution of the stochastic storage problem applicable to soil water. *Water Resources Research*, 29(11):3755–3758.
- 375 Milly, P. C. D. (1994). Climate, soil water storage, and the average annual water balance. *Water Resources Research*, 30(7):2143–2156.
- Milly, P. C. D., Betancourt, J., Falkenmark, M., Hirsch, R. M., Kundzewicz, Z. W., Lettenmaier, D. P., and Stouffer, R. J. (2008). Stationarity Is Dead: Whither Water Management? *Science*, 319(5863):573–574.
- 380 Monteith, J. (1965). Evaporation and environment. In *Symp. Soc. Exp. Biol*, volume 19, page 4.
- Mueller, B., Hirschi, M., Jimenez, C., Ciais, P., Dirmeyer, P. A., Dolman, A. J., Fisher, J. B., Jung, M., Ludwig, F., Maignan, F., Miralles, D. G., McCabe, M. F., Reichstein, M., Sheffield, J., Wang, K., Wood, E. F., Zhang, Y., and Seneviratne, S. I. (2013). Benchmark products for land evapotranspiration: LandFlux-EVAL multi-data set synthesis. *Hydrol. Earth Syst. Sci.*, 17(10):3707–3720.


- 385 Ol'Dekop, E. M. (1911). On Evaporation From the Surface of River Basins. *Univ. of Tartu, Tartu, Estonia*.
- Orlowsky, B. and Seneviratne, S. I. (2013). Elusive drought: uncertainty in observed trends and short- and long-term CMIP5 projections. *Hydrol. Earth Syst. Sci.*, 17(5):1765–1781.
- Pike, J. G. (1964). The estimation of annual run-off from meteorological data in a tropical climate. *Journal of Hydrology*, 2(2):116–123.
- 390 Porporato, A., Daly, E., and Rodriguez-Iturbe, I. (2004). Soil Water Balance and Ecosystem Response to Climate Change. *The American Naturalist*, 164(5):625–632.
- Potter, N. J. and Zhang, L. (2007). Water balance variability at the interstorm timescale. *Water Resources Research*, 43(5):W05405.
- Potter, N. J., Zhang, L., Milly, P. C. D., McMahon, T. A., and Jakeman, A. J. (2005). Effects of rainfall  
395 seasonality and soil moisture capacity on mean annual water balance for Australian catchments. *Water Resources Research*, 41(6):W06007.
- Schreiber, P. (1904). Ueber die Beziehungen zwischen dem Niederschlag und der Wasserfuehrung der Fluesse in Mitteleuropa. *Z. Meteorol.*, 21:441–452.
- Shao, Q., Traylen, A., and Zhang, L. (2012). Nonparametric method for estimating the effects of climatic and  
400 catchment characteristics on mean annual evapotranspiration. *Water Resources Research*, 48(3):W03517.
- Sheffield, J., Goteti, G., and Wood, E. F. (2006). Development of a 50-Year High-Resolution Global Dataset of Meteorological Forcings for Land Surface Modeling. *Journal of Climate*, 19(13):3088–3111.
- Sheffield, J., Wood, E. F., and Roderick, M. L. (2012). Little change in global drought over the past 60 years. *Nature*, 491(7424):435–438.
- 405 Turc, L.-H. (1955). *Le Bilan d'eau des sols: relations entre les précipitations, l'évaporation et l'écoulement...* Institut national de la recherche agronomique, Paris.
- Wang, D. (2012). Evaluating interannual water storage changes at watersheds in Illinois based on long-term soil moisture and groundwater level data. *Water Resources Research*, 48(3)
- Wang, D. and Tang, Y. (2014). A One-Parameter Budyko Model for Water Balance Captures Emergent Behavior  
410 in Darwinian Hydrologic Models. *Geophysical Research Letters*, page 2014GL060509.
- Wang, G. (2005). Agricultural drought in a future climate: results from 15 global climate models participating in the IPCC 4th assessment. *Climate Dynamics*, 25(7-8):739–753.
- Williams, C. A., Reichstein, M., Buchmann, N., Baldocchi, D., Beer, C., Schwalm, C., Wohlfahrt, G., Hasler, N., Bernhofer, C., Foken, T., Papale, D., Schymanski, S., and Schaefer, K. (2012). Climate and vegetation  
415 controls on the surface water balance: Synthesis of evapotranspiration measured across a global network of flux towers. *Water Resources Research*, 48(6)
- Xu, X., Liu, W., Scanlon, B. R., Zhang, L., and Pan, M. (2013). Local and global factors controlling water-energy balances within the Budyko framework. *Geophysical Research Letters*, 40(23):6123–6129.
- Yang, D., Sun, F., Liu, Z., Cong, Z., Ni, G., and Lei, Z. (2007). Analyzing spatial and temporal variability of  
420 annual water-energy balance in nonhumid regions of China using the Budyko hypothesis. *Water Resources Research*, 43(4):W04426.
- Yang, H., Yang, D., Lei, Z., and Sun, F. (2008). New analytical derivation of the mean annual water-energy balance equation. *Water Resources Research*, 44(3)

- Zanardo, s., Harman, C. J., Troch, P. A., Rao, P. S. C., and Sivapalan, M. (2012). Intra-annual rainfall variability control on interannual variability of catchment water balance: A stochastic analysis. *Water Resources Research*, 48(6):W00J16.
- Zhang, L., Dawes, W. R., and Walker, G. R. (2001). Response of mean annual evapotranspiration to vegetation changes at catchment scale. *Water Resources Research*, 37(3):701–708.
- Zhang, L., Hickel, K., Dawes, W. R., Chiew, F. H. S., Western, A. W., and Briggs, P. R. (2004). A rational function approach for estimating mean annual evapotranspiration. *Water Resources Research*, 40(2)
- Zhang, L., Potter, N., Hickel, K., Zhang, Y., and Shao, Q. (2008). Water balance modeling over variable time scales based on the Budyko framework – Model development and testing. *Journal of Hydrology*, 360(1–4):117–131.
- Zhou, G., Wei, X., Chen, X., Zhou, P., Liu, X., Xiao, Y., Sun, G., Scott, D. F., Zhou, S., Han, L., and Su, Y. (2015a). Global pattern for the effect of climate and land cover on water yield. *Nat Commun*, 6.
- Zhou, S., Yu, B., Huang, Y., and Wang, G. (2015b). The complementary relationship and generation of the Budyko functions. *Geophysical Research Letters*, page 2015GL063511.




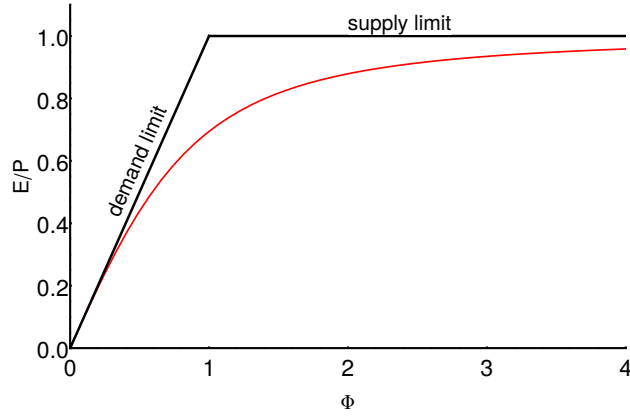


**Figure 1.** The original Budyko (1956) curve (red), limited by both the demand limit ( $E = E_p$ ) and the supply limit ( $E = P$ ).

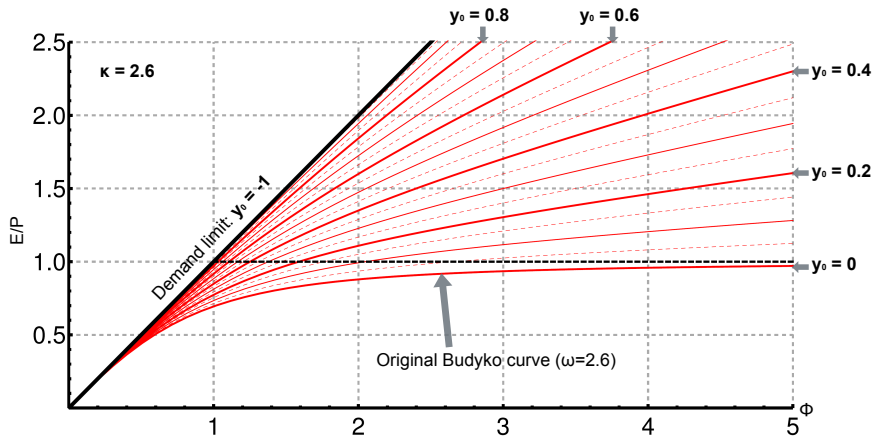


**Figure 2.** Set of curves of the new framework for  $\kappa = 2.6$  and different  $y_0$ . Note that the obtained curve for the parameter set  $(\kappa, y_0) = (2.6, 0)$  corresponds to the original Budyko curve ( $\omega = 2.6$ ). The supply limit (dashed black line) is systematically exceeded if  $y_0 > 0$  and the demand limit (solid black line) is reached if  $y_0 = 1$ .

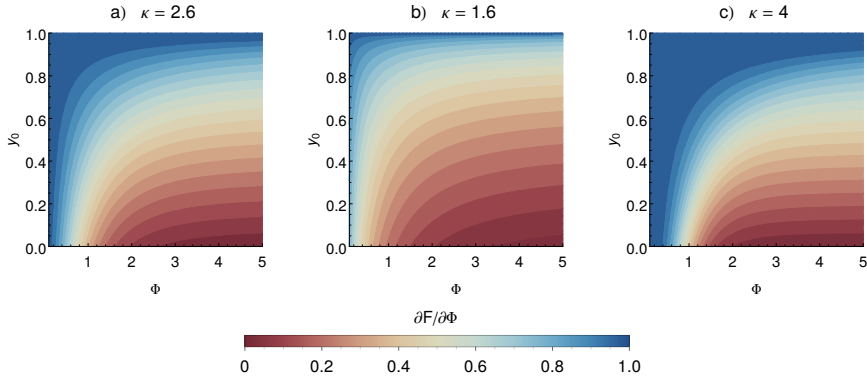


**Figure 3.** The sensitivity  $\partial F/\partial\Phi$  under varying  $y_0$ , for  $\kappa = 2.6$  (left, similar to the original Budyko framework if  $y_0 = 0$ ),  $\kappa = 1.6$  (center) and  $\kappa = 4$  (right). Blueish colors denote high, reddish colors low sensitivity.

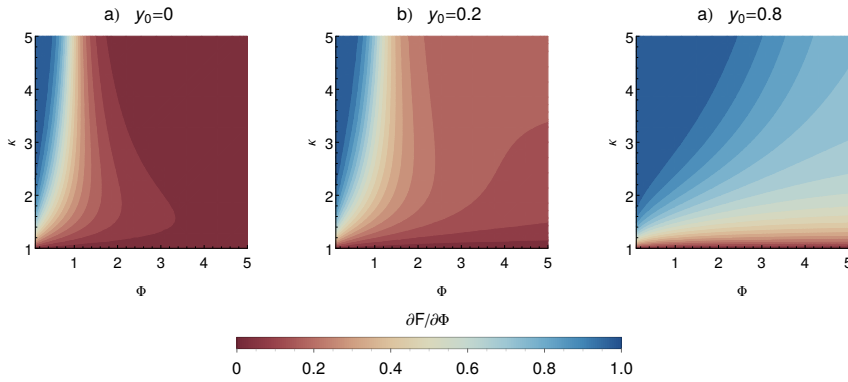


**Figure 4.** The sensitivity  $\partial F/\partial\Phi$  under varying  $\kappa$ , for  $y_0 = 0$  (left),  $y_0 = 0.2$  (center) and  $y_0 = 0.8$  (right). Blueish colors denote high, reddish colors low sensitivity.

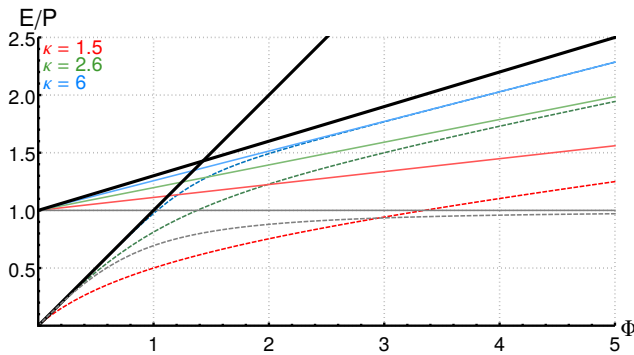

**Figure 5.** Difference between the actual (solid colored lines) and maximum slope (solid black line) of the supply limit for different values of  $\kappa$  (red:  $\kappa = 1.5$ , green:  $\kappa = 2.6$  and blue:  $\kappa = 6$ ) and  $y_0 = 0.3$ . The maximum slope ( $m = y_0 = 0.3$ ) is reached if  $\kappa \rightarrow \infty$ .

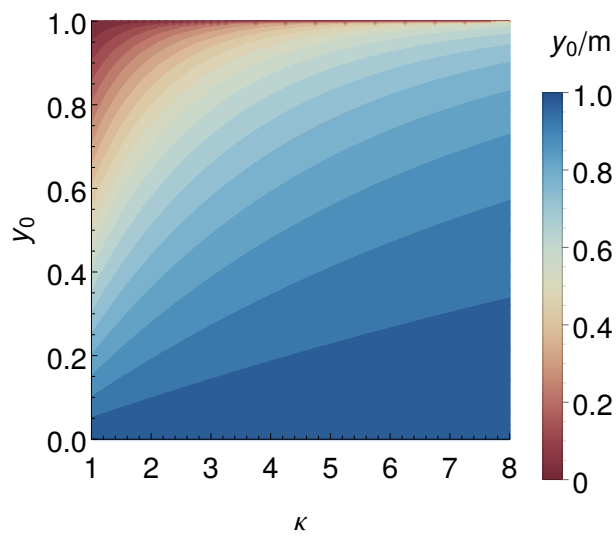


**Figure 6.** The ratio  $y_0/m$  as a function of both  $y_0$  and  $\kappa$  estimated from equation 13.


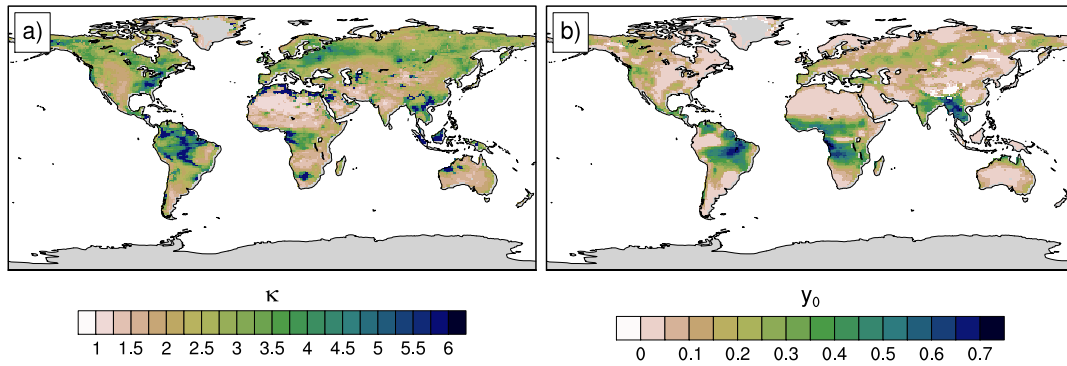


**Figure 7.** Estimated values of  $\kappa$  (subfigure a) and  $y_0$  (subfigure b) estimated in a least squares fitting using standard monthly datasets of  $P$ ,  $E$  and  $E_p$  within the 1990-2000 period.

calibrated  $y_0$

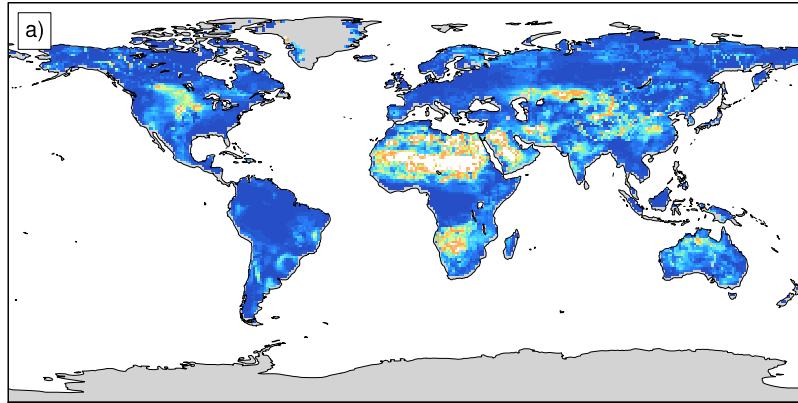


$y_0 = 0$  (Fu, 1981)

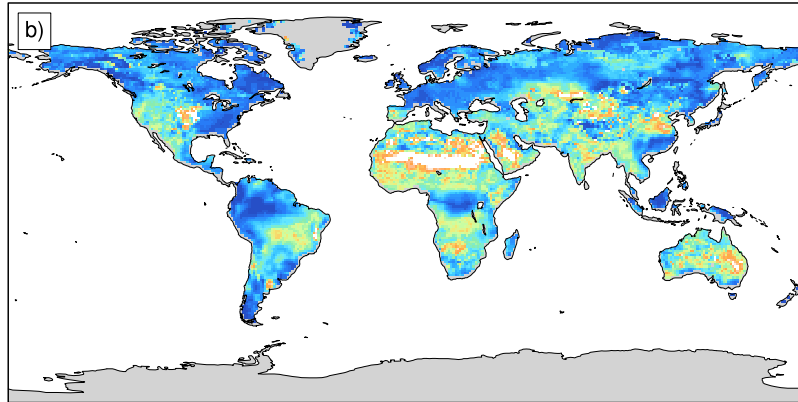

correlation

**Figure 8.** Correlation between the mean seasonal cycle of  $E/P$  computed from equation 9 and observed  $E/P$  for a) a grid-point specific parameter set  $(\kappa, y_0)$  and b)  $(\kappa, 0)$  (Fu's equation).

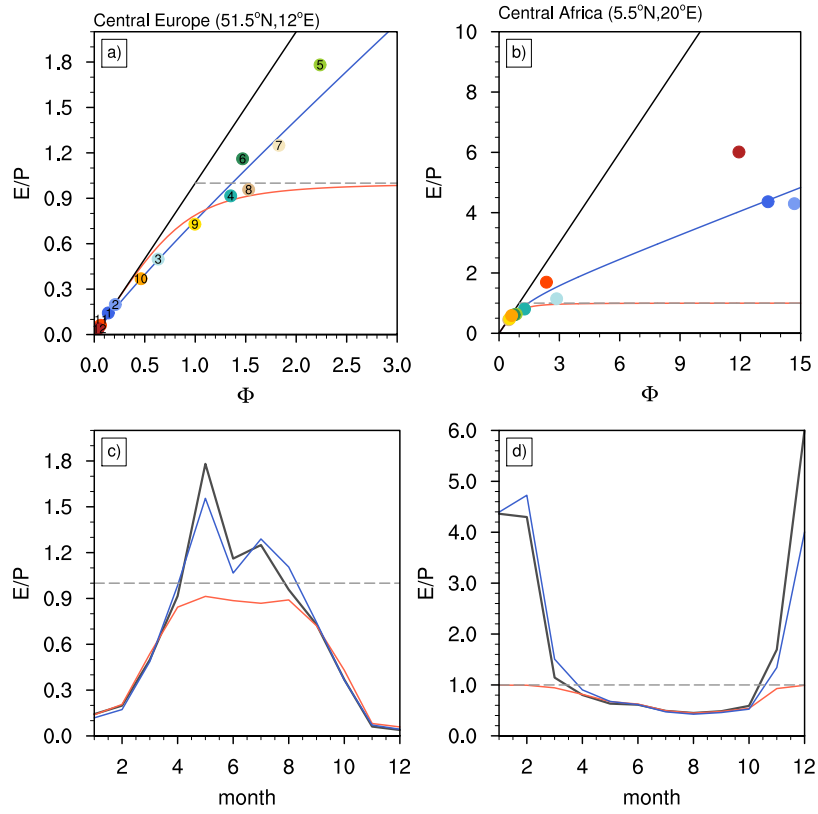

**Figure 9.** Data cloud of monthly climatologies within the Budyko space for a gridpoints in a) central Europe ( $51.5^{\circ}N$ ,  $12^{\circ}E$ ) and b) central Africa ( $5.5^{\circ}N$ ,  $20^{\circ}$ ). The black solid line denotes the demand limit, the dashed line denotes the original supply limit. The blue line depicts the obtained curve using the modified formulation of Fu's equation, whereas the red line shows the original Fu curve. Numbers within the dots denote the particular month of the year. c), d) Observed (grey) and computed mean seasonal cycles at both gridpoints. The blue line depicts the obtained seasonal cycle using the modified formulation of Fu's equation, whereas the red line shows the seasonal cycle obtained using Fu's equation. Please note that axes are different in each plot.