

Supplement of Hydrol. Earth Syst. Sci. Discuss., 12, 6881–6920, 2015
<http://www.hydrol-earth-syst-sci-discuss.net/12/6881/2015/>
doi:10.5194/hessd-12-6881-2015-supplement
© Author(s) 2015. CC Attribution 3.0 License.



Hydrology and
Earth System
Sciences
Discussions



Supplement of

Sensitivity of water stress in a two-layered sandy grassland soil to variations in groundwater depth and soil hydraulic parameters

M. Rezaei et al.

Correspondence to: M. Rezaei (meisam.rezaei@ugent.be; meisam.rezaei@vito.be; meisam.rezaei1@gmail.com)

The copyright of individual parts of the supplement might differ from the CC-BY 3.0 licence.

Supplement of Hydrol. Earth Syst. Sci. Discuss., 12, 6881–6920, 2015
<http://www.hydrol-earth-syst-sci-discuss.net/12/6881/2015/>
doi:10.5194/hessd-12-6881-2015-supplement
© Author(s) 2015. CC Attribution 3.0 License.



Hydrology and
Earth System
Sciences
Discussions



Supplement of

Sensitivity of water stress in a two-layered sandy grassland soil to variations in groundwater depth and soil hydraulic parameters

M. Rezaei et al.

Correspondence to: M. Rezaei (meisam.rezaei@ugent.be; meisam.rezaei@vito.be; meisam.rezaei1@gmail.com)

The copyright of individual parts of the supplement might differ from the CC-BY 3.0 licence.

1 **Supplementary material:**

2

3 **Sensitivity of water stress in a two-layered sandy grassland soil to** 4 **variations in groundwater depth and soil hydraulic parameters**

5

6 **1. Sensitivity analysis**

7 **1.1 Effect of the Groundwater Level (GWL) on Soil Water Content** 8 **and Water Stress**

9

10 A manual sensitivity analysis of the bottom boundary conditions was conducted by applying
11 various conditions. A free drainage and various constant head conditions were imposed by
12 setting a zero pressure head value at the GWL ranging from 120 to 150 cm (5 cm interval)
13 below the soil surface. The effects of these bottom boundary conditions on soil water stress
14 and water content prediction were evaluated for both calibration and validation periods (2012
15 and 2013).


16

17 **1.2 Effect of the GWL on Soil Water Content and Water Stress Predictions**

18 Figure S1 shows the effects of free drainage and different constant head conditions on water
19 content estimations made using the uncalibrated hydrological model. In the free drainage
20 condition, soil-water content was generally underestimated, especially at deeper observation
21 nodes. The results further show that a constant head boundary condition yields a much better
22 agreement between the model and the observations due to wetter conditions in the lower part
23 of the profile. The constant head condition showing the smallest difference between
24 observations and simulations was in agreement with average groundwater depth observations
25 in 2012 and 2013 (-140 and -135 cm respectively) at the location of the sensor (2012:
26 RMSE=0.018, $C_e=0.27$, and $r^2=0.48$; 2013: RMSE=0.024, $C_e=0.26$ and $r^2=0.43$). Decreasing
27 the groundwater depth to -120 cm overestimated the soil-water content, especially at the three
28 deepest observation nodes. On the contrary, soil water stress was overestimated in free
29 drainage condition, which means that the plant is exposed to water stress most of the time of
30 growing season. While there is almost no water stress predicted in constant head condition
31 with GWL below 135 cm (Fig. S2). Obviously, results shows constant head boundary
32 condition leads to higher calculated root water uptake as compare as free drainage condition.
33 The results clearly show the great importance of the bottom boundary condition in estimating
34 soil-water content and soil water stress in the soil profile, even for groundwater depths well

1 below 120 cm depth and sandy soils. The effect of the boundary condition may well exceed
 2 the impact of uncertain hydraulic parameters in a parameter optimization. Despite of Carrera-
 3 Hernández et al. (2012) finding, which stated correctly choosing adequate boundary
 4 conditions is the first step toward accurately estimation water content and flux across the
 5 water table using hydrological model; Result shows, in optimizing the hydraulic model
 6 parameters, the effect of the boundary conditions should therefore be assessed simultaneously
 7 and then the appropriate boundary conditions should be chosen in term of root water uptake
 8 and soil water content.


9

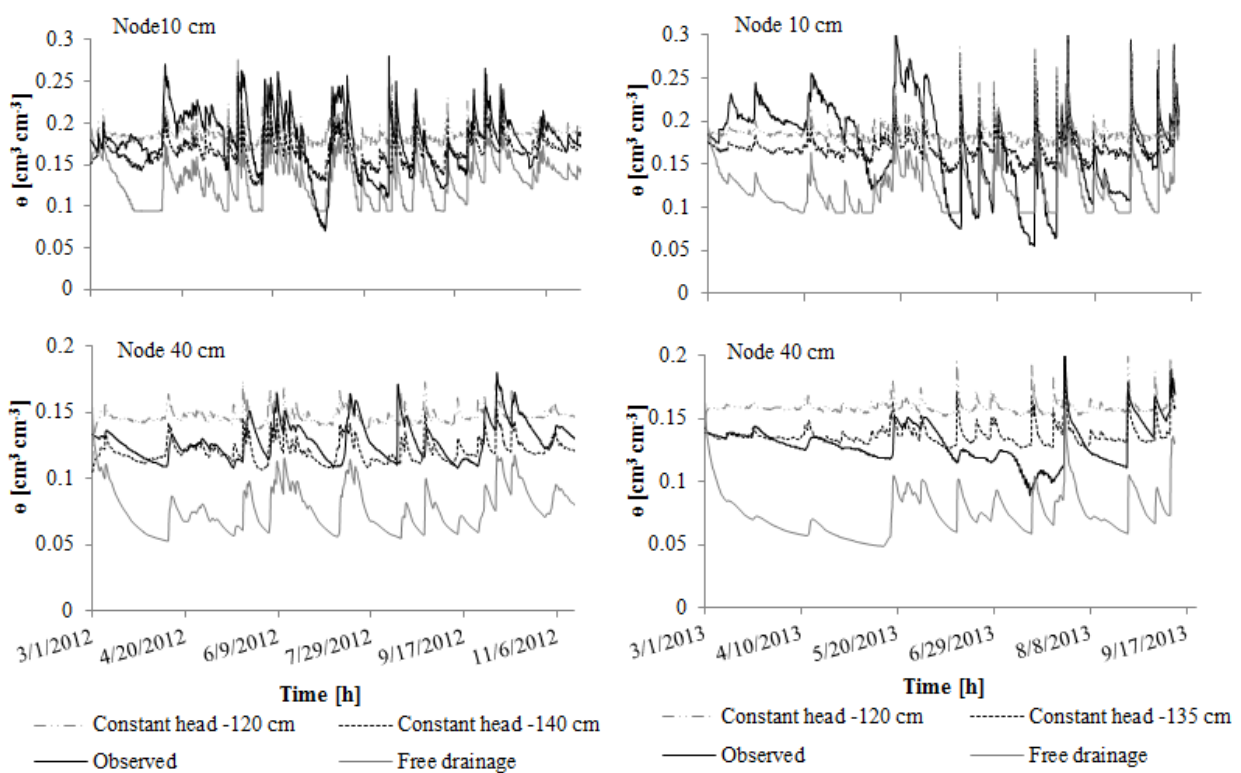

10

11

12 Figure. S1: Water content estimations at 10 and 40 cm depths using the uncalibrated model
 13 for free drainage and different constant head bottom boundary conditions at the soil moisture
 14 sensor location.

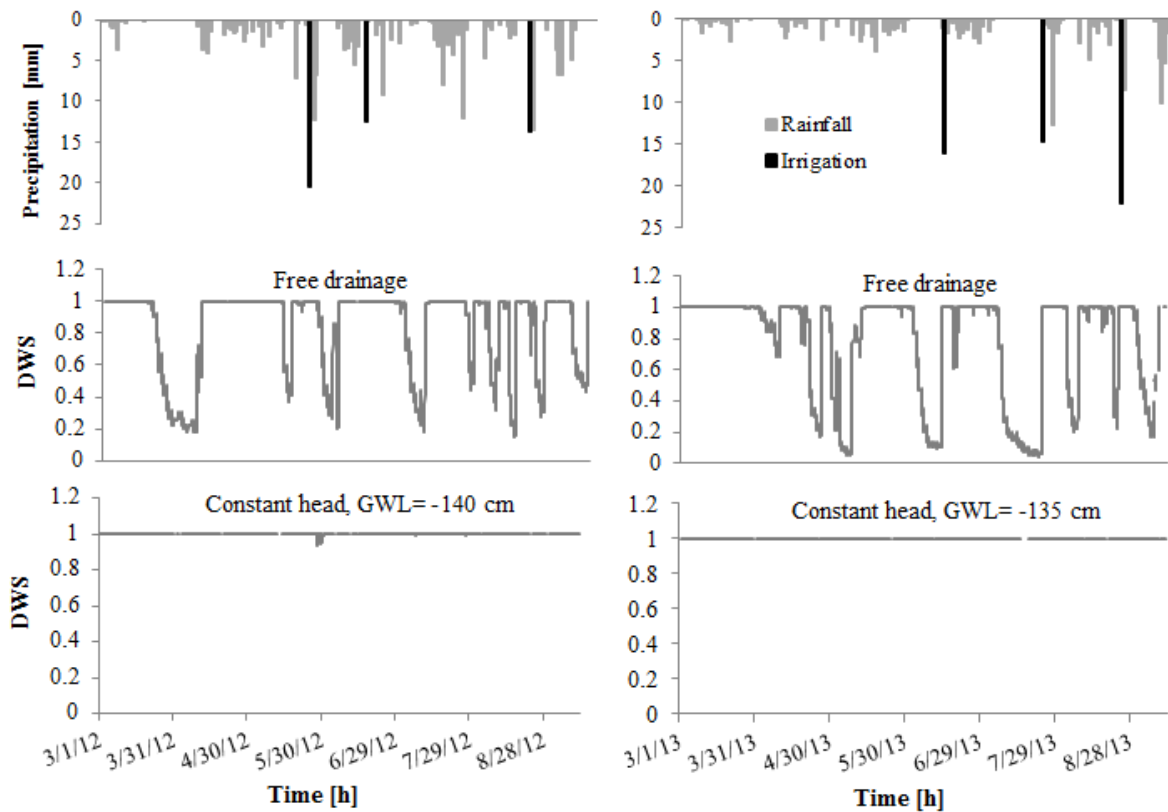

1

2

3 Figure. S2: Soil water stress calculations using the uncalibrated model for free drainage and
 4 constant head bottom boundary condition (GWL= -140 cm) at the soil moisture sensor
 5 location.

6

7 2. Model Calibration

8 The two-parameter scenario requires less parameters (one parameter for each layer) to be
 9 optimized, performs better as compared to the uncalibrated model (Table S1, Fig. S1
 10 and figure 5 main text) and is therefore to be preferred.

11

- 1 Table S1. Calculated performance criteria describing the correspondence between measured
- 2 and simulated soil water content for each scenario for various boundary conditions.

	Boundary condition	Number of optimized parameters	Nodes depth cm	RMSE †	C_e †	r² †
Uncalibrated (2012)	Constant head (-140 cm)	0	10	0.029	0.34	0.58
			20	0.018	0.44	0.53
			30	0.016	0.18	0.38
			40	0.014	-0.03	0.27
	Constant head (-120 cm)	0	10	0.032	0.2	0.37
			20	0.039	-1.66	0.26
			30	0.029	-1.65	0.16
			40	0.023	-1.76	0.08
	Free drainage	0	10	0.054	-1.32	0.51
			20	0.036	-1.24	0.7
			30	0.055	-8.52	0.6
			40	0.052	-13.51	0.62
Calibration period (2012)	Constant head (-140 cm)	6	10	0.023	0.56	0.62
			20	0.016	0.53	0.74
			30	0.010	0.67	0.69
			40	0.008	0.63	0.64
		4	10	0.024	0.52	0.62
			20	0.016	0.54	0.76
			30	0.010	0.65	0.70
			40	0.008	0.64	0.64
		3	10	0.026	0.45	0.62
			20	0.014	0.65	0.75
			30	0.010	0.65	0.70
			40	0.008	0.63	0.64
	2	10	0.026	0.46	0.63	
		20	0.014	0.65	0.75	
		30	0.010	0.66	0.69	
		40	0.010	0.45	0.63	
	Constant head (-120 cm)	2	10	0.022	0.60	0.61
			20	0.031	-0.65	0.72
			30	0.025	-0.97	0.64
			40	0.019	-1.01	0.56
		6	10	0.023	0.57	0.60
			20	0.018	0.46	0.71
			30	0.016	0.19	0.56
			40	0.011	0.34	0.50
4		10	0.022	0.62	0.64	
		20	0.018	0.45	0.71	
		30	0.014	0.13	0.55	
		40	0.016	-0.11	0.42	
Free drainage	3	10	0.032	0.18	0.54	
		20	0.021	0.29	0.62	
		30	0.027	0.12	0.50	
		40	0.019	-0.95	0.43	
	2	10	0.028	0.39	0.51	
		20	0.022	0.31	0.59	
		30	0.015	0.12	0.51	
		40	0.014	-0.98	0.50	
Validation period (2013)	Constant head (-135 cm)	2	10	0.042	0.34	0.37
			20	0.027	0.30	0.40
			30	0.020	0.24	0.33
			40	0.016	0.11	0.29

- 3 †RMSE, C_e and r² are the root-mean-square deviation, the Nash–Sutcliffe coefficient of
- 4 efficiency (cm³cm⁻³) and the coefficient of determination.

3. Effect of Optimization Scenarios on Estimated Water Stress and yield reduction and Irrigation Scheduling

3.1 Scenario analyses on required additional irrigation

Additional irrigation refers to the amount of irrigation that has to be added to the current irrigation to avoid water stress or that has to be subtracted from the current irrigation to avoid water loss. The impact of groundwater depth on the required additional amount was assessed using scenario analysis. The value of soil-water stress, and the number and the duration of stress periods was calculated for two growing seasons (2012 and 2013), as an indicator for the performance of the irrigation scheduling (van Dam et al., 2008). The additional required irrigation was calculated by adding an amount of water input as precipitation variable at the start time of water stress and then the model was run several times in forward mode until the calculated water stress was eliminated (by reducing or increasing amount of water supply). This procedure was repeated for each scenario and boundary condition for both years. In addition, crop yield reduction of each scenario was calculated (using Eq. 16) for both periods to show to what extent different scenarios affect soil water stress and crop yield.

3.2 Irrigation requirement optimization

To optimize the irrigation scheduling (timing of application), the actual water supply (all irrigation events) was deleted from the model input of the hydrological model. Secondly, the LAI simulated with the LINGRA-N for optimal conditions (no water stress) was used as a variable. Then, the hydrological model with constant bottom boundary condition was run with the new input variables to elucidate water stress without actual water supply. Then, the required irrigation was added to the precipitation at the beginning of each water stress to exclude water stress from the simulations. To simulate crop yield at the optimized condition, the new precipitation variables (rainfall and required irrigation) were used in LINGRA-N model. The optimal yield obtained using the optimized irrigation scheduling was compared to the actual (simulated and measured) yield of current irrigation management practices. Table 4. Total duration, number and extent of water stress for different boundary conditions and scenarios (from 1 Mar. to 12 Sep.). Total rainfall and irrigation amount were 398.2 and 64.5 mm in 2012 and 413.2 and 85.4 mm in 2013 respectively. Number between

1 parentheses represents the duration of first water stress event due to light-radiation and
2 temperature limitations.

3 **3.3 Irrigation scheduling scheme**

4 **3.3.1 Scenario analyses**

5 Calculated cumulative actual fluxes across the bottom of the soil profile were -15.4 mm and
6 63.3 mm (outflow and upward-inflow respectively) (Figs. S3, S4, S6). There was a
7 significant effect of the bottom boundary condition on the calculated water stress. A free
8 drainage condition (calibrated and uncalibrated) resulted in a larger number, longer duration
9 of stress conditions (Fig. 6 main text and Table S2) and overestimated water stress due to
10 excessive recharge to the groundwater (more than 148 mm). When the ground water level
11 was -140 cm the outflow of the bottom flux decrease from six-optimized parameters
12 scenario (4.6 mm) to two- parameters scenario (15.4 mm) in calibration period. While
13 upward flow increased with increasing number of optimized parameters in validation period
14 (63.3 to 76.9 mm). But these inflow did not meet the crop water requirement. Overall, to
15 overcome the water stress effects on crop yield, additional required irrigation should be
16 supplied for different optimization scenarios and boundary conditions (Table S2). During
17 water stress, yield reduction would be in range of 0 to 33% for different optimization
18 scenarios (Fig. S5 and Table 4 main text).


19 **3.3.2 Irrigation requirement optimization**

20 Irrigation volume effects on soil water fluxes. In no irrigation scenario of calibrated model
21 (constant head -140 cm) the inflow fluxes were greater than current and guided irrigation
22 scenarios (Fig. S6 and Fig. 8 main text).

23


1 Table S2. Comparison of optimized irrigation schedule with farmer's conventional irrigation schedule.

	Boundary condition	Number of parameters optimized	Number of water stress periods	Total Duration of water stress h	Degree of water stress	Profile bottom flux	Additional required irrigation mm	Yield reduction %
Calibration period	Constant head (-140 cm) uncalibrated	0	0	0	≥ 1	-8.1	0	0
	Free drainage uncalibrated	0	9	1369 (436)	0.20	-310.1	120	28
	Free drainage	2	7	867 (345)	0.37	-167.7	60	18
	Constant head (-120 cm)	2	0	0	≥ 1	71.9	0	0
	Constant head (-140 cm)	2	7	671 (328)	0.65	-15.4	50	16
	Constant head (-140 cm)	4	4	524 (277)	0.65	-1	50	13
	Constant head (-140 cm)	6	5	540 (276)	0.66	-4.6	45	13
Validation period	Constant head (-135 cm) uncalibrated		0	0	≥ 1	105.5	0	0
	Free drainage uncalibrated	0	11	1371	0.05	-222.9	120	33
	Free drainage	2	7	1093	0.10	-148.7	70	23
	Constant head (-120 cm)	2	1	20	0.85	64.4	5	0
	Constant head (-135 cm)	2	5	675	0.65	63.3	30	13
	Constant head (-135 cm)	4	4	598	0.65	76.6	20	11
	Constant head (135 cm)	6	3	579	0.65	76.9	20	11

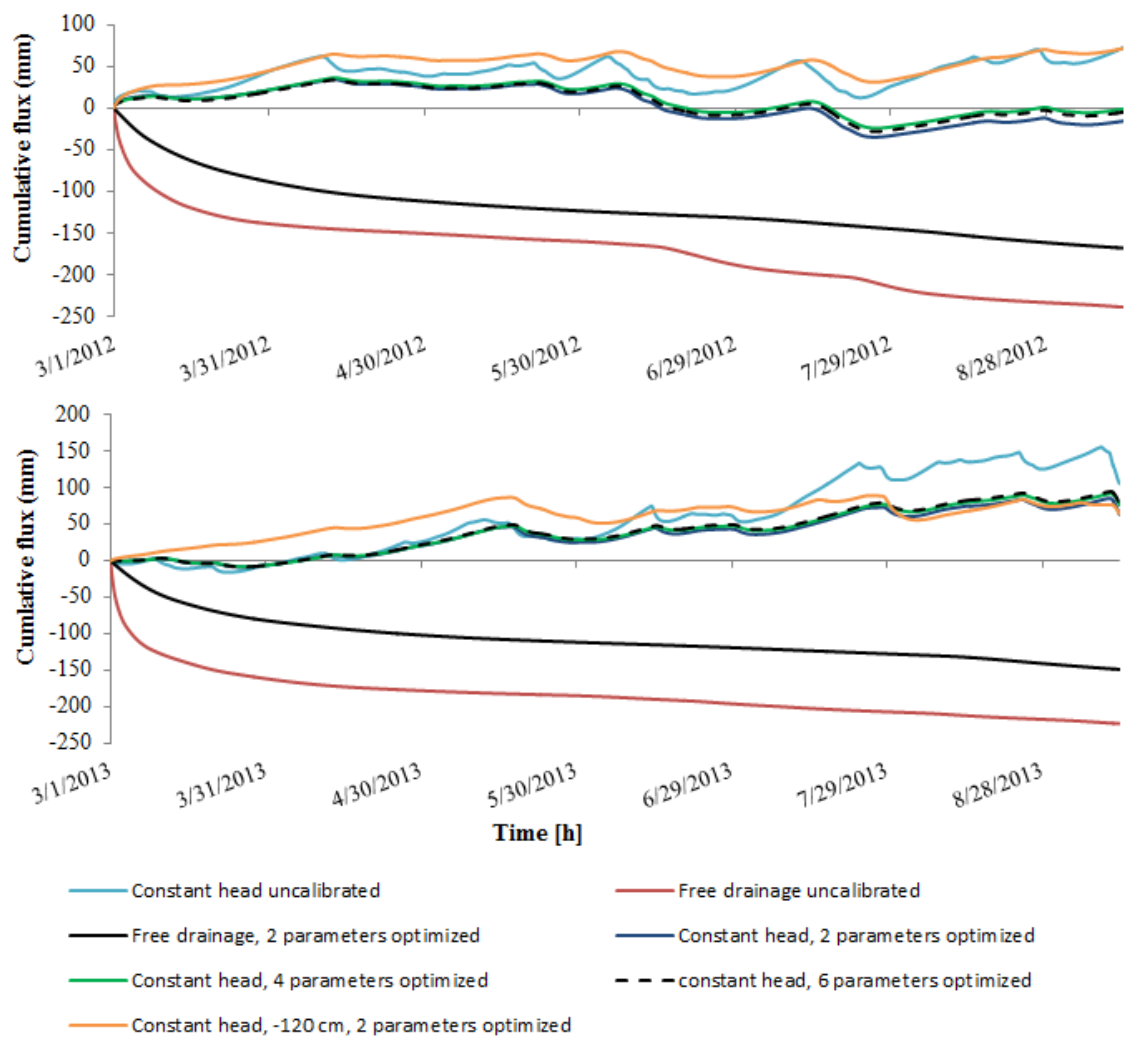


1
2
3
4
5
6

Figure S3. Cumulative fluxes of different boundary condition and parameter scenarios for calibration and validation periods.

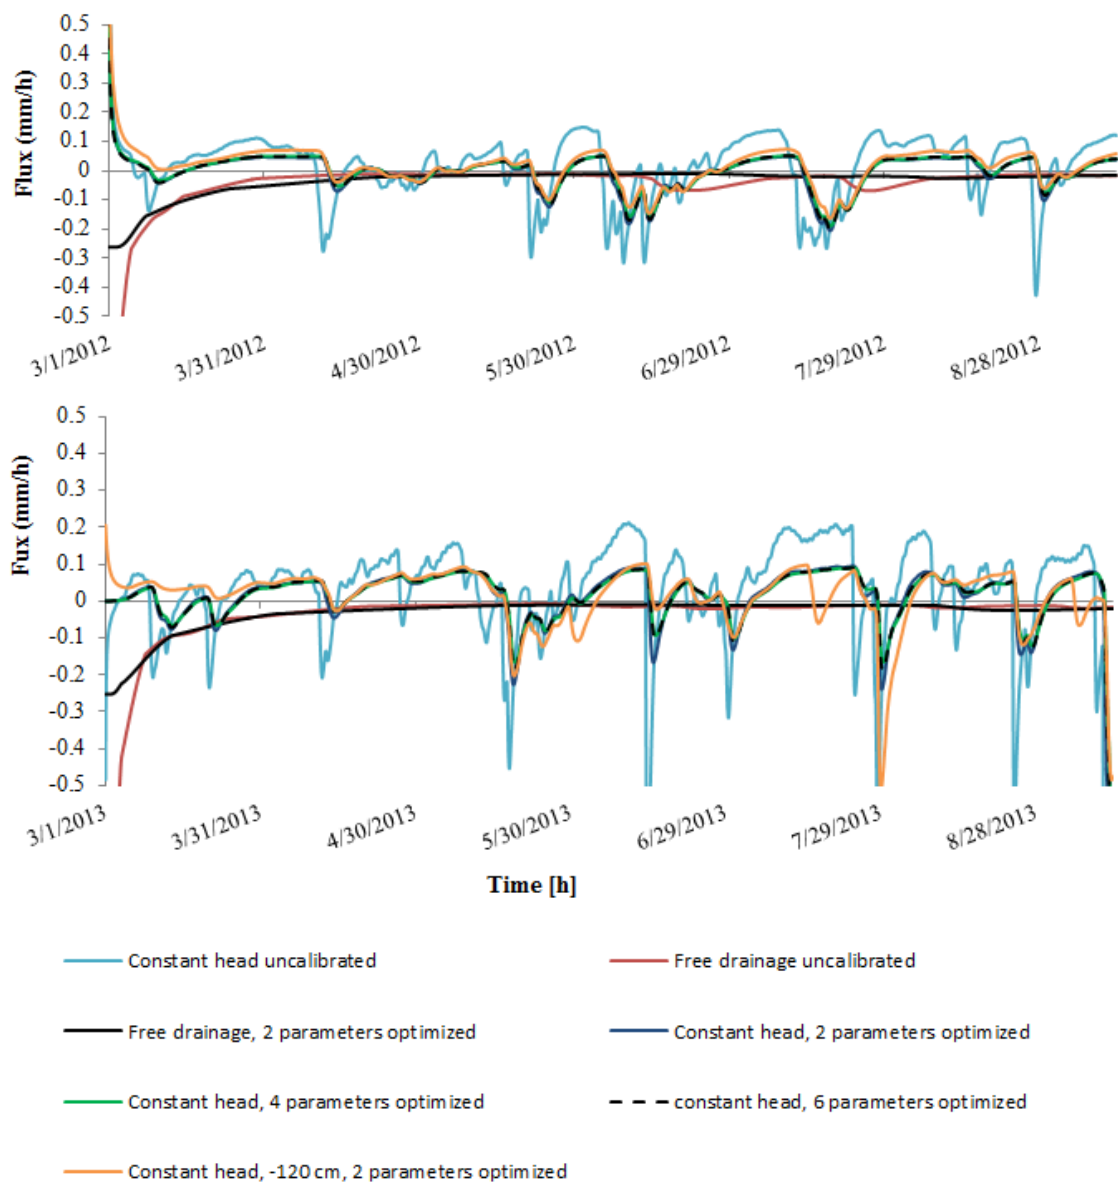


1
2
3

4 Figure S4. Actual fluxes of different boundary condition and parameter scenarios for
5 calibration and validation periods.

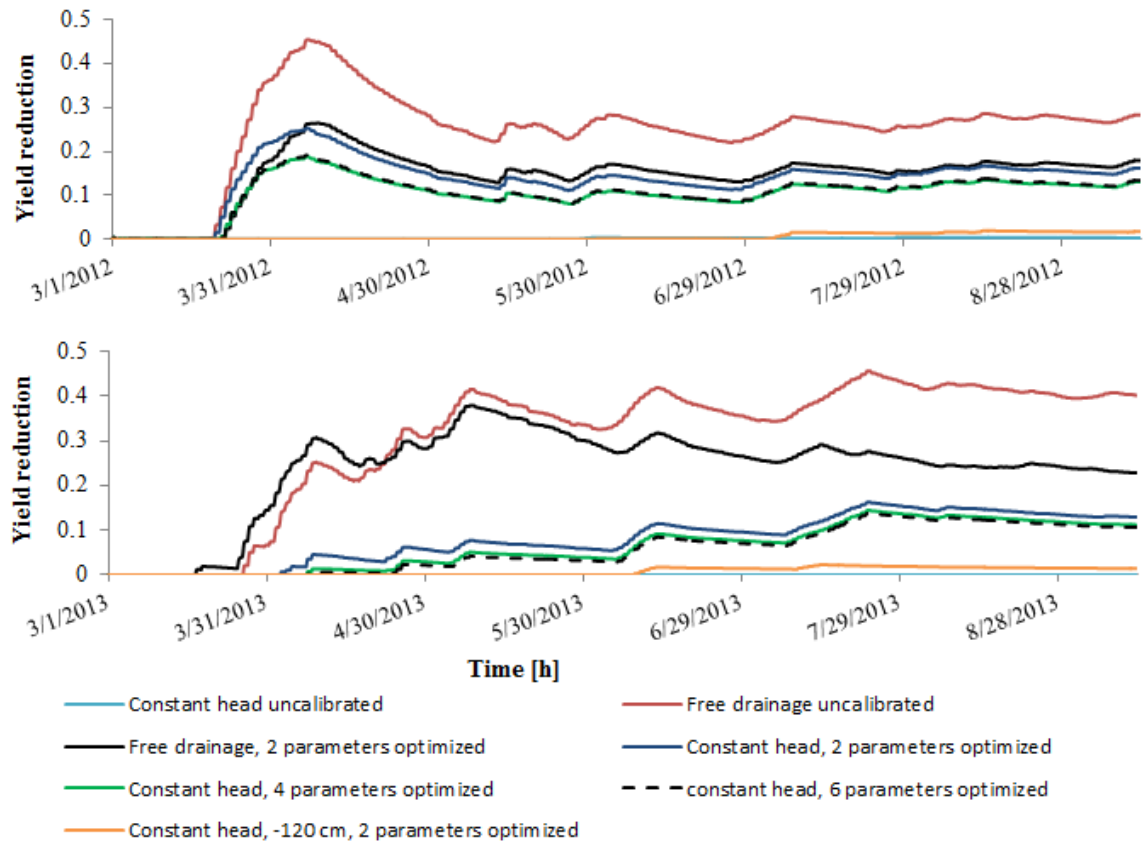


1
2
3
4
5

Figure S5. Yield reduction of various scenarios and bottom boundary conditions in 2012 and 2013 (Eq. 16).

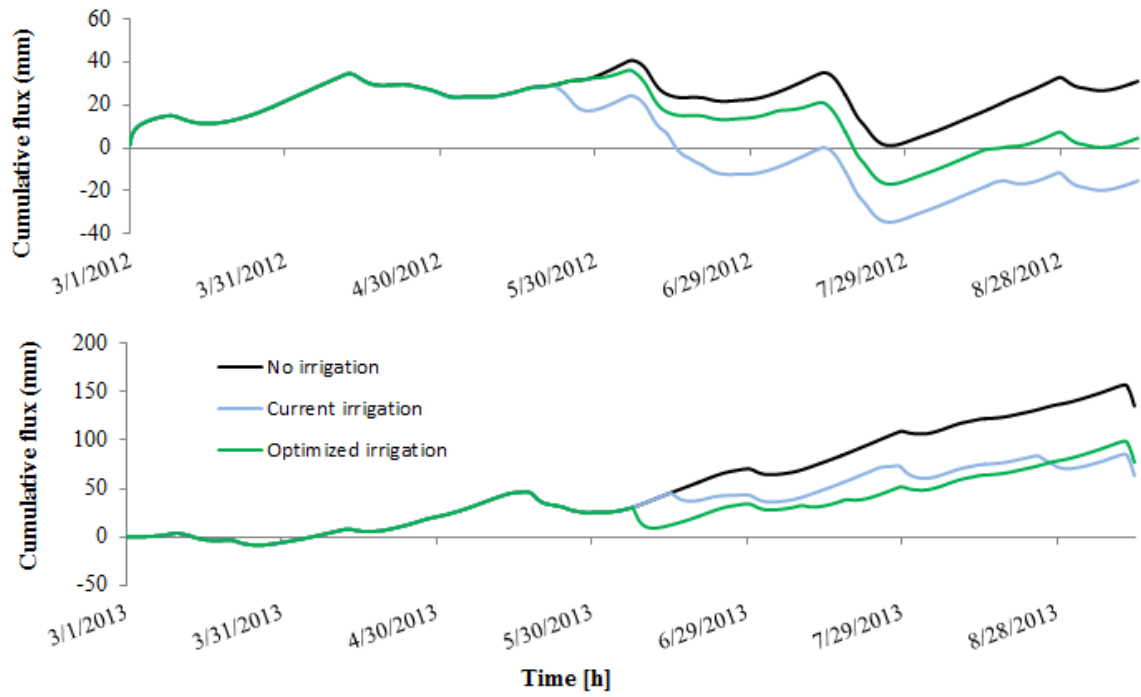

1
2
3
4
5
6

Figure S6. Cumulative flux of farmer's conventional irrigation (current irrigation), without irrigation and optimized irrigation scheme (guided irrigation) for calibration and validation periods.

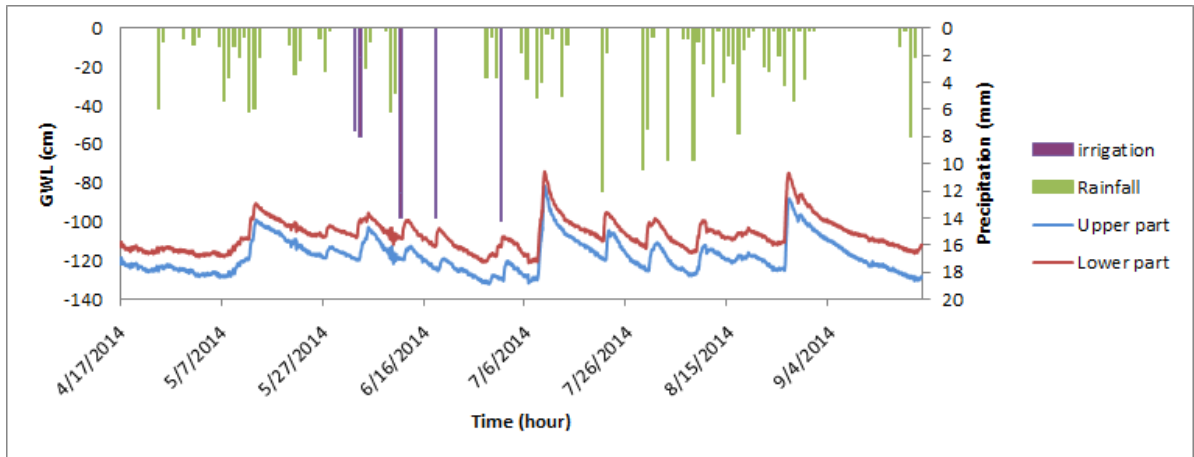

1

2

3 Figure S7. Ground water fluctuation in new field without drainage system in 2014.