

1 **Impacts of beaver dams on hydrologic and temperature regimes in a mountain stream**

2
3 M. Majerova,¹ B. T. Neilson,¹ N. M. Schmadel,¹ J. M. Wheaton,² C. J. Snow¹

4
5
6 ¹ Utah Water Research Laboratory, Department of Civil and Environmental Engineering, Utah
7 State University, 8200 Old Main Hill, Logan, Utah, 84322-8200, United States

8 ² Department of Watershed Sciences, Utah State University, 8200 Old Main Hill, Logan, Utah
9 84322-8200, United States

10
11 *Correspondence to:* M. Majerova (milada.majerova@gmail.com) and B.T. Neilson
12 (bethany.neilson@usu.edu)
13

Abstract

Beaver dams affect hydrologic processes, channel complexity, and stream temperature by inundating riparian areas and influencing groundwater-surface water interactions. We explored the impacts of beaver dams on hydrologic and temperature regimes at different spatial and temporal scales within a mountain stream in northern Utah over a three-year period spanning pre- and post-beaver colonization. Using continuous stream discharge, stream temperature, synoptic tracer experiments, and groundwater elevation measurements we documented pre-beaver conditions in the first year of the study. In the second year, we captured the initial effects of three beaver dams, while the third year included the effects of ten dams. After beaver colonization, reach scale discharge observations showed a shift from slightly losing to gaining. However, at the smaller sub-reach scale, the discharge gains and losses increased in variability due to more complex flow pathways with beaver dams forcing overland flow, increasing surface and subsurface storage, and increasing groundwater elevations. At the reach scale, temperatures were found to increase by 0.38°C (3.8%), which in part is explained by a 230% increase in mean reach residence time. At the smallest, beaver dam scale, there were notable increases in the thermal heterogeneity where warmer and cooler niches were created. Through the quantification of hydrologic and thermal changes at different spatial and temporal scales, we document increased variability during post-beaver colonization and highlight the need to understand the impacts of beaver dams on stream ecosystems and their potential role in stream restoration.

Keywords: beaver dams, *Castor canadensis*, stream discharge, stream temperature, stream restoration

1. Introduction

Beaver dams create ponds that change surface water elevations, alter channel morphology, and decrease flow velocities (Gurnell, 1998; Meentemeyer and Butler, 1999; Pollock et al., 2007; Rosell et al., 2005). These ponds and the overflow side channels are forced by high dam crest elevations and generally increase water storage, water residence time, and depositional areas for sediments. The increased storage attenuates hydrographs (Gurnell, 1998) and can increase base flow (Nyssen et al., 2011). Specifically in the beaver ponds, water infiltration through the bed and adjacent banks influences local groundwater elevations (Hill and Duval, 2009). Within the stream channel, beaver dams break up the average hydraulic gradient into series of disrupted head drops and flat ponded sections. This change in average hydraulic gradient increases the potential for hyporheic exchange (Lautz and Siegel, 2006). Such changes in channel morphology and hydrology alter stream temperature regimes. Warming due to solar radiation can be a key factor due to increased water surface area (Cook, 1940). Further, foraging and extensive inundation can lead to loss of riparian vegetation that decreases riparian canopy and the associated shading influences (Beschta et al., 1987). Changes in groundwater-surface water interactions can also impact the overall temperature regime (e.g., upwelling zones decrease temperatures below beaver dams (Fanelli and Lautz, 2008; White, 1990)). Regardless of this

implied connection between hydrologic and stream temperature changes due to beaver dam construction, most studies have investigated these changes separately. Furthermore, the temporal and spatial scales considered within individual studies vary widely, leading to inconsistent conclusions regarding beaver dam impacts on stream systems (Kemp et al., 2012).

When considering hydrologic influences at the beaver dam scale (which includes the beaver dam structure, the upstream ponded area, and the section below the dam), Briggs et al. (2012) found a connection between streambed morphologies formed upstream of a beaver pond and the hyporheic flow patterns. Similarly, Lautz and Siegel (2006) showed that beaver dams promoted higher infiltration of surface water into the subsurface. Janzen and Westbrook (2011) found enhanced vertical recharge between stream and underlying aquifer upstream of the dams. They also found that the hyporheic flowpaths surrounding beaver dams were longer than expected. Nyssen et al. (2011) studied impacts of beaver dams at a larger reach scale and throughout a series of beaver dams. Similar to other literature (Gurnell, 1998; Burns and McDonnell, 1998), they found that a series of beaver dams retained water during high flows and increased low flows through drier periods. The authors found that the recurrence interval for major floods increased over 20 years and peak flows were decreased and delayed by approximately a day. In contrast, some argue that while beaver dams affect downstream delivery, they provide minimal retention during extreme runoff events (Burns and McDonnell, 1998).

The documented impacts of beaver dams on temperature are more variable. Some studies found that beaver dams and beaver ponds cause overall increases in downstream temperatures (Andersen, 2011; Margolis et al., 2001; Salyer, 1935; McRae and Edwards, 1994; Shetter and Whalls, 1955) with reported values as high as 9°C during summer months (Margolis et al., 2001). Fuller and Peckarsky (2011) also observed increases in temperatures below low-head beaver dams, but a cooling effect below high-head beaver dams. At the longer reach scale (22 km), Talabere (2002) found no significant influence of beaver dams on stream temperature. A recent literature review regarding the impacts of beaver dams on fish further summarizes such inconsistent findings. Kemp et al. (2012) cited 13 articles that argued beaver dams provided thermal refugia and 11 articles that argued negative impacts from altered thermal regime (i.e., detrimental increases in summer temperatures). Interestingly, this review also pointed out that of the 13 articles claiming temperature benefits of beaver dams, only seven were data driven and the remaining six were speculative. By contrast, of the 11 articles showing temperature impairments, only one was data driven while the rest were speculative. Another recent literature review regarding the effects of beaver activity in stream restoration and management further revealed that a majority of studies cover small spatial scale areas (e.g., small reach scales), are mainly qualitative, and many hypotheses are supported only by anecdotal or speculative information (Gibson and Olden, 2014). Particularly in the context of stream management, where beaver have recently been considered as a potential restoration tool (e.g., Utah Beaver Management Plan), a more quantitative understanding based on field observations of the hydrologic and thermal impacts of beaver within stream systems is critical.

Variability in hydrologic and thermal responses in streams with beaver dams and the subsequent inconsistent conclusions found in the literature highlight the need for more data driven studies across multiple spatial and temporal scales. In an effort to link hydrologic and temperature responses due to beaver dam development, we present data from different spatial (reach, sub-reach, and beaver dam) and temporal scales (instantaneous to continuous three-year time series) that span a period prior to and during the establishment of 10 beaver dams. We illustrate how the development of beaver dams shifts instream hydrologic and thermal responses. More specifically, a losing reach (pre-beaver) was transformed to a gaining reach (post-beaver) while simultaneously increasing stream temperatures.

Site Description

Curtis Creek, a tributary of the Blacksmith Fork River of Northern Utah drains a portion of the Bear River Range. Curtis Creek is a first-order perennial mountain stream with intermittent tributaries. The mountainous watershed includes a combination of hard sedimentary rock, Paleozoic and Precambrian limestone bedrock that is strongly indurated. The valley broadens in the lower portion of Curtis Creek and is primarily dominated by remnant low-angle alluvial fans. The valley bottom is comprised of a mix of longitudinally stepped floodplain surfaces and channel that are both partly confined by coarse-grained alluvial fan deposits with gravel, cobble, boulders and some soil development. These stepped floodplains are infrequently inundated by the modest spring-snowmelt flow regime, and reflect surfaces created by relic beaver ponds and beaver dam flooding.

Data were gathered in a 750 m long study site on the lower portion of Curtis Creek that is located about 25 km east of Hyrum, Utah at Hardware Ranch (an elk refuge operated by the Utah Division of Wildlife Resources (UDWR)). In 2001, the UDWR conducted a stream relocation project within the study reach and some segments of the channel were moved and reconstructed, leaving portions of the original channel abandoned. The study reach has a relatively steep streambed slope of 0.035, supporting a bed of coarse gravel to large cobble with some man-made boulder vortex weirs placed within the new channel with a meandering planform. The banks of the realigned channel were stabilized with boulders, root wads, logs, and erosion control blankets.

The riparian area surrounding the channel prior to and following relocation was heavily grazed by elk and did not support woody riparian vegetation. Roughly around 2005, grazing pressure was lessened and the area was fenced (though some grazing was still allowed). This facilitated some modest recovery of the riparian woody vegetation which was enough to attract beaver. In early summer of 2009, beaver colonization began with beaver dam 7 being constructed in the middle of the study reach (Fig. 1). Beaver dams 4 and 5 were also completed during the summer of 2009. New beaver dams (3 and 8) were established early-summer 2010 and by the late summer-early fall, dams 2, 6, 9, and 10 were completed. By the end of fall 2010, beaver dam 1 was built at the upstream end of the study reach resulting in a total of 10 beaver dams with an average height of 1 m (measured at the downstream face of a dam as the difference

between the channel bottom and the top of the dam crest). In addition, two small (less than 0.5 m in height) beaver dams were constructed in the old channel (Fig. 1, dams without numbers). Beaver built seven of their dams using the artificial restoration structures as foundations. By the end of fall 2010, the channel consisted of sections with flowing water (main channel and side channels), ponded water (beaver ponds), and beaver dam structures (Fig. 1). The resulting dam density by 2010 was 13.3 dams/km.

2. Methods

The field site was originally instrumented with pressure transducers, temperature sensors, and groundwater observation wells to investigate groundwater-surface water interactions in the absence of beaver. After one year of data collection, beaver colonization occurred within the study reach, changing the objectives of the study. In short, it produced the perfect accidental experiment and a unique opportunity to quantify fundamental hydrologic and thermal impacts of beaver dam construction on stream systems. In an effort to specifically investigate these impacts, three primary data types were collected over a three-year period spanning pre- and post-beaver colonization (Table 1, Fig. 1). Flow information was collected at the reach and sub-reach scale to compare influences of individual beaver dams and cumulative impacts. In addition, groundwater levels were observed within the floodplain of the study reach. To explore the corresponding impacts of dams on thermal regimes, stream temperature data were collected and analyzed at the reach, sub-reach and beaver dam scales. Both the hydrologic and temperature data collection took place over different temporal scales and the frequency varied from instantaneous measurements to continuous data throughout the three-year period.

2.1 Data Collection

The study reach boundaries were set following a previous study (Schmadel et al., 2010) and locations along the reach were denoted by distance downstream from an arbitrary datum set upstream of the study reach (Fig. 1). Water level and temperature were measured using KWK Technologies® SPXD™ 610 (0-5 psig) (Spokane, Washington) pressure transducers (PT) with vented cables and Campbell Scientific® CR-206 data loggers (Logan, Utah) at the upstream, inflow (PT515, Fig. 1) and downstream, outflow study reach limit (PT1252, Fig. 1). Both pressure transducers were installed in the flowing water close to the bank with an average bed slope of 0.017 and 0.024 for inflow (PT515) and outflow (PT1252), respectively. Water level and temperature were measured at 30-second intervals and five-minute averages were recorded. Discharges were measured at each PT under the full range of flow conditions using the velocity-area method to establish rating curves. The lowest flow measured was 157 L s⁻¹ at PT1252 and the highest flow measured was 1510 L s⁻¹ also at PT1252. The flow velocity was recorded with a Marsh McBirney Inc. ® Flo-Mate™ (Model 2000, Frederick, Maryland). To provide a local comparison of hydrologic responses due to beaver activity, continuous discharge data were

similarly collected at the bounds of a control reach approximately 535 m long without any beaver activity located immediately upstream from our study reach (PT0).

The study reach was further divided into six sub-reaches, ranging from 56 to 168 m and numbered sequentially downstream (Fig. 1). The six sub-reaches spanned individual dams (e.g., sub-reach 4), multiple dams (e.g., sub-reach 2 and 5), and a non-impounded sub-reach that received surface return flows via small side channels or overland flow from an upstream beaver pond (sub-reach 3). The boundaries for the sub-reaches were chosen to ensure completely mixed conditions necessary for dilution gaging (Schmadel et al., 2010). Dilution gaging was conducted at the sub-reach scale on July 16, 2008 (pre-beaver) and July 19, 2010 (post-beaver) to provide a longitudinal understanding of flow variability. As described within Schmadel et al. (2010, 2014), chloride (from NaCl) was used as a conservative tracer (Zellweger, 1994) and rhodamine WT was used as a visual indicator for a qualitative assessment of mixing. Tracer injection masses ranged from 600 to 3300 g as NaCl and were varied to achieve large enough responses in electrical conductivity above background for dilution gauging and mass recovery purposes. Tracer responses were measured following an instantaneous tracer injection starting at the downstream end of the study reach and then moving upstream to individual sub-reach limits. Each response was measured with specific conductance (SC) (electrical conductivity normalized to 25 °C as a surrogate to chloride concentrations) at one-second intervals using YSI® sondes (models 600 LS and 600 XLM, Yellow Springs, Ohio) calibrated in the field. The background SC was corrected to zero (Gooseff and McGlynn, 2005; Payn et al., 2009) and each corrected response was correlated to chloride concentrations with calibration regressions. To estimate tracer mass losses and gross stream losses, mass recoveries were quantified using (Payn et al., 2009):

$$M_R = Q_D \int C_D(t) dt \quad (1)$$

To capture changes in groundwater levels throughout the reach, groundwater observation wells were installed in June 2008 (Fig. 1). These wells were constructed from half inch polyvinyl chloride (PVC), 2 m in length with 40 cm of perforation covered with 2 mm flexible nylon screen to exclude soil. Elevations were established for individual wells using a total station and later using differential rtkGPS (Trimble® R8, Global Navigation Satellite System, Dayton, Ohio). Groundwater levels were determined by measuring the distance from the top of each well to the groundwater surface level in each well using a Solinst® electronic well sounder (Model 101 Mini, Georgetown, Ontario, Canada). The groundwater levels were measured four times in 2008 (June, July (twice), August), five times in 2009 (June, July, August (twice), and November), and four times in 2011 (April, June, July, and November).

At the finer beaver dam scale, temperature measurements were collected upstream of ponded water of beaver dams and downstream of individual beaver dams at 10-minute intervals using Onset® HOBO® Temp Pro V2 (Bourne, Massachusetts) deployed from September 2 to October 15, 2010 (Fig. 1, Table 1, Table 2). The temperature sensors were placed in the thalweg

of the flowing channel entering the pond to ensure well mixed flow. The sensors downstream from the beaver dams were placed downstream of the scour pool, but in the completely mixed portion of the channel. The temperature sensors were attached to metal stakes, placed in the middle of the channel, approximately halfway through the water column. Individual sensors were wrapped in aluminum foil to reduce solar radiation influence in slower moving waters.

Aerial imagery was used to delineate and compare pre- and post-beaver colonization flowing and ponded water area. Pre-beaver colonization conditions (2006) were captured with high resolution aerial imagery available through the Utah Automated Geographic Reference Center (AGRC). Post colonization, NIR (Near Infrared) and RGB (Red-Green-Blue) aerial imagery were collected using Aggie Air UAVs (Unmanned Aerial Vehicle) in 2010. Aggie Air flights that additionally included thermal aerial images were completed in 2011-2013.

2.2 Data Analysis

At the reach scale, the five-minute continuous stage and temperature data recorded at the study reach boundaries were averaged to daily values to illustrate changes over the three-year study period. Data from the winter months were excluded from the analysis because they were influenced by ice buildup around the pressure transducers. Rating curves were developed from the measured discharges and continuous stage from PTs in the form (Cey et al., 1998; Rantz, 1982):

$$Q = aZ^b \quad (2)$$

where Q is the predicted discharge ($L s^{-1}$), a and b are the regression parameters, and Z is the stage measured by the pressure transducer (m). The regression parameters, a and b , were estimated through nonlinear regression and were the minimum sum of squares occurred. Uncertainty in these parameters was assessed from values within the 95% joint confidence region (Schmadel et al., 2010). The continuous discharge estimates provided continuous estimates of net change in stream discharge (ΔQ) at the reach scale (downstream discharge minus upstream discharge). To illustrate percent net change ($\% \Delta Q$), ΔQ was normalized by upstream discharge (Q at the upstream reach boundary). The error for the reach scale discharge was estimated directly from the rating curve where the 95% confidence interval was generated (Schmadel et al., 2010). The net change in stream temperature (ΔT , downstream temperature minus upstream temperature) and $\% \Delta T$ were also calculated at the reach scale. To determine if weather conditions were influencing the water temperature differences between years, we first compared average daily air temperatures for each year through a one-way ANOVA ($p=0.05$). We then compared daily ΔT values normalized by air temperature for the days when both water and air temperature were available within each year ($p=0.01$).

At the finer, sub-reach scale, stream discharge was calculated at each sub-reach limit from dilution gaging using (Kilpatrick and Cobb, 1985):

$$Q = \frac{M}{\int_0^{\tau} (C(t) - C_b(t)) dt} = \frac{M}{\int_0^{\tau} C(t) dt} \quad (3)$$

where Q is the stream discharge ($L s^{-1}$), M is the mass of solute tracer injected (mg), $C(t)$ is the tracer concentration ($mg L^{-1}$), $C_b(t)$ is the background tracer concentration (corrected to zero) ($mg L^{-1}$), t is time (s), and τ is the measurement time period from tracer injection to last detection (s). The net ΔQ was also estimated at the limits of each sub-reach (Fig. 1). The net ΔQ for each sub-reach was again normalized by the discharge at the corresponding upstream sub-reach limit resulting in a net $\% \Delta Q$ to allow for direct comparison between sub-reaches. Uncertainty in the estimates was quantified using the same technique presented in Schmadel et al. (2010) and provided the 95% prediction interval around the discharge estimate. Tracer mass recovery through each sub-reach was calculated to provide information regarding flow diversions within and possible returns to some sub-reaches. In addition, mean residence times (μ_t) for individual sub-reaches were estimated from the first temporal moment or expected value of each recovered tracer response as:

$$\mu_t = \frac{\int_0^{\tau} t C_D(t) dt}{\int_0^{\tau} C_D(t) dt} \quad (4)$$

where $C_D(t)$ is the recovered tracer response at the downstream sub-reach limit ($mg L^{-1}$).

To further understand hydrologic impacts of beaver dam construction and to illustrate the channel and groundwater elevation gradient changes over time, these data were grouped by each sub-reach and were evaluated for 2008, 2009, and 2011. The groundwater elevation data collected in 2010 were limited and thus post-beaver colonization period was represented by the 2011 data. Due to the established groundwater observation wells not being distributed evenly throughout the study reach, changes in groundwater over the study period are only available for sub-reaches 2, 3, and 5.

The temperature impacts at the beaver dam scale were quantified from the data collected upstream of ponded waters and downstream of individual beaver dams (3, 4, 5, 7, and 8) from fall 2010 (Fig. 1 and Table 2). In case of beaver dam 7 and 8, the ponded water from beaver dam 8 extended to beaver dam 7. Therefore, we used data upstream from dam 7 and downstream from dam 8. A 24-hour moving average was calculated from the data to detect temporal trends other than diurnal patterns. The net temperature change, ΔT , for each individual beaver dam was calculated by subtracting the temperature upstream of the beaver dam from the temperature downstream of the beaver dam. A positive change represented net warming, while a negative change represented net cooling downstream from the beaver dams. The area of flowing water (represented by the stream channel) and ponded water from the beaver dams was digitized and

calculated from the 2006 (pre-beaver conditions) and 2010 (post-beaver colonization conditions) imagery (Table 3). The main channel water volume for pre- and post-beaver dams were also estimated based on one-dimensional HEC-RAS hydraulic model built to replicate the two different states (Table 3).

3. Results

3.1 Reach Scale Responses

At the reach scale, the average daily discharge (Fig. 2) illustrates the seasonal variations and changes in flow conditions at the inflow (PT515) and outflow PT1252 for 2008 through 2010. The 2008 and 2009 flows were fairly comparable with peak flows at PT1252 of 1698 L s^{-1} and 1549 L s^{-1} , respectively. The 2010 flows were, however, one third of peak flow in comparison to previous years (592 L s^{-1} at PT1252). This difference is also illustrated with snow water equivalent and precipitation accumulation from nearby a SNOTEL site (SI Fig. 1). The impacts of beaver dam building activities are directly reflected in the reach scale flow conditions and in the year-to-year variability in net ΔQ and $\% \Delta Q$ (Fig. 3). Negative changes indicate a net losing reach while positive values indicate net gains in flow. The daily average value for March-October of 2008 (pre-beaver) was -5.6 L s^{-1} for ΔQ and -4.4% for $\% \Delta Q$. As the beaver dams were built and increased in number, the average values of ΔQ and $\% \Delta Q$ increased to 51.2 L s^{-1} and 13.2% in 2009 and to 81.2 L s^{-1} and 53.1% in 2010, respectively.

Across shorter temporal scales, variability within each season of each year was also apparent. Even though data are only available for short portion of the spring period in 2008, the reach was gaining. In July 2008, the $\% \Delta Q$ became negative suggesting that the reach was losing after the spring flood recession. In early spring of 2009, the reach shifted from losing to gaining. However, the reach did not switch back to losing conditions during lower flows and gains were approximately 10% during the months of June, July, and August. In September 2009, the $\% \Delta Q$ further increased to 30% over one week and was followed by a slow decrease of approximately 20% the following two weeks before increasing again. Similar gaining conditions continued throughout 2009 and into 2010. In 2010, another increase in $\% \Delta Q$ was observed in April at the beginning of snowmelt and reached up to 60%. The greatest $\% \Delta Q$ occurred at the end of June 2010 reaching approximately 80% (Fig. 3). This drastic change may be partially affected by irrigation patterns in nearby fields during the summer months (mid-May through July).

At the reach scale, stream temperatures consistently increased during the summer with peaks occurring at the end of July and beginning of August with some periods of cooling within the reach in the fall and winter for all three years (Fig. 4). Net and percent changes in temperature (ΔT and $\% \Delta T$) show a warming trend from 2008 to 2010 corresponding to the increase in the number of dams (Fig. 5). In 2008, the average daily ΔT was 0.22°C and in 2010 the average ΔT was 0.43°C . The average increase from 2008 to 2010, with differences based on the daily ΔT (not on their yearly averages), was 0.38°C ($\% \Delta T = 3.8\%$). The maximum difference in ΔT between these years was 0.77°C ($\% \Delta T = 8.5\%$) and occurred on August 1st (Fig. 5).

The one-way ANOVA for air temperature comparison showed no statistical difference between individual years ($p > 0.05$). Further comparison of daily ΔT values normalized by air temperature showed a significant difference in the daily average values ($p < 0.01$) between years. This suggests that the between year variability in air temperature is not controlling the observed ΔT patterns.

Reach scale data from a smaller temporal scale (a five-day period in July) illustrates the links between discharge and temperature patterns associated with beaver dam construction (Fig. 6). Comparison of ΔQ and $\% \Delta Q$ show similar trends to those in Fig. 3 (i.e., an increase in the amount of water gained over the reach each year), but with diurnal patterns. The $\% \Delta Q$ for 2010 shows approximate 80% increase in discharge when compared to 2008 (Fig. 6B). The transformation from losing in 2008 to gaining in 2010 is also more pronounced at this shorter five-day scale. Similarly, when comparing ΔT and $\% \Delta T$ values there is an average increase of 0.6°C and 4.6% from 2008 to 2010, respectively. The data also contain a diurnal pattern with a maximum difference of 1.1°C (8%) between 2008 and 2010 (Fig. 6C-D). The ΔT values show that the range of temperature differences during the day doubled in 2010. In 2008, the flowing water surface area was estimated to be 1776 m^2 with no ponded area (Fig. 1, Table 3). In 2010, the flowing water surface area decreased to 1211 m^2 with the ponded area covering about 2830 m^2 . The water surface area in 2010 had more than doubled.

3.2 Sub-reach Scale Responses

With an increase in the number of beaver dams for each consecutive year, the groundwater elevation increased in sub-reaches as shown by the changes in the annual distribution and median values (Fig. 7, Fig. SI2). The response was greatest for sub-reach 2, where median groundwater levels increased approximately 0.03 m during the first year (2008-2009) and by another 0.34 m from 2009 to 2011. For sub-reaches 3 and 5, median groundwater levels increased by 0.02 m and 0.12 m from 2008 to 2009, respectively. From 2009 to 2011, these levels increased further by 0.10 m in sub-reach 3 and by 0.15 m in sub-reach 5. Based on the positive head gradient between groundwater and surface water, sub-reach 2 and sub-reach 3 is primarily gaining. However, sub-reach 5 is generally neutral in 2008 and is more commonly losing in surface water in 2009 and 2010 (Fig. 7, SI Fig. 2). The head gradients from the cross-section of wells in sub-reach 5 show an increase in groundwater elevation over time and generally depict a positive gradient on one side of the channel and negative gradient on the other (SI Fig. 2).

Groundwater-surface water exchanges in the study reach prior to beaver dam influences were documented in Schmadel et al. (2014). Discharge estimated at various locations longitudinally illustrates the variability in flows prior to beaver dam influences (Fig. 8A) and the sub-reach scale $\% \Delta Q$ showed some sub-reaches gaining while others losing (Fig. 8B). The 2010 discharge values showed greater variability after beaver dams were constructed in the reach (Fig. 8A). In contrast with the yearly average head gradient (Fig. 7), the net $\% \Delta Q$ in sub-reach 2 shows a transition from gaining in 2008 to losing in 2010, sub-reach 3 from neutral to gaining,

and sub-reach 5 from neutral to losing in 2010 (Fig. 8B). In 2008, the error in flow estimates for the individual sub-reaches was about 8% for both Q and $\% \Delta Q$. In 2010, the errors ranged from 6% to 28% for Q and 8% to 29% for $\% \Delta Q$. Most of the error was due to incomplete tracer mixing and larger errors in 2010 were attributed to higher variability in flow and flow paths. The mass recoveries showed that the percent of mass loss changed significantly from 2008 to 2010. In 2008, the mean percent mass losses for individual sub-reaches were sequentially -2.8, -12.9, -18.1, -18.8, and -4.7%. In 2010, the mean percent mass losses were -69.0, -0.2, -8.3, -62.0, -7.6% for the same sub-reaches.

Mean residence times estimated from the 2008 and 2010 tracer studies show an increase for all sub-reaches containing beaver dams (Table 4). The biggest change was observed in sub-reach 2 where beaver dam 4, with the largest pond area, was located (Fig. 1). The second greatest increase occurred in sub-reach 5 where a series of dams and ponds covered approximately 50% of the sub-reach length. The increase in sub-reach scale residence times translates into an overall reach scale increase of 62 minutes or 230%. The residence time of unrecovered mass was not included in mean residence time estimates.

3.3 Beaver Dam Scale Responses

The spatial and temporal temperature differences observed between individual beaver dams from a two-day period show that each dam influences the system differently throughout each day (Fig. 9). A comparison of absolute temperatures above and below individual beaver dams, where a positive change represents net warming and negative change represents net cooling below the beaver dam, illustrates a general downstream warming trend which cumulatively propagated downstream below beaver dam 8 (SI Fig. 3). Although, the temperature increase for each dam was generally within the accuracy of the temperature sensor ($\pm 0.2^\circ\text{C}$), the cumulative impact of multiple dams showed more significant downstream warming.

Based on the data shown within Fig. 9, daily ranges (daily maximum minus daily minimum values) of temperature differences below and above each beaver dam (ΔT) provide additional information regarding the spatial variability among individual dams within each day (Fig. 10A). However, when looking at 24-hour moving averages (Fig. 10B), ΔT values fall within the accuracy of the sensors and highlight the importance of the temporal scale (frequency) of measurements when determining the impacts of beaver dams on stream systems.

4. Discussion

While many studies exist regarding the influence of beaver dams on the local hydrologic and temperature regimes, the majority of these studies lack sufficient field measurements across appropriate spatial (beaver dam to reach scale) and temporal scales (instantaneous to continuous over a period of years) to draw meaningful conclusions (Kemp et al., 2012; Gibson and Olden, 2014). Furthermore, the results are often inappropriately generalized beyond the scales of the observations. Our observations provide an opportunity to quantify the influences of beaver dams

on stream flow and temperatures while demonstrating how beaver dams impact stream hydrologic and temperature regimes at different spatial and temporal scales.

The reach scale results of our study suggest an overall increase in ΔQ from 2008 to 2010 based on changes in flow conditions due to beaver dam building activity (Fig. 2). The increases in gains during the spring can be attributed to surface and subsurface lateral inflows. However, the impacts of the beaver dams are more apparent during low flow conditions when the study reach slowly transitions from losing in 2008 to gaining in 2010 (Fig. 3). As the number of beaver dams increases, the impact on reach scale discharge is more evident. In summer and fall of 2008, the reach is in equilibrium or slightly losing water. In contrast, the reach is gaining water during these same summer and fall months of 2009. This trend continues and is more pronounced as beaver dams continue being built and the cumulative impact of multiple beaver dams results in constant gains in 2010 (Fig. 3B). While the discharge in 2010 could have been influenced by irrigation practices in the nearby field, irrigation usually occurs only from mid-May to mid- or late-July and therefore, only had a potential impact during this time. However, due to drier conditions in 2010 and water right requirements, irrigation stopped earlier than usual (likely early July). This suggests that the dominant hydrologic processes influencing the study reach changed over the period of three years as the trend of gaining conditions persisted past the irrigation season (Fig. 3). Groundwater elevations further illustrate the relative changes in relation to channel surface water elevations over time. Although, there is a potential for different flow paths in our study reach and head gradients do not necessarily translate into fluxes, there were notable increases in the groundwater table (Fig. 7). These changes were likely due to increased water surface elevations in the beaver ponds for consecutive years. The localized increases in groundwater elevations are further elevated each spring due to high flows, inundation of the flood plain, and general high surface water elevations throughout the reach. As the flow and surface water elevations drop throughout each summer, there are positive groundwater gradients towards the stream throughout this season and, therefore, the reach gains water. To provide a comparison, we can use baseline ΔQ and $\% \Delta Q$ from the control reach just upstream for the same three-year period (Table 3). These data show that the control reach was losing water for all three years except for summer of 2008. In contrast to the beaver impacted study reach, the losing trend in the control reach is more pronounced with each year and it is at its maximum in 2010.

When considering the smaller spatial scales (sub-reach, beaver dam) there is great variability in terms of losses and gains that are not fully understood from the reach scale observations in the study reach with beaver dams (Fig. 7 and 8, Table 4). This variability is due to many different mechanisms occurring in and around beaver dams, including groundwater-surface water exchanges (Lautz and Siegel, 2006; Janzen and Westbrook, 2011). However, the sub-reach scale variability in this study (Fig. 8) was primarily due to high crest dams forcing year round overbank flow. Much of the overbank flow was either returned to the main channel through side channels or was diverted to the off-channel beaver ponds. These changes in flowpaths influenced the mass recovery in our tracer study in 2010 and the highest mass loss

occurred in sub-reaches with big beaver dams and multiple side channels. The window of detection for the tracer experiment (i.e., the time over which the tracer is measurable) varies as a function of stream characteristics such as transient storage zone dimensions and exchange rates, and stream velocity and discharge (Harvey et al., 2000). In turn, it dictates which subsurface exchange flow paths are captured within tracer break through curves (e.g., Ward et al., 2013). Because the changes to the study reach between years influenced the window of detection and the reported mass recoveries, our conclusions are primarily based on the net changes to flow ($\% \Delta Q$) that are less sensitive to a changing window of detection.

The dynamic activity of beaver, through construction and maintenance of dams, and natural seasonal changes in flow led to a diverse range of hydrologic responses resulting in the spatial and temporal variability of gains and losses through the study reach. The dilution gaging results show that at the two points in time we sampled, sub-reach 2 transitioned from gaining to losing (Fig. 8). However, if groundwater and channel surface water elevation data are aggregated over a year, the same reach was shown to be dominantly gaining over the study period (Fig. 7). These differing results from dilution gaging and groundwater levels highlight the importance of temporal scales and repeated measurements considered in this present work. They also indicate that without this consideration, the differences between measurement techniques can lead to contradicting conclusions as discussed within Schmadel et al. (2014). It is also important to note that the positive head gradients on river left (in a downstream direction) shown in Figure SI 2 illustrate why sub-reach 5 is gaining water as shown in Figure 7. However, it is also likely losing water on river right. Sub-reach 6 is gaining water due to both the main and side channels meeting again (Fig.1, Fig. 8).

Our temperature results demonstrate the considerable spatial and temporal variability in stream temperature caused by beaver dams. We captured the warming effect at the reach scale over a period of three years (Fig. 4 and 5). However, the data at this scale do not portray the thermal heterogeneity illustrated by the beaver dam scale temperatures (Fig. 9 and 10). Similarly, the temporal scale is of importance when determining impacts of beaver dams. For example, the 5-minute temperature data captured temperature fluctuations during the day that may play an important role in fish habitat management and restoration (Fig. 6C-D). This daily variability would not be captured if only daily averages or instantaneous measurements were recorded. The lag times in peak temperatures from 2008 to 2010 (more apparent at shorter temporal scales (e.g., SI Fig. 4) are likely due to different flow conditions, air temperatures, solar radiation, precipitation, and channel morphology.

To understand the significance of simultaneously considering the spatial and temporal scale of measurements, Fig. 9-10 illustrate the temperature variability for five beaver dams while providing a comparison between the dams. Individual beaver dams introduce more variability than that observed at the reach scale with warming and/or cooling effects during different times of the day. These individual responses are likely due to the diverse beaver dam morphology, size of the beaver dam, and size of the beaver pond (Fuller and Peckarsky, 2011; McGraw, 1987).

However, considering a longer temporal scale, the temperature variability associated with a 24-hour moving average falls within a measurement error ($\pm 0.2^{\circ}\text{C}$) (Fig. 10B).

With the transition from a losing to gaining reach, one might expect a decrease in temperature during the summer due to the addition of colder groundwater. However, we observed increased warming over the study reach. Based on this expectation that a gaining reach should be cooling, it is important to discuss the different heat transfer mechanisms influencing instream temperature responses. It is well established that surface heat fluxes (shortwave radiation, incoming and outgoing longwave radiation, conduction/convection, and evaporation/condensation) and bed processes (bed conduction, groundwater/ hyporheic exchanges) are the primary factors dictating stream temperature responses (e.g. (Cardenas et al., 2014; Evans et al., 1998; Moore et al., 2005; Neilson et al., 2010a; Neilson et al., 2010b; Sinokrot and Stefan, 1993; Webb and Zhang, 1997; Westhoff et al., 2007; Younus et al., 2000)). When considering the transition between pre and post-beaver colonization, the doubling of the channel surface area is critical because surface heat fluxes are scaled with the area (Neilson et al., 2010a). The influence of these fluxes on temperature is also dependent on the difference in the volume of water in the channel and the residence time within the study reach. Based on the observed temperature increases, the doubling of the surface area (Fig. 1, Table 3) and the tripling of the residence time (Table 4) negate the buffering effects of an almost quadrupled main channel water volume (Table 3) and the cooling effects associated with groundwater inflows. As found within other prior studies, the general downstream warming is due primarily to influences of solar radiation (Cook, 1940; Evans et al., 1998; Johnson, 2004; Webb and Zhang, 1997).

Regardless of the larger scale downstream trends, it is critical to consider smaller scale thermal heterogeneity. To illustrate the thermal heterogeneity and complexity of flow paths resulting from beaver colonization, a thermal image of surface stream temperature in May 2012 shows that temperatures range from 11°C to 18°C along the study reach (SI Fig. 5C). It is most important to note the difference in the temperature ranges in areas with and without beaver ponds. Such thermal heterogeneity is typically overlooked or averaged out when larger scale (e.g., reach scale) measurements are collected. From a stream restoration point of view, when beavers are used to restore riparian areas (Albert and Trimble, 2000; Barrett, 1999; Shields Jr. et al., 1995) and/or enhance fish habitat (Billman et al., 2013; Pollock et al., 2004), small spatial scales (e.g., sub-reach, beaver dam, and even microhabitat units) are key for understanding the influences on the aquatic ecosystem (e.g., Billman et al., 2013; Westbrook et al., 2011). Spatial heterogeneity (patchiness) and spatial patterns in heterogeneity change with spatial scale (Cooper et al., 1997). Since most of the ecological interactions in heterogeneous streams happen in conditions that are different from mean conditions, they cannot be captured with point measurements, or with models that focus on understanding average conditions (Brentall et al., 2003; Grünbaum, 2012). This highlights the need to concentrate on variables and processes that capture spatial patchiness at different spatial scales in stream ecosystems.

This study emphasizes the need to understand the variability in flow and temperatures at different spatial and temporal scales. Furthermore, these data begin to provide an explanation as to why the current literature provides inconsistent information regarding the influences of beaver colonization. Although it is difficult to make any generalizations about the hydrologic and thermal impacts of beaver dams (e.g., beaver dams increase temperature), we measured an increased variability in flow and temperature that have been qualitatively discussed in previous studies. Our quantification of the variability across different spatial and temporal scales provides a context for better interpreting the inconsistent information found in the literature. In a given locality or under specific circumstances, we contend that the patterns of increasing variability in flows and temperatures should create and maintain more heterogeneous habitat that has a greater probability of providing multiple niches and supporting greater biodiversity. We believe that this observed hydrologic and thermal variability is an important and more generalizable attribute of beaver dams. Variability in temperature, flow properties, and the associated increase in microhabitat complexity are often restoration goals. However, if beaver is being considered as a restoration tool (e.g., Utah Beaver Management Plan), the importance of further understanding and predicting their impacts on stream systems at different spatial and temporal scales is a necessity. Based on these findings, future efforts in understanding the impacts of beaver dams on hydrologic and temperature regimes should begin by identifying the spatial and temporal scales of data required to address specific questions and/or restoration goals. Ultimately, more quantitative field and modeling studies are needed to fully understand impacts of beaver on stream ecosystems for the potential use of beaver as a restoration tool.

5. Conclusion

This study quantifies the impacts of beaver on hydrologic and temperature regimes, and highlights the importance of understanding the spatial and temporal scales of those impacts. Based on the flow and temperature data collected over period of pre- and post-beaver colonization, we found a general increase in stream discharge and stream temperatures at the reach scale. The reach transitioned from slightly losing in 2008 (pre-beaver colonization period) to gaining in 2010 (post-beaver, second year into beaver colonization). Similarly, we observed a downstream warming effect over the 3-year study period. We found that the reach scale hydrologic and temperature changes do not reflect the variability captured at smaller sub-reach and beaver dam scales. For example, temperature measurements at finer temporal scales (5- to 10-minute records throughout each day) revealed significant within-day variability at smaller spatial scales that was not captured at the reach scale. Our most important and likely transferable findings are with regards to the increase in hydrologic and thermal variability that beaver dams produce. We captured natural variability of hydrologic and thermal processes at the sub-reach scale prior to beaver dam influences and show how this variability increased after beaver colonization. While some sub-reaches showed gaining trends from 2008 to 2010, some began losing due to flow being rerouted by dam construction. In addition, daily stream temperature

variability increased from 2008 to 2010. Furthermore, these data illustrate the influence of individual beaver dams that can cumulatively contribute to the downstream warming and/or cooling. Such hydrologic and temperature variability would be lost if only reach scale measurements were collected. In the context of ecosystem impacts and potentially using beaver as a restoration tool, where habitat heterogeneity and increased system resilience is achieved through higher rates of biodiversity, we argue that quantifying the range and increase in variability may be far more important than measuring a minor and often inconsistent change in mean conditions.

Acknowledgments

This research was primarily funded by the Utah Water Research Laboratory and partially supported by National Science Foundation EPSCoR Grant IIA 1208732 awarded to Utah State University as part of the State of Utah EPSCoR Research Infrastructure Improvement Award. Any opinions, findings, and conclusions or recommendations expressed are those of the authors and do not necessarily reflect the views of the National Science Foundation. The authors would additionally like to thank the Utah Division of Wildlife Resources for facilitating this research and the numerous field crew members for their help with data collection. In addition, the authors would like to thank reviewers for comments on an earlier draft of the manuscript.

References

- Albert, S., and Trimble, T.: Beavers are partners in riparian restoration on the Zuni Indian Reservation, *Ecol. Restor.*, 18, 87-92, doi:10.3368/er.18.2.87, 2000.
- Andersen, D. C., Shafroth, P.B., Pritekel, C.M. and O'Neill, M.W.: Managed flood effects on beaver pond habitat in a desert riverine ecosystem, Bill Williams River, Arizona USA, *Wetlands*, 31(2), 195-206, doi:10.1007/s13157-011-0154-y 2011.
- Barrett, K. R.: Ecological Engineering in Water Resources, *Water International*, 24, 182-188, doi:10.1080/02508069908692160, 1999.
- Beschta, L. R., Bilby, E. R., Brown, W. G., Holtby, L. B., and Hofstra, D. T.: Stream temperature and aquatic habitat: fisheries and forestry interactions, E.O. Salo and T.W. Cundy (eds), *Streamside Management: Forestry and Fishery Interactions*. University of Washington, Institute of Forest Resources, Seattle, WA, 191-232, 1987.
- Billman, E., Kreitzer, J., Creighton, J. C., Habit, E., McMillan, B., and Belk, M.: Habitat enhancement and native fish conservation: can enhancement of channel complexity promote the coexistence of native and introduced fishes?, *Environ. Biol. Fishes*, 96, 555-566, doi:10.1007/s10641-012-0041-2, 2013.
- Brentnall, S. J., Richards, K. J., Brindley, J., Murphy, E.: Plankton patchiness and its effect on larger-scale productivity, *Journal of Plankton Research*, 25, 121-140, doi: 10.1093/plankt/25.2.121, 2003.
- Briggs, M. A., Lautz, L. K., and McKenzie, J. M.: A comparison of fibre-optic distributed temperature sensing to traditional methods of evaluating groundwater inflow to streams, *Hydrological Processes*, 26, 1277-1290, doi:10.1002/Hyp.8200, 2012.
- Burns, D. A., and McDonnell, J. J.: Effects of a beaver pond on runoff processes: comparison of two headwater catchments, *Journal of Hydrology*, 205, 248-264, doi:10.1016/S0022-1694(98)00081-X, 1998.

- Cardenas, M. B., Doering, M., Rivas, D. S., Galdeano, C., Neilson, B. T., and Robinson, C. T.: Analysis of the temperature dynamics of a proglacial river using time-lapse thermal imaging and energy balance modeling, *Journal of Hydrology*, 519, Part B, 1963-1973, [doi:10.1016/j.jhydrol.2014.09.079](https://doi.org/10.1016/j.jhydrol.2014.09.079), 2014.
- Cey, E. E., Rudolph, D. L., Parkin, G. W., and Aravena, R.: Quantifying groundwater discharge to a small perennial stream in southern Ontario, Canada, *Journal of Hydrology*, 210, 21-37, [doi:10.1016/S0022-1694\(98\)00172-3](https://doi.org/10.1016/S0022-1694(98)00172-3), 1998.
- Cook, D. B.: Beaver-Trout Relations, *J. Mammal.*, 21, 397-401, [doi:10.2307/1374874](https://doi.org/10.2307/1374874), 1940.
- Cooper, S. D., Barmuta, L., Sarnelle, O., Kratz, K., Diehl, S.: Quantifying spatial heterogeneity in streams, *Journal of the North American Benthological Society*, 16, 174-188, ISSN 0887-3593, 1997.
- Evans, E., McGregor, G. R., and Petts, G. E.: River energy budgets with special reference to river bed processes, *Hydrological processes*, 12, 575-595, 1998.
- Fanelli, R. M., and Lautz, L. K.: Patterns of water, heat, and solute flux through streambeds around small dams, *Ground Water*, 46, 671-687, [doi:10.1111/j.1745-6584.2008.00461.x](https://doi.org/10.1111/j.1745-6584.2008.00461.x), 2008.
- Fuller, M. R., and Peckarsky, B. L.: Ecosystem engineering by beavers affects mayfly life histories, *Freshwat. Biol.*, 56, 969-979, [doi:10.1111/j.1365-2427.2010.02548.x](https://doi.org/10.1111/j.1365-2427.2010.02548.x), 2011.
- Gibson, P. P., and Olden, J. D.: Ecology, management, and conservation implications of North American beaver (*Castor canadensis*) in dryland streams, *Aquat. Conserv.*, 24, 391-409, [doi:10.1002/aqc.2432](https://doi.org/10.1002/aqc.2432), 2014.
- Gooseff, M. N., and McGlynn, B. L.: A stream tracer technique employing ionic tracers and specific conductance data applied to the Maimai catchment, New Zealand, *Hydrological Processes*, 19, 2491-2506, [doi:10.1002/hyp.5685](https://doi.org/10.1002/hyp.5685), 2005.
- Grünbaum, D.: The logic of ecological patchiness, *Interface Focus*, [doi: 10.1098/rsfs.2011.0084](https://doi.org/10.1098/rsfs.2011.0084), 2012.
- Gurnell, A. M.: The hydrogeomorphological effects of beaver dam-building activity, *Prog Phys Geogr*, 22, 167-189, 1998.
- Harvey, J. W., and Wagner, B. J.: Quantifying hydrologic interactions between streams and their subsurface hyporheic zones, In *Streams and Ground Waters*, Edited by Jones, J. B. and Mulholland, P. J., Section One, Academic Press, San Diego, California, 2000.
- Hill, A. R., and Duval, T. P.: Beaver dams along an agricultural stream in southern Ontario, Canada: their impact on riparian zone hydrology and nitrogen chemistry, *Hydrological Processes*, 23, 1324-1336, [doi:10.1002/Hyp.7249](https://doi.org/10.1002/Hyp.7249), 2009.
- Janzen, K., and Westbrook, C. J.: Hyporheic Flows Along a Channelled Peatland: Influence of Beaver Dams, *Canadian Water Resources Journal*, 36, 331-347, [doi:10.4296/cwrj3604846](https://doi.org/10.4296/cwrj3604846), 2011.
- Johnson, S. L.: Factors influencing stream temperatures in small streams: substrate effects and a shading experiment, *Can. J. Fish. Aquat. Sci.*, 61, 913-923, 2004.
- Kemp, P. S., Worthington, T. A., Langford, T. E. L., Tree, A. R. J., and Gaywood, M. J.: Qualitative and quantitative effects of reintroduced beavers on stream fish, *Fish Fish.*, 13, 158-181, [doi:10.1111/j.1467-2979.2011.00421.x](https://doi.org/10.1111/j.1467-2979.2011.00421.x), 2012.
- Kilpatrick, A. F., and Cobb, D. E.: Measurement of Discharge Using Tracers, *Techniques of Water-Resources Investigations*, Book 3, Chapter A16, 52, US Geological Survey, Alexandria, VA, 1985.
- Lautz, L. K., and Siegel, D. I.: Modeling surface and ground water mixing in the hyporheic zone using MODFLOW and MT3D, *Advances in Water Resources*, 29, 1618-1633, [doi:10.1016/j.advwatres.2005.12.003](https://doi.org/10.1016/j.advwatres.2005.12.003), 2006.
- Margolis, B. E., Castro, M. S., and Raesly, R. L.: The impact of beaver impoundments on the water chemistry of two Appalachian streams, *Can. J. Fish. Aquat. Sci.*, 58, 2271-2283, [doi:10.1139/cjfas-58-11-2271](https://doi.org/10.1139/cjfas-58-11-2271), 2001.
- McGraw, M.: Effect of Beaver Dams on Hyporheos Patterns, in: *Ecology of streams and rivers*, edited by: Hendricks, W., University of Michigan, Biological Station, University of Michigan, Ann Harbor, MI, 1987.
- McRae, G., and Edwards, C. J.: Thermal Characteristics of Wisconsin Headwater Streams Occupied by Beaver: Implications for Brook Trout Habitat, *Trans. Am. Fish. Soc.*, 123, 641-656, [doi:10.1577/1548-8659\(1994\)123<0641:TCOWHS>2.3.CO;2](https://doi.org/10.1577/1548-8659(1994)123<0641:TCOWHS>2.3.CO;2), 1994.

- Meentemeyer, R. K., and Butler, D. R.: Hydrogeomorphic effects of beaver dams on Glacier National Park, Montana, *Physical Geography*, 20, 436-446, doi:10.1080/02723646.1999.10642688, 1999.
- Moore, R. D., Sutherland, P., Gomi, T., and Dhakal, A.: Thermal regime of a headwater stream within a clear-cut, coastal British Columbia, Canada, *Hydrological Processes*, 19, 2591-2608, doi:10.1002/hyp.5733, 2005.
- Neilson, B. T., Chapra, S. C., Stevens, D. K., and Bandaragoda, C.: Two-zone transient storage modeling using temperature and solute data with multiobjective calibration: 1. Temperature, *Water Resources Research*, 46, W12520, doi:10.1029/2009WR008756, 2010a.
- Neilson, B. T., Stevens, D. K., Chapra, S. C., and Bandaragoda, C.: Two-zone transient storage modeling using temperature and solute data with multiobjective calibration: 2. Temperature and solute, *Water Resources Research*, 46, W12521, doi:10.1029/2009WR008759, 2010b.
- Nyssen, J., Pontzele, J., and Billi, P.: Effect of beaver dams on the hydrology of small mountain streams: Example from the Cheval in the Ourthe Orientale basin, Ardennes, Belgium, *Journal of Hydrology*, 402, 92-102, doi:10.1016/j.jhydrol.2011.03.008, 2011.
- Payn, R. A., Gooseff, M. N., McGlynn, B. L., Bencala, K. E., and Wondzell, S. M.: Channel water balance and exchange with subsurface flow along a mountain headwater stream in Montana, United States, *Water Resources Research*, 45, W11427, doi:10.1029/2008wr007644, 2009.
- Pollock, M. M., Pess, G. R., Beechie, T. J., and Montgomery, D. R.: The Importance of Beaver Ponds to Coho Salmon Production in the Stillaguamish River Basin, Washington, USA, *N. Am. J. Fish. Manage.*, 24, 749-760, doi:10.1577/M03-156.1, 2004.
- Pollock, M. M., Beechie, T. J., and Jordan, C. E.: Geomorphic changes upstream of beaver dams in Bridge Creek, an incised stream channel in the interior Columbia River basin, eastern Oregon, *Earth Surface Processes and Landforms*, 32, 1174-1185, doi:10.1002/esp.1553, 2007.
- Rantz, S. E.: Measurement and Computation of Streamflow: Computation of Discharge, US. Geological Survey, Water Supply Paper, Report 2175, Denver, 2, 285-631, 1982.
- Rosell, F., Bozsér, O., Collen, P., and Parker, H.: Ecological impact of beavers *Castor fiber* and *Castor canadensis* and their ability to modify ecosystems, *Mamm. Rev.*, 35, 248-276, doi:10.1111/j.1365-2907.2005.00067.x, 2005.
- Salter, J. C.: Preliminary report on the beaver-trout investigation, *American Game*, 24(1), 6-15, 1935.
- Schmadel, N. M., Neilson, B. T., and Stevens, D. K.: Approaches to estimate uncertainty in longitudinal channel water balances, *Journal of Hydrology*, 394, 357-369, doi:10.1016/j.jhydrol.2010.09.011, 2010.
- Schmadel, N. M., Neilson, B. T., and Kasahara, T.: Deducing the spatial variability of exchange within a longitudinal channel water balance, *Hydrological Processes*, 28, 3088-3103, doi:10.1002/hyp.9854, 2014.
- Shetter, D. S., and Whalls, M. J.: Effect of Impoundment on Water Temperatures of Fuller Creek, Montmorency County, Michigan, *The Journal of Wildlife Management*, 19, 47-54, doi:10.2307/3797551, 1955.
- Shields Jr., F., Cooper, C., and Knight, S.: Experiment in Stream Restoration, *Journal of Hydraulic Engineering*, 121, 494-502, doi:10.1061/(ASCE)0733-9429(1995)121:6(494), 1995.
- Sinokrot, B. A., and Stefan, H. G.: Stream temperature dynamics: Measurements and modeling, *Water Resources Research*, 29, 2299-2312, doi:10.1029/93WR00540, 1993.
- Talabere, A. G.: Influence of water temperature and beaver ponds on Lahontan cutthroat trout in a high-desert stream, southeastern Oregon, Oregon State University, Corvallis, OR, 44 leaves, 2002.
- Ward, A. S., Payn, R. A., Gooseff, M. N., McGlynn, B. L., Bencala, K. E., Kelleher, C. A., Wondzell, S. M., and Wagener, T.: Variations in surface water-ground water interactions along a headwater mountain stream: Comparison between transient storage and water balance analyses, *Water Resources Research*, 49, 3359-3374, doi: 10.1002/wrcr.20148, 2013.
- Webb, B., and Zhang, Y.: Spatial and seasonal variability in the components of the river heat budget, *Hydrological Processes*, 11, 79-101, 1997.
- Westbrook, C. J., Cooper, D. J., and Baker, B. W.: Beaver Assisted River Valley Formation, *River Res. Appl.*, 27, 247-256, doi:10.1002/Rra.1359, 2011.

- 703 Westhoff, M., Savenije, H., Luxemburg, W., Stelling, G., Van de Giesen, N., Selker, J., Pfister, L., and
 704 Uhlenbrook, S.: A distributed stream temperature model using high resolution temperature observations,
 705 Hydrol. Earth Syst.Sci., 11, 1469-1480, doi:10.5194/hess-11-1469-2007, 2007.
- 706 White, D. S.: Biological Relationships to Convective Flow Patterns within Stream Beds, Hydrobiologia,
 707 196, 149-158, doi:10.1007/Bf00006106, 1990.
- 708 Younus, M., Hondzo, M., and Engel, B.: Stream temperature dynamics in upland agricultural watersheds, J.
 709 Environ. Eng., 126, 518-526, 2000.
- 710 Zellweger, G. W.: Testing and comparison of four ionic tracers to measure stream flow loss by multiple
 711 tracer injection, Hydrological Processes, 8, 155-165, doi:10.1002/hyp.3360080206, 1994.
- 712 Utah Division of Wildlife Resources: Utah Beaver Management Plan 2010-2020. In DWR Publication 09-
 713 29, Utah Division of Wildlife Resources, Salt Lake City, Utah, 2010.

714

715 Table 1.

	Temporal Scale		Spatial Scale		
	Measurement Type	Measurement Time	Reach	Sub-reach	Beaver Dam
Discharge	Instantaneous	2008*		X	
		2010*		X	
	Continuous	2008-2010	X		
Temperature	Instantaneous	2008		X	
		2010		X	
	Continuous	Sept-Oct 2010			X
Ground Water Levels	Instantaneous	2008-2010	X		
		2008	X	X	
		2009	X	X	
		2011	X	X	

*Based on flows calculated from dilution gaging

718 Table 2.

Beaver Dam	Distance From Beaver Dam (m)		Description (for period September 2 to October 15)
	Temperature Sensor Upstream	Temperature Sensor Downstream	
3	15	9	Upstream sensor was initially in the flowing water near the transition to the ponded area, later in slowly flowing water, downstream sensor is at the boundary of flowing water and ponded water from BD4
4	60	49	Upstream sensor is same as BD3 downstream, downstream sensor is in a flowing well mixed portion of the channel
5	81	21	Upstream sensor is in flowing water near the transition to the ponded area, downstream sensor is same as BD7 above
7	47	9	Upstream sensor is in flowing water near the transition to the ponded area, downstream sensor is same as BD8 above
8	8	6	Upstream sensor is in flowing water near the transition to the ponded area, downstream sensor is in flowing well mixed portion of the channel

720 Table 3.

		2008	2009	2010
Study Reach (with beaver dams)	ΔQ (L s ⁻¹)	-5.60	51.20	81.20
	% ΔQ	-4.40	13.20	53.10
	ΔT (°C)	0.22	0.17	0.43
	% ΔT	2.10	1.10	4.40
	Flowing Water Area (m ²)	1776	-	1211
	Ponded Water Area (m ²)	0	-	2830
Control Reach (no beaver dams)	Water Volume (m ³)	636 *	-	2449 *
	ΔQ (L s ⁻¹)	-24.30	-55.90	-92.50
	% ΔQ	-7.70	-19.80	-42.50

* The water volume is an estimate from a one-dimensional model where pre- and post-beaver dams flow conditions were captured. The 2010 volume includes only main channel water without any side channels or off-channel beaver ponds.

725 *Table 4.*

Sub-reach	Stream distance (m)	Stream length (m)	2008	Beaver Dam	2010
			Mean residence time (min)		Mean residence time (min)
2	692 to 877	185	8	3, 4	36
3	877 to 995	118	4		5
4	995 to 1087	92	4.5	5	15
5	1087 to 1235	148	6.5	7, 8	29
6	1235 to 1291	56	4		4
Total (min)			27		89

726

Figure 1. Aerial image from 2006 (pre-beaver period) and beaver dams constructed between 2009 and 2010. The main beaver dams are numbered from 1 to 10 from upstream to downstream and the time of dam construction is noted in the table. The study reach was further divided into 6 sub-reaches. The spatial scales investigated are illustrated below the map. The most downstream beaver dam and beaver pond are located in the old channel but overlap in the Beaver Dam Scale schematic in this figure. The 2006 channel is outlined in black while flowing and ponded water area from 2010 are represented by different shades of blue.

Figure 2. Daily average discharge estimated from continuous pressure transducer records spanning 2008-2010 (A-C). The black dashed line represents upstream, inflow conditions at PT515 and the red solid line represents downstream, outflow conditions at PT1252. The individual 95% confidence intervals around discharge estimates are represented by grey shading. Note that the inflow bounds are very small and are therefore, not visible in the figure.

Figure 3. A) Change in discharge over the study reach calculated from daily average flows where ΔQ is the discharge at outflow (PT1252) minus the upstream discharge at inflow (PT515). Positive values represent increases in discharge and negative values represent decreases in discharge. B) $\% \Delta Q$ is the percent change relative to the discharge at inflow (PT515). The 95% confidence interval in three different shades of grey correspond with each individual year. Arrows represent time of individual beaver dam construction. Blue and red arrows correspond with year 2009 and 2010, respectively, while the arrow size is proportional to size of the dam.

Figure 4. Average daily temperature (absolute) representing reach scale responses at inflow (PT515, black dashed line) and outflow (PT1252, red solid line) during 2008 (A), 2009 (B), and 2010 (C). Average daily air temperature (D) and average daily solar radiation (E) show similar weather patterns for all three years.

Figure 5. A) Reach scale change in temperature (ΔT) calculated from temperatures at the reach outflow (PT1252) minus the temperature at the reach inflow (PT515). B) $\% \Delta T$ is the percent change relative to the temperature at the inflow location (PT515). Positive values represent warming throughout the reach and negative values represent cooling relative to the upstream inflow temperature at PT515. Arrows represent time of individual beaver dam construction. Blue and red arrows correspond with year 2009 and 2010, respectively, while the arrow size is proportional to size of the dam.

Figure 6. Change in discharge (ΔQ) and temperature (ΔT) over the study reach from 2008 to 2010. This five day period in July illustrates variability over shorter temporal scales. The $\% \Delta Q$ and $\% \Delta T$ are relative to the discharge and temperature at the upstream inflow location (PT515). The $\% \Delta Q$ were averaged over a one hour interval, while the $\% \Delta T$ represents 5-minute temperature values.

Figure 7. Groundwater elevations grouped by individual sub-reaches and shown with channel water surface elevations. The groundwater elevations were measured four times in 2008, five times in 2009, and four times in 2011. The water surface elevation in the channel represents the average yearly value for each sub-reach. There is a gradual increase in groundwater elevation and channel water surface elevation in all sub-reaches over the years.

Figure 8. Sub-reach stream discharge (Q) estimates for 2008 and 2010 representing longitudinal flow variability before and after beaver colonization. $\% \Delta Q$ is calculated from flow at the end of the sub-reach minus the flow at the beginning of the sub-reach relative to the upstream value.

Figure 9. Spatial variability in stream temperature throughout individual beaver dams (BD). Temperature differences (ΔT) were calculated based on 10-minute temperature records from locations downstream and upstream of the beaver dam and pond. These data illustrate that there is a time lag between air temperature and stream temperature and that there can be measurable differences in temperatures at the beaver dam spatial scale that vary diurnally. It further shows the variability in temperature differences between the dams.


Figure 10. A) Daily range of temperature differences (ΔT) (downstream temperature minus upstream temperature) of each beaver dam (BD) based on 10-minute temperature records. Beaver dam 7 and 8 were considered to be one complex. The air temperature (blue line) and stream temperature at the inflow (PT515, black dashed line) illustrate the diurnal patterns. B) 24-hour moving average of ΔT .

Table 1. Discharge, temperature and ground water level observations made at different spatial and temporal scales throughout the study reach.

Table 2. Distance for temperature sensors located above and below individual beaver dams (BD) during September 2 to October 15, 2010 (Fig. 1).

795 Table 3. Annual change in flow (ΔQ) and annual percent net change ($\% \Delta Q$) for the study reach
796 impacted by beaver dams (shown in Fig. 1) and for an adjacent, upstream control reach with no
797 beaver dams present. Change in stream temperature (ΔT), percent change ($\% \Delta T$), and area of
798 flowing water and ponded water area for the study reach impacted by beaver dams is listed as
799 well. Change in flow and temperature and their percentages (ΔQ , $\% \Delta Q$, ΔT , $\% \Delta T$) were
800 calculated as an average of daily Δ values for each year (Fig. 3 and Fig. 5).

801 Table 4. Sub-reach scale mean residence times for 2008 and 2010.

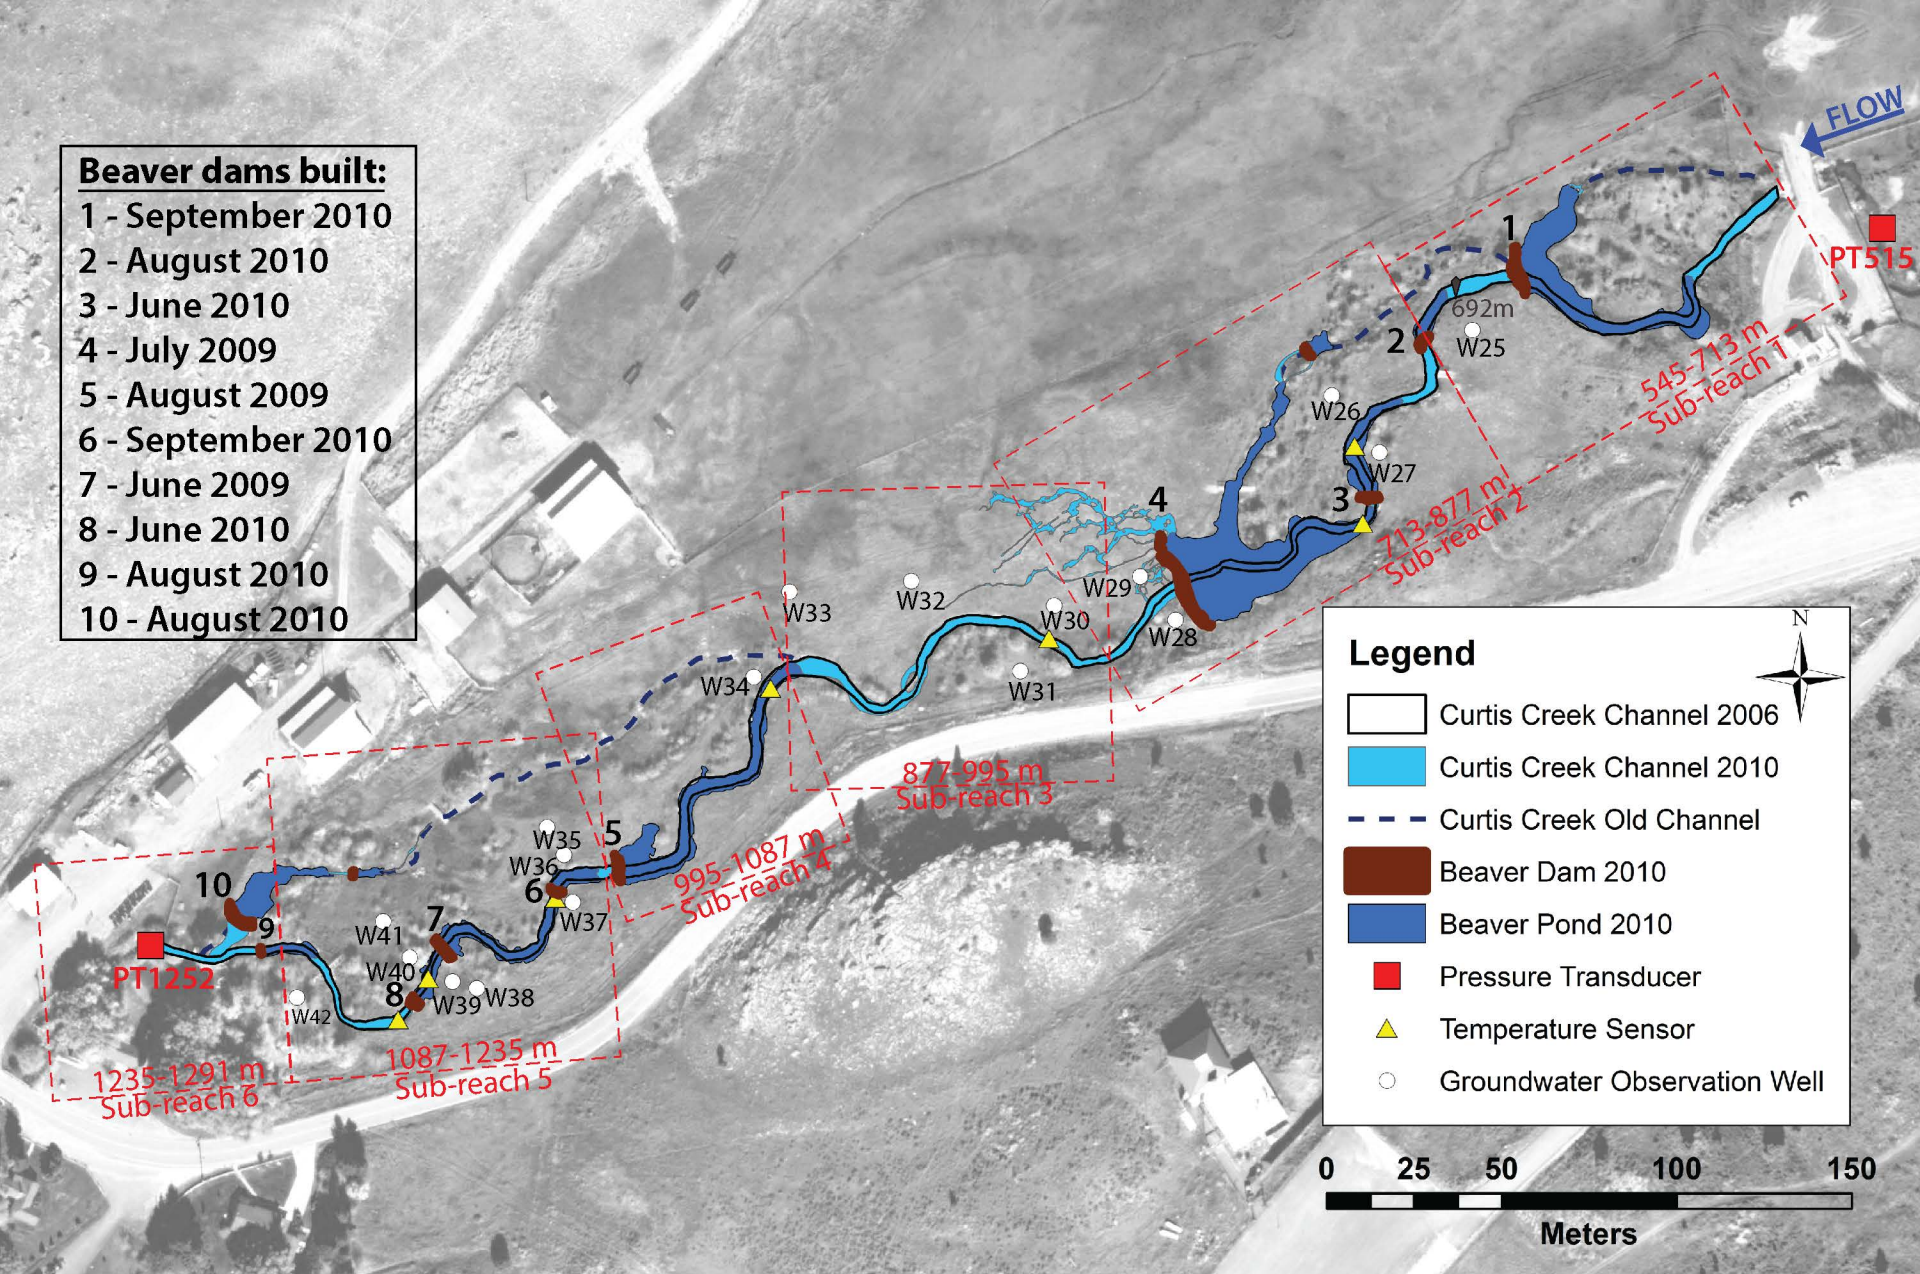

SPATIAL SCALE DIAGRAM FOR CURTIS CREEK

REACH SCALE

SUB-REACH SCALE

BEAVER DAM SCALE

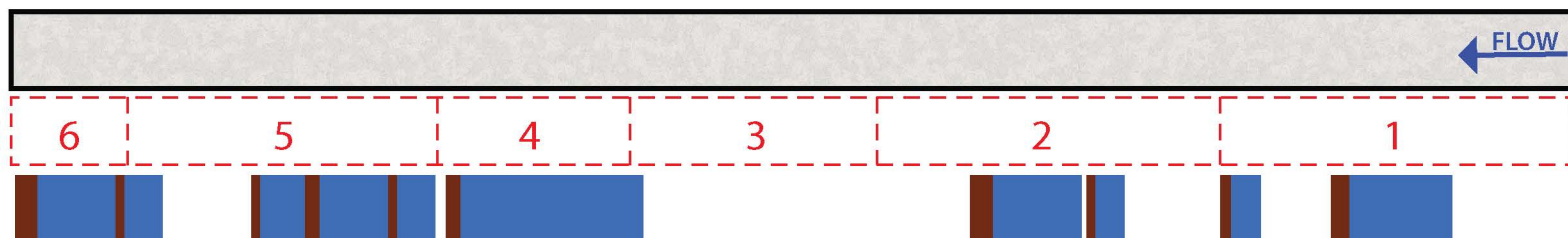
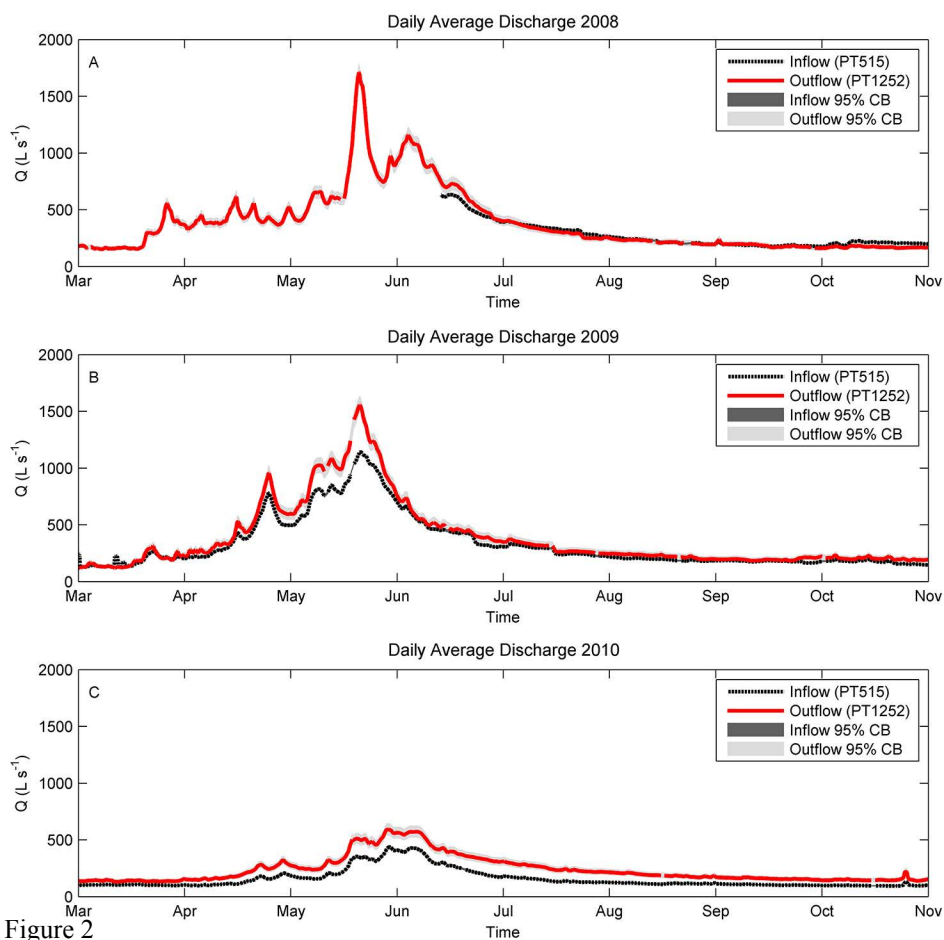


Figure 1



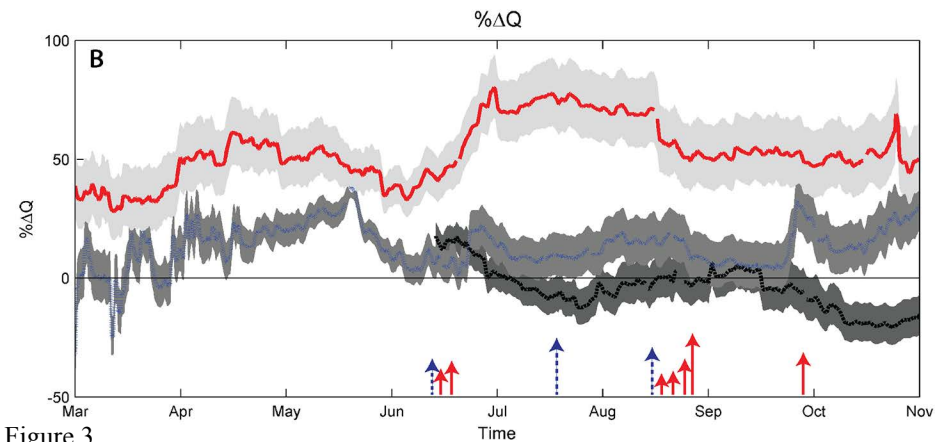
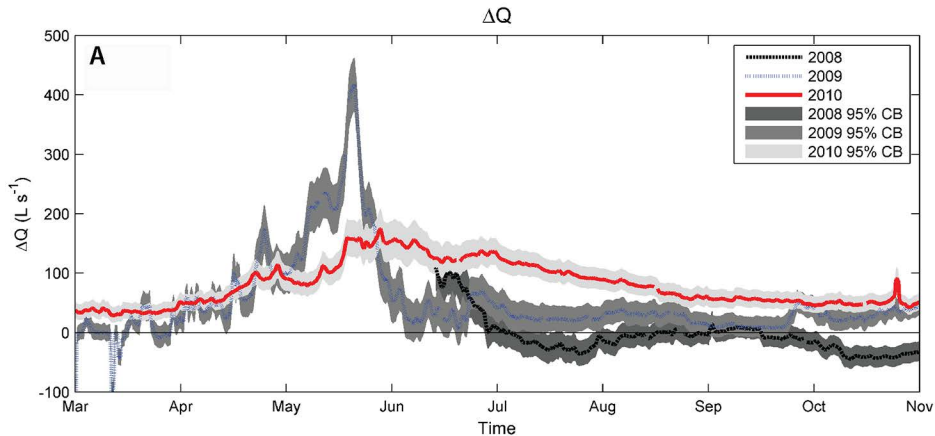


Figure 3

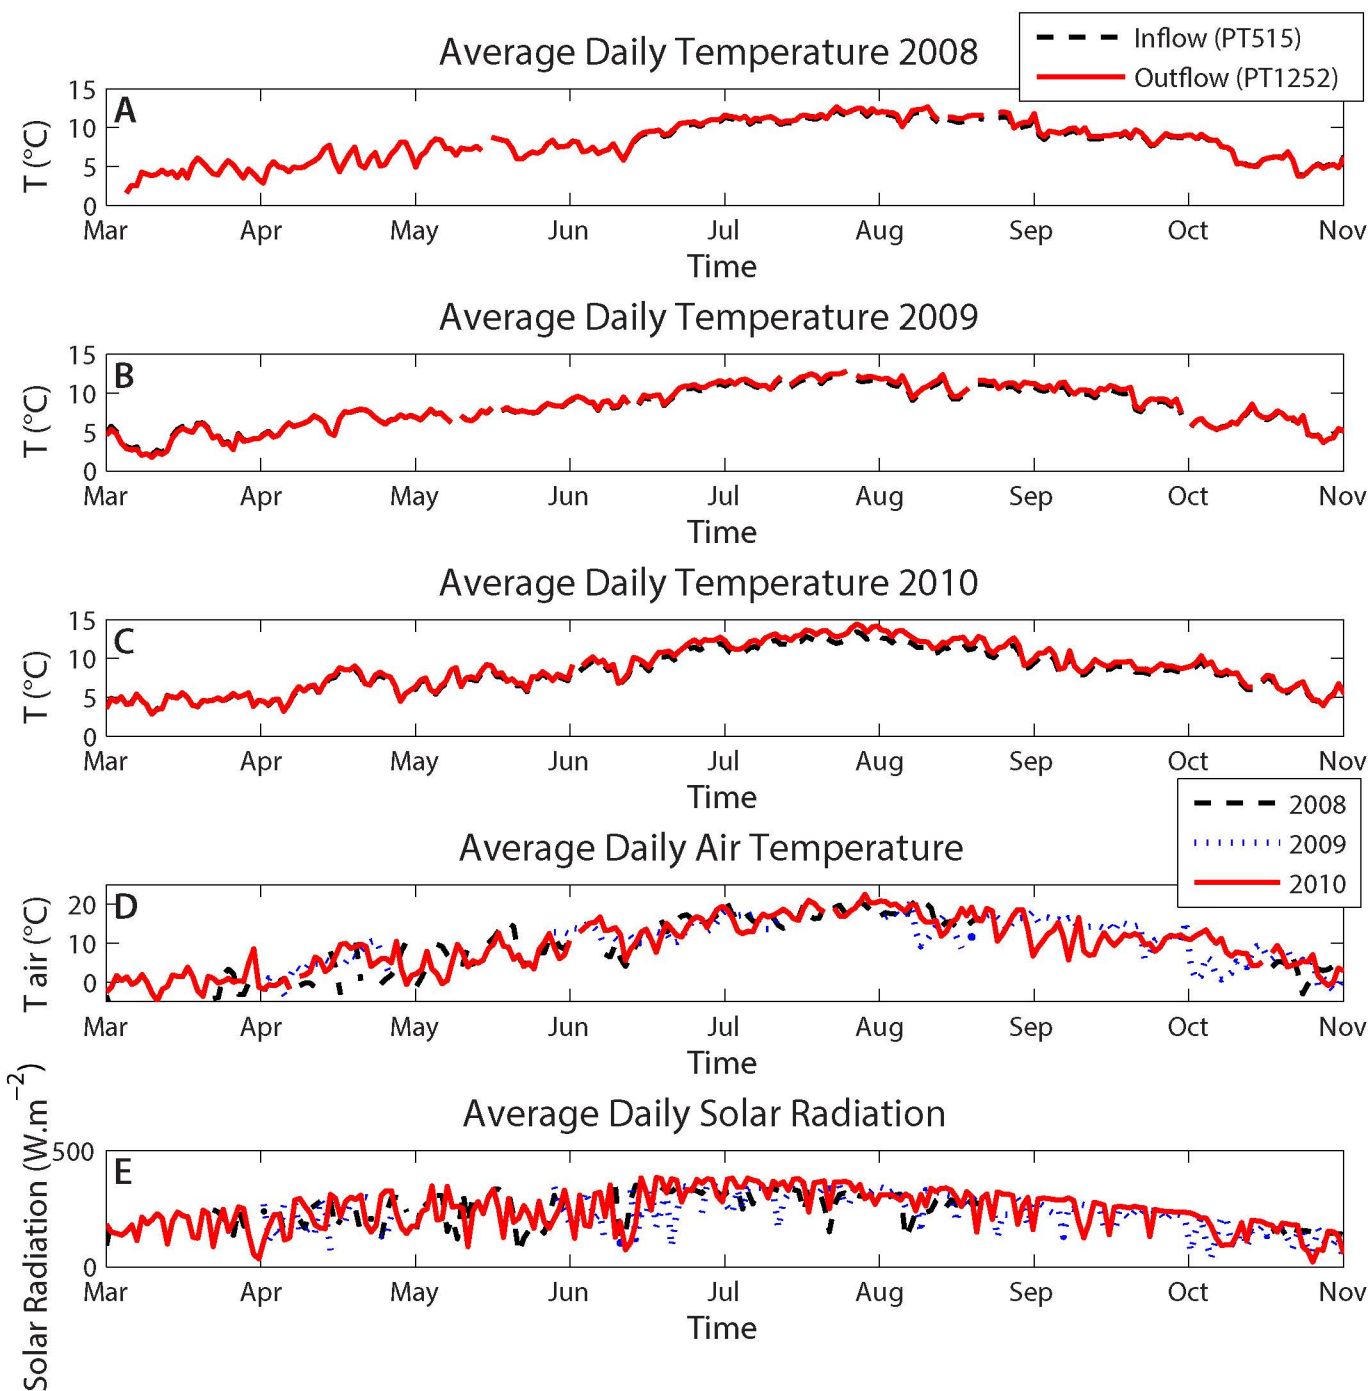


Figure 4



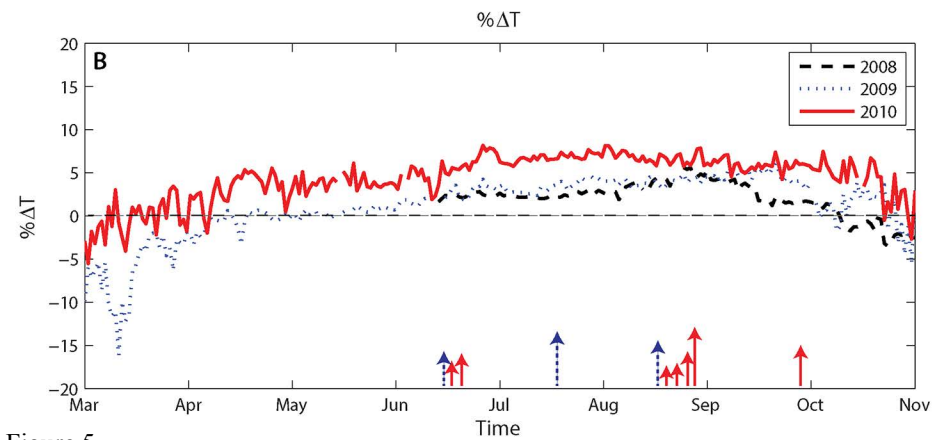


Figure 5

DISCHARGE

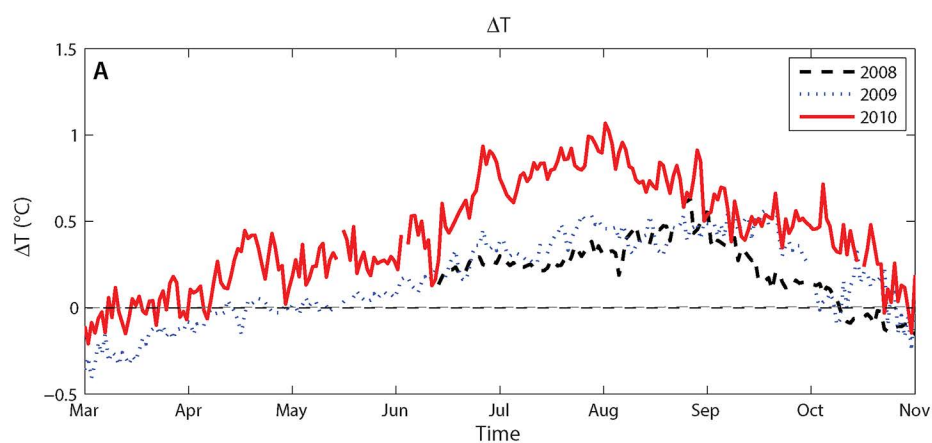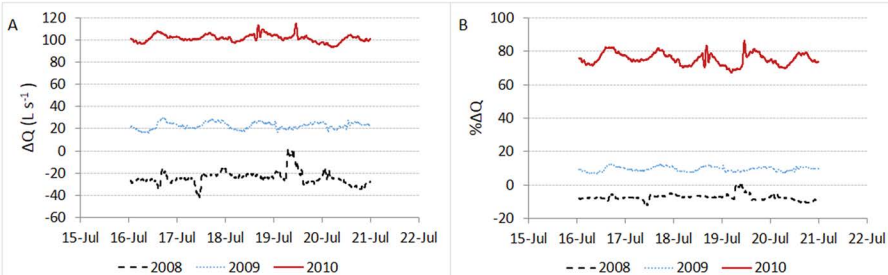

TEMPERATURE


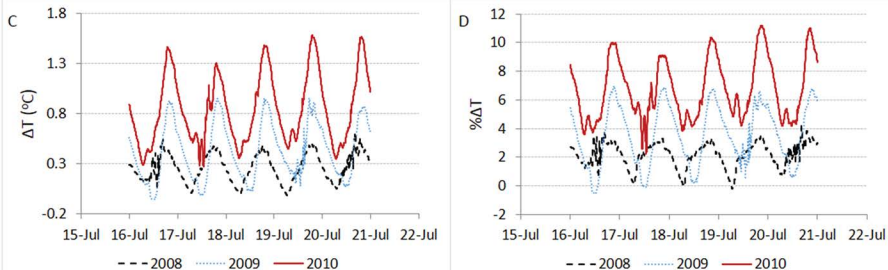


Figure 6

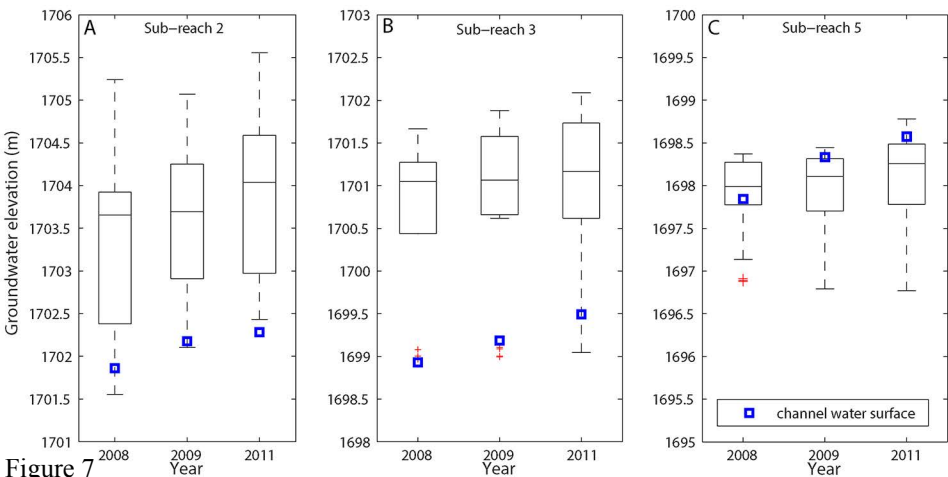

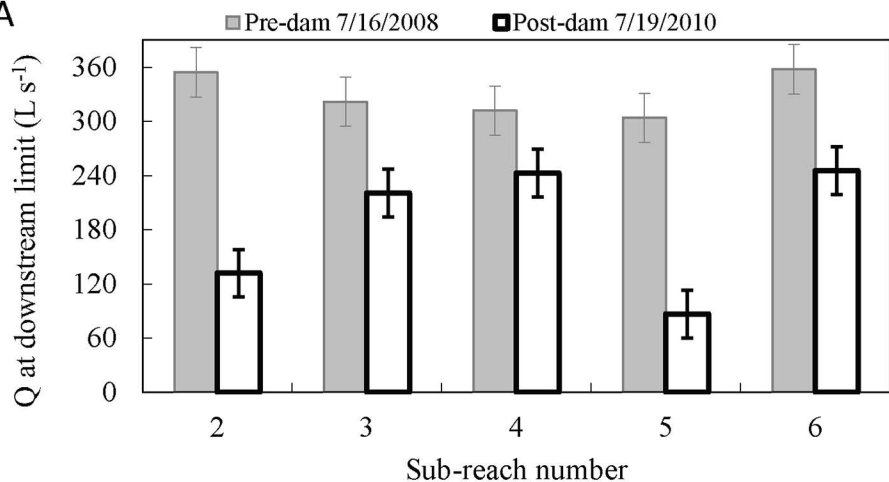
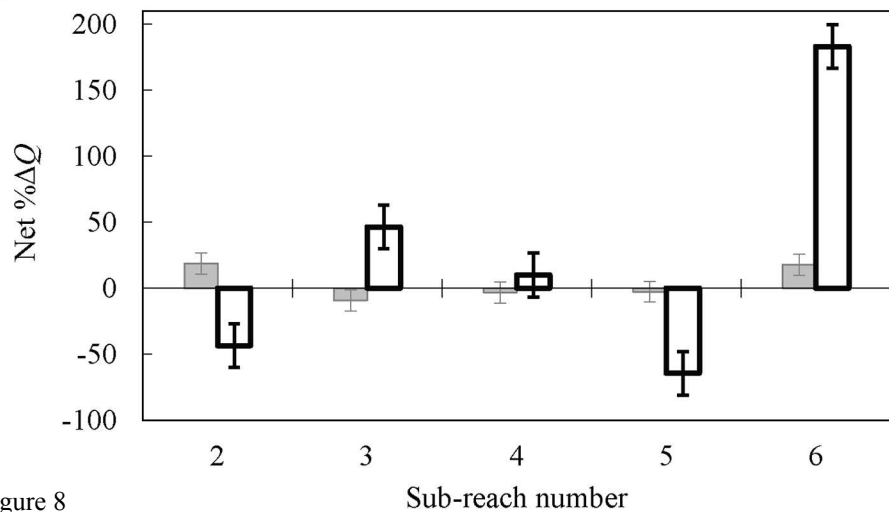
A**B**

Figure 8

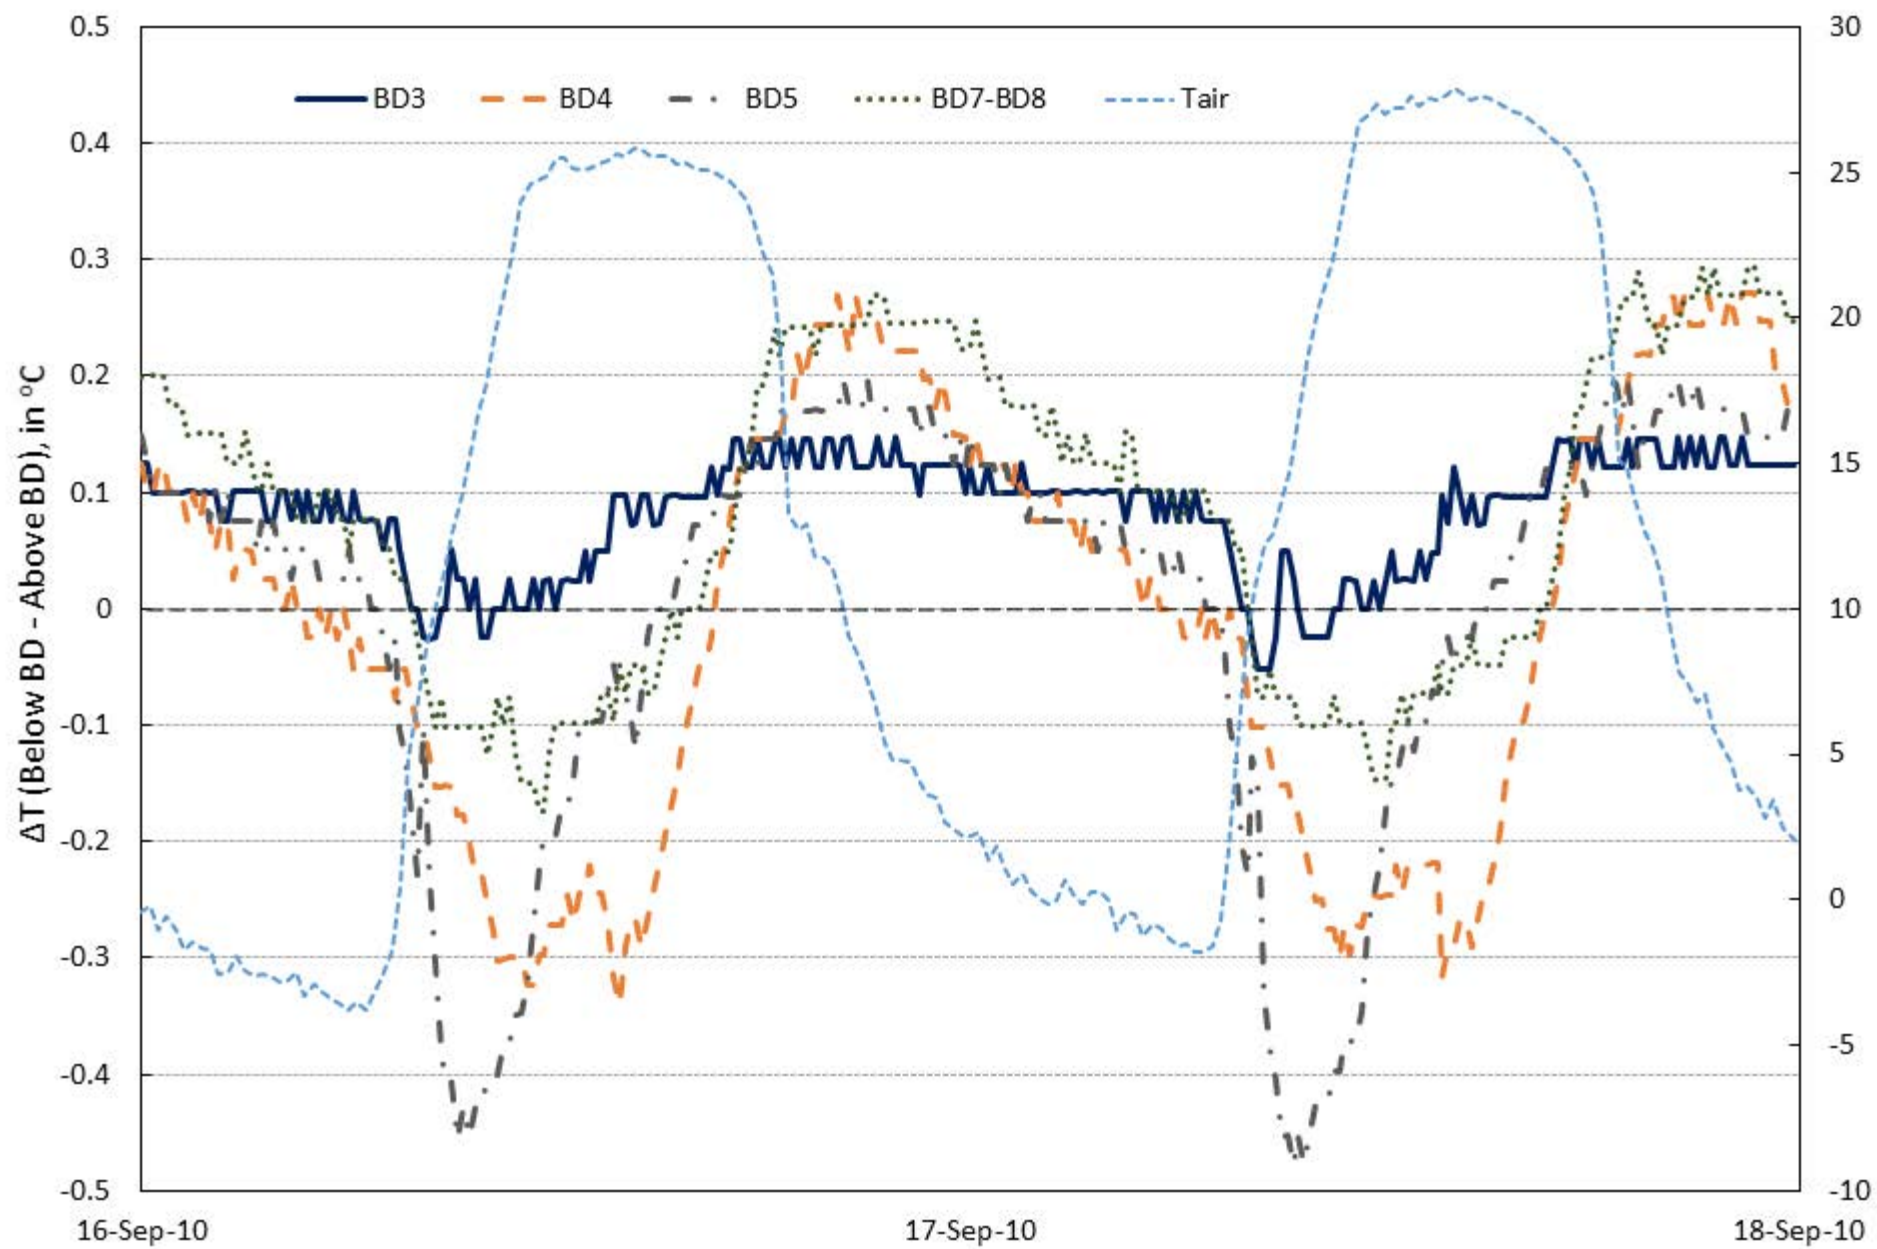


Figure 9

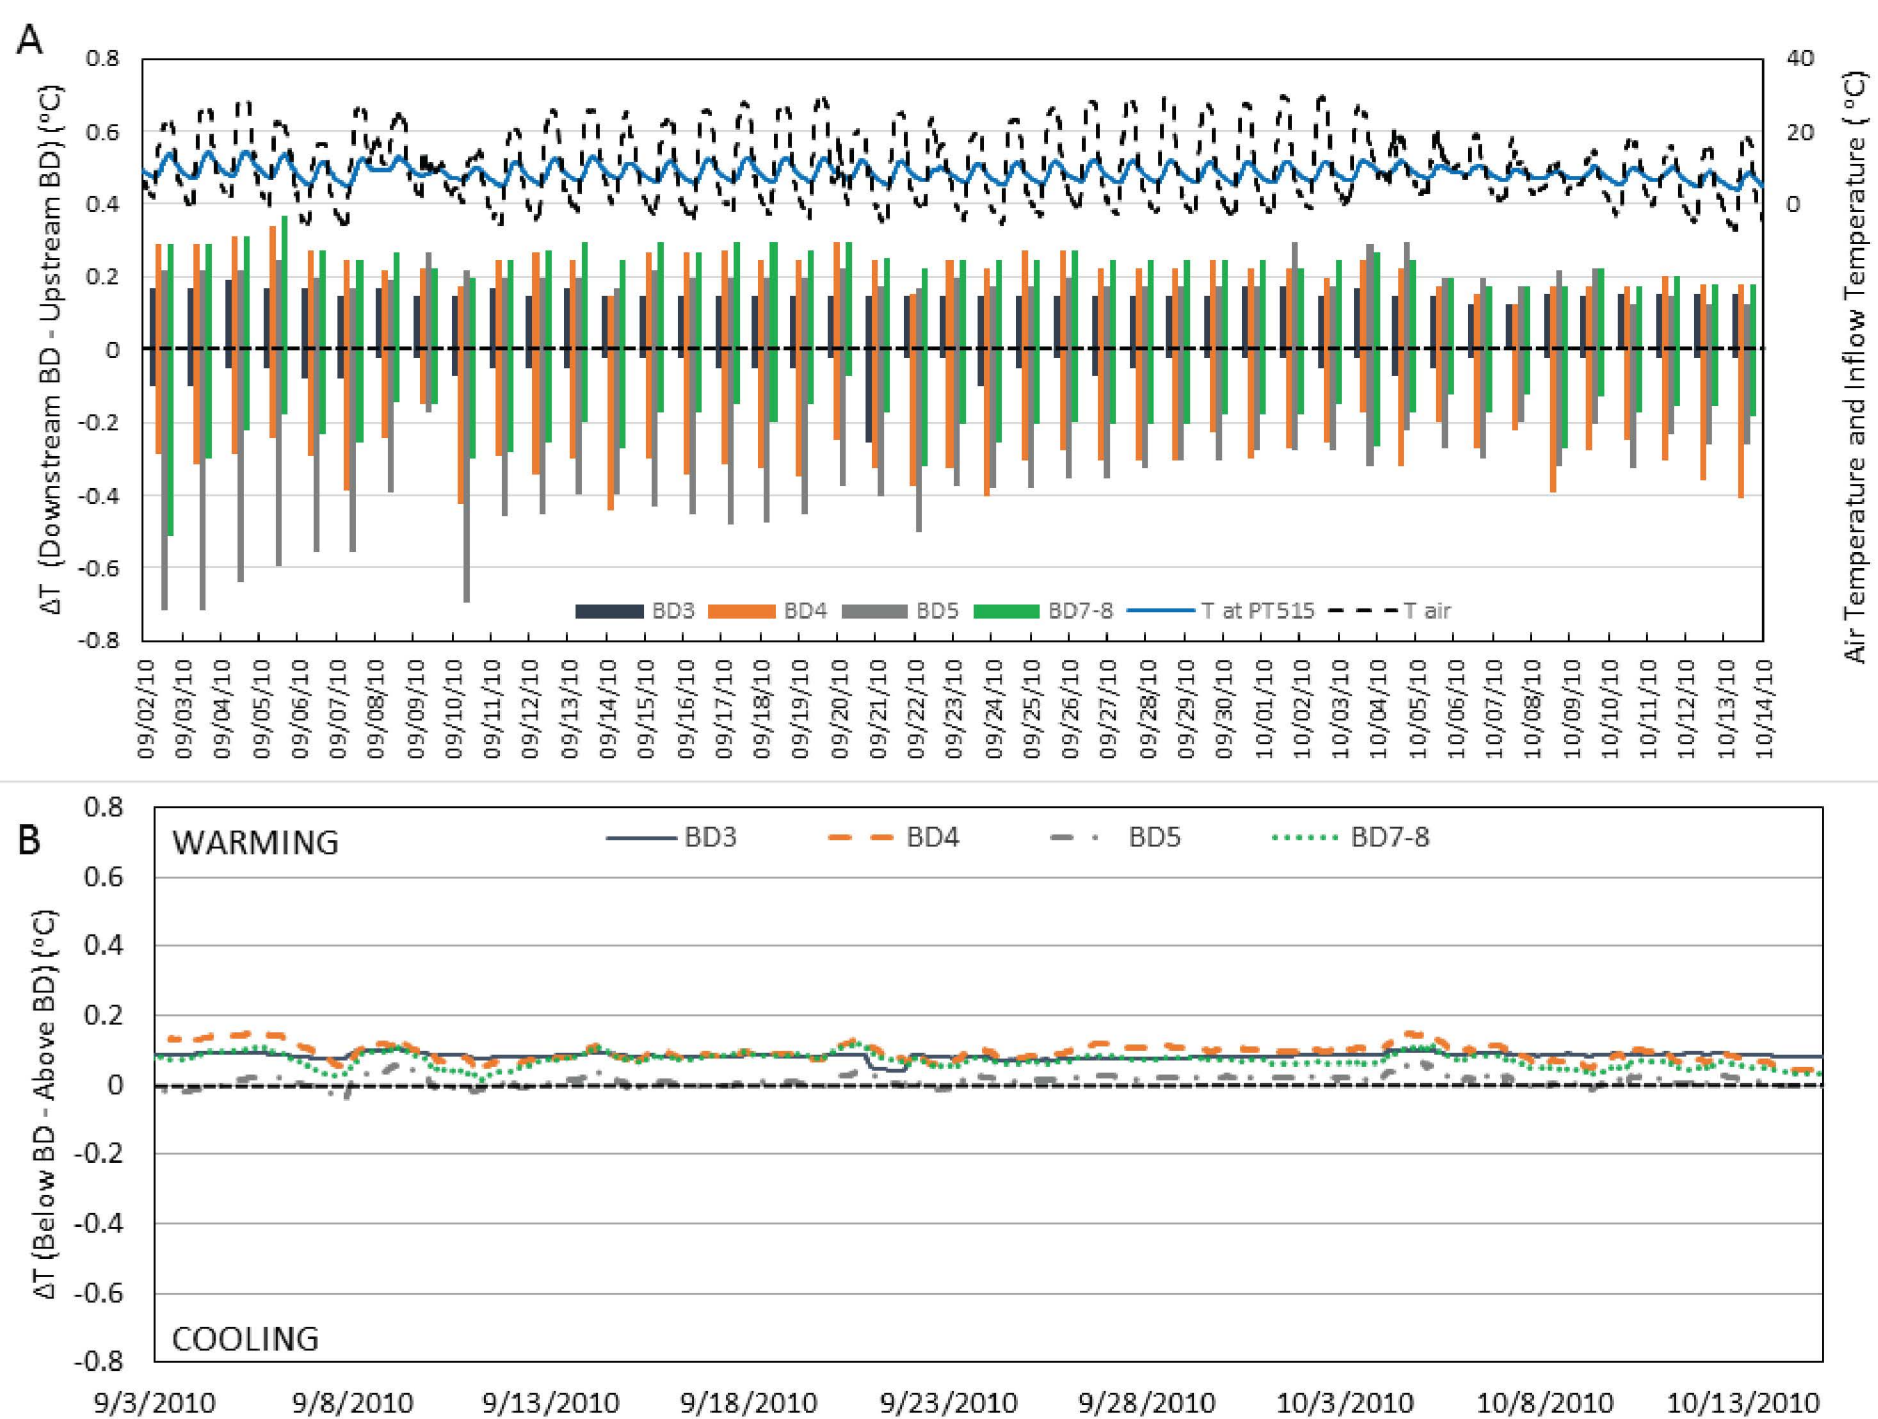


Figure 10