



This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Determinants of modelling choices for 1-D free-surface flow and erosion issues in hydrology: a review

B. Cheviron¹ and R. Moussa²

¹IRSTEA, UMR G-EAU Gestion de l'Eau, Acteurs et Usages, 361 rue Jean-François Breton, BP 5095, 34196 Montpellier CEDEX 5, France

²INRA, UMR LISAH, Laboratoire d'étude des Interactions entre Sol – Agrosystème – Hydrosystème, 2 Place Pierre Viala, 34060 Montpellier CEDEX 1, France

Received: 2 August 2015 – Accepted: 7 August 2015 – Published: 8 September 2015

Correspondence to: B. Cheviron (bruno.cheviron@irstea.fr)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

12, 9091–9155, 2015

1-D free-surface flow
and erosion issues in
hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

This review paper investigates the determinants of modelling choices, for numerous applications of 1-D free-surface flow and erosion equations, across multiple spatiotemporal scales. We aim to characterize each case study by its signature composed of model refinement (Navier-Stokes: NS, Reynolds-Averaged Navier-Stokes: RANS, Saint-Venant: SV or Approximations of Saint-Venant: ASV), spatiotemporal scales (domain length: L from 1 cm to 1000 km; temporal scale: T from 1 second to 1 year; flow depth: H from 1 mm to 10 m), flow typology (Overland: O , High gradient: Hg , Bedforms: B , Fluvial: F) and dimensionless numbers (Dimensionless time period T^* , Reynolds number Re , Froude number Fr , Slope S , Inundation ratio Λ_z , Shields number θ). The determinants of modelling choices are therefore sought in the interplay between flow characteristics, cross-scale and scale-independent views. The influence of spatiotemporal scales on modelling choices is first quantified through the expected correlation between increasing scales and decreasing model refinements, identifying then flow typology a secondary but mattering determinant in the choice of model refinement. This finding is confirmed by the discriminating values of several dimensionless numbers, that prove preferential associations between model refinements and flow typologies. This review is intended to help each modeller positioning his (her) choices with respect to the most frequent practices, within a generic, normative procedure possibly enriched by the community for a larger, comprehensive and updated image of modelling strategies.

1 Introduction

Free-surface flow models cover a wide range of environmental and engineering applications, across multiple spatiotemporal scales, through successive flow aggregations over various bed topographies: these govern both the qualitative (flow typology) and quantitative (dimensionless numbers) flow characteristics. Each case study may thus

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



5
10

15
20

25

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



▶

[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion



drograph concepts (Kirkby, 1976; Robinson et al., 1995; Agnese et al., 1998), under the angle of connecting-scale hydrological and sedimentological pathways (see the review by Bracken et al., 2013) or by debating the merits of similitude laws versus upscaling issues in the description of hydrological processes (Strahler, 1956; Blöschl and Sivalan, 1995; Slaymaker, 2006). An alternative consists in examining the scale matching between available data and modelling aims (Lilburne, 2002). This raises technical (contextual) as well as strategic (conceptual) issues, handled here from an overview on the most popular modelling practices, confronting the theoretical refinement of flow models to the specific, nominal scales of the processes at play.

Many papers or handbooks have summarised free-surface flow modelling and numerical techniques in hydraulics (King and Brater, 1963; Abbott, 1979; Cunge et al., 1980; Carlier, 1980; French, 1985) or hydrology (Chow, 1959; Kirkby, 1978; Beven 2000) for various contexts, purposes and flow typologies. Less works have discussed the concern of *ad hoc* friction laws (Leopold et al., 1960; Gerbeau and Perthame, 2001; Nikora et al., 2001; Roche, 2006; Burguete et al., 2008), at the microscopic or macroscopic scales (Richardson, 1973; Jansons, 1988; Priezjev and Troian, 2006; Smith et al., 2007; Powell, 2014) although friction, flow retardation and energy dissipation processes are closely related to bedforms, thus plausibly govern flow typologies then, possibly, modelling choices. Often outside any focus on friction, numerous works have provided wide overviews on erosion modelling (Ritchie and McHenry, 1990; Laflen et al., 1991; Merritt et al., 2003; Aksoy and Kavvas, 2005; Boardman, 2006). Erosion models that lean on the most sophisticated flow models calculate explicit particle detachment, transport and deposition from velocity fields or flow energetics (Vanoni, 1946; Hino, 1963; Lyn et al., 1992; Mendoza and Zhou, 1997) while reduced complexity models either assume the “transport capacity” (Foster and Meyer, 1972; Bennett, 1974) or “transport distance” schools of thoughts (see details in Wainwright et al., 2008).

This multidisciplinary review (hydrology, hydraulics, fluid mechanics and erosion science) searches for the determinants of modelling choices. The methodology consists in defining the “signature” of each case study as the chosen model refinement and the

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



given flow typology, spatiotemporal scales and dimensionless numbers, hypothesizing the conceptual element (model refinement) is the consequence of the contextual elements. The paper is organized as follows: Sect. 2 sorts the flow equations into four levels of refinement, Sect. 3 plots these refinements versus the spatiotemporal scales of the studies, also depicting the influence of flow typologies and dimensionless numbers. Section 4 discusses the results and future research leads. Some of the best documented references among the cited literature have been gathered in Appendix A: most figures in this manuscript were plotted from this database.

2 Flow models

2.1 List of flow models

2.1.1 Water flow

Free-surface flow equations in the literature may roughly be sorted into four levels of decreasing refinement, from the richness of their physical basis. The choice made here includes the Navier-Stokes equations (noted NS: Navier, 1822; Stokes, 1845), their average in time termed Reynolds-Averaged Navier-Stokes equations (RANS: Reynolds, 1895), the depth-averaged Saint-Venant equations (SV: Saint-Venant, 1871) and further approximations (referred to as ASV), among which the Diffusive Wave (DW: Hayami, 1951) and Kinematic Wave equations (KW: Iwagaki, 1955; Lighthill and Whitham, 1955).

2.1.2 Erosion

The associated erosion equations (not shown) are based on a representation of detachment and transport on hillslopes (Bennett, 1974; Van Rijn, 1984a, b; Wainwright et al., 2008), in streams (Einstein, 1950) or through the channel network (Du Boys, 1879; Exner, 1925; Hjulström, 1935; Shields, 1936; Bagnold, 1956). Friction is the link

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



between water flow and erosion issues in terms of physical processes at play at the particle scale, or at the scale of the erodible bed asperities. However, the scope here is not to review the choices made for friction modelling; friction phenomena, with the associated flow retardation and energy dissipation processes, are rather considered for their influence on flow typologies, as discussed later in the manuscript.

2.2 Navier-Stokes

2.2.1 Water flow

The Navier-Stokes (NS) equations have suitable simplifications for the shallow water cases ($L \gg H$) commonly used to describe free-surface flows. The three-dimensional fluid motion problem is reduced here to a two-dimensional description, whose projection along the streamwise axis writes:

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} + \frac{1}{\rho} \frac{\partial p}{\partial x} = g_x + \frac{1}{\rho} \frac{\partial \tau}{\partial x} \quad (1)$$

where x is the longitudinal distance [L], z the vertical coordinate [L], t is time [T], u is the local water velocity in x [LT^{-1}], ρ is water density [ML^{-3}], g_x is the projection of gravity g on x [LT^{-2}] and τ is the tangential stress due to water [$\text{ML}^{-1}\text{T}^{-2}$] noted τ_0 on the bed in Fig. 1.

The Navier-Stokes equations stay valid throughout the full range of flow regimes and contexts. They are preferentially used where much complexity is needed, often when relevant simplified flow descriptions could not be derived, for example for particle-scale applications (Chen and Wu, 2000; Wu and Lee, 2001; Feng and Michaelides, 2002), overland flow (Dunkerley, 2003, 2004) or flows over pronounced bedforms (Booker et al., 2001; Schmeeckle and Nelson, 2003). A very wide review of numerical methods and applications for the NS equations is provided by Gresho and Sani (1998) and a benchmark of numerous solvers by Turek (1999).

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2.2.2 Erosion

Several types of practical applications dictate the use of high-level formalisms in the description of particle detachment and transport, typically to handle explicit bed geometries and alterations, for example jet scours and regressive erosion (Stein et al., 1993; Bennett et al., 2000; Alonso et al., 2002), diverging sediment fluxes in canals (Belaud and Paquier, 2001) or incipient motion conditions, calculated from grain size, shape and weight (Stevenson et al., 2002). The NS formalism is also needed to describe strong water-sediment couplings in which the solid phase exerts an influence on the liquid phase, acting upon velocity fields, flow rheology and erosive properties (Sundaresan et al., 2003; Parker and Coleman, 1986; Parker et al., 1986; Davies et al., 1997; Mulder and Alexander, 2001). Moreover, the NS formalism offers the possibility to work on the energy equations: the erosive power and transport capacity of sediment-laden flows may be estimated from the energy of the flow, debating the case of turbulence damping (or not) with increasing sediment loads (Vanoni, 1946; Hino, 1963; Lyn et al., 1992; Mendoza and Zhou, 1997). The matter is not free from doubt today (Kneller and Buckee, 2001) and frictional drag, abrasion due to impacts of the travelling particles and increased flow viscosity have been described prone to enhance the detachment capacities of loaded flows (Alavian et al., 1992; Garcia and Parker, 1993).

2.3 Reynolds-Averaged Navier-Stokes

2.3.1 Water flow

The Reynolds-Averaged Navier–Stokes (RANS) equations are a turbulence model, using time-averaged equations of fluid motion, less generic than the NS formalism. The hypothesis behind these equations is that instantaneous pressure and velocities may be decomposed into time-averaged and randomly fluctuating turbulent parts, which

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



finally yields:

$$\frac{\partial \bar{u}}{\partial t} + \bar{u} \frac{\partial \bar{u}}{\partial x} + \bar{w} \frac{\partial \bar{u}}{\partial z} + g \frac{\partial H}{\partial x} = gS + \frac{1}{\rho} \frac{\partial \tau}{\partial z} \quad (2)$$

where \bar{u} [LT^{-1}] and \bar{w} [LT^{-1}] are the time-averaged local water velocities in x and z , H is the flow depth [L] and S is the bed slope $[-]$.

In this formulation, the “Reynolds stress” term τ is of crucial importance for free-surface flow, friction and erosion modelling, especially for shallow flows, first because it is the closure term ($\tau = -\rho \overline{u' w'}$) and second because the Reynolds stresses have been closely related, in magnitude and direction, to the size and arrangement of bed asperities. The combined analysis of the relative magnitude of the u' and w' terms has become the purpose of “quadrant analysis” (Kline et al., 1967; Raupach, 1981; Kim et al., 1987) that identifies the four cases of outward interactions (quadrant I: $u' > 0$, $w' > 0$), ejections (quadrant II: $u' < 0$, $w' > 0$), inward interactions (quadrant III: $u' < 0$, $w' < 0$) and sweeps (quadrant IV: $u' > 0$, $w' < 0$). Depending on the submergence and geometry of bed asperities, the maximal Reynolds stresses, those with significant effects on flow structure, have most often been reported to occur near or just above the roughness crests (see Nikora et al., 2001; Pokrajac et al., 2007 and the review by Lamb et al., 2008a).

2.3.2 Erosion

In their paper on movable river beds, Engelund and Fredsoe (1976) judiciously reformulated and exploited the existing hypotheses (Einstein and Banks, 1950; Bagnold, 1954; Fernandez Luque and van Beek, 1976) of a partition between “tractive” destabilizing shear stresses and “dispersive” equalizing drags. The vertical concentration profiles of bedload and suspended load were calculated from incipient sediment motion conditions, relating stresses on the particles to the values and variations of near-bed velocities. One step further, the physical explanation, mathematical definition, point of application, main direction and erosive efficiency of the turbulent near-bed stresses have

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



become private hunting grounds of the RANS models throughout the years (Nikora et al., 2001; Nino et al., 2003).

The maximal Reynolds stresses are located near the crests of the submerged bed asperities, where turbulent velocity fluctuations reach several times the average near-bed velocity values, which greatly enhances particle detachment (Raupach et al., 1991; Nikora and Goring, 2000; Lamb et al., 2008a). Very few studies deal with the magnitude and point of application of the Reynolds stresses for partial inundation cases (Bayazit, 1976; Dittrich and Koll, 1997; Carollo et al., 2005) although turbulent flows between emergent obstacles often occur in natural settings. Particle detachment is then attributed to “sweeps” (quadrant IV: $u' > 0$, $w' < 0$) (Sutherland, 1967; Drake et al., 1988; Best, 1992) or “outward interactions” ($u' > 0$, $w' > 0$) (Nelson et al., 1995; Papanicolaou et al., 2001) but depends on bed geometries and bed packing conditions. Finally, the RANS equations allow explicit calculations of shear stresses and particle-scale pick-up forces, thus incipient motion conditions (Nino et al., 2003; Afzalimehr et al., 2007). They may handle the movements of detached particles in weak transportation stages (Bounvilay, 2003; Julien and Bounvilay, 2013) down to near-laminar regimes (Charru et al., 2004).

2.4 Saint-Venant

2.4.1 Water flow

The Saint-Venant (SV) equations are obtained by depth-integrating the Navier–Stokes equations, neglecting thus the vertical velocities as well as vertical stratifications in the streamwise velocity (Stoker, 1957; Johnson, 1998; Whitham, 1999). The integration process (Chow, 1959; Abbott, 1979) incorporates an explicit bottom friction term τ_0 that previously appeared only as a boundary condition in the NS and RANS equation:

$$\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + g \frac{\partial H}{\partial x} = gS + \frac{\tau_0}{\rho H} \quad (3)$$

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Recent attempts have been made in the field of fluid mechanics to derive specific expressions for τ_0 (laminar flows: Gerbeau and Perthame, 2001; macro-roughness: Roche, 2006; thin flows: Devauchelle et al., 2007; turbulent flows: Marche, 2007; multi-layer SV model: Audusse et al., 2008). However, the common practice in hydraulics and hydrology is rather to approximate steady-state equilibrium between bottom friction τ_0 and the streamwise stress exerted at the bottom of a water column ($\tau_0 = \rho g H S_f$) to reach the popular formulation:

$$\frac{\partial U}{\partial t} + U \frac{\partial U}{\partial x} + g \frac{\partial H}{\partial x} = g (S - S_f) \quad (4)$$

(i) (ii) (iii) (iv) (v)

where (i) is the unsteadiness term, (ii) the convective acceleration term, (iii) the pressure gradient term, while (iv) and (v) form the diffusive wave approximation (later discussed).

In the above, S_f (–) is the “friction slope” whose expression depends on flow velocity and on the chosen friction law, often one of the Chézy, Darcy-Weisbach or Manning formulations (e.g. $S_f = nU^2/8gH$ with Manning’s n friction coefficient). The derivation of the SV equations by Boussinesq (1877) involved a momentum correction coefficient β [–] in the advection term (King and Brater, 1963; Chen, 1992) to account for stratification effects in the vertical distribution of velocities, especially plausible in sediment-laden flows or in presence of density currents.

The SV equations may account for flows of variable widths and depths, for example in floodplains (Bates and De Roo, 2000; Beltaos et al., 2012), rivers (Guinot and Cappelaere, 2009), overland flow (Berger and Stockstill, 1995; Ghavasieh et al., 2006), with overpressure in drainage systems (Henine et al., 2014), in man-made channels (Zhou, 1995; Sen and Garg, 2002; Sau et al., 2010), for vegetation flushing (Fovet et al., 2013), in channel networks (Choi and Molinas, 1993; Camacho and Lees, 1999) or natural settings (Moussa and Bocquillon, 1996a; Wang and Chen, 2003; Roux and Dartus, 2006; Burguete et al., 2008; Bates et al., 2010), including these with curved

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



boundaries (Sivakumaran and Yevjevich, 1987). Discharge and cross-sectional area may conveniently be used instead of velocity and water depth, and the two equations describing mass and momentum in the Saint-Venant system now write (Sivapalan et al., 1997):

$$\frac{\partial A}{\partial t} + \frac{\partial Q}{\partial x} = q_a \quad (5)$$

$$\frac{1}{gA} \frac{\partial Q}{\partial t} + \frac{1}{gA} \frac{\partial}{\partial x} \left(\beta \frac{Q^2}{A} \right) + \frac{\partial H}{\partial x} + S_f - S = 0 \quad (6)$$

where A is the cross-sectional area [L^2], Q is the discharge [L^3T^{-1}], q_a is the lateral flow per unit channel length [L^2T^{-1}]. The magnitudes of the various terms in Eqs. (5) and (6) are given in the literature (e.g. Henderson, 1966, Kuchment, 1972).

2.4.2 Erosion

In the hydrology-erosion community, the SV level is that of the *Concepts of mathematical modelling of sediment yield* by Bennett (1974). This landmark paper extended Exner's (1925) conservation of sediment mass, adding the possibility to handle different fluid and particle velocities, also accounting for particle dispersion via a diffusion term. Unfortunately, most citing papers discard this term, taking particle velocity equal to water velocity. The assumption seems false if transport occurs as bedload or saltation load, questionable for suspended load trapped into turbulent motions, exact only for very small particles borne by laminar flows. Although warning against the capability of first-order laws to “*represent the response of sediment load to changes in transport and detachment capacity*” (Bennett, 1974; p. 491), the author recommended the use of such a model (Foster and Meyer, 1972). The proposed simplification writes $e/D_c = 1 - c/T_c$, where the net erosion rate (e) is normalised by the maximal detachment capacity (D_c) while sediment load (c) is normalised by the maximal transport capacity of the flow (T_c). An additional (uncertain) hypothesis was that of maximal detachment capacity for

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



minimal sediment load, i.e., clear water. See the controversial comments around the Wainwright et al. (2008) paper: the areas of disagreement revolve around the ability of models to handle unsteady flow conditions, to deal with suspended and/or bedload transport, to consider particles of different sizes and to stay valid over realistic ranges of sediment concentration.

Those questions directly address the possibilities of SV-level approaches: higher-level models (NS, RANS) better describe the dynamics of incipient motion (Dey and Papanicolaou, 2008), especially in shallow laminar flows (Charpin and Myers, 2005) or focusing on granular flows (Parker, 1978a, b; Charru et al., 2004; Charru, 2006). Refined models are also needed to explicitly handle specific particle velocities (Bounvilay, 2003), to describe particle diffusion in secondary currents (Sharifi et al., 2009), to account for the spatial heterogeneity of “neither laminar nor turbulent” overland flows (Lajeunesse et al., 2010) or to introduce modifications in flow rheology (Sundaresan et al., 2003). On the other hand, slope effects (Polyakov and Nearing, 2003), particle-size effects (Van Rijn, 1984a; Hairsine and Rose, 1992a; Sander et al., 2007; Wainwright et al., 2008), flow stratification effects (van Maren, 2007), the effects of hyperconcentrated flows (Hessel, 2006) and bedload transport (Van Rijn, 1984b; Julien and Simons, 1985; Hairsine and Rose, 1992b; Wainwright et al., 2008) have received much attention within the SV or ASV formalisms.

Whatever the liquid-solid coupling opted for, the SV level covers the widest variety of contexts, from overland erosion models (Simpson and Castelltort, 2006; Nord and Esteves, 2010) to dam-break hydraulics over erodible beds (Cao et al., 2004) and the analysis of channel inception driven by the variations of the Froude number (Izumi and Parker, 1995) or the impact of travelling particles (Sklar and Dietrich, 2004; Lamb et al., 2008b). Sediment detachment and transport over plane beds (Williams, 1970), rough beds (Afzalimehr and Ancil, 1999, 2000; Gao and Abrahams, 2004), step-pools (Lamarre and Roy, 2008) or pool-riffle sequences (Sear, 1996; Rathburn and Wohl, 2003) have yielded often-cited studies, while sediment flushing in reservoirs (Campisano et al., 2004) and vegetation flushing in canals (Fovet et al., 2013) constitute

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



more specific applications. Cited limitations of the SV approaches are their inability to explicitly describe the near-bed velocity fluctuations, especially the local accelerations responsible for particle entrainment but also the vertical gradients of the streamwise velocity, for bedload transport in the laminar layer. This lack of accuracy in the description of flow characteristics also endangers the possibility to predict the formation, transformation and migration of geometrical bed patterns, which in turn requires the full set of 3-D (x, y, z) NS equations in several cases (Lagrée, 2003; Charru, 2006; Devauchelle et al., 2010).

There seems to exist a dedicated “NS-SV Morphodynamics” research lead that uses rather simple bedload transport formulae (Du Boys, 1890; Meyer-Peter and Müller, 1948; Einstein and Banks, 1950; Bagnold, 1966; Yalin, 1977) to calculate sediment fluxes from excess bed shear stresses, in studies of long-term system evolutions. These low “system evolution velocities” appear under the “quasi-static” flow hypothesis: particle velocity may be neglected before water velocity, which allows neglecting the unsteadiness term in the momentum equation but on no account in the continuity equation (Exner law) that describes bed modifications (Parker, 1976). Moreover, shear stresses are generally calculated from near-bed laminar or near-laminar velocity profiles, sometimes with the regularising hypothesis that detachment and transport occur just above the criterion for incipient motion (see the review by Lajeunesse et al., 2010). Various applications address rivers with mobile bed and banks (Parker, 1978a, b), focus on self-channelling (Métivier and Meunier, 2003; Mangeney et al., 2007) and often resort to formulations at complexity levels between these of the NS and the SV approaches (Devauchelle et al., 2007; Lobkovsky et al., 2008).

2.5 Approximations to Saint-Venant

2.5.1 Water flow

When the full Saint-Venant equations are not needed or impossible to apply due to a lack of data, an option is to neglect one or several terms of the momentum equa-

tion (Ponce and Simons, 1977; Romanowicz et al., 1988; Moussa and Bocquillon, 1996a; Moussa and Bocquillon, 2000). In most practical applications for flood routing, the unsteadiness (i) and convective acceleration (ii) terms in Eq. (4) may be neglected, suppressing the first two terms from Eq. (6). Combining the remaining terms in Eqs. (5) and (6), we obtain the Diffusive Wave equation (Moussa, 1996):

$$\frac{\partial Q}{\partial t} + C \left(\frac{\partial Q}{\partial x} - q \right) - D \left(\frac{\partial^2 Q}{\partial x^2} - \frac{\partial q}{\partial x} \right) = 0 \quad (7)$$

where $C [LT^{-1}]$ and $D [L^2T^{-1}]$ are non-linear functions of the discharge Q (and consequently the flow depth H) known as the celerity and diffusivity, respectively.

In cases where the pressure-gradient term (iii) in Eq. (4) can also be neglected, the third term of Eq. (6) also vanishes and the Diffusive Wave becomes the Kinematic Wave equation, with $D = 0$ in Eq. (7). The Diffusive Wave (Cunge, 1969; Akan and Yen, 1981; Rutschmann and Hager, 1996; Wang et al., 2006; Wang et al., 2014) can thus be considered a higher order approximation than the Kinematic Wave approximation (Katopodes, 1982; Zoppou and O'Neill, 1982; Daluz Vieira, 1983; Ferrick, 1985; Ponce, 1990). Both have proven very useful for canal control algorithms (Rodellar et al., 1993) or flood routing procedures, with lateral inflow (Fan and Li, 2006), in rectangular channels (Keskin and Agiralioglu, 1997), for real time forecast (Todini and Bossi, 1986), in lowland catchments (Tiemeyer et al., 2007), for small catchments (Moussa et al., 2002; Chahinian et al., 2005; Charlier et al. 2007), for mountainous catchments (Moussa et al., 2007) or tropical catchments (Charlier et al., 2009), at the largest scale of the Amazon basin (Trigg et al., 2009; Paiva et al., 2013), for anthropogenic hillslopes (Hallema and Moussa, 2013), to address backwater effects (Munier et al., 2008), stormwater runoff on impervious surfaces (Blandford and Meadows, 1990; Parsons et al., 1997), stream-aquifer interactions (Perkins and Koussis, 1996) or volume and mass conservation issues (Perumal and Price, 2013). Given their “nominal” scales of application, the ASV models are sometimes fed by airborne (remote sensing) data acquisition (Jain and Singh, 2005; Reddy et al., 2007). In addition, predictive uncertainties (Elhanafy et

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



al., 2008) or the applicability of the Kinematic and Diffusive Wave equations are the main scope of several studies (Liggett and Woolhiser, 1967; Ponce and Simons, 1977; Ponce et al., 1978; Moussa and Bocquillon, 1996b; Bajracharya and Barry, 1997), the evaluation of modelling strategies is that of Horritt and Bates (2002), while parameter estimation is addressed, among others, by Koussis et al. (1978).

2.5.2 Erosion

Whereas common practices in fluid mechanics and hydraulics are rather to seek context-specific strategies in erosion modelling, two simplifying and unifying trends, if not paradigms, have developed in the field of hydrology. The first one is the transport capacity concept (Foster and Meyer, 1972) in which the erosive strength of the flow decreases with increasing suspended sediment load, until a switch occurs from detachment- to transport-limited flows. The second one is the stream power concept (Bagnold, 1956) that *slope times discharge* is the explicative quantity for erosion, with adaptations that mentioned unit stream power (*slope times velocity*, Yang, 1974; Govers, 1992) or fitted exponents to the slope and discharge terms (Julien and Simmons, 1985). Many catchment-scale hydrology-erosion models (e.g. ANSWERS: Beasley et al., 1980; CREAMS: Knisel 1980; KINEROS: Smith et al., 1995; LISEM: De Roo et al., 1996; WEPP: Ascough et al., 1997; EUROSEM: Morgan et al., 1998; MAHLERAN: Wainwright et al., 2008; MHYDAS-Erosion: Gumiere et al., 2011) adopt the 1-D Diffusive or Kinematic Wave Equations to route water fluxes, possibly through vegetated strips (Muñoz-Carpena et al., 1999), together with the simplest possible couplings between water and sediment fluxes (Aksoy and Kavvas, 2005).

A known difficulty when embracing larger scales with simplified models is to describe the spatially-distributed sources and sinks of sediments (Jetten et al., 1999, 2003) with or without explicit descriptions of the permanent or temporary connectivity lines, for water and sediment movements (Prosser and Rustomji, 2000; Croke and Mockler, 2001; Pickup and Marks, 2001; Bracken et al., 2013). What tends to force reduced complexity approaches in erosion models is the necessity to handle distinct detachment, transport

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and deposition processes (from the very shallow diffuse flows formed during runoff initiation to the regional-scale basin outlets) with only sparse data on flow structure and soil characteristics (cohesion, distribution of particle sizes, bed packing). Parsons and Abrahams (1992) have established how the agronomical, engineering and fluvial families of approaches have converged into similar modelling techniques, especially on the subject of erosion in overland flows (Prosser and Rustomji, 2000). The ASV formalism also allows fitting bedload transport formulae against mean discharge values as a surrogate to the overcomplicated explicit descriptions of erosion figures in high-gradient streams with macro-roughness elements (Smart, 1984; Aziz and Scott, 1989; Weichert 2006; Chiari, 2008). ASV-level couplings have also been applied to study the slope independence of stream velocity in eroding rills (Gimenez and Govers, 2001) and the appearance of bed patterns in silt-laden rivers (van Maren, 2007).

3 Determinants of modelling choices

This section aims at the construction of a signature for each case study, relating the “conceptual” choice of a model refinement (Navier-Stokes: NS, Reynolds-Averaged Navier-Stokes: RANS, Saint-Venant: SV or Approximations to Saint-Venant ASV) to the “contextual” descriptors, i.e. the spatiotemporal scales (Sect. 3.1), spatiotemporal scales and flow typologies (Sect. 3.2), spatiotemporal scales, flow typologies and dimensionless numbers (Sect. 3.3). Figures 2, 3, 5, 6 and 7 in this section were drawn from the 158 studies listed in Appendix A.

3.1 Spatiotemporal scales

3.1.1 Influence of domain length (L) and time scale (T)

A cross-disciplinary analysis of the cited literature indicates a clear correlation between the (L, T) scales and the chosen model refinement (NS, RANS, SV or ASV). In this (L, T) plane, Fig. 2 quantifies the expected trend that sophisticated (NS,

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



RANS) models are required to represent rapidly-varying small-scale phenomena (lower left) while simplified approaches (ASV) pertain to increased durations and spatial extensions (upper right). Typical scales of application may be identified for each model refinement: NS ($10\text{ cm} < L < 100\text{ m}$, $10\text{ s} < T < 1\text{ h}$), RANS ($1\text{ m} < L < 100\text{ m}$, $10\text{ s} < T < 1\text{ h}$), SV ($10\text{ m} < L < 20\text{ km}$, $1\text{ min} < T < 5\text{ days}$) and ASV ($10\text{ m} < L < 1000\text{ km}$, $30\text{ min} < T < 1\text{ year}$). However, some studies consider larger spatial or temporal scales, for example Charru et al. (2004) for overland granular flows (RANS, $L \sim 20\text{ cm}$, $T \sim 2\text{ days}$) or Rathburn and Wohl (2003) for pool-riffle sequences (SV, $L \sim 70\text{ m}$, $T \sim 30\text{ days}$). Nevertheless, the existence of overlap regions suggests that the (L, T) spatiotemporal scales are not the only factor governing the choice of flow models.

The influence of flow typologies is discussed later in details but could the modelling choices also be dictated by the scientific background of the modeller? A striking example is that of the SV models, responsible for the largest overlaps in Fig. 2. They may for example be used by physicists, as an upgraded alternative to the NS equations, in the field of environmental fluid mechanics (for limited scales). They may as well be convenient for soil scientists interested in high-resolution hydrology or for civil engineers who may need to cope with flow unsteadiness to handle erosion issues or to allow correct sizing of the man-made structures (for rather large scales).

Figure 2 bears another type of information than the trend to decreasing model refinement with increasing spatiotemporal scales. As the x ordinate indicates the spatial scale L and the y ordinate the time scale T , then the L/T ratio has dimensions of a velocity. However, this quantity should not be interpreted as a flow velocity. It rather indicates which of the temporal (long-term, low L/T ratio) or spatial (short-term, high L/T ratio) aspects are predominant in the study. Hence, the five dotted diagonals ($L/T = 10^{-4}$, 10^{-3} , 10^{-2} , 0.1 and 1 m s^{-1}) establish the numerical link between the spatial and temporal scales of the cited experiments. They also show the dispersion with respect to the expected (say “natural”) correlation between increasing L and T values. This dispersion contains a lot of information. Judging from the plotted literature, the lowest L/T ratios (e.g. 10^{-4} m s^{-1}) tend to indicate systems with low “evolution ve-

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



locities”, possibly associated with long-term changes or effects (high T values, low L values) obtained from repeated phenomena, multiple cycles and slow modifications. By contrast, high L/T ratios (e.g. 1 m s^{-1}) rather refer to single-event situations, more associated with quick modifications of flow patterns or bed morphologies.

If rules of thumb in problem dimensioning were to be drawn from Fig. 2, geomorphological concerns (dune migration, basin sedimentation, long-term bed modifications) probably require stretching up the temporal scale so that low “system evolution velocities” would fall beneath $L/T = 10^{-2} \text{ m s}^{-1}$ while event-based modelling (dam breaks, formative discharges, flash floods) should be able to handle high “system evolution velocities” near or beyond $L/T = 1 \text{ m s}^{-1}$. This “fixed- L , chosen- T ” description of system evolution and characteristic time scales also refers to Fig. 1 in which the choice of T is somehow left at the modeller’s discretion, as a degree of freedom: how different from T_0 should T be? These points are the subject of detailed investigations in the field of morphodynamics (Paola et al., 1992; Howard, 1994; Van Heijst et al., 2001; Allen, 2008; Paola et al., 2009). Indicators of “system evolution velocities” with units of a velocity but different definitions may for example be found in Sheets et al. (2002), who took the channel depth (H) divided by the average deposition rate to obtain a relevant, characteristic time scale (T). For the same purpose, Wang et al. (2011) took the characteristic bed roughness (ε) instead of channel depth. The objective is often to discriminate what Allen (2008) called the “reactive” (high L/T) and “buffer” (low L/T) systems. With or without erosion issues, a reasonable hypothesis here seems that the dispersion in L/T ratios arises from the variety of flow contexts, which may necessitate different modelling strategies. In other terms, it is deemed in this study that this secondary trend, associated with flow typologies, is also a determinant in the choice of the flow model.

3.1.2 Influence of domain length (L) and flow depth (H)

The NS, RANS, SV and ASV equations are now positioned with respect to the spatial scale (L) and flow depth (H) of the reported experiments (Fig. 3), showing patterns and trends very similar to those of the (L, T) plane, though less pronounced.

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The global trend stays a decrease in refinement of the flow models from the smallest to the largest (L, H) values and typical scales of application may again be identified for each model refinement, NS ($10\text{ cm} < L < 100\text{ m}$, $1\text{ mm} < H < 30\text{ cm}$), RANS ($1\text{ m} < L < 100\text{ m}$, $5\text{ cm} < H < 50\text{ cm}$), SV ($10\text{ m} < L < 20\text{ km}$, $1\text{ cm} < H < 2\text{ m}$) and ASV ($10\text{ m} < L < 1000\text{ km}$, $10\text{ cm} < H < 10\text{ m}$). Some studies provide outliers for example Gejadze and Copeland (2006) for canal control purposes (NS, $L \sim 3\text{ km}$, $H \sim 10\text{ m}$) or Cassan et al. (2012) for flows in lined channels (RANS, $L \sim 50\text{ cm}$, $H \sim 75\text{ cm}$). In an overview, wider overlaps and more dispersion occur in the (L, H) than in the (L, T) plane, especially for low to medium scales: flow depth (H) seems less discriminating than the time scale (T) in the choice of a flow model.

The transverse analysis of H/L “fineness ratios” (dotted diagonals $H/L = 10^{-1}$, 10^{-2} , 10^{-3} , 10^{-4} and 10^{-5}) provides additional information, or rather a complementary reading grid on the information already plotted. First, only the NS and RANS models allow 2-D (x, z) flow descriptions, which explains why these models have many of the largest H/L ratios (which, in most cases, stay within the $H \ll L$ shallow water hypothesis). Second, low H/L ratios provide justifications to discard 2-D (x, z) descriptions at the benefit of 1-D (x) descriptions within but also without the NS and RANS formalisms, so that the second diagonal of Fig. 3 (roughly from the upper right to the lower left) also shows a decrease in model refinement, towards SV and ASV points.

3.1.3 Influence of domain length (L), time scale (T) and flow depth (H)

The links between model refinements (NS, RANS, SV or ASV) and spatiotemporal scales (L, T, H) were shown in the (L, T) and (L, H) planes (Figs. 2 and 3). There was first the expected correlation between increasing scales and decreasing model refinements. Then the transverse analyses involved re-examining the same dataset from the values of the L/T and H/L ratios, also seeking the determinants of modelling choices in the “system evolution velocity” (L/T) and “fineness” of the flow (H/L).

- 5

10

15

20

macroscopic scales (Smith et al., 2007; Powell, 2014), and even more for erosion issues. In the literature, the modelling choices to account for friction phenomena are most often correlated with the refinement of the flow models used (NS, RANS, SV, ASV) but also constrained by bed topographies and flow typologies in numerous cases.

Several studies at the NS level of refinement advocate the use of the “partial slip” (Navier, 1827) condition or parented formulations in which the near-bed slip velocity is either proportional to the shear stress (Jäger and Mikelic, 2001; Basson and Gerard-Varet, 2008) or depends on it in a non-linear way (Achdou et al., 1998; Jäger and Mikelic, 2003). Other works plead for “no-slip” conditions (Panton, 1984; Casado and Diaz, 2003; Myers, 2003; Bucur et al., 2008, 2010) or suggest the separation of flow domains within or outside bed asperities, with a complete slip condition (non-zero tangential velocity) at the interface (Gerard-Varet and Masmoudi, 2010). A wider consensus exists at the RANS level, calculating bottom friction as the local grain-scale values of the “Reynolds stresses” (Kline et al., 1967; Nezu and Nekagawa, 1993; Keshavarzy and Ball, 1997), which has proven especially relevant for flows in small streams over large asperities (Lawless and Robert, 2001; Nikora et al., 2001; Pokrajac et al., 2007; Schmeeckle et al., 2007). However, he who can do more, can do less, and it is still possible to use the simplest empirical friction coefficients (Chézy, Manning) within sophisticated flow descriptions (NS: Lane et al., 1994; RANS: Métivier and Meunier, 2003). In the literature, the SV level of refinement is a tilting point in complexity, that allows fundamental research, deriving ad hoc shear stress formulae from the local fluid-solid interactions (Gerbeau and Perthame, 2001; Roche, 2006; Devauchelle et al., 2007; Marche, 2007) or applied research, adjusting parameter values in existing expressions, for specific contexts (e.g. boulder streams: Bathurst, 1985, 2006; step-pool sequences: Zimmermann and Church, 2001; irrigation channels: Hauke, 2002; gravel-bed channels: Ferro, 2003). The latter trend holds for most studies at the ASV level of refinement, though theoretical justifications of Manning’s empirical formula were recently derived (Gioia and Bombardelli, 2002) and a recent mathematical study of the Diffusive Wave equation (Alonso et al., 2008) introduces generalized friction laws for

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



flows over non-negligible topographic obstacles. The event-based variability of the friction coefficient in ASV models has been investigated by Gaur and Mathur (2002).

If not decided from the level of refinement of the flow model, the friction coefficient (f) is chosen in accordance with flow typology and bed topography, the former often described by the Reynolds number (Re), the latter by the inundation ratio ($\Lambda_z = H/\varepsilon$ where ε is the size of bed asperities, to which flow depth H is compared). Such arguments were already present in the works of Keulegan (1938) and Moody (1944) on flow retardation in open-channel and pipe flows, relating values of the friction coefficient to the relative roughness ($\varepsilon/H = 1/\Lambda_z$) of the flow, across several flow regimes (laminar, transitional, turbulent) but only for small relative roughness (high inundation ratios). The existence of implicit relations between f , Re and Λ_z has somehow triggered the search for contextual alternatives to the sole $f-Re$ relation for turbulent flows. Progressively lower inundation ratios were investigated (Smith et al., 2007) until the real cases of emergent obstacles received attention (Bayazit, 1976; Abrahams and Parsons, 1994; Bathurst, 2006; Meile, 2007; Mügler et al., 2010) including for non-submerged vegetation (Prosser et al., 1995; Nepf, 1999; Järvelä, 2005; Nikora et al., 2008). For site-specific friction laws, the default $f-Re$ relation is sometimes complemented by $f-Fr$ trends (Grant, 1997; Gimenez et al., 2004; Tatard et al., 2008) or $f-\Lambda_z$ relations (Peyras et al., 1992; Chin, 1999; Chartrand and Whiting, 2000; Church and Zimmermann, 2007) in steep bed morphologies, where Fr is the Froude number (Froude, 1868).

Knowledge gained on flow retardation processes lead to the identification of key dimensionless groups, to be included in any comprehensive analysis, formed from the “obvious”, available elements of bed geometry previously mentioned (Julien and Simons, 1985; Lawrence, 2000; Ferro, 2003; Yager et al., 2007). In numerous practical cases though, explicit bed geometries cannot be handled by the flow models. A crucial surrogate becomes then to include as many geometrical effects as possible in the chosen friction laws, for example these obtained from composite roughness experiments (Schlichting, 1936; Colebrook and White, 1937; Einstein and Banks, 1950). A crucial

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



advance was due to Smith and McLean (1977) who attributed distinct retardation effects to bed particles, particle aggregates and bedforms, corresponding to “grain spill”, “obstructions” and “long-wave form resistance” in the subsequent literature. From then on, friction forces exerted by multiple roughness elements or scales have often been described as additive-by-default, in shallow overland flows (Rauws, 1980; Abrahams et al., 1986), gravel-bed streams (Bathurst, 1985; Lawless and Robert, 2001; Ferro, 2003), natural step-pool formations (Chin and Wohl, 2005; Canovaro and Solari, 2007; Church and Zimmermann, 2007) and man-made spillways or weirs (Peyras et al., 1992; Chinnarasri and Wongwise, 2006).

3.2.2 From flow characteristics to flow typologies

Several authors have put forward the existence of a scale-independent link between bed geometry, flow retardation and flow structure, through the existence of three distinct flow regimes, from geometrical arguments: “isolated roughness”, “wake interference” and “skimming” flow (Morris, 1955, 1959; Leopold et al., 1960; Fig. 4a, c and e). These flow descriptions were later applied in very different contexts (Abrahams and Parsons, 1994; Chanson, 1994a; Papanicolaou et al., 2001; Zimmermann and Church, 2001), which suggests that analogies in energy dissipation and flow retardation may exist across scales, from similar geometries and flow characteristics. This makes the description somewhat generic, possibly used to constitute a set of flow typologies.

In Fig. 4a, the isolated roughness flow is laminar or weakly turbulent and the shade (streamline diversion) of an obstacle does not reach the next. This setting ensures maximum energy dissipation, which also holds for stepped cascades of natural or man-made nature in Fig. 4b: “nappe flows” loose strength through energy-consuming fully-developed hydraulic jumps, isolated behind the major obstacles (Peyras et al., 1992; Chanson, 1994b; Wu and Rajaratnam, 1996, 1998). In Fig. 4c the wake-interference flow is transitional or turbulent. The drag reduction and partial sheltering between obstacles depend on their spatial distribution and arrangements, as in Fig. 4d that shows “partial nappe flow” in relatively flat step-pool formations, with incomplete hydraulic

**1-D free-surface flow
and erosion issues in
hydrology**

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2.3 Influence of flow typologies on modelling choices

Figures 6 and 7 provide a comprehensive picture of the most used associations between models (NS, RANS, SV or ASV), scales (L, T, H) and flow typologies (O, Hg, B or F) just added to the analysis. These figures seem to indicate preferential [NS, O], [RANS, B] and [SV, Hg] associations, in addition to the obvious [ASV, F] pair. The (L, H) plot of Fig. 6 seems more discriminating than the (L, T) plot of Fig. 7 though identical trends appear.

The [NS, O] association arises from the fact that several Overland studies involve very shallow laminar flows and low sediment transport rates, best handled by adapted formulations of the NS equations (nearly at the SV level), made suitable for low "system evolution velocities" ($L/T \approx 0.01 \text{ m s}^{-1}$, Fig. 6). At somewhat larger spatial scales, the widely-used and multipurpose SV model has rather low median $L/T \approx 0.02 \text{ m s}^{-1}$ values, mainly because many of its applications concern laminar flow modelling and granular transport, as an alternative to the NS system or in formulations at complexity levels intermediate between the NS and SV refinements. These are clues that the [SV, O] association may also be of special interest, despite the closest median positions of the NS and O points in the (L, T) and (L, H) plots.

The RANS model (median $L/T \approx 0.07 \text{ m s}^{-1}$) and the ASV models (median $L/T \approx 0.1 \text{ m s}^{-1}$) tend to involve higher "system evolution velocities". The former typically targets the description of numerous short-term, high-frequency events (quadrant analysis for fluctuations in near-bed velocity, particle pick-up by turbulent bursts). The latter is often associated with Fluvial flows: low H/L ratios with high enough H and Λ_z values and weak friction, often resulting in very turbulent, high-velocity flow. Moreover, studies handling erosion issues within the ASV formalism often hypothesize particle transport to occur as suspended load only, equating particle and flow velocities, thus typically not extending the time scale of the study to address the long-term, low velocity bedload transport involved in morphodynamics, for example.

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Several principles of organization between flow typologies may be inferred from reference studies (Grant et al., 1990; Montgomery and Buffington, 1997; Church, 2002) that discuss their succession in space (along longitudinal profiles) but also in time (which flow typologies are “experienced” by the flowing water during its course and which are the associated time scales). Plausible “streamwise scenarios” may therefore be assembled (Fig. 8), routing flow aggregations across increasing spatiotemporal scales and through several flow typologies, from the narrow-scale upland flows (runoff initiation) to the regional scales of the main rivers.

3.3 Dimensionless numbers

3.3.1 Contextual dimensionless numbers

An angle of attack for the establishment of modelling strategies is provided by dimensional analysis, to delineate the domains of validity of the selected flow models (NS, RANS, SV or ASV), across their multiple spatiotemporal scales of application but in a powerful scale-independent analysis. Justifications for the use of dimensionless numbers may be sought in the developments of similitude laws (Fourier, 1822; Rayleigh, 1877; Bertrand, 1878; Vaschy, 1892; Riabouchinsky, 1911), later extended to dimensional analysis, providing guidance for the sizing of experimental facilities used in reduced-scale modelling as well as more general arguments for the choice of adequate sets of dimensionless quantities (Buckingham’s, 1914 π -theorem; Bridgman, 1922; Langhaar, 1951; Bridgman, 1963; Barenblatt, 1987). Throughout history, the establishment of dimensionless numbers has led to the recognition of contextually dominant terms in the flow equations, rendering them prone to dedicated simplifications, provided these would not be used outside their conditions of validity, following successive hypotheses made during their derivation.

From a wide overview of free-surface flow and erosion studies, a few dimensionless numbers stood out and will be used in the procedure presented in the following. Some have already been mentioned (Reynolds number Re , Froude number Fr) and some

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Topographical effects on flow phenomenology are almost always explicitly accounted for through the average bed slope S , typically ranging from nearly zero ($S < 0.01\%$) for large rivers to extremely high values ($S \approx 100\%$) for gabion weirs, chutes or very steep cascades.
- Topography also appears through the inundation ratio $\Lambda_z = H/\varepsilon$ which allows a direct, model-independent analysis of friction phenomena (Lawrence, 1997, 2000; Ferguson, 2007; Smith et al., 2007) possibly dealing with large-size obstacles and form-induced stresses (Kramer and Papanicolaou, 2005; Manes et al., 2007; Cooper et al., 2013). The encountered values of Λ_z are very high for rivers flowing on smooth, cohesive, fine-grained beds ($\Lambda_z > 100$) and very low for all types of flows between emergent obstacles ($\Lambda_z < 1$).
- The dimensionless Shields number $\theta = \tau_0/g\varepsilon_p(\rho_p - \rho)$ compares the drag force exerted on bed particles to their immersed weight, where ε_p [L] and ρ_p [ML^{-3}] account for the size and density of erodible particles. The ratio between the current θ and the critical θ_c values indicates local flow conditions of deposition ($\theta < \theta_c$), incipient motion ($\theta \approx \theta_c$), transportation as bedload ($\theta > \theta_c$) or into suspension ($\theta \gg \theta_c$) (Shields, 1936). This number seems appropriate for most erosion issues because it has been widely applied and debated in the literature (Coleman, 1967; Ikeda, 1982; Wiberg and Smith, 1987; Zanke, 2003; Lamb et al., 2008) and also because of its numerous possible adaptations (Neill, 1968; Parker et al., 2003; Ouriemi et al., 2007; Miedema, 2010) to various flow typologies. An impressive review on the use of the Shields number to determine incipient motion conditions, over eight decades of experimental studies, may be found in Buffington and Montgomery (1997).

3.3.2 Influence of the dimensionless numbers

As the purpose here is to re-examine the influence of flow typologies from the angle of the dimensionless numbers, the chosen representation (Fig. 9) discards the (L, T, H)

constrain the choice of a modelling strategy. A normative procedure was built to facilitate the search for determinants of the modelling choices in the cited literature.

- Each free surface flow model was placed in one of the NS, RANS, SV or ASV categories, whose decreasing levels of refinement account for “Navier-Stokes”, “Reynolds-Averaged Navier-Stokes”, “Saint-Venant” or “Approximations to Saint-Venant” types of approaches.
- The explored (L, T, H) spatiotemporal scales cover multiple orders of magnitude in the streamwise direction ($1 \text{ cm} < L < 1000 \text{ km}$), the time duration ($1 \text{ s} < T < 1 \text{ year}$) and flow depth ($1 \text{ mm} < H < 10 \text{ m}$).
- This study also encompasses a wide variety of free-surface flows, reduced to four typologies from arguments on bed geometry, friction, flow retardation and energy dissipation processes. These typologies are Overland flow (O : diffuse or concentrated), High-gradient flow (Hg : cascades, step-pools), flows over significant Bedforms (B : rough plane beds, dune ripples, pool riffles) and Fluvial flows (F : rivers, canals). Overland flows have the shallowest depths, High-gradient flows the highest bed slopes, Fluvial flows have high flow depths and negligible bed roughness while Bedforms flows may have any flow depth, over pronounced, non-negligible bedforms.
- In addition to the spatiotemporal scales and flow typologies, the determinants of modelling choices are also sought in a series of six popular dimensionless numbers: the dimensionless period (T^*), Reynolds and Froude numbers (Re, Fr), the bed slope (S), the inundation ratio ($\Lambda_z = H/\varepsilon$ where ε is the size of bed asperities) and the Shields number (θ) that compares drag forces to particle weight.

In summary, each case-study may be defined by its signature, comprised of the chosen model (NS, RANS, SV or ASV), the given spatiotemporal scales (L, T, H) , flow typology (O, H, B or F) and dimensionless numbers $(T^*, Re, Fr, S, \Lambda_z, \theta)$. Though non-

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



unique, this signature is a generic and normative classification of studies interested in free-surface flow modelling, with or without erosion issues.

- The present review first illustrated the expected dominant trend of decreasing model refinement with increasing (L , T , H) spatiotemporal scales. It appeared then that model uses could also be sorted by their L/T and H/L ratios, though less clearly, which nevertheless provided indications that the spatiotemporal scales were not the only determinant of modelling choices. This result suggested that flow typologies (reduced here to the L/T "system evolution velocity" and H/L "fineness of the flow") were also influential factors.
- A more exhaustive set of flow typologies was then derived from simple geometrical arguments, combining criteria on S , H and Λ_z , represented in the (S, H) plane. This allowed quantifying the median scales associated with studies interested in the Overland (O), Bedforms (B), High-gradient (Hg) and Fluvial (F) typologies, sorted here by increasing spatiotemporal scales. Then came the identification of preferential associations between flow models, scales and typologies: $[NS, O]$ or $[SV, O]$, $[RANS, B]$ or $[SV, B]$, $[SV, Hg]$ or $[ASV, Hg]$ and $[ASV, F]$ for increasing spatiotemporal scales.
- The final step was to re-examine the previous associations from the values of the dimensionless numbers, thought here as more detailed, scale-independent descriptors of flow typologies. Several associations were confirmed by the median values of the associated dimensionless numbers but the T^* (dimensionless period), S (bed slope) and Λ_z (inundation ratio) introduced additional information., i.e. correcting trends.

All arguments prevailing in the identification and sorting of flow models, scales, typologies and dimensionless numbers may easily be debated and adapted, within the hydrology-erosion community or for other research purposes. For example, multiple flow models, scales, typologies and dimensionless numbers also intervene in the fields

1-D free-surface flow
and erosion issues in
hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of pesticide fate modelling and groundwater contamination issues, so the same procedure could be applied. Finally, this procedure offers the possibility to enrich the database of signatures if each modeller records his (or her) conceptual choices (flow models) in the proposed reading grid, together with the contextual elements (scales, typologies, dimensionless numbers) handled, for present and past studies. This would first help forming a comprehensive view of modelling choices, thus seeking guidance from “what has been done in similar cases”, which however does not provide any critical analysis. Complementary investigations could certainly address the question of “what should be done”, this time deciding the “model” part of the signatures from recommendations based on the scales, typologies and dimensionless numbers, as well as from additional elements, typically the modelling objectives.

Appendix A: References used in the figures

Abrahams and Parsons (1994); Afzalimehr and Anctil (2000); Afzalimehr et al. (2007); Akan and Yen (1981); Alonso et al. (2002); Audusse et al. (2008); Aziz and Scott (1989); Bajracharya and Barry (1997); Bates and De Roo (2000); Bathurst (2006); Belaud and Paquier (2001); Beltaos et al. (2012); Berger and Stockstill (1995); Blandford and Meadows (1990); Booker et al. (2001); Bounvilay (2003); Burguete et al. (2008); Camacho and Lees (1999); Canovaro and Solari (2007); Cao et al. (2004); Cassan and Belaud (2012); Cassan et al. (2012); Chahinian et al. (2005); Charlier (2007); Charlier et al. (2009); Charpin and Myers (2005); Charru et al. (2004); Chartrand and Whiting (2000); Chen and Wu (2000); Chiari (2008); Chin (1999); Chinnarasri and Wongwise (2006); Choi and Molinas (1993); Church and Zimmermann (2007); Davies et al. (1997); Devauchelle et al. (2007); Dunkerley (2003); Dunkerley (2004); Einstein (1950); Elhanafy et al. (2008); Emmett (1970); Engelund and Fredsoe (1976); Fan and Li (2006); Feng and Michaelides (2002); Fovet et al. (2013); Gao and Abrahams (2004); Garcia and Parker (1993); Gaur and Mathur (2003); Gejadze and Copeland (2006); Gerbeau and Perthame (2001);

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



▶

[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion



Acknowledgements. The authors would like to thank Gilles Belaud (SupAgro Montpellier), Claude Bocquillon (University of Montpellier II) and Pierre-Olivier Malaterre (IRSTEA Montpellier) for fruitful discussions.

References

- 5 Abbott, M. B.: Computational Hydraulics, Pitman, London, UK, 324 pp., 1979.
- Abrahams, A. D. and Parsons, A. J.: Hydraulics of interrill overland flow on stone-covered desert surfaces, *Catena*, 23, 111–140, 1994.
- Achdou, Y., Pironneau, O., and Valentin, F.: Effective boundary conditions for laminar flows over periodic rough boundaries, *J. Comput. Phys.*, 147, 187–218, 1998.
- 10 Afzalimehr, H. and Anttil, F.: Velocity distribution and shear velocity behavior of decelerating flows over a gravel bed, *Can. J. Civil Eng.*, 26, 468–475, 1999.
- Afzalimehr, H., Dey, S. and Rasoulifar, P.: Influence of decelerating flow on incipient motion of a gravel-bed stream, *Sadhana-Acad. P. Eng. S.*, 32, 545–559, 2007.
- Akan, A. O. and Yen, B. C.: Diffusion-wave flood routing in channel networks. *Journal of the Hydraulic Division, ASCE*, vol. 107, No. HY6, 719–732, 1981.
- 15 Aksoy, H. and Kavvas, M. L.: A review of hillslope and watershed scale erosion and sediment transport models, *Catena*, 64, 247–271, 2005.
- Alavian, V., Jirka, G. H., Denton, R. A., Johnson, M. A., and Stefan, H. G.: Density currents entering lakes and reservoirs, *J. Hydraul. Eng.-ASCE*, 118, 1464–1489, 1992.
- 20 Allen, P. A.: Time scales of tectonic landscapes and their sediment routing systems, *Geol. Soc. Spec. Publ.*, 296, 7–28, 2008.
- Alonso, C. V., Bennett, S. J., and Stein, O. R.: Predicting head cut erosion and migration in concentrated flows typical of upland areas, *Water Resour. Res.*, 38, 1303, 2002.
- Alonso, R., Santillana, M., and Dawson, C.: On the diffusive wave approximation of the shallow water equations, *Eur. J. Appl. Math.*, 19, 575–606, 2008.
- 25 Ascough II, J. C., Baffaut, C., Nearing, M. A., and Liu, B. Y.: The WEPP watershed model: I. Hydrology and erosion, *T. ASAE*, 40, 921–933, 1997.
- Audusse, E., Bristeau, M. O., and Decoene, A.: Numerical simulations of 3-D surface flows by a multilayer Saint-Venant model, *Int. J. Numer. Meth. Fl.*, 56, 331–350, 2008.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Aziz, N. M. and Scott, D. E.: Experiments on sediment transport in shallow flows in high gradient channels, *Hydrolog. Sci. J.*, 34, 465–478, 1989.
- Bagnold, R. A.: Experiments on the gravity-free dispersion of large solid spheres in a Newtonian fluid under shear, *Proc. R. Soc. Lon. Ser.-A*, 225, 49–63, 1954.
- 5 Bagnold, R. A.: The flow of cohesionless grains in fluids, *Philos. T. R. Soc. Lond.*, 249, 235–297, 1956.
- Bagnold, R. A.: An approach to the sediment transport problem from general physics, US Geological Survey Professional Paper 442-I, Washington D.C., US Government Printing Office, 42 pp., 1966.
- 10 Bajracharya, K. and Barry, D. A.: Accuracy criteria for linearised diffusion wave flood routing, *J. Hydrol.*, 195, 200–217, 1997.
- Barenblatt, G. I.: *Dimensional Analysis*, Gordon and Breach Science Publishers, New York, USA, 135 pp., 1987.
- Basson, A. and Gerard-Varet, D.: Wall laws for fluid flows at a boundary with random roughness, *Commun. Pur. Appl. Math.*, 61, 941–987, 2008.
- Bates, P. D. and De Roo, A. P. J.: A simple raster-based model for flood inundation simulation, *J. Hydrol.*, 236, 54–77, 2000.
- Bates, P. D., Horritt, M. S., and Fextrell, T. J.: A simple inertial formulation of the shallow water equations for efficient two-dimensional flood inundation model, *J. Hydrol.*, 387, 33–45, 2010.
- 20 Bathurst, J. C.: Flow resistance estimation in mountain rivers, *J. Hydraul. Eng.-ASCE*, 111, 625–643, 1985.
- Bathurst, J. C.: At-a-site variation and minimum flow resistance for mountain rivers, *J. Hydrol.*, 269, 11–26, 2006.
- Bayazit, M.: Free surface flow in a channel of large relative roughness, *J. Hydraul. Res.*, 14, 115–126, 1976.
- 25 Beasley, D. B., Huggins, L. F., and Monke, E. J.: ANSWERS: a model for watershed planning, *T. ASAE*, 938–944, 1980.
- Belaud, G. and Paquier, A.: Sediment diversion through irrigation outlets, *J. Irrig. Drain. E.-ASCE*, 127, 35–38, 2001.
- 30 Beltaos, S., Tang, P., and Rowsell, R.: Ice jam modelling and field data collection for flood forecasting in the Saint John River, Canada, *Hydrol. Process.*, 26, 2535–2545, 2012.
- Bennett, J. P.: Concepts of mathematical modelling of sediment yield, *Water Resour. Res.*, 10, 485–492, 1974.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Bennett, S. J., Alonso, C. V., Prasad, S. N., and Römken, M. J. M.: Experiments on headcut growth and migration in concentrated flows typical of upland areas, *Water Resour. Res.*, 36, 1911–1922, 2000.
- Berger, R. C. and Stockstill, R. L.: Finite-element model for high-velocity channels, *J. Hydraul. Eng.-ASCE*, 121, 710–715, 1995.
- Bertrand, J.: Sur l'homogénéité dans les formules de physique, *C. R. ACAD Sci.*, 86, 916–920, 1878.
- Best, J. L.: On the entrainment of sediment and initiation of bed defects: insights from recent developments within turbulent boundary layer research, *Sedimentology*, 39, 797–811, 1992.
- Beven K. J.: *Rainfall-runoff modelling, the primer*, John Wiley and Sons, Chichester, UK, 360 pp., 2000.
- Blandford, G. E. and Meadows, M. E.: Finite element simulation of nonlinear kinematic surface runoff, *J. Hydrol.*, 119, 335–356, 1990.
- Blöschl, G. and Sivapalan, M.: Scale issues in hydrological modeling: a review, *Hydrol. Process.*, 9, 251–290, 1995.
- Boardman, J.: Soil erosion science: Reflections on the limitation of current approaches, *Catena*, 68, 73–86, 2006.
- Booker, D. J., Sear, D. A., and Payne, A. J.: Modelling three-dimensional flow structures and patterns of boundary shear stress in a natural pool-riffle sequence, *Earth Surf. Proc. Land.*, 26, 553–576, 2001.
- Bounvilay, B.: Transport velocities of bedload particles in rough open channels flows, PhD Thesis, Department of Civil Engineering, Colorado State University, USA, 2003.
- Boussinesq, J.: Essai sur la théorie des eaux courantes, *Mémoires à l'Académie des Sciences*, T23–24, 1–680, 1877.
- Bracken, L. J., Wainwright, J., Ali, G. A., Tetzlaff, D., Smith, M. W., Reaney, S. M., and Roy, A. G.: Concepts of hydrological connectivity: research approaches, pathways and future agendas, *Earth-Sci. Rev.*, 119, 17–34, 2013.
- Bridgman, P. W.: *Dimensional Analysis*, Yale University Press, New Haven, USA, 1922.
- Bridgman, P. W.: *Dimensional Analysis*, Yale Paperbound, New Haven, USA, 113 pp., 1963.
- Buckingham, E.: On physically similar systems; illustrations of the use of dimensional equations, *Phys. Rev.*, 4, 345–376, 1914.
- Bucur, D., Feireisl, E., Necasova, S., and Wolf, J.: On the asymptotic limit of the Navier-Stokes system on domains with rough boundaries, *J. Differ. Equations*, 244, 2890–2908, 2008.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bucur, D., Feireisl, E., and Necasova, S.: Boundary behavior of viscous fluids: influence of wall roughness and friction-driven boundary conditions, Arch. Ration. Mech. An., 197, 117–138, 2010.

5 Buffington, J. M. and Montgomery, D. R.: A systematic analysis of eight decades of incipient motion studies, with special reference to gravel-bedded rivers, Water Resour. Res., 33, 1993–2029, 1997.

Burguete, J., Garcia-Navarro, P., and Murillo, J.: Friction-term Discretization and limitation to preserve stability and conservation in the 1-D shallow-water model: application to unsteady irrigation and river flow, Int. J. Numer. Meth. Fl., 58, 403–425, 2008.

10 Camacho, L. A. and Lees, M. J.: Multilinear discrete lag-cascade model for channel routing, J. Hydrol., 226, 30–47, 1999.

Campisano, A., Creaco, E., and Modica, C.: Experimental and numerical analysis of the scouring effects of flushing waves on sediment deposits, J. Hydrol., 299, 324–334, 2004.

Canovaro, F. and Solari, L.: Dissipative analogies between a schematic macro-roughness arrangement and step-pool morphology, Earth Surf. Proc. Land., 32, 1628–1640, 2007.

Cao, Z., Pender, G., Wallis, S., and Carling, P.: Computational dam-break hydraulics over erodible sediment bed, J. Hydraul. Eng.-ASCE, 130, 689–703, 2004.

Carlier M.: Hydraulique générale et appliquée, Eyrolles, Paris, France, 565 pp., 1980.

Carollo, F. G., Ferro, V., and Termini, D.: Analyzing turbulence intensity in gravel bed channels, J. Hydraul. Eng.-ASCE, 131, 1050–1061, 2005.

20 Casado-Diaz, J., Fernandez-Cara, E., and Simon, J.: Why viscous fluids adhere to rugose walls: a mathematical explanation, J. Differ. Equations, 189, 526–537, 2003.

Cassan, L. and Belaud, G.: Experimental and numerical investigation of flow under sluice gates, J. Hydraul. Eng.-ASCE, 138, 367–373, 2012.

25 Cassan, L., Belaud, G., Baume, J., and Dejean, C.: Seasonal Variation of Velocity Fields in Lined Channels: Impact on Flow Measurement, World Environmental and Water Resources Congress 20–22 May 2012, Albuquerque, NM, USA, 2188–2197, 2012.

Chahinian, N., Moussa, R., Andrieux, P., and Voltz, M.: Comparison of infiltration models to simulate flood events at the field scale, J. Hydrol., 306, 191–214, 2005.

30 Charlier, J.-B.: Fonctionnement et modélisation hydrologique d'un petit bassin versant cultivé en milieu volcanique tropical, PhD Thesis, Université de Montpellier 2, Montpellier, France, 246 pp., 2007.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion



- Charlier, J.-B., Cattani, P., Voltz, M., and Moussa, R.: Transport of a nematocide in surface and ground waters in a tropical volcanic catchment, *J. Environ. Qual.*, 38, 1031–1041, 2009.
- Charpin, J. P. F. and Myers, T. G.: Modelling thin film flow with erosion and deposition, *Adv. Water Resour.*, 28, 761–722, 2005.
- 5 Charru, F.: Selection of the ripple length on a granular bed sheared by a liquid flow, *Phys. Fluids*, 18, 121508, 2006.
- Charru, F., Mouilleron-Arnould, H., and Eiff, O.: Erosion and deposition of particles on a bed sheared by a viscous flow, *J. Fluid Mech.*, 519, 59–80, 2004.
- Chartrand, S. M. and Whiting, P. J.: Alluvial architecture in headwater streams with special emphasis on step-pool topography, *Earth Surf. Proc. Land.*, 25, 583–600, 2000.
- 10 Chen, C. L.: Momentum and energy coefficients based on power-law velocity profile, *J. Hydraul. Eng.-ASCE*, 118, 1571–1584, 1992.
- Chen, R. C. and Wu, J. L.: The flow characteristics between two interactive spheres, *Chem. Eng. Sci.*, 55, 1143–1158, 2000.
- 15 Chiari, M.: Numerical modelling of bedload transport in torrents and mountain streams, PhD Thesis, University of natural resources and applied life sciences, Vienna, Austria, 212 pp., 2008.
- Chin, A.: The morphologic structure of step-pools in mountain streams, *Geomorphology*, 27, 191–204, 1999.
- 20 Chin, A. and Wohl, E.: Toward a theory for step pools in stream channels, *Prog. Phys. Geog.*, 29, 275–296, 2005.
- Chinnarasri, C. and Wongwise, S.: Flow patterns and energy dissipation over various stepped chutes, *J. Irrig. Drain. E.-ASCE*, 132, 70–76, 2006.
- Choi, G. W. and Molinas, A.: Simultaneous solution algorithm for channel network modelling, *Water Resour. Res.*, 29, 321–328, 1993.
- 25 Chow, V. T.: *Open-Channel Hydraulics*, McGraw Hill, New York, USA, 680 pp., 1959.
- Church, M.: Geomorphic thresholds in riverine landscapes, *Freshwater Biol.*, 47, 541–557, 2002.
- Church, M. and Zimmermann, A.: Form and stability of step-pool channels: research progress, *Water Resour. Res.*, 43, W03415, doi:10.1029/2006WR005037, 2007.
- 30 Colebrook, C. F. and White, C. M.: Experiments with fluid friction in roughened pipes, *Proc. R. Soc. Lon. Ser.-A*, 161, 367–381, 1937.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Coleman, N. L.: A theoretical and experimental study of drag and lift forces acting on a sphere resting on a hypothetical streambed, in Proceedings of 12th IAHR Congress, vol. 3, 185–192, Int. Assoc. of Hydraul. Eng. and Res., Madrid, Spain, 1967.
- Cooper, J. R., Aberle, J., Koll, K., and Tait, S. J.: Influence of relative submergence on spatial variance and form-induced stress of gravel-bed flows, *Water Resour. Res.*, 49, 5765–5777, 2013.
- Croke, J. and Mockler, S.: Gully initiation and road-to-stream linkage in a forested catchment, south-eastern Australia, *Earth Surf. Proc. Land.*, 26, 205–217, 2001.
- Cunge, J. A.: On the subject of a flood propagation computation method (Muskingum method), *J. Hydraul. Res.*, 7, 205–230, 1969.
- Cunge, J., Holly, F. M., and Verwey, A.: Practical aspects of computational river hydraulics, Pitman Advanced Publishing Program, London, UK, 420 pp., 1980.
- Daluz Vieira, J. H.: Conditions governing the use of approximations for the Saint-Venant equations for shallow water flow, *J. Hydrol.*, 60, 43–58, 1983.
- Darcy, H.: Recherches expérimentales relatives au mouvement de l'eau dans les tuyaux, Mallet-Bachelier, Paris, France, 268 pp. and atlas, 1857. (in French)
- Davies, A. G., Ribberink, J. S., Temperville, A., and Zyserman, J. A.: Comparisons between sediment transport models and observations made in wave and current flows above plane beds, *Coast. Eng.*, 31, 163–198, 1997.
- de Chézy, A.: Mémoire sur la vitesse de l'eau conduite dans une rigole donnée, Fonds Ancien de l'Ecole Nationale des Ponts et Chaussées – No.847. Reprinted in: *Annales des Ponts et Chaussées*, 60, 1921, 1775.
- de Marsily, G.: Quantitative hydrogeology, Academic Press, Inc., Orlando, FL, USA. 464 pp., 1986.
- de Marsily, G.: On the use of models in hydrology (free opinion), *Revue des Sciences de l'Eau*, 7, 219–234, 1994.
- de Roo, A. P. J., Wesseling, C. G., and Ritsema, C. J.: LISEM: a single event physically-based hydrologic and soil erosion model for drainage basins. I: Theory, input and output, *Hydrol. Process.*, 10, 1107–1117, 1996.
- de Saint-Venant, A. J.-C. B.: Théorie du mouvement non permanent des eaux, avec application aux crues des rivières et à l'introduction des marées dans leur lit, *Comptes-Rendus de l'Académie des Sciences*, 73, 147–154 and 237–240, 1871.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Devauchelle, O., Josserand, C., Lagrée, P.-Y., and Zaleski, S.: Morphodynamic modelling of erodible laminar channels, *Phys. Rev. E*, 76, 056318, doi:10.1103/PhysRevE.76.056318, 2007.

Devauchelle, O., Malverti, L., Lajeunesse, E., Josserand, C., Lagrée, P.-Y., and Métivier, F.: Rhomboid beach pattern : a laboratory investigation, *J. Geophys. Res.*, 115, F02017, doi:10.1029/2009JF001471, 2010.

Dey, S. and Papanicolaou, A.: Sediment threshold under stream flow: a state-of-the-art review, *KSCE J. Civ. Eng.*, 12, 45–60, 2008.

Dittrich, A. and Koll, K.: Velocity field and resistance of flow over rough surfaces with large and small relative roughness, *Int. J. Sediment Res.*, 12, 21–33, 1997.

Drake, T. G., Shreve, R. L., Dietrich, W. E., Whiting, P. J., and Leopold, L. B.: Bedload transport of fine gravel observed by motion picture photography, *J. Fluid Mech.*, 192, 193–217, 1988.

Du Boys, D.: Le Rhône et les rivières à lit affouillables, *Annales des Ponts et Chaussées*, Série 5, 18, 141–195, 1879.

Du Buat, P.: Principes d'hydraulique et de pyrodynamique vérifiés par un grand nombre d'expériences faites par ordre du gouvernement, Firmin Didot Ed., Paris, France, 1779.

Dunkerley, D.: Determining friction coefficients for interrill flows: the significance of flow filaments and backwater effects, *Earth Surf. Proc. Land.*, 28, 475–491, 2003.

Dunkerley, D.: Flow threads in surface run-off: implications for the assessment of flow properties and friction coefficients in soil erosion and hydraulics investigations, *Earth Surf. Proc. Land.*, 29, 1011–1026, 2004.

Einstein, H. A.: The bed-load function for sediment transportation in open channel flows, US Department of Agriculture, Soil Conservation Service, Technical Bulletin No. 1026, 74 pp., 1950.

Einstein, H. A. and Banks, R. B.: Fluid resistance of composite roughness, *Transactions of the American Geophysical Union*, 31, 603–610, 1950.

Elhanafy, H., Copeland, G. J. M., and Gejadze, I. Y.: Estimation of predictive uncertainties in flood wave propagation in a river channel using adjoint sensitivity analysis, *Int. J. Numer. Meth. Fl.*, 56, 1201–1207, 2008.

Emmett, W. W.: The hydraulics of overland flow on hillslopes. United States Geological Survey, Professional Paper 662-A, US Government Printing Office: Washington, DC, USA, 1970.

Engelund, F. and Fredsoe, J.: Sediment transport model for straight alluvial channels, *Nordic Hydrol.*, 7, 293–306, 1976.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Exner, F. M.: Über die Wechselwirkung zwischen Wasser und Geschiebe in Flüssen, Sitzungsberichte der kaiserlichen Akademie der Wissenschaften Wien, Abteilung IIa, 134, 165–205, 1925.

Fan, P. and Li, J. C.: Diffusive wave solutions for open channel flows with uniform and concentrated lateral inflow, Adv. Water Resour., 29, 1000–1019, 2006.

Feng, Z. G. and Michaelides, E. E.: Interparticle forces and lift on a particle attached to a solid boundary in suspension flow, Phys. Fluids, 14, 49–60, 2002.

Ferguson, R. L.: Flow resistance equations for gravel- and boulder-bed streams, Water Resour. Res., 43, W05427, doi:10.1029/2006WR005422, 2007.

Fernandez-Luque, R. and van Beek, R.: Erosion and Transport of Bed-Load Sediment, J. Hydraul. Res., 14, 127–144, 1976.

Ferrick, M. G.: Analysis of wave types, Water Resour. Res., 21, 209–212, 1985.

Ferro, V.: Flow resistance in gravel-bed channels with large-scale roughness, Earth Surf. Proc. Land., 28, 1325–1339, 2003.

Fourier, J. B.: Théorie analytique de la chaleur, Paris, France, 1822.

Fovet, O., Litrico, X., Belaud, G., and Genthon, O.: Adaptive control of algae detachment in regulated canal networks, J. Hydroinform., 15, 321–334, 2013.

French, R. H.: Open-channel hydraulics, McGraw-Hill, New York, USA, 705 pp., 1985.

Froude, W.: Observations and suggestions on the subject of determining by experiment the resistance of ships, Correspondence with the Admiralty, Chelston Cross, December 1868. Reprinted in “The papers of William Froude”, The Institution of Naval Architects, London, UK, 1955, 120–128, 1868.

Gao, P. and Abrahams, A. D.: Bedload transport resistance in rough open-channel flows, Earth Surf. Proc. Land., 29, 423–435, 2004.

Garcia, M. and Parker, G.: Experiments on the entrainment of sediment into suspension by a dense bottom current, J. Geophys. Res.-Oceans, 98, 4793–4807, 1993.

Gaur, M. L. and Mathur, B. S.: Modeling event-based temporal variability of flow resistance coefficient, J Hydrol. Eng., 8, 266–277, 2003.

Gejadze, I. Y. and Copeland, G. J. M.: Open boundary control problem for Navier-Stokes equations including a free surface: adjoint sensitivity analysis, Computer and Mathematics with Applications, 52, 1243–1268, 2006.

Gerard-Varet, D. and Masmoudi, N.: Relevance of the slip condition for fluid flows near an irregular boundary, Commun. Math. Phys., 295, 99–137, 2010.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Gerbeau, J.-F. and Perthame, B.: Derivation of a viscous Saint-Venant system for laminar shallow water; numerical validation, *Discrete Cont. Dyn.-B*, 1, 89–102, 2001.
- Ghavasieh, A.-R., Poulard, C., and Paquier, A.: Effect of roughened strips on flood propagation: assessment on representative virtual cases and validation, *J. Hydrol.*, 318, 121–137, 2001.
- 5 Gimenez, R. and Govers, G.: Interaction between bed roughness and flow hydraulics in eroding rills, *Water Resour. Res.*, 37, 791–799, 2001.
- Gimenez, R., Planchon, O., Silvera, N., and Govers, G.: Longitudinal velocity patterns and bed morphology interaction in a rill, *Earth Surf. Proc. Land.*, 29, 105–114, 2004.
- 10 Gioia, G. and Bombardelli, F. A.: Scaling and similarity in rough channel flows, *Phys. Rev. Lett.*, 88, 014501, doi:10.1103/PhysRevLett.88.014501, 2001.
- Govers, G.: Evaluation of transporting capacity formulae for overland flow, in: *Overland Flow Hydraulics and Erosion Mechanics*, edited by: Parsons A. J. and Abrahams, A. D., UCL Press, London, UK, 243–273, 1992.
- 15 Grant, G. E.: Critical flow constrains flow hydraulics in mobile-bed streams: a new hypothesis, *Water Resour. Res.*, 33, 349–358, 1997.
- Grant, G. E., Swanson, F. J., and Wolman, M. G.: Pattern and origin of stepped-bed morphology in high-gradient streams, *Western Cascades, Oregon, Geol. Soc. Am. Bull.*, 102, 340–352, 1990.
- Gresho, P. M. and Sani, R. L.: *Incompressible Flow and the Finite Element Method*, John Wiley & Sons Inc., New York, NY, USA, 1998.
- 20 Guinot, V. and Cappelaere, B.: Sensitivity analysis of 2-D steady-state shallow water flow. Application to the surface flow model calibration, *Adv. Water Resour.*, 32, 540–560, 2009.
- Gumiere, S. J., Raclot, D., Cheviron, B., Davy, G., Louchart, X., Fabre, J. C., Moussa, R., and Le Bissonnais, Y.: MHYDAS-Erosion : a distributed single-storm water erosion model for agricultural catchment, *Hydrol. Process.*, 25, 1717–1728, 2011.
- 25 Hairsine, P. B. and Rose, C. W.: Modeling water erosion due to overland flow using physical principles. 1. Sheet flow, *Water Resour. Res.*, 28, 237–243, 1992a.
- Hairsine, P. B. and Rose, C. W.: Modeling water erosion due to overland flow using physical principles. 2. Rill flow, *Water Resour. Res.*, 28, 245–250, 1992b.
- 30 Hallema, D. and Moussa, R.: A model for distributed GIUH-based flow routing on natural and anthropogenic hillslopes, *Hydrol. Process.*, 28, 4877–4895, doi:10.1002/hyp.9984, 2013.
- Hauke, G.: A stabilized finite element method for the Saint-Venant equations with application to irrigation, *Int. J. Numer. Meth. Fl.*, 38, 963–984, 2002.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Hayami, S.: On the propagation of flood waves, Disaster Prevention Research Institute Bulletin, 1, 1–16, 2002.
- Henderson, F. M.: Open Channel Hydraulics. MacMillan and Co., New York, USA, 1966.
- Hénine, H., Nédélec, Y., and Ribstein, P.: Coupled modelling of the effect of overpressure on
5 water discharge in a tile drainage system, J. Hydrol., 511, 39–48, 2014.
- Hessel, R.: Consequences of hyperconcentrated flow for process-based soil erosion modelling on the Chinese Loess Plateau, Earth Surf. Proc. Land., 31, 1100–1114, 2006.
- Hessel, R., Jetten, V., and Ganghui, Z.: Estimating Manning's n for steep slopes, Catena, 54, 77–91, 2003.
- 10 Hino, M.: Turbulent flows with suspended particles, J. Hydr. Eng. Div.-ASCE, 89, 161–185, 1963.
- Hjulström, F.: Studies of the morphological activity of rivers as illustrated by the river Fyris, Bulletin of the Geology Institute of Uppsala, 25, 221–527, 1935.
- Hornberger, G. M. and Boyer, E. W.: Recent advances in watershed modelling, US National report to the IUGG, 1991–1994, Rev. Geophys., 33, Supplement S2, 949–957, 1995.
- 15 Horritt, M. S. and Bates, P. D.: Evaluation of 1-D and 2-D numerical models for predicting river flood inundation, J. Hydrol., 268, 87–99, 2002.
- Horton, R. E.: Erosional development of streams and their drainage basins: hydrological approach to quantitative morphology, Bull. Geol. Soc. Am., 56, 275–370, 1945.
- 20 Howard, A. D.: A detachment-limited model of drainage basin evolution, Water Resour. Res., 30, 2261–2285, 1994.
- Ikeda, S.: Incipient motion of sand particles on side slopes, J. Hydraul. Eng., 108, 95–114, 1982.
- Iwagaki Y.: Fundamental studies on the runoff analysis by characteristics, Disaster Prevention Research Institute Bulletin, Kyoto, Japan, 10, 25 pp., 1955.
- 25 Izumi, N. and Parker, G.: Linear stability of channel inception: downstream-driven theory, J. Fluid Mech., 283, 341–363, 1995.
- Jäger, W. and Mikelić, A.: On the roughness-induced effective boundary conditions for an incompressible viscous flow, J. Differ. Equations, 170, 96–122, 2001.
- 30 Jäger, W. and Mikelić, A.: Couette flow over a rough boundary and drag reduction, Commun. Math. Phys., 232, 429–455, 2003.
- Jain, M. K. and Singh, V. P.: DEM-based modelling of surface runoff using diffusive wave equation, J. Hydrol., 302, 107–126, 2005.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Jansons, K. M.: Determination of the macroscopic (partial) slip boundary condition for a viscous flow over a randomly rough surface with a perfect slip microscopic boundary condition, *Phys. Fluids*, 31, 15–17, 1988.

Järvelä, J.: Effect of flexible vegetation on flow structure and resistance, *J. Hydrol.*, 307, 233–241, 2005.

Jetten, V., de Roo, A., and Favis-Mortlock, D.: Evaluation of field-scale and catchment-scale soil erosion models, *Catena*, 37, 521–541, 1999.

Jetten, V., Govers, G., and Hessel, R.: Erosion models: quality of spatial predictions, *Hydrol. Process.*, 17, 887–900, 2003.

Johnson, R. W.: *Handbook of fluid mechanics*, CRC Press, Boca Raton, FL, USA, 1952 pp., 1998.

Julien, P. Y.: *Erosion and sedimentation*, Cambridge University Press, Cambridge, UK, 2010.

Julien, P. Y. and Bounvilay, B.: Velocity of rolling bed load particles, *J. Hydraul. Eng.-ASCE*, 139, 177–186, 2013.

Julien, P. Y. and Simons, D. B.: Sediment transport capacity of overland flow, *Transactions of the American Society of Agricultural Engineers*, 28, 755–762, 1985.

Katopodes, N. D.: On zero-inertia and kinematic waves, *J. Hydraul. Eng.-ASCE*, 108, 1380–1385, 1982.

Keshavarzy, A. and Ball, J. E.: Analysis of the characteristics of rough bed turbulent shear stresses in an open channel, *Stoch. Hydrol. Hydraul.*, 11, 193–210, 1997.

Keskin, M. E. and Agiralioğlu, N.: A simplified dynamic model for flood routing in rectangular channels, *J. Hydrol.*, 202, 302–314, 1997.

Keulegan, G. H.: Laws of turbulent flow in open channels, paper RP1151, *J. Res. Nat. Bur. Stand.*, 21, 707–741, 1938.

Kim, J., Moin, P., and Moser, R.: Turbulence statistics in fully-developed channel flow at low Reynolds number, *J. Fluid Mech.*, 177, 133–166, 1987.

King, H. W. and Brater, E. F.: *Handbook of Hydraulics*, 5th Ed., McGraw-Hill Book Company, New York, USA, 1963.

Kirkby M. J.: *Hillslope Hydrology*, John Wiley and Sons, Chichester, UK, 389 pp., 1978.

Kirkby, M. J.: The stream head as a significant geomorphic threshold, in: *Threshold in Geomorphology*, London: George Allen and Unwin, edited by: Coates, D. R. and Vitek, J. D., 53–73, 1980.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Kline, S. J., Reynolds, W. C., Schraub, F. A., and Runstadler, P. W.: The structure of turbulent boundary layers, *J. Fluid Mech.*, 30, 741–773, 1967.
- Kneller, B. and Buckee, C.: The structure and fluid mechanics of turbidity currents: a review of some recent studies and their geological implications, *Sedimentology*, 47 (Suppl. 1), 62–94, 2001.
- Knisel, W. G.: Creams, a field scale model for chemicals, runoff and erosion from agricultural management systems. U.C.R. Report USDA no. 26, 1980.
- Koussis, A. D.: Theoretical estimation of flood routing parameters, *J. Hydr. Eng. Div.-ASCE*, 104, 109–115, 1978.
- Kramer, C. and Papanicolaou, A.: The Effects of Relative Submergence on Cluster Formation in Gravel Bed Streams, *Impacts of Global Climate Change*, 1–12, 2005.
- Kuchment, L. S.: *Matematicheskoye modelirovaniye rechnogo stoka* (Mathematical Models of River Flow), *Gidrometeoizdat*, Leningrad, Russia, 190 pp., 1972. (in Russian)
- Lafflen, J. M., Lane, L. J., and Foster, G. R.: A new generation in erosion-prediction technology, *J. Soil Water Conserv.*, 46, 34–38, 1991.
- Lagrée, P.-Y.: A triple-deck model of ripple formation and evolution, *Phys. Fluids*, 15, 2355–2368, 2003.
- Lajeunesse, E., Malverti, L., Lancien, P., Armstrong, L., Métivier, F., Coleman, S., Smith, C. E., Davies, T., Cantelli, A., and Parker, G.: Fluvial and submarine morphodynamics of laminar and near-laminar flows, *Sedimentology*, 57, 1–26, 2010.
- Lamarre, H. and Roy, A.: The role of morphology on the displacement of particles in a step-pool river system, *Geomorphology*, 99, 270–279, 2008.
- Lamb, M. P., Dietrich, W. E., and Venditti, J. G.: Is the critical Shields stress for incipient sediment dependent on channel-bed slope?, *J. Geophys. Res.-Earth*, 113, F02008, 2008a.
- Lamb, M. P., Dietrich, W. E., and Sklar, L. S.: A model for fluvial bedrock incision by impacting suspended and bed load sediment, *J. Geophys. Res.*, 113, F03025, 2008b.
- Lane, S. N., Richards, K. S., and Chandler, J. H.: Application of distributed sensitivity analysis to a model of turbulent open-channel flow in a natural river channel, *P. Roy. Soc. Lond. A Mat.*, 447, 49–63, 1994.
- Langhaar, H. L.: *Dimensional Analysis and the Theory of Models*, Wiley, New York, USA, 166 pp., 1951.
- Lawless, M. and Robert, A.: Scales of boundary resistance in coarse-grained channels, turbulent velocity profiles and implications, *Geomorphology*, 39, 221–238, 2001.

- Lawrence, D. S. L.: Macroscale surface roughness and frictional resistance in overland flow, *Earth Surf. Proc. Land.*, 22, 365–382, 1997.
- Lawrence, D. S. L.: Hydraulic resistance in overland flow during partial and marginal surface inundation: experimental observations and modeling, *Water Resour. Res.*, 36, 2381–2393, 2000.
- Leopold, L. B., Bagnold, R. A., Wolman, M. G., and Brush Jr, L. M.: Flow resistance in sinuous or irregular channels, U.S. Geological Survey Professional Paper 282-C, 134 pp., 1960.
- Liggett, J. A. and Woolhiser, D. A.: Difference solutions of the shallow-water equation, *J. Eng. Mech. Div.-ASCE*, 93, 39–71, 1967.
- Lighthill, M. J. and Whitham, G. B.: On kinematic waves, 1. Flood movement in long rivers, *P. R. Soc. A*, 229, 281–316, 1955.
- Lilburne, L.: The scale matcher: A framework for assessing scale compatibility of environmental data and models, PhD Thesis, University of Otago, Dunedin, New Zealand, 392 pp., 2002.
- Lobkovsky, A. E., Orpe, A. V., Molloy, R., Kudrolli, A., and Rothman, D. H.: Erosion of a granular bed driven by laminar fluid flow, *J. Fluid Mech.*, 605, 47–58, 2008.
- Loucks, D. P. and van Beek, E.: Water Resources Systems Planning and Management – An Introduction to Methods, Models and Applications, Studies and Reports in Hydrology series, UNESCO Publishing/WL – Delft Hydraulics, 680 pp., 2005.
- Lyn, D. A.: Turbulence characteristics of sediment-laden flows in open channels, *J. Hydraul. Eng.*, 118, 971–988, 1992.
- Manes, C., Pokrajac, D., Coceal, O., and McEwan, I.: On the significance of form-induced stress in rough wall turbulent boundary layers, *Acta Geophys.*, 56, 845–861, 2008.
- Mangeney, A., Bouchut, F., Thomas, N., Vilotte, J. P., and Bristeau, M. O.: Numerical modelling of self-channeling granular flows and of their levee-channel deposits, *J. Geophys. Res.*, 112, F02017, 2007.
- Manning, R.: On the flow of water in open channels and pipes, *Transactions of the Institution of Civil Engineers of Ireland*, 20, 161–207, 1871.
- Marche, F.: Derivation of a new two-dimensional viscous shallow water model with varying topography, bottom friction and capillary effects, *Eur. J. Mech. B-Fluid.*, 26, 49–63, 2007.
- Meile, T.: Influence of macro-roughness of walls on steady and unsteady flow in a channel, PhD Thesis, Ecole Polytechnique Fédérale de Lausanne, 414 pp., 2007.
- Mendoza, C. and Zhou, D.: Energetics of sediment-laden streamflows, *Water Resour. Res.*, 33, 227–234, 1997.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Merritt, W. S., Letche, R. A., and Jakeman, A. J.: A review of erosion and sediment transport models, *Environ. Modell. Softw.*, 18, 761–799, 2003.
- Métivier, F. and Meunier, P.: Input and output flux correlations in an experimental braided stream: implications on the dynamics of the bed load transport, *J. Hydrol.*, 271, 22–38, 2003.
- 5 Meyer-Peter, E. and Müller, R.: Formulas for bed-load transport, *Proceedings of the Second Meeting of IAHR*, Stockholm, Sweden, 39–64, 1948.
- Milliman, J. D. and Syvitski, J. P. M.: Geomorphic/tectonic control of sediment discharge to the ocean: the importance of small mountainous rivers, *J. Geol.*, 525–544, 1992.
- 10 Montgomery, D. R. and Buffington, J. M.: Channel-reach morphology in mountain drainage basins, *Geol. Soc. Am. Bull.*, 109, 596–611, 1997.
- Morgan, R. P. C., Quinton, J. N., Smith, R. E., Govers, G., Poesen, J., Auerwald, K., Chisci, G., Torri, D., and Styczen, M. E.: The European Soil Erosion Model (EUROSEM): a dynamic approach for predicting sediment transport from fields and small catchments, *Earth Surf. Proc. Land.*, 23, 527–544, 1998.
- 15 Moussa, R.: Analytical Hayami solution for the diffusive wave flood routing problem with lateral inflow, *Hydrol. Process.*, 10, 1209–1227, 1996.
- Moussa, R. and Bocquillon, C.: Criteria for the choice of flood-routing methods in natural channels, *J. Hydrol.*, 186, 1–30, 1996a.
- Moussa, R. and Bocquillon, C.: Algorithms for solving the diffusive wave flood routing equation, *Hydrol. Process.*, 10, 105–124, 1996b.
- 20 Moussa, R. and Bocquillon, C.: Approximation zones of the Saint-Venant equations f flood routing with overbank flow, *Hydrol. Earth Syst. Sci.*, 4, 251–260, doi:10.5194/hess-4-251-2000, 2000.
- Moussa, R. and Bocquillon, C.: On the use of the diffusive wave for modelling extreme flood events with overbank flow in the floodplain, *J. Hydrol.*, 374, 116–135, 2009.
- 25 Moussa, R., Voltz, M., and Andrieux, P.: Effects of the spatial organization of agricultural management on the hydrological behaviour of a farmed catchment during flood events, *Hydrol. Process.*, 16, 393–412, 2002.
- Moussa, R., Chahinian, N., and Bocquillon, C.: Distributed hydrological modelling of a Mediterranean mountainous catchment – model construction and multi-site validation, *J. Hydrol.*, 337, 35–51, 2007.
- 30

- Mügler, C., Planchon, O., Patin, J., Weill, S., Silvera, N., Richard, P., and Mouche, E.: Comparison of roughness models to simulate overland flow and tracer transport experiments under simulated rainfall at plot scale, *J. Hydrol.*, 402, 25–40, 2010.
- Mulder, T. and Alexander, J.: The physical character of subaqueous sedimentary density flows and their deposits, *Sedimentology*, 48, 269–299, 2001.
- Munier, S., Litrico, X., Belaud, G., and Malaterre, P.-O.: Distributed approximation of open-channel flow routing accounting for backwater effects, *Adv. Water Resour.*, 31, 1590–1602, 2008.
- Muñoz-Carpena, R., Parsons, J. E., and Gillian, J. W.: Modelling hydrology and sediment transport in vegetative filter strips, *J. Hydrol.*, 214, 111–129, 1999.
- Myers, T. G.: Unsteady laminar flow over a rough surface, *J. Eng. Math.*, 46, 111–126, 2003.
- Nakagawa, H. and Nezu, I.: Prediction of the contributions to the Reynolds stress from bursting events in open channel flows, *J. Fluid Mech.*, 80, 99–128, 1977.
- Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models, part I – A discussion of principles, *J. Hydrol.*, 10, 282–290, 1970.
- Navier, C. L. M. H.: *Mémoire sur les lois du mouvement des fluides*, Mémoires de l'Académie Royale des Sciences de l'Institut de France, 6, 389–440, 1822.
- Navier, C. L. M. H.: *Sur les lois de l'équilibre et du mouvement des corps élastiques*, Mémoires de l'Académie Royale des Sciences de l'Institut de France, 7, 375–393, 1827.
- Neill, C. R.: A re-examination of the beginning of movement for coarse granular bed materials. Report No. 68, Hydraulic Research Station, Wallingford, England, UK, 1968.
- Nelson, J. M., Shreve, R. L., McLean, D. C. and Drake, T. G.: Role of near-bed turbulence structure in bed load transport and bed form mechanics, *Water Resour. Res.*, 31, 2071–2086, 1995.
- Nepf, H.: Drag, turbulence, and diffusion in flow through emergent vegetation, *Water Resour. Res.*, 35, 479–489, 1999.
- Newton, I.: *Philosophiæ Naturalis – Principia Mathematica*, 1st ed., London, UK, 512 pp., 1687.
- Nezu, I. and Nakagawa, H.: *Turbulence in open-channel flows*, Balkema, Rotterdam, the Netherlands, 286 pp., 1993.
- Nikora, V. and D. Goring: Flow turbulence over fixed and weakly mobile gravel beds, *J. Hydraul. Eng.*, 126, 679–690, 2000.
- Nikora, V., Goring, D., McEwan, I., and Griffiths, G.: Spatially-averaged open-channel flow over a rough bed, *J. Hydraul. Eng.-ASCE*, 127, 123–133, 2001.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Nikora, V., Larned, S., Nikora, N., Debnath, K., Cooper, G., and Reid, M.: Hydraulic resistance due to aquatic vegetation in small streams: field study, *J. Hydraul. Eng.*, 134, 1326–1332, 2008.
- Nino, Y., Lopez, F., and Garcia, M.: Threshold for particle entrainment into suspension, *Sedimentology*, 50, 247–263, 2003.
- Nord, G. and Esteves, M.: The effect of soil type, meteorological forcing and slope gradient on the simulation of internal erosion processes at the local scale, *Hydrol. Process.*, 24, 1766–1780, 2010.
- Ouriémi, M., Aussillous, P., Medale, M., Peysson, Y., and Guazzelli, E.: Determination of the critical Shields number for particle erosion in laminar flow, *Phys. Fluids*, 19, 061706, 2007.
- Paiva, R. C. D., Collischonn, W., and Buarque, D. C.: Validation of a full hydrodynamic model for large-scale hydrologic modelling in the Amazon, *Hydrol. Process.*, 27, 333–346, 2013.
- Panton, R. L.: *Incompressible Flow*, John Wiley and Sons, New York, USA, 780 pp., 1984.
- Paola, C., Heller, P. L., and Angevine, C. L.: The large-scale dynamics of grain-size variation in alluvial basins. I: Theory, *Basin Res.*, 4, 73–90, 1992.
- Paola, C., Straub, K., Mohrig, D., and Reinhardt, L.: The “unreasonable effectiveness” of stratigraphic and geomorphic experiments, *Earth-Sci. Rev.*, 97, 1–43, 2009.
- Papanicolaou, A. N., Diplas, P., Dancey, C. L., and Balakrishnan, M.: Surface roughness effects in near-bed turbulence: implications to sediment entrainment, *J. Eng. Mech.-ASCE*, 127, 211–218, 2001.
- Parker, G.: On the cause and characteristic scales of meandering and braiding in rivers, *J. Fluid Mech.*, 76, 457–480, 1976.
- Parker, G.: Self-formed straight rivers with equilibrium banks and mobile bed. Part 1: the sand-silt river, *J. Fluid Mech.*, 89, 109–125, 1978a.
- Parker, G.: Self-formed straight rivers with equilibrium banks and mobile bed. Part 2: the gravel river, *J. Fluid Mech.*, 89, 127–146, 1978b.
- Parker, G. and Coleman, N. L.: Simple model of sediment-laden flows, *J. Hydraul. Eng.*, 112, 356–375, 1986.
- Parker, G., Fukushima, Y., and Pantin, H. M.: Self-accelerating turbidity currents, *J. Fluid Mech.*, 171, 145–181, 1986.
- Parsons, A. J. and Abrahams, A. D.: *Overland flow: hydraulics and erosion mechanics*, Chapman and Hall, New York, USA, 438 pp., 1992.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Parsons, A. J., Wainwright, J., Abraham, A. D., and Simanton, J. R.: Distributed dynamic modelling of interrill overland flow. *Hydrol. Process.*, 11, 1833–1859, 1997.
- Parsons, A. J., Brazier, R. E., Wainwright, J., and Powell, M. E.: Scale relationships in hillslope runoff and erosion, *Earth Surf. Proc. Land.*, 31, 1384–1393, 2003.
- 5 Perkins, S. P. and Koussis, A. D.: Stream-aquifer interaction model with diffusive wave routing, *J. Hydraul. Eng.*, 122, 210–218, 1996.
- Perumal, M. and Price, R. K.: A fully mass conservative variable parameter McCarthy–Muskingum method: Theory and verification, *J. Hydrol.*, 502, 89–102, 2013.
- Peyras, L., Royet, P., and Degoutte, G.: Flow and energy dissipation over stepped gabion weirs, *J. Hydraul. Eng.-ASCE*, 118, 707–717, 1992.
- 10 Pickup, G. and Marks, A.: Regional scale sedimentation process models from airborne gamma ray remote sensing and digital elevation data, *Earth Surf. Proc. Land.*, 26, 273–293, 2001.
- Pokrajac, D., Campbell, L. J., Nikora, V., Manes, C., and McEwan, I.: Quadrant analysis of persistent spatial velocity perturbations over square-bar roughness, *Experiments in Fluids*, 42, 413–423, 2007.
- 15 Polyakov, V. O. and Nearing, M. A.: Sediment transport in rill flow under deposition and detachment conditions, *Catena*, 51, 33–43, 2003.
- Ponce, V. M.: Generalized diffusive wave equation with inertial effects, *Water Resour. Res.*, 26, 1099–1101, 1990.
- 20 Ponce, V. M. and Simons, D. B.: Shallow wave propagation in open channel flow, *J. Hydr. Eng. Div.-ASCE*, 103, 1461–1476, 1977.
- Ponce, V. M., Li, R. M., and Simons, D. B.: Applicability of kinematic and diffusion models, *J. Hydr. Eng. Div.-ASCE*, 104, 353–360, 1978.
- Ponce, V. M., Lohani, A. K., and Scheyhing, C.: Analytical verification of Muskingum-Cunge routing, *J. Hydrol.*, 174, 235–241, 1996.
- 25 Powell, D. M.: Flow resistance in gravel-bed rivers: progress in research, *Earth-Sci. Rev.*, 136, 301–338, 2014.
- Prahl, L., Holzer, A., Arlov, D., Revstedt, J., Sommerfeld, M., and Fuchs, L.: On the interaction between two fixed spherical particles, *Int. J. Multiphas. Flow*, 33, 707–725, 2007.
- 30 Priezjev, N. and Troian, S.: Influence of periodic wall roughness on the slip behaviour at liquid/solid interfaces: molecular-scale simulations versus continuum predictions, *J. Fluid Mech.*, 554, 25–46, 2006.

- Prosser, I. P. and Rustomji, P.: Sediment transport capacity for overland flow, *Prog. Phys. Geog.*, 24, 179–193, 2000.
- Prosser, I. P., Dietrich, W. E., and Stevenson, J.: Flow resistance and sediment transport by concentrated overland flow in a grassland valley, *Geomorphology*, 13, 71–86, 1995.
- 5 Rathburn, S. and Wohl, E.: Predicting sediment dynamics along a pool-riffle mountain channel, *Geomorphology*, 55, 111–124, 2003.
- Raupach, M. R.: Conditional statistics of Reynolds stress in rough-wall and smooth-wall turbulent boundary layers, *J. Fluid Mech.*, 108, 363–382, 1981.
- Rauws, G.: Laboratory experiments on resistance to overland flow due to composite roughness, 10 *J. Hydrol.*, 103, 37–52, 1980.
- Rayleigh: *Theory of sound*, Macmillan, London, UK, 1877.
- Reddy, K. V., Eldho, T. I., Rao, E. P., and Hengade, N.: A kinematic-wave-based distributed watershed model using FEM, GIS and remotely sensed data, *Hydrol. Process.*, 21, 2765–2777, 2007.
- 15 Reynolds, O.: An experimental investigation of the circumstances which determine whether the motion of water shall be direct or sinuous, and of the law of resistance in parallel channels, *Philos. T. R. Soc. Lond.*, 174, 935–982, 1883.
- Reynolds, O.: On the dynamical theory of incompressible viscous fluids and the determination of the criterion, *Philos. T. R. Soc. Lond.*, 186, 123–164., 1895.
- 20 Riabouchinsky, D.: *Méthode des variables de dimension zero et son application en aérodynamique*, L'aérophile, 19, 407–408, 1911.
- Richardson, S.: On the no-slip boundary condition, *J. Fluid Mech.*, 59, 707–719, 1973.
- Ritchie, J. C. and McHenry, J. R.: Application of Radioactive Fallout Cesium-137 for Measuring soil erosion and sediment accumulation rates and patterns: A review, *J. Environ. Qual.*, 19, 215–233, 1990.
- 25 Roche, N.: *Modélisation du ruissellement sur surfaces rugueuses*, PhD Thesis, Université Joseph Fourier, Grenoble, France, 213 pp., 2006.
- Rodellar, J., Gomez, M., and Bonet, L.: Control method for on-demand operation of open-channel flow, *J. Irrig. Drain. E.-ASCE*, 119, 225–241, 1993.
- 30 Romanowicz, R. J., Dooge, J. C. I., and Kundzewicz, Z. W.: Moments and cumulants of linearized St. Venant equation, *Adv. Water Resour.*, 11, 92–100, 1988.
- Rosgen, D. L.: A classification of natural rivers, *Catena*, 22, 169–199, 1994.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Roux, H. and Dartus, D.: Use of parameter optimization to estimate a flood wave: Potential applications to remote sensing of rivers, *J. Hydrol.*, 328, 258–266, 2006.
- Rutschmann, P. and Hager, W. H.: Diffusion of floodwaves, *J. Hydrol.*, 178, 19–32, 1996.
- Saleh, F., Ducharme, A., Flipo, N., Oudin, L., and Ledoux, E.: Impact of river bed morphology on discharge and water levels simulated by a 1-D Saint–Venant hydraulic model at regional scale, *J. Hydrol.*, 476, 169–177, 2013.
- Sander, G. C., Parlange, J. Y., Barry, D. A., Parlange, M. B., and Hogarth, W. L.: Limitation of the transport capacity approach in sediment transport modeling, *Water Resour. Res.*, 43, W02403, doi:10.1029/2006WR005177, 2007.
- Sau, J., Malaterre, P.-O., and Baume, J.-P.: Sequential Monte-Carlo state estimation of an irrigation canal, *C. R. Mecanique*, 338, 212–219, 2010.
- Schlichting H.: Experimentelle Untersuchungen zum Rauigkeitsproblem, *Ing. Arch.* 7, 1–34. (Engl. transl., 1937. Experimental investigation of the problem of surface roughness. NACA TM 823), 1936.
- Schmeeckle, M. W. and Nelson, J. M.: Direct numerical simulation of bedload transport using a local, dynamic boundary condition, *Sedimentology*, 50, 279–301, 2003.
- Schmeeckle, M. W., Nelson, J. M., and Shreve, R. L.: Forces on stationary particles in near-bed turbulent flows, *J. Geophys. Res.-Earth*, 112, F02003, doi:10.1029/2006JF00536, 2007.
- Sear, D. A.: Sediment transport processes in pool-riffle sequences, *Earth Surf. Proc. Land.*, 21, 241–262, 1996.
- Sen, D. J. and Garg, N. K.: Efficient algorithm for generally varied flows in channel networks, *J. Irrig. Drain. E.-ASCE*, 128, 351–357, 2002.
- Sharifi, S., Sterling, M., and Knight, D. W.: A novel application of a multi-objective evolutionary algorithm in open channel flow modelling, *J. Hydroinform.*, 11, 31–50, 2009.
- Sheets, B., Hickson, T. A., and Paola, C.: Assembling the stratigraphic record: Depositional patterns and time-scales in an experimental alluvial basin, *Basin Res.*, 14, 287–301, 2002.
- Shields, A.: Anwendung der Ähnlichkeitsmechanik und der Turbulenzforschung auf die Geschiebebewegung, *Mitteilungen der Preußischen Versuchsanstalt für Wasserbau und Schiffbau No.6*, Berlin, Germany. (English translation by Ott, W. P. and van Uchelen, J. C., Hydrodynamics Laboratory Publication No. 167, Hydrodynamics Laboratory of the California Institute of Technology, Pasadena, USA), 1936.
- Simpson, G. and Castellort, S.: Coupled model of surface water flow, sediment transport and morphological evolution, *Computers and Geosciences*, 32, 1600–1614, 2006.

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



▶

[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion



- Sivakumaran, N. S. and Yevjevich, V.: Experimental verification of the Dressler curved-flow equations, *J. Hydraul. Res.*, 25, 373–391, 1987.
- Sivapalan, M., Bates, B. C., and Larsen, J. E.: A generalized, non-linear, diffusion wave equation: theoretical development and application, *J. Hydrol.*, 192, 1–16, 1997.
- 5 Sklar, L. S. and Dietrich, W. E.: A mechanistic model for river incision into bedrock by saltating bed load, *Water Resour. Res.*, 40, W06301, doi10.1029/2003WR002496, 2004.
- Slaymaker, O.: Towards the identification of scaling relations in drainage basin sediment budgets, *Geomorphology*, 80, 8–19, 2006.
- Smart, G. M.: Sediment transport formula for steep channels, *J. Hydraul. Eng.*, 110, 267–276, 1984.
- 10 Smith, J. D. and McLean S. R.: Spatially averaged flow over a wavy surface, *J. Geophys. Res.*, 82, 1735–1746, 1977.
- Smith, M. W., Cox, N. J., and Bracken, L. J.: Applying flow resistance equations to overland flows, *Prog. Phys. Geog.*, 31, 363–387, 2007.
- 15 Smith, R. E., Goodrich, D. C., Woolhiser, D. A., and Unkrich, C. L.: KINEROS – a kinematic runoff and erosion model, in: *Computer Models of Watershed Hydrology*, edited by: Singh, V. P., Water Resources: Littleton, CO, USA, 697–732, 1995.
- Stein, O. R., Alonso, C. V., and Julien, P. Y.: Mechanics of jet scour downstream of a headcut, *J. Hydraul. Res.*, 31, 723–738, 1993.
- 20 Stevenson, P., Thorpe, R. B., and Davidson, J. F.: Incipient motion of a small particle in the viscous boundary layer at a pipe wall, *Chem. Eng. Sci.*, 57, 4505–4520, 2002.
- Stoker, J. J.: *Water waves, the mathematical theory with application*, Wiley, Interscience Publishers, New York, USA, 357 pp., 1957.
- Stokes, G. G.: On the theories of internal friction of fluids in motion, *Transactions of the Cambridge Philosophical Society*, 8, 287–319. 1845.
- 25 Strahler, A. N.: The nature of induced erosion and aggradation. in: *Man's Role in Changing the Face of the Earth*, edited by: Thomas, W. L., University of Chicago Press, Chicago, USA, 621–638, 1956.
- Sundaresan, S., Eaton, J., Koch, D. L., and Ottino, J. M.: Appendix 2: Report of study group on disperse flow, *Int. J. Multiphas. Flow*, 29, 1069–1087, 2003.
- 30 Sutherland, A. J.: Proposed mechanism for sediment entrainment by turbulent flows, *J. Geophys. Res.*, 72, 6183–6194, 1967.

- Syvitski, J. P. M. and Milliman, J. D.: Geology, geography, and humans battle for dominance over the delivery of fluvial sediment to the coastal ocean, *J. Geol.*, 115, 1–19, 2007.
- Tatard, L., Planchon, O., Wainwright, J., Nord, G., Favis-Mortlock, D., Silvera, N., Ribolzi, O., Esteves, M., and Huang, C. H.: Measurement and modeling of high-resolution flow-velocity data under simulated rainfall on a low-slope sandy soil, *J. Hydrol.*, 348, 1–12, 2008.
- Tiemeyer, B., Moussa, R., Lennartz, B., and Voltz, M.: MHYDAS-DRAIN : a spatially distributed model for small, artificially drained lowland catchments, *Ecol. Model.*, 209, 2–20, 2007.
- Todini, E. and Bossi, A.: PAB (Parabolic and Backwater): an unconditionnally stable flood routing scheme particularly suited for real time forecasting and control, *J. Hydraul. Res.*, 24, 405–424, 1986.
- Trigg, M. A., Wilson, M. D., Bates, P. D., Horritt, M. S., Alsdorf, D. E., Forsberg, B. R., and Vega, M. C.: Amazon flood wave hydraulics, *J. Hydrol.*, 374, 92–105, 2009.
- Turek, S.: *Efficient Solvers for Incompressible Flow Problems*, Springer, Berlin, Germany, 352 pp., 1999.
- Van Heijst, M. W. I. M., Postma, G., Meijer, X. D., Snow, J. N., and Anderson, J. B.: Quantitative analogue flume-model study of River-shelf systems: principles and verification exemplified by the late quaternary Colorado River-delta evolution, *Basin Res.*, 13, 243–268, 2001.
- Van Maren, D. S.: Grain size and sediment concentration effects on channel patterns of silt-laden rivers, *Sediment. Geol.*, 202, 297–316, 2007.
- Van Rijn, L. C.: Sediment transport, part I: bed load transport, *J. Hydraul. Eng.*, 110, 1431–1456, 1984a.
- Van Rijn, L. C.: Sediment transport, part II: suspended load transport, *J. Hydraul. Eng.*, 110, 1613–1641, 1984b.
- Vanoni, V. A.: Transportation of suspended sediment by water, *Trans. Annu. Meet. Amer.*, 111, 67–133, 1946.
- Vaschy, A.: Sur les lois de similitude en physique, *Annales Télégraphiques*, 19, 25–28, 1892.
- Vieux, B. E., Cui, Z., and Gaur, A.: Evaluation of a physics-based distributed hydrologic model for flood forecasting, *J. Hydrol.*, 298, 155–177, 2004.
- Wainwright, J., Parsons, A. J., Müller, E. N., Brazier, R. E., Powell, D. M., and Fenti, B.: A transport-distance approach to scaling erosion rates: I. Background and model development, *Earth Surf. Proc. Land.*, 33, 813–826, 2008.
- Walling, D. E.: The sediment delivery problem, *J. Hydrol.*, 65, 209–237, 1983.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Wang, G. T. and Chen, S.: A semi-analytical solution of the Saint-Venant equations for channel flood routing, *Water Resour. Res.*, 39, 1076, doi:10.1029/2002WR001690, 2003.
- Wang, G. T., Yao, C., Okoren, C., and Chen, S.: 4-Point FDF of Muskingum method based on the complete St Venant equations, *J. Hydrol.*, 324, 339–349, 2006.
- 5 Wang, L., Wu, J. Q., Elliot, W. J., Fiedler, F. R., and Lapin, S.: Linear diffusion wave channel routing using a discrete Hayami convolution method, *J. Hydrol.*, 509, 282–294, 2014.
- Wang, Y., Straub, K. M., and Hajek, E. A.: Scale-dependent compensational stacking: an estimate of time scales in channelized sedimentary deposits, *Geology*, 39, 811–814, 2011.
- Weichert, R.: Bed morphology and stability of steep open channels, PhD Thesis, Technische Hochschule, Zürich, Switzerland, 265 pp., 2006.
- 10 Weisbach, J.: *Lehrbuch der Ingenieur- und Maschinen-Mechanik*, Vieweg und Sohn eds., Braunschweig, Germany, 1845.
- Whitham, G. B.: *Linear and nonlinear waves*, John Wiley and Sons Inc., New York, USA, 1999.
- Wiberg, P. L. and Smith, J. D.: Calculations of the critical shear stress for motion of uniform and heterogeneous sediments, *Water Resour. Res.*, 23, 1471–1480, 1987.
- 15 Williams G. P.: Flume width and water depth effects in sediment-transport experiments, US Geological Survey Professional Paper 562-H, 1970.
- Wu, R. M. and Lee, D. J.: Hydrodynamic drag on non-spherical floc and free-settling test, *Water Research*, 35, 3226–3234, 2001.
- 20 Yager, E. M., Kirchner, J. W., and Dietrich, W. E.: Calculating bed load transport in steep boulder bed channels, *Water Resour. Res.*, 43, W07418, doi:10.1029/2006WR005432, 2007.
- Yalin, M. S.: *Mechanics of sediment transport*, Pergamon Press, Oxford, UK, 2nd Ed., 298 pp., 1977.
- Yang, C. T.: Unit stream power and sediment transport, *J. Hydr. Div.-ASCE*, 100, 1269–1272, 1974.
- 25 Zanke, U. C. E.: On the influence of turbulence on the initiation of sediment motion, *Int. J. Sediment Res.*, 18, 17–31, 2003.
- Zhou, J. G.: Velocity-depth coupling in shallow-water flows, *J. Hydraul. Eng.*, 121, 717–724, 1995.
- 30 Zimmermann, A. and Church, M.: Channel morphology, gradient profiles and bed stresses during flood in a step-pool channel, *Geomorphology*, 40, 311–327, 2001.

Zoppou, C. and O'Neill, I. C.: Criteria for the choice of flood routing methods in natural channels, Hydrology and Water Resources, Symposium, 11–13 May, 1982, Melbourne, Australia, 75–81, 1982.

HESSD

12, 9091–9155, 2015

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1-D free-surface flow and erosion issues in hydrology

B. Chevion and
R. Moussa

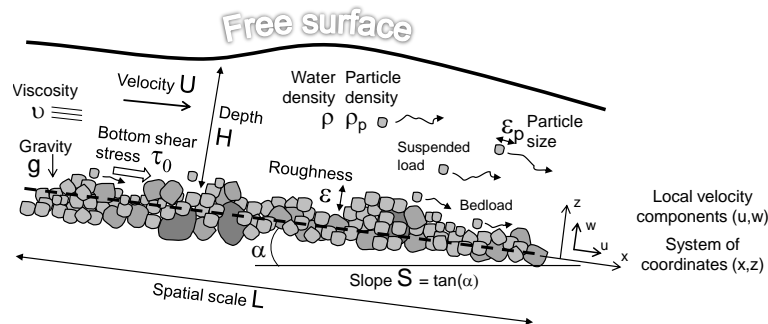


Figure 1. Quantities most often used in the literature of free-surface flow and erosion modelling, with explicit reference to the (L, T, H) spatiotemporal scales of interest. This review is limited to 1-D (x) spatial representations for simplicity, focusing on the streamwise (x) component of the mass and momentum conservation equations. The streamwise length (L) and depth-averaged velocity (U) suggest a natural time scale $T_0 = L/U$ for the propagation of information, waves or perturbations, to be compared with the time scales (T) opted for in the literature.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

B. Cheviron and
R. Moussa

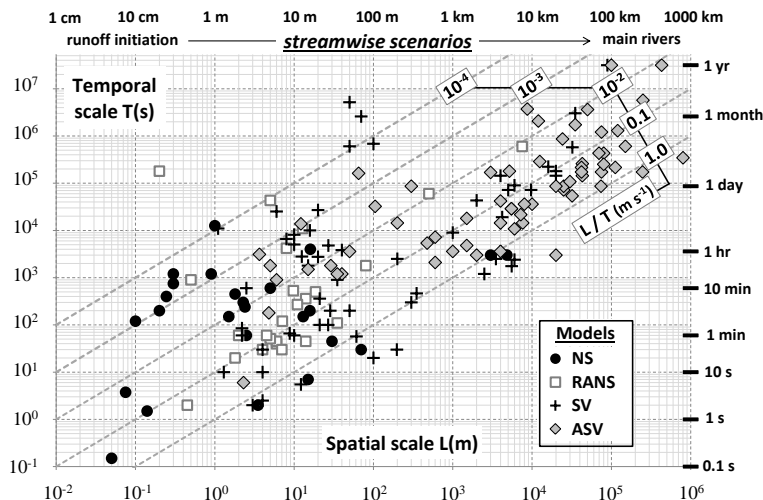


Figure 2. How increasing (L, T) spatiotemporal scales of the flow domain tend to be associated with decreasing complexity in the choice of flow models, sorted here into four levels of refinement: Navier-Stokes (NS), Reynolds-Averaged Navier-Stokes (RANS), Saint-Venant (SV) or Approximations to Saint-Venant (ASV). A transverse analysis involves forming L/T ratios, searching for clues to model selection according to these “system evolution velocities” or governed by flow typologies that would exhibit specific L/T ratios. This figure was assembled from information available in the studies cited in Appendix A.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

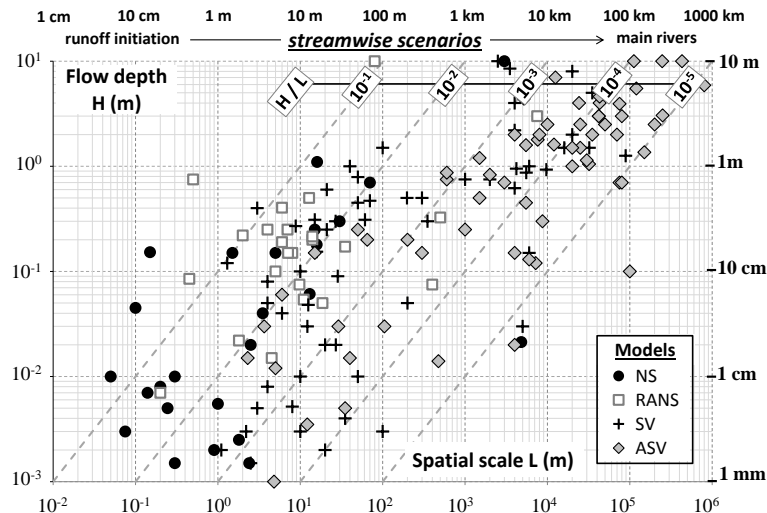


Figure 3. How increasing (L, H) spatiotemporal scales of the flow domain tend to be associated with decreasing complexity in the choice of flow models, sorted here into four levels of refinement: Navier-Stokes (NS), Reynolds-Averaged Navier-Stokes (RANS), Saint-Venant (SV) and Approximations to Saint-Venant (ASV). A transverse analysis involves forming H/L ratios, searching for clues to model selection according to the “fineness” of the flow or governed by flow typologies that would exhibit specific H/L ratios. This figure was assembled from information available in the studies cited in Appendix A.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

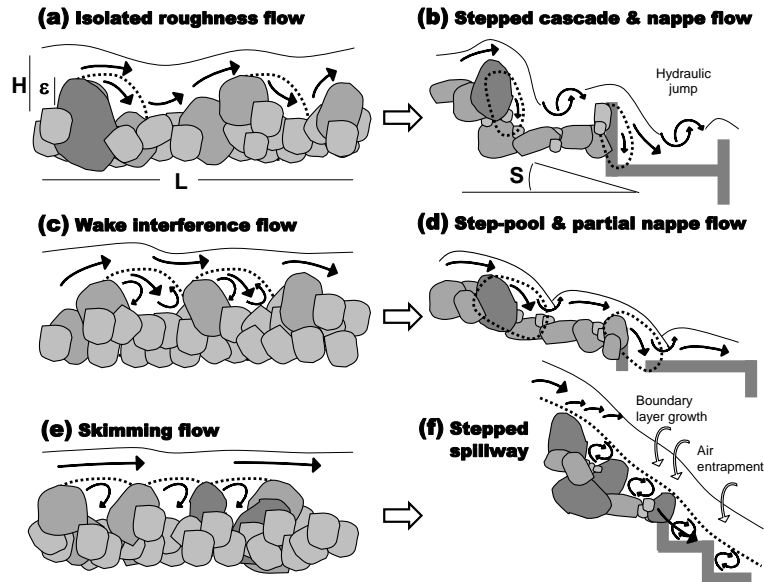


Figure 4. Analogies in flow characteristics, retardation processes and energy dissipation structures for very different flow typologies: streams **(a, c, e)** and high-gradient natural or man-made stepped flows **(b, d, f)**. The combined values of flow depth (H), slope (S) and inundation ratio ($\Lambda_z = H/\varepsilon$, where ε is the roughness size) appear as strong geometrical controls over flow characteristics and typologies.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

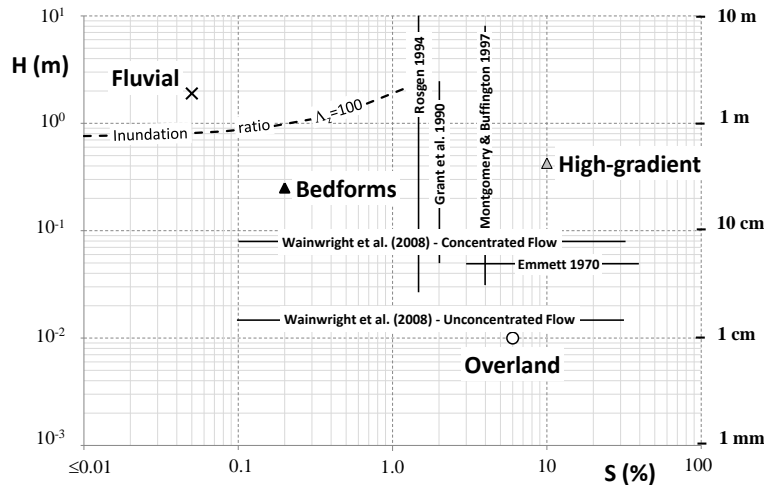


Figure 5. Median position of the studies belonging to the “Overland”, “High-gradient”, “Bedforms” and “Fluvial” flow typologies, plotted on the (S : slope, H : water depth) plane, also tracing an approximate additional criterion on the inundation ratio ($\Lambda_z = H/\varepsilon$, where ε is the size of the bed asperities) to separate the Fluvial and Bedforms types of flow. This figure was assembled from information available in the studies cited in Appendix A.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

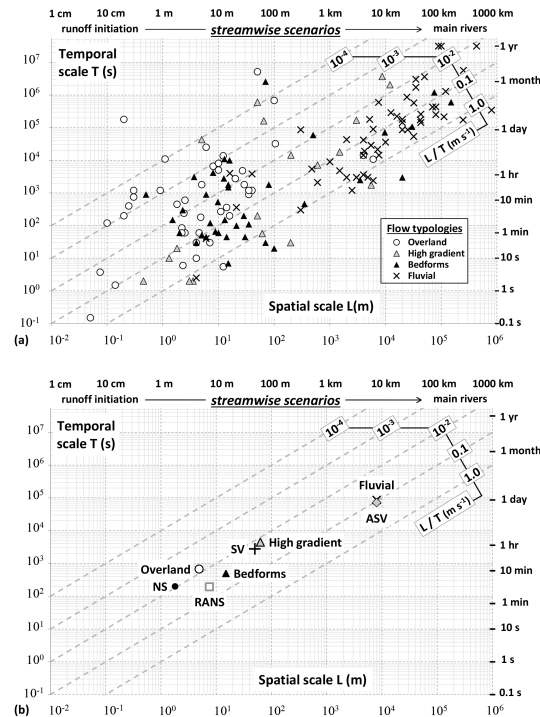


Figure 6. Position of the flow typologies in the (L, T) plane for the studies listed in Appendix A **(a)**. Median positions for the choice of free-surface flow models (Navier-Stokes: NS, Reynolds-Averaged Navier-Stokes: RANS, Saint-Venant: SV or Approximations to Saint-Venant: ASV) and the study of flow typologies (Overland, High-gradient, Bedforms or Fluvial) across scales in the (L, T) plane **(b)**. A transverse analysis involves forming L/T ratios, searching for clues to model selection according to these “system evolution velocities” or governed by flow typologies that would exhibit specific L/T ratios.

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

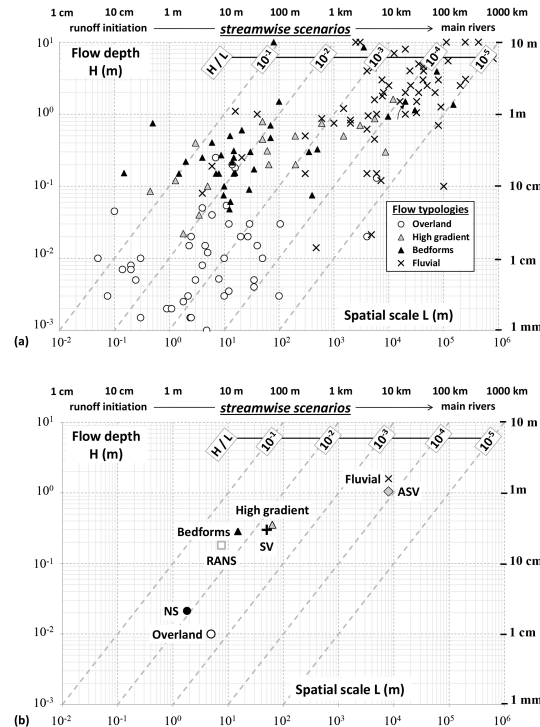


Figure 7. Position of the flow typologies in the (L, H) plane for the studies listed in Appendix A (a). Median positions for the choice of free-surface flow models (Navier-Stokes: NS, Reynolds-Averaged Navier-Stokes: RANS, Saint-Venant: SV or Approximations to Saint-Venant: ASV) and the study of flow typologies (Overland, High-gradient, Bedforms or Fluvial) across scales in the (L, H) plane (b). A transverse analysis involves forming H/L ratios, searching for clues to model selection according to these “finenesses” of the flow domain or governed by flow typologies that would exhibit specific H/L ratios.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

1-D free-surface flow and erosion issues in hydrology

B. Cheviron and
R. Moussa

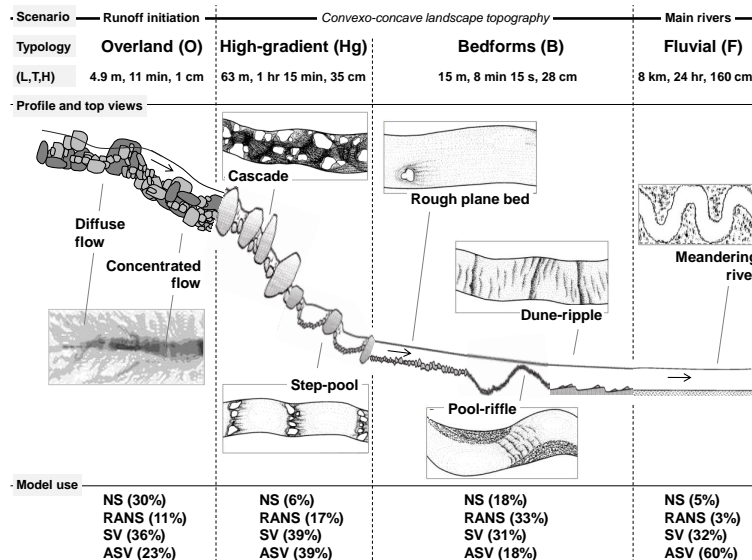


Figure 8. Streamwise scenario for a convexo-concave landscape topography, from runoff initiation to the main rivers, across flow typologies (Overland *O*, High-gradient *Hg*, Bedforms *B* or Fluvial *F*) and spatiotemporal scales (L, T, H). The indicated L, T and H values are the median values for the spatial scale, time scale and water depth, respectively, from the literature cited in Appendix A (Figs. 6 and 7). All sketches and drawings for the High-gradient and Bedforms typologies were taken from Montgomery and Buffington (1997). The top view for Overland flow is from Tatard et al. (2008) and that of a meandering river from Rosgen (1994). The “model use” panel indicates the model refinement most used (Navier-Stokes NS, Reynolds-Averaged Navier-Stokes RANS, Saint-Venant SV or Approximations to Saint-Venant ASV) to describe a given flow typology in the cited literature.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)



The navigation bar consists of a series of buttons arranged in rows. The first row contains 'Title Page'. The second row contains 'Abstract' and 'Introduction'. The third row contains 'Conclusions' and 'References'. The fourth row contains 'Tables' and 'Figures'. The fifth row contains two navigation arrows: a left arrow and a right arrow. The sixth row contains 'Back' and 'Close'. The seventh row contains 'Full Screen / Esc'. The eighth row contains 'Printer-friendly Version'. The ninth row contains 'Interactive Discussion'.