

Interactive comment on “Vulnerability of groundwater resources to interaction with river water in a boreal catchment” by A. Rautio et al.

A. Rautio et al.

anne.rautio@helsinki.fi

Received and published: 21 May 2015

A Author Comment.

The manuscript HESSD-2014-556 “Vulnerability of groundwater resources to interaction with river water in a boreal catchment” by A. Rautio, A.-L. Kivimäki, K. Korkka-Niemi, M. Nygård, V.-P. Salonen, K. Lahti, and H. Vahtera

We would like to thank the reviewers for making the comments and suggestions on the paper and for recognizing the potential of a manuscript. We appreciate their insightful and comprehensive comments that helped us to make changes and clarifications in the way how our data presented and discussed. The suggestions and comments helped to improve the manuscript considerably. We followed large majority of the reviewer’s

C1646

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



comments and suggestions when preparing the revised version of the manuscript. However, we have maintain our views and opinions in some points. General and detailed comments addressing all questions/comments/suggestions of the reviewer #1 are listed below.

Anonymous Referee #1 General comments:

Introduction I am missing a short review of potential thermal detection methods in the introduction that can be used on catchment scale (10th km-scale) and on study site scale (km-scale) (e.g. fiber-optic cables (DTS)) to identify the groundwater discharge zones to streams.

We have added a short review of thermal detection methods in the introduction.

Novelty of the work is not justified satisfactory. Make it more clear what is your contribution to the AIR survey literature that are not already published by e.g. Torgersen et al (2001); Conant and Mochnacz (2009) ?. I suppose it is the integrative approach of AIR survey and hydrogeochemical data that are new ?

Yes, it is the integrative approach to apply AIR survey and hydrogeochemical data on a catchment scale that is novel to achieve a reliable and comprehensive understanding of this exchange, and its commonness and potential deteriorate effects for water quality. We have highlighted the novelty of this work in the of the introduction chapter.

Specific objective (p. 2438, L25-26) must be formulated more precisely. E.g. is it an objective to examine DSi as a potential tracer to estimate GW to RW (p. 2444, L 10-11) ?

We have specified our additional objective. The additional objective was to assess the applicability of the used thermal method in boreal catchment by verifying the identified GW–SW interaction locations using site-specific thermal and hydrogeochemical methods.

Specific comments

C1647

HESSD

12, C1646–C1658, 2015

Interactive
Comment

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



p. 2439, L 8. Add: 20 to 120 meters above sea level (m a.s.l.)

Has been added

p. 2439, L. 21. Cover-moraine sheets and end-moraine ridges need to be explained in Figure 1a. These two geomorphological elements are not shown on the legend of Fig 1a ?

We have added references in the text followingly: bedrock terrain and glacial deposits forming cover-moraine sheets (glacial till in Fig. 1a) and end-moraine ridges (glaciofluvial sand and gravel in Fig. 1a) (Tikkanen, 1989) (Fig.1a).

p. 2440, L. 2-5. Delineation of aquifers is not given in Fig 2b and not in Fig 1.

Yes, it is true that the delineation of 29 aquifers are not given in Fig. 2b or Fig 1. However, we have referring the municipal water companies which are placed in the Fig. 1a.

p. 2440, L. 21-29. What is Tuusula artificial GW plant ? Is it the same as a water intake plant ? Artificial GW need to be defined.

Yes, Tuusula artificial GW plant is water intake plant using both the artificially recharged GW (70 %) and natural GW (30 %) from the Jäniksenlinna aquifer. We have added more specific definition for the artificial GW: Water from Lake Päijänne (9370 m³d⁻¹) is conducted to the infiltration site through a water supply tunnel and is artificially recharged into the aquifer by pond infiltration through the permeable esker deposits. This artificial GW is accounting for 70 % of water intake from the Jäniksenlinna aquifer (Kortelainen and Karhu, 2006).

P. 2440, L. 25. Jäniksenlinna aquifer is not shown in fig 3b.

The classified aquifer in Fig. 3b is Jäniksenlinna aquifer. We have added followingly: The recharge of natural GW in the shallow and unconfined Jäniksenlinna aquifer is approximately 4000 m³ d⁻¹ (Hatva, 1989) (classified aquifer in Fig. 3b).

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



p. 2441, L. 10-14. What was the flying height? You need to repeat essential details on specifications defined for the AIR work. I don't think it is enough just to refer to Korkka-Niemi et al (2012).

We have added details (sensor and camera type, flying high, ground speed) of AIR survey of 2010 into the text.

p. 2442, l. 8. Explain why is most of the AIR surveys conducted in upstream direction ?

We have added the explanation why most of the AIR surveys in this study were conducted in upstream direction. The upstream direction was used due to the facility to follow main stream in upstream direction, the exceptions were mainly due to the logistical and economic reasons to save flight time.

P. 2442, L. 11. Add: meter above ground surface (m a.g.)

We have added meter above ground surface (m a.g.s.) to previous chapter dealing the AIR survey in 2010.

P. 2442, end of L. 18. Text/words are missing?

We did not notice the missing text/words.

P. 2442, L. 18-19. Need to explain what T_k and T_r is used for.

We have added explanation followingly. The T_k were compared to T_r to define the average absolute temperature difference between the reference measurements and remotely measured with TIR sensor.

p. 2443, L. 10-11. Two longitudinal profiles were collected. In what figure are they shown ? Unclear how they are measured ?

We have added in which figures two longitudinal profiles of RW temperature near the sediment–water interface are shown. The measurement devices are mentioned in fol-

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



lowing sentence. All RW temperature and EC measurements were collected with a YSI 600 XLM-V2-M multiparameter probe and the sediment temperature measurements with a stainless steel sediment temperature probe (Therma Plus, Electronic Temperature instruments Ltd, Worthing, West Sussex, UK, accuracy ± 0.10 °C).

p. 2448 L.1-2. The AIR method cannot at some places detect the temperature anomalies close to the river bed due thermal stratification. How deep in the water column can the AIR pictures normally detect an anomaly of discharging groundwater through the river bed if no thermal stratification exist ?

The thermal infrared (TIR) camera measure only the skin layer < 0.1 mm, and only if the GW contribution reach the surface of the water body it can be detected with TIR. We have added following sentence for clarification. It is a well-known limitation of the thermal infrared (TIR) technique to detect the surficial temperatures (“skin” layer < 0.1 mm), and only substantial subsurface GW contributions to SW bodies that reach the surface can therefore be detected (Torgersen et al. 2001).

p. 2448, L8-9. Sentence unclear. Change Fig 6 to Fig. 6b.

Has been changed and the sentence has been clarified. The bottom RW temperatures were mainly relatively equal and constant during the continuous water temperature monitoring period (Fig. 6b).

p. 2448, L13. Surges of GW. What is that?

We have change “the surges of GW” to “GW discharge”. The surges of GW described the pulses of discharging GW when the RW levels declined.

p. 2448, L16-18. What figure is the sentence referring to ?

The sentence is referring to Fig. 6b.

p. 2449 L7-14. Not sure how you have summarized this important EC information in figure 7. Explain more.

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper

We have added references in the figures that clarified the sentences in text. In Fig.7, the lower EC values (indicating artificially recharged GW) observed concurrently with cold RW temperatures that can see in Fig. 7, e.g. in cross-sections P–PP' to S–SS', U–UU', V–VV' when the temperature dropped simultaneously with EC values.

p. 2450. L 1 The suggested ranked order is not logical based on the development in O18 and Deuterium (see suggestion to table 3).

We have changed the order suggested more logical both in text and Table 3.

p. 2450 L15-16. Is the AIR data collected hand-held in 2010 and mounted in 2012 ? You need to give this information in section 3.1

No, the data was collected mounted in 2010 and hand-held in 2011. The sentence has been changed and the collection method has added in section 3.1.

p. 2451, L28 EC in river varies considerable in time and space. Do you have any explanation why ?

We have added flowingly. However, in the river systems EC values range widely both temporally and spatially due to variable load from sewage treatment plants and urban areas, including residues of purified waste water and deicing chemicals (Vahtera et al. 2014).

Figures

In general I am not really happy with the layout of the figures. Be sure that the font of the text and size of symbols are readable. Especially Fig 5, 6 and 7 are difficult to read. The figures are too small to cover all the compiled informations.

We have increased the font sizes in figures and hoping the figures are more readable.

Fig1a. The legend is a mixture of lithological units and geomorphological units Fig 2b. Show the extension of the classified aquifers with a more pronounced signature. The dashed line used to outline the classified aquifers is difficult to see. I will suggest that

you use oblique hatching as you use in Korkka-Niemi et al (2012, Figure 1). Explain “classified aquifer” – not explained in text. In the legend: IR flights 2011 and IR flights 2012 should be changed to AIR flights 2011 and AIR flights 2012

The classified aquifers have been explained in figure caption of 2b. However, we have left the classified aquifer symbol in previous for as it is the official symbol used by Finnish environmental agencies. We have changed IR flights 2010 and IR flights 2011 to IR flights 2010 and AIR flights 2011.

Fig 3. Indicate the area with the classified aquifers with another signature. It is impossible to see the position of the municipal intake plant and wells as they are grouped too close in Fig 3a and 3b.

We have left the symbol in previous form. Unfortunately, production well are close to each other and the municipal water intake plant well symbol is covered by them. We have added arrow to pointed out the location of intake plant.

Fig 6c. Scale on Y-axis missing on all cross sections. The geographical orientation of each cross section is not specified in the inserted map above Fig 6d. B in B-BB is missing. JJJ is missing. Fig 6d. what is the orientation of F-FF. Is the vertical T profiles measured in the middle of the river ? Dashed lines in the right side of the figure – what do they show ? How comes that it can be spring water. Where is the bottom of the river ?

We have made improvements in Fig. 6. The EC and temperature are two Y-axis which can be confusing as the graphs are turned. We have added the missing cross-sections in the inserted map above Fig. 6d. The F-FF' cross-sections has similar orientation as the other cross-sections in Fig. 6c (from W-shore to E-shore). Yes, the vertical temperature in Fig. 6d has been measured in the middle of the river and we had added that also in caption text of Fig. 6d. Dashed lines in Fig. 6d shows the possible subsurface preferential GW flow paths into the lower part of the river channel. and part of cold and dense water can originates from springs sinking down by the river

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



bank. The explanations of dashed lines and grey line in Fig. 6d has been added in the caption. The bottom of the river is the solid black line.

Fig 7c. Scale on the Y-axis

In Fig. 7 the principle of the graphs is same as in Fig. 6. We have clarified the figure by increasing the font size.

Tables

Table1. River bed width: is it the width from side to side or is it the periphery of the river along the river bed ? River bed depth: what does the interval represent (max and min depth ?)

We have been clarified the table by changing the river bed width to river width and river bed depth to river depth. Yes, the interval represent the minimum and maximum depth.

Table 3. In accordance to the delta O18 and D values. Reverse order of: R Lepsämäenjoki and R Vantaa Reverse order of: R Palojoki and R Tuusulanjoki

Suggested changes has been made.

Table 4 Reverse order of: R Vantaa and R Palojoki

The order has been changed.

References I would suggest that you in a parenthesis indicates the English translation of the purely Finnish-language reports

We have added the English translations of reports in parenthesis.

Interactive comment on Hydrol. Earth Syst. Sci. Discuss., 12, 2435, 2015.

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



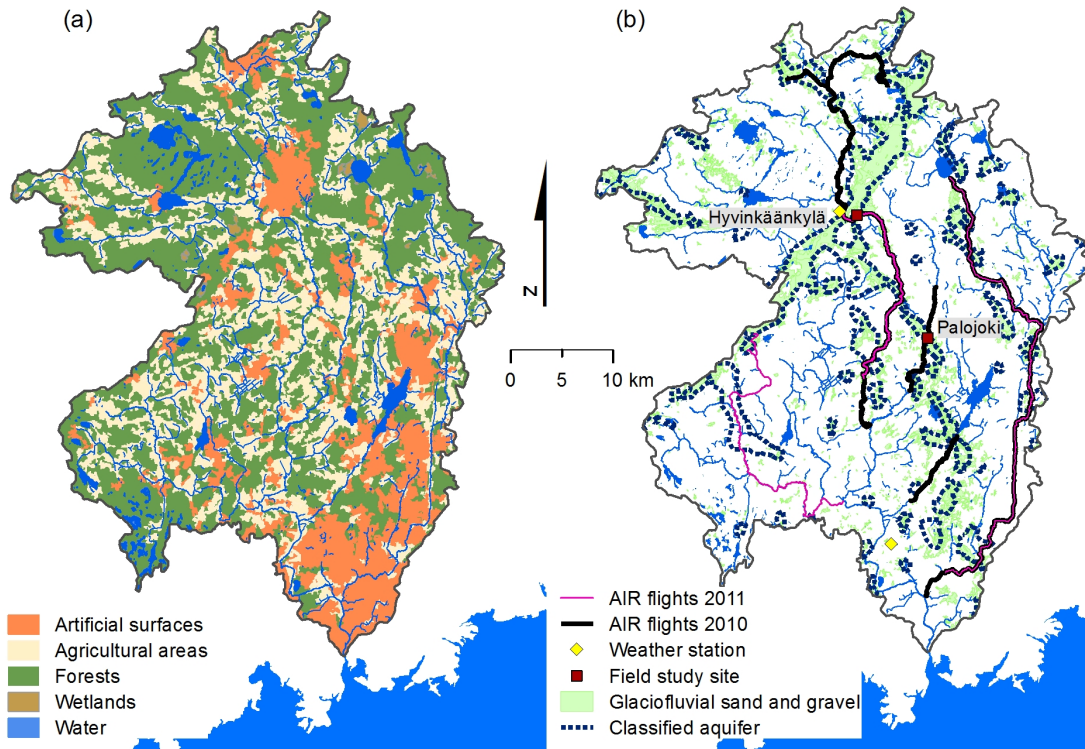


Fig. 1.

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper



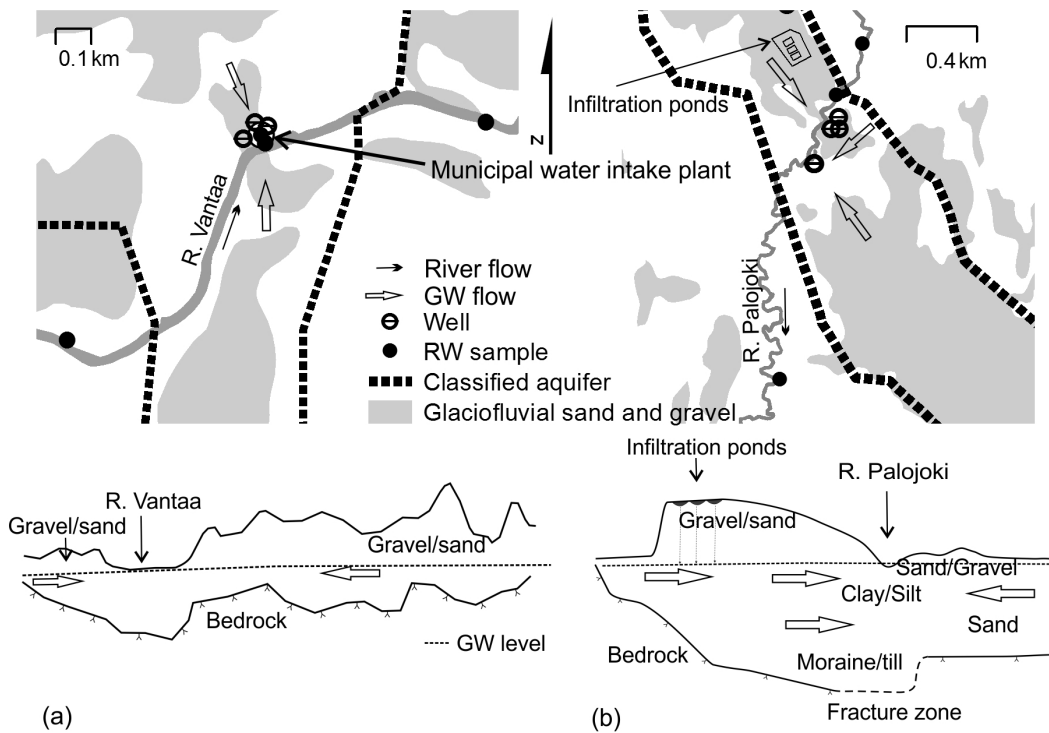


Fig. 2.

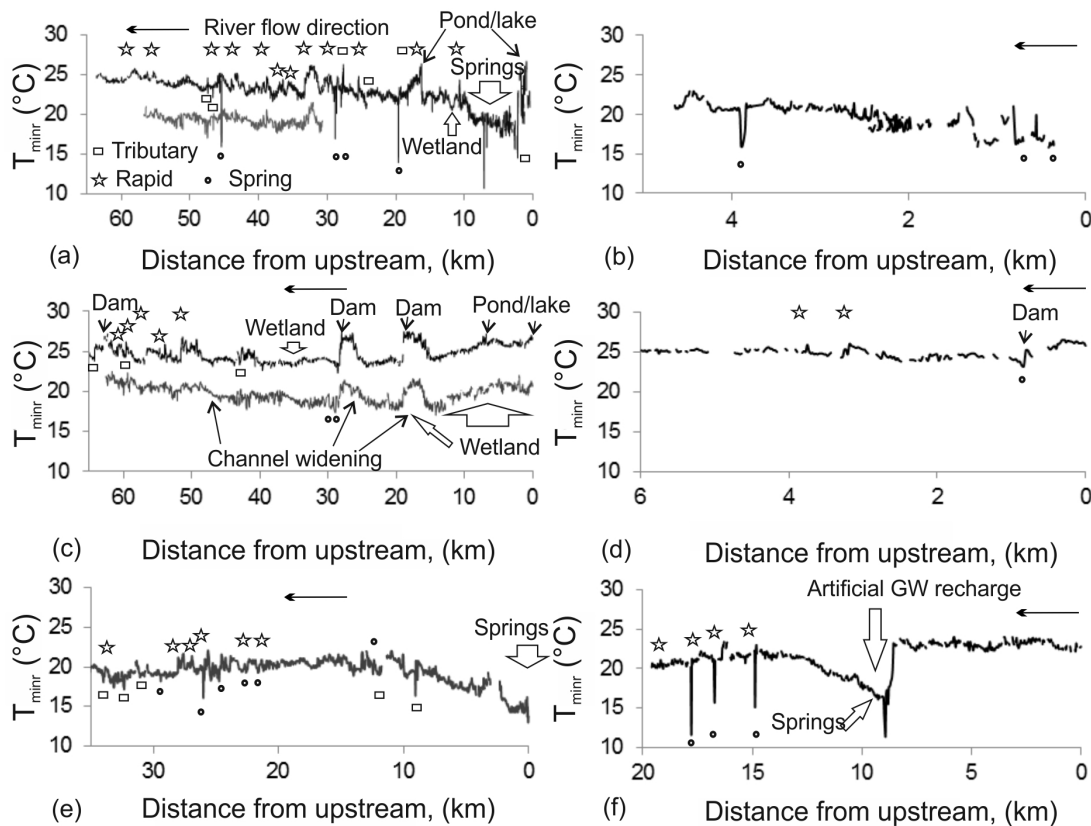


Fig. 3.

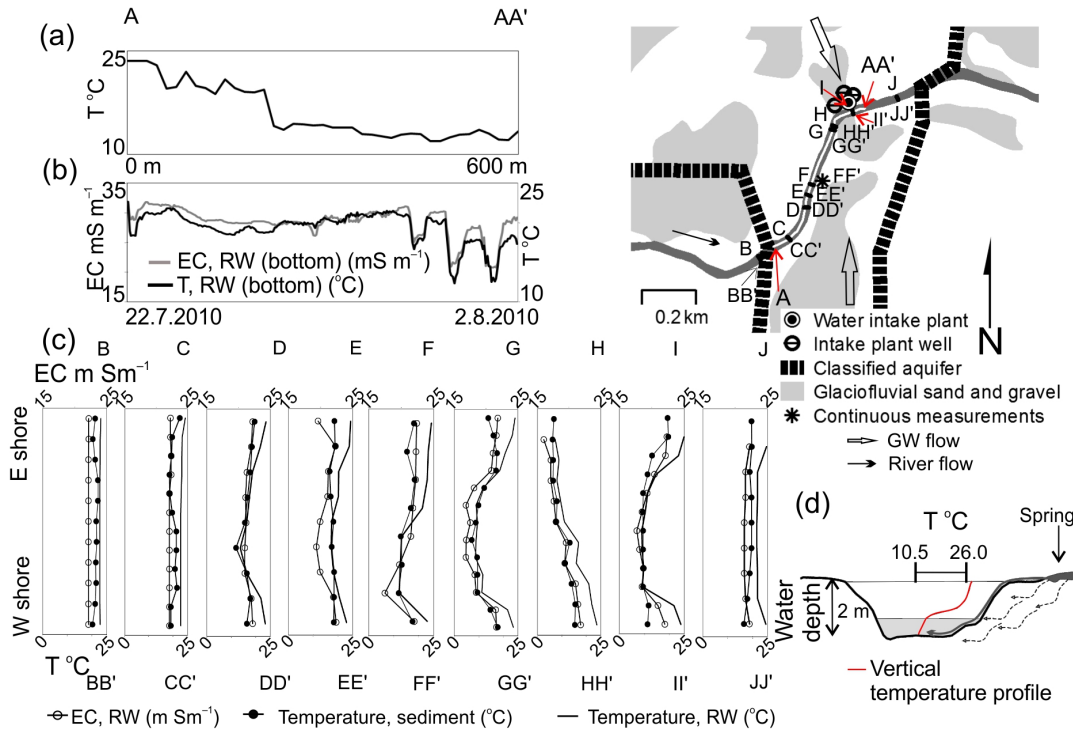


Fig. 4.

Interactive
Comment

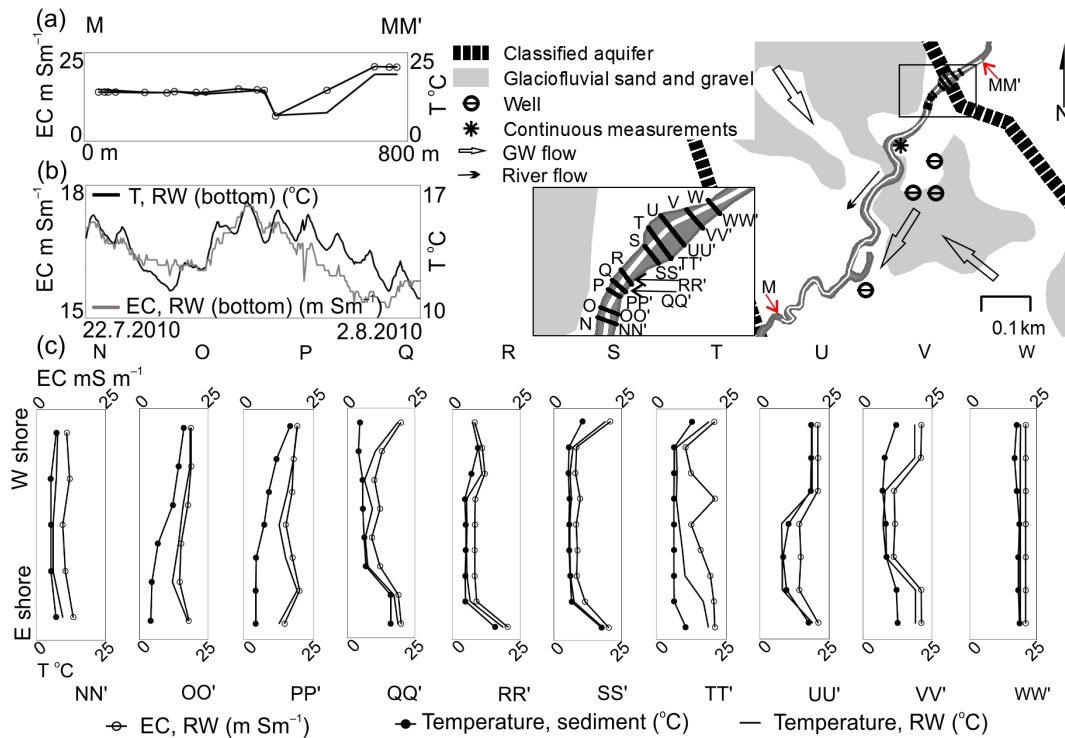


Fig. 5.

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Discussion Paper

