

Papers published in *Hydrology and Earth System Sciences Discussions* are under open-access review for the journal *Hydrology and Earth System Sciences*

Impact of spatial data resolution on simulated catchment water balances and model performance of the multi-scale TOPLATS model

H. Bormann

University of Oldenburg, Department of biology and environmental sciences, Uhlhornsweg 84, 26111 Oldenburg, Germany

Received: 30 August 2005 – Accepted: 21 September 2005 – Published: 10 October 2005

Correspondence to: H. Bormann (helge.bormann@uni-oldenburg.de)

© 2005 Author(s). This work is licensed under a Creative Commons License.

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Abstract

This paper analyses the effect of spatial input data resolution on the simulated water balances and flow components using the multi-scale hydrological model TOPLATS. A data set of 25m resolution of the central German Dill catchment (693 km²) is used for investigation. After an aggregation of digital elevation model, soil map and land use classification to 50 m, 75 m, 100 m, 150 m, 200 m, 300 m, 500 m, 1000 m and 2000 m, water balances and water flow components are calculated for the entire Dill catchment as well as for 3 subcatchments without any recalibration. The study shows that both model performance measures as well as simulated water balances almost remain constant for most of the aggregation steps for all investigated catchments. Slight differences occur for single catchments at the resolution of 50–500 m (e.g. 0–3% for annual stream flow), significant differences at the resolution of 1000 m and 2000 m (e.g. 2–12% for annual stream flow). These differences can be explained by the fact that the statistics of certain input data (land use data in particular as well as soil physical characteristics) changes significantly at these spatial resolutions, too. The impact of smoothing the relief by aggregation occurs continuously but is not reflected by the simulation results. To study the effect of aggregation of land use data in detail, three different land use scenarios are aggregated which were generated aiming on economic optimisation at different field sizes (0.5 ha, 1.5 ha and 5.0 ha). The changes induced by aggregation of these land use scenarios are comparable with respect to catchment water balances compared to the current land use. A correlation analysis only in some cases reveals high correlation between changes in both input data and in simulation results for all catchments and land use scenarios combinations (e.g. evapotranspiration is correlated to land use, runoff generation is correlated to soil properties). Predominantly the correlation between catchment properties (e.g. topographic index, transmissivity, land use) and simulated water flows varies from catchment to catchment. This study indicates that an aggregation of input data for the calculation of regional water balances using TOPLATS type models leads to significant errors from a resolution ex-

Impact of spatial data resolution on model results

H. Bormann

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Print Version](#)

[Interactive Discussion](#)

ceeding 500 m. A meaningful aggregation of data should in the first instance aim on preserving the areal fractions of land use classes.

1. Introduction

5 Many recent environmental problems such as non-point source pollution and habitat degradation are addressed at basin scale (e.g. the “Water Framework Directive” of the European Union) and require spatially explicit analyses and predictions. Especially future predictions have to be based on model applications to simulate future conditions of ecosystems in catchments and the effects of environmental change. As the water flow is essential for transport of nutrients and pollutants as well as the development of habitats, distributed modelling of water flows and related state variables is a pre-
10 requisite to contribute to the solution of these environmental problems.

Spatially distributed modelling of regional water fluxes and water balances requires a number of huge spatial data sets. At least spatial information on topography (digital elevation model), soils and vegetation is needed. Thereby the higher the resolution of these data is the better the landscape is represented by the data base (Kuo et al.,
15 2003). Spatial patterns can be represented more in detail and small scale fluxes can be considered by the models.

On the other hand a higher spatial and temporal resolution of data and model application does not always lead to a better representation of the water fluxes for a given catchment. This depends on the variability and distribution of catchment properties. Highly resolved data often contain redundant information and lead to an increase in required storage capacity and computer time (Omer et al., 2003). And, of course, highly resolved data are not always available for every catchment of interest. Therefore new initiatives search for new ways to better represent the catchment water fluxes in poor
25 data situations. One well known example is the PUB initiative (*prediction of ungauged basins*) of the International Association of Hydrological Sciences (Sivapalan, 2003).

Furthermore the benefit of a detailed data base strongly depends on the model type

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

applied and on the target of a study. Focusing on annual water balances of large scale catchments, for instances, does not require diurnal input data in micro-scale resolution. And lumped, conceptual models do not exploit highly resolved data in the same way as spatially distributed and process based models do. Therefore the decision, which data resolution to be sufficient for a distinct model application, has to be made again for every case study. As it is very time-consuming and costly to perform this analysis, unfortunately it is not made for each study. Based on experience of the user the appropriate and data availability, data resolution is chosen for a given scale and a given target. But the simulation results afterwards mostly are not investigated on the impact which the spatial resolution has.

A few studies have examined the effect of grid size of topographic input data on catchment simulations using TOPMODEL (Beven et al., 1995). Quinn et al. (1991), Moore et al. (1993), Zhang and Montgomery (1994), Bruneau et al. (1995) and Wolock and Price (1994) looked at how grid size affected the computed topographic characteristics, wetness index and outflow. In general, they found that higher resolved grids gave better results. Kuo et al. (1999) applied a variable sources area model to grid sizes from 10 to 600 m and revealed an increasing misrepresentation of the curvature of the landscape with increasing grid size while soil properties and land use distribution were not affected. Effects themselves depended on the wetness of the time periods considered. Thielen et al. (1999) examined the effect of differently sized elevation data sets on catchment characteristics and calculated hydrographs of single events. They found that these data sets with a resolution between 10 and 50 m strongly diverged in landscape representation. Furthermore these differences in topographic and geomorphologic features could be used to explain differences in the runoff simulation of single events. The effect on long-term water balances was not investigated. Farajalla and Vieux (1995) showed that the aggregation of spatial input data led to a decrease in entropy of soil hydraulic parameters between 200 m and 600 m grid size and to a significant decrease for grid sizes over 1000 m. To overcome the problem of information loss with increasing grid size Beven (1995) suggests the consideration of subgrid

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

variability by spatial distribution functions of properties or parameters. This only works if high resolution data sets are available. Model concepts which are based on Hydrological Response Units (HRUs) instead of grid cells are faced with the same problem. For that reason the effect of decreasing number of HRUs on the simulation results was investigated by various authors, too (e.g. Chen and Mackay, 2004; Lahmer et al., 2000; Bormann et al., 1999).

Although it is well reported in literature that data resolution can have a significant impact on the simulation results, model results of different models often are compared and evaluated without taking account of the basic data resolution. Therefore this study elaborates in detail, which effects the chosen data and model resolution can have on model performance and simulated water balances. Based on a detailed spatial data set (25m resolution) of a meso-scale catchment (693 km²) a systematic data aggregation (from 25 m to 2000 m) and subsequent model application is carried out to investigate the limitations of data aggregation and model applicability in case of the TOPLATS model (Famiglietti and Wood, 1994a).

The motivation for this study arose from a model comparison initiative (LUCHEM initiative, *Assessing the impact of land use change on hydrology by ensemble modelling*, initiated by the working group on *Resources Management of the University of Gießen, Germany*) where different catchment models were compared despite differences in process representation, spatial conceptualisation (grid, HRUs) and spatial resolution in a relatively tight range (25–200 m). There the question on the influence of grid size on simulation results arose.

2. Material and methods

2.1. Toplats model

The TOPLATS model (*TOPMODEL based atmosphere transfer scheme*; Famiglietti and Wood, 1994a; Peters-Lidard et al., 1995) is a multi-scale model to simulate local

to regional scale catchment water fluxes. It combines the local scale SVAT approach (*soil vegetation atmosphere transfer scheme*) to represent local scale vertical water fluxes with the catchment scale TOPMODEL approach (Beven et al., 1995) to laterally redistribute the water within a catchment.

5 TOPLATS is a grid based and time continuous model. The vertical water fluxes of the grid cells are calculated by the local SVATs (Fig. 1). The aggregation of local water fluxes yields in catchment scale vertical water fluxes. There is no lateral interaction between the local SVATs accounted for by the model. But based on the soils topographic index of the TOPMODEL approach (Beven et al., 1995) a lateral redistribution of water is realized by adaptation of the local groundwater levels which are used as lower boundary conditions of the local SVATs. Finally based flow is generated from the integration of local saturated subsurface fluxes along the channel network. A routing routine is not integrated in the model. The basic hydrological processes and their representation in the TOPLATS model are summarized in Table 1.

10 In vertical direction the soil is divided in 2 layers (root zone and transmission zone). An exponential decay function of saturated conductivity with depth is assumed. The soil water flow is calculated using an approximation for gravity driven drainage, and capillary rise is calculated based on the approach of Gardner (1958), both approaches using the Brooks and Corey parameterisation. Soil parameters are derived using the pedotransfer-function of Rawls and Brakensiek (1985). Plant growth is described by plant specific plant development functions. There the seasonal change of plant parameters is realised by updating plant parameter sets consisting of e.g. leaf area index, plant height and stomatal resistance. Plant growth itself is not simulated. The digital elevation model serves as basic data set for the calculation of the topographic wetness index (Beven et al., 1995), which is extended to a soils-topographic index (see Table 1) accounting for local differences in transmissivity. For further details about the model the reader is referred to Famiglietti and Wood (1994a) and Peters-Lidard et al. (1995).

25 The TOPLATS model has been successfully applied in several studies at different scales and in different climate regions around the world. Famiglietti and Wood (1994b)

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

applied TOPLATS to the tallgrass prairie in the United States. Appropriate scales range from sites to small catchments ($\sim 12 \text{ km}^2$) and from simulation of diurnal variations to water fluxes of a couple of weeks to be able to compare simulations to evapotranspiration measurements. Pauwels et al. (1999a, 1999b) extended the TOPLATS model to the application in high latitudes in Canada. They also focused on small scale simulations but simulated water and energy fluxes for whole seasons.

Recent TOPLATS related publications more and more focus on regional applications and on the integration of remotely sensed data to improve the simulations. Endreny et al. (2000) examined the effects of the errors induced by the use of digital elevation models derived from SPOT data and compared the simulation results to those based on standard data sets (USGS 7.5-minute data set). Seuffert et al. (2002) coupled TOPLATS to an atmospheric model (*Lokal-Modell of the German Meteorological Service*) and applied the model to the regional scale Sieg catchment (about 2000 km^2) in Western Germany. Pauwels et al. (2002) investigated the possibility to improve TOPLATS based simulation by the use of ERS derived soil moisture values at local scale. A similar study was performed by Crow and Wood (2002) in the Red Arkansas basin who explored the benefit of coarse-scale soil moisture images for macro-scale model applications of TOPLATS ($575\,000 \text{ km}^2$). And Crow et al. (2005) also examined the possibility to upscale field-scale soil moisture measurements by means of distributed land surface modelling. In the context of this study they also expanded the soil module within TOPLATS considering vertical soil heterogeneity. Finally Bormann and Diekkrüger (2003) and Bormann et al. (2005) applied TOPLATS to the subhumid tropics of West Africa to simulate seasonal dynamics stream flow and soil moisture and found that poor data resolution and quality strongly limit the applicability of comparable models independent on scale.

Recapitulating TOPLATS has successfully been applied to a wide range of temporal and spatial scales in many different climate regions of the globe. The applicability seems to be limited by data availability and strongly depends on the aim of the study.

2.2. Catchment characteristics and available data sets of the Dill basin

The Dill catchment (693 km²) is located in central Germany and belongs to the Lahn-Dill low mountainous region. It is the target catchment of the SFB 299 (“Land use options for peripheral regions”) of the University of Gießen (Germany). Gauging stations exist for three sub-catchments (Upper Dill (63 km²), Dietzhölze (81 km²) and Aar (134 km²)) as well as for the entire Dill catchment at Asslar (693 km², Fig. 2).

The typical small scale topography ranges between 155 m and 694 m above sea level. The mean steepness of the slopes is approximately 14%. Mean annual rainfall ranges between 700 mm to 1100 mm depending on the location within the catchment and the corresponding elevation. Low precipitation areas show summer-dominated precipitation and high precipitation areas winter-dominated precipitation regimes. Average annual mean temperature is about 8°C.

Soil parent material of the Lahn-Dill mountains is mainly argillaceous schist, greywacke, diabase, sandstone, quartzite, and basalt which developed during the Devon and Lower Carbon. During the Pleistocene periglacial processes have strongly influenced the soil parent material. Therefore periglacial layers strongly influenced by the underlying geologic substrate are the main soil parent material of the catchment. Due to the heterogeneous nature of these periglacial layers, the pattern of soil types is complex. Main soil types are shallow cambisols, planosols derived from luvisols under hydromorphic conditions, and gleysols in groundwater influenced valleys.

Typical for most of the catchment area is a hard rock aquifer. Pore aquifers only exist in quaternary deposits such as river terraces or hillslope debris. Based on empirical relations the portion of baseflow contribution to discharge can be estimated to an amount of 9–16%. Most of the discharge of the Dill river is delivered through interflow. The contribution of surface runoff is estimated to be less than 10%.

Current land cover of the Dill area is dominated by forest. 29.5% of the catchment is covered by deciduous forest, 24.9% by coniferous forest. 20.5% of the catchment area is used for grassland and 6.5% agricultural crops. A portion of about 9% of the area

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

is fallow land, and another 9% is covered by urban area. Obviously the Dill catchment is a peripheral region dominated by extensive agriculture and forestry. Thanks to the SFB 299 of the University of Gießen a detailed data base is available for the whole Dill basin in 25 m resolution. Spatial data sets and time series (rain gauges, climate stations and stream gauges, for location of the stations see Fig. 2) used in this study are summarised in Table 2.

2.3. Data aggregation

As the impact of increasing information loss on the calculation of regional scale water fluxes was to be investigated by this study, the available data set was aggregated stepwise to create grid based data sets of increasing grid size. Therefore the spatial data sets (soil map, DEM, land use classification, land use scenarios) were systematically aggregated applying standard aggregation methods provided by standard GIS software.

The aggregation of the DEM was carried out by calculating the simple averages of the pixels to be aggregated. Concerning soils and land use the data sets were aggregated with respect to the majority of the pixels to be aggregated. The most frequent value was allocated to the aggregated pixel. If there is no unambiguous majority the surrounding pixels are included into the allocation (Fig. 3). Applying these algorithms, the DEM is smoothed by averaging, and mostly small homogenous areas of classified data (soils, land use) are shrinking or disappearing at the expense of large homogenous areas.

3. Model application to the Dill catchment

3.1. Calibration and validation

In order to reduce the calibration of the TOPLATS model for application to the Dill basin to a minimum, parameterisation of the TOPLATS model was carried out by deriving

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

or using directly as many parameters as possible from standard data bases. Thus transferability of the model and the obtained results to other catchments is improved. Soil parameters were derived using the pedotransfer function of Rawls and Brakensiek (1985). Based on soil texture and porosity the parameters of the Brooks and Corey parameterisation of soil retention characteristics are calculated (Brooks and Corey, 1964). Topographic parameters were calculated directly from the digital elevation model, and plant parameters were taken from the PlaPaDa data base (Breuer et al., 2003). So the calibration could be reduced to an adjustment of plant specific stomatal resistances by a constant factor to meet the long-term water balance and to the calibration of the parameters of the base flow recession curve.

Figure 4 shows the simulation results for the entire Dill catchment (693 km²) compared to the observed values of the stream gauges. Calibration period is from 1983–1989, validation period from 1990–1999. The accuracy of the simulation is satisfactory (quality measures see Table 3) considering that TOPLATS was calibrated only with respect to stomatal resistance and the baseflow recession curve. Quality measures for the validation period are only slightly worse than for the calibration period. While for daily discharges the model efficiency (Nash and Sutcliffe, 1970) is of moderate quality (0.65 for calibration, 0.61 for validation), the model efficiencies and coefficients of determination increase for longer time intervals (longer than one week) to values greater than 0.8. The mean bias in discharge between observations and simulations is about 5% for calibration and 12% for validation period.

For the simulation of the three subcatchments a recalibration was not carried out except the maximum baseflow parameter (baseflow at basin saturation). The simulation results for the Dietzhölze (81 km²) and on the upper Dill (63 km²) are quite good while the results for the Aar catchment (134 km²) are of a moderate quality. Model efficiencies for daily discharges range between 0.59 and 0.73 (calibration period) and between 0.52 and 0.69 (validation period). They increase with increasing time interval to values of 0.76 to 0.85 (weeks) and 0.82 to 0.90 (months). Quality measures and water balances for the Dill basin as well as for the three subcatchments are show in

detail in Table 3.

Based on these simulations results it can be stated that TOPLATS can be applied to successfully simulate water balances on the regional scale in the low mountain range in temperate climates considering the minimum calibration strategy. Single peak flow events cannot be simulated with a high precision, but long-term water balances can be simulated well just as well as seasonal variations of the water fluxes, and dry and wet periods within a season can be covered as well.

3.2. Model results based on increasing grid sizes

For all different grid sizes derived from the original data sets (10 grids ranging from 25 m to 2000 m resolution) continuous water balance simulations of 20 years were performed. Based on this analysis the model specific minimum data resolution and therefore the minimum simulation effort required for good simulation quality aiming on water balance investigations can be determined.

The computations reveal almost constant simulated annual water balances (Fig. 5) and model efficiencies (Fig. 6) for most of the grid sizes. Up to a grid size of 300 m the simulated water fluxes remain almost constant except slight differences at individual grid sizes (e.g. at 100 m, which can be explained by differences in land use composition at the 100 m aggregation level) for individual water flows (e.g. for actual evapotranspiration). At a grid size of 500 m the differences slightly increase, and from 1000 m grid size onwards the simulation results get significantly worse, differences increase. Thereby the results of the calibration period and the validation period again show the same regularity: if the simulation results are good for the calibration period, then also for the validation period good results are obtained. The same observation was made for bad agreement between the model and the measurements. This observation is valid for all investigated catchments. Therefore no further separate analysis for calibration and validation periods is required.

This statement concerning grid size dependent simulated water balances is also valid for the model efficiencies calculated from observations and model simulations.

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

The model efficiencies – as expected from the simulated water balances – remain constant up to a threshold value of 300 m to 500 m grid size. Model efficiencies for the 1000 m and the 2000 m grids are significantly lower. At this scale a significant and systematic decrease of the quality measure is observed (Fig. 6). In addition to the results of the Dill catchment (Figs. 5 and 6), the Tables 4 and 5 summarise the scale dependent model efficiencies and biases of stream flow calculated for all subcatchments within the Dill basin.

To investigate the influence of different land use distributions on the diverging behaviour of simulated water balances for increasing grid sizes above a threshold of between 300 m and 500 m, three land use scenarios were used for further simulations. For this study not the effect of the scenarios compared to the base line is of interest but again the effect of increasing grid size on the simulated scenario water balances. The scenarios were calculated by the “Proland model” (Fohrer et al., 2002) optimising the financial profit of the catchment area based on different field sizes (0.5, 1.5 and 5.0 hectares). So the spatial structures of the different land use scenarios differ a lot. If the regularity of the results with respect to increase in grid size is the same for all scenarios and the baseline, then the land use distribution does not have major influence on the structure of the simulation results, and results on data aggregation are the transferable to other basins.

Figure 7 shows as an example the simulation results of the three different, field size dependent scenarios for the Dill basin. It is obvious that simulated mean annual water flows only show minor differences up to a grid size of 500 m and significant differences for larger grid sizes. These exemplary results on different land use data sets for the upper Dill catchment are very similar to the results of the other three catchments. The other data sets show the same systematic reaction on data aggregation. Thus it can be concluded that there is no significant impact of the spatial structure of land use on the regularity of the simulation results based on grid size aggregation.

4. Correlation between changes and catchment properties

In order to analyse the influences of the different aggregated data sets on the grid size dependent simulation results an extended correlation analysis was carried out based on the statistics of catchment properties and water balance simulations. All spatial input data sets change significantly in statistics during aggregation. Increasing the grid size leads to a smoothed surface of elevation and therefore to an increased mean topographic index (as cell size increases and slope in average decreases) and a decreasing standard deviation of the topographic index (Fig. 8). For single aggregation levels extreme values occur (e.g. 1000 m level for topographic index) while the tendency is the same for all investigated catchments.

The transmissivity of the soils in general is barely affected by aggregation in a systematic way. Single extreme values occur (Fig. 9) which does not show a homogenous tendency for the different catchments. The behaviour strongly depends on local soil hydraulic conditions and soil depths.

The effect of aggregation on the land use statistics is exemplarily shown for the entire Dill basin by Fig. 10. It becomes clear that the aggregation has no major effect up to a cell size of 500 m. Only on the 100 m level significant deviations occur for pasture and fallow land. For grid sizes larger than 500 m significant changes in land use fractions can be observed for almost all land use classes. This is due to the fact that large areas grow at the expense of small areas, and grid sizes become much larger than the average size of homogenous areas is. The effect of aggregation on land use fractions in the Dill catchment is comparable to the effects in the subcatchments which are summarised in Fig. 11.

To examine the contribution of the different data sources to the grid size dependent effects, a correlation analysis between water balance components and catchment properties was carried out. The correlation coefficients for the entire Dill basin are summarised in Table 6.

From the structure of the simulation results it would be first have been expected

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

that land use has a major influence on the simulations. This can be approved by the data. Forest areas are positively correlated to evapotranspiration and negative to stream flow production, while fallow areas and agricultural crops are correlated vice versa. Nevertheless one has to be careful because also spurious correlations appear in the data (contrary correlation coefficients of coniferous and deciduous forest), and coherences between data and simulation results cannot be explained by linear correlations only. Nevertheless, water balance terms also show a clear dependence on soil and topographic characteristics. Surface runoff and base flow are highly correlated to the topographic index (surface runoff in a positive, base flow in a negative way), and transmissivity is correlated with base flow (positively) and evapotranspiration as well as surface runoff (negatively).

So simulation results are related to all spatial data sets, and evaluation of the effect of data aggregation therefore has to consider all data sources. Nevertheless it is worth to mention that predominantly the correlation between catchment properties (e.g. topographic index, transmissivity, land use) and simulated water flows varies from catchment to catchment, in particular on the small scale.

5. Conclusions: Limitations of model application

This study indicates that an aggregation of input data for the calculation of regional water balances using TOPLATS type models does not lead to significant errors up to a grid size of 300 m. Between a grid size of 300 and 500 m a slight to partly significant information loss leads to affected simulation results while applying a grid size of 1km and more causes significant errors in the computed water balance. If algorithms are integrated in a model taking into account subgrid variability further investigations are required.

The results of this study indicate that a meaningful aggregation of data should in the first instance aim on preserving the areal fractions of land use classes, because land use is the most important information for this kind of SVAT schemes which are domi-

nated by evapotranspiration. Nevertheless also the statistics of soil physical properties and topography should not be neglected. Aiming on total stream flow often masks effects of changes in fast and slow runoff components which may counterbalance their relative effects. Similar effects may also occur when effects of data aggregation and varying grid size point at different directions.

As the results for all different subcatchments and land use scenarios show similar structures, the findings are transferable to other catchments. The transferability to other model types is limited in so far, as TOPLATS focuses on vertical processes, and land use information is much more dominant than the influence of neighbouring grid cells. Therefore for models rather focusing on lateral processes which should be more sensitive to a smoothing of the topography, the results need to be verified.

Concluding, this investigation shows that high quality simulation results require high quality input data but not always highly resolved data. The calculated water balances and statistical quality measures do not get significantly worse up to spatial data resolutions which should be available in almost all developed and also in many developing countries. Therefore the focus should be set to improve data quality first and then to optimise data resolution secondly.

Acknowledgements. The authors thank the SFB 299 of the University of Gießen for providing the data set in the framework of the LUCHEM initiative (special thanks to the organisers L. Breuer and S. Huisman) and the authors of the TOPLATS model (E. Wood and W. Crow in particular) for providing the model code and some support.

References

- Beven, K.: Linking parameters across scales: subgrid parameterizations and scale dependent hydrological models, in: Scale issues in hydrological modelling, edited by: Kalma, J. D. and Sivapalan, M., Advances in hydrological processes, Wiley, 263–281, 1995.
- Beven, K.J., Lamb, R., Quinn, P. F., Romanowicz, R., and Freer, J.: TOPMODEL, in: Computer Models of Watershed Hydrology, edited by: Singh, V. P., Water Resources Publications, 627–668, 1995.

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Print Version](#)

[Interactive Discussion](#)

- Bormann, H., Faß, T., Junge, B., Diekkrüger, B., Reichert, B., and Skowronek, A.: From local hydrological process analysis to regional hydrological model application in Benin: concept, results and perspectives, *Phys. Chem. Earth*, 30, 347–356, 2005.
- Bormann, H. and Diekkrüger, B.: Possibilities and limitations of regional hydrological models applied within an environmental change study in Benin (West Africa), *Phys. Chem. Earth*, 28, 1323–1332, 2003.
- Bormann, H., Diekkrüger, B., and Renschler, C.: Regionalization concept for hydrological modelling on different scales using a physically based model: results and evaluation, *Phys. Chem. Earth B*, 24, 799–804, 1999.
- Breuer, L., Eckhardt, K., and Frede, H.-G.: Plant parameter values for models in temperate climates, *Ecol. Model.*, 169, 237–293, 2003.
- Brooks, R. H. and Corey, A. T.: Hydraulic properties of porous media, in: *Hydrology Paper 3*, 22–27, Colorado State University, Fort Collins, 1964.
- Bruneau, P., Gascuel-Oudou, C., Robin, P., Merot, P., and Beven, K.: Sensitivity to space and time resolution of a hydrological model using digital elevation data, *Hydrol. Process.*, 9, 69–81, 1995.
- Chen, E. and Mackay, D. S.: Effects of distribution-based parameter aggregation on spatially distributed agricultural nonpoint source pollution model, *J. Hydrol.* 295, 211–224, 2004.
- Crow, W. T. and Wood, E. F.: The value of coarse-scale soil moisture observations for surface energy balance modeling, *J. Hydrometeorol.*, 3, 467–482, 2002.
- Crow, W. T., Ryu, D., and Famiglietti, J. S.: Upscaling of field-scale soil moisture measurements using distributed land surface modeling, *Adv. Water Resour.*, 28, 1–5, 2005.
- Endreny, T. A., Wood, E. F., and Lettenmaier, D. P.: Satellite-derived elevation model accuracy: hydrological modeling requirements, *Hydrol. Process.*, 14, 177–194, 2000.
- Famiglietti, J. S. and Wood, E. F.: Multiscale modelling of spatially variable water and energy balance processes, *Water Resour. Res.*, 30, 3061–3078, 1994a.
- Famiglietti, J. S. and Wood, E. F.: Application of multiscale water and energy balance models on the tallgrass prairie, *Water Resour. Res.*, 30, 3079–3093, 1994b.
- Farajalla, N. and Vieux, B.: Capturing the essential variability in distributed hydrological modeling: infiltration parameters, *Hydrol. Process.*, 9, 55–68, 1995.
- Fohrer, N., Möller, D., and Steiner, N.: An interdisciplinary modelling approach to evaluate the effects of land use change, *Phys. Chem. Earth*, 27, 655–662, 2002.
- Gardner, W. R.: Some steady-state solutions of the unsaturated moisture flow equation with

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

- application to evaporation from a water table, *Soil Sci.*, 85, 228–239, 1958.
- HLBG: Hessische Verwaltung für Bodenmanagement und Geoinformation, Digitales Geländemodell DGM25, date of access: 29 August 2005, in: <http://www.hkvv.hessen.de/>, 2000.
- 5 HLUg: Hessisches Landesamt für Umwelt und Geologie, Digital soil map 1:50 000, 1998.
- HLUG: Hessisches Landesamt für Umwelt und Geologie. Stream gauges in the Lahn basin, date of access: 29 August 2005, http://www.hlug.de/medien/wasser/pegel/pg_Lahn.htm, 2005.
- 10 Kuo, W.-L., Steenhuis, T. S., McCulloch, C. E., Mohler, C. L., Weinstein, D. A., DeGloria, S. D., and Swaney, D. P.: Effect of grid size on runoff and soil moisture for a variable-source-area hydrology model, *Water Resour. Res.*, 35, 3419–3428, 1999.
- Lahmer, W., Pfützner, B., and Becker, A.: Data-related Uncertainties in Meso- and Macroscale Hydrological Modelling, in: *Accuracy 2000. Proceedings of the 4th international symposium on spatial accuracy assessment in natural resources and environmental sciences*, edited by: Heuvelink, G. B. M. and Lemmens, M. J. P. M., Amsterdam, 389–396, 2000.
- 15 Milly, P. C. D.: An event based simulation model of moisture and energy fluxes at a bare soil surface, *Water Resour. Res.*, 22, 1680–1692, 1986.
- Monteith, J. L.: Evaporation and environment, in: *Sympos. The state and movement of water in living organism*, edited by: Fogy, G. T., Cambridge Univ. Press, 205–234, 1965.
- 20 Moore, I. D., Lewis, A., and Gallant, J. C.: Terrain attributes: Estimation methods and scale effects, in: *Modelling change in environmental systems*, edited by: Jakeman, A. J., Beck, M. B., and McAleer, M., Wiley, New York, 189–214, 1993.
- Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models, part I – a discussion of principles, *J. Hydrol.*, 10, 272–290, 1970.
- 25 Omer, R. C., Nelson, E. J., and Zundel, A. K.: Impact of varied data resolution on hydraulic modelling and floodplain delineation, *J. Am. Water Resour. As.*, 39, 467–475, 2003.
- Pauwels, V. R. N., Hoeben, R., Verhoest, N. E. C., De Troch, F. P., and Troch, P. A.: Improvement of TOPLATS-based discharge predictions through assimilation of ERS-based remotely sensed soil moisture values, *Hydrol. Process.*, 16, 995–1013, 2002.
- 30 Pauwels, V. R. N. and Wood, E. F.: A soil-vegetation-atmosphere transfer scheme for the modeling of water and energy balance processes in high latitudes. 1. Model improvements, *J. Geophys. Res.*, 104, 27 811–27 822, 1999a.
- Pauwels, V. R. N. and Wood, E. F.: A soil-vegetation-atmosphere transfer scheme for the mod-

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

elling of water and energy balance processes in high latitudes, 2. Application and validation, J. Geophys. Res., 104, 27 823–27 840, 1999b.

Peters-Lidard, C. D., Zion, M. S., and Wood, E. F.: A soil-vegetation-atmosphere transfer scheme for modeling spatially variable water and energy balance processes, J. Geophys. Res., 102, 4303–4324, 1997.

Quinn, P., Beven, K., Chevallier, P., and Planchon, O.: The prediction of hillslope flow paths for distributed hydrological modelling using digital terrain models, Hydrol. Proces., 5, 59–79, 1991.

Rawls, W. J. and Brakensiek, D. L.: Prediction of soil water properties for hydrological modeling; in: Proceedings of the symposium watershed management in the eighties, edited by: Jones, E. and Ward, T. J., Denver, 293–299, 1985.

Seuffert, G., Gross, P., and Simmer, C.: The Influence of Hydrologic Modeling on the Predicted Local Weather: Two-Way Coupling of a Mesoscale Weather Prediction Model and a Land Surface Hydrologic Model, J. Hydrometeorol., 3, 505–523, 2002.

Sivapalan, M.: Prediction of ungauged basins: A grand challenge for theoretical hydrology, Invited Commentary, Hydrol. Process., 17, 3163–3170, 2003.

Sivapalan, M., Beven, K., and Wood, E. F.: On hydrologic similarity, 2. A scaled model of storm runoff production, Water Resour. Res., 23, 2266–2278, 1985.

Thieken, A., Lücke, A., Diekkrüger, B., and Richter, O.: Scaling input data by GIS for hydrological modelling, Hydrol. Process., 13, 611–630, 1999.

Wolock, D. M. and Price, C. V.: Effects of digital elevation model map scale and data resolution on a topography based watershed model, Water Resour. Res., 30, 3041–3052, 1994.

Zhang, W. and Montgomery, D. R.: Digital elevation model grid size, landscape representation, and hydrologic simulations, Water Resour. Res., 30, 1019–1028, 1994.

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Table 1. Main processes and equations of the TOPLATS model.

Model part	Process	Approach
Local SVATs	Interception	Storage approach: storage capacity is proportional to leaf area index
	Potential evapotranspiration (PET)	Penman Monteith equation (plant specific PET) (Monteith, 1965)
	Actual evapotranspiration	Reduction of PET by actual soil moisture status (alternative: solving energy balance equation)
	Infiltration	Infiltration capacity after Milly (1986) (depending on soil properties and soil water status)
	Infiltration excess runoff	Difference between rainfall rate and infiltration capacity
	Saturation excess runoff	Contributing areas derived from TOPMODEL; approach based on the soils topographic index
	Percolation	Gravity driven drainage
	Capillary rise	Capillary rise from local water table based on Gardner (1958) using Brooks and Corey parameters
Lower boundary condition	Top of capillary fringe (= depth of local water table)	
TOPMODEL	Spatial distribution of water table depths	Soils-topographic index (Sivapalan, 1987)
	base flow	Exponential decay function; maximum base flow is base flow at basin saturation

Impact of spatial data resolution on model results

H. Bormann

Table 2. Spatial data sets and time series available for the Dill catchment.

Domain	Data source/gauge stations	Resolution/classification	Origin of data set
Space	Digital soil map	25 m resolution, 149 classes (soil types)	Digital soil map 1:50 000 HLUG (1998)
	Land use classification	25 m resolution, 7 classes (deciduous forest, coniferous forest, grassland, agricultural crops, fallow land, open water bodies and urban areas)	Derived from multi-temporal Landsat images (from 1994 and 1995)
	Digital elevation model	25 m resolution	HLBG (2000)
	3 land use scenarios	25 m resolution; 6 classes (mixed forest, grassland, agricultural crops, fallow land, open water bodies and urban areas)	Land use distribution derived from Proland model (Fohrer et al., 2002)
Time	2 weather stations	Daily resolution; 1980–1999; temperature, air humidity, wind speed, solar radiation	German Meteorological Service (DWD)
	15 rain gauges	Daily resolution; 1980–1999	German Meteorological Service (DWD)
	4 stream gauges	Daily resolution; 1980–1999	HLUG (2005)

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Print Version](#)

[Interactive Discussion](#)

EGU

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Table 3. Water balances and model efficiencies for the calibration (cal.) and validation periods (val.) of the four stream gauges within the Dill basin.

Quality measure	Cal./ Val.	Time interval	Dill	Upper Dill	Dietzhölze	Aar		
Mean bias in annual discharge	Cal.	Annual	4.7%	8.9%	6.6%	11.4%		
	Val.	Annual	12.0%	17.8%	7.2%	17.6%		
Model efficiency	Cal.	Daily	0.65	0.73	0.69	0.59		
		Weekly	0.81	0.85	0.82	0.76		
	Val.	Monthly	0.84	0.90	0.87	0.82		
		Annual	0.90	0.80	0.86	0.78		
	Val.	Daily	0.61	0.69	0.69	0.52		
		Weekly	0.79	0.84	0.83	0.77		
		Monthly	0.82	0.88	0.87	0.82		
		Annual	0.80	0.64	0.92	0.63		
		Coefficient of determination	Cal.	Daily	0.71	0.74	0.74	0.63
				Weekly	0.81	0.85	0.83	0.77
Monthly	0.86			0.90	0.88	0.83		
Val.	Annual		0.91	0.89	0.87	0.94		
	Daily		0.68	0.74	0.73	0.62		
	Weekly		0.81	0.86	0.83	0.78		
	Monthly		0.85	0.91	0.88	0.83		
Annual	0.78	0.78	0.91	0.66				

Impact of spatial data resolution on model results

H. Bormann

Table 4. Grid size dependent model efficiencies (me) for the four (sub-)catchments of the Dill basin (cal. = calibration period, val. = validation period).

Grid size	Dill		Upper Dill		Dietzhölze		Aar	
	me (cal)	me (val)	me (cal)	me (val)	me (cal)	me (val)	me (cal)	me (val)
25 m	–	–	0.73	0.69	0.70	0.70	0.58	0.46
50 m	0.65	0.61	0.73	0.69	0.70	0.70	0.58	0.46
75 m	0.66	0.61	0.73	0.69	0.70	0.70	0.58	0.46
100 m	0.65	0.61	0.72	0.68	0.69	0.69	0.57	0.46
150 m	0.66	0.61	0.73	0.68	0.70	0.70	0.58	0.46
200 m	0.66	0.61	0.73	0.68	0.70	0.70	0.57	0.46
300 m	0.65	0.61	0.73	0.69	0.69	0.69	0.57	0.46
500 m	0.65	0.61	0.72	0.68	0.70	0.70	0.56	0.45
1000 m	0.64	0.63	0.68	0.64	0.67	0.68	0.50	0.40
2000 m	0.64	0.61	0.67	0.55	0.58	0.62	0.51	0.42

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Impact of spatial data resolution on model results

H. Bormann

Table 5. Grid size dependent biases of total stream flow for the entire simulation period (bias (Qt), (%)) for the four (sub-)catchments of the Dill basin.

Grid size	Dill Bias (Qt) (%)		Upper Dill Bias (Qt) (%)		Dietzhölze Bias (Qt) (%)		Aar Bias (Qt) (%)	
	Cal.	Val.	Cal.	Val.	Cal.	Val.	Cal.	Val.
25 m	–	–	2.7	15.2	0.6	2.7	2.0	0.3
50 m	0.6	–0.4	1.8	14.4	–0.2	1.7	1.5	–0.3
75 m	1.0	–0.1	2.3	15.0	0.7	2.6	1.7	–0.5
100 m	0.6	–1.8	–0.1	12.1	–2.6	–1.2	0.0	–2.1
150 m	0.8	–0.3	1.9	14.4	1.2	3.3	2.0	–0.1
200 m	0.6	–0.6	2.1	14.5	0.1	2.1	1.8	–0.1
300 m	1.0	0.2	3.3	15.4	0.5	2.7	0.4	–2.0
500 m	0.2	–0.5	2.4	41.3	–1.3	0.7	2.8	2.8
1000 m	–2.0	–2.0	–3.4	7.3	–3.4	3.0	2.6	2.6
2000 m	3.3	3.8	–4.5	9.1	11.7	13.0	–1.8	–1.6

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Impact of spatial data resolution on model results

H. Bormann

Table 6. Correlation coefficients (Pearson) between input data (transmissivity, topographic index, land use) and model results (water balances, biases) for the entire Dill catchment.

Catchment property	Bias in stream flow	Stream flow	Surface runoff	Base flow	Actual ET
Crops	0.18	0.25	-0.54	0.53	-0.19
Pasture	-0.57	-0.63	0.39	-0.60	0.62
Fallow	0.80	0.85	0.05	0.37	-0.92
Deciduous forest	0.47	0.42	0.43	-0.12	-0.51
Coniferous forest	-0.81	-0.78	-0.17	-0.25	0.79
Urban	-0.46	-0.51	-0.63	0.24	0.74
Open water	0.92	0.89	-0.31	0.66	-0.76
Forest	-0.78	-0.81	0.34	-0.64	0.70
Agriculture	-0.73	-0.78	0.21	-0.53	0.79
Mean topographic index	-0.14	-0.12	0.98	-0.80	-0.15
Standard deviation of topographic index	-0.79	-0.75	0.40	-0.67	0.56
Mean transmissivity	0.95	0.92	-0.46	0.79	-0.77
Standard deviation of transmissivity	0.92	0.89	-0.56	0.85	-0.71

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Impact of spatial data resolution on model results

H. Bormann

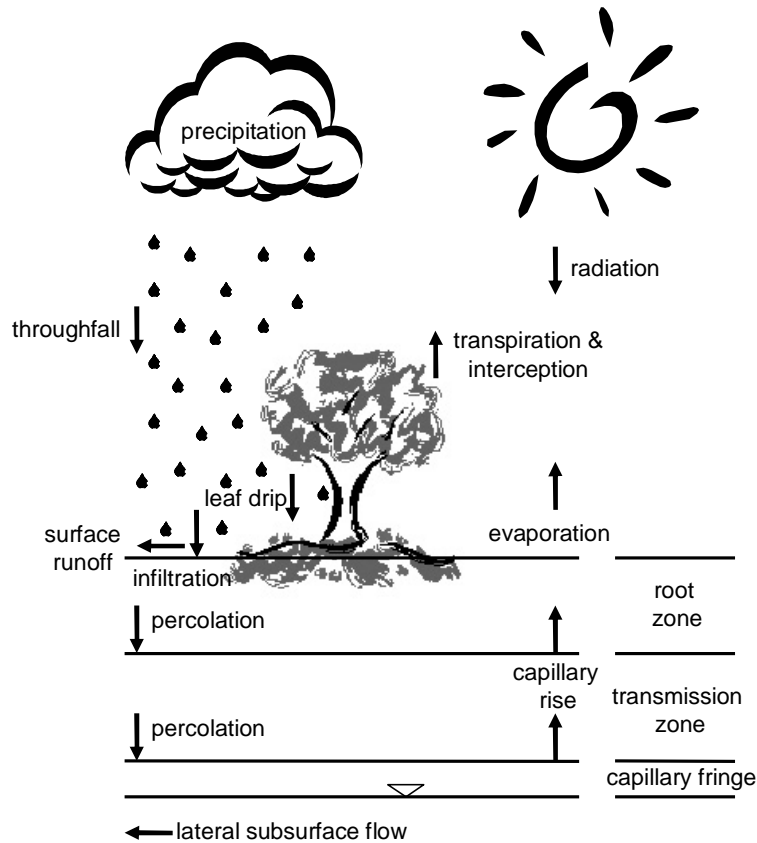


Fig. 1. Hydrological processes of the local SVATs represented by the TOPLATS model (modified after Famiglietti and Wood, 1994a).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Dill catchment

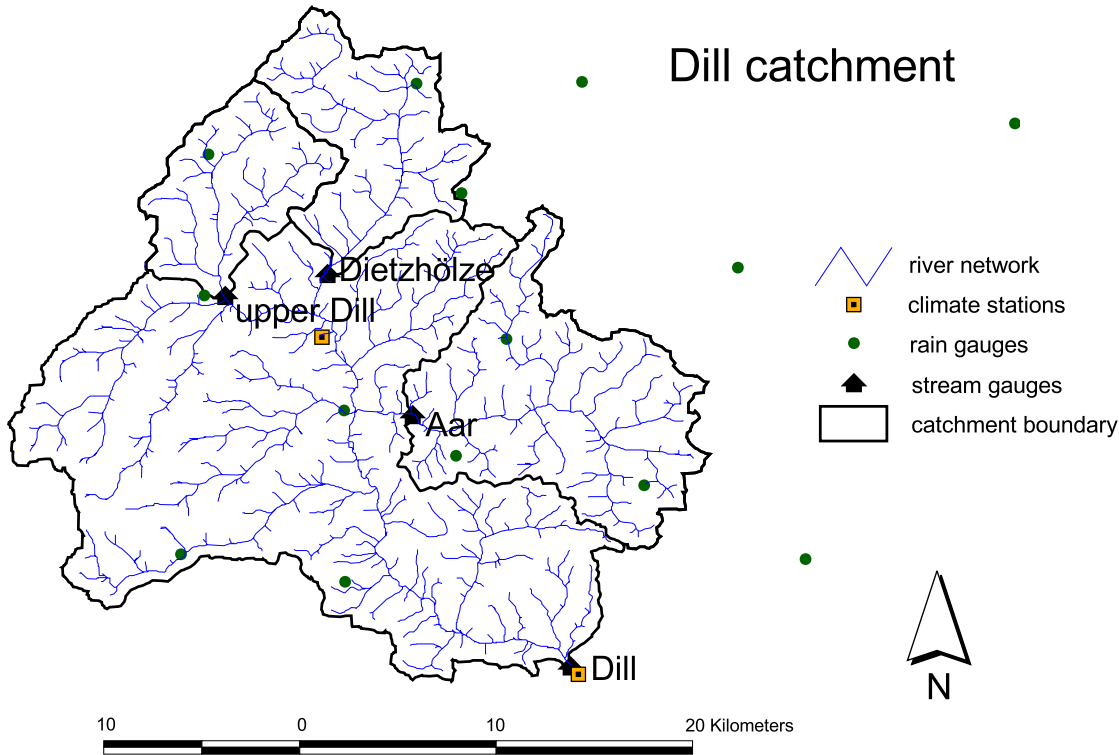


Fig. 2. Subcatchments (upper Dill, Dietzhölze, Aar), rain and stream gauges in the Dill catchment (693 km²) in central Germany.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back


Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

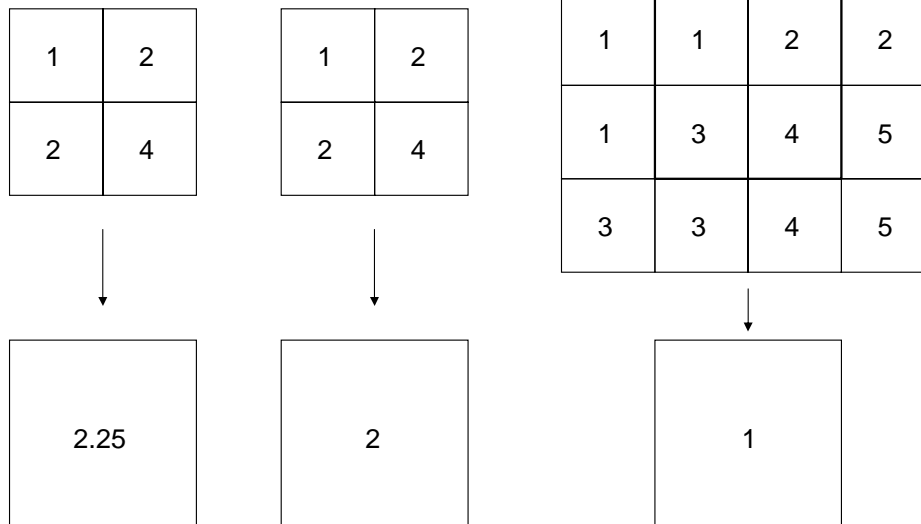

a) Simple average

b) Unambiguous majority

c) Majority including surrounding pixels

Fig. 3. Algorithms for systematic aggregation of spatial data sets: simple average **(a)** for DEM aggregation, majority **(b)** for aggregation of land use and soils, and consideration of the surrounding pixels if there is no unambiguous majority **(c)**.

Impact of spatial data resolution on model results

H. Bormann

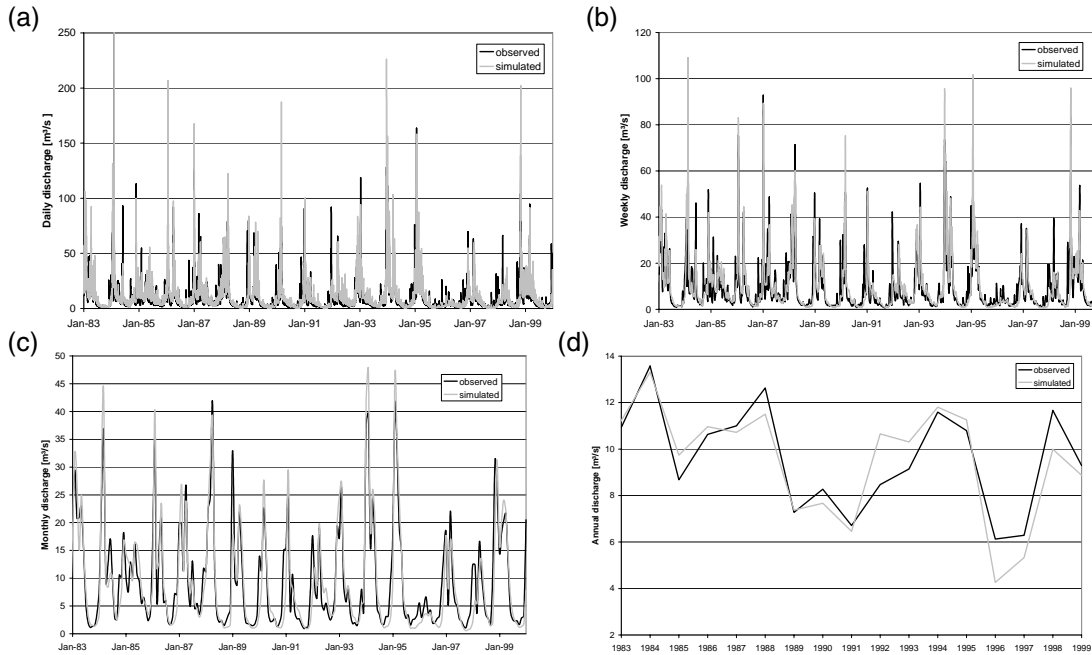


Fig. 4. Hydrographs of the Dill catchment: comparison of observed vs. simulated data in daily (a), weekly (b), monthly (c) and annual (d) resolution.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	

Print Version
Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

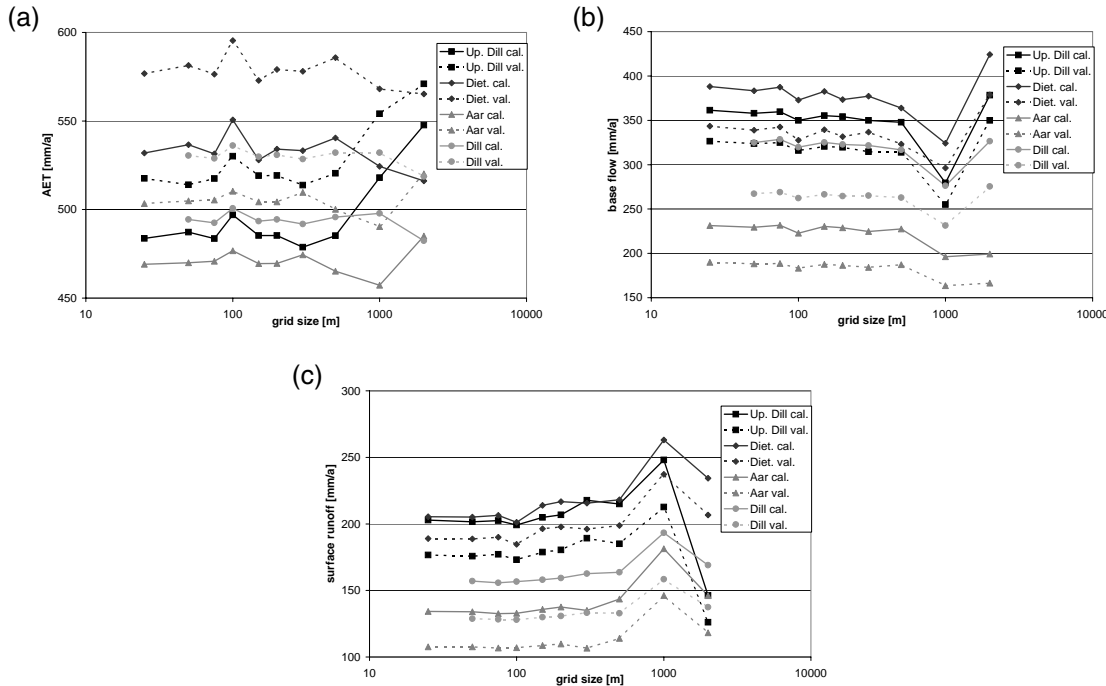


Fig. 5. Grid size dependence of simulated annual water fluxes: actual evapotranspiration (AET) **(a)**, base flow **(b)** and stream flow **(c)** of the Dill basin and its three subcatchments (Up. Dill = Upper Dill, Diet. = Dietzhölze). Calibration periods and validation (cal., val.) periods are analysed separately.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

EGU

Impact of spatial data resolution on model results

H. Bormann

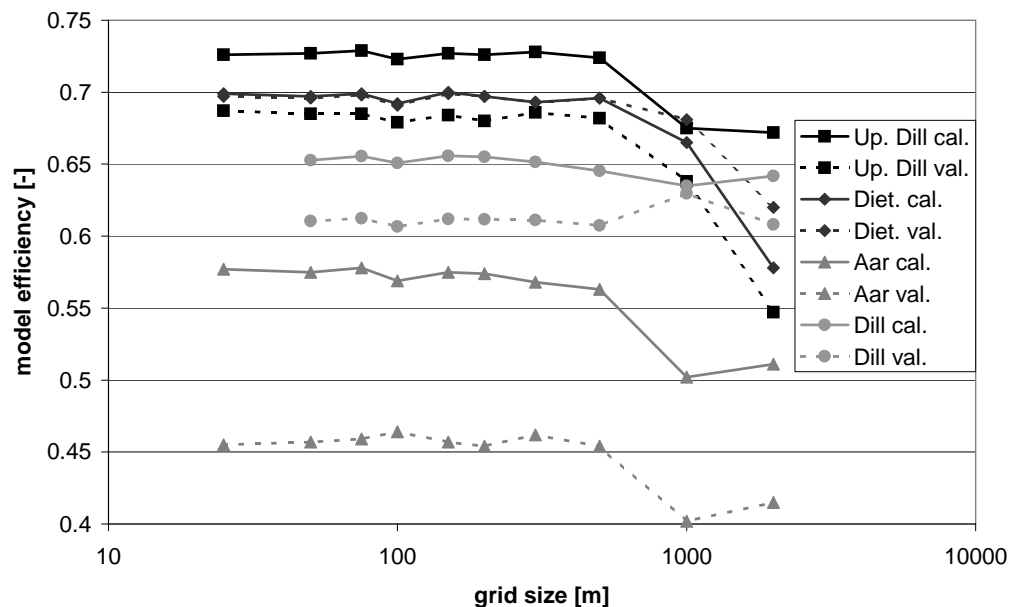


Fig. 6. Dependence of model efficiencies (based on daily simulations) on grid sizes for the Dill basin and its three subcatchments (Up. Dill = Upper Dill, Diet. = Dietzhölze). Calibration periods and validation (cal., val.) periods are analysed separately.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

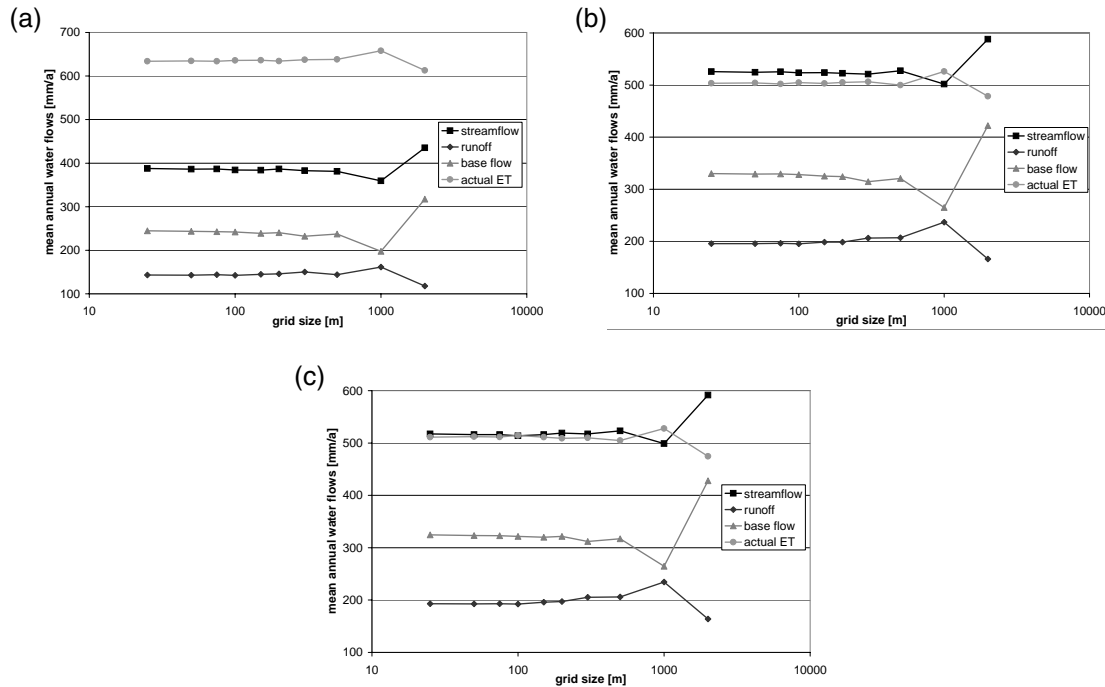


Fig. 7. Grid size dependent simulation results of the three different land use scenarios (0.5 ha = (a)), 1.5 ha = (b)), 5 ha = (c)) for the upper Dill basin.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

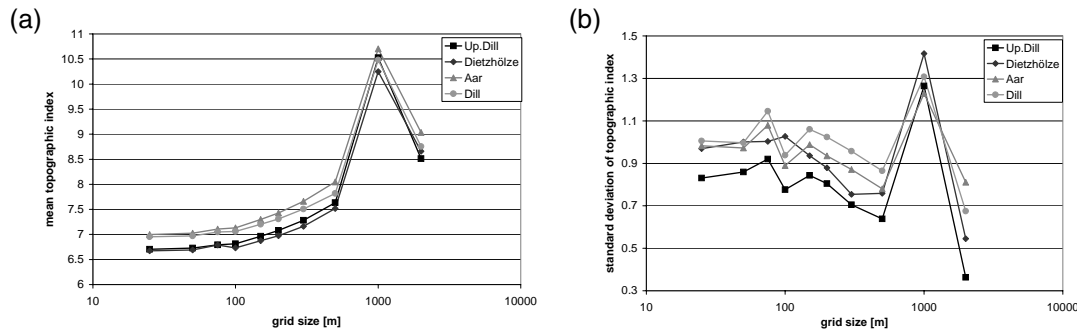


Fig. 8. Grid size dependent statistics of topographic catchment properties of the Dill catchment: mean value **(a)** and standard deviation **(b)** of topographic index.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Print Version	
Interactive Discussion	

Impact of spatial data resolution on model results

H. Bormann

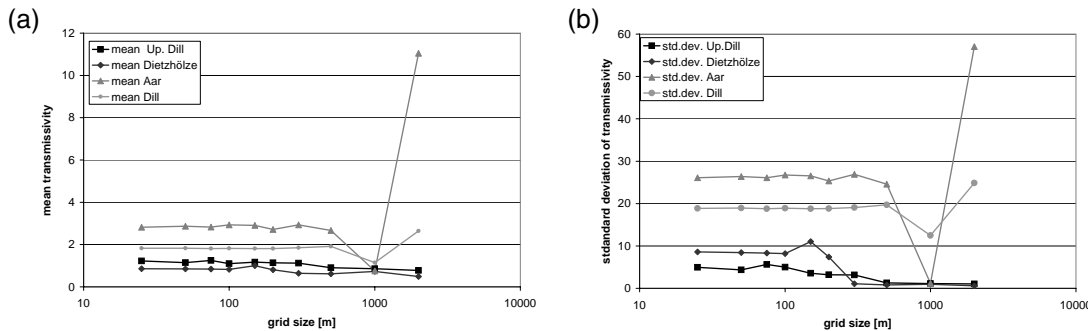


Fig. 9. Grid size dependent statistics of soil hydrological catchment properties of the Dill catchment: mean value **(a)** and standard deviation **(b)** of transmissivity.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Impact of spatial data resolution on model results

H. Bormann

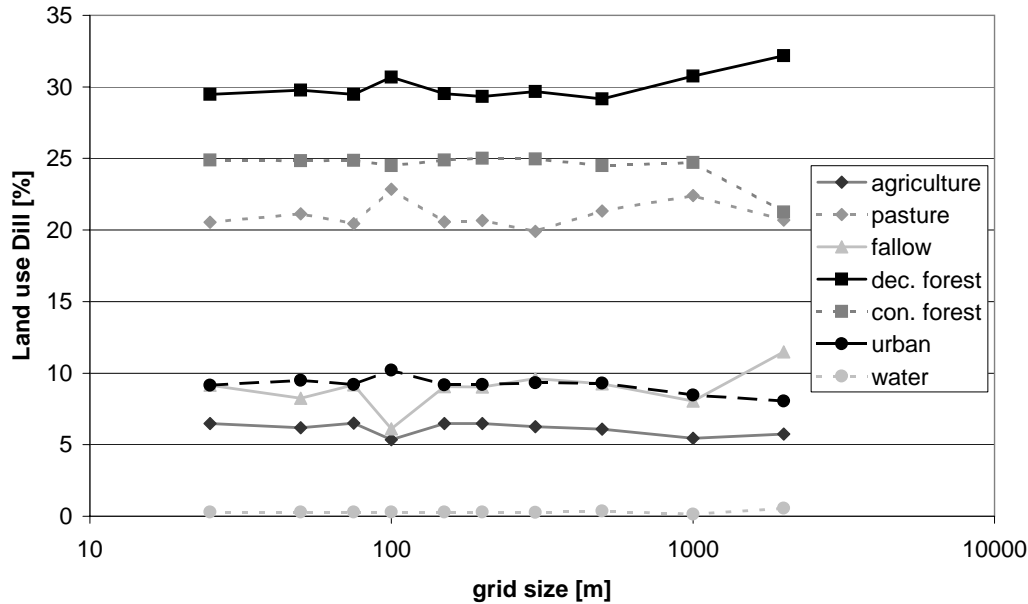


Fig. 10. Grid size dependent statistics of land cover classes of the Dill catchment.

[Title Page](#)
[Abstract](#) [Introduction](#)
[Conclusions](#) [References](#)
[Tables](#) [Figures](#)
[◀](#) [▶](#)
[◀](#) [▶](#)
[Back](#) [Close](#)
[Full Screen / Esc](#)
[Print Version](#)
[Interactive Discussion](#)

Impact of spatial data resolution on model results

H. Bormann

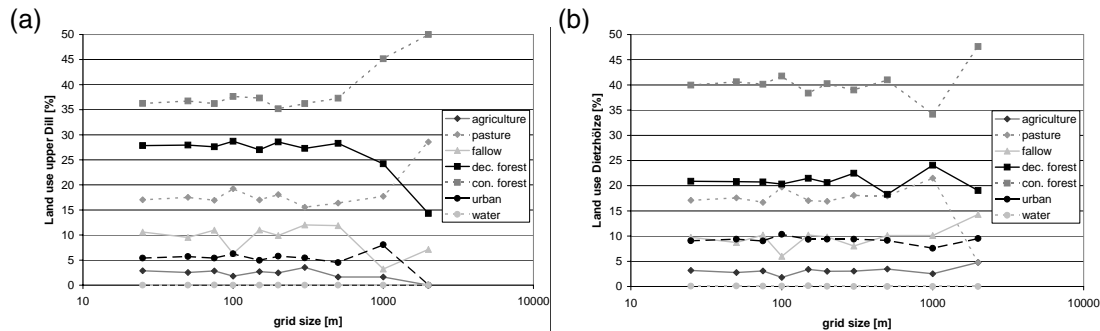


Fig. 11. Grid size dependent statistics of land cover classes of the upper Dill (a) and the Dietzhölze (b) catchment.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion