



Papers published in *Hydrology and Earth System Sciences Discussions* are under open-access review for the journal *Hydrology and Earth System Sciences*

Classification of  
hydrological models  
for flood  
management

E. J. Plate

## ***HESS Opinions***

# **“Classification of hydrological models for flood management”**

**E. J. Plate**

Emeritus Professor, Hydrology and Water Resources Planning,  
Universität Karlsruhe, Germany

Received: 2 June 2009 – Accepted: 3 June 2009 – Published: 1 July 2009

Correspondence to: E. J. Plate (plate@iwk.uka.de)

Published by Copernicus Publications on behalf of the European Geosciences Union.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## Abstract

Hydrological models for flood management are components of flood risk management, which is the set of actions to be taken to prevent flood disasters. It is a cyclical process: initiated by occurrence of an extreme flood it leads through the reconstruction and rehabilitation phase to risk assessment and project planning and implementation, and finally to operation and preparedness for a next extreme flood when the cycle starts again. We subdivide the tasks of flood management into two consecutive parts: planning and operation, which basically require different kinds of hydrological models. For planning, real time runoff is not needed, one works with design scenarios. For this task models should be used appropriate to the tasks at hand, which reflect characteristics of landscape as well as of hydrological scale. For operation, hydrological forecast models are needed which have to meet a different set of conditions. In this paper, requirements for hydrological models as functions of application, geology and topography, and of area size are surveyed. It is suggested that we always should start flood modeling with an analysis of local conditions and select or develop task and locality specific models.

## 1 Hydrological tasks for flood risk management

Recent large floods in many regions of the world have created new awareness for the need of systematic approaches to flood disaster prevention. In response to this need flood risk management has developed as a method, which systematically covers all actions for obtaining and managing feasible and financially affordable protection measures against floods. It includes not only measures for protection of people and goods at risk, but also for conservation of environment and riparian ecology. Modern principles, such as expressed by the Water Resources Directive of the European Union (WRDEU), demand that non-technical measures, including measures of temporary protection, should be used wherever possible. The directive also requires to focus

---

## Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

on the whole of a river basin in the planning process. This approach has also been promoted world wide by the International Decade of Natural Disaster Reduction of the United Nations (UN/ISDR, 2004).

5 Hydrological tools for these actions are flood forecast models and models to determine design floods for flood protection measures. Prerequisite for many temporary flood protection measures is a good forecast of expected flood levels, whereas design for permanent measures requires flood levels for different exceedance probabilities. A survey of requirements for models for flood risk management is given in this paper.

## 1.1 Flood protection and risk management

10 Risk management must be seen as a cycle, as shown in Fig. 1. This figure reflects the fact that there are two parts to risk management, as has been described in detail by Plate (2000). The lower half cycle covers the planning phase and includes planning, design and project implementation. The upper half reflects the operational phase, including maintenance, preparedness, and response and recovery after an extreme event. Although planning and operation are conducted by different actors, it is necessary that they are considered together as part of comprehensive flood risk management for each flood prone location. This is demanded by the WRDEU and has been implemented in new German regulations and codes, such as the Directive for the determination of the design flood of the German state of Baden-Württemberg (LFU, 2005).

25 The risk management cycle starts with a flood disaster in the region under study or nearby. After a phase of relief and reconstruction as immediate response to a flood disaster, the flooding situation is reassessed and frequently leads to demands for an improved protection system. A planning phase is initiated, in which options for meeting these demands are identified and their effects evaluated. In particular, for areas that experience floods only infrequently, it is necessary to also develop potential damage scenarios for floods larger than design floods, or for situations of breaking of dikes or dams. Damage assessment methods for dam breaks such as developed by Beltamio

---

## Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



de Almeida et al. (2000) should also be used for dikes, although consequences of dike breaks usually are less severe than those from breaking dams that impound large reservoirs.

For each option risks must be determined through the process of risk assessment, 5 which combines hazards – i.e. magnitude of flood levels and their probability of being exceeded – with vulnerabilities, i.e. potential damages for each object at risk – buildings, highways, dikes etc. Hazards are determined and expressed in hazard maps, which show areas of inundation as functions of flood levels of given exceedance probability. Then the risk as expected value of damages in the flooded areas is calculated, 10 just as is done for individual buildings by the insurance industry.

With risk as important decision criterion the process of decision making is initiated: the degree of demanded protection is established, plans to meet these demands by technical or non-technical means are prepared by experts, discussed by affected people and administrative bodies, and finally decided on by the owner – in case of a private 15 project – or by responsible political decision makers – in case of a project in the public domain. Then the existing system is improved, or a new system developed. For the operational phase, finished systems are turned over to the system manager's staff, who not only have to maintain the system, but who also have to adequately respond to fore-warnings: they have to produce and interpret forecasts from a flood forecast system (if 20 it exists) and warn people at risk immediately before the next extreme event. Then the management cycle starts again.

Listed in the centre of the risk management cycle are societal conditions under which 25 flood risk management has to be performed. They reflect the value system of the society at risk, but also available technology, and scientific understanding of the flood environment – conditions which change with time – due to changes in climate, but mostly due to changes in land use and habitation (a recent study by Schumann et al., 2001 shows that today in Germany there are no observable changes in flood runoff, which can be attributed unequivocally to climate change). Because of these changes, flood risk management is a task to be reconsidered by every generation. Today's objective

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

of flood protection is to provide, with due consideration to environmental requirements and ecological and legal constraints, a safety against the  $T$ -year flood, where  $T$  is the recurrence interval, and to be prepared for floods that exceed this level.

Decisions based on recurrence intervals reflect an intuitive assessment of the impact of protection system failure. On large rivers in Germany – i.e. on Rhine, Weser and Elbe –  $T=200$  is selected, whereas protection against storm surges in low lying countries, as in the Netherlands, may be as high as  $T=10\,000$  or more. Furthermore, flood risk management must include plans for handling residual risks, i.e. risks for the case of protection system failure, caused either by floods larger than the design flood, or by failures due to technical defects or human error. The residual risk usually is defined vaguely as the risk that exists even though protective measures are in place.

An important problem in modern flood risk management is to put the decision process for flood safety on a more objective base, by using a quantitative determination of residual risk as expected damage of failure of the protection system. To a first approximation, residual risks are calculated based on the assumption that every flood exceeding the design flood will cause the same damage, so that risk is product of exceedance probability  $P_E$  and damage  $K$ , where  $K$  is usually quantified in terms of monetary units, i.e. US \$. More detailed analyses also consider dependency of damage on design flood level (Merz and Gocht, 2003), in which case risk is the expected value of damage. Residual risks are used as components of cost – benefit analyses, where avoided damage due to a protection system is one of the benefits, whereas monetary risks and construction costs, properly discounted (Loucks and Van Beek, 2005) are parts of the costs. Ideally, the solution that minimizes the cost benefit ratio should be selected, but in practice, monetary risk is not the only type of risk to be considered in flood protection planning.

Ecological damages, as well as social consequences are also important, although there are neither tested indicators for quantifying these risks, nor weights which express relative importance of these indicators in comparison to monetary risks. Indicators and weights are expressions of the social value system of a society, which ultimately

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

translates into political actions. For setting priorities for such actions indices could be useful, which should be functions of weighted indicators. Assignment of weights to indicators is a political task, whereas derivation of indices is a scientific challenge (Birkmann, 2006). As is evident from this discussion, flood risk management is a process, which requires numerous actions at different levels and by many different persons. It is not really a scientific process, because the role of science is to identify causes and consequences and develop tools, not make decisions on values. Among the tools which science can contribute are hydrologic and hydraulic models, which shall be considered in the remainder of this paper.

## 10 1.2 Models for operation vs. models for planning

Models for flood protection should be application oriented. For the planning phase one needs models for developing flood inundation and flood risk maps, or models for calculating water levels or discharges for the design of flood protection measures. Furthermore, in preparation for the operational phase, models are needed to determine 15 operation rules, for example for operation of reservoirs. Most reservoir operation rules are based on scenario calculations with historical floods. However, today system operators want dynamic operational models that can be used in real time for deciding releases in anticipation of future floods, or for controlling series of barrages for effective dynamic storage of flood waters, as needed for example on the upper Rhine, in 20 order to meet the protection target of the “Integrated Rhine Program”. Flood forecasting models have to be developed, tested on historical events, and put into service in the planning and implementation phase. Such models are also needed for decisions on setting up temporary protection walls, or for evacuating endangered population groups. Development of all plans necessary for response to cases of extreme floods, which 25 exceed the capacity of the protection system, are part of the planning and implementation phase of flood risk management.

Flood forecasting occurs in both phases of the flood risk management cycle: during planning, the forecast model is designed and calibrated, and during operation its

---

### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



successful operation is prerequisite for any effective early warnings. Because an effective flood forecast and early warning system is generally less expensive than technical measures, it often is the most cost effective type of flood protection system, in some cases the only one, in particular for many developing countries. This is the case for some of the large rivers of Asia or Africa, where floods are frequent and lead to large losses of lives – such as in 1998 on the Limpopo in Mozambique, or in 2000 on the Mekong, where more than 3000 people drowned. Flood forecasting is the chosen method for preventing, or at least reducing, such losses of lives in the future.

It follows from these descriptions that there are two important categories of models to be used in flood risk management: forecast models and planning models. These two types of models shall be discussed in the following sections.

### 1.3 Forecast and prediction

The difference of planning vs. forecast models is illustrated in Fig. 2. Objective is to forecast water levels  $h_a(t_0+T_F)$  at time  $T_F$  later than the present time  $t_0$ , where  $T_F$  is the forecasting time and  $h_a(t)$  is the actual value of the water level at time  $t$ . A forecast model is used to forecast a value  $h_F(t_0+T_F)$ . The forecast model must be a function of the initial value  $h_a(t_0)$  at time  $t_0$ , at which the forecast is made. Regardless of the forecast model used any forecast is only an estimate, and for every forecast an error band exists, which can be expressed by means of a pdf (probability density function)  $f_{h0}(t_0+T_F)$ , which depends both on  $h_0(t_0)$  and on  $T_F$ . The larger  $T_F$ , the broader the error band becomes, up to a limit when forecast times exceed a certain maximum value  $T_P$ , when the initial conditions become irrelevant, and forecasts degenerate into predictions (in the hydrological sense), i.e.  $h_F(t_0+T_F)$  is a random variable with  $f(h)$  independent of time and initial value.

For flood forecasting it is of major importance that the forecast value is accurate. In many cases an erroneous forecast is worse than no forecast at all. People who had trusted a forecast that went wrong – for example, that forced them to evacuate an area – will not likely trust a future forecast. Consequently, development of dynamic models

---

## Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



for real time forecasting with as narrow an error band as possible is a major challenge for hydrological research.

For designing technical flood protection systems only good predictions of possible future extreme water levels for given exceedance probabilities are needed, and time of occurrence is irrelevant. The classical approach is to use statistical extreme value analysis of data obtained at river gages. For basin wide measures this is not sufficient. Rainfall-runoff models (RR-models) must supplement traditional extreme value models for flood risk management. Hydrologists are challenged to provide these models.

## 2 Rainfall-runoff models for flood management

10 We distinguish two types of RR-models for determination of floods of given frequencies. One type uses rainfall runoff modeling of the continuum of runoff in a river. Historical time series of rainfall (suitably area averaged) are used and the resulting calculated runoff time series is compared with the observed runoff time series. Differences between values from observed time series and from RR-model can be interpreted as realizations of a random process. Their mean value is a measure of model bias – to be corrected by parameter adjustment – and their variance is a measure of uncertainty. Because different sets of parameters may yield the same variance, (a property called “equifinality” by Beven and Freer, 2001), this method may yield good results on the average for the observed time series, but it may fail when extrapolated, as is observed

15 20 when the probability distribution of extreme values of the observed time series of runoff at some gage is compared with a distribution of extreme values of the calculated series.

The second type of RR-model is event based. It is not intended to be used for the whole time series. Its exclusive purpose is to predict extreme values of runoff – i.e. peaks, volumes, and shapes of flood waves. When used for planning purposes in flood risk management these models use hypothetical rainfall fields. These are  $T$ -year area averaged rainfall fields that are more or less uniformly distributed over the basin, under the assumption that the  $T$ -year area-averaged rainfall will also cause the  $T$ -year

---

### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

flood. For practical applications of this method, we (see Plate et al., 1988) have always insisted on validating such models at available gauging stations against extreme value distributions of local runoff.

5 All RR-models have in common that they have to describe the physical transformation of rainfall into runoff. This requires a common structure for all RR-models. This common model structure will be discussed in the next section.

## 2.1 Components of RR-models

Hydrological RR-models have three levels, each associated with three different time scales as indicated in Fig. 3 (adapted from Plate and Zehe, 2006). The data level

10 consists of permanent, seasonal, and event based data. Permanent are geometric and geological properties of the basin: basin area, topography and geology, river network and soil composition, as well as properties that change only gradually, such as land use: i.e. forest cover, road networks, urban developments, or large scale climate. Parameters describing agricultural activities and seasonal climate are associated with

15 seasonal time scales and determine seasonal variability of runoff coefficients. And finally, there are data for the event time scale. These depend on the model purpose. Planning requires historical data, whereas forecasting requires short term and real time event data, with time increments ranging from minutes to hours, depending on the size of the basin area.

20 The second level in Fig. 3 is the level of model formulation and development. The process of model building should start with a thorough assessment of the basin under investigation, orienting the model building process on available hydro-meteorological data, but also on characteristics of the basin. Hydrologists charged with developing a flood planning or forecast model for a basin should explore and describe its geological characteristics, trace its river networks, identify surface and groundwater interactions. Important flow paths of surface and subsurface flows need to be identified from the beginning, and appropriately reproduced in the model. No universal model exists that fits everywhere. For each situation and each catchment we have to build or adapt

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

models appropriate to location and application. They should reflect local conditions and incorporate all important human activities which may modify the rainfall runoff process. Due consideration should also be given to different time scales of different processes. Seasonal processes such as interactions of groundwater and surface water may well be described by models using larger time steps than runoff.

## 2.2 Types of rainfall-runoff models for flood calculations

In view of what has been said in Sect. 2.1 the choice of a RR-model is determined by intended application, basin scale, and available data, which set conditions for development of a new or adaptation of an existing model. The plethora of available RR-models can be divided into three types: models based on rectangular grids, models based on sub-catchments, and models based on response units. Topography and geometry of grid based models are derived from available large scale digital terrain models (DTMs). From the elevation of the four corners of a grid cell the slope of the cell is determined, and the channel network is derived from these slopes by means of special algorithms (Garbrecht and Martz, 1997; or Crowley and He, 2005). Climate and land use variables are combined with grid models through geographic information systems (GIS). Catchment based models (CBMs), on the other hand are vector oriented. They require subdividing the basin into sub-catchments, whose sizes and topographic characteristics have to be derived from DTMs. This is a lengthy preparatory process, which has the advantage that transfer of landscape features from topographic maps is easier facilitated, and river networks, geology, and land use can be naturally associated with basin features. The third type, models based on response units (REM) divide catchments into units of equal runoff formation. Both CBMs and REMs require that subunits are connected by means of networks of channels.

Grid based models are preferred for large scale continuous models, such as for climate investigations, but they are also applied frequently for flood modeling, both for flood forecasting (i.e. Todini, 1996) and for planning flood protection systems. With their help the continuum of floods is determined from long term rainfall time series

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



of observed and area-averaged rainfall and water balances, including calculations of the time series of evapo-transpiration. Such models are also useful for event based models, for design or for forecast, in order to determine the initial moisture state of the area element.

5 All area models have in common that they use a vertical component for determination of that part of the storm rainfall which becomes flood runoff, and a horizontal component for the routing of the rainfall excess to the nearest channel of the river network. Models for runoff use runoff coefficients ranging from simple constants which are empirically correlated to soil and groundcover parameters, to sophisticated functions obtained from water balance models, for which the area element is represented by an equivalent vertical soil column consisting of different layers (i.e. Todini, 1996; Refsgaard and Storm, 1995; De Roo et al., 2000). Water balance models separate the rainfall (minus interception) into surface storage, and groundwater replenishment by means of an infiltration – soil water transport model of varying complexity (Liang et al., 1996; Todini, 1996; Crowley and He, 2005).

Runoff is routed from the area elements – cells, sub-catchments or REMs – to the point of interest on the channel network. Routing models should reflect the considerations of relative size of area element to channel network to be discussed in Sect. 2.3. Simple models operate by using only translation, assuming a constant velocity of runoff 20 from the element. More complex models are based on linear systems, applied to each element. For example, Crowley and He (2005) use three parallel linear reservoirs, one for surface runoff, one for interflow, and one for baseflow, or groundwater runoff.

For CBMs the RR process for each sub-catchment is described by area models, which not only reflect the soil moisture balance (i.e. Bronstert, 2005) but also incorporate distinctive catchment features, such as local topography and land use such as urbanization and the network of roads and railways. The connectedness of the sub-catchments follows the channel network, in which runoff from sub-catchments is routed downstream. Such a model can be very detailed, depending on the resolution into sub-catchments, and the sub-models selected for hydrological processes. How much detail 25

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

is to be incorporated will depend on the model purpose, and on the scale of the region. Obviously, a flood model for a basin of, say, 1000 km<sup>2</sup> does not need the same resolution as an area of a few hectares.

### 2.3 RR-modeling in different landscapes

- 5 Different characteristics of landscapes should require different types of models. For example, floods in mountain valleys have very different characteristics from floods on flood plains of large rivers. Theoretical hydrologists tend to use the same type of model for all types of catchment, although it seems obvious that the model should reflect the dominating processes for the type of landscape for which the model is to be applied.
- 10 We recommend to distinguish four different types of landscapes and to develop models accordingly. These are (a) high mountain ranges, (b) foothill ranges with or without vegetation, (c) large flood plains, and (d) urban areas, as indicated schematically in Fig. 4. A fifth region is the area affected by coastal processes, for example delta regions which are subjected to storm surges. Such a subdivision is important for design of flood
- 15 protection measures. From a physical point of view, it is useful to further subdivide these area types. Within each of these areas there exist sub-areas with their special hydrological characteristics, for example forested regions, or wet lands etc. – and a subdivision of sub-catchments into such characteristic sub-areas eventually leads to decomposition of sub-catchments into many different REUs.
- 20 Mountain areas are mainly threatened by flash floods – intensive and local rainfall events, which lead to rapid increase of water levels and velocities in runoff channels. In general, river courses in these areas are deeply incised, and flooding usually is restricted to a narrow strip along the river, where due to high velocities damages to bank protection works and structures – as in villages where houses have been built too
- 25 close to the creeks – can be very heavy, aggravated by frequent occurrence of debris jams, in particular on bridges. Frequently extensive damage occurs mainly on highways which for technical reasons had been built along the rivers. Flood protection in such areas consists at most of bank protection works, more usual is a flood protection

---

### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

strategy which on each side of the creek leaves a strip of land where no human activity is permitted, or where land use is restricted to agriculture. In such valleys, a detailed analysis of floods is frequently of little use: planning models in such areas usually are hydraulic models for extreme flood scenarios based on historical floods.

5 In foothill regions, or in the geologically ancient mountains which are typical for the State of Baden-Wuerttemberg, in Germany, extreme precipitation or snow melt usually lead to more widespread inundations than in mountain valleys, and velocities are not of the same importance. Distinguishing characteristics of floods in such regions is their impact on villages and agricultural lands. Flood protection measures in such areas  
10 consist of reduction of peak flows by means of retention basins in the upper parts of the small rivers, and removal of narrow sections in villages, with dikes in particularly sensitive stretches of the rivers or creeks. Flood protection of villages and small cities against the 10 to 30 year flood is secured by these measures; floods of lower probability are reduced, but not avoided. Usually many retention basins are used in a basin, each  
15 of which protects a small area up to a level of  $T=20$  to 50, and all of them in combination reduce flood frequencies in the lower parts of the rivers to about  $T=100$  years. Dikes, although standard measures for flood protection for larger rivers, are rarely used on small rivers (with catchments of a few hundred  $\text{km}^2$ ). For planning measures in foothill regions we use RR-models, whose structure depends on the catchment's size, as will  
20 be described in the next chapter.

In the plains of low lands velocities are even less important. Damage is mainly caused by high water levels, and in some situations due to interaction with groundwater – groundwater tables being raised in inundated areas, which in turn flood basements or cause backing up of sewerage channels. The greatest threat to human lives comes  
25 from wide spread inundations, in particular when over very wide areas the water level rises only slowly, and escape routes are cut off so that people are trapped on higher grounds, if help does not come soon enough. Dikes are the natural measures for protecting low lands, but dikes may fail, or water levels reach heights above the design height of the dike system. Today one finds that in many parts of the world protective

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



measures include also widening of the river flood plain between dikes, by new dike lines further inland, with a double dike system. In some cases existing dikes are altogether removed, or the formerly inundated flood plains are replaced by flood polders, which are flooded only when the water level in the main river exceeds a certain critical 5 value. Obviously, forecasting future discharges or water levels for such areas is of considerable importance – not only for warning endangered populations, but also for the purpose of operating side polders or retention basins in the catchment of the river.

Urban areas need special hydrological models, to incorporate sewer systems and runoff conditions from streets and houses. Hydraulic RR-models are needed to 10 describe flooding from rainfall, as well as from rivers, on whose banks cities are located. In Germany, smaller natural water courses have been made part of the local sewer system, and many of the small creeks flowing through cities or villages have been confined into pipes. Extreme floods, often combined with debris and trash plugging, cause such pipes to overflow and produce heavy local flooding. Typical flood situations were 15 observed in the city of Dresden during the August flood of 2002, which was caused both by flash floods from small tributaries flowing into the city and bank overflow of river Elbe. A third important cause of damage for Dresden was the raised groundwater table due to inundation of the city. Consequently, it is necessary that urban drainage models for cities are integrated into detailed RR-models of rural areas, not only to evaluate 20 the effect of the basin river network on urban flooding, but also to assess effects of urbanization on runoff from catchments.

## 2.4 Hydrological scales and their significance in flood calculations

The choice of a RR-model is not only dependent on type of area, as described in the 25 previous section. An additional decision criterion for model selection is the hydrological scale of the area. Hydrological scales have become important elements of categorizing basins (Plate, 1992; Blöschl and Sivapalan, 1995). Hydrological scales are defined both by size of the area, and by locally dominant processes and their representation in models. Of special importance is the relative significance of overland flow as com-

---

### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

pared to runoff in the channel network of the area. This is illustrated in Fig. 5. In this figure the smallest scale is associated with the area element  $a$  (an element roughly of  $1 \text{ m}^2$ ). Surface runoff from this area element flows as overland or baseflow to the nearest channel. Runoff from all area elements in sub-area  $A_j$  combine into overland flow inputs with characteristic runoff time  $t_C$ , the time of concentration from area  $A_j$ . The total basin has  $n$  sub-areas, i.e.  $j=1,2,\dots,n$ . Runoff from each area  $A_j$  is routed through the channel network. The process of flow routing in the channel network has a characteristic time  $t_f$ , the routing time. The ratio of  $t_C/t_f$  is a suitable indicator for selection of a model scale. A measure for  $t_C$  is the rise time of the unit hydrograph for an area, for which formulas are available, based on describing unit hydrographs by means of a gamma function (Ihringer et al., 1990; Ihringer, 1996). A measure for  $t_f$  is the flow time in the channel network, expressed through length and estimated velocity of the main channel of the network.

#### 2.4.1 Point scale

The scale of the area element  $a$ , measured in  $\text{m}^2$ , is called the point scale. At this scale,  $t_f$  has no meaning. Processes on this scale are mainly vertical, they are significant for flood modeling only insofar as they determine the separation of runoff into infiltration, surface storage (and eventual evapo-transpiration) and overland flow. Processes on this scale are highly non-linear and locally very variable, local soil characteristics and plant cover determine local runoff, which sets in after infiltration capacity is exceeded (i.e. Bronstert, 2005). As has been shown (i.e. Zehe et al., 2005) macro-pores induce two types of switching mechanism in the conversion of rainfall into runoff: they are activated when the infiltration capacity of the soil matrix is almost saturated and overland flow sets in, and they lose their effect when macro-pores which are closed at the bottom are filled, so that only matrix infiltration and infiltration into open macro-pores are effective. Other influences on the process of converting rainfall into runoff are local depressions and micro-topography (depression storage), which retain part of the runoff, or frost phenomena influencing or preventing infiltration, or local effects on runoff pro-

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



duction during snow melt. Because of the potential variability of point scale processes for different area elements  $a$ , processes on the point scale are considered mostly for homogeneous areas, such as agricultural fields or forest areas on homogeneous soils.

## 2.4.2 Micro-scale

5 Models on the point scale are building blocks for micro scale models. The idea of subdividing a catchment into contributing areas – i.e. different areas with similar infiltration potential – assumes the existence of homogeneous or almost homogeneous areas, which are aggregations of area elements  $a$  with similar infiltration characteristics. For each of these contributing areas, the determination of the beginning of runoff and of an

10 area averaged  $t_C$  is important for any sub-area  $A_j$ . RR-models for floods must consider these processes in detail if  $t_f/t_c$  is small.

More generally, we define micro-scales (Plate and Zehe, 2006) as the scales of models which can be described by means of the fundamental conservation laws of continuum physics, i.e. by means of partial differential equations. Typical models of

15 this kind are hill slope models, which must be used if extreme rainfall effects on surface erosion or pollutant transport have to be considered. Extensive investigations on this scale have been made at Karlsruhe University as summarized in Zehe et al. (2001).

## 2.4.3 Meso-scale

We define the meso-scale as that scale in which RR-models are described by conceptual models based on system functions. Basic element is one system function  $u_j(t)$  for each of the sub-areas  $A_j$ , with  $t_{cj}$  = characteristic time of concentration for area  $A_j$ . For the low mountain ranges of central Germany this scale is associated with areas ranging from 1 to several  $\text{km}^2$ . Usually, the sub areas have small creeks, so that  $t_f/t_c$  is non-zero, but their effect is included into the concentration time. Typical for this scale are models of the unit hydrograph type. There is no clear limit in area for the use of unit hydrograph models; its application depends on catchment characteristics and available

---

### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

data. Generally, in flat lands unit hydrographs can be used for larger catchments than in mountainous country. However, because of lack of data hydrologists are frequently forced to use unit hydrographs also in other large areas. On the other hand, where data conditions are adequate (and sufficient time and resources are available), modeling on this scale can also be based on micro-scale or grid based models, including full hydraulic models of the channel network.

The importance of meso-scale processes increases with increasing area size. Flow in the river network increasingly dominates the rainfall runoff process. In order to capture spatial differences, it is recommended today to separate larger catchments into sub-catchments, which are connected through the runoff network. Runoff from sub-areas can be calculated by means of unit hydrographs, but other models based on more detailed physical modeling of the rainfall runoff process in small catchments may also be suitable. Models combining sub-catchment runoff with river networks are particularly advantageous for situations in which the geological or topographic properties are very different in different sub-catchments, causing very different runoff forming processes in different parts of the catchment. For example, it becomes possible to model different reaction characteristics of the rainfall runoff, depending on the time development of local infiltration rates. This was well illustrated in the study of Casper et al. (2003) in the Eyach-valley of the Northern Black Forest. He could identify numerous different sub-processes contributing to the time development of the runoff process, with large differences in runoff formation between bogs with limited retention potential on one end of the spectrum, and permeable sandstone on the other end.

For meso-scale processes, the spatial and/or temporal variability of the rainfall field may need to be considered. The scale of the rainfall field is superimposed on the scale of the catchment. Locally, it is well known that extreme rainfalls, which cause only minor floods in a large catchment, may locally lead to very high runoff peaks, or to local flash floods. And for large scale rainfall events, the temporal variability of the rainfall field may completely mask the effect of the catchment. A simple example may serve to illustrate this point. Let the area averaged rainfall field be temporally variable,

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

as expressed through a rainfall intensity function  $I(t)$  of duration  $T_D$ , where:

$$I(t) = \frac{1}{A_G} \int_A I(t, A) \cdot dt \quad (1)$$

is the rainfall averaged over the catchment area  $A_G$ . Let the unit hydrograph for the catchment be given by a function  $u(t)$ :

5  $u(t) = f(t, T_A)$  (2)

with characteristic time  $T_A$  (for example,  $T_A$  = rise time of the unit hydrograph).

Assuming the runoff coefficient  $\varphi$  to be independent of time we can determine the discharge by means of the convolution integral:

$$Q(t) = Q_B(t) + \varphi \cdot A_G \cdot \int_0^t I(\tau) \cdot h(t - \tau) \cdot d\tau \quad (3)$$

10 where  $A_G$  = size of the catchment, and  $Q_B(t)$  is the base flow. If the characteristic time  $T_D$  of the rainfall event is short compared to  $T_A$ , i.e.  $T_A/T_D \Rightarrow \infty$ , then  $I(t)$  can be approximated by a delta function  $I_0 \cdot \delta(t)$ , and the solution of Eq. (3) is:

$$Q(t) = Q_B(t) + \varphi \cdot I_0 \cdot A_G \cdot u(t) \quad (4)$$

i.e. only catchment characteristics shape the discharge hydrograph. For the other extreme case, i.e. for  $T_A/T_D \Rightarrow 0$ , the unit hydrograph degenerates to unity, and:

$$Q(t) = Q_B(t) + \varphi \cdot A_G \cdot I(t) \quad (5)$$

i.e. the dynamics of the runoff process is determined exclusively by the dynamics of the rainfall and by its distribution in space, as expressed by Eq. (1). Equation (1) applies mostly to small catchments, where an area average rainfall as calculated by Eq. (1) is appropriate. For large spatial scales, spatial rainfall distributions as well as time distribution of area averaged rainfall fields need to be considered, which requires that the

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

total area should be subdivided into sub-catchments with local area averaged rainfall inputs. Such an approach is particularly important for forecasting flash floods, whereas for design models the actual distribution of the rainfall is of secondary importance.

As a consequence we conclude that meso-scale models must be used also for cases where times  $t_L$  and  $t_F$  are of the same order of magnitude. In such cases runoff formation on sub-catchments is of equal importance as runoff in the channel network. We find that this approach should be used for areas ranging from a few  $10 \text{ s km}^2$  to a few  $100 \text{ s km}^2$ . In our experience we find that it is particularly useful to subdivide larger catchment into smaller catchments according to water divides, and to describe runoff from sub areas (of a few  $\text{km}^2$  size) by means of unit hydrographs and runoff in channels by means of 1-d calculations with St.Venant equations, or even simpler by means of flood routing models, such as the well known method of Kalinin-Miljukov. Our IHW-Model by Ihringer et al. (1990), Ihringer (1996) and see also Plate et al. (1988) was developed based on this principle and has been applied successfully for flood determinations in central mountain regions of South and central Germany.

#### 2.4.4 Macro-scale

The scale of the IHW model is the scale in which runoff generating processes associated with characteristic times  $t_c$  are of equal importance as channel flows with characteristic time  $t_F$ . With further increase of catchment size, ratio  $t_c/t_F$  decreases asymptotically to 0, when dynamics of the runoff process is fully dominated by channel flow. This is the case of macro-scale modeling, and refers to catchment sizes ranging from about 1000 to several  $10\,000 \text{ s km}^2$ . On this scale, there is no need to model surface runoff in detail. Naturally, runoff coefficients  $\varphi$  have to be determined for all sub-areas, but retention and runoff characteristics of sub-areas can be represented by simplified functions, such as exponential (linear reservoir) functions, or by local runoff coefficients  $\varphi_A$  that are constant for each sub area A.

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

### 3 Comparison of flood models for planning and forecasting

#### 3.1 Advantages and disadvantages of flood models for planning

The principal statistical tool for planning flood protection works is extreme value analysis. Extremes of runoff are determined by two independent methods (which ideally are complementing one another). The first and more traditional method uses directly extreme values of time series for discharges (or water levels) for determination of design floods – typical is a flood with a recurrence interval of once every 100 years – i.e. the 100 year flood. There are a number of disadvantages to this approach. It relies on measured time series of water discharges (or water levels) at a point, i.e. it obviously requires presence of a gage on the river near the spot for which we want to determine the design flood. For statistical reasons it needs observations of long time series for a reasonable fit to a – generally unknown – probability distribution of extremes. The most important advantage of this method is that it avoids uncertainties of the generating process of the extremes. There exists a vast literature on extreme value analysis, which shall not be discussed here.

The second method uses RR-models. They also depend on statistical inputs, this time of rainfall fields. Uncertainty of runoff prediction from RR-models primarily stems from prediction of the extreme rainfall event for the catchment, i.e. the inherent uncertainties of extents and intensities of rainfall fields. Additional uncertainties are caused by the time variability of soil moisture and other dynamic catchment parameters needed to convert rainfall into runoff. Advantages of RR-models are obvious. Rainfall inputs are less dependent on local conditions, and thus rainfall statistics can be generalized for large areas. Furthermore well calibrated RR-models can be used for flood prediction – not only peak values – at every point in a catchment.

The actual recurrence interval for design floods is never accurately known because of numerous potential errors due to model complexity (model error), incomplete information on parameters (parameter error) or insufficient or inaccurate data (data and sampling errors). The true recurrence interval of an observed event can never really

---

#### Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

be ascertained. An error range of  $\pm 15\% = 30\%$  is not uncommon, and this may mean – for example when determining the 100 year flood – to design not for the 100 year flood, but for floods of recurrence interval of 150 or 50 year. Already small changes in the flood level may cause large changes in calculated probability. This is illustrated in Fig. 6 where ratios  $x_{100}/x_{20}$  (i.e. of the 100-year to the 20 year flood), and ratios  $x_{1000}/x_{100}$  (i.e. of the 1000 year flood to the 100 year flood) are shown as function of coefficient of variation  $CV_x$  for the two parameter gamma distribution. (This distribution has been found give best fits to long data series of larger basins in South Germany, LfU, 1999). For two parameter distributions, such a presentation is unique, for three parameter distributions we obtain a family of curves with skew coefficient  $CS_x$  as third parameter.

For two parameter gamma distributions  $CS_x$  and  $CV_x$  are related as  $CS_x = 2CV_x$ , where the magnitude of  $CS_x$  is restricted by the fact that already for  $CS_x = 2$  gamma distributions reduce to the exponential. Thus, if one assumes an average skew factor of 1, corresponding a  $CV_x = 0.5$ , one finds both curves to show differences of 30% between the 1000 and 100 year flood, or between the 20 year flood and the 100 year flood, respectively, corresponding to a tenfold resp. fivefold range of return periods. This uncertainty has epistemic and natural causes. Epistemic uncertainty includes both data and model uncertainty, whereas natural variability is due to the complexity of the natural processes and catchment characteristics leading to runoff variability. These uncertainties add up to a wide range of potential exceedance probabilities, as was well illustrated in a number of examples in a recent paper by Merz and Thielen (2005).

It is very difficult to overcome these uncertainties. Some improvement is found by regionalization based on many different runoff gages in a region. On this basis, the IACWD (1982) recommends to use regionalized skew coefficients with a given extreme value model for the whole of the USA. Regionalization was also used by Ihringer (LfU, 2005) who developed a regionalization model, which permits to estimate the 100 year flood for every point in the German State of Baden-Württemberg. But it must be realized that in the end the decision for flood protection measures is a political de-

---

## Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

cision, which leads to a politically acceptable recurrence interval, typically based on large historical events. For example, the design flood for the Upper Rhine (Rhine between Basel in Switzerland and Mannheim at the confluence of Rhine and Neckar) has approximately a  $T=200$  years, but it is based on the extreme value observed in 1882, (shifted in time to account for Rhine corrections made after 1882, so that peaks of Neckar and Rhine floods coincide), plus freeboard. This approach may appear rather simple in terms of modern hydrology, but it had the advantage of being plausible and politically acceptable.

### 3.2 Advantages and disadvantages of forecast models

10 The major difference between forecasting and planning models is accuracy. Flood forecast models require higher accuracy than planning models. As has been discussed in Sect. 3.1, it will never be possible to accurately identify the recurrence interval of an extreme event that has actually happened. It could have been a more frequent, or a less frequent event. The case of flood forecasting is different, after a flood we know 15 very well if the forecast has been accurate, or accurate enough. On the other hand, a forecast model does not have to correctly model the physical basis of the rainfall-runoff process, so that any method which is reasonable and yields acceptable results may be used, for example regression analysis, or artificial neural networks which have been trained on past records.

20 What is meant by a good forecast has to be specified not only intuitively (by how the warned PAR (= people at risk) feel about the forecast) but objectively, by means of an objective criterion, which is derived from past events of varying magnitude. Obviously, a criterion based on the average performance of a flood hydrograph, such as the criterion by Nash and Sutcliffe (1970) is not sufficient. The criterion must be geared 25 to weigh the course of the hydrograph of the future, as observed from a known point of the hydrograph of the past. A possible criterion could be based on the following considerations.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

It is evident that for short times (short in relation to a critical time, which depends on the size of the catchment or basin) the requirements for complexity of forecast models are not very high – because the discharge cannot have discontinuities, for physical reasons. If there is no other information available, the best forecast for the near future is to forecast the value at time  $t_0+T_F$  as being equal to the value at  $t_0$ . The performance of a forecast, expressed through a forecasted value  $h_f(t+T_F)$  after time  $T_F$  should be judged relative to this value. This implies that the deviation of the forecasted value  $h_f(t+T_F) - h_0(t)$  from the present value should be large relative to the deviation of the actual value  $h_a(t+T_F)$  from the forecasted value  $h_f(t+T_F)$ , i.e. from  $h_a(t+T_F) - h_f(t+T_F)$ .

In terms of quadratic deviations (to eliminate the need for sign corrections) we could express this condition by an index (Kitanides and Bras, 1980)<sup>1</sup>:

$$I_F(T_F) = 1 - \frac{\sum_{n=1}^n [h_f(t + T_F) - h_a(t + T_F)]^2}{\sum_{n=1}^n [h_f(t + T_F) - h_0(t)]^2} \quad (6)$$

for which during calibration the sums have to be taken at each time  $t = i \cdot \Delta t$ ,  $i = 1, 2, \dots, n$  over the whole forecast interval  $T_F = n \cdot \Delta t$  of the event, where  $\Delta t$  is the time increment.

A positive value close to 1 of  $I_F(T_F)$  indicates good, a small or even negative value poor performance, i.e. if  $I_F(T_F)$  is close to 0 or even negative, the performance of the forecast is not better than taking the value of today (at time  $t$ ) as forecast for the value at time  $t+T_F$ . We conclude that forecast models are even more dependent on a good data base than planning models. Only many comparisons of actual with forecasted data can establish confidence in a forecast model.

<sup>1</sup>Note that this is similar to the criterion of Nash and Sutcliff (1970), except that height  $h$  replaces discharge  $Q$ , and the initial value  $h_0(t)$  at time  $t$  replaces the average value of the complete hydrograph.

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## 4 Conclusions

This paper makes a case for considering models for flood forecasting and models for planning of flood protection structures as important but quite different tools for managing flood risks. Flood risk management is seen as a comprehensive approach for handling the consequences of extreme flood events so that they do not lead to flood disasters. The objective of development or adaptation of models is their intended application. This requires that we distinguish models by scale and by topographic context: models for large basins in topographically flat country require different approaches than, for example, models for flash floods in mountain areas. As prerequisite of model choice a thorough understanding of local topography and climate processes is essential. But models should not only reflect local scales and local terrain features and geology, but they also should be suited to the intended application.

Differences in the types of models for planning versus models for flood forecasting are stressed, although the paper is descriptive in nature. Analytical concepts for model structures and calculations cannot be covered, and for details references are given which reflect mostly the experience of the author and his team at the University of Karlsruhe. We feel that hydrologists today must be aware that their work can serve two very different purposes: one is to better understand nature, and the other is to provide analytical tools for helping water managers and design engineers to better handle their design and management problems. We are not yet at the stage where our models completely merge the two purposes: a better understanding and modeling of hydrological processes must start with the smallest scales and continue to larger ones by integration over more and more small scale area elements, whereas engineering applications need only consider those aspects which are relevant to quantify the runoff process. In looking at planning models and forecast models for floods, the two different aspects of modeling become particularly evident.

---

Classification of hydrological models for flood management

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Betamio de Almeida, A. and Viseu, T. (Eds.): Dams and Safety Management at Downstream Valleys, Balkema, Rotterdam, 1997.

Beven, K. and Freer, J.: Equifinality, data assimilation, and estimation in mechanistic modeling of complex environmental systems using the GLUE methodology, *J. Hydrol.*, 249, 11–29, 2001.

Blöschl, G. and Sivapalan, M.: Scale issues in hydrological modeling: a review, *Hydrol. Process.*, 9, 251–290, 1995.

Blöschl, G., Grayson, R. B., and Sivapalan, M.: On the representative elementary area (REA) concept and its utility in rainfall – runoff modelling, *Hydrol. Process.*, 9, 313–330, 1995.

Bronstert, A. (Eds.): Abflussbildung: Prozessbeschreibung und Fallbeispiele, Forum für Hydrologie und Wasserwirtschaft, DWA Deutsche Vereinigung für Wasserwirtschaft, Abwasser und Abfall Fachgemeinschaft Hydrologische Wissenschaften, 2005.

Casper, M., Volkmann, H. N., Waldenmeyer, G., and Plate, E. J.: The separation of low pathways in a sandstone catchment of the Northern Black Forest using DOC and a nested approach, *Phys. Chem. Earth*, 28, 269–275, 2003.

Crowley II, T. E. and He, C.: Distributed parameter large basin runoff model I: Model development ASCE, *J. Hydrol. Eng.*, 10, 173–181, 2005.

De Roo, A. P. J., Wesseling, C. G., and van Doysen, W. P. A.: Physically based river basin modelling within a GIS platform: the model LISFLOOD, *Hydrol. Process.*, 14, 1981–1992, 2000.

Garbrecht, J. and Martz, L. W.: The assignment of drainage direction over flat surfaces in raster digital elevation models, *J. Hydrol.*, 193, 204–213, 1997.

IACWD (Interagency Advisory Committee on Water Data): Bulletin 17-B Guidelines for determining flood flow frequency: United States Geological Survey, Washington, D.C., 1982.

Ihringer, J.: Hochwasser aus ländlichen und städtischen Gebieten, *Z. Geol. Wissenschaft.*, 14, 523–530, 1996.

Ihringer, J., Beelitz, W. D., Günther, Ch., and Kron, W.: Softwarepaket für Hydrologie und Wasserwirtschaft, Anwenderhandbuch, Vol. 1: Hochwasseranalyse, Universität Karlsruhe, Institut für Hydrologie und Wasserwirtschaft, 1990.

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Kitanides, P. and Bras, R.: Real time area forecasting with a conceptual hydrological model. 1. Analysis of uncertainty, *Water Resour. Res.*, 16, 1025–1033, 1980.

LfU: Hochwasserabflusswahrscheinlichkeiten in Baden-Württemberg, Landesanstalt für Umweltschutz, Baden-Württemberg, Oberirdische Gewässer, Gewässerökologie No. 54, 1999.

LfU: Leitfaden "Festlegung des Bemessungshochwassers bei Anlagen des technischen Hochwasserschutzes" Landesanstalt für Umweltschutz, Baden-Württemberg, 2005.

Loucks, D. P. and van Beek, E.: Water Resources System Planning, Studies and Reports in Hydrology, UNESCO, Paris, 2005.

10 Merz, B. and Gocht, M.: Karten für die Hochwasservorsorge und das Risikomanagement auf der lokalen Skale, *Hydrologie u. Wasserbewirtschaftung*, 47, 186–194, 2003.

Merz, B. and Thielen, A.: Separating natural and epistemic uncertainty in flood frequency analysis, *J. Hydrol.*, 309, 114–139, 2005.

Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models, 1. A discussion of principles, *J. Hydrol.*, 10, 282–290, 1970.

15 Plate, E. J., Ihringer, J., and Lutz, W. L.: Operational models for flood forecasting, *J. Hydrol.*, 100, 489–506, 1988.

Plate, E. J.: Skalen in der Hydrologie, Zur Definition von Begriffen, Regionalisierung hydrologischer Parameter, Beitragssammlung Deutsche Forschungsgemeinschaft, Bonn, 33–44, 1992.

20 Plate, E. J.: Flood risk and flood risk management, *J. Hydrol.*, 267, 2–11, 2000.

Plate, E. J. and Zehe, E. (Eds.): Wasser- und Stofftransport aus kleinen ländlichen Einzugsgebieten, 365 pp., Schweizerbart, Stuttgart, 2008.

Refsgaard, J. C. and Storm, B.: MIKE SHE, in: Computer Models of Watershed Hydrology, 25 edited by: Singh, V. P., Water Resources Publications, 809–846, 1995.

Schumann, A., Anti, H. M., and Geyer, J.: Probabilistische Abschätzung der Unsicherheit von Aussagen zu hydrologischen Auswirkungen globaler Klimaveränderungen. *Hydrologie und Wasserwirtschaft*, 154–162, 2001.

Todini, E.: The ARNO rainfall – runoff model, *J. Hydrol.*, 175, 339–382, 1996.

30 UN/ISDR: United Nations Inter-Agency Secretariat of the International Strategy for Disaster Reduction (ISDR), *Living with risk: a global review of disaster reduction initiatives*, United Nations Publications, Geneva, 2004.

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Zehe, E., Maurer, T., Ihringer, J., and Plate, E. J.: Modelling water flow and mass transport in a Loess catchment, *Phys. Chem. Earth, Part B*, 26, 487–507, 2001.

Zehe, E., Becker, R., Bardossy, A., and Plate, E. J.: Uncertainty of simulated catchment runoff response in the presence of threshold processes: Role of initial soil moisture and precipitation, *J. Hydrol.*, 315, 183–202, 2005.

---

**Classification of hydrological models for flood management**

E. J. Plate

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



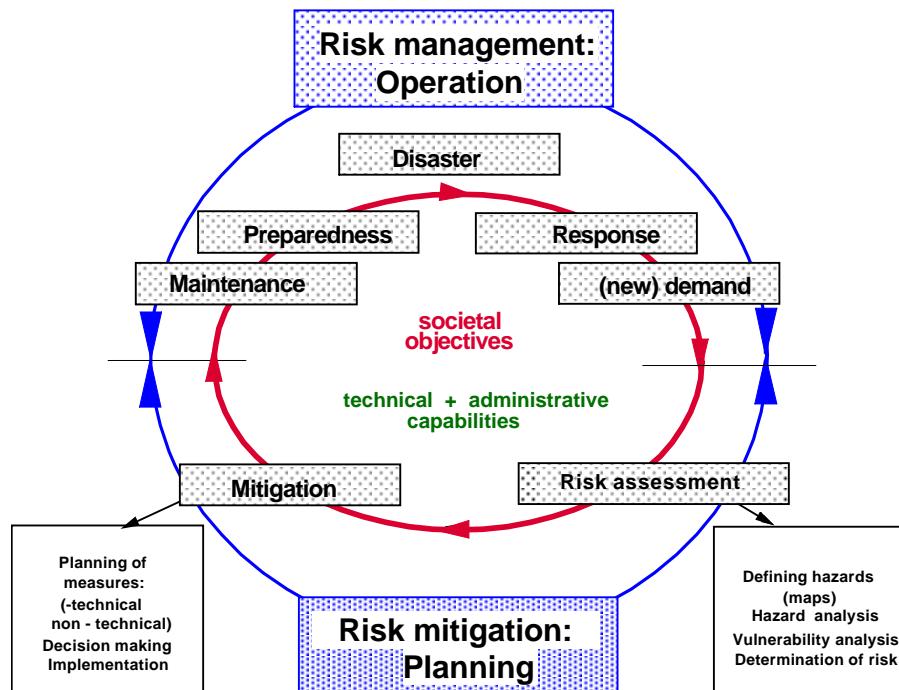


Fig. 1. The cycle of risk management.

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## Classification of hydrological models for flood management

E. J. Plate

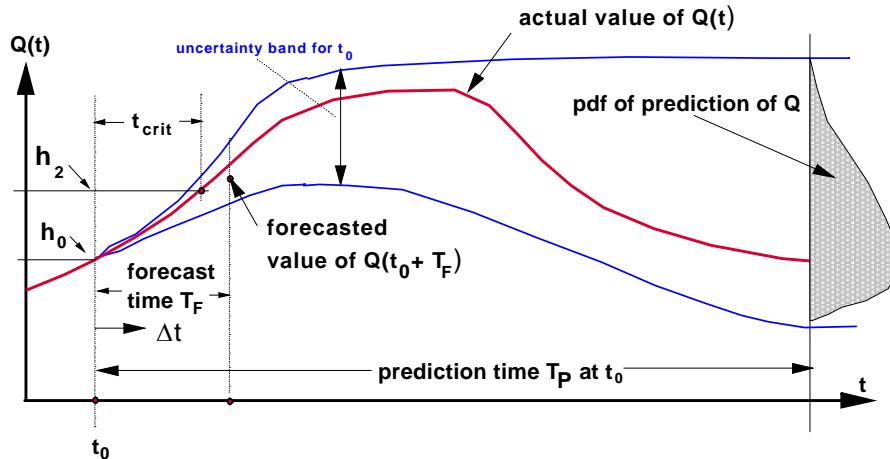


**Fig. 2.** Defining forecasts and predictions.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## Data level

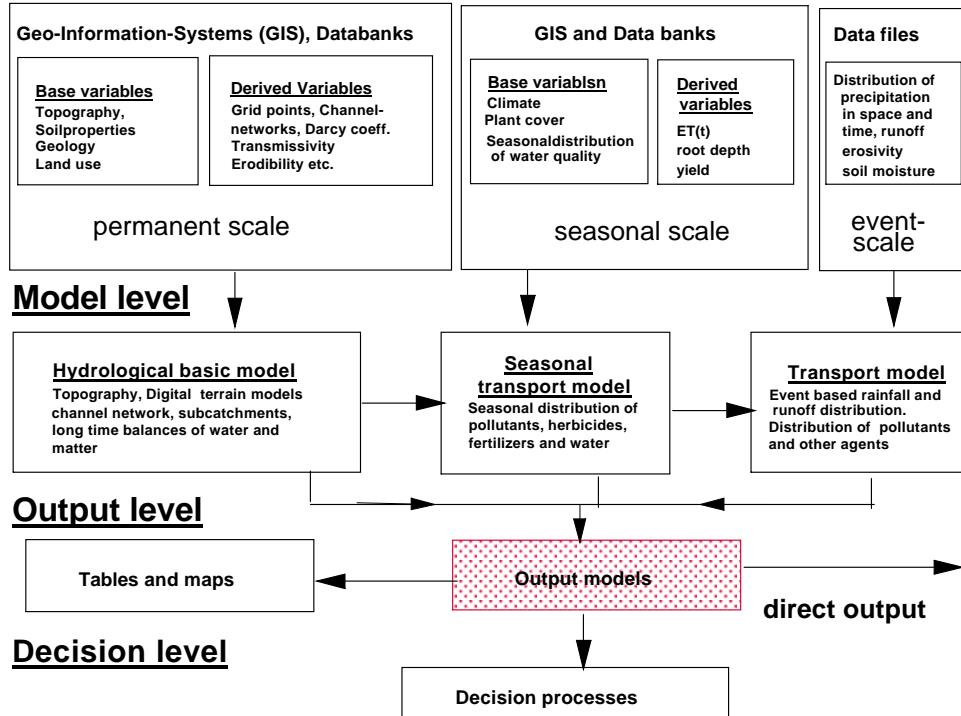

**Fig. 3.** Levels of hydrological models (adapted from Plate and Zehe, 2006).

## Classification of hydrological models for flood management

E. J. Plate

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

**Classification of hydrological models for flood management**

E. J. Plate

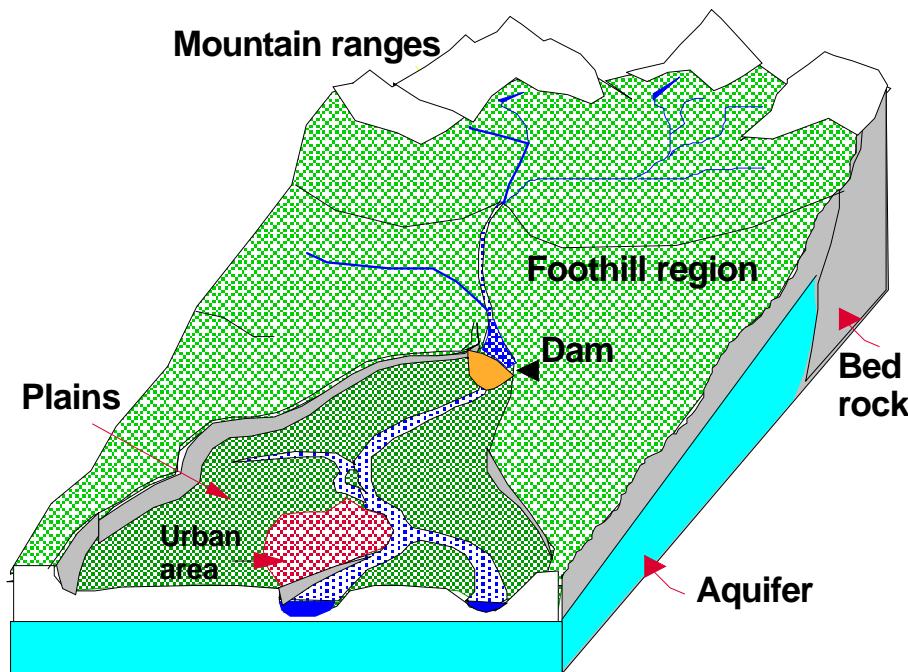

**Fig. 4.** Types of hydrological areas.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Classification of  
hydrological models  
for flood  
management

E. J. Plate

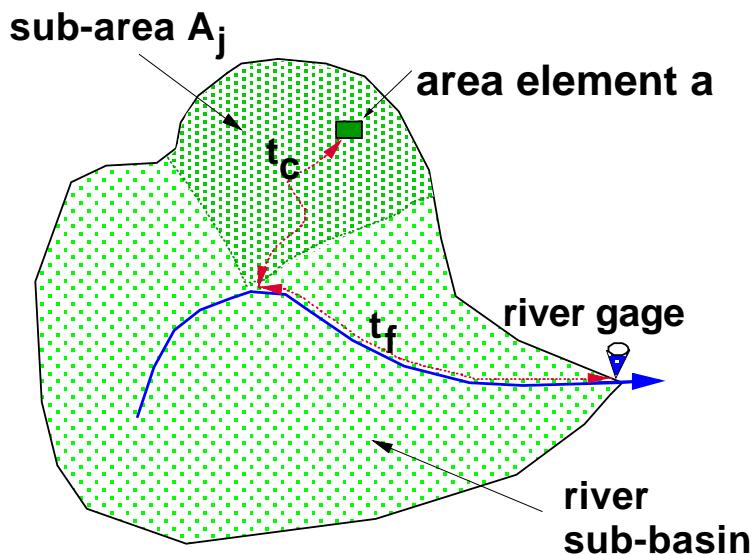


**Fig. 5.** Defining flow times in hydrological basins.

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	

<a href="#">Printer-friendly Version</a>
<a href="#">Interactive Discussion</a>

## Classification of hydrological models for flood management

E. J. Plate

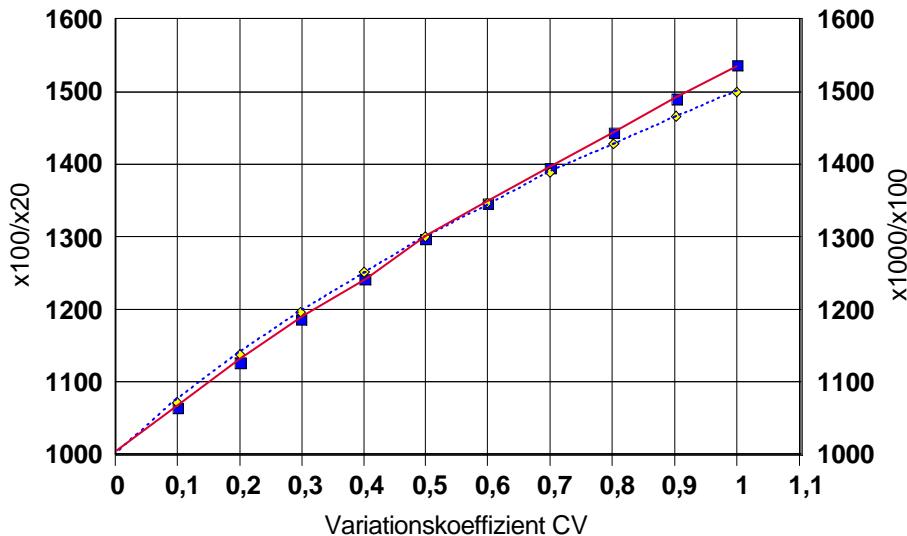

**Fig. 6.** Ratios  $Q_{1000}/Q_{100}$  and  $Q_{100}/Q_{20}$  (multiplied by factor 1000) as function of coefficient of variability  $CV_x$  of the two-parameter gamma-distribution.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)