

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Rainfall-runoff modelling and palaeoflood hydrology applied to reconstruct centennial scale records of flooding and aquifer recharge in ungauged ephemeral rivers

G. Benito¹, B. A. Botero², V. R. Thorndycraft³, M. Rico⁴, Y. Sánchez-Moya⁵, A. Sopena⁵, M. J. Machado¹, and O. Dahan⁶

¹Institute of Natural Resources, CSIC, Serrano 115bis, 28006 Madrid, Spain

²Department of Civil Engineering, Universidad Nacional de Colombia, sede Manizales, Manizales, Colombia

³Department of Geography, Royal Holloway University of London, Egham, Surrey, TW20 0EX, UK

⁴Pyrenean Institute of Ecology, CSIC, Avda. Montañana 1005, 50059 Zaragoza, Spain

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Rainfall-runoff
modelling and
palaeoflood
hydrology**

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



⁵ Institute of Geosciences, CSIC-Universidad Complutense, 28040, Madrid, Spain

⁶ Zuckerberg Institute for Water Research, Ben-Gurion University of the Negev,
Sde Boqer, 84990, Israel

Received: 26 November 2010 – Accepted: 5 December 2010 – Published: 21 December 2010

Correspondence to: G. Benito (benito@ccma.csic.es)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Abstract

In this study we propose a multi-source data approach for quantifying long-term flooding and aquifer recharge in ungauged ephemeral rivers. The methodology is applied to the Buffels River, at 9000 km² the largest ephemeral river in Namaqualand (NW South Africa), a region with scarce stream flow records limiting research investigating hydrological response to global change. Daily discharge and annual flood series (1965–2006) were estimated from a distributed rainfall-runoff hydrological model (TETIS) using rainfall gauge records located within the catchment. The model was calibrated and validated with data collected during a two year monitoring programme (2005–2006) at two stream flow stations, one each in the upper and lower reaches of the catchment. In addition to the modelled flow records, non-systematic flood data were reconstructed using both sedimentary and documentary evidence. The palaeoflood record identified at least 25 large floods during the last 700 yr; with the largest events reaching a minimum discharge of 255 m³ s⁻¹ (450 yr return period) in the upper basin, and 510 m³ s⁻¹ (100 yr return period) in the lower catchment. Since 1925 AD, the flood hydrology of the Buffels River has been characterised by a decrease in the magnitude and frequency of extreme events, with palaeoflood discharges five times greater than the largest modelled floods during the period 1965–2006. Large floods generated the highest hydrograph volumes, however their contribution to aquifer recharge is limited as this depends on other factors such as flood duration and storage capacity of the unsaturated zone prior to the flood. Floods reaching flows associated with 5–10 yr return periods (120–140 m³ s⁻¹) and flowing for 12 days are able to fully saturate the Spektakel aquifer in the lower Buffels River basin.

1 Introduction

Ephemeral rivers are characterised by an intermittent hydrology, dominated by flood and drought episodes, which has generally meant that water resource management

HESSD

7, 9631–9660, 2010

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



strategies are less well developed than for perennial river basins (Benito et al., 2009). In recent decades, the growing human population in a number of dryland regions (Reynolds et al., 2007) coupled with concerns regarding the potential impact of future climate change within these hydrologically sensitive regions (Midgley et al., 2005; Midgley and Thuiller, 2007), has increased research interest in dryland hydrology. Scientific and technical progress is limited, however, by the lack of continuous hydrological data, scarce number of flow events and logistical/monitoring problems that may occur during the occasional large floods that do flow (Morin et al., 2009). In addition, there is a wide diversity of ephemeral river forms and processes (Tooth, 2000), encompassing a range of hydrological, ecological and geomorphic characteristics (Knigton and Nanson, 1977; Tooth, 2000), which limit theoretical extrapolation of results obtained from well documented dryland rivers (e.g., Reid et al., 1995). As a contribution to improving information on ephemeral river hydrology, in this paper we propose a multidisciplinary methodological approach to quantify flood discharge, floodwater volume and aquifer recharge for ungauged ephemeral rivers. The methodology was applied in the Buffels River basin, the largest ephemeral river in Namaqualand (Northwest South Africa), an example of a large dryland region (ca. 45 000 km²) with virtually no ephemeral river flow monitoring stations.

The specific objectives of this study are to: (1) generate an annual flood series through rainfall-runoff modelling for the available rainfall period 1965–2006; (2) combine the modelled flood series with non-systematic flood data derived from centennial scale documentary evidence and geomorphic palaeoflood records (Benito et al., 2010) to improve flood frequency analysis (FFA); (3) identify the magnitude and frequency of flood events required to produce significant floodwater contribution to aquifer recharge; and (4) discuss the implications of the results for flood hazards and water resources in the context of future climate projections.

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

2 Study area

The Buffels River (~250 km in length) is the largest ephemeral river in Namaqualand (Northern Cape Province; South Africa) and drains an area of 9249 km² into the Atlantic Ocean (Fig. 1). The Buffels catchment bedrock is composed of impermeable metasedimentary rocks, basic granites and ultrabasic intrusive rocks, cut by basement faults. Average annual precipitation is 450 mm near the Kamiesberg headwaters (1200–1600 m in elevation), 102 mm at the western Bushmanland peneplane (914 m), 215 mm at the Springbok mountains (1067 m) and 110 mm at Komaggas on the coastal plain (Fig. 1). Rainfall occurs predominantly in the austral winter between May and September, and is usually associated with frontal systems that bring gentle rain and drizzle. Towards the east of Namaqualand and the Buffels River catchment there is a transition to a predominantly summer rainfall regime which is associated with thunderstorms. As a result of this pattern, the majority of floods occur during the winter months although occasional summer rainfall events may also cause flash floods. According to an oral history survey carried out in the villages of Rooifontein and Buffelsrivier (Rohde et al., 2005), the Buffels River has flooded 35 times in the last 115 yr: 12% of floods occurred in early winter (April and May); 70% during the mid-winter months (June and July), 6% in August and 12% during summer.

The alluvial valley fill of the Buffels River is discontinuous and basement rock outcrops form natural barriers to groundwater flow. Alluvial aquifers are therefore small and disconnected. These rock outcrops create a series of narrow gorge reaches where suitable sites for palaeoflood hydrology were identified (Fig. 1). The largest alluvial aquifers are located in the lower Buffels River: the Kleinzee and Spektakel aquifers (Fig. 1), the latter the focus of this study. The Spektakel aquifer is situated next to the communal village of Buffelsrivier and downstream from the Messelpad palaeoflood site. It is a 14.6 km long and 680 m wide sand-filled basin carved from granite, with alluvial sand thickness varying between 17 m, in the southern upstream side, to nearly zero (exposed bedrock) in the northern side near the confluence with the Schaap River

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

(Marais, 1981; Fig. 2). The average total porosity of the alluvial aquifer is 30% and the average effective porosity, or specific yield, is estimated at 20% based on laboratory and in-situ field measurements (Marais, 1981). The total water bearing capacity is estimated at 20.85 Mm³ with a specific yield (drainable porosity) of 13.6 Mm³. Considering evaporation and other sources of natural outgoing discharge (mostly negligible), the total volume available for water abstraction is 11.33 Mm³ when fully replenished (Marais, 1981). Water table monitoring over 27 yr fluctuated under natural conditions between 3 and 5 m below the river bed level (data from O'okiep Copper Company in Marais, 1981). These observations indicate that during the period 1962 to 1981 (18 yr) full recharge only occurred twice, namely in 1962 and 1967. After full recharge in 1967, a sequence of 6 yr (1968–1973) with abstractions at a rate between 2.2 and 2.4 Mm³ yr⁻¹ led to nearly depleted aquifer conditions (Marais, 1981). Sustainable long-term abstraction is estimated at 0.7–0.87 Mm³ yr⁻¹ (Marais, 1981; Benito et al., 2009).

3 Methodology

The methodology applied was based on multi-source flood data including: (a) a two year continuous monitoring programme (2005–2008), (b) hydrological rainfall-runoff modelling (1965 to 2006), (c) instrumental rainfall records (1870 to 2006), (d) documentary records since 1810 AD, and (e) sedimentological records for the last 700 yr (Benito et al., 2010). The nested chronological approach provided by these overlapping periods enabled cross-checking and, in the case of the hydrological modelling, calibration allowing improved interpretation of the data.

Two hydrological monitoring stations were installed in 2005 near the communal villages of Kamassies and Buffelsrivier (Fig. 1), located in the upper and lower catchments, respectively. The monitoring system included: multilevel, flexible Time Domain Reflectometry probes (FTDR) that were designed to measure the temporal variation of water content in the vadose zone during recharging floods; and water level devices to record flood stage and groundwater variations (Dahan et al., 2003, 2008; Rimón et

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



al., 2007). Flood hydrographs, infiltration rates and groundwater table changes were monitored continuously between September 2005 and December 2008.

The TETIS distributed rainfall runoff model (Francés et al., 2007) was used to provide a simulated runoff series for the period 1965–2006. The model is based on the balance of water storage components in an extended soil column and runoff propagation was carried out using the kinematic wave approach. Several maps were used to feed the model with the required geomorphic characteristics of the basin: information such as slope, flow directions and flow paths (cell connection) were obtained from a digital elevation model; hydraulic conductivity of saturated rock (K_p) was derived from the regional geological map; and the SOTER-GIS for South Africa (Batjes, 2004) was used to obtain the available water content (H_u) and hydraulic conductivity of saturated soil (K_s). The Soil and Terrain (SOTER) report for South Africa contains soil descriptions and texture data from which hydraulic conductivity was quantified. The data from the SOTER-GIS map was supported with an additional 47 representative field soil descriptions in which soil horizon samples were taken for texture and chemical analysis (organic matter content, pH, Eh, and cation exchange capacity). Soils with lower conductivity and higher soil storage capacity are located within the central and northern parts of the Buffels River basin (Fig. 3). The highest soil hydraulic conductivity values vary between 4.6 and 13.3 cm h^{-1} , corresponding to sandy soils in the northeast and central region of the catchment. A vegetation cover index map based on data from land use, soil and geologic mapping was also used (Fig. 3).

Rainfall series from seven rainfall gauge stations, which covered most of the Buffelsriver catchment (Fig. 1) were used in the modelling. Calibration was performed on: (a) correction factors for runoff production and propagation; (b) the initial conditions of storage stage; and (c) the correlation coefficient between precipitation and elevation for the spatial interpolation of rainfall distribution. For model calibration, a data sequence of daily discharges from 27 September 2005 to 28 July 2006 was used, whilst the validation was performed using the period 29 July to 29 September 2006. In both of these periods at least one flood event at Buffelsrivier and Kamassies was recorded. Once the

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

model was calibrated and validated, daily stream flow data were obtained for the period 1965 to 2006, the timespan for which the most complete rainfall record is available. For practical purposes modelling was carried out at the palaeoflood study reaches to enable comparison between the systematic and non-systematic flow records.

5 Flood frequency analysis (FFA) was carried out on the combined modelled annual flood series for the period 1965 to 2006 and the non-systematic record compiled from historical documents (Kelso and Vogel, 2007) and palaeoflood hydrology. The methodology and results of these palaeoflood records are discussed in Benito et al. (2010). A set of probability distribution functions was fitted to the reconstructed flood data series and the parameters of these distribution functions were estimated by the maximum likelihood method (Stedinger and Cohn, 1986). Associated infiltration/recharge volumes for various return period floods at the Spektakel alluvial aquifer were estimated for different probabilistic hydrographs. A probabilistic hydrograph is defined as one that preserves a peak discharge exceedance probability and dependence between volume and peak for a fixed duration (England, 2003). Hydrograph durations were fixed to the most common observed occurrences, namely 6 days for discharges less than $50 \text{ m}^3 \text{ s}^{-1}$ and 12 days for flood discharges over $50 \text{ m}^3 \text{ s}^{-1}$. The hydrograph volume was estimated on the basis of two dimensionless hydrographs by visually selecting a representative shape of the modelled hydrographs from a sample of twenty small floods ($<50 \text{ m}^3 \text{ s}^{-1}$) and two large floods ($>50 \text{ m}^3 \text{ s}^{-1}$).

For the quantification of aquifer recharge, surface alluvial units exposed to floodwater infiltration were mapped (Fig. 2) based on aerial photographs of the study reach. The main geomorphological units include channel bed, sand bars (vegetated and non-vegetated), the floodplain and first alluvial terrace. The average width for each of these geomorphological units was determined by applying a GIS algorithm, developed by Morin et al. (2009), to the aerial photographs. A characteristic cross-section with the support of field survey elevations of each geomorphic unit was then constructed. A rating curve for the synthetic cross-section was estimated using the Manning's equation to determine the minimum flood discharges required to inundate these geomorphological

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

units. Full aquifer recharge was estimated assuming two pre-flood conditions: namely for a water table set at 3 m below the channel bed (corresponding to a maximum recharge volume of 9 Mm³); and empty aquifer conditions, quantified by Marais (1981) as a recharge volume of 13.6 Mm³.

4 Results

4.1 Reconstruction of annual hydrologic records

4.1.1 Stream flow monitoring record

The 2005–2006 flows recorded at Buffelsrivier lasted for forty days (Fig. 4a), with flow hydrographs showing peaks which fit the rainfall associated with the passage of winter fronts. Most of the Buffels River flows were recorded at both the upper and lower monitoring stations. Winter flows were recorded first at Buffelsrivier in the lower basin reaching Kamassies in the upper catchment after a delay that typically ranged between 6 and 12 h. This reflects the passing of west to east frontal systems across the basin (Fig. 1). Summer rains produced short-lived floods (<1 day of duration) with peak discharges half the size of the winter flows. The largest flow peak was recorded in May 2006, reaching a discharge of 20 m³ s⁻¹ at Buffelsrivier (Fig. 4a) and 8 m³ s⁻¹ at Kamassies.

4.1.2 Rainfall-runoff modelling

The widespread winter rainfall conditions in the Buffels catchment provide optimal data for rainfall-runoff modelling to generate discharge data. The model performance was satisfactory with RMSEs of 1.09 and 3.01 for the calibration and validation processes, respectively. The simulated versus recorded hydrograph volumes showed errors of 7% and 24% for the calibration and validation hydrographs, respectively (Fig. 4a). The

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

modelled daily discharge and annual flood series for the period 1965 to 2006 are presented in Fig. 4b. The largest modelled discharge was obtained for 29 July 2002. At Rooifontein this flood event provided a simulated peak of $63 \text{ m}^3 \text{ s}^{-1}$, with river flow spanning 11 days resulting in a hydrograph volume of 7.7 Mm^3 . Downstream at Messelpad the simulated flood peak for the event was $106 \text{ m}^3 \text{ s}^{-1}$ again with a flow duration of 11 days and a corresponding flood volume of 21 Mm^3 (Fig. 4b). During the simulated period, only three floods were over $50 \text{ m}^3 \text{ s}^{-1}$ at Messelpad, all three events produced between 2001–2002. Another two floods were estimated at $40 \text{ m}^3 \text{ s}^{-1}$ during the winters of 1996 and 1997, corresponding with above average annual rainfall in Springbok. During the period 1965–1996, only two isolated floods (1967 and 1974) surpassed $20 \text{ m}^3 \text{ s}^{-1}$ at Messelpad, a similar magnitude to the event recorded at the monitoring station in 2006 (Fig. 4a).

4.2 Reconstruction of non-systematic flood data

4.2.1 Documentary and historical flood records

Climatic and hydrological documentary records (starting in 1810) for Namaqualand and the Buffels river catchment were obtained from written descriptions at missionary stations (Kelso and Vogel, 2007). The oldest written reference to rainfall describes 1818 as a wet year, with other good winter rains occurring in 1822–1823 AD, 1831, 1859, 1872, 1878, 1888, 1899 and 1900. Documentary records indicate 1888 AD as a year with exceptional winter rainfalls during which ephemeral rivers flowed for several months (Kelso and Vogel, 2007). This is corroborated by the overlapping rainfall instrumental data recorded at Springbok (1870 to 2006; Fig. 5), where 1888 is the third largest winter precipitation on record (394 mm: 94% of annual rainfall). During the 20th Century, the rank of winter precipitation at Springbok is headed by 1915 (454 mm) followed by 1925 (427 mm), 1921 (346 mm), 1917 (311 mm), 1920 (297 mm) and 1914 (279 mm). These fall in the wettest decade (1915–1925) of winter rainfall in the record. Since then, there has been a shift towards decreasing precipitation (Fig. 5).

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4.2.2 Sedimentary palaeoflood records

The detailed analysis of the sedimentary flood record and a discussion of dating errors, both of which are beyond the scope of this paper, are provided in Benito et al. (2010). Here we present the downstream channel profiles and selected modelled floodwater elevations at the Rooifontein (Fig. 6) and Messelpad (Fig. 7) study reaches, as well as the synthesised flood records extending back to 1400 AD at Rooifontein and 1500 AD at Messelpad (Fig. 8). Modelled water surface profiles for floods of 100 and 310 m³ s⁻¹, routed through the Rooifontein reach, are presented in Fig. 6. The figure illustrates the relationship between the floodwater elevations and the sites of flood sediment deposition, with a simplified indication of sediment ages also presented. The discharge estimation may be compromised at the Rooifontein reach due to scour and fill within the channel bed (see the photograph in Fig. 6 which shows sediment infilling the channel). By contrast the Messelpad reach, where there is exposed bedrock and limited within channel sediment deposition, is optimal for palaeodischarge reconstruction (Fig. 7). The downstream channel profile here is presented with modelled water surface profiles of 460 and 510 m³ s⁻¹, which are the discharges associated with the highest elevation flood deposits at the site (Fig. 7).

4.3 Flood Frequency Analysis (FFA) combining modelled discharges and non-systematic records

The combined systematic and palaeoflood data is synthesised in Fig. 8a1 and b1, where best-estimate ages are provided for the individual palaeoflood events (see Benito et al., 2010). The palaeoflood data represents floods exceeding a given discharge threshold (Q_h) in a period of known duration, the discharge threshold defined by the elevations of the associated zones of sediment deposition. The stratigraphic record is assumed to be complete for each flood exceeding the threshold of discharge at the palaeoflood site. As such palaeoflood information can be treated as censored data, which can be handled efficiently by appropriate statistical methods.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

The associated FFA curves are shown in Fig. 8a2 and b2 for the Rooifontein and Messelpad reaches, respectively, with a two-component extreme value (TCEV) distribution fitted to firstly the annual series of modelled discharges only, then the combined modelled and censored palaeoflood data where the grey shaded threshold values are used in the FFA. For the Rooifontein reach in the upper basin, 12 palaeoflood discharges were included, all as lower bound type, with the largest palaeoflood discharge of $255 \text{ m}^3 \text{ s}^{-1}$, significantly greater than the largest discharge ($63 \text{ m}^3 \text{ s}^{-1}$) for the modelled annual series (Fig. 8a1). The incorporation of the palaeoflood data into the FFA results in an increment of the magnitude of the flood quantiles (Fig. 8a2; Table 1). In fact, discharges provided by combining palaeoflood and simulated data are approximately three times larger than ones obtained from annual simulated discharge series alone. For example, the largest palaeoflood discharge ($255 \text{ m}^3 \text{ s}^{-1}$) is associated with a return period of 450 yr, whilst the maximum simulated discharge ($63 \text{ m}^3 \text{ s}^{-1}$) represents a return period of ca. the 20-yr flood (Fig. 8a2).

At Messelpad in the lower basin, a total of 12 palaeofloods were included in the FFA, the six palaeofloods post-dating 1750 AD are lower bound type whilst five events identified between 1600 AD and 1750 are defined using a double censored interval (Fig. 8b1). During 1600–1800 AD flood sedimentation occurred creating a lower flood bench (threshold level Q_{h_2}) but there is not stratigraphic evidence of flood deposition on the oldest flood bench, which therefore defines threshold level Q_{h_1} . At this site, the largest palaeoflood discharge was $510 \text{ m}^3 \text{ s}^{-1}$ (ca. 100-yr flood) and the largest annual modelled discharge reached $106 \text{ m}^3 \text{ s}^{-1}$ (ca. 10-yr flood). The visual fit of the palaeoflood plotting positions (Fig. 8b2) in relation to the adjusted distribution function is not as good as at Rooifontein. However, this visual discrepancy does not affect the quality of the results. Plotting positions represent an exceedence probability for a flood of known magnitude. In the case of palaeoflood data, the exact flood discharge is unknown, their plotting positions are drawn using minimum discharge values while the frequency function is estimated considering these palaeoflood discharges as lower bound data. As a result, the performance of the statistical adjustment based on a

**Rainfall-runoff
modelling and
palaeoflood
hydrology**

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



visual fit as used in conventional hydrology is not applicable in this case. The FFA from both sites combining the annual modelled flood series and palaeoflood discharges illustrates that floods of a given magnitude are more frequent than estimations based on systematic records alone (Table 1). The implications of the FFA results are discussed in relation to aquifer recharge in the next section.

5 Long-term floodwater resources and their contribution to aquifer recharge

Floods are usually viewed as a natural hazard due to their potential damage to society and ecosystems. In arid environments, however, floods are an important source of water resulting in long-lasting water pools and the recharge of alluvial aquifers (Matlock and Davis, 1972). Both natural ecosystems and human societies depend on this scarce water source to maintain life in arid lands (e.g., Seely et al., 1981). In most ephemeral rivers worldwide, there is limited data on which to base an evaluation of the long-term frequency of recharging events, data that is of crucial importance for integrated water resource management. The proposed multi-disciplinary methodology has provided a means of quantifying long-term flood records for ungauged ephemeral rivers and examining the relationships between flood magnitude and frequency and aquifer recharge.

Floodwater contribution to alluvial aquifer recharge in the lower Buffels River was estimated using a set of scaled probabilistic hydrographs with peak flows matching those of the FFA (Sect. 4.3). At the Buffelsrivier reach (Fig. 9), flood volumes estimated for the probabilistic scaled hydrographs range between 4 Mm^3 (associated with the 5-yr flood) to 144 Mm^3 (500-yr flood; Table 2). A separate issue is the infiltration potential, which is the hydrograph volume able to infiltrate assuming an unlimited aquifer capacity (Shentsis and Rosenthal, 2003). The infiltration potential is mainly dependent on infiltration rate, inundation surface and flow duration. The infiltration rate of the channel bed at Buffelsrivier occurs at an average flux of 6 cm h^{-1} , according to the monitoring station records, whilst an average water flux of 1 cm h^{-1} was estimated

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Rainfall-runoff
modelling and
palaeoflood
hydrology**

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

for the floodplain sediments which have a similar grain-size distribution to a monitored reach of the Kuiseb River in Namibia (Dahan et al., 2008). The potential infiltration volumes of the Spektakel aquifer were estimated as 4 Mm^3 for a 5-yr flood, and up to 23 Mm^3 for the 500-yr flood; Table 2). Morin et al. (2009) demonstrated in the Kuiseb River (Namibia) that floodwater infiltration into the alluvial aquifer is mainly sensitive to flood duration and not so much to flood peak discharge. In the Buffels River, however, flood magnitude controls the extent of inundation as for certain flood stages inundation area may cover sand bars and a wider area of the floodplain, increasing the infiltration volume per unit time. Daily infiltration volumes for floods ($Q < 50 \text{ m}^3 \text{ s}^{-1}$) covering only the channel bed is 2.7 Mm^3 , whilst subsequent inundation of sand bars ($Q > 50 \text{ m}^3 \text{ s}^{-1}$) and floodplain areas ($Q > 370 \text{ m}^3 \text{ s}^{-1}$) increases the daily infiltration volume to 3.8 and 6 Mm^3 , respectively.

Despite this high floodwater infiltration potential, actual recharge is limited by the water storage potential to full saturation, which depends on water table depth prior to flooding (Morin et al., 2009) as once the groundwater level reaches the surface, transmission losses and recharge cease. In the Spektakel aquifer the water table is relatively high (3–5 m below channel bed) even during drought periods due to lateral subsurface flow from the crystalline basement bedrock (Fersch, 2007). An estimation of the probabilistic flood producing effective recharge was undertaken based on two aquifer conditions, a nearly empty aquifer (recharge capacity of 13.6 Mm^3) and at a water table elevation of 3 m (capacity for 9 Mm^3). The results show that effective recharge is related to frequent floods (5–10 yr return period), whereas for larger flood magnitude/frequency the water table reaches the surface and recharge ceases. This has implications for water resource management under future climate scenarios in Southern African ephemeral rivers flowing through landscapes dominated by basement granitic and metamorphic lithologies. Despite the long-term flood record indicating a reduction in flood magnitude during the last century, a result consistent with future reductions in runoff modelled for global warming scenarios (Milly et al., 2005), there is unlikely to be such a negative impact on the available volume of alluvial aquifer water resources.

There could potentially, however, be issues affecting water quality as evaporation of the shallow groundwater in between flows is likely to increase salinity, an issue noted in the communal villages of Buffelsrivier and Rooifontein. This will be especially so if rainfall and flood frequencies decrease under future climate scenarios. Historical observations indicate saturation of the Spektakel alluvial aquifer associated with rainfalls of >75 mm over a period of at least two weeks, causing runoff within the slopes and flow of the main stream and its tributaries (Marais, 1981). One possible management solution that could be investigated is the possibility to increase the effective infiltration volume by pumping the alluvial aquifer water, thus lowering the water level along the aquifer length to increase floodwater recharge potential. This could also improve water quality due to the low salt content of floodwaters in relation to higher salinity input from lateral flow.

6 Conclusions

The scarcity of flow gauge records in many dryland, ephemeral rivers is a major limitation in the assessment of flood risk and water resources. This is of critical importance given current interest in assessing the response of such rivers to future global change, especially when future climate scenarios predict reduced runoff, as is the case for dryland regions of Southern Africa (Milly et al., 2005). Here, we have proposed a multi-source inter-disciplinary approach applied to improve our understanding of flood magnitude/frequency and aquifer recharge in ephemeral river hydrology. Daily discharge and annual flood series (1965–2006) were estimated using the TETIS distributed rainfall-runoff hydrological model (Frances et al., 2007) based on hourly and daily rainfall provided by seven rain gauge stations distributed throughout the catchment. The model was calibrated and validated during a two year monitoring programme (2005–2006) at two stream flow stations, one in the upper catchment and one in the lower basin. Significant flood-producing rainfall events were linked to westerly winter frontal systems passing over the catchment for several days, with floods recorded first

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



in the lower basin reflecting the west to east passage of the rainfall. In the upper catchment at Rooifontein the largest monitored flood (May 2006) reached $8 \text{ m}^3 \text{ s}^{-1}$ whilst the largest modelled flood gave a simulated peak of $63 \text{ m}^3 \text{ s}^{-1}$, the latter flowing for 11 days. At Messelpad in the lower catchment, the same rainfall events generated the largest monitored flood of $20 \text{ m}^3 \text{ s}^{-1}$ and the largest modelled peak flow of $106 \text{ m}^3 \text{ s}^{-1}$, showing a proportional hydrological response throughout the basin.

The magnitude and frequency of floods in the pre-instrumental period were retrieved from a combination of documentary descriptions at missionary stations, reported by Kelso and Vogel (2007), and from sedimentary evidence (slack-water flood deposits) using the methodology of palaeoflood hydrology. The palaeoflood record, with more than 25 flood events preserved over the last 700 yr (Benito et al., 2010), was reconstructed based on the assumptions that: (1) events recorded at multiple sites occurred on the same dates throughout the catchment; and (2) the record is censored, with event preservation dependent on flood water levels exceeding the threshold elevation of previous deposits at sites of deposition.

In terms of flood magnitude, large floods occurred throughout the centennial palaeoflood record. The largest palaeodischarge(s) in the upper catchment reached a minimum discharge of $310 \text{ m}^3 \text{ s}^{-1}$ compared to $510 \text{ m}^3 \text{ s}^{-1}$ in the lower basin. These palaeoflood events were up to five times greater than the largest modelled peak discharges during the 1965–2006 period. FFA using the combined modelled and palaeoflood discharges, and based on maximum likelihood estimators, was successfully fitted to a two-component extreme value distribution. The fitted distribution shows a return period of ca. 500 and 100 yr for the largest palaeoflood discharges in the upper and lower basins, respectively, whilst the largest simulated discharges are associated with a return period of 10 years flood.

The reconstructed flood data were applied to estimate aquifer recharge in the lower basin. Dimensionless hydrographs scaled to the probabilistic flood discharge showed that effective recharge is produced by relatively small floods (return periods of 5–10 yr), since floods exceeding ca. $120\text{--}140 \text{ m}^3 \text{ s}^{-1}$ and 12 days duration are able to

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



fully saturate the aquifer. As a result flood magnitude plays a limited role in controlling the infiltrated water volume within alluvial aquifers in ephemeral rivers flowing over basement rocks. This suggests that the decreasing runoff predicted for the region under future global warming scenarios (Milly et al., 2005) will not have such a negative impact on the water resource availability from shallow alluvial aquifers, although more research is needed to predict the impact on water quality and in particular salinity.

Acknowledgements. The study was funded by the 6th framework of the European Community through the project “FloodWater recharge of alluvial Aquifers in Dryland Environments”, WADE Project (contract no. GOCE-CT-2003-506680), and by the Spanish Ministry of Science and Technology (CICYT) grant GL2008-06474-CO2-01. Daferey Waldeck (Rooifontein) Anna Marie Boyce (Buffelsriver) and Penny Price (University of Cape Town) are gratefully thanked for their field assistance. Azucena Chueca kindly drafted Fig. 2 of this paper, and carried the GIS analysis.

References

- Batjes, N. H.: SOTER-based soil parameter estimates for Southern Africa (ver. 1.0), Report 2004/04, ISRIC – World Soil Information, Wageningen, 2004.
- Benito, G., Rohde, R., Seely, M., Külls, C., Dahan, O., Enzel, Y., Todd, S., Botero, B., Morin, E., Grodek, T., and Roberts, C.: Management of alluvial aquifers in two Southern African ephemeral rivers: implications for IWRM, *Water Resour. Manag.*, 24, 641–667, doi:10.1007/s11269-009-9463-9, 2009.
- Benito, G., Thorndycraft, V. R., Rico, M. T., Sánchez-Moya, Y., Sopena, A., Botero, B. A., Machado, M. J., and Pérez-González, A.: Hydrological response of a dryland ephemeral river to Southern African climatic variability during the last millennium, *Quaternary Res.*, accepted, 2010.
- Dahan, O., McDonald, E. V., and Young, M. H.: Flexible time domain reflectometry probe for deep vadose zone monitoring, *Vadose Zone J.*, 2, 270–275, doi:10.2113/2.2.270, 2003.
- Dahan, O., Tatarsky, B., Enzel, Y., Külls, C., Seely, M., and Benito, G.: Dynamics of flood water infiltration and ground water recharge in hyperarid desert, *Ground Water*, 46, 450–461, doi:10.1111/j.1745-6584.2007.00414.x, 2008.

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)




[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


- England Jr., J. F.: Probabilistic extreme flood hydrographs that use paleoflood data for dam safety applications, Flood Hydrology Group, Bureau of Reclamation, Technical Service Center, Denver, Colorado, 29 pp., 2003.
- Fersch, B.: Interactions between riparian phreatophytes and alluvial aquifers, Diplomarbeit am Institut für Hydrologie, Universität Freiburg, Freiburg, Germany, 2007.
- Frances, F., Velez, J. I., and Velez J. J.: Split-parameter structure for the automatic calibration of distributed hydrological models, *J. Hydrol.*, 332, 226–240, doi:10.1016/j.jhydrol.2006.06.032, 2007.
- Hydrologic Engineering Center: HEC-RAS, River Analysis System, Hydraulics Reference Manual, CPD-69, US Army Corps of Engineers, Davis, California, 1995.
- Kelso, C. and Vogel, C.: The climate of Namaqualand in the nineteenth century, *Climatic Change*, 83, 357–380, doi:10.1007/s10584-007-9264-1, 2007.
- Knighton, A. D. and Nanson, G. C.: Distinctiveness, diversity and uniqueness in arid zone river systems, in: *Arid Zone Geomorphology*, edited by: Thomas, D. S. G., Wiley, Chichester, 185–203, 1997.
- Marais, J. A. H.: Updated Technical Report on the Spektakel Water Scheme in the District of Springbok, Cape Province, Unpublished report on the O’Okiep Copper Company Limited, South Africa, Nababeep, South Africa, 1981.
- Matlock, W. G. and Davis, R. P.: Groundwater in the Santa Cruz Valley, Arizona, Technical Bulletin, 194, University of Arizona, Agricultural Experiment Station, Tucson, 37 pp., 1972.
- Midgley, G. F. and Thuiller, W.: Could anthropogenic climate change threaten biodiversity in Namaqualand?, *J. Arid Environ.*, 70, 615–628, doi:10.1016/j.jaridenv.2006.11.020, 2007.
- Midgley, G. F., Chapman, R. A., Hewitson, B., Johnston, P., De Wit, M., Ziervogel, G., Mukheibir, P., Van Niekerk, L., Tadross, M., Van Wilgen, B. W., Kgope, B., Morant, P., Theron, A., Scholes, R. J., and Forsyth, G. G.: A Status Quo, Vulnerability and Adaptation Assessment of the Physical and Socio-Economic Effects of Climate Change in the Western Cape, Report to the Western Cape Government, Report No. ENV-S-C 2005-073, CSIR, Cape Town, South Africa, Stellenbosch, 2005.
- Milly, P. C. D., Dunne, K. A., and Vecchia, A. V.: Global pattern of trends in streamflow and water availability in a changing climate, *Nature*, 438, 347–350, doi:10.1038/nature04312, 2005.
- Morin, E., Grodek, T., Dahan, O., Benito, G., Kulls, C., Jacoby, Y., Van Langenhove, G., Seely, M., and Enzel, Y.: Flood routing and alluvial aquifer recharge along the ephemeral arid Kuiseb River, Namibia, *J. Hydrol.*, 368, 262–275, doi:10.1016/j.jhydrol.2009.02.015, 2009.

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Reid, I., Laronne, J. B., and Powell, D. M.: The Nahal Yatir bedload database: sediment dynamics in a gravel-bed ephemeral stream, *Earth Surf. Proc. Land.*, 20, 845–857, 1995.
- Reynolds, J. F., Smith, D. M. S., Lambin, E. F., Turner II, B. L., Mortimore, M., Batterbury, S. P. J., Downing, T. E., Dowlatabadi, H., Fernández, R. J., Herrick, J. E., Huber-Sannwald, E., Jiang, H., Leemans, R., Lynam, T., Maestre, F. T., Ayarza, M., and Walker, B.: Global desertification: building a science for dryland development, *Science*, 316, 847–851, doi:10.1126/science.1131634, 2007.
- Rimon, Y., Dahan, O., Nativ, R., and Geyer, S.: Water percolation through the deep vadose zone and groundwater recharge: preliminary results based on a new vadose zone monitoring system, *Water Resour. Res.*, 3, W05402, doi:10.1029/2006WR004855, 2007.
- Rohde, R., Hoffman, T., Waldeck, D., and Boyce, A. M.: Flood Events in the Buffels River – an internal WADE Report, Unpublished, Institute for Plant Conservation, University of Cape Town, Rondebosch, South Africa, 5 pp., 2005.
- Seely, M. K., Buskirk, W. H., Hamilton, W. J. I., and Dixon, J. E. W.: Lower Kuseb River perennial vegetation survey, *J. South West Africa Sci. Soc.*, 35, 57–86, 1981.
- Shentsis, I. and Rosenthal, E.: Recharge of aquifers by flood events in an arid region, *Hydrol. Process.*, 17, 695–712, doi:10.1002/hyp.1160, 2003.
- Stedinger, J. R. and Cohn, T. A.: Flood frequency analysis with historical and paleoflood information, *Water Resour. Res.*, 22, 785–793, 1986.
- Tooth, S.: Process, form and change in dryland rivers: a review of recent research, *Earth Sci. Rev.*, 51, 67–107, doi:10.1016/S0012-8252(00)00014-3, 2000.

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Table 1. Flood quantiles for different return periods for the Rooifontein and Messelpad sites obtained using a two-component extreme value (TCEV) distribution fitted to firstly the annual series of modelled discharges only, then the combined modelled and censored palaeoflood data.

Return Period, years	Peak discharge, m ³ s ⁻¹			
	Rooifontein		Messelpad	
	Modelled series	Palaeoflood & modelled	Modelled series	Palaeoflood & modelled
5	8	8	6	23
10	18	56	27	140
25	32	117	54	287
50	42	162	74	397
100	52	207	94	505
500	74	309	139	752

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Table 2. Peak flood discharges estimated from FFA based on modelled and palaeoflood data at Messelpad (~5 km upstream of Spektakel aquifer reach) and characteristics of the probabilistic hydrographs based on dimensionless hydrographs and a fixed duration of 6 days for small floods ($<50 \text{ m}^3 \text{ s}^{-1}$) and 12 days for large floods ($<50 \text{ m}^3 \text{ s}^{-1}$). Potential infiltration considers all the possible infiltration for the given probabilistic hydrograph assuming a limitless capacity of the aquifer. Infiltration was also estimated for two initial aquifer conditions assuming a ^(a) water table at 3 m below the surface and ^(b) an empty aquifer at the time of flooding.

Return period, years	Peak discharge, $\text{m}^3 \text{ s}^{-1}$	Duration, days	Hydrograph volume, Mm^3	Potential infiltration, Mm^3	Infiltration to saturation ^a , WT: 3 m, Mm^3	Infiltration to saturation ^b , Mm^3
5	23	6	4.2	4.2	4.2	4.2
10	140	12	27.9	11.8	9.0	11.8
25	287	12	53.9	17.9	9.0	13.6
50	397	12	76.2	18.0	9.0	13.6
100	505	12	97.0	21.3	9.0	13.6
500	752	12	144.4	22.9	9.0	13.6

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

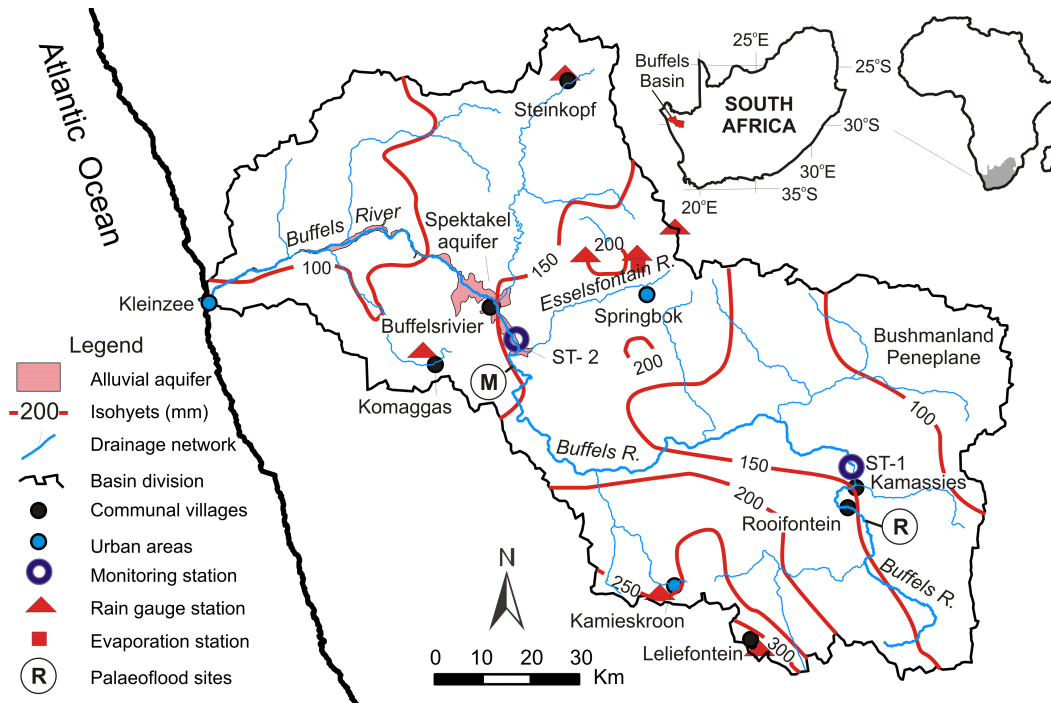


Fig. 1. The Buffels River catchment illustrating the drainage network and rainfall isohyets. The location of the WADE project monitoring stations, rainfall and evaporation stations used in the rainfall-runoff model, palaeoflood study reaches and the Spektakel aquifer system are also shown. Palaeoflood sites: circle-R, Rooifontein; circle-M, Messelpad site.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

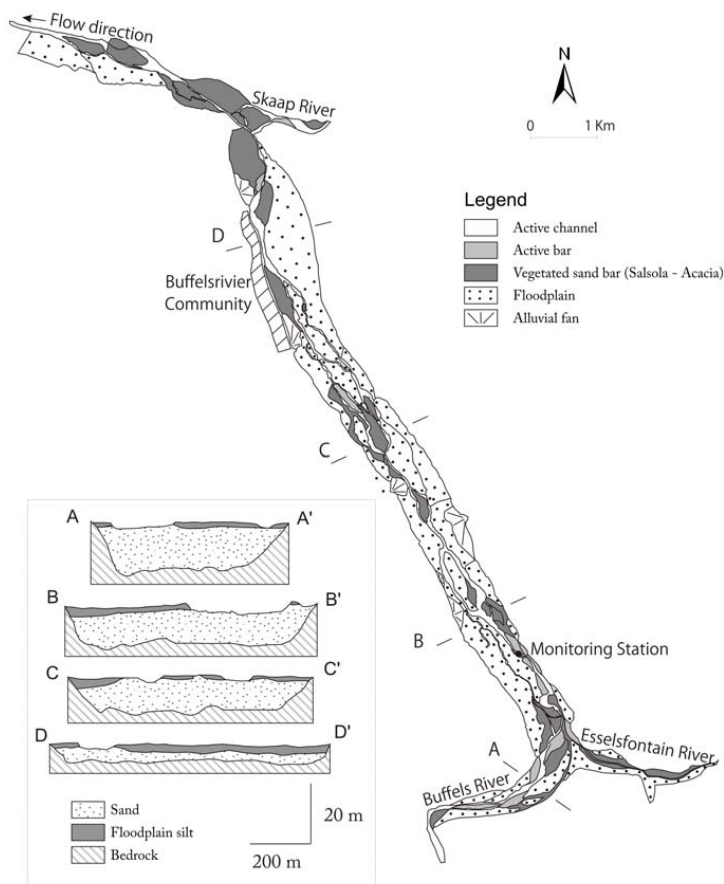


Fig. 2. Geomorphological map showing the main fluvial units along the Spektakel aquifer and the location of the WADE project monitoring station. The aquifer cross-sections at locations A to D were adapted from Marais (1981).

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



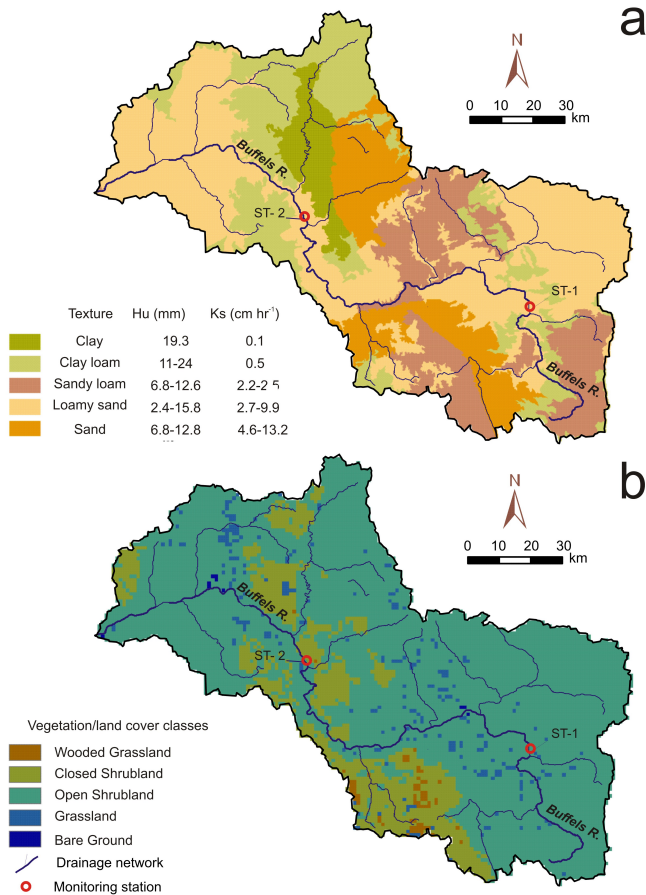


Fig. 3. (a) Soil texture and (b) vegetation cover index maps of the Buffels River catchment.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

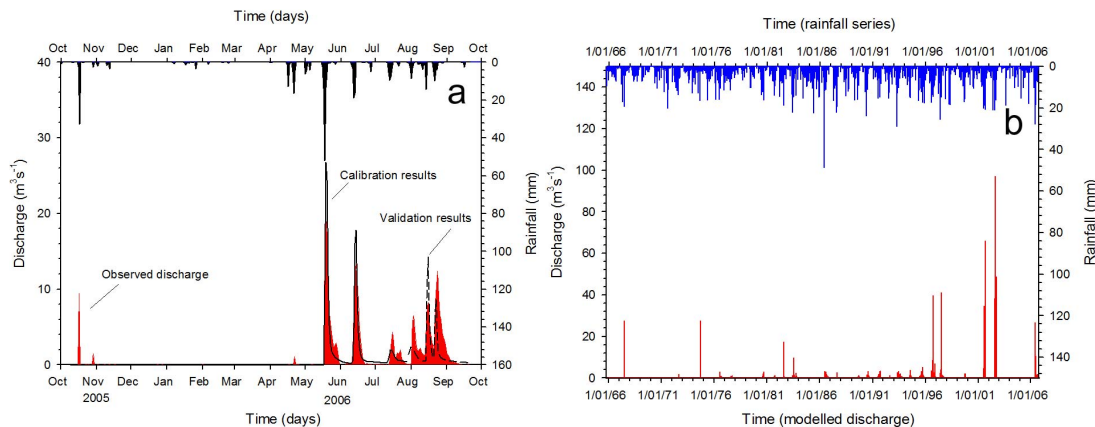


Fig. 4. (a) Surface water discharge (in red) recorded at the Buffelsrivier WADE monitoring station (lower catchment) and results of the calibration (black solid line) and validation (black dashed line) for the TETIS distributed rainfall-runoff model based on seven rainfall gauges. (b) Daily rainfall and daily peak discharge modelled for the period 1968–2005 at Messelpad (lower catchment).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

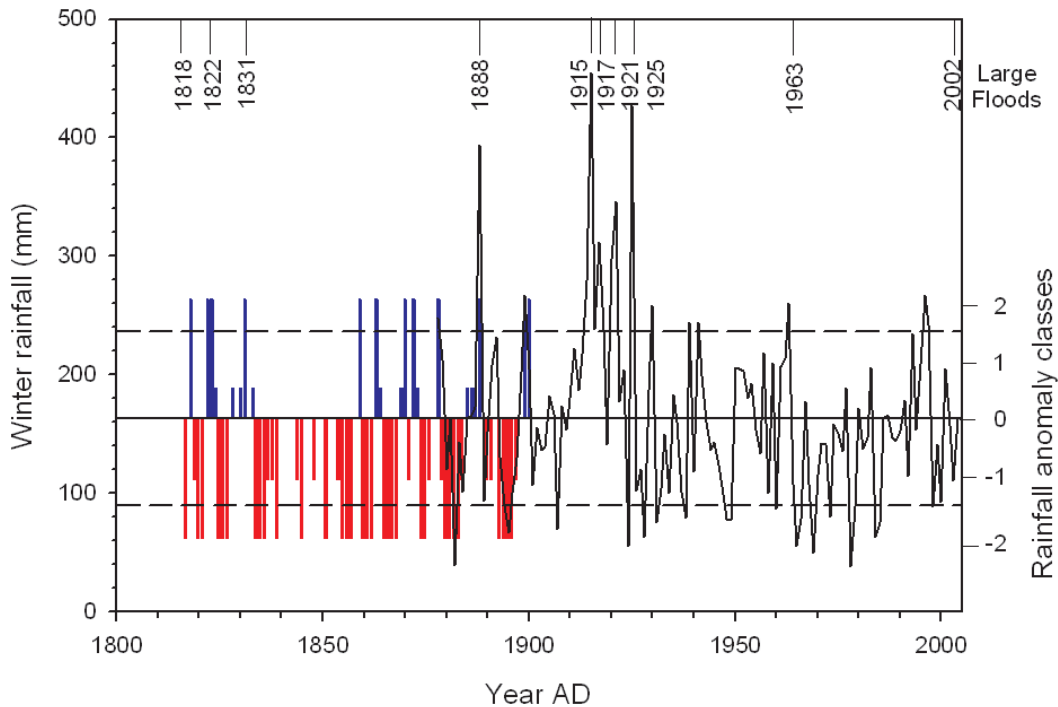


Fig. 5. Rainfall record at the Springbok rain station (1878–2006, black line) and rainfall anomaly classes (red bars: drought/dry years; blue bars: wet/normal years) from documentary records after Kelso and Vogel (2007). Rainfall anomaly class values are only for illustrative purposes: -2 drought year, -1 dry year, $+0.5$ normal year; $+2$ wet year. Years with insufficient evidence are not plotted. Documented flood years are indicated in the upper x axis.

Rainfall-runoff modelling and palaeoflood hydrology

G. Benito et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



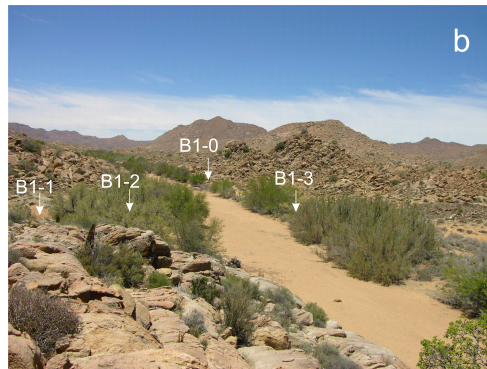
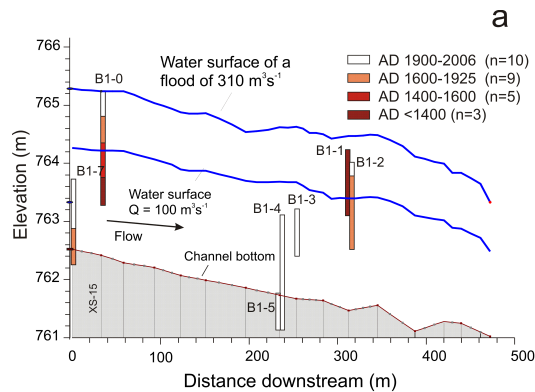


Fig. 6. Rooifontein study reach: **(a)** Longitudinal profile of the stream channel bed and water surface profiles obtained from HEC-RAS modelling for the highest palaeoflood deposits ($310 \text{ m}^3 \text{ s}^{-1}$) and for a reference discharge of $100 \text{ m}^3 \text{ s}^{-1}$. Stratigraphic profiles are represented as vertical bars, with colours sketching flood sediments of different age. **(b)** General upstream view of the Rooifontein reach and location of two four stratigraphic profiles B1-0, B1-1, B1-2 and B1-3.

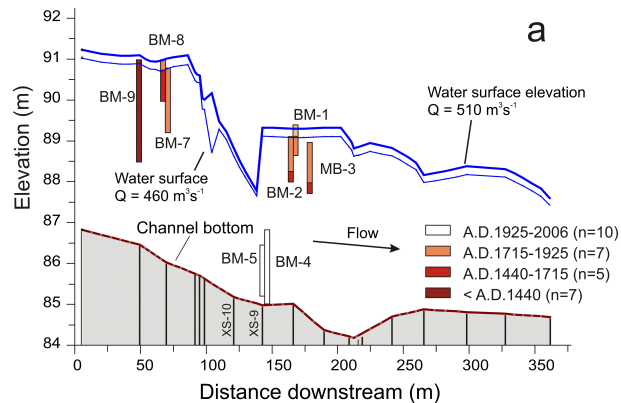


Fig. 7. Messelpad reach: **(a)** Longitudinal profile of the stream channel bed and water surface profiles obtained from HEC-RAS modelling (Hydrologic Engineering Center, 1995) for the highest palaeoflood deposits ($510 \text{ m}^3 \text{ s}^{-1}$) and for a reference discharge of $460 \text{ m}^3 \text{ s}^{-1}$. Stratigraphic profiles are represented as vertical bars, with colours sketching sections of flood sediments of different age. **(b)** General view of the upper section of the Messelpad study reach, and location of three profiles: BM-7 (1), BM-8 (2), and BM-9 (4).

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

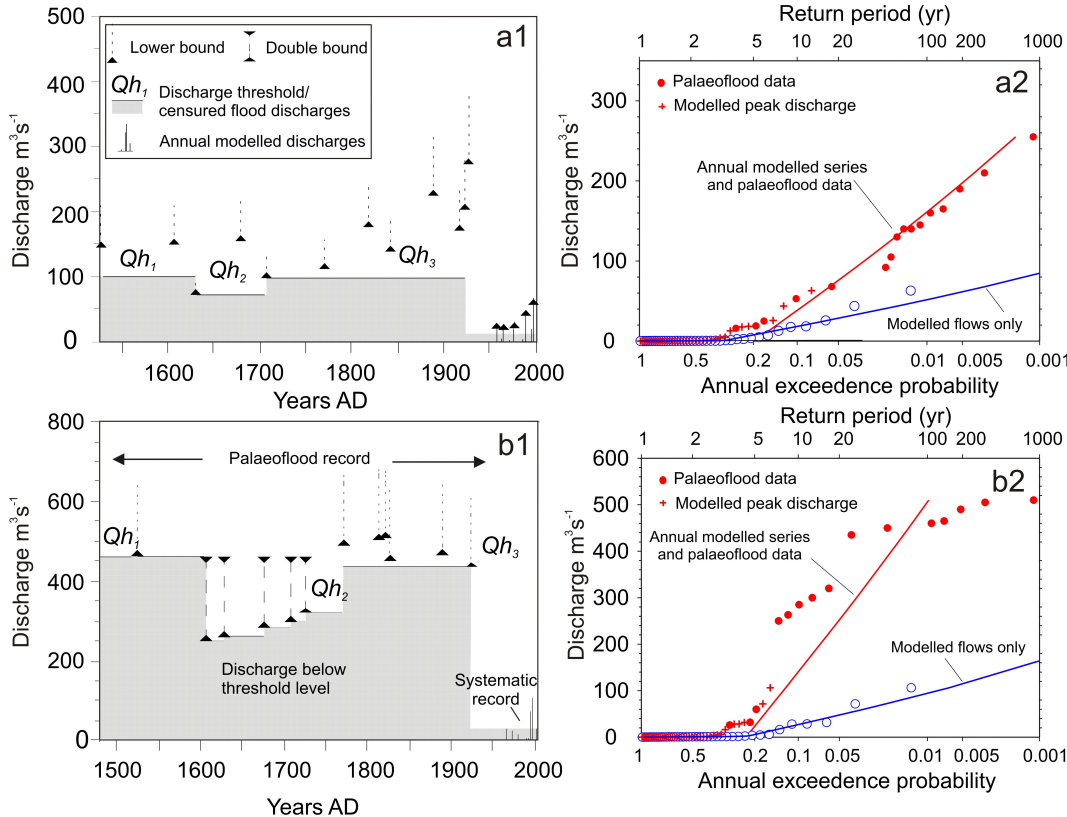


Fig. 8. Palaeoflood and modelled discharges at Rooifontein (**a1**) and Messelpad (**b1**). The horizontal shaded areas represent the discharge threshold values (Q_h) used in the flood frequency analysis. Two component extreme value distributions fitted to annual series of modelled discharges and palaeoflood information (censored data) for Rooifontein (**a2**) and Messelpad (**b2**).

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures

⏪
⏩

◀
▶

Back
Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

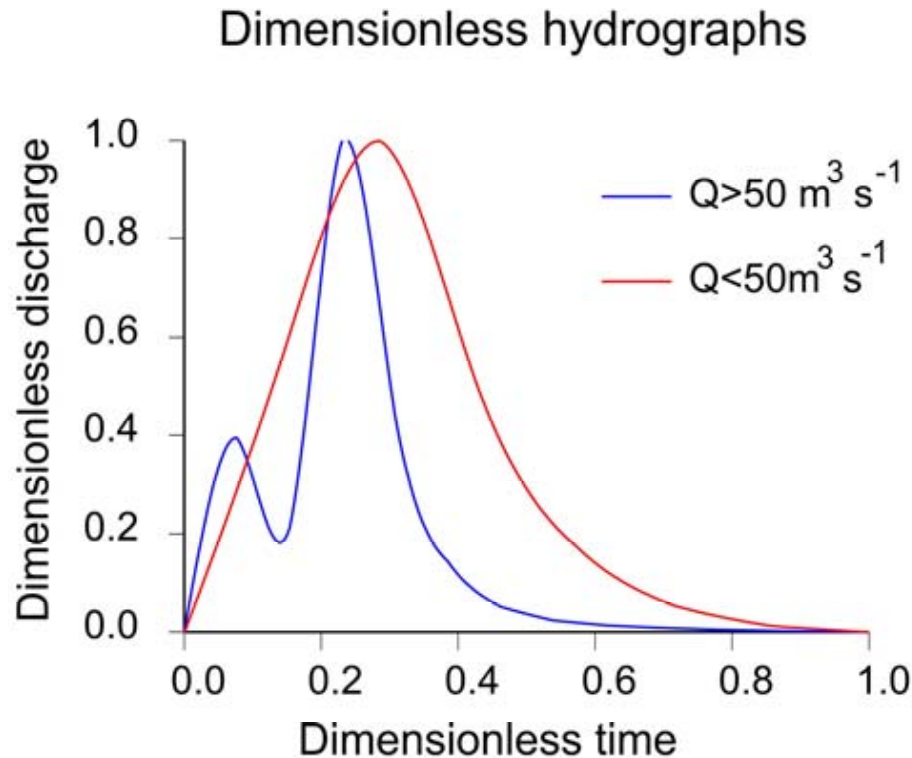


Fig. 9. The dimensionless hydrographs selected from a set of modelled hydrographs for small ($< 50 \text{ m}^3 \text{ s}^{-1}$) and large floods ($< 50 \text{ m}^3 \text{ s}^{-1}$).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)