

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

**Bayesian uncertainty
assessment of flood
predictions**

A. E. Sikorska et al.

Bayesian uncertainty assessment of flood predictions in ungauged urban basins for conceptual rainfall-runoff models

A. E. Sikorska^{1,2}, A. Scheidegger¹, K. Banasik², and J. Rieckermann¹

¹Eawag: Swiss Federal Institute of Aquatic Science and Technology,
Dept. of Urban Water Management, Überlandstrasse 133, Dübendorf, 8600, Switzerland

²Warsaw University of Life Sciences – SGGW, Dept. of Hydraulic Engineering,
166 Nowoursynowska Street Warsaw, 02-787, Poland

Received: 30 November 2011 – Accepted: 2 December 2011 – Published: 13 December 2011

Correspondence to: A. E. Sikorska (anna_sikorska@sggw.pl)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Urbanization and the resulting land-use change strongly affect the water cycle and runoff-processes in watersheds. Unfortunately, small urban watersheds, which are most affected by urban sprawl, are mostly ungauged. This makes it intrinsically difficult to assess the consequences of urbanization. Most of all, it is unclear how to reliably assess the predictive uncertainty given the structural deficits of the applied models. In this study, we therefore investigate the uncertainty of flood predictions in ungauged urban basins from structurally uncertain rainfall-runoff models. To this end, we suggest a procedure to explicitly account for input uncertainty and model structure deficits using Bayesian statistics with a continuous-time autoregressive error model. In addition, we propose a concise procedure to derive prior parameter distributions from base data and successfully apply the methodology to an urban catchment in Warsaw, Poland. Based on our results, we are able to demonstrate that the autoregressive error model greatly helps to meet the statistical assumptions and to compute reliable prediction intervals. In our study, we found that predicted peak flows were up to 7 times higher than observations. This was reduced by 150% with Bayesian updating, using only a few discharge measurements. In addition, our analysis suggests that imprecise rainfall information and model structure deficits contribute mostly to the total prediction uncertainty. In the future, flood predictions in ungauged basins will become more important due to ongoing urbanization as well as anthropogenic and climatic changes. Thus, providing reliable measures of uncertainty is crucial to support decision making.

1 Introduction

Urbanization and the resulting land-use change strongly affect the water cycle in watersheds (Rosso and Rulli, 2002; Ott and Uhlenbrook, 2004; Shepherd, 2005; Brath et al., 2006; Clarke, 2007; Quilbé et al., 2008; Barron et al., 2011; Jung et al., 2011;

HESSD

8, 11075–11113, 2011

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Schaefli et al., 2011). By 2020 it is estimated that more than 80 % of European citizens will be living in urban agglomerations and there is no apparent slowing in this trend (EEA, 2006). Probably the most obvious consequence of urbanization is that semi-natural pervious lands are substituted by sealed ones, which changes the hydrology of the urbanized basin and not only increases flood risk, but also impairs the chemical and ecological status of receiving water bodies through erosion and increased pollution (Dietz and Clausen, 2008).

To assess flood risk and mitigation strategies, urban planners rely on models which predict the runoff from a given rain event, design storm or long-term precipitation record. Unfortunately, small urban watersheds in areas of urban sprawl are mostly ungauged (Sivapalan, 2003) and where data are available, records often contain only a few years of the most basic hydrological variables, such as rainfall and streamflow. This makes it intrinsically difficult to assess the consequences of urbanization and predictions of such ungauged or poorly gauged basins are considered highly uncertain (Franks, 2002; Sivapalan et al., 2003; Wagener and Gupta, 2005).

In ungauged catchments, the lack of data also prohibits the use of detailed physically-based models and simple conceptual models with only few parameters are often the only feasible tool to predict the consequences of future urbanization (Sikorska and Banasik, 2010; Bocchiola et al., 2011). While a clear advantage of using such models is that their parameters often can be related to the physical catchment characteristics (Kapangaziwiri and Hughes, 2008), the price is the increased uncertainty due to model structure deficits (Seibert and Beven, 2009). It is commonly accepted that the uncertainty of predicted flows stems from parameter uncertainty, model structure error, measurement error and uncertain inputs to the model (Kavetski et al., 2006a, b).

In the context of urban planning and flood prediction, a reliable measure of uncertainty in predicted runoff is of vital interest. It is current practice to map prediction uncertainties entirely to parameters uncertainties and propagate them through the model (Wagener and Gupta, 2005). A popular example for this approach is Generalized Likelihood Uncertainty Estimation (Beven and Freer, 2001). However, it has

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



been demonstrated that Bayesian statistics is conceptually more satisfying than other approaches of uncertainty analysis (Mantovan and Todini, 2006; Yang et al., 2008).

Bayesian statistics requires an explicit formulation of the error process. This error process represents typically the input, structural and measurement uncertainty together. Unfortunately, it has been shown that the assumption of independent and normally distributed residuals, although mathematically convenient, is often violated (Sorooshian and Dracup, 1980; Kuczera et al., 2006; Cawley et al., 2007; Balin et al., 2010). A promising alternative is the lumped continuous autoregressive error model proposed by Yang et al. (2007) which is based on more realistic assumptions but has not been widely recognized so far.

Such a lumped error process is usually sufficient to compute the prediction uncertainty. However, a separate treatment of the uncertainty sources makes it possible to quantify the contribution of each to the output uncertainty. This is useful to assess in how far the prediction uncertainty can be reduced by reducing the uncertainty of a particular source. With regard to the importance of the individual sources of uncertainty, it is reported that measurement errors of the run-off, while acknowledged, are often considered to be relatively small and in the order of about 5% (Leonard et al., 2000; Di Baldassarre and Montanari, 2009). In contrast, Gourley and Vieux (2006) state that model structure errors and input uncertainty can be the most significant sources of uncertainty in predicted flows.

The uncertainty of forcing input, such as rainfall, is well recognized but rarely considered in hydrological modelling (Kavetski et al., 2002; Kuczera et al., 2006). Unfortunately, this is particularly important for ungauged catchments, where rain gauges, if available, are often sparse and do not capture the spatial variability of precipitation (Kavetski et al., 2006a; Bárdossy and Das, 2008; Moulin et al., 2009; McMillan et al., 2010).

Besides the possibility to separate the sources of uncertainty, Bayesian statistics has another feature that makes it appealing to apply it in ungauged catchments: it makes it possible to incorporate knowledge about the parameters from various sources,

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



such as expert knowledge or previous results, as a probability distribution. This prior distribution can be subsequently updated if measurement data become available (Beck and Katafygiotis, 1998; Sivia and Skilling, 2006; Zhang et al., 2011).

While in other applications of Bayesian statistics, the definition of a prior distribution, e.g. through the elicitation of expert knowledge, is a research field of its own (Winkler, 1967, O'Hagan, 1998, Garthwaite et al., 2005), most hydrological studies disregard this aspect. More often than not, investigators choose "reasonable" values, often based on their personal experience (McIntyre et al., 2005) or the software's user manual (Yang et al., 2007). For modelling ungauged catchments, further difficulties arise from unavailable base data and, to the best of our knowledge, a concise approach of formulating the prior knowledge on hydrological model parameters is missing.

In this paper, our aim is therefore to investigate the uncertainty of flood predictions in ungauged urban basins with structurally uncertain rainfall-runoff models. Specifically, we apply current state-of-the-art approaches to explicitly account for both input uncertainty and model structure deficits. In addition, we propose a concise procedure to derive prior parameter distributions from base data. Our study is innovative in three distinct aspects:

1. For Bayesian inference with a Unit Hydrograph-type model, we use a likelihood function that combines a Box-Cox data transformation with a continuous-time autoregressive error model. Additionally, we explicitly account for input uncertainty using rainfall multipliers. To the best of our knowledge, that is the first time when this is done for a small urban ungauged catchment.
2. We support the concise formulation of prior knowledge by combining five different methods to derive model parameters from base data. This approach is readily transferable to model other ungauged catchments with this type of model.
3. We assess the importance of parameter uncertainty, input and model structure error on the uncertainty of predicted flows and use scenario analysis to derive

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



practical recommendations regarding the performance of the methods for prior knowledge generation.

Our approach was tested on a case study from the Sluzew creek catchment in Warsaw, Poland, which has undergone rapid urbanization in the last three decades and has been strongly affected by urban flooding and soil erosion in recent years. As no routine monitoring data of precipitation or discharge are available for the Sluzew Creek, we performed a dedicated monitoring campaign to have a thorough basis for this analysis. Our results clearly show that predictions in ungauged basins remain a difficult task: after calibration uncertainties in peak flow are high and up to 5 times larger than observed values. This is mainly due to imprecise rainfall information and the simplistic model structure.

The remainder of the article is structured as follows: in Sect. 2 we present the conceptual rainfall runoff model and details on the Bayesian parameter estimation. In Sect. 3, the Sluzew creek case study catchment is described and the experimental design of the monitoring is given. In Sect. 4, we present the results. Finally, we discuss the results and draw conclusions in Sects. 5 and 6.

2 Methods

2.1 Conceptual modelling in ungauged basins

As mentioned above, modelling ungauged or poorly gauged catchments is a difficult task due to the lack of measurement data. Therefore, different conceptual rainfall-runoff models have been applied to predict the magnitude of flooding.

The most frequently applied runoff models for ungauged or poorly gauged catchments rely on the Soil Conservation Service Curve Number (SCS-CN) (USDA-SCS, 1986, 1989; Walker et al., 2000; Rosso and Rulli, 2002; Mishra and Singh, 2003; Hawkins et al., 2009; Soulis et al., 2009). The SCS-CN accounts for most runoff producing watersheds characteristics, such as soil type, land use and treatment, surface

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and antecedent moisture conditions while its parameter can be derived from physical properties of the catchment. Therefore, it is popular for modelling in ungauged catchments (Mishra and Singh, 2003; Banasik et al., 2008; Hawkins et al., 2009; Soulis et al., 2009; Sikorska and Banasik, 2010).

5 In this study we applied a conceptual model that combines the SCS-CN method with an instantaneous unit hydrograph model (IUH) to convolute effective rainfall into direct runoff at the outlet of the catchment (Nash, 1957):

$$Q(t) = \int_0^{\min(t, t_{\text{eff}})} P_e(\varphi) h(t - \varphi) d\varphi \quad (1)$$

10 where $Q(t)$ is a runoff, $P_e(\varphi)$ is unit volume of instantaneous hyetograph, and t_{eff} the duration of the effective rainfall. The unit hydrograph $h(t)$ is expressed as:

$$h(t) = \frac{A}{\Delta t} \int_{t-\Delta t}^t u(\varphi) d\varphi \quad (2)$$

$$u(\varphi) = \frac{1}{k \Gamma(N)} \left(\frac{\varphi}{k}\right)^{N-1} e^{-\frac{\varphi}{k}} \quad (3)$$

where A is the area of the catchment, Δt is an interval time, and $u(\varphi)$ is the instantaneous unit hydrograph defined by a gamma probability density function (Nash, 1957).

15 N is the number of identical linear reservoirs with retention time k .

The effective rainfall $P_e(t)$ in Eq. (1) is computed with the SCS-CN method:

$$P_e(t) = \begin{cases} 0 & , \text{ if } \sum_{\varphi=0}^t P(\varphi) - I \leq 0 \\ \frac{\left(\sum_{\varphi=0}^t P(\varphi) - I\right)^2}{\sum_{\varphi=0}^t P(\varphi) - I + S} & , \text{ else} \end{cases} \quad (4)$$

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where $P(\varphi)$ is the total rainfall at time φ , S is the maximal potential retention of a catchment, and I is the initial abstraction.

Similar as the parameters of the SCS-CN, the parameters and characteristic values of the IUH can be linked to catchment properties (see Sect. 2.5). Therefore, a conceptual run-off model allows for predictions even if no run-off data are available to calibrate the model.

2.2 Bayesian prediction and updating

The calculation of the prediction uncertainties is based on the likelihood function $p(y|\theta)$ and the distribution of the parameters (see below). The likelihood function describes the probability (density) of observing the data $y = [y_{t_0}, y_{t_1}, \dots, y_{t_n}]$ given the model and parameters θ . Consequently, the observed output is a random variable. This is commonly modelled by combining a deterministic model with a random error term (see Sect. 2.3).

The parameters are not known precisely but the current knowledge of the parameters is described by the probability density function $p(\theta)$. The predictive distribution of the model is then calculated by marginalizing the joint distribution of the runoff y and the parameters θ :

$$p(y) = \int p(y|\theta)p(\theta)d\theta \quad (5)$$

If calibration data y^C are available the distribution of the parameters θ is updated by applying the Bayes' theorem:

$$p(\theta|y^C) = \frac{p(y^C|\theta)p(\theta)}{\int p(y^C|\theta)p(\theta)d\theta} \propto p(y^C|\theta)p(\theta) \quad (6)$$

The posterior distribution $p(\theta|y^C)$ now describes the updated knowledge about the parameters; a combination of the prior knowledge and the data (Gelman et al., 1996).

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Using the posterior distribution $p(\theta|y^C)$ in Eq. (5) the predictive distribution becomes:

$$p(y|y^C) = \int p(y|\theta)p(\theta|y^C)d\theta \quad (7)$$

2.3 Likelihood function

It is often stated in literature that the assumption of independent normal distributed errors does not hold for hydrological models. Due to model structure deficits the residuals are often heavily auto-correlated (Sorooshian and Dracup, 1980; Cawley et al., 2007; Yang et al., 2007, 2008). Therefore, we constructed the likelihood of the model described in Sect. 2.1 with a continuous representation of an AR(1) process together with a Box-Cox transformation as proposed by Yang et al. (2007, 2008). See Appendix A for details.

2.4 Input error model

The introduced error process could represent the lumped uncertainty of the model structure deficits, measurement errors, and input uncertainty (Chatfield, 1996). However, additional insights can be gained if different sources of uncertainty are treated separately. It is well known that precipitation measurements contain errors, usually because point measurements represented by rare gauges are uncertain due to the significant spatial and temporal variability of rainfall fields (Kavetski et al., 2006a; Bárdossy and Das, 2008; Moulin et al., 2009; McMillan et al., 2010). Such spatial variation cannot be captured by traditional rain gauges. Additionally, in many situations only a single rain gauge is located close enough to be used.

Consequently, the model input might be highly uncertain. This uncertainty propagates through the model and can lead to large output uncertainty. Therefore, it is sensible to consider this error in the model input. On other hand, it is a reasonable assumption that the measurement error of the runoff is negligible small compared to

model structure deficits and input uncertainties (Gourley and Vieux, 2006). Here, we only treat input uncertainty separately.

As proposed by Kavetski et al. (2006a) we tackle the uncertainty of the precipitation measurements with individual rainfall multipliers ζ_j for each storm event as illustrated in Fig. 1. The product of ζ_j and the measured precipitation is then used as input for the model. Every event has a separate factor, as uncertainties in effective/aerial rainfall vary depending on the characteristic of the rainfall event. We furthermore assume that ζ_j is lognormally distributed with an expected value of one, which was shown by McMillan et al. (2010) to be a good approximation (for more details see Appendix B).

Note that this approach requires an event-based modelling approach. As for any analysed storm event a separate rainfall multiplier must be inferred, the number of parameters increases with the number of events.

2.5 Formulation of prior knowledge

The specification of the prior distribution of parameters is, even for experts, a difficult task as no explicit rules exist (O'Hagan, 1998; Scholten et al., 2011). The aim here is to find the distribution that best reflects the current knowledge.

As for ungauged catchments no measured flow is available, parameters have to be estimated from other sources of information. In the literature there are three common approaches to specify the knowledge on model parameters, which all have their difficulties. The first approach is to obtain parameters values straightforward from GIS data, topographic maps or tabulated values from the literature (Merz and Blöschl, 2004). The second one is to directly use parameters estimated on gauged catchments with similar characteristics (Seibert and Beven, 2009). Finally, parameters can be derived by empirical equations from readily available data through a regionalization process (McIntyre et al., 2005).

The disadvantage of the first method is that it can only be used to obtain physically based parameters, such as the area of a catchment or the Curve Number (based on land use and soil characteristics maps) (USDA-SCS, 1986, 1989), which can be biased

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



due to out-dated data. The second method raises the question how the “similarity” of two catchments can be assured (Oudin et al., 2010; Patil and Stieglitz, 2011). The third method is promising, because it links also non-physically based parameters to catchment characteristics, such as length of the stream, slope, or impervious area (Madsen et al., 2002). However, with all three approaches no statement about the uncertainty of the obtained parameters can be made.

Therefore, we propose to extend the third approach by using several empirical equations in parallel and construct prior distributions from the population of obtained parameter values. Here, we combine five empirical relations to obtain values for N and k from catchment characteristics, which we label as: (i) SCS, (ii) Lutz, (iii) Rao, (iv) GIUH (Geomorphologic IUH), and (v) GCIUH (Geomorphoclimatic IUH). The corresponding equations for all methods are given in Table 1. Other methods (Haan et al., 1994; Bhunya et al., 2003; Jain et al., 2006; Singh, 2007) are not suitable as they relate IUH characteristics to discharge properties that are not available for ungauged catchments.

The SCS method is the most common method to inform IUH characteristics (USDA-SCS, 1986, 1989). Originally, it was developed for small agricultural watersheds ($<16 \text{ km}^2$), however, it accounts for different types of land use and has since then been adopted for urban and forest watersheds (Banasik et al., 2008; Seibert and Beven, 2009; Soulis et al., 2009).

In a similar study, Lutz (1984) analyzed over 950 rainfall-runoff events from 75 watersheds located in southwest part of Germany with an area up to 250 km^2 . This method relates the parameters to stream properties and the ratio of forest and urbanized areas within the watershed.

An approach developed directly for small urban catchments was proposed by Rao et al. (1972), who explicitly took into account the degree of urbanization by relating the total area of the watershed to the fraction of impervious area.

The GIUH approach is based on numerical experiments with a detailed physically based watershed model on four basins in Venezuela and Puerto Rico with the area from 3 to 103 km^2 (Rodríguez-Iturbe and Valdés, 1979; Valdés et al., 1979; Hall et

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



al., 2001). In this approach the parameters are described as a function of watershed geomorphology and the dynamic parameter by the average peak flow velocity v , which is then related to rainfall and stream properties.

A variation of GIUH approach is GCIUH that was developed to relate the parameters only to geomorphologic and climatic data (Nowicka and Soczynska, 1989; Hall et al., 2001).

The parameters of the IUH characteristics t_p and u_p are related to the Nash model parameters N and k as follows:

$$t_p = k \cdot (N - 1), \quad (8)$$

$$u_p = \frac{1}{k \cdot \Gamma(N)} \cdot \frac{(N - 1)^{N-1}}{e^{N-1}} \quad (9)$$

and

$$\text{Lag} = N \cdot k. \quad (10)$$

The mean and variance of the parameters obtained by the five described methods are used to fit lognormal distributions as prior distribution for N and k using the method of moments.

The retention capacity S is related to the Curve Number (CN), which can be derived from GIS data, (USDA-SCS, 1986, 1989; Walker et al., 2000; Mishra and Singh, 2003; Hawkins et al., 2009; Soulis et al., 2009):

$$S = 25.4 \cdot \left(\frac{1000}{CN} - 10 \right). \quad (11)$$

The initial abstraction (I) from Eq. (4) is specific for every rainfall event and therefore difficult to estimate in advance. However, it can be related to the S through the ratio factor, which for urban catchments is typically equal to 5 % of S (Hawkins et al., 2009).

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



For the watersheds characteristics, A and CN , an error due to inaccurate maps may be considered. We assumed a normal distributed error with a standard deviation of 10 % of the mean.

The prior distribution for the standard deviation σ of the error model is difficult to define as σ must represent a combination of both model structure deficits and measurement errors. To reflect this, a wide distribution was selected. Similarly, a wide distribution was proposed for the characteristic correlation time of the autoregressive process τ . For the prior distribution we assumed independence between all parameters.

2.6 Assessing prediction performance

In the context of flooding the predicted peak flow is the most important model result. As it can be transferred to the water level in the stream it has practical relevance to predict the flooded areas during a flood event, which is of particular importance for the Sluzew creek case study. Specifically, we used the peak flow and its 80 %-interquantile range to assess the model performance.

2.7 Scenario analyses

To assess the individual error contributions and the gain of information from observations, the prediction uncertainty was analysed for four scenarios, which reflect different degrees of data availability and knowledge of the modeller. Scenario A describes a typical case of a completely ungauged basin, where no flow data are available for calibration. Here, the runoff is predicted using only the prior distribution. For Scenario B the prior distribution has been updated with run-off data of 14 rain events. For the predictions of B we used the estimated standard deviation of all rainfall multipliers (σ^{ξ}) instead of estimated individual rainfall multipliers. This is the best option to predict the run-off of a future rain event, for which an appropriate multiplier is not known in advance. In addition, we estimate the individual contributions of input uncertainties

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(Scenario C) and parameter uncertainties (Scenario D) to the total prediction uncertainty. Scenario C is similar to B but disregards input uncertainty by setting σ^ξ to zero, which illustrates the effect of the uncertain precipitation measurements. Scenario D is similar to scenario A only that the parameters were derived with the Rao method and considered exactly known. This scenario illustrates the impact of the parameter uncertainty (see Table 3).

2.8 Implementation details

The model was implemented in R (R Development Core Team, 2008). We sampled from the posterior probability distribution using an adaptive Monte Carlo Markov Chain (MCMC) sampler (Vihola, 2011). This sampler adjusts the covariance matrix of the jump distribution to achieve a defined rejection rate and thus guarantees efficient sampling. Convergence to the stationary distribution was achieved by running 72 chains in parallel with 50 000 samples each. The number of chains was chosen in preliminary trials to ensure good coverage of the parameter space. The prediction uncertainty bands are based on 1000 Monte Carlo simulations for each of the described scenarios.

3 Material

3.1 Test catchment

As a test catchment upper part of the Sluzew Creek basin was chosen that is located in the city of Warsaw (Poland) and has an area of about 26.9 km² (A_{red} : 18.3 km²) (see Fig. 2). In the last three decades it has undergone rapid urbanization. As a consequence, it is strongly affected by urban flooding (every second year) and soil erosion (WAU, 2002; Banasik et al., 2008).

The average annual precipitation in this part of city is about 520 mm and the average daily temperature varies from -3°C in January to $+18^\circ\text{C}$ in July (WAU, 2002). As a

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



lowland watershed, no steep slopes exist and the elevation varies from 95 m to 110 m above sea level. Thus, the topography of the watershed does not have a major influence on the surface runoff which instead is dominated by the land use type (Barron et al., 2011). Urban areas cover 58.7% of the catchment and the ratio of impervious areas of the whole catchment is 32%. As a small ungauged basin, no routine monitoring data of precipitation and discharge are available and we implemented our own monitoring program.

3.2 Data collection

Rainfall data at three locations and the runoff at the outlet of the catchment have been observed for three hydrological years with a temporal resolution of 10 min.

For our analysis, we selected 14 rainfall-runoff events from the period 2007–2009. The selection and separation of the events was based on both, the amount of total areal-averaged precipitation per an event (>3 mm) and the maximal observed discharge at the outlet ($>1 \text{ m}^3 \text{ s}^{-1}$). Storm events with discontinuous rainfall and during the winter period (due to potential snowmelt that can significantly contribute to runoff) were excluded from the analysis.

4 Results

4.1 Prior distribution

The prior distribution for the parameters of the IUH and the watershed characteristics were derived as described in Sect 2.5. The obtained prior distributions are summarized in Table 2 (see also Fig. 3). We find that the values for N obtained with the empirical formulas roughly vary by a factor 2, whereas the results for k vary by a factor of 4. The resulting lognormal distributions have a mean of 3.21 and standard deviation of 0.97 and a mean of 1.78 h and standard deviation of 0.86 h for N and k respectively.

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4.2 Bayesian parameter estimation

The model was calibrated with seven parameters: N and k of the IUH model, A and S for the watershed characteristics, σ and τ of the error model, and σ^ζ of the rainfall multipliers. Additionally, all 14 rainfall multipliers were inferred. The marginal posterior parameter distributions for most parameters were found to be distributed close to the prior but, as expected, with smaller variances (Fig. 3). An exception was the asymptotic standard deviation of the error process σ , for which more information was gained from the data, because not only its variance was greatly reduced but also the mode was shifted from 1 to 0.4.

Interestingly, the posterior standard deviation of all rainfall multipliers (σ^ζ) increased compared to the prior. This means that the prior distribution underestimated the input uncertainty. The mode of the estimated rainfall multipliers varied from 0.58 to 1.70 with a mean of 0.96 for all events (see Supplementary Material). For events with a higher observed precipitation the accuracy of the rainfall measurement was found to be higher and closer to the value of one. For events with lower observed rainfall the input error was found to be higher (Supplement).

The diagnostic plot of model residuals and innovations is presented in the Fig. 4. Not surprisingly, the residuals show a strong autocorrelation. This highlights the fact that the assumption of simpler likelihood functions with independent error terms would be clearly violated. The assumption of the continuous AR process with independent innovations is fulfilled much better, even if some week autocorrelation is still observed for the event 12. Moreover, time series of standardized observed innovations of the autoregressive error model show a reduced heteroscedasticity compared to the residuals (not shown).

4.3 Predictive uncertainties of flood discharges

The performance and uncertainties of model prediction were assessed under the four scenarios defined in Sect. 2.7. First, the model accuracy was measured with the peak

HESSD

8, 11075–11113, 2011

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



flow (Table 3). As expected, the relative error of the predicted to the observed peak flow was found to be the highest for scenario D. Using prior parameter distributions delivered from different methods (scenario A) instead of a single method (scenario D) makes it possible to better account for uncertainties in the parameters and slightly improves the accuracy of the peak flow estimation. The accuracy may be further improved through calibration with run-off data in scenario B.

Second, the predictive uncertainties were calculated for the different scenarios (Fig. 5). Solid lines correspond to predictions using the mode of the posterior density. Gray bands depict the 80 % predictive intervals. For scenarios where no run-off data are available, the achieved uncertainty bands were up to 7 times more than observed peak flows, which is large. A calibration with data allows reducing the uncertainties by a factor of 150 % (scenario B). However its 80 %-prediction interval is still wide compared to the observed data. Scenario C illustrates that the contributions of the input uncertainty are important, because the uncertainty bands are 50 % narrower compared to scenario B. Scenario D shows that the parameter uncertainty is not a relevant contribution in predictive uncertainties for this ungauged catchment.

5 Discussion

In this study, we present an approach to assess the prediction uncertainties of a conceptual run-off model in ungauged urbanized catchments. The above results show that the prediction uncertainty is rather large and dominated by input uncertainty and model structure errors. Here, we would like to discuss three important aspects, namely (i) the obtained results for the prior and posterior parameter distribution, (ii) the choice of the likelihood function and the consideration of input uncertainty, and (iii) problems with assessing the consequences of urbanization and modelling in ungauged basins with a brief outlook on future challenges.

With regard to point (i), to derive a useful prior distribution, we propose the use of five different empirical methods. As described above, the parameter values varied significantly depending on the choice of the empirical method. This indicates that the

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



use of a single empirical method most probably leads to biased flow predictions, which usually overestimate the runoff from big events and underestimate runoff during small events. However, as the largest uncertainty is contributed by input uncertainties (shown by Scenario C) and the model structure errors, the predictions are not so sensitive to the prior distributions of the model parameters (shown by scenarios D). While we can suggest a concise approach to derive a prior for the model parameters, obtaining prior distributions for the parameters of the error model (σ and τ) is difficult. While τ can be interpreted as the memory effect of the catchment, σ captures both the model structure error and the measurement error and has no physical meaning. Therefore, the prior distribution of σ is best directly taken from calibrated models. As such information is not available so far, we hope that the results from our case study could represent a valuable contribution. For larger or more rural catchments, we recommend choosing a conservative (i.e. wide) prior distribution for σ to avoid overconfidence.

In our case study, we furthermore find that the modes of obtained posterior distributions lie within the expected ranges. If the model is calibrated to each rain event separately, the retention S is comparably larger for “small” storm events with less than 12 mm rainfall. This explains the wide posterior distribution for this parameter and corresponds to the recent findings (Hawkins et al., 2009; Soulis et al., 2009). With regard to the correlation time τ of the autoregressive process, we obtained most probable values around 400 min, which is reasonable for a small urbanized catchment. Interestingly, the posterior mode of σ is more than two times smaller than the prior, which was rather unexpected.

With regard to point (ii), the results of Bayesian parameter estimation are only meaningful if the assumptions of the error model are fulfilled. Here, reasonable uncertainty bands were achieved with the proposed autoregressive error process and the fact that larger flows have higher uncertainties than dry weather flows confirms our expectations. We find that the applied error model is very convenient, because it is straightforward to implement and, because of its continuous form, it is suitable for data that are not equally spaced in time (e.g. due to missing values).

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Input uncertainty was considered by using rainfall multipliers. Inferring one rainfall multiplier per rain event from the observed rain and the run-off has several advantages. First, it limits the number of parameters to be inferred to a manageable number. Second, it allows for a better fit to the data (Supplement) and an estimation of the uncertainty in the input. This uncertainty must then be considered in the prediction uncertainty. The main limitation of rainfall multipliers is that they fail when no precipitation has been observed for a runoff event. While we took great care in our study to eliminate this problem by an experimental design with multiple rain gauges, this can be relevant in practical applications. The posterior rainfall multipliers were found to vary around one, whereas the standard deviation σ^ξ of all multipliers was found to be relatively high (about 0.4). Consequently, the uncertainties linked to the input error are important. However, it must be noted that the rainfall multipliers ultimately increase the flexibility of the model and thus partly compensate for model structure deficits. Therefore, we agree with Seibert and Beven (2009) that the inferred rainfall should not be interpreted as “real” rainfall, but as the estimated inputs for the applied model.

With regard to point (iii), it was found that the uncertainties in peak flows are about 5 times higher than observed values, which is large and raises concerns for practical applications of IUH-type models. On the one hand, we are able to show that the parameter uncertainty can be greatly reduced and the prediction improves even with only a few discharge measurements. However, on the other hand, for Sluzew creek, putting more effort into flow monitoring or collecting long-term records will most probably not improve the results significantly, because model structure deficits and input uncertainty remain. Reducing the input uncertainty seems most promising, but typically has some cost attached to it. For example, more detailed rainfall information requires investments into a denser network of rain gauges, weather radar or retrieving data from microwave links (McMillan et al., 2010). In our case, the model structure can probably be also improved, but in general this is tied to the availability of runoff data for calibration. In totally ungauged catchments, however, one is limited to models where the parameters are roughly known or can be derived with empirical methods. This is particularly true

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



if the conditions of the basin are expected to change, for example due to urban growth which is currently especially relevant in Eastern European cities (EEA, 2006). With continuing urbanization, even a complex model calibrated to current conditions will not reliably predict future run-off. Therefore, despite their limitations, simple conceptual models are justified when it is straightforward to derive parameters and predictions for different future scenarios.

In summary, we agree with predecessors (Sivapalan et al., 2003; Seibert and Beven, 2009; Reichert and Mieleitner, 2009) that hydrological modelling in small ungauged or poorly gauged catchments is not a trivial task and find, once more, that the predictions are very uncertain. Unfortunately, in many cases there is no alternative to predictions of models that cannot be verified with data (Kapangaziwiri and Hughes, 2008). Nevertheless, we believe that it is especially important in these situations to quantify the prediction uncertainty. Furthermore, the uncertainty must be communicated to the decision makers and, if possible, be taken into account in the urban planning process (Ramos et al., 2010). This, again, is especially important for urbanized catchments, where the economic consequences of flooding can be severe.

Despite economic losses due to flooding, urban growth usually affects the receiving water quality through point and non-point source pollution. In this regard, wet-weather pollution, which is often associated with the amount of total suspended solids, is especially crucial. Future work should therefore investigate the uncertainties of water quality impairments (e.g. from sediment loads) in ungauged catchments under urbanization. Promising approaches for multi objective calibration within a Bayesian framework that would lend themselves to this task have been recently suggested (Dietzel and Reichert, 2010; Reichert and Schuwirth, 2011).

6 Conclusions

In this study, we investigated the uncertainty of flood predictions in ungauged urban basins with structurally uncertain rainfall-runoff models. We used Bayesian statistics

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



to explicitly account for parameter uncertainty, input uncertainty and model structure deficits together with measurement errors and successfully demonstrated the approach on an urban catchment in Warsaw, Poland. Based on our results we conclude that:

- The proposed procedure to derive prior distributions for the model parameters from base data by combining five different empirical methods is concise. It delivers meaningful results and is readily transferable to other ungauged catchments. In contrast, it is difficult to specify prior distributions for the parameters of the error model, which do not necessarily have a physical meaning. Our results are therefore beneficial for other studies in similar basins.
- The statistical assumption of independent and normally distributed residuals does not hold for simple hydrological models because of model structure deficits. In our case, it was possible to meet the statistical assumptions much better using a Box-Cox data transformation with a continuous-time autoregressive error model. This lumped error process is convenient and straightforward to implement for other cases.
- Flood predictions of IUH models in ungauged basins are difficult, because predictive uncertainties are large. In our study, we found that predicted peak flows were up to 7 times higher than observations. This was reduced by 150 % with only few discharge measurements.
- The separation of uncertainties is beneficial because it makes it possible to assess the individual error sources. The major contribution to the predictive uncertainties is input uncertainty, i.e. imprecise rainfall information. The second main contribution are model structure deficits, whereas the parameter uncertainties are not so important. Flow predictions will improve most with better rainfall information, for example from a denser network of rain gauges or microwave links.

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Appendix A

Likelihood function

To predict the uncertainty of model output, the likelihood function in Eq. (6) in Sect. 2.2 needs to be derived. Following the notation of Yang et al. (2007) a deterministic conceptual rainfall-runoff model can be written as:

$$y^M(\theta) = \left[y_{t_0}^M(\theta), y_{t_1}^M(\theta), \dots, y_{t_n}^M(\theta) \right] \quad (\text{A1})$$

Where $y_{t_j}^M(\theta)$ is the predicted runoff at time t_j and θ denotes the parameter vector. A random error term ε is then introduced to take measurement errors, input uncertainty, and the imperfect model structure into account. In many applications a transformation helps to meet the statistical assumptions of the considered error model:

$$Y_{t_i}^M(\theta) = g^{-1} \left(g \left(y_{t_i}^M(\theta) \right) + \varepsilon_{t_i} \right) \quad (\text{A2})$$

Hence, the model output $Y_{t_i}^M(\theta)$ is a random variable and therefore written in capitals. The transformation function g and its inverse g^{-1} are the forward and backward Box-Cox transformation (Box and Cox, 1964, 1982; Yang et al., 2007, 2008):

$$g(y) = \begin{cases} \frac{(y+\lambda_2)^{\lambda_1}-1}{\lambda_1} & \lambda_1 \neq 0 \\ \ln(y+\lambda_2) & \lambda_1 = 0 \end{cases} \quad (\text{A3})$$

$$g^{-1}(z) = \begin{cases} (\lambda_1 z + 1)^{1/\lambda_1} - \lambda_2 & \lambda_1 \neq 0 \\ \exp(z) - \lambda_2 & \lambda_1 = 0 \end{cases} \quad (\text{A4})$$

$$\frac{dg}{dy} = (y + \lambda_2)^{\lambda_1 - 1} \quad (\text{A5})$$

HESSD

8, 11075–11113, 2011

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Note that g includes the identity ($\lambda_1=\lambda_2 = 1$) and a log-transformation ($\lambda_1=\lambda_2 = 0$) as special cases, $y+\lambda_2$ and z must be larger than zero for all values y and z .

The simplest assumption for the error process in Eq. (A2) is that ε_{t_i} is independently and identically distributed. However, it is often reported that this assumption does not hold for runoff (Yang et al., 2007, 2008). To consider auto correlated error terms a continuous autoregressive error model based on the Ornstein-Uhlenbeck process proposed by Yang et al. (2007, 2008) was used. Thereby, the independence and normal distribution is assigned not to the error but rather to the random distributes, called innovations (Chatfield, 2003; Yang et al., 2007, 2008):

$$I_{t_i} = \varepsilon_{t_i} - \varepsilon_{t_{i-1}} \exp\left(-\frac{t_i - t_{i-1}}{\tau}\right) \quad (\text{A6})$$

$$\sigma_{I_{t_i}} = \sigma \sqrt{1 - \exp\left(-2\frac{t_i - t_{i-1}}{\tau}\right)} \quad (\text{A7})$$

where $\sigma_{I_{t_i}}$ is a standard deviation of the innovation I_{t_i} , σ is a standard deviation of the error ε , and τ is a characteristic correlation time. In combination with the Box-Cox transformation the following likelihood function results:

$$\rho(y|\theta, R) = \frac{1}{\sqrt{2\pi}} \frac{1}{\sigma} \exp\left(-\frac{1}{2} \frac{[g(y_{t_0}) - g(y_{t_0}(\theta))]^2}{\sigma^2}\right)$$

$$\cdot \left. \frac{dg}{dy} \right|_{y=y_{t_0}} \cdot \prod_{i=1}^n \left[\frac{1}{\sqrt{2\pi}} \frac{1}{\sigma \sqrt{1 - \exp\left(-2\frac{t_i - t_{i-1}}{\tau}\right)}} \right]$$

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



$$\cdot \exp \left(-\frac{1}{2} \frac{\left[g(y_{t_i}) - g(y_{t_i}(\theta)) - \left[g(y_{t_{i-1}}) - g(y_{t_{i-1}}(\theta)) \right] \exp\left(-\frac{t_i - t_{i-1}}{\tau}\right) \right]^2}{\sigma^2 \left(1 - \exp\left(-2\frac{t_i - t_{i-1}}{\tau}\right) \right)} \right) \cdot \left. \left[\frac{dg}{dy} \right]_{y=y_{t_i}} \right] \quad (\text{A8})$$

where y_t is an observation and $y_t(\theta)$ is a simulated response of a model at time t .

Appendix B

Input uncertainty

To simplify the notation all rainfall multipliers are combined in a vector $\zeta = [\zeta_1, \zeta_2, \dots, \zeta_N]$. The distribution of all multipliers between the events is denoted by $p(\zeta|\theta^\zeta)$, where θ^ζ are the parameter of this distribution. The likelihood function of the runoff model depends now on the parameters θ^ζ of $p(\zeta|\theta^\zeta)$ and the model parameters θ . The joint distribution of y and ζ is $p(y, \zeta|\theta, \theta^\zeta) = p(y|\zeta, \theta)p(\zeta|\theta^\zeta)$.

Hence, to get the predictive distribution we integrate over θ , θ^ζ and ζ :

$$\begin{aligned} p(y) &= \iiint p(y|\zeta, \theta)p(\zeta|\theta^\zeta)p(\theta)p(\theta^\zeta) d\theta d\theta^\zeta d\zeta \\ &= \iiint p(y, \zeta|\theta, \theta^\zeta)p(\theta)p(\theta^\zeta) d\theta d\theta^\zeta d\zeta \end{aligned} \quad (\text{B1})$$

In case data y^C are available for calibration the posterior of ζ , and the parameters θ and θ^ζ is given by

$$p(\theta, \theta^\zeta, \zeta|y^C) \propto p(y^C|\zeta, \theta)p(\zeta|\theta^\zeta)p(\theta)p(\theta^\zeta) \quad (\text{B2})$$

Therewith, the distribution of the prediction becomes

$$p(y|y^C) = \iiint p(y, \zeta|\theta, \theta^\zeta)p(\theta, \theta^\zeta, \zeta|y^C) d\theta d\theta^\zeta d\zeta \quad (\text{B3})$$

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Supplementary material related to this article is available online at:
<http://www.hydrol-earth-syst-sci-discuss.net/8/11075/2011/hessd-8-11075-2011-supplement.pdf>.

Acknowledgements. The research was conducted within the Scientific Exchange Program NMS-CH No. 10.070 in the cooperation between Swiss Federal Institute of Aquatic Science and Technology- Eawag (Switzerland) and Warsaw University of Life Sciences – SGGW (Poland). Special thanks go to Mark Honti (Eawag) for his advice regarding the implementation of the likelihood function.

References

- Di Baldassarre, G. and Montanari, A.: Uncertainty in river discharge observations: a quantitative analysis, *Hydrol. Earth Syst. Sci.*, 13, 913–921, doi:10.5194/hess-13-913-2009, 2009.
- Balin, D., Lee, H., and Rode, M.: Is point uncertain rainfall likely to have a great impact on distributed complex hydrological modeling?, *Water Resour. Res.*, 46, W11520, doi:10.1029/2009WR007848, 2010.
- Banasik, K., Hejduk, L., and Barszcz, M.: Flood flow consequences of land use changes in a small urban catchment of Warsaw, in: 11th International Conference on Urban Drainage, 31, p. 10 pp., 2008.
- Barron, O., Pollock, D., and Dawes, W.: Evaluation of catchment contributing areas and storm runoff in flat terrain subject to urbanisation, *Hydrol. Earth Syst. Sci.*, 15, 547–559, doi:10.5194/hess-15-547-2011, 2011.
- Beck, J. L. and Katafygiotis, L. S.: Updating models and their uncertainties. I: Bayesian Statistical Framework, *J. Eng. Mech.*, 124, 455–461, doi:10.1061/(ASCE)0733-9399(1998)124:4(455), 1998.
- Beven, K. and Freer, J.: Equifinality, data assimilation, and uncertainty estimation in mechanistic modelling of complex environmental systems using the GLUE methodology, *J. Hydrol.*, 249, 11–29, doi:10.1016/S0022-1694(01)00421-8, 2001.
- Bhunya, P. K., Mishra, S. K., and Berndtsson, R.: Simplified Two-Parameter Gamma

HESSD

8, 11075–11113, 2011

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Distribution for Derivation of Synthetic Unit Hydrograph, *J. Hydrol. Eng.*, 8, 226, doi:10.1061/(ASCE)1084-0699(2003)8:4(226), 2003.
- Bocchiola, D., Diolaiuti, G., Soncini, A., Mihalcea, C., D'Agata, C., Mayer, C., Lambrecht, A., Rosso, R., and Smiraglia, C.: Prediction of future hydrological regimes in poorly gauged high altitude basins: the case study of the upper Indus, Pakistan, *Hydrol. Earth Syst. Sci.*, 15, 2059–2075, doi:10.5194/hess-15-2059-2011, 2011.
- Box, G. E. P. and Cox, D. R.: An Analysis of Transformations, *J. Royal Stat. Soc.*, 26, 211–252, 1964.
- Box, G. E. P. and Cox, D. R.: An Analysis of Transformations Revisited, Rebutted, *J. Am. Stat. Ass.*, 77, 209–210, 1982.
- Brath, A., Montanari, A., and Moretti, G.: Assessing the effect on flood frequency of land use change via hydrological simulation (with uncertainty), *J. Hydrol.*, 324, 141–153, doi:10.1016/j.jhydrol.2005.10.001, 2006.
- Bárdossy, A. and Das, T.: Influence of rainfall observation network on model calibration and application, *Hydrol. Earth Syst. Sci.*, 12, 77–89, doi:10.5194/hess-12-77-2008, 2008.
- Cawley, G. C., Janacek, G. J., Haylock, M. R., and Dorling, S. R.: Predictive uncertainty in environmental modelling, *Neural networks*, 20, 537–549, doi:10.1016/j.neunet.2007.04.024, 2007.
- Chatfield, C.: Model uncertainty and forecast accuracy, *J. Forecasting*, 15, 495–508, doi:10.1002/(SICI)1099-131X(199612)15:7<495::AID-FOR640>3.0.CO;2-O, 1996.
- Chatfield, C.: *The Analysis of Time Series*, 6th Edn, Chapman & Hall, London., 2003.
- Clarke, R. T.: Hydrological prediction in a non-stationary world, *Hydrol. Earth Syst. Sci.*, 11, 408–414, doi:10.5194/hess-11-408-2007, 2007.
- Dietz, M. E. and Clausen, J. C.: Stormwater runoff and export changes with development in a traditional and low impact subdivision, *J. Environ. Manage.*, 87, 560–566, doi:10.1016/j.jenvman.2007.03.026, 2008.
- Dietzel, A. and Reichert, P.: *Using Statistical Bias Description for Multi-objective Calibration of a Lake Water Quality Model*, International Environmental Modelling and Software Society (iEMSs), Ottawa, Canada, 2010.
- EEA: Urban sprawl in Europe – The ignored challenge, European Environment Agency – EEA, Copenhagen, 2006.
- Franks, S. W.: Integrating models, methods and measurements for prediction in ungauged basins, in *Predictions in: Ungauged Basins: PUB Kick-off*, 13–21, 2002.

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Garthwaite, P. H., Kadane, J. B., and O'Hagan, A.: Statistical Methods for Eliciting Probability Distributions, *J. Am. Stat. Ass.*, 100, 680–701, doi:10.1198/016214505000000105, 2005.
- Gelman, A., Meng, X. L., and Stern, H.: Posterior predictive assessment of model fitness via realized discrepancies, *Statist. Sinica*, 6, 733–759, 1996.
- 5 Gourley, J. J. and Vieux, B. E.: A method for identifying sources of model uncertainty in rainfall-runoff simulations, *J. Hydrol.*, 327, 68–80, doi:10.1016/j.jhydrol.2005.11.036, 2006.
- Haan, C. T., Barfield, B. J., and Hayes, J. C.: Rainfall-Runoff Estimation in Stormwater Computations, in *Design hydrology and sedimentology for small catchments*, 37–103, San Diego, Calif., Academic Press, 1994.
- 10 Hall, M. J., Zaki, A. F., and Shahin, M. M. A.: Regional analysis using the geomorphoclimatic instantaneous unit hydrograph, *Hydrol. Earth Syst. Sci.*, 5, 93–102, doi:10.5194/hess-5-93-2001, 2001.
- Hawkins, R. H., Ward, T. J., Woodward, D. E., and Van Mullem, J. A.: Curve number hydrology: state of the practice, Report of ASCE/EWRI Task Committee, American Society of Civil Engineers, Reston, Virginia, US, 2009.
- 15 Jain, M. K., Mishra, S. K., and Singh, V. P.: Evaluation of AMC-Dependent SCS-CN-Based Models Using Watershed Characteristics, *Water Resour. Manage.*, 20, 531–552, doi:10.1007/s11269-006-3086-1, 2006.
- Jung, I.-W., Chang, H., and Moradkhani, H.: Quantifying uncertainty in urban flooding analysis considering hydro-climatic projection and urban development effects, *Hydrol. Earth Syst. Sci.*, 15, 617–633, doi:10.5194/hess-15-617-2011, 2011.
- 20 Kapangaziwiri, E. and Hughes, D. A.: Towards revised physically based parameter estimation methods for the Pitman monthly rainfall-runoff model, *Water SA*, 34, 183–192, 2008.
- Kavetski, D., Franks, S. W., and Kuczera, G.: Confronting Input Uncertainty in Environmental Modelling, *Am. Geophys. Union*, 6, 49–68, 2002.
- 25 Kavetski, D., Kuczera, G., and Franks, S. W.: Bayesian analysis of input uncertainty in hydrological modeling: 1. Theory, *Water Resour. Res.*, 42, W03407, doi:10.1029/2005WR004368, 2006a.
- Kavetski, D., Kuczera, G., and Franks, S. W.: Bayesian analysis of input uncertainty in hydrological modeling: 2. Application, *Water Resour. Res.*, 42, W03408, doi:10.1029/2005WR004376, 2006b.
- 30 Kuczera, G., Kavetski, D., Franks, S. W., and Thyer, M.: Towards a Bayesian total error analysis of conceptual rainfall-runoff models: Characterising model error using storm-dependent

- parameters, *J. Hydrol.*, 331, 161–177, doi:10.1016/j.jhydrol.2006.05.010, 2006.
- Leonard, J., Mietton, M., Najib, H., and Gourbesville, P.: Rating curve modelling with Manning's equation to manage instability and improve extrapolation, *Hydrolog. Sci. J.*, 45, 739–750, 2000.
- 5 Lutz, W.: Calculation of flood discharges using area characteristics, Universität Karlsruhe, IHW, 24, 235, 1984.
- Madsen, H., Wilson, G., and Ammentorp, H. C.: Comparison of different automated strategies for calibration of rainfall-runoff models, *J. Hydrol.*, 261, 48–59, doi:10.1016/S0022-1694(01)00619-9, 2002.
- 10 Mantovan, P. and Todini, E.: Hydrological forecasting uncertainty assessment: Incoherence of the GLUE methodology, *J. Hydrol.*, 330, 368–381, doi:10.1016/j.jhydrol.2006.04.046, 2006.
- McIntyre, N., Lee, H., Wheeler, H., Young, A., and Wagener, T.: Ensemble predictions of runoff in ungauged catchments, *Water Resour. Res.*, 41, 3307–3323, 2005.
- McMillan, H., Jackson, B., Kavetski, D., and Woods, R.: Input Uncertainty in Hydrological Models: An Evaluation of Error Models for Rainfall, (for submission to: *J. Hydrometeor.*: Special Collection on the State of the Science of Precipitation Research), in preparation, *J. Hydrometeor.*, 2010.
- 15 Merz, R. and Blöschl, G.: Regionalisation of catchment model parameters, *J. Hydrol.*, 287, 95–123, doi:10.1016/j.jhydrol.2003.09.028, 2004.
- 20 Mishra, S. K. and Singh, V. P.: Soil Conservation Service Curve Number (SCS-CN) Methodology, 1st Ed., Springer, 2003.
- Moulin, L., Gaume, E., and Obled, C.: Uncertainties on mean areal precipitation: assessment and impact on streamflow simulations, *Hydrol. Earth Syst. Sci.*, 13, 99–114, doi:10.5194/hess-13-99-2009, 2009.
- 25 Nash, J. E.: The form of instantaneous unit hydrograph, *Int. Assoc. Sci. Hydrol.*, 45, 114–121, 1957.
- Nowicka, B. and Soczynska, U.: Application of GIUH and dimensionless hydrograph models in ungauged basins, in *Friends in Hydrology*, Eds L. Roald, K. Nordseth and K. A. Hassel Proc. Bolkesjø Symp., 197–203, *Int. Ass. Hydrol. Sci. Pubn.*, 187., 1989.
- 30 Ott, B. and Uhlenbrook, S.: Quantifying the impact of land-use changes at the event and seasonal time scale using a process-oriented catchment model, *Hydrol. Earth Syst. Sci.*, 2004, 62–78, doi:10.5194/hess-8-62-2004, 2004.
- Oudin, L., Kay, A., Andréassian, V., and Perrin, C.: Are seemingly physically simi-

Bayesian uncertainty assessment of flood predictionsA. E. Sikorska et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Scholten, L., Scheidegger, A., Maurer, M., and Reichert, P.: Combining quantitative expert knowledge and local data for enhanced service life modeling of water pipes under lacking data., in preparation , 2011.

Seibert, J. and Beven, K. J.: Gauging the ungauged basin: how many discharge measurements are needed?, *Hydrol. Earth Syst. Sci.*, 13, 883–892, doi:10.5194/hess-13-883-2009, 2009.

Shepherd, J. M.: A review of current investigations of urban-induced rainfall and recommendations for the future, *Earth Interact.*, 9, 1–27, doi:10.1175/EI156.1, 2005.

Singh, S. K.: Identifying Representative Parameters of IUH, *J. Irrig. Drain Eng.*, 133, 602, doi:10.1061/(ASCE)0733-9437(2007)133:6(602), 2007.

Sikorska, A. and Banasik, K.: Parameter identification of a conceptual rainfall-runoff model for a small urban catchment, *Ann. Warsaw Univ. of Life Sci. - SGGW, Land Reclam*, 42, 279–293, doi:10.2478/v10060-008-0086-2, 2010.

Sivapalan, M.: Prediction in ungauged basins: a grand challenge for theoretical hydrology, *Hydrol. Process.*, 17, 3163–3170, doi:10.1002/hyp.5155, 2003.

Sivapalan, M., Takeuchi, K., Franks, S. W., Gupta, V. K., Karambiri, H., Lakshmi, V., Liang, X., McDonnell, J. J., Mendiondo, E. M., O'connell, P. E., Oki, T., Pomeroy, J. W., Schertzer, D., Uhlenbrook, S., and Zehe, E.: IAHS Decade on Predictions in Ungauged Basins (PUB), 2003–2012: Shaping an exciting future for the hydrological sciences, *Hydrol. Sci. J.*, 48, 857–880, 2003.

Sivia, D. S. and Skilling, J.: *Data analysis: a Bayesian tutorial*, Oxford University Press, 2006.

Sorooshian, S. and Dracup, J. A.: Stochastic parameter estimation procedures for hydrologic rainfall-runoff models: Correlated and heteroscedastic error cases, *Water Resour. Res.*, 16, 430–442, doi:10.1029/WR016i002p00430, 1980.

Soulis, K. X., Valiantzas, J. D., Dercas, N., and Londra, P. A.: Analysis of the runoff generation mechanism for the investigation of the SCS-CN method applicability to a partialarea experimental watershed, *Hydrol. Earth Syst. Sci.*, 13, 605–615, doi:10.5194/hess-13-605-2009, 2009.

Tarboton, D. G.: Fractal river networks, Horton's laws and Tokunaga cyclicity, *J. Hydrol.*, 187, 105–117, doi:10.1016/S0022-1694(96)03089-2, 1996.

USDA-SCS: Urban hydrology for small watersheds, Technical Release 55, Soil Conservation Service, USDA, Engineering Division, Washington DC, 1986.

USDA-SCS: Engineering field manual, Chapter 2, Estimating runoff and peak discharges, Soil Conservation Service, USDA, Washington DC, 1989.

- Valdés, J. B., Fiallo, Y., and Rodríguez-Iturbe, I.: A rainfall-runoff analysis of the geomorphologic IUH, *Water Resour. Res.*, 15, 1421–1434, doi:10.1029/WR015i006p01421, 1979.
- Vihola, M.: Robust adaptive Metropolis algorithm with coerced acceptance rate, *Stat. Comput.*, 1–12, doi:10.1007/s11222-011-9269-5, 2011.
- 5 WAU: Hydrologic documentation of the Sluzew Creek at Pszczolkowska gauge station (in Polish), Internal Report (led by K. Banasik), Warsaw Agricultural University – SGGW, Dept. of Water Engineering and Environmental Restoration, Warsaw., 2002.
- Wagener, T. and Gupta, H. V.: Model identification for hydrological forecasting under uncertainty, *Stoch. Environ. Res. Ris. Assess.*, 19, 378–387, doi:10.1007/s00477-005-0006-5, 2005.
- 10 Walker, S. E., Banasik, K., Mitchell, J. K., Nothcott, W. J., Yuan, Y., and Jiang, N.: Applicability of the SCS curve number method to tile-drained watersheds., *Annals of Warsaw Agricultural University – Land Reclamation*, 30, 3–14, 2000.
- Winkler, R. L.: The assessment of prior distributions in Bayesian analysis, *J. Am. Stat. Ass.*, 15 62, 776–800, 1967.
- Yang, J., Reichert, P., Abbaspour, K. C., and Yang, H.: Hydrological modelling of the Chaohe Basin in China: Statistical model formulation and Bayesian inference, *J. Hydrol.*, 340, 167–182, doi:10.1016/j.jhydrol.2007.04.006, 2007.
- Yang, J., Reichert, P., Abbaspour, K., Xia, J., and Yang, H.: Comparing uncertainty analysis techniques for a SWAT application to the Chaohe Basin in China, *J. Hydrol.*, 358, 1–23, 20 doi:10.1016/j.jhydrol.2008.05.012, 2008.
- Zhang, E., Feissel, P., and Antoni, J.: A comprehensive Bayesian approach for model updating and quantification of modeling errors, *Probabilist. Eng. Mech.*, 26, 550–560, doi:10.1016/j.probingmech.2011.07.001, 2011.

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

Table 1. Methods used to derive IUH characteristics and Nash model parameters.

Method	t_p or k	u_p or Lag
SCS	$t_p = \frac{L^{0.8} \left(\frac{1000}{C_N} - 9 \right)^{0.7}}{2.92 J_z^{0.5}}$	$u_p = 0.75 \frac{1}{t_p}$
Lutz	$t_p = P_1 \cdot \left(\frac{L \cdot L_c}{J_g^{1.5}} \right) \cdot e^{-0.016U} \cdot e^{0.004W}$	$u_p = P_2 \frac{1}{t_p^{P_3}} \quad (i)$
Rao	$k = 0.56 \cdot A^{0.39} \cdot (1+U)^{-0.62} \cdot P_e^{-0.11} \cdot D_e^{0.22}$	$Lag = 1.28 \cdot A^{0.46} \cdot (1+U)^{-1.66} \cdot P_e^{-0.27} \cdot D_e^{0.37}$
GIUH	$t_p = 0.44 \left(\frac{R_A}{R_B} \right)^{0.55} \cdot R_L^{-0.38} \cdot \frac{L_\Omega}{v}$	$u_p = 1.31 \cdot R_L^{0.43} \cdot \frac{v}{L_\Omega} \quad (ii)$
GCIUH	$t_p = 0.33 \cdot \Pi^{0.67}, \Pi = \frac{L_\Omega^{2.5} \cdot n^{1.5} \cdot B_\Omega}{S_\Omega^{0.75} \cdot R_L^{0.6} \cdot A_\Omega \cdot i_r \cdot t_r}$	$u_p = 1.53 \frac{1}{\Pi^{0.67}}$

(i) $P_2 = 0.64, P_3 = 1.04$ (Lutz, 1984); (ii) $v = 0.665 \cdot \alpha_\Omega^{0.6} \cdot (i_r \cdot A)^{0.4}, \alpha_\Omega = \frac{s_\Omega^{0.5}}{n B_\Omega^{0.67}}$ in ($m^{-1} s^{-1/3}$) and $R_B/R_A = 0.8$ (Rodríguez-Iturbe et al., 1982; Hall et al., 2001); Notes: L – Length of the stream from the water gauge to the watershed ridge (km), J_z and J_g – Average slope of catchment (%) and average slope of the stream (-), $s_\Omega = J_g, L_c$ – Length of the stream to the central point, assumed to be equal to 0.5l, U and W – Ratio of urbanized and forest areas (%), P_1 – Parameter dependent on the roughness of the stream, P_2 and P_3 – Dependent on the interval of estimation, Lag – Lag time (h), A – Catchment area (km^2), U – Fraction of the impervious area in the catchment (-), P_e and D_e – Amount and duration of effective rainfall, respectively (mm) and (h), i_r and t_r – Effective rainfall intensity ($cm h^{-1}$) and its duration (h), $A_\Omega, B_\Omega, L_\Omega$ – Area, width and length of the highest order stream (km^2, m, km), R_A, R_B and R_L are the Horton area, bifurcation and length ratios of the catchment (Tarboton, 1996), v – Average peak flow velocity (ms^{-1}), n – The Manning roughness coefficient ($m^{-1/3} s^{-1}$).



Table 2. Delivered prior distributions of model parameters.

Parameter/name and meaning	distribution	expected value (E) and standard deviation (SD)
Parameters of the deterministic model		
A area of a catchment [km^2]	Normal	$E = 26.9$, $SD = 2.7$
S Max potential retention of a catchment [mm]	Lognormal	$E = 55$, $SD = 30$
N number of linear reservoirs, [-] ^(a)	Lognormal	$E = 3.21$, $SD = 0.97$
k retention time of a linear reservoir, [h] ^(a) <i>empirical method</i>	Lognormal	$E = 1.78$, $SD = 0.86$
SCS	–	$N = 4.67$, $k = 2.02$
Lutz	–	$N = 3.65$, $k = 0.57$
Rao	–	$N = 2.16$, $k = 1.7$
GIUH	–	$N = 2.82$, $k = 1.63$
GCIUH	–	$N = 2.76$, $k = 2.97$
Parameters of the error model (model structure and measurement uncertainty)		
σ asymptotic standard deviation of the errors [$\text{m}^3 \text{s}^{-1}$]	Gamma	$E = 2$, $SD = 2$
τ characteristic correlation time of the autoregressive process [min]	Gamma	$E = 300$, $SD = 200$
λ_1	–	$E = 0.5$
λ_2 Parameters of the Box-Cox transformation ^(b) , [-]	–	$E = 0$
Parameters of the input uncertainty		
σ^ζ standard deviation of the input uncertainty factor, [mm] ^(c)	Gamma	$E = 0.1$, $SD = 0.05$
ζ_j rainfall multipliers for each j from n rainfall events, [-] ^(d)	Lognormal	$E = 1$, $SD = E(\sigma^\zeta)$

^(a) Distributions of N and k were delivered from the empirical equations presented in the table; ^(b) For the parameters of the Box-Cox transformation (λ_1 , λ_2) no inference was made. We selected the values following (Reichert and Mieleitner, 2009) based on the analysis of the innovations; ^(c) n – number of selected rainfall-runoff events; ^(d) σ^ζ relates to the standard deviation of each rainfall multiplier, identical for all multipliers.

Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

⏪ ⏩

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

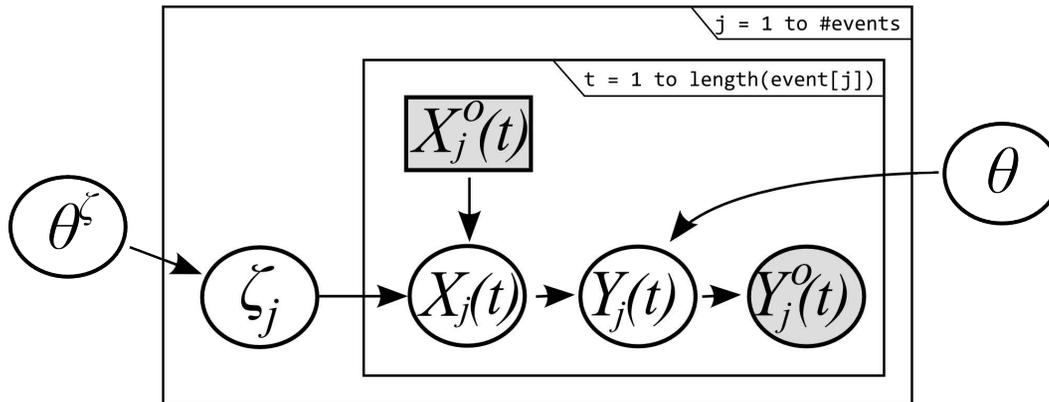


Fig. 1. Schematic representation of the rainfall multipliers and the rainfall-runoff model. $Y_j^O(t)$ and $X_j^O(t)$ are the observed runoff and rainfall, respectively. $Y_j(t)$ is the modelled runoff and $X_j(t)$ the inferred rainfall, j the indices for the rain event, θ the parameter of a model, θ_j parameters of the distribution of the rainfall ζ_j .

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

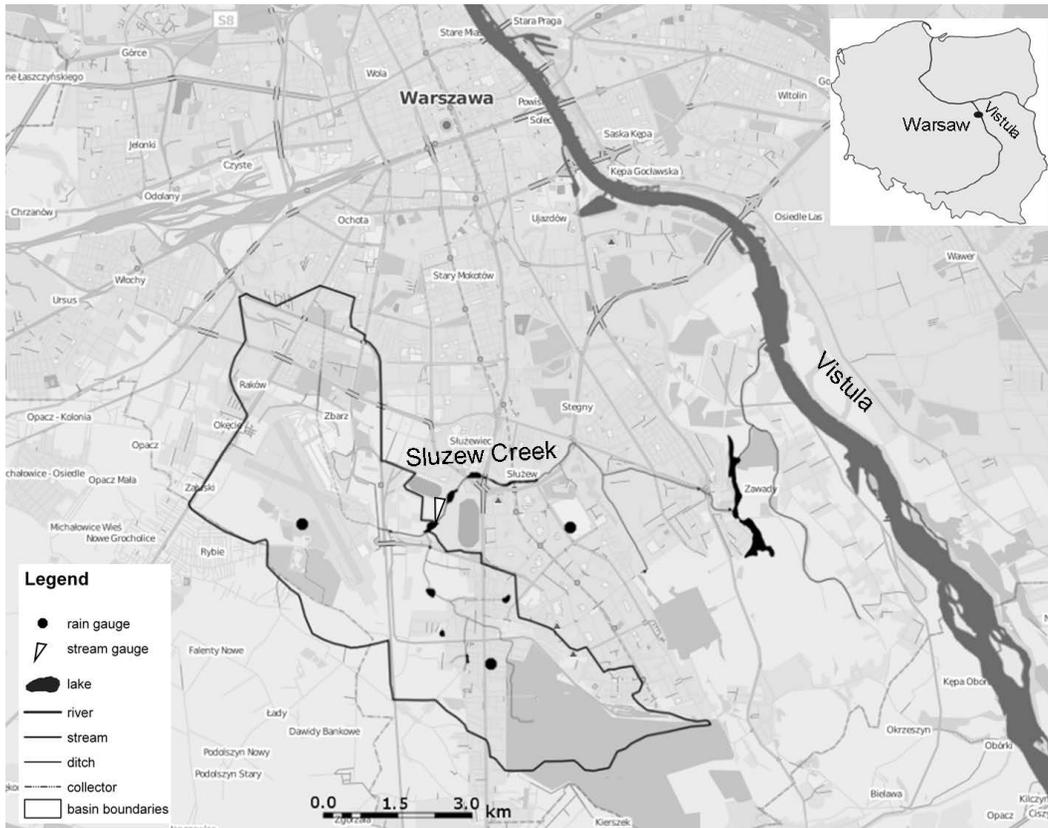


Fig. 2. Overview of a topology in the Sluzew Creek catchment, Warsaw, Poland.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close


Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Bayesian uncertainty
assessment of flood
predictions**

A. E. Sikorska et al.

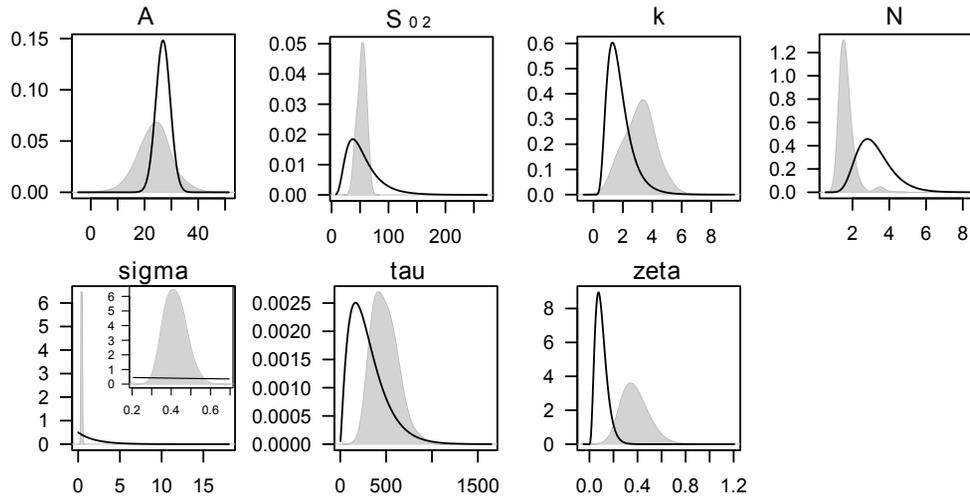**Fig. 3.** Prior (solid line) and posterior distribution (gray area) of model parameters.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bayesian uncertainty assessment of flood predictions

A. E. Sikorska et al.

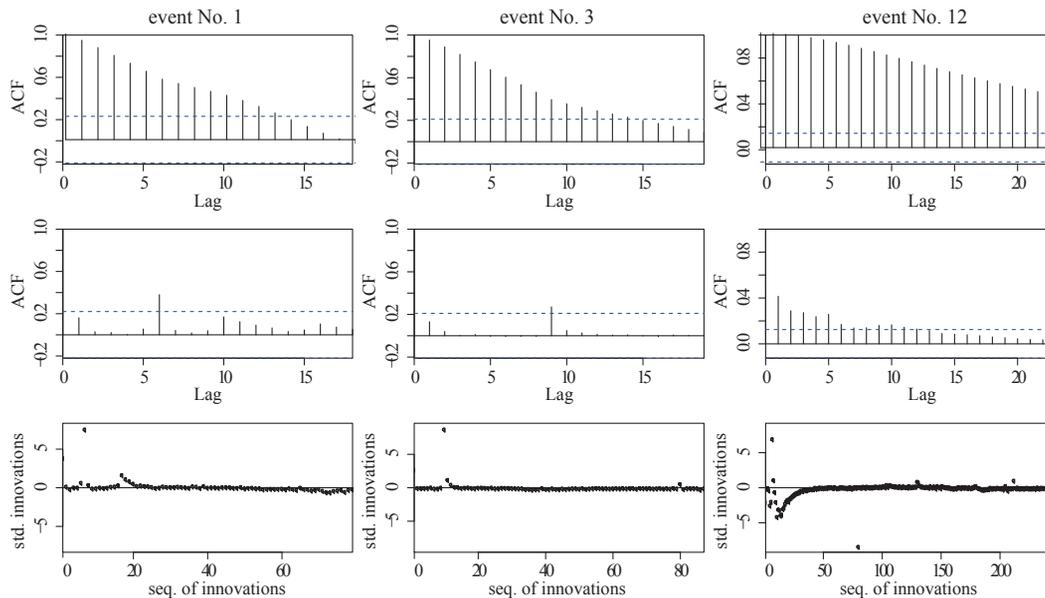


Fig. 4. Diagnostic plot of residuals and innovations. Autocorrelation function (ACF) of standardized residuals (top line), ACF of standardized innovations (middle) and sequences of innovations (bottom).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



