

This discussion paper is/has been under review for the journal Hydrology and Earth System Sciences (HESS). Please refer to the corresponding final paper in HESS if available.

Study of frequency pattern of coherent turbulent flow over ripples using image processing with implication in river restoration

A. Keshavarzi^{1,2}, J. Ball², and H. Nabavi¹

¹Water Department, Shiraz University, Shiraz, Iran

²School of Civil & Environmental Engineering, F. E. I. T., UTS, Broadway, NSW, 2007 Sydney, Australia

Received: 13 July 2011 – Accepted: 13 July 2011 – Published: 17 August 2011

Correspondence to: A. Keshavarzi (alireza.keshavarzi@uts.edu.au)

Published by Copernicus Publications on behalf of the European Geosciences Union.

HESSD

8, 7845–7871, 2011

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Abstract

River channel change and bed scourings are source of major environmental problem for fish and aquatic habitat. The bed form such as ripples and dunes is the result of an interaction between turbulent flow structure and sediment particles at the bed. The structure of turbulent flow over ripples is important to understand initiation of sediment entrainment and its transport. The focus of this study is the measurement and analysis of the dominant bursting events and the flow structure over ripples in the bed of a channel. Two types of ripples with sinusoidal and triangular forms were tested in this study. The velocities of flow over the ripples were measured in three dimensions using an Acoustic Doppler Velocimeter with a sampling rate of 50 Hz. These velocities were measured at different points within the flow depth from the bed and at different longitudinal positions along the flume. A CCD camera was used to capture 1500 sequential images from the bed and to monitor sediment movement at different positions along the bed. Application of image processing technique enabled us to compute the number of entrained and deposited particles over the ripples. From a quadrant decomposition of instantaneous velocity fluctuations close to the bed, it was found that bursting events downstream of the second ripple, in Quadrants 1 and 3, were dominant whereas upstream of the ripple, Quadrants 2 and 4 were dominant. More importantly consideration of these results indicates that the normalized occurrence probabilities of sweep events are in phase with the bed forms whereas those of ejection event are out of phase with the bed form. Therefore entrainment would be expected to occur upstream and deposition occurs downstream of the ripple. These expectations were confirmed by measurement of entrained and deposited sediment particles from the bed. These above information can be used in practical application for rivers where restoration is required.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

The entrainment and transport of sediment particles in rivers, natural stream and coastal area is a significant component of many environmental degradation problems. Many aquatic ecosystems and fish habitats in which needs to be restored have problems with channel bed changes and may led to the problems such as degradation, changes in channel forms and sedimentation. In such rivers ecosystems, restoring the original morphology and other physical characteristics is necessary for the rehabilitation of hydrodynamics of aquatic ecosystems. Studies for example by Murphy and Randle (2003) indicated that channel widening is possible only with a concerted restoration plan for flow and land management actions.

Ripples also may create more benefits to aquatic habitat resources due to their presence causing a pool habitat to be created and maintained. Fish communities in the rivers and streams are quite sensitive to the availability of stable pools and scour hole volume (Arlinghaus et al., 2002; Armstrong et al., 2003). The hydrodynamics of aquatic life or eco-hydraulics has become recently the interest of many new researches in last decade. This new area links the environmental fluid mechanics and ecology together to define flow-organism interactions at different scales. Nikora (2010) highlighted the hydrodynamics of aquatic ecosystems or ecohydraulics as an emerging tendency in modern science which create a new area that needs an integration of several different disciplines. Therefore, our understanding of the hydrodynamics of flow structure with links to river restoration needs to be considered.

In most natural streams, the bed is not flat due to high velocity of flow. The high flow velocity produces higher shear stress than shear stress at threshold of initiation of sediment motion and makes bed changes in various forms such as ripples, dunes and anti-dunes (Knighton, 1998). Ripples and dunes are the result of a combination of high scouring and deposition processes at the bed of rivers and streams and are major causes of channel change.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Study of frequency pattern of coherent turbulent flow over ripplesA. Keshavarzi et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The formation of bed topography is the result of complicated interactions between fluid and sediment particles along the bed. Bed forms and the geometry of ripples are a function of bed roughness, median diameter of sediment particles and flow characteristics such as shear stress, flow separation and Froude number (Mogridge et al., 1994). Ripple geometry and its interaction with flow structure has been studied by many investigators (for example, Bagnold, 1946; Carstens et al., 1969; Mogridge et al., 1994; Yalin, 1977; Khelifa and Ouellet, 2000; Miller and Komar, 1980; Nielsen, 1992). In these studies, the geometry of bed ripples was found to be a function of turbulent flow structure and shear stress parameters (Hurthet et al., 2007, 2011 and Thorn et al., 2009). Raudkivi (1997) pointed out that the ripples and vortices within the shear layer are affected by the flow depth, velocity distribution and shear stress on the bed. Despite more than three decades of investigation, there is still need more information to characterize ripple-flow interaction in adequate detail and over a range of turbulent flow conditions. One area where this lack of information exists is in application of image processing for particle entrainment and analysis of the turbulence characteristics and flow structure over ripples.

To study the flow structure over the ripples, Sajjadi et al. (1996) found that the vortices that form in the lee of ripples are important for the entrainment of sediment particles. Keshavarzi and Ball (1999) used image processing technique to record entrained and deposited particles over flat bed and found that there is an intermittent nature for particles entrainment and deposition over the bed. Venditti et al. (2005) used high resolution super-VHS video system to monitor the development of the sand bed over a flat bed and observed that defect initiation occurs at relatively low flow strengths, where sediment transport is patchy and sporadic. Lajeunesse et al. (2010) used high speed video imaging system to record the trajectories of the moving particles over flat bed and observed that entrained particles exhibit intermittent motion composed of the succession of periods of flight and rest. Bennett and Best (1995, 1996) conducted a series of experiment over fixed bed ripples and compared the spatial structure of flow over fixed ripples to reveal the contrasts in the dynamics of the flow separation zone over

ripples. Kostaschuck and Church (1993), Julien and Klassen (1995), Kostaschuck and Villard (1996), Carling et al. (2000) and Kostaschuck (2000) have conducted field studies and concluded that the shear related coherent structures were very important in bed form development and bed stability. Consideration of the results from these studies indicates that the turbulence characteristics have a direct influence on sediment entrainment and the ripple geometry.

Analysis of the turbulence characteristics is based on the concept of the bursting phenomenon which was initially introduced by Kline et al. (1967) as a means of describing the transfer of momentum between the turbulent and laminar regions near a boundary. Four alternative types of bursting events have been identified with each of these types having different effects on the mode and rate of sediment transport (Bridge and Bennett, 1992). Particle entrainment from the bed is closely correlated to the sweep and ejection events (Thorne et al., 1989; Nelson et al., 1995; Drake et al., 1988; Nakagwa and Nezu, 1978; Grass, 1971 and Keshavarzi and Ball, 1997, 1999). The contribution of sweep and ejection events has been found to be more important than outward and inward interactions. Furthermore, sweep and ejection events occur more frequently than outward and inward interactions (Nakagwa and Nezu, 1978; Thorne et al., 1989; Keshavarzi and Ball, 1997) with the average magnitude of the shear stress during a sweep event being much higher than the time averaged shear stress (Keshavarzi and Ball, 1997). A number of studies, for example, Offen and Kline (1975) and Papanicolaou et al. (2002) investigated the characteristics of the bursting process and its effect on particle motion. Consideration of this research led Yen (2002) to point out the necessity to incorporate the bursting process into the modelling of turbulent flow and sediment transport. Jafari Mianaei and Keshavarzi (2008, 2010) found that, at the stoss side of ripples, ejection and sweep events and at the lee side of the ripple outward interaction and inward interaction events were dominant. The studies by Ojha and Mazumder (2008) showed that the ratio of shear stress for sweep and ejection events along the dunes varied in an oscillatory pattern at the near bed region, whereas such patterns disappear towards the outer flow. Also they found that along the dune length,

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



sweep events contribute to shear stress generation. Termini and Sammartano (2009) investigated the effects of the variation of bed roughness conditions on the vertical distribution of frequency of the occurrence of ejection and sweep events and concluded that the occurrence of sweep events increases as the bed roughness increases.

5 However, in spite of the importance of coherent structures and its importance to entrainment of sediment particles over the ripples, their characteristics have not been completely understood. More importantly, the phase probabilities of the sweep and ejection events from the stoss side of the crest and at the lee side of the crest have not been investigated. In this paper, the phase probability of bursting events over ripples
10 and their occurrence probabilities are presented. An image processing technique was used to compute number of entrained and deposited sediment particle over the bed and the results are presented in this paper.

2 Material and methods

15 The experiments were carried out in a non-recirculating glass flume located in the hydraulics laboratory at Shiraz University. The 15.50 m long glass flume has a rectangular cross-section with base width of 0.70 m and height 0.6 m. The longitudinal slope of the flume was set at 0.0005. The flow rate was measured using a pre-calibrated 90° V-notch weir located at the end of the flume and an electromagnetic flow meter at inlet pipe. An adjustable gate was installed at the downstream end of the flume for the adjustment of flow depth and velocity. A schematic diagram of the experimental facility is shown in Fig. 1.

20 In the study reported herein, experimental measurements were carried out for two different types of ripples including sinusoidal and triangular shapes. The sinusoidal and triangular ripples were made with wavelengths 200, 250 and 300 mm and the height of
25 30 mm. An example photo of the ripples dimensions considered in this study is shown in Fig. 2. The flume bottom was covered with a layer of bed material, consisting of sand particles with median size (D_{50}) of 0.62 mm.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The experimental tests were performed with fixed bed and mobile bed conditions. For the fixed bed the condition was very close to the threshold of sediment entrainment and for the mobile bed, the condition was in low number of sediment motion. The experiments were started initially with a low flow rate that was increased gradually to achieve a condition very close to threshold of sediment motion.

The flow conditions of experimental tests performed are shown in Table 1. The flow velocity was measured in three dimensions using an Acoustic Doppler Velocimeter (Micro-ADV) at 128 points within the flow. Velocity measurements were made at eight points within the flow namely 5, 10, 15, 20, 25, 30, 50 and 60 mm from the bed at 16 different sections over sinusoidal ripples along the flume as shown in Fig. 3a. Figure 3b shows bed form configuration of triangular ripples and measured positions over the ripples for velocity measurement and image capturing in mobile bed condition. More information for specification of triangular ripples is presented by Jafari Mianaei and Keshavarzi (2008).

The ADV was operated on a pulse-to-pulse coherent Doppler shift to provide three velocity components at a rate of 50 Hz, in which was the maximum sampling frequency for instrument with no conditional frequency sampling. The acoustic sensor consisted of one transmitting transducer and three receiving transducers. The receiving transducers were mounted on short arms around the transmitting transducer at 120° azimuth intervals. The downwards pointing ADV beams travelling through the water focused at a measuring point located 50 mm below the transducer. Therefore, minimum disturbance to the flow is expected at sampling volume. The output signal passed through a processing module required to evaluate the Doppler shifts. The data acquisition software provided real-time display of the data in graphical and tabular forms. Velocities were measured for 120 s at each point, therefore a total 6000 velocity data were collected for each direction. Data acquisition started after achieving recommended Signal/Noise Ratio (SNR) and correlation coefficient in three dimensions. According to the ADV manufacturer SonTek (2001) no calibration was necessary while the accuracy of measurement was within $\pm 1.0\%$.

To minimize the effect of the lateral walls on the measured turbulence characteristics, flow velocities were measured only along the centerline of the flume. Ojha and Mazumder (2008) pointed out that it is essential to understand turbulence characteristics of flow in two dimensional, thus in this study only vertical and horizontal velocity components were analyzed.

3 Results and discussion

3.1 Quadrant decomposition of velocity fluctuations

The bursting process consists of four categories of event; these categories are defined by the quadrant of the event. As shown in Fig. 4, the events are:

- Outward interaction event $u' > 0, v' > 0$.
- Ejection event $u' < 0, v' > 0$.
- Inward interaction event $u' < 0, v' < 0$ and
- sweep event $u' > 0, v' < 0$.

The velocity fluctuations v' and u' are defined as variations from the time-averaged (mean) velocities in the longitudinal and vertical directions, (\bar{u} and \bar{v}), respectively. Algebraically, they are defined by

$$u' = u - \bar{u} \quad \text{and} \quad v' = v - \bar{v} \quad (1)$$

where;

$$\bar{u} = \frac{1}{n} \sum_{i=1}^n u_i \quad \text{and} \quad \bar{v} = \frac{1}{n} \sum_{i=1}^n v_i \quad (2)$$

n being is the number of instantaneous velocity samples.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The time-averaged instantaneous shear stress τ' (Reynolds shear stress) at each point of flow is defined as:

$$\tau' = -\rho \overline{u' v'} \quad (3)$$

where ρ is flow density. As shown in Fig. 5, the distribution of the instantaneous velocities is influenced significantly by presence of ripples.

3.2 Contribution probability of coherent flow and bursting events

Based on two dimensional velocity fluctuations, the occurrence probability of the bursting events for each quadrant is defined as;

$$P_k = \frac{n_k}{N} \quad (4)$$

$$N = \sum_{k=1}^4 n_k \quad (5)$$

where P_k is the occurrence probability of an event in a quadrant, n_k is the number of occurrences of each event, N is the total number of events and the subscript represents the individual quadrants ($k = 1 \dots 4$). Using the above equations, the probability of each quadrant was computed at each point of flow within the depth. The contributions of coherent structures, such as the sweep (quadrant 4) and ejection (quadrant 2) events, to momentum transfer have been extensively studied through quadrant analyses and probability analyses based on 2-D velocity information. Using similar techniques, the contributions of the four events to the entrainment and motion of sediment particles were determined from the experimental measurements. Shown in Figs. 6 and 7 are the quadrant analysis of the frequencies of bursting events along the flume for different depth from the bed.

From a quadrant analysis (Figs. 6 and 7) it was found that at a level of 5 mm from the bed downstream of the second ripple crest, quadrants 1 and 3 were dominant

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



when compared to quadrants 2 and 4. This can be interpreted as an expectation that sedimentation should occur at this location. However, upstream of the ripple crest, quadrants 2 and 4 were more dominant than quadrants 1 and 3. Therefore entrainment would be expected to occur at this location. These expectations are confirmed by measuring sediment particles at the bed over the ripples along the bed.

The studies by Jafari Mianaei and Keshavarzi (2008, 2010) indicate that at the stoss side of ripples, the time-averaged instantaneous shear stress of ejection and sweep events were dominant to the outward interaction and inward interaction events and at the lee side of the ripple it was vice versa. In other studies for example by Ojha and Mazumder (2008) it is shown that the ratio of time-averaged shear stress for sweep and ejection events along the dunes varies in an oscillatory pattern at the near bed region, whereas such pattern seems to disappear towards the outer flow. Termini and Sammartano (2009) concluded that the occurrence of sweep events increases as the bed roughness increases.

To find the relative dominance factor pattern of sweep and ejection events along the ripples the ratio of the occurrence probability of the sweep event is normalized by the occurrence probability of the ejection. Mathematically, this ratio is defined as;

$$RPSE = \frac{P_4}{P_2} \quad (6)$$

where P_4 is the occurrence probability of the sweep event, P_2 is the occurrence probability of the ejection events and RPSE is normalized occurrence probability.

Values of the normalised occurrence probability (RPSE) were determined at 5, 10, 15, 20, 25, 30, 50 and 60 mm from the bed surface at multiple locations along the flume. From these values of RPSE, a depth average value was determined. Shown in Fig. 8a and b are the average of RPSE and the bed profile along the flume. Consideration of these figures indicates that the normalized occurrence probabilities of sweep event are in phase with the bed forms whereas the normalised occurrence probabilities of ejection events are out of phase with the bed profile. Hence, it is concluded that the sweep and ejection events are in a synchronized cyclic pattern with the bed form.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
⏪	⏩
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper

3.3 Number of entrained and deposited particles over the ripples

In this study, to understand sediment entrainment at the bed and over the ripples, an image processing technique was used to compute number of deposited and entrained sediment particles at the different wavelength and different points over the ripples. Artificial ripples are used here to make the possibility of particle motion. A CCD camera is used to capture sequential images in 60 s and then the images are simultaneously recorded in the camera. Therefore, with a rate of 25 frames per second a total of 1500 images were recorded. Two samples of sequential recorded image are shown in Fig. 9.

To find the number of entrained and deposited particles a written computer program in C++ enabled us to subtract images and produce new images with the difference. The detail of image processing technique has been described by Keshavarzi and Ball (1999). An example of the difference between two images is shown in Fig. 9.

In the images difference, the black points in the picture present the particles which are entrained and white points in the picture present the particles which are deposited at the selected points. The ratio of the number of entrained sediment particles to the deposited sediment are defined as;

$$RNED = \frac{\text{Number of entrained sediment particles}}{\text{Number of deposited sediment particles}} \quad (7)$$

Table 2 shows the ratio of entrained/deposited number of particles over the ripples for experimental tests. Figure 10 shows the variation of RNED over the ripples along the flume. The results indicated that the ratio of entrained/deposited sediment particles (RNED) is very much correlated with the ratio of the probability of sweep/ejection events (RPSE) over the ripples.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4 Conclusions

In this study, the flow structure over the ripples was investigated experimentally. Consideration of these results showed that upstream of the first ripple crest, bursting events in quadrants 2 and 4 are dominant, however, downstream of the ripple crest, the bursting events in quadrants 1 and 3 are dominant and that sediment deposition occurred downstream of the ripple crest. Additionally, it was found that the average normalized occurrence probabilities of sweep event are in phase with the bed form whereas the normalized occurrence probabilities of ejection event are out of phase with the bed form. Additionally, it is concluded that the sweep and ejection events contributions are in a synchronized cyclic spatial pattern with the bed form along the bed in stream-wise flow direction. The above findings were in agreement with the number of entrained and deposited sediment particles from the bed. These findings can be useful in practical application for rivers where restoration is needed. To extend the results, further study remains to be investigated with large scale model under different hydraulic conditions.

References

- Arlinghaus, R., Engelhardt, C., Sukhodolov, A., and Wolter, C.: Fish recruitment in a canal with intensive navigation: Implications for ecosystem management, *J. Fish Biol.*, 61, 1386–1402, 2002.
- Armstrong, J. D., Kemp, P. S., Kennedy, G. J. A., Ladle, M., and Milner, N. J.: Habitat requirements of Atlantic salmon and brown trout in rivers and streams, *Fish. Res.*, 62(4), 143–170, 2003.
- Bagnold, R. A.: Motion of waves in shallow water: interaction between waves and sand bottoms, *P. Roy. Soc. Lond. A*, 187, 1–18, 1946.
- Bennett, S. and Best, J.: Mean flow and turbulence structure over fixed, two-dimensional dunes; implications for sediment transport and bed form stability, *Sedimentology*, 42(1), 491–513, 1995.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Bennett, S. and Best, J.: Mean flow and turbulence structure over fixed ripples and the ripple-dune transition, in: Coherent flow in open channels, edited by: Ashworth, P., Bennett, S., Best, J., and McLelland, S., Wiley, Chichester, UK, 281-304, 1996.

Box, G. E. P. and Cox, D. R.: An Analysis of Transformation, *J. Roy. Stat. Soc. B*, 26, 211–252, 1964.

Bridge, J. S. and Bennett, S. J.: A model for entrainment and transport of sediment grains of mixed sizes, shapes and densities, *Water Resour. Res.*, 28(2), 337–363, 1992.

Carling, P., Golz, E., Orr, H. G., and Radecki-Pawlik, A.: The morphodynamics of fluvial sand dunes in the Ripple-dune transition 647 Rhine River, near Mainz, Germany, II. Hydrodynamics and sediment transport, *Sedimentology*, 47, 253–278, 2000.

Carstens, M. R., Neilson, F. M., and Altinbilek, H. D.: Bed forms generated in the laboratory under an oscillatory flow: analytical and experimental study, US Army Corps of Engineers, Coastal Engineering Research Center, Tech. Memo 28, p.105, 1969.

Drake, T. G., Shreve, R. L., Dietrich, W. E., Whiting, P. J., and Leopold, L. B.: Bed load transport of fine gravel observed by motion-picture photography, *J. Fluid Mech.*, 192, 193–217, 1988.

Grass, A. J.: Structural features of turbulent flow over smooth and rough boundaries, *J. Fluid Mech.*, 50(2), 233–255, 1971.

Hurther, D., Lemmin, U., and Terray, E. A.: Turbulent transport in the outer region of rough wall open-channel flows: the contribution of Large Coherent Shear Stress Structures (LC3S), *J. Fluid Mech.*, 574, 465–493, 2007.

Hurther, D., Thorne, P. D., Bricault, M., Lemmin, U., and Barnoud, J. M.: A multi-frequency Acoustic Concentration and Velocity Profiler (ACVP) for boundary layer measurements of fine-scale flow and sediment transport processes, *Coast. Eng.*, 58, 594–605, 2011.

Jafari Mianaei, S. and Keshavarzi, A.: Spatio-temporal variation of transition probability of bursting events over the ripples at the bed of open channel, *J. Stoch. Env. Res. Risk Assess.*, 22, 257–264, 2008.

Jafari Mianaei, S. and Keshavarzi, A.: Study of near bed stochastic turbulence and sediment entrainment over the ripples at the bed of open channel using image processing technique, *J. Stoch. Env. Res. Risk Assess.*, 24, 591-598, 2010.

Julien, P. and Klassen, G.: Sand-dune geometry of large rivers during floods, *J. Hydraul. Eng.-ASCE*, 121, 657–663, 1995.

Keshavarzi, A. R. and Ball, J. E.: An analysis of the characteristics of rough bed turbulent shear stress in an open channel flow, *J. Stoch. Hydrol. Hydraul.*, 11(1), 193–210, 1997.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Keshavarzi, A. R. and Ball, J. E.: An application of image processing in the study of sediment motion, *J Hydraul. Res.*, 37(2), 559–576, 1999.
- Khelifa, A. and Ouellet, Y.: Prediction of sand ripple geometry under waves and currents, *J. Waterw. Port C-ASCE*, 126(1), 14–22, 2000.
- 5 Kline, S. J., Reynolds, W. C., Schraub, F. A., and Runstadler, P. W.: The structure of turbulent boundary layers, *J. Fluid Mech.*, 30(2), 741–773, 1967.
- Knighton, D.: *Fluvial Forms and Processes*, Arnold, London, England, 1998.
- Kostaschuck, R.: A field study of turbulence and sediment dynamics over subaqueous dunes with flow separation, *Sedimentology*, 47, 519–531, 2000.
- 10 Kostaschuck, R. and Church, M.: Macroturbulence generated by dunes, *Sediment Geol.*, 85, 25–37, 1993.
- Kostaschuck, R. and Villard, P.: Flow and sediment transport over large subaqueous dunes, Fraser River, Canada, *Sedimentology*, 43, 849–863, 1996.
- Lajeunesse, E., Malverti, L., and Charru, F.: Bed load transport in turbulent flow at the grain scale: Experiments and modeling, *J. Geophys. Res.*, 115, F04001, doi:10.1029/2009JF001628, 2010.
- 15 Miller, M. C. and Komar, P. D.: Oscillation sand ripples generated by laboratory apparatus, *J. Sediment. Petrol.*, 50(1), 173–182, 1980.
- Mogridge, G. R., Davies, M. H., and Willis, D. H.: Geometry prediction for wave generated bedforms, *Coast. Eng.*, 22, 255–286, 1994.
- 20 Murphy, P. J. and Randle, T. J.: *Platte River Sediment Transport and Riparian Vegetation Model*, Technical Report, US Department of the Interior, Bureau of Reclamation, Denver, Co, 2003.
- Nakagwa, H. and Nezu, I.: Bursting phenomenon near the wall in open channel flow and its simple mathematical model, *Fac Eng Kyoto University, Japan XL* 40(2), 213–240, 1978.
- 25 Nelson, J. M., Shreve, R. L., McLean, S. R., and Drake, T. G.: Role of near bed turbulence structure in bed load transport and bed form mechanics, *Water Resour. Res.*, 31(8), 2071–2086, 1995.
- Nezu, I. and Nakagawa, H.: *Turbulence in open channel flows*, IAHR Monograph, Balkema, Rotterdam, 1993.
- 30 Nielsen, P.: *Coastal bottom boundary layers and sediment transport*, World Scientific, 324 pp., 1992.
- Nikora, V.: Hydrodynamics of aquatic systems: An interface between ecology, biomechanics and environmental fluid mechanics, *River Res. Appl.*, 26(4), 367–384, 2010.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Ojha, S. P. and Mazumder, B. S.: Turbulence characteristics of flow region over a series of 2-D dune shaped structures, *Adv. Water Res.*, 31, 561–576, 2008.
- Offen, G. R. and Kline, S. J.: A proposed model of the bursting process in turbulent boundary layers, *J. Fluid Mech.*, 70, 209–228, 1975.
- 5 Papanicolaou, A. N., Diplas, P., Evaggelopoulos, N., and Fotopoulos, S.: Stochastic incipient motion criterion for spheres under various packing conditions, *J. Hydraul. Eng.-ASCE*, 128(2), 369–380, 2002.
- Raudkivi, A.: Ripples of stream bed, *J. Hydraul. Eng.-ASCE*, 123(1), 58–64, 1997.
- Sajjadi, S. G., Aldridge, J. N., and Nicholas, D. J.: Sediment transport mechanism over rippled sand beds, in: *Estuarine and coastal modelling*, edited by: Spaulding, M. L. and Cheng, R. T., ASCE, New York, 669–680, 1996.
- 10 Termini, D. and Sammartano, V.: *Sediment flow interactions and effects on bed forms mechanism*, 7th ISE & 8th HIC, Chile, 2009.
- Thorne, P. D., Williams, J. J., and Heathershaw, A. D.: In situ acoustic measurements of marine gravel threshold and transport, *Sedimentology*, 36, 61–74, 1989.
- Thorne, P. D., Davies, J. S., and Bell, P. S.: Observations and analysis of sediment diffusivity profiles over sandy rippled beds under waves, *J. Geophys. Res.*, 114, C02023, doi:10.1029/2008JC004944, 2009.
- Venditti, J. G., Church, M. A., and Bennett, S. J.: Bed form initiation from a flat sand bed, *J. Geophys. Res.*, 110, F01009, doi:10.1029/2004JF000149, 2005.
- 20 Yalin, M. S.: On the determination of ripple length, *Proc. Am. Soc. Civil Eng.*, 103, 439–442, 1977.
- Yen, B. C.: Stochastic inference to sediment and fluvial hydraulics, *J. Hydraul. Eng.-ASCE*, 128(2), 365–367, 2002.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Table 1. Experimental flow conditions.

Test No.	Flow Rate (ls^{-1})	Flow Depth (mm)	No. of ripples	Ripples wave length (mm)	Ripples height (mm)	Velocity measurement height (mm)	Froude Number	Reynolds Number	Kolmogorov microscales (mm)
1	14.60	170	2	250	30	5	0.095	20 871	0.09
2	18.48	145	2	250	30	5, 10, 15, 20, 25, 30, 50, 60	0.153	26 400	0.07
3	18.50	146	2	250	30	5, 10, 15, 20, 25, 30, 50, 60	0.151	26 428	0.07

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Table 2. Ratio of entrained sediment particles to the deposited particles (RNED) for triangular ripples.

Section Tets	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
1	1.06	1.03	1.04	1.06	1.08	1.08	1.02	0.99	0.96	1.04	1.06	1.06	1.05	1.08	1.03	1.10	1.04
2	0.93	1.04	1.03	1.02	1.08	1.09	0.95	0.93	0.90	1.10	1.08	1.16	1.06	1.08	1.06	1.22	1.02
3	1.06	0.95	1.06	1.04	1.09	1.07	1.04	0.96	0.99	1.02	1.05	0.99	1.04	1.01	0.99	0.94	1.02

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

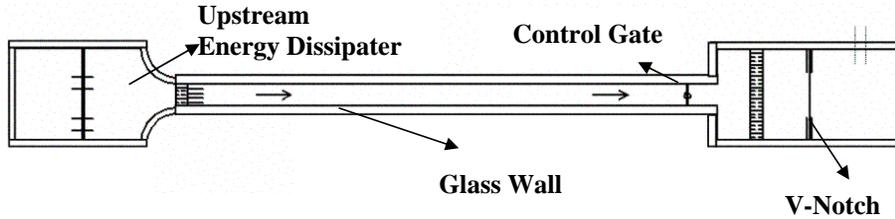


Fig. 1. A schematic plan of experimental setup.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

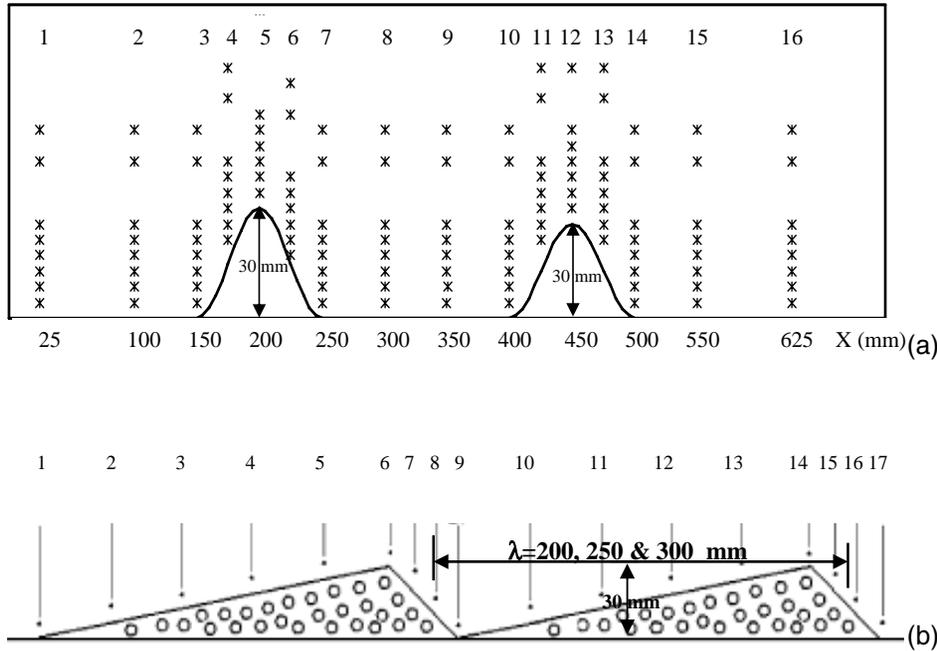


Fig. 3. Sections and points of velocity measurement (a) the sinusoidal ripple; (b) the triangular ripple.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

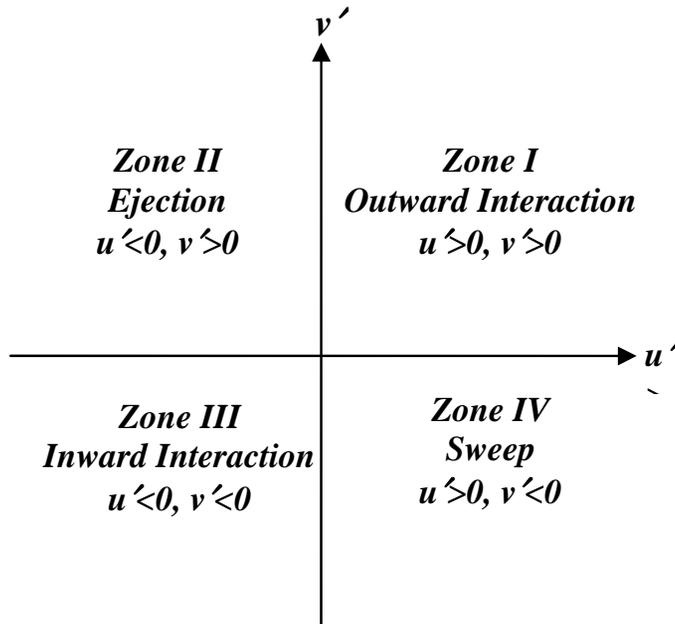


Fig. 4. Four classes of bursting events and their associated quadrants.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

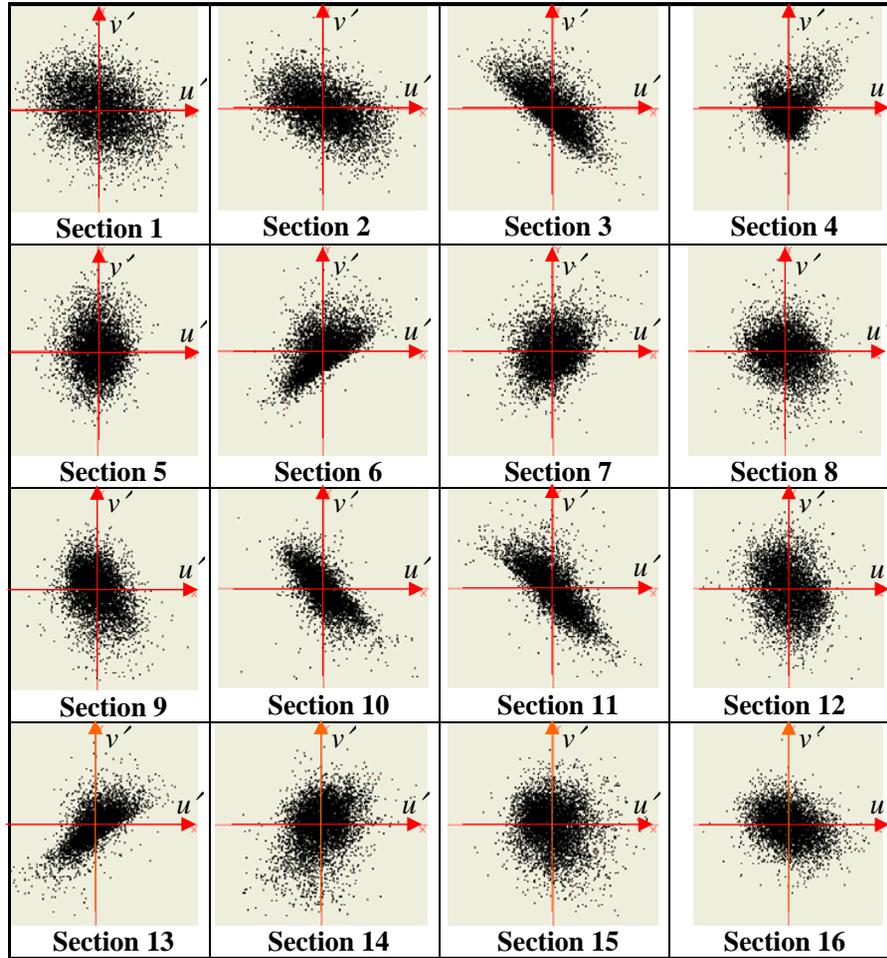


Fig. 5. Distribution of instantaneous velocity fluctuations at 20 mm from the bed for 16 sections along the flume.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

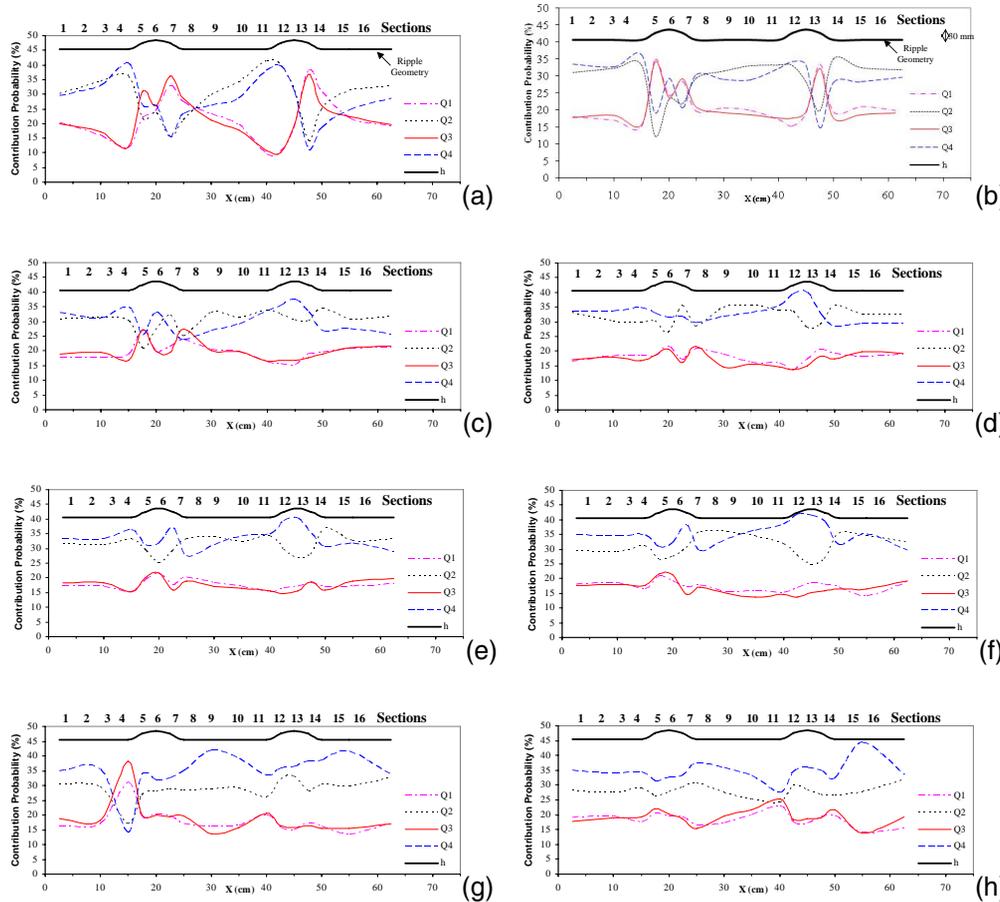


Fig. 6. Cyclic phase pattern for different classes of bursting events over the ripples along the flume at: **(a)** 5 mm from the bed; **(b)** 10 mm from the bed; **(c)** 15 mm from the bed; **(d)** 20 mm from the bed; **(e)** 25 mm from the bed; **(f)** 30 mm from the bed; **(g)** 50 mm from the bed; **(h)** 60 mm from the bed.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

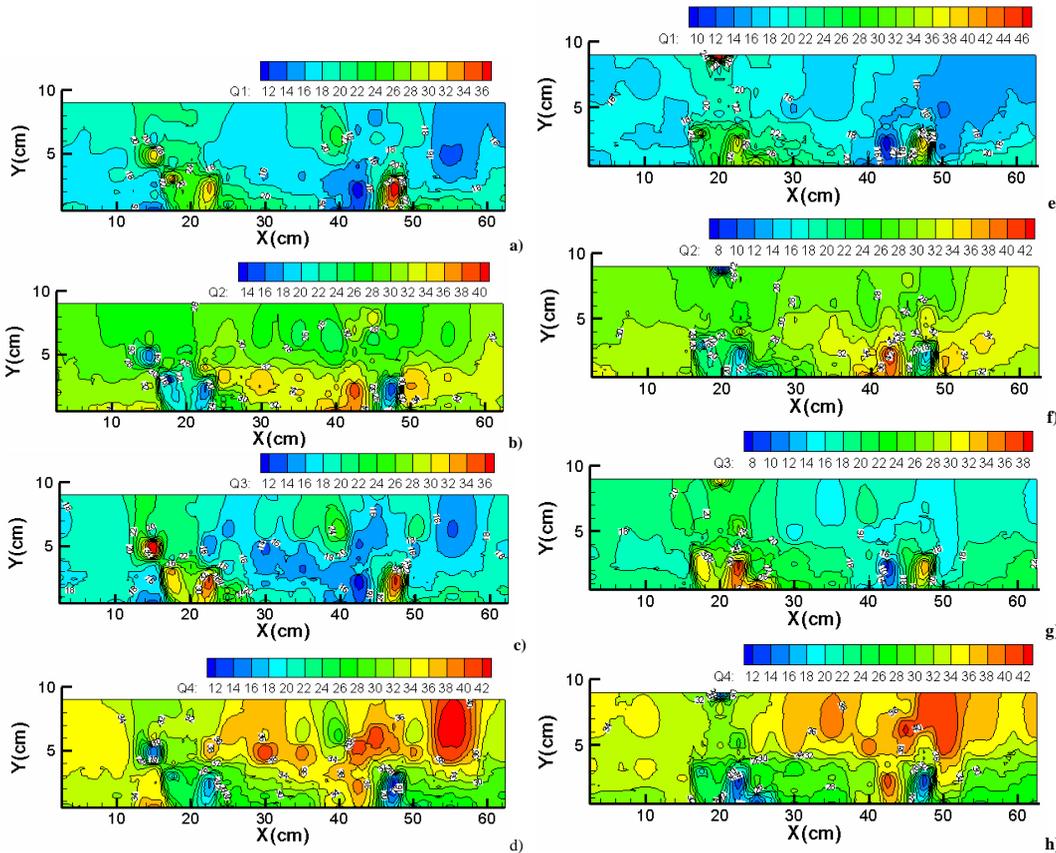


Fig. 7. Distribution of probability of four quadrants; **(a)** zone 1, **(b)** zone 2, **(c)** zone 3 and **(d)** zone 4 (Test 2); **(e)** zone 1, **(f)** zone 2, **(g)** zone 3 and **(h)** zone 4 (Test 3).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

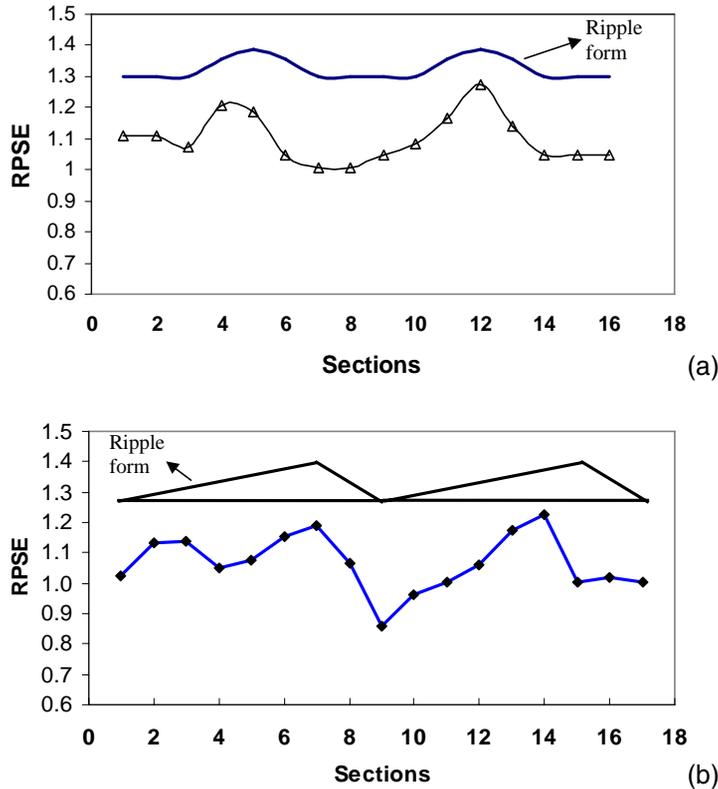


Fig. 8. The ratio of phase probability of sweep to ejection events (RPSE) over ripples **(a)** the sinusoidal ripple form; **(b)** the triangular ripple form.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



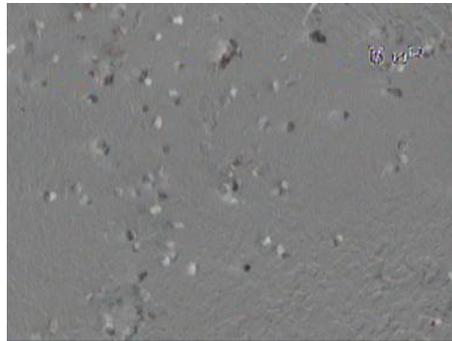
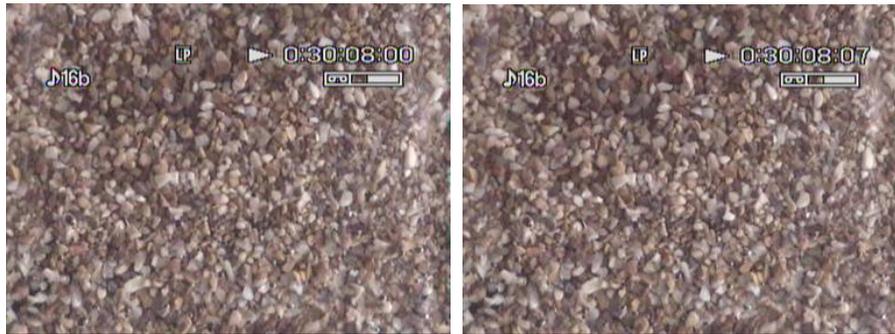


Fig. 9. Two samples of sequential captured images with the difference image between two sequential images.

Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Study of frequency pattern of coherent turbulent flow over ripples

A. Keshavarzi et al.

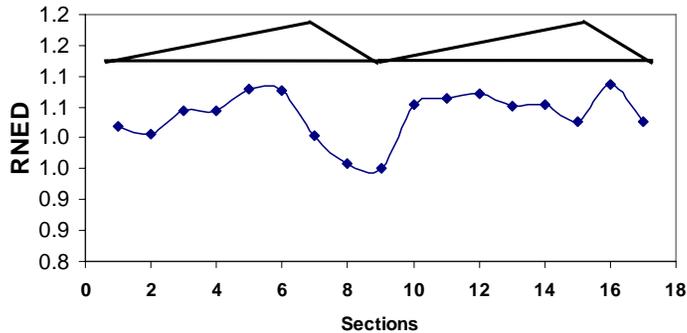


Fig. 10. Ratio of entrained particles to deposited particles (RNED) over ripples.

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures

⏪	⏩
◀	▶
Back	Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion