

1 Suggestions for revision or reasons for rejection (will be published if the paper is accepted for
2 final publication)

3 Review of the revised manuscript by Markstrom et al.

4 Guse's comments in black.

5 **Markstrom's response in red.**

6 I thank the authors for the careful revision of the manuscript and the consideration of my
7 remarks. I think that the manuscript is now valid for publication after considering the minor
8 remarks below.\

9 **Thank you for your thoughtful and through review.**

10 I encourage the authors to improve the readability of a couple of parts as suggested below
11 including the abstract.

12

13 1. Page 2, Line 4-5: Unclear statement: „model output associated with dominate hydrological
14 process(es)“

15 **Yes, revised to “particular model output variables that could be associated with dominate
16 hydrologic process (es).”**

17 2. Page 2, Line 6-7: I did not understand the meaning of „on the basis of geographic location“ in
18 this context.

19 **Yes. I was trying to convey that this analysis was done on the HRUs without the detail of
20 defining/describing the HRUs in the abstract. I have revised the text to. “location on 110,000
21 independent hydrologically-based spatial modeling units covering the CONUS (HRUs)”**

22 3. Page 2, Line 9-10: What do mean with „provide insights into model performance by
23 location“?

24 **Yes, revised to “provide insight into model performance at the location of each HRU”**

25 4. Page 2, Line 27: Please check whether it should be written as „difficulty in the
26 understanding...”

27 **Yes, accepted.**

28 5. Page 3, Line 29: The aspect that evaporation is not sensitive when the soil water storage is
29 depleted is more a temporal aspect than a spatial, is it?

30 **Yes, of course you are correct that the timing of water availability is what limits the ET. The
31 point I was trying to make here is that ET becomes less sensitive to this timing if there is less
32 capacity available. I have revised the text to “while parameters related to evaporation can**

1 become less sensitive at locations where soil depth and the overall capacity for soil water
2 storage decreases.” I hope this change reflects this idea better.

3 6. Page 7, Line 22: The FAST analysis is also a method. Thus, it is maybe more a chapter 2.5?

4 Yes, accepted. One of the coauthors thought that this section was enough of a standalone
5 description to warrant its own top level section; however, both reviewers made this
6 comments, so I moved it to “Methods” subsection.

7

8 7. Page 8, Line 25: Please add that the number of model results is provided by FAST and not
9 selected subjectively.

10 Yes, I rewrote the section:

11 2. Run the first part of the FAST procedure (as described above) to develop over 9000
12 unique parameter sets, comprised of value combinations for the calibration parameters. The
13 total number and content of these parameter sets, and the results from their simulation by
14 PRMS are completely determined by the first part of the FAST procedure in order to
15 investigate the trial space. Each of the prescribed simulations are independent of each other so
16 they can run in parallel on a computer cluster.

17 8. Page 9. Line 9-12: This means that you have summed up the first-order sensitivities for all
18 parameters which are related to certain process? How did you realize this in the case that
19 one parameter influence two processes, e.g. soil moisture and infiltration?

20 Yes. In this figure, I don’t care if a certain parameter influences two processes or not. The
21 question I’m trying to get at here is are there any parameters (I don’t necessarily care which
22 ones they are) that can be used to affect each category (combination of performance measure
23 applied to output variable) of model output.

24 I revised the text to indicate that the sensitivities are summed for each process separately:

25 “In these maps, the HRUs are colored according to the parameter sensitivity, which is
26 computed by summing the first-order sensitivity for all 35 parameters separately for each of
27 the 8 output variables, each corresponding to their respective process. These sums do not
28 necessarily sum to one...”

29 9. Page 10, Line 20: A clear definition of cumulative parameter sensitivity is missing. The
30 meaning of this term is still not fully clear.

31 Yes. Up in the first paragraph of section 3.1 I added the sentence: “This summed sensitivity
32 across the parameters, by each category is hereafter referred to as *cumulative parameter*
33 *sensitivity*.”

1 10. Page 10, Line 26: Why did you write „on average“

2 Yes, removed.

3 11. Page 10, Line 28: I do not think that it is useful to write that on average two parameters are
4 required to represent snowmelt in the PRMS model. The map (Fig 3m) clearly shows the
5 spatial heterogeneity and it becomes apparent that in the northern parts where snow is
6 really relevant five to nine parameters are required. This spatial heterogeneity in the
7 parameter count should be discussed as well for snowmelt (maybe included in the part on
8 Page 11, Line 20-27).

9 Yes, I think your issue is with the word “average”. I have removed that word, as the number
10 of parameters does vary from 2 to 9.

11 12. Page 11, Line 5-11: This part is rather difficult to read. Could you maybe give more general
12 statements instead of repeating the range of parameter counts for each process?

13 Yes, cut the repetitive parts. Not so tedious anymore.

14 13. Page 11, Line 14-16: It is somehow surprising that this part is not in the scope of the article.
15 The statement „possibly indicate that some processes are overparametrized" is rather weak
16 (and certainly not a results, but more a discussion part). However, I am surprised about this
17 statement since the problem of overparameterization is highlighted in the introduction and it
18 is remarked that progress in this topic is required (Page 4, Line 13-16). How does this match?
19 Are you considering overparametrization or not? Concerning this, I would expect a clear
20 statement.

21 Yes. I agree this section is not a result and I moved this down to the last paragraph in the
22 “Further study” section. An in depth analysis of overparameterization in the model structure
23 of PRMS is beyond the scope of this paper. This is really speculation as to why the
24 parameters counts vary so much between the processes in this CONUS application.

25 14. Page 11, Line 28-31: For me, it is not clear how to extract from Fig. 3 the information that the
26 parameter estimation is decomposed into separate problems. Here, an additional sentence
27 would be helpful how to do this.

28 I added the sentence: “By considering a single (or reduced set of) process and performance
29 measure categories at a time, the sensitive parameter space can be substantially reduced.” I
30 hope this is enough.

31 15. Page 12, Line 1-3: If not shown this statement is not helpful. At least, a figure/results in the
32 supplementary would be required. Otherwise this part should be removed.

33 Yes, I joined two sentences together to make it clearer that the results from the analysis (that
34 was not shown) is part of the procedure used to generate table 2.

35 16. Page 12, Line 11-19: Here, I recommend a short discussion of the relevance of this statement
36 for hydrological modeling in general. I clearly becomes apparent that the impact and
37 relevance of a performance measure even varies when considering separate processes. Thus,
38 there is not only a relationship between processes and appropriate performance measures

1 but also to the way how this process is addressed. I really makes a differences whether the
2 timing or the total volume is considered. I think that this point should be emphasized even
3 more, since it is a nice result and should be considered in future in calibration studies. Maybe
4 you can emphasize this point even more in the discussion chapter 5.2.

5 Yes. Added a reiteration of this discussion to the “Choice of performance measure section” in
6 the discussion section.

7 17. Fig 4: Does last place occurrence mean that this parameter is the last parameter among the
8 sensitive parameters (as presented in Tab. 2) or even the least sensitive parameter at all?
9 Maybe you can explain the meaning of last place occurrence.

10 Yes, I think some of the sentences were out of order in the figure caption. I have rewritten the
11 caption. I hope this makes more sense.

12 18. Page 13, Line 17-18: I really like this concluding sentence. Maybe you can highlight it even
13 more. At least, a new paragraph could be started after this sentence. I agree with the
14 discussion later on Page 15, Lines 1-14.

15 Yes, I split the paragraph here. That does help to highlight this idea. This is strongly related to
16 the step-by-step calibration strategy that we use to calibrate models. I.E. try to calibrate a
17 particular parameter with information related to the first process in which it appears in the
18 vertical routing order.

19

20

21

22

23

24

25

26

27

1 Hoellering's comments in black.
2 Markstrom's response is in red.

3

4 General comments:

5

6 The authors have submitted a revised version of 'Towards simplification of hydrologic modeling:
7 identification of dominant processes'. In the manuscript a methodology of identification of influential
8 parameters and related dominant hydrological processes of the HRU based Precipitation-Runoff
9 Modeling System (PRMS) is presented. Parameter influence on model output was evaluated by
10 parameter sensitivity index values originating from global sensitivity analysis with the Fourier Amplitude

11 Sensitivity Test (FAST). The approach aims at reducing the number of calibration parameters helping
12 modelers to focus on relevant processes within the watersheds of the conterminous United States.

13

14 The incorporation of necessary improvements in terms of the overall purpose, fundamental
15 assumptions or the presentation quality of the study has been partly accomplished in a reasonable
16 way. Nevertheless, in several parts, the manuscript still shows shortcomings. My concerns mainly
17 relate to the structure and presentation of the concept, including the line of argumentation evolving
18 around the general hypothesis of the study through the different sections. I recommend to revise again
19 a number of specific and technical points to reach publication quality.

20

21 Thank you for your thoughtful and thorough comments.

22

23 Specific comments

24

25 Introduction

26

27 I am not sure if the introduction is structured appropriately along the main purpose of the study
28 defined as identification of 'sensitive parameters' and 'dominant processes'. I think it partly omits to set
29 the right focus on these two aims which is important to understand the benefit of the methodology.

30

31 I like the beginning with the two complexities (input parameters and model output/processes) which
32 nicely sets the focus on the main purpose and should structure the whole chapter, not to say the
33 whole manuscript. Unfortunately, then the focus gets a bit lost and parts of this paragraph seem to be
34 more a general description of methods (global sensitivity analysis, classification) and own findings
35 which doesn't not keep this focus on the two complexities. Specifically, it is not sufficiently linked,

36 first to previous studies, second to the presented study and results:

37

- 38 1. P3L1: Can you please be a bit more precise here in reference to the literature: What are
39 reasons that parameters cannot be directly measured or transferred to larger scales even if
40 measurements are partly available but at smaller scales (hillslope, plot or lab scale)?

41

42 Yes, added a bit of text and two references: Duan et al. (2005) describes "a gap in our
43 understanding of the links between model parameters and the land surface characteristics."
44 These unmeasured parameters, ostensibly tangible, are really empirical coefficients when it
45 comes to application and calibration (Samaniego et al., 2010).

46

- 1 2. P3L16: Are there any other studies where these two complexities (or one of them) were
2 addressed or reduced?
3

4 Yes, added references to Jakeman and Hornberger, 1993; Hay et al., 2006

- 5
6 3. P3L18: Here a few references (e.g. Sanadhya et al., 2013) to studies where global sensitivity
7 analysis was used to identify parameters or processes might be worth to include.
8

9 Yes, added this reference.

- 10
11 4. P3L26-L31: References to these statements are missing - please add. Otherwise it can be
12 regarded as one of your findings and could be moved to the results or discussion sections. It
13 seems to be an anticipation of your results or general interpretation of them.
14

15 Yes, added reference to “van Werkhoven, K., Wagener, T., Reed, P., and Tang, Y.:
16 Characterization of watershed model behavior across a hydroclimatic gradient, Water Resour.
17 Res., 44, W01429, doi:10.1029/2007WR006271, 2008.”

18 Another reviewer asked me to clarify the first sentences of this paragraph, so I added the
19 example. Certainly this does anticipate the results. With the addition of the van Wekhoven
20 reference I think it’s OK to leave this in. My feeling is that it is not particularly novel to state
21 that different watersheds across the landscape will have different parameter sensitivity.

- 22
23 5. P4L6: Could you be more specific here. How was the identification of dominant hydrological
24 processes performed in some of these studies. I recommend to focus in more details on
25 literature that has dealt with the identification of dominant parameters, hence processes. This
26 is actually the purpose of your study and needs to include former efforts to cope with this
27 complex problem. This should be presented to the reader in a form that clarifies the need for
28 ongoing research on this topic, see e.g. Cuntz et al., 2015. Furthermore there might be studies
29 where dominant processes are identified in different ways than with a purely model based
30 approach.
31

32 Yes, added “Cuntz et al. (2015) describe a method of identifying only informative parameters as a
33 screening step in order to reduce the effort required to perform global sensitivity analysis on the full
34 parameter space.” to this paragraph.
35

36 Also added: “Various methods have been developed that will group similar catchments for purposes
37 of study (Wolock et al., 2004; Winter, 2001; Ali et al., 2012) or for parameter regionalization (He et al.,
38 2011; Merz and Blöschl, 2004, Seibert, 1999; Vogel 2005). “
39

- 40
41 6. P4L23: What kind of input do you mean (parameters or meteo forcing etc.), output in which
42 form? Can you please describe the input and output with a few words to be more clear here.
43

44 Yes, revised the last sentence of the introduction to: “Specifically, we propose to identify the sensitive
45 parameters and dominant hydrologic process(es), thereby reducing the amount of parameter input

1 and output variables to consider (Chaney et al., 2015) and address the two aspects of complexity as
2 outlined above.”
3

4 Methods

- 5
6 7. P4L30: Here it might be worth to mention the modular structure of PRMS first. This was first
7 done in the following section 2.2. but is a property of PRMS.
8

9 Yes, changed the sentence to “Each hydrologic process simulated by the model PRMS is encoded in
10 a modular piece of source code (i.e. a “module”) and is represented within PRMS by an algorithm that
11 is based on a physical law...”

- 12
13 8. P5L15: Are there studies where parameter interactions have been analysed. This might be
14 additionally helpful to explain interactions of parameters.
15

16 Yes, I added several references. Some talk about issues related to parameters used in computations
17 before other computations, others are more related to “parameter interaction”.

- 18
19 9. P5L28: I suggest to delete the word ‘stream segments’ here to avoid confusion and focus on
20 HRUs as fundamental spatial discretization units of PRMS. Stream segments were used to
21 derive HRUs in the case of your study but are not further used for simulation and analysis.
22

23 Yes, deleted the words stream segment.

- 24
25 10. P7L6: Please consider to rename the expression ‘Performance measures’. In my view,
26 performance measures are commonly used in hydrological modelling to evaluate the
27 simulation results in comparison to any form of observation, which is not the case in this study.
28 In accordance with B. Guse’s comment on the previous manuscript version an expression
29 should be selected that describes the statistical indices more appropriateley. I recommended
30 to use a term like: ‘fundamental daily streamflow statistics (FDSS)’, ‘statistical hydrological
31 indices’ or ‘statistical response characteristics’.
32

33 OK, how about “performance statistic”?

- 34
35 11. P7L22: To be more consistent, I propose to move the section about the FAST analysis to the
36 methods section. It is, in combination with the hydrological model and its output, a tool/method
37 you used to identify parameters and processes.

38 Yes.

- 39
40 12. P8L25: Please explain here or above why exactly a number of more than 9000 parameter sets
41 are developed via FAST.
42

43 Yes, in response to the other reviewer, I rewrote: “Run the first part of the FAST procedure (as
44 described above) to develop over 9000 unique parameter sets, comprised of value combinations for
45 the calibration parameters. The total number and content of these parameter sets, and the results
46 from their simulation by PRMS are completely determined by the first part of the FAST procedure in
47 order to investigate the trial space. Each of the prescribed simulations...”
48

49 Results

50

1 13. P12L30: Could you better explain the connection of the circles' colors to the percentage
2 values of Table 2 and to processes? (please see also comment on Fig. 4)

3
4 Yes, I reordered the sentences in the caption. This should reduce confusion. More discussion below
5 on comment for Fig. 4.

6
7 14. P13L24: Can you be a bit more precise here about sensitivity differences and the value for
8 calibration between the two parameters and their order in vertical routing process in reference
9 to the cited literature?

10
11 Yes. I added the sentence: "In PRMS, the process of partitioning of precipitation into either
12 direct surface runoff or infiltration (controlled directly by parameter *smidx_coef*) is "faster"
13 and occurs in the vertical routing order before the process of interflow generation (controlled
14 directly by parameter *slowcoef_sq*).

15
16 Discussion

17
18 15. P13L28, Section 5.1: In terms of the causes of parameter sensitivity, the discussion here is
19 almost purely led from a modelbased perspective without much reference to real world causes
20 for dominant processes. I think it might be worth to structure it by model-based (as you
21 already discussed) and real world causes. I recommend to add here a small pararaph e.g.
22 with an exemple of studies where dominant processes in the real world of the CONUS where
23 identified and then relate it to your model based findings for causes of parameter sensitivity.

24
25 I think your suggestion is a good idea, but I'm not sure how to do this. Other studies that I am aware of
26 do not assign a dominant process category (e.g. "snowmelt" or " ET") in that same way that I present
27 here. These studies use mathematical techniques like principle components, cluster analysis,
28 regression, muti dimensional distances, etc. to determine which HRUs or catchments are similar
29 based on attributes. This is not necessarily the same thing as identifying the "dominant process."

30
31 There are also lots of examples of studies that result in maps of riparian areas, shallow water tables,
32 etc. But, these are not really the same thing either.

33
34 16. P16L1-P17L28, Section 5.3: Concerning the structure of this chapter and its role in the
35 manuscript, in my opinion, parts of this chapter rather belong to the methods and results
36 section. The authors first introduce a new procedure to make most dominant and inferior
37 model based processes visible (P16L2-10) and then show its results in the following
38 paragraphs. I recommend to split this section and move one part to the methods section, one
39 to results and then discuss your findings in details in the section here.

40
41 I don't think that any of this discussion belongs in the Methods section. The procedure outlined here is
42 the analysis done on the sensitivity output, explaining how figure 5 was made. This is the same as
43 figures 2 through 4.

44
45 I added an "Identification of dominant and inferior process by HRU" to the Results section and move
46 most of the text from the Discussion to there.

47
48 I renamed the section in the discussion to "spatial aspect of dominant and inferior processes"

1
2 17. P17L31: Isn't a calibration advise for modelers always one of the last outcomes of a research
3 on hydrological modelling, e.g. based on a feasible and sophisticated approach of
4 parameter/process identification?

5
6 I would like to leave this sentence as the first in this paragraph as it defines "this approach" in the
7 subsequent sentences.

8
9 18. P19L3: ...or HRUs could be defined by dominant process instead of geographic location....

10
11 Yes, changed to: "Also, alternative ways of defining HRUs (e.g. larger or smaller, or even based on
12 dominant process instead of geographic location) could affect the analysis."

13
14 19. P19L3: 'Perhaps sensitivity analysis could help define this in a more objective way'. This
15 statement seems to me very vague and should be formulated more clearly in relation to the
16 previous sentence (see also comment directly above).

17
18 I deleted the sentence. I think the previous sentence covers it.

19
20 Conclusion

21
22 I have the impression that the conclusion is a bit vague and doesn't point at the most important and
23 specific findings of the manuscript to a satisfactorily extent. Moreover, the two aspects of complexity
24 stated in the introduction should be addressed here more specifically to reach a closed line of
25 argumentation based on the main purpose/hypothesis of the study. The authors could also make use
26 of the argumentation built on the two complexities to form the abstract, introduction and methods in a
27 bit more consistent way. This structure should be kept also in order not to loose the readers attention
28 in the different sections.

29
30 Yes, added a paragraph about the two questions from the introduction.

31 20. P19L13: As HRUs can be derived in various ways and their number is not fixed, I recommend
32 to slightly change this sentence to something like: 'A global parameter sensitivity analysis was
33 performed on the calibration parameters for all HRUs derived for the conterminous United
34 States.'

35
36 Yes.

37
38 Technical corrections

39
40 21. Please be consistent in the writing: 'dominate' or 'dominant process'. Please use the right
41 adjective.

42
43 Yes.

44
45 22. P2L13-L17: Is the order of findings listed here consistent with the order results are presented
46 and discussed in the manuscript? Please check and change if necessary.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47

Typing errors:

23. P2L11: I recommend to write: '...identify the (most) dominant process..'

Yes.

24. P3L12: effect instead of affect

Yes.

25. P5L29: are

Tables and Figures:

26. Table 1: In terms of the alphabetical sorting of parameters, I think it might be more useful to sort the parameters by PRMS (process) module according to their occurrence in the vertical routing process. Additionally, another column showing the used value ranges of the calibration parameters could make sense in relation to the explanation of the FAST procedure on P8L23.

Yes. I also changed the order in section 2.3.

27. Figure 1: The resolution of the map still seems to be not high enough and labels a bit pixelated. The colors for the different elevation zones are faint and their contrast low.

I've tried loading in "USA topo maps" from several sources in ArcMap and I get this same map every time. It is the USGS topo map for this resolution. I think it is the best map I can get of the landforms of CONUS. Despite this, I made a new version of figure 1 that is 5 times higher resolution, specifying much larger text and halos. I don't think I can go much larger on the text without overlaps. I'm not sure that I can make this much better.

28. Figure 3: The caption can be improved by stating that the plots and maps show the results for the different processes separately. In subplot (j) a vertical line is plotted to the right of the map. Please remove.

Yes, I added "are shown by process" according to a comment by the other reviewer.

Yes, remade the figure without the line.

29. Figure 4/P12L30: It might be possible to assign percentage ranges or average percentages to the legend for first place occurrences (red circles), in between occurrence etc. to account for the degree of parameter influence throughout the CONUS. This would increase the information content of Fig. 4 and better illustrate the connection to Table 2. Furthermore, the figure doesn't show any connection of the parameters to the processes they are influencing.

Yes, redid the figure showing percentages of HRUs that are affected.

References

1 Cuntz, M., et al. (2015), Computationally inexpensive identification of noninformative model
2 parameters by sequential screening, Water Resour. Res., 51, 64176441,
3 doi:10.1002/2015WR016907.

4

5 Yes, added.

6

7 Sanadhya, P., Giron J., and Arabi, M.: Global sensitivity analysis of hydrologic processes in major
8 snow-dominated mountainous river basins in Colorado, Hydrological Processes, 28, 34043418,
9 doi:10.1002/hyp, 2013.

10

11 Yes, added.

12

13

14

15

16

17

18

19

20

21

22

23

24

1

2 **Towards simplification of hydrologic modeling:**
3 **identification of dominant processes**

4

5 **S. L. Markstrom¹, L. E. Hay¹ and M. P. Clark²**

6 [1]{U.S. Geological Survey, PO Box 25046, MS 412, Denver Federal Center, Denver,
7 Colorado, 80225, USA}

8 [2]{National Center for Atmospheric Research, P.O. Box 3000, Boulder, Colorado, 80307,
9 USA}

10 Correspondence to: S. L. Markstrom (markstro@usgs.gov)

11

12

1 **Abstract**

2 The Precipitation-Runoff Modeling System (PRMS), a distributed-parameter hydrologic
3 model, has been applied to the conterminous United States (CONUS). Parameter sensitivity
4 analysis was used to identify: (1) the sensitive input parameters and (2) ~~the-particular~~ model
5 output variables that could be associated with dominant ~~dominate~~-hydrologic process(es).
6 Sensitivity values of 35 PRMS calibration parameters were computed using the Fourier
7 Amplitude Sensitivity Test procedure, ~~on the basis of geographic location~~ on 110,000
8 independent hydrologically-based spatial modeling units covering the CONUS (HRUs), and
9 then summarized to process (baseflow, evapotranspiration, runoff, infiltration, snowmelt, soil
10 moisture, surface runoff, and interflow) and model performance ~~measure~~-statistic (mean,
11 coefficient of variation, and autoregressive lag 1). Identified parameters and processes
12 provide insight into model performance ~~by location~~ at the location of each HRU and allow the
13 modeler to identify the most dominant ~~dominate~~-process on the basis of which processes are
14 associated with the most sensitive parameters.

15 The results of this study indicate that: (1) the choice of performance ~~statistic~~ measure-and
16 output variables have a strong influence on parameter sensitivity, (2) the apparent model
17 complexity to the modeler can be reduced by focusing on those processes that are associated
18 with sensitive parameters and disregarding those that are not, (3) different processes require
19 different numbers of parameters for simulation, and (4) some sensitive parameters influence
20 only one hydrologic process, while others may influence many.

21 **1 Introduction**

22 It has long been recognized that distributed-parameter hydrology models (DPHMs) are
23 complex because of the subtlety and diversity of the hydrologic cycle which they aim to
24 simulate (Freeze and Harlan, 1969; Amorocho and Hart, 1964). In this study, two different
25 aspects of this complexity are addressed:

26 (1) DPHMs have too many input parameters (Jakeman and Hornberger, 1993; Kirchner et al.,
27 1996; Brun et al., 2001; Perrin et al., 2001; McDonnell et al., 2007). In this article,
28 distributed parameters are defined as model inputs that remain constant through time, but can
29 vary spatially across the landscape. Those who apply these models often have difficulty in
30 the understanding what these parameters are and how they are used in the model. Regularly,
31 there are several parameters that may have similar effect on the computations or may

1 constrain the model in unintended ways (Hrachowitz et al., 2014). Despite the developer's
2 claims that these DPHMs are more or less physically based, often there are not measurements
3 or data sources available for reliable development of all of the input parameters. Duan et al.
4 (2005) describes "a gap in our understanding of the links between model parameters and the
5 land surface characteristics." These unmeasured parameters, ostensibly tangible, are really
6 empirical coefficients when it comes to application and calibration (Samaniego et al., 2010).

7 (2) The output produced by DPHMs is difficult to interpret (Schaeffli and Gupta et al., 2008;
8 Gupta et al., 2009; Gupta et al., 2012; Mayer and Butler, 1993; Ewan, 2011). Often, the
9 meaning of output variables is not always intuitive and results sometimes can seem
10 contradictory (e.g. when streamflow does not seem to correlate with climate information).
11 The result of these complex issues has led to the study of parameter interaction (Clark and
12 Vrugt, 2006) and equifinality (Beven, 2006).

13 Developing effective DPHM applications require that the modeler address these two aspects
14 of complexity at the same time (i.e. the uncertainty problem: "If I am uncertain when
15 estimating input parameters, due to either incomplete or inaccurate information, what affect
16 effect does it have on the output?", and the calibration problem: "I know the output I want,
17 which parameters should I change and how much should I change them?") (Chaney et al.,
18 2015; Reusser and Zehe, 2011). While, the user of a DPHM can do nothing about the
19 complexity of the model's internal structure, the apparent complexity can be reduced by
20 limiting the parameters and the affected output under consideration (as described by Jakeman
21 and Hornberger, 1993; Hay et al., 2006).

22 Global parameter sensitivity analysis can determine the degree to which different values of
23 parameters can affect the simulation of certain model outputs (Sanadhya et al., 2013).
24 Furthermore, parameter sensitivity can be evaluated with respect to selected output variables,
25 each representing a different aspect of the hydrologic cycle (hereafter referred to as
26 "processes"). Sensitivity analysis of this form can be used to both identify the input
27 parameters that are the most sensitive (i.e. the parameters that affect the simulation the most)
28 and the dominant ~~dominate~~-process(es) (i.e. those processes which are affected most, by the
29 most sensitive parameters) according to the DPHM.

30 Results of parameter sensitivity analysis can vary spatially (van Werkhoven et al., 2008).
31 Certain parameters can be more or less sensitive at different locations on the landscape. For
32 example, parameters related to simulation of snow can become more sensitive at higher

1 elevations, while parameters related to evaporation can become less sensitive at locations
2 where soil depth and the overall capacity for soil water storage decreases. Consequently, the
3 dominant~~dominate~~ process(es), as identified by parameter sensitivity analysis of the DPHM,
4 will vary across the landscape as well.

5 Any particular DPHM must necessarily be able to simulate any and all hydrological processes
6 that may occur anywhere on the landscape. However, with the application of a DPHM to a
7 specific site, it can become much less complex when the dominant hydrological process(es)
8 are identified, as not all processes are active to the same degree. The modeling problem
9 becomes less complex to the modeler when hydrological processes not relevant to the
10 modeled domain or watershed are removed from consideration (Wagener et al., 2003; Reusser
11 et al., 2011; Guse et al., 2014; Bock et al., 2015). Various methods have been developed that
12 will group similar watersheds—for purposes of study (Wolock et al., 2004; Winter, 2001; Ali
13 et al., 2012) or for parameter regionalization (He et al., 2011; Merz and Blöschl, 2004, Seibert,
14 1999; Vogel 2005). Dominant process concepts have been explored as a way to classify
15 watersheds and natural hydrologic systems for the purpose of simplifying DPHMs by several
16 researchers (Sivakumar and Singh, 2012; Sivakumar et al., 2007). Some have suggested the
17 approach for use as a possible classification framework (e.g. Woods, 2002; Sivakumar, 2004).
18 Pfannerstill et al. (2015) developed a framework for identification and verification of
19 hydrologic process in simulation models on the basis of temporal sensitivity analysis. Cuntz et
20 al. (2015) describe a method of identifying only informative parameters as a screening step in
21 order to reduce the effort required to perform global sensitivity analysis on the full parameter
22 space. McDonnell et al. (2007) discuss the possibility of simplifying hydrologic modeling by
23 identifying “fundamental laws” so that overparameterized models are not needed. However,
24 in our opinion we have not made much progress on that front and DPHMs are, in many ways
25 and for many reasons, more complex than ever.

26 This article describes an approach for identification of sensitive parameters and processes for
27 a modeling application of the conterminous United States (CONUS, Fig 1.). Identification
28 and simulation of regional CONUS sub-watersheds is determined by the resolution of the
29 available information and how the DPHM responds to geophysical (e.g., topography,
30 vegetation and soils) and climatological variation. Specifically, we propose to identify the
31 sensitive parameters and dominant hydrologic process(es), thereby reducing the amount of

1 parameter input and output variables to consider (Chaney et al., 2015) and address the two
2 aspects of complexity as outlined above-

3 **2 Methods**

4 **2.1 Distributed-parameter hydrology model**

5 The U.S. Geological Survey's Precipitation-Runoff Modeling System (PRMS) is the DPHM
6 used in this study. PRMS is a modular, deterministic, distributed-parameter, physical-process
7 watershed model used to simulate and evaluate the effects of various combinations of
8 precipitation, climate, and land use on watershed response. Each hydrologic process
9 simulated by ~~the model~~ PRMS is encoded in a modular piece of source code (i.e. a "module")
10 and is represented ~~within PRMS~~ by an algorithm that is based on a physical law (i.e. balance
11 of energy required to melt the ice in a snowpack) or empirical relation with measured or
12 estimated characteristics (i.e. a tank model used to simulate interflow). The reader is referred
13 to Markstrom et al. (2015) for a complete description of PRMS.

14 A fundamental assumption of this study is that PRMS is able to simulate and differentiate
15 hydrologic signals from all the different processes at the scale of the CONUS. Two possible
16 ways to evaluate this are: (1) an analysis of PRMS's internal structure, and (2) the history of
17 PRMS applications. A detailed analysis of PRMS's structure is beyond the scope of this
18 article (see Markstrom et al., 2015); however, PRMS is implemented in a very linear fashion.
19 Each parameter is clearly identified with an equation that is related to simulation of a specific
20 process. Equations are solved sequentially, generally in the order that is defined by water
21 moving through the hydrologic cycle, starting from the atmosphere as precipitation and
22 moving through the rivers as streamflow. The outputs of one equation may be used as inputs
23 to subsequent equations. All of the inputs for a particular equation are required before that
24 equation can be solved. This interdependency in equations can lead to parameter interaction
25 in the simulation of subsequent processes (as described by Beven, 1989; Grayson et al., 1992;
26 Yilmaz et al., 2008; Pfannerstill et al., 2015). For example, parameters related to distribution
27 of temperature and solar radiation may show correlation with each other when evaluated with
28 respect to simulation of evapotranspiration despite these parameters not being explicit terms
29 in the evapotranspiration equations. Past studies indicate that PRMS has been very useful in
30 water-resource and research studies across the CONUS (Battaglin et al., 2011; Boyle et al.,
31 2006; Hay et al., 2011; Markstrom et al., 2012) and is capable of matching measured data

1 (Bower, 1985; Cary, 1991; Dudley, 2008; Koczot et al., 2011) in a variety of geophysical and
2 climatological settings.

3 To define the spatial domain for the CONUS application of PRMS, the locations of major
4 river confluences, water bodies, and stream gages have been georeferenced. Approximately
5 56,000 stream segments are used to connect these locations. Using these stream segments,
6 the left and right bank areas that contribute runoff directly to each segment have been
7 identified, resulting in approximately 110,000 irregularly shaped hydrologic response units
8 (HRUs) of various sizes (500 m² to 14,000 km²) (Viger and Bock, 2014). These ~~stream~~
9 ~~segments and~~ HRUs ~~and~~ derived by their geographic and topographic location, affecting their
10 extent and resolution. The CONUS application is forced with values of daily precipitation
11 and daily maximum and minimum air temperature from the DAYMET data set (Thornton et
12 al., 2014). The climate information covers a time period from 1980-2013 on a daily time step,
13 but a shorter period (1987 – 1989 used for warmup and 1990 – 2000 used for evaluation) was
14 used in this study.

15 **2.2 Calibration ~~Parameters~~parameters**

16 The version of PRMS used in this study has 108 input parameters. A parameter is defined as
17 an input value that does not change over the course of a simulation run. Of these parameters,
18 most would never be modified from their initial values (hereafter referred to as *non-*
19 *calibration parameters*, see Viger, 2014) because they are (1) computed directly from digital
20 data sets through the use of a geographic information system (e.g. land-surface
21 characterization parameters), (2) boundary conditions (e.g. parameters to adjust daily
22 precipitation and daily air temperature forcings), or (3) model configuration options (e.g. unit
23 conversions and model output options). This leaves 35 parameters under consideration for
24 improved model performance, hereafter referred to as *calibration parameters* (Table 1). Each
25 parameter is used within a PRMS code module that simulates a single hydrologic process in
26 PRMS. The output variables of one module may be used as input variables to other modules.
27 It is through these connections that calibration parameters associated with a PRMS module
28 type may affect the results of other modules.

1 2.3 Hydrologic processes

2 PRMS produces more than 200 output variables that indicate the simulated hydrologic
3 response of a watershed through time (Markstrom et al., 2015, see Table 1-5). In this study,
4 eight of these output variables have been selected to represent the response of major
5 hydrologic processes at the HRU resolution. These processes are: (1) snowmelt (*snowmelt*) –
6 the amount of water that has changed from ice to liquid and becomes either surface runoff or
7 infiltrates into the soil zone of the HRU;~~baseflow (PRMS output variable *gwres_flow*) – the~~
8 ~~component of flow from the saturated zone to the connected stream segment;~~ (2) surface
9 runoff (*sroff*) – water from a rainfall or snowmelt event that travels quickly over the land
10 surface from the HRU to the connected stream segment; ~~evapotranspiration (*hru_actet*) – the~~
11 ~~total actual evapotranspiration lost from canopy interception, snow sublimation, and soil and~~
12 ~~plant losses from the root zone;~~ (3) infiltration (*infil*) – the sum of rain and snowmelt that
13 passes into the soil zone of the HRU;~~runoff (*hru_outflow*) – the total flow from the HRU~~
14 ~~contributing to streamflow in the connected stream segment;~~ (4) soil moisture (*soil_moist*) –
15 the storage state that represents the amount of soil water in the soil zone above wilting point
16 and below total saturation in the HRU; ~~infiltration (*infil*) – the sum of rain and snowmelt that~~
17 ~~passes into the soil zone of the HRU;~~ (5) evapotranspiration (*hru_actet*) – the total actual
18 evapotranspiration lost from canopy interception, snow sublimation, and soil and plant losses
19 from the root zone; ~~snowmelt (*snowmelt*) – the amount of water that has changed from ice to~~
20 ~~liquid and becomes either surface runoff or infiltrates into the soil zone of the HRU;~~ (6)
21 interflow (*ssres_flow*) – shallow lateral flow in the unsaturated zone to the connected stream
22 segment; ~~soil moisture (*soil_moist*) – the storage state that represents the amount of soil water~~
23 ~~in the soil zone above wilting point and below total saturation in the HRU;~~ (7) baseflow
24 (PRMS output variable *gwres_flow*) – the component of flow from the saturated zone to the
25 connected stream segment; ~~surface runoff (*sroff*) – water from a rainfall or snowmelt event~~
26 ~~that travels quickly over the land surface from the HRU to the connected stream segment;~~ and
27 (8) runoff (*hru_outflow*) – the total flow from the HRU contributing to streamflow in the
28 connected stream segment. ~~interflow (*ssres_flow*) – shallow lateral flow in the unsaturated~~
29 ~~zone to the connected stream segment.~~ It is assumed that these eight output variables are
30 representative of the processes typically considered in hydrological studies with DPHMs.
31 Details of how these processes are simulated by PRMS are described by Markstrom et al.
32 (2015).

2.4 Performance ~~statistics~~measures

For DPHMs, there are many different performance measures that have been developed for different purposes (Krause et al., 2005; Gupta et al., 2008; Gupta et al., 2009; Mendoza et al., 2015a; Mendoza et al., 2015b). Because this study is an analysis of model sensitivity, the performance measures need only track changes in model output and do not necessarily need to include observed measurements. Consequently, performance ~~statistics~~measures can be developed for processes that are not normally evaluated by performance measures. Archfield et al. (2014) demonstrated that seven fundamental daily streamflow statistics (FDSS) can be used to group streams by similar hydrologic response and tend to provide non-redundant information. In this study, all seven FDSS were computed for each of the eight PRMS time series output variables corresponding to the processes. For the purpose of illustration, this article focuses on three of the FDSS: (1) mean; (2) coefficient of variation (CV); and (3) the autoregressive lag-one correlation coefficient (AR-1). In an intuitive sense, ~~performance measures based on~~ these three statistics can be thought to represent changes in total volume, “spikiness” or “flashiness”, and day-to-day timing, respectively. These performance ~~measures~~ ~~statistics~~ are computed on the daily time series of the process variables for the 10-year evaluation period.

2.5 FAST analysis

Parameter sensitivity analysis measures the variability of model output given variability of calibration parameter values. This is determined by partitioning the total variability in the model output or change in performance ~~statistics~~ ~~measure~~ ~~values~~ to individual calibration parameters (Reusser et al., 2011). The Fourier Amplitude Sensitivity Test (FAST) (Schaibly and Shuler, 1973; Cukier et al., 1973; Cukier et al., 1975; Saltelli et al., 2006) was selected for this study because it has been demonstrated that it can efficiently estimate non-linear hydrologic model parameter sensitivity (Guse et al., 2014; Pfannerstill et al., 2015; Reusser et al., 2011). FAST is a variance-based global sensitivity algorithm that estimates the first-order partial variance of model output explained by each calibration parameter (hereafter referred to as *parameter sensitivity*). Specifically, this first-order variance is the variability in the output that is directly attributable to variations in any one parameter and is distinguishable from higher order variances associated with parameter interactions. An important caveat is that these higher order variances are not accounted for in the analysis. It is assumed that first-order partial variance is sufficient to identify sensitive parameters. This same assumption, as

1 applied to process identification, may be more problematic. If there are sets of interactive
2 sensitive parameters that have not been identified, then the associated process(es) will not be
3 identified as such.

4 Selected parameters are varied within defined ranges at independent frequencies among
5 different model runs. FAST identifies the variability of parameter sensitivities and their
6 ranks, by means of their contribution to total power in the power spectrum. FAST has been
7 implemented as the 'fast' library in the statistical software R (Reusser et al., 2011; Reusser,
8 2013; R Core Team, 2015) in two parts. In the first part, the user identifies the calibration
9 parameters and respective value ranges for the test, then FAST generates sets of test
10 calibration parameter values (hereafter referred to as *trials*). Calibration parameter values are
11 varied across the trials according to non-harmonic fundamental frequencies. The user then
12 runs the DPHM for each trial and computes corresponding performance ~~statistics~~measures.
13 Then the user runs the second part of the FAST package that performs a Fourier analysis of
14 the performance ~~statistics~~ measures—over the trial space looking for the frequency signatures
15 associated with each calibration parameter.

16 The FAST methodology results in a simple procedure for computing parameter sensitivities
17 on an HRU basis for all the CONUS. The steps in this process are as follows:

- 18 1. Assign appropriate ranges for the 35 calibration parameters (Markstrom et al., 2015; as
19 in LaFontaine et al., 2013).
- 20 2. Run the first part of the FAST procedure (as described above) to develop over 9000
21 unique parameter sets, comprised of value combinations for the calibration
22 parameters. ~~These~~ The total number and content of these parameter ~~sets~~ sets, and the
23 results from their simulation by PRMS are completely determined by the first part of
24 the FAST procedure in order to investigate the trial space. ~~in the trial space~~ Each of
25 the prescribed simulations are independent of each other so they can run in parallel on
26 a computer cluster.
- 27 3. Compute the FDSS based performance ~~statistics~~ measure—(mean, CV, and AR-1)
28 ~~values~~ — for each process.
- 29 4. Run the second part of the FAST procedure (as described above) using output from
30 step 3, resulting in PRMS parameter sensitivities, at each HRU, for the 56

1 combinations of seven performance ~~statistics measures~~ and eight processes (plus
2 totals).

3 **3 Results**

4 **3.1 Parameter sensitivity by process and performance ~~statistic measure~~**

5 Figure 2 shows parameter sensitivity as a set of maps ordered by process and performance
6 ~~statistic measure~~. This illustrates the spatial variability in parameter sensitivity and the
7 importance that choice of performance ~~statistic measure~~ can make in terms of evaluation of
8 hydrologic response. In these maps, the HRUs are colored according to the parameter
9 sensitivity, which is computed by summing the first-order sensitivity for all 35 parameters,
10 seperately for each of the 8 output variables, each corresponding to their respective process,
11 ~~which—These sums~~ do not necessarily sum to one, and then scaling (by average) each
12 individual category of modeled process and performance ~~statistic measure~~ to total sensitivity.
13 This summed sensitivity across the parameters, by each category is hereafter refered to as
14 cumulative parameter sensitivity. Parameter sensitivity associated with process (column
15 labeled “Process average” in Figure 2) are averaged across all of the parameter sensitivity
16 values computed for the different performance ~~statistics measures~~, while parameter sensitivity
17 associated with the performance ~~statistics measures~~ (last row labeled “Performance
18 ~~statistic measure~~ average” in Figure 2) are averaged across all of the parameter sensitivity
19 values computed for the different processes. These categories are indicated by their position
20 in the rows and columns in Figure 2. When looking at a single performance ~~statistic measure~~
21 for a single process, the cumulative parameter sensitivity can vary from near 0.0 (white
22 colored HRUs) to near 1.0 (black colored HRUs). Low values in these maps indicate that
23 there are no parameters that can be changed in any way to affect the performance
24 ~~statistic measure~~ (this situation is hereafter referred to as an *inferior process*). Likewise, each
25 HRU has a cumulative sensitivity value (i.e. the sum of all of the partial sensitivities for each
26 process). The process with the largest sum on an HRU is referred to as the *dominant process*
27 for that HRU.

28 An example of an inferior process is clearly seen in the case of the mean of the snowmelt
29 process in the southern CONUS HRUs. This is because the occurrence of snow in these areas
30 is very infrequent. Also, there were HRUs for which the value of some performance ~~statistics~~
31 ~~measures~~ were mathematically undefined for certain processes (e.g. AR-1 and CV for the

1 baseflow and snowmelt processes). These cases occur when the output variable representing
2 the process does not change at all through time, regardless of the parameter values, and are
3 extreme examples of inferior processes. Likewise, a clear example of a dominant hydrologic
4 process is the CV of interflow in the Intermountain West region of the CONUS (Figs. 1 and
5 2). This means that for these HRUs, there exist some calibration parameters that can be
6 varied that affect this process to a very high degree.

7 Also apparent from Figure 2 is that there are clear spatial patterns in the parameter sensitivity
8 on the basis of the geographical features of the CONUS. Generally, many of the maps show
9 a sharp break in parameter sensitivity between mountain ranges and comparatively lower
10 elevations, northern contrasted with southern latitudes, and humid versus arid climates.
11 Specific contrasts can be seen in several maps such as when examining the Humid Midwest
12 as opposed to the Great Plains regions and the Pacific Coastal areas and the Desert Southwest
13 region of the CONUS (Fig. 1). Additionally, topographic features of the landscape are
14 prominent (e.g. elevation for interflow), while in other maps, climate considerations seem to
15 dominate (e.g. snowmelt). Another specific example is that the mean of each process, which
16 indicates the ability of any parameter(s) to change the total volume of water during a
17 simulation, seems to have a low sensitivity band in the Great Plains region for all processes
18 except for snowmelt (Fig. 1). This band of low sensitivity has been noted in other modeling
19 studies (Newman et al., 2015; Bock et al., 2015).

20 **3.2 Parameter count required to parameterize each process**

21 To identify the expected count of parameters required to parameterize a particular process,
22 cumulative parameter sensitivity across all HRUs of the CONUS has been computed and
23 plotted (Fig. 3(a)—(h)). The sensitivity level accounted for by the most sensitive parameter,
24 regardless of which parameter it is, for all HRUs across the CONUS is plotted in position 1 on
25 the X axis of each of these plots (Fig. 3(a)—(h)). Then, cumulative sensitivity is plotted for
26 the parameter in rank 2, and so on, until the cumulative sensitivity of all 35 calibration
27 parameters is accounted for. The plots in Figure 3(a)—(h) show that far fewer than the full 35
28 parameters, ~~on average,~~ are needed to account for most of the parameter sensitivity. In fact,
29 to account for 90% of the parameter sensitivity, this count varies from an ~~average~~ low value
30 of just over two for snowmelt to an average high value of over 9 for runoff in selected HRUs.

1 The actual count of calibration parameters required to account for 90% of the parameter
2 sensitivity varies by process and region, as shown by the maps in Figure 3(i)—(p). These
3 maps were generated by counting the number of parameters required to obtain the 90%
4 cumulative sensitivity level for each HRU. For example, Figure 3(i) indicates that for the
5 baseflow process between three and nine parameters are needed to account for 90% of the
6 parameter sensitivity in the various HRUs across the CONUS, with the higher count needed
7 in mountainous, Great Lakes, and New England regions. The maps also indicate that between
8 ~~four and six parameters are required for parameterization of evapotranspiration (Fig. 3(j)),~~
9 ~~five to 13 parameters are required for parameterization of runoff (Fig. 3(k)), four to 13~~
10 ~~parameters are required for parameterization of infiltration (Fig. 3(l)), two (Fig. 3(m)) to eight~~
11 ~~13 parameters (Fig. 3(k, l, and p)) are required for parameterization of snowmelt (Fig. 3(m)),~~
12 ~~three to six parameters are required for parameterization of soil moisture (Fig. 3(n)), five to~~
13 ~~eight parameters are required for parameterization of surface runoff (Fig. 3(o)), and two to 13~~
14 ~~parameters are required for parameterization of interflow (Fig. 3(p)).~~ This analysis indicates
15 that more parameters are needed to simulate the components of streamflow (e.g. baseflow,
16 interflow, and groundwater flow) than processes that do not result directly in flow (e.g.
17 snowmelt, evapotranspiration, and soil moisture). ~~A full analysis of these parameter counts~~
18 ~~and how they relate to their respective process is beyond the scope of this article, but it could~~
19 ~~relate to the structure of PRMS and possibly indicate that some processes are~~
20 ~~overparameterized.~~ In addition, simulated processes that are identified as being sensitive to
21 parameters with which they are not normally associated with, may indicate that these
22 processes are a convolution of other processes, consequently making parameters sensitive that
23 are not normally sensitive.

24 Visually, these maps (Fig. 3(i)—(p)) indicate that HRU calibration parameter counts vary
25 regionally. For most processes, higher parameter counts are seen in the more mountainous
26 regions of the Cascade, Sierra Nevada, Rocky, Ozark, and Appalachian mountains, although
27 this is true to a much lesser extent for the evapotranspiration and soil moisture processes
28 (Figs. 3(j) and 3(n)). Higher values also seem prevalent in the New England and Great Lake
29 regions (Fig. 1). This result seems to indicate that, no matter which part of the hydrologic
30 cycle is simulated, more parameters are required in these regions. In contrast, low parameters
31 counts seem prevalent in the Great Plains and Desert Southwest regions.

1 Finally, Figure 3 illustrates the extent to which it is possible to decompose the parameter
2 estimation problem into a sub-set of independent problems, and hence reduce the
3 dimensionality of the inference problem and avoid the troublesome nature of parameter
4 interactions. By considering a single (or reduced set of) processes and performance statistic
5 measure-categories at a time, the sensitive parameter space can be substantially reduced. It also
6 illustrates that there is a strong spatial component to this decomposition. In order to make the
7 information presented in Figure 3 more useful for DPHM application, the particular sensitive
8 parameters have been determined for each HRU by ranking the calibration parameters by
9 sensitivity for each category of process and performance statisticmeasure for each individual
10 HRU ~~(not shown).~~ A summary of this information is produced and is summarized —by
11 counting the occurrence of each parameter across the HRUs and ranking them within their
12 respective category of process and performance statisticmeasure (Table 2). To address the
13 issue of the spatial variability of these parameters, the percentage of the total number of
14 HRUs for which that parameter is sensitive is shown as the number in parentheses after the
15 parameter name in Table 2. Higher percentage values would indicate that the corresponding
16 parameter is sensitive across more of the CONUS. Refer to Table 1 for a complete
17 description of these parameters.

18 When looking at the categorical parameter lists of Table 2, it is expected that different
19 parameters would associate with different processes (i.e. along a column), but it is surprising
20 to see how different the parameter lists are for different performance statistics measures
21 (moving across a row) for the same process. An example of this is the baseflow process: the
22 baseflow coefficient (PRMS parameter *gwflow_coef*) is the most sensitive parameter for
23 performance statistics measures CV and AR1, but is not even in the list of sensitive
24 parameters for the performance statisticmeasure related to the mean of the process. This
25 implies that this parameter is influential for affecting the timing of baseflow, while it does not
26 have any effect on the total volume of baseflow.

27 Further inspection of Table 2 indicates that some calibration parameters occur in many of the
28 24 categories (8 processes times 3 performance statistics measures), while some parameters
29 do not occur at all. A count of how many times each parameter occurs provides insight into
30 how many process/performance statisticmeasure combinations that particular parameter
31 influences. To investigate this for the CONUS application, another view of the information in
32 Table 2 is shown in Figure 4. The 25 sensitive calibration parameters from Table 2 are listed

1 on the y-axis of Figure 4, ranked by order of the number of times that they appear in the
2 process/performance statisticmeasure categories. Furthermore, each appearance is indicated
3 by an adjacent circle. Independent of the number of times a parameter occurs within a
4 category (number of circles), the color of the circle visually indicates the proportion of the
5 CONUS HRUs that are affected by that parameter. Specifically, a red circle indicates that
6 more HRUs are affected, while blue indicates that fewer HRUs are affected.

7 Figure 4 shows that three specific parameters affect 18 or more process/performance
8 statisticmeasure categories; seven parameters affect seven to 14 categories, and 15 specific
9 parameters affect one to five categories. Finally, of the 35 parameters studied, 10 are never
10 used for any combination of process and performance statisticmeasure (Table 2 and Fig. 4). It
11 is apparent from Figure 4, that for the CONUS application of PRMS, the parameters affecting
12 the most process categories are *soil_moist_max* (maximum available water holding capacity),
13 *jh_coef* (Jensen-Haise air temperature coefficient), and *dday_intcp* (intercept in degree-day
14 solar radiation equation). Because these parameters affect so many categories, modelers
15 would be wise to invest their resources in developing the best values possible for these
16 parameters to avoid unintended parameter interaction during calibration. Ideally, these
17 parameters could be estimated from reliable external data and set for the model and not
18 calibrated. The parameters that affect the least number of process categories (aside from the
19 parameters that are never sensitive) are *cecn_coef* (convection condensation energy
20 coefficient), *ssr2gw_exp* (coefficient in equation used to route water from the soil to the
21 groundwater reservoir), *emis_noppt* (emissivity of air on days without precipitation),
22 *potet_sublim* (fraction of potential evapotranspiration that is sublimated), and *slowcoef_lin*
23 (slow interflow routing coefficient). Ideally, these parameters could be set to default values
24 since there is limited value in calibrating them—.

25 Also apparent from Figure 4 is that there are many parameters between these two extreme
26 groups. Parameters like *smidx_coef* (soil moisture index for contributing area calculation) can
27 appear in several process categories, without any high rankings, while there are other
28 parameters like *slowcoef_sq* (slow interflow routing coefficient) that appear in relatively few
29 process categories, but have high rankings. This behavior may be due to the vertical routing
30 order (i.e. processes that occur nearer to the surface happen before the deeper ones) of the
31 associated processes (Yilmaz et al., 2008; Pfannerstill et al., 2015). In PRMS, the process of
32 partitioning of precipitation into either direct surface runoff or infiltration (controlled directly

1 by parameter *smidx_coef*) is “faster” and occurs in the vertical routing order before the
2 process of interflow generation (controlled directly by parameter *slowcoef_sq*). These
3 parameters may be the best candidates for calibration because they are sensitive, while at the
4 same time interaction across processes is perhaps limited.

5 **3.3 Identification of dominant and inferior processes by HRU**

6 To identify the dominant and inferior process(es) by geographic area, the following procedure
7 is done for each HRU:

- 8 1. The parameter sensitivity scores are summed for each parameter, resulting in a score
9 for each parameter for each time series output variable and performance statistic.
- 10 2. The parameter scores are averaged by performance statistics *s*, resulting in a score for
11 each process.
- 12 3. The process scores are ranked for each HRU.
- 13 4. The top (and bottom) ranked process determines the most dominant (and most
14 inferior) single process as shown in Figure 5.

15 Generally, Figure 5(a) shows that evapotranspiration is the most prevalent dominant process
16 for the CONUS. This is probably because it is a major component of the hydrologic cycle
17 and sensitive parameters are available to affect it in every HRU. However, this is not
18 universal, and the dominant process varies by geographic region, with snowmelt being the
19 dominant process in the northern Great Plains and northern Rocky Mountains, total runoff
20 being the most important in the Pacific Northwest, and with interflow important in bands
21 across the Intermountain West (Fig. 1). Each process is dominant somewhere depending on
22 local conditions. Equally informative are the locations of the most inferior processes (Fig.
23 5(b)). This clearly shows that PRMS snowmelt parameters are not sensitive across the
24 Central Valley of California, and in the Deep South and the Southwestern United States (Fig.
25 1). Areas where runoff is more dominant than evapotranspiration, as in the Cascade
26 Mountains and coastal areas of the Pacific Northwest, are locations where the runoff is a
27 substantially greater part of the water budget. Interestingly, infiltration and baseflow appear
28 to be equally inferior across most of CONUS, with pockets of HRUs that are insensitive to
29 soil moisture, surface runoff, and interflow, depending on local conditions. There are no
30 HRUs that rank evapotranspiration as the most inferior process.

1 Dominant and inferior processes can be identified for HRUs at the watershed scale as well.
2 Figure 5(c) shows the most dominant process by HRU for the Apalachicola – Chattahoochee
3 – Flint River watershed in the Southeastern United States. This watershed has been the
4 subject of previous PRMS modeling studies (LaFontaine et al. 2013). When using this
5 information at a finer resolution, it shows that evapotranspiration is the most dominant
6 process watershed wide, but with pockets of HRUs in the northern part of the watershed
7 where runoff is the most dominant and a pocket in the southern part of the watershed where
8 infiltration is most dominant. Likewise, the most inferior process for each HRU is identified
9 in Figure 5(d). This clearly indicates that parameters and performance statistics s related to
10 snowmelt, and to a lesser degree baseflow do not need to be considered when modeling this
11 watershed. Figure 5(d) also indicates, that in the northern part of the watershed, infiltration
12 and runoff are inferior processes as well, which could in part be due to impervious conditions
13 around the Atlanta metropolitan area.

14 **4 Discussion**

15 **4.1 Causes of parameter sensitivity**

16 There are regions where parameter sensitivity is typically high for a particular performance
17 statistic ~~statisticmeasure~~ (e.g. New England region [Fig. 1] for performance statisticmeasure
18 based on mean of processes) or typically low (e.g. Great Plains region [Fig. 1] for mean of
19 processes) regardless of the process (Fig. 2). Why do the HRUs of some regions exhibit
20 parameter sensitivity to almost all processes, while others exhibit parameter sensitivity to
21 almost none? All other things being equal, there can only be two sources of these spatial
22 patterns:

- 23 1. The physiography that is used to define the non-calibration parameters (e.g. elevation,
24 vegetation type, soil type) renders all calibration parameters insensitive. A theoretical
25 example of this could be if an HRU is characterized as entirely impervious, resulting
26 in the non-existence of any simulated soil water.
- 27 2. Patterns in the climate data used to drive the model (e.g. daily temperature and
28 precipitation) could control model response. A theoretical example of this could be an
29 HRU that receives no precipitation. The hydrologic response of the HRUs in either
30 case would always remain unchanged, regardless of changes in any parameter value.

1 In either case, these sources of information are independent of the DPHM and could lead to
2 the conclusion that the dominant processes identified by the methods outlined in this article
3 could correspond to perceptible dominant processes in the physical world (i.e. how the “real
4 world” works).

5 The number of unique calibration parameters for each process in Table 2 (i.e. counting the
6 parameters across each row) may provide some insight into the complexity of each process as
7 represented in the model structure of PRMS. In theory, more “complicated” hydrologic
8 processes would require more parameters for parameterization than the “simpler” ones.
9 According to this view, runoff (16 calibration parameters), infiltration (12 calibration
10 parameters), and interflow (12 calibration parameters) are the most complex processes to
11 simulate, with soil moisture (4) being the simplest. Baseflow (11 calibration parameters),
12 snowmelt (11 calibration parameters), surface runoff (10 calibration parameters), and
13 evapotranspiration (8 calibration parameters) are in between. This reflects the fact that in
14 PRMS, runoff is a much more complicated calculation with many of the other processes
15 directly contributing information. Also apparent is that more parameters are needed to
16 simulate the components of streamflow (e.g. baseflow, interflow, and surface runoff) than
17 processes that do not result directly in flow (e.g. snowmelt, evapotranspiration, and soil
18 moisture). The only process that does not follow this pattern is infiltration. Storm-event
19 based infiltration is typically simulated with sub-daily time steps to account for the
20 time/intensity variability of this process. It is possible that PRMS must compensate for this
21 shortcoming in structure with a more complex parameterization of the process.

22 Table 2 indicates that there are 10 calibration parameters that are never sensitive regardless of
23 the process or performance statistic~~measure~~. This indicates that these parameters should
24 always be set to the default value, with minimal resources used to estimate them, and never be
25 calibrated. Additional modeling studies could reveal situations where these parameters
26 actually do exhibit some sensitivity, perhaps in situations with smaller geographical domains
27 or over different time periods. It is also possible that these parameters are never sensitive,
28 indicating some structural problem or unwarranted complexity in the DPHM and the removal
29 of some algorithms from the source code of the DPHM is advised. Additional study is
30 required of these 10 non-sensitive calibration parameters and upon further review of the
31 PRMS source code, a structural problem (e.g. unintended constraint, non-differentiable
32 behavior, or software bug) might be revealed. Alternatively, the problem could be related to

1 invalid parameter ranges in the FAST analysis or problems with the climate data used to drive
2 the model. Finally, it could be that alternative or improved performance statistics measures
3 could resolve this issue.

4 **4.2 Choice of performance statisticmeasure**

5 The maps of Figure 2 clearly illustrate the importance that choice of performance
6 statisticmeasure can make in terms of evaluation of hydrologic response. When the maps of
7 performance statistics measures within a single hydrologic process are compared (i.e. the
8 maps across a single row), the spatial patterns and magnitude of the parameter sensitivity can
9 be very different. This could indicate that the performance statistics measures based on the
10 FDSS truly are non-redundant and are accounting for different aspects of the processes.

11 Table 2 indicates that the baseflow coefficient (PRMS parameter *gwflow_coef*, Markstrom et
12 al., 2015) is the most sensitive parameter for performance statistics measures CV and AR1,
13 but not sensitive to the mean of the baseflow process performance statistics measures. This
14 indicates that despite knowledge of parameters being associated with the computations of
15 simulation of a certain process, sensitivity analysis can reveal that the response of the
16 simulation is completely different when the performance statisticmeasure changes. It also
17 indicates that sensitivity analysis might be an important step in selection of an appropriate
18 performance statisticmeasure and that uncritical application of performance statistics
19 measures may be misleading.

21 **4.3 ~~Identification of d~~ Spatial aspects of d dominant and inferior processes by** 22 **geographic area**

23 When the ~~sensitivities are computed this way~~ the dominant and inferior processes are
24 determined for an HRU (Fig. 5), it is possible that certain parameters are included in both the
25 most dominant dominate and most inferior processes at the same time. This apparent
26 contradiction is not necessarily a conflict but indicates that the calibration parameters must
27 work in concert with the evaluation method. For example, there exist HRUs where the
28 evapotranspiration process is dominant and at the same time the runoff or infiltration
29 processes are inferior (Fig. 5(a) and 5(b)). The parameter *soil_moist_max* is indicated as
30 being sensitive for all three of these processes (Table 2). This parameter would demonstrate

1 equifinality if evaluated within the context of the inferior processes (i.e. those output variables
2 and performance ~~statistics—measures~~) but would be a very effective calibration parameter
3 resulting in optimal values when viewed within the context of the ~~dominant—dominate~~ process.

4 ~~Generally, Figure 5(a) shows that evapotranspiration is the most prevalent dominant process
5 for the CONUS. This is probably because it is a major component of the hydrologic cycle
6 and sensitive parameters are available to affect it in every HRU. However, this is not
7 universal, and the dominant process varies by geographic region, with snowmelt being the
8 dominant process in the northern Great Plains and northern Rocky Mountains, total runoff
9 being the most important in the Pacific Northwest, and with interflow important in bands
10 across the Intermountain West (Fig. 1). Each process is dominant somewhere depending on
11 local conditions. Equally informative are the locations of the most inferior processes (Fig.
12 5(b)). This clearly shows that PRMS snowmelt parameters are not sensitive across the
13 Central Valley of California, and in the Deep South and the Southwestern United States (Fig.
14 1). Areas where runoff is more ~~dominant—dominate~~ than evapotranspiration, as in the Cascade
15 Mountains and coastal areas of the Pacific Northwest, are locations where the runoff is a
16 substantially greater part of the water budget. Interestingly, infiltration and baseflow appear
17 to be equally inferior across most of CONUS, with pockets of HRUs that are insensitive to
18 soil moisture, surface runoff, and interflow, depending on local conditions. There are no
19 HRUs that rank evapotranspiration as the most inferior process.~~

20 ~~Dominant and inferior processes can be identified for HRUs at the watershed scale as well.
21 Figure 5(c) shows the most dominant process by HRU for the Apalachicola—Chattahoochee
22 —Flint River watershed in the Southeastern United States. This watershed has been the
23 subject of previous PRMS modeling studies (LaFontaine et al. 2013). When using this
24 information at a finer resolution, it shows that evapotranspiration is the most dominant
25 process watershed wide, but with pockets of HRUs in the northern part of the watershed
26 where runoff is the most dominant and a pocket in the southern part of the watershed where
27 infiltration is most dominant. Likewise, the most inferior process for each HRU is identified
28 in Figure 5(d). This clearly indicates that parameters and performance ~~statistics—measures~~
29 related to snowmelt, and to a lesser degree baseflow do not need to be considered when
30 modeling this watershed. Figure 5(d) also indicates, that in the northern part of the watershed,
31 infiltration and runoff are inferior processes as well, which could in part be due to impervious
32 conditions around the Atlanta metropolitan area. This information could be used, in~~

1 conjunction with Table 2, to develop the most effective parameter estimation and performance
2 ~~statistic measure~~ selection strategy when modeling this watershed.

3 This method of identification of inferior and ~~dominant dominate~~ processes for a specific
4 geographical location is defined within the context of the application of the DPHM and may
5 not have the same meaning within a different context. This method of using the PRMS
6 watershed hydrology model as the context resolves problems that researchers have had
7 classifying watersheds by ~~dominant dominate~~ processes, indicating that classification not only
8 depends on the physiographic nature of the watershed, but also, on the scale, resolution, and
9 purpose for classification.

10 **4.4 Further study**

11 Providing modelers with reduced lists of calibration parameters on an HRU-by-HRU,
12 watershed-by-watershed, or region-by-region basis is the first step in the path of this research.
13 This approach could be developed into more sophisticated methods where orthogonal output
14 variables and performance ~~statistics measures~~ could provide much more insight into methods
15 of effective model calibration. Advancements in this approach may identify groups of
16 parameters that effectively behave together, thus reducing the number of parameters and
17 making specific model output respond more directly to a single or a few parameters, reducing
18 parameter interaction. This suggests that model parameterization and calibration might
19 benefit from a step-by-step strategy, using as much information as possible to set non-
20 interactive parameters and remove them from consideration before the more interactive
21 parameters are calibrated, reducing the dimensionality of the problem (Hay et al., 2006; Hay
22 and Umemoto, 2006).

23 Another question for future research is: Does the classification of ~~dominant dominate~~
24 hydrologic processes, both geographical and categorical, as described in this study apply to
25 any other context? Comparable findings from other modeling studies, such as those by
26 Newman et al. (2015) and Bock et al. (2015), might indicate that there could be a connection.
27 These other studies use the same input information (i.e. being driven with the same climate
28 data and using the same sources of information for parameter estimation), and thus simulation
29 results and model sensitivity to this information might be similar. Also, can real world
30 watersheds be classified by sensitivity analysis using DPHMs? Based on the findings of the
31 work presented so far, the answer is inconclusive. Clearly there are some results that indicate

1 that it might be possible. For example, the methods described here effectively identify
2 “snowmelt watersheds” in the mountainous and northern latitudes, but, is all of this necessary
3 to accomplish this? Might simpler methods (e.g. an isohyetal snowfall map) identify
4 snowmelt watersheds just as effectively?

5 Questions remain about using parameter sensitivity for identification of structural
6 inadequacies within the CONUS application and specifically, the PRMS model itself. A full
7 analysis of these parameter and how they relate to their respective process is beyond the scope
8 of this article, but it could relate to the structure of PRMS and possibly indicate that some
9 processes are overparameterized. In this application, certain hydrologic processes (e.g.
10 depression storage, streamflow routing, flow through lakes, and strong groundwater/surface-
11 water interaction) were not considered because of additional data requirements and
12 parameterization complexity. The PRMS model also allows for selection of alternative
13 methods for many of the module types. Each of these modules uses different equations and
14 calibration parameters. Future work might be to determine the effect of using different
15 modules or maybe even to determine the selection of the PRMS modules through sensitivity
16 analysis. Just as the spatial and temporal scope of any modeling project must be defined, the
17 scope of the hydrologic processes, and the detail to which these processes are simulated, must
18 be likewise defined. Also, alternative ways of defining HRUs (e.g. larger or smaller, or even
19 based on dominant process instead of geographic location) could affect the analysis. ~~Perhaps
20 sensitivity analysis could help define this in a more objective way.~~ Model development and
21 application could perhaps proceed by first accounting for those factors that have the most
22 effect.

23 **5 Conclusion**

24 Watersheds in the real world clearly exhibit hydrologic behavior determined by dominant
25 processes based on geographic location (i.e. land surface conditions and climate forcings). A
26 methodology has been developed to identify regions, watersheds, and HRUs according to
27 dominant process(es) on the basis of parameter sensitivity response with respect to a
28 distributed-parameter hydrology model. The parameters in this model were divided into two
29 groups – those that are used for model calibration and those that were not. A global
30 parameter sensitivity analysis was performed on the calibration parameters for all HRUs ~~of~~
31 derived for the conterminous United States. Categories of parameter sensitivity were
32 developed in various ways, on the basis of geographic location, hydrologic process, and

1 model response. Visualization of these categories provides insight into model performance,
2 and useful information about how to structure the modeling application should take advantage
3 of as much local information as possible.

4 By definition, an insensitive parameter is one that does not affect the output. Ideally, a
5 distributed-parameter hydrology model would have just a few calibration parameters, all of
6 them meaningful, each controlling the algorithms related to the corresponding process. This
7 would result in low parameter interaction and a clear correspondence between input and
8 output. However, this is not always the case, and despite the fact that parameter interaction is
9 unavoidable in these types of models, this behavior is also seen in the real world. For
10 instance, in watersheds where evaporation is very high, antecedent soil moisture is affected,
11 which has a direct influence on infiltration. The real world process of evaporation has an
12 effect on infiltration, just as evaporation parameters have an effect on simulation of
13 infiltration in watershed hydrology models.

14 [Application of distributed-parameter hydrologic modeling application require that the the](#)
15 [uncertainty problem and the calibration problem be addressed at the same time. While, the](#)
16 [user of a DPHM can do nothing about the complexity of the model's internal structure, the](#)
17 [apparent complexity can be reduced by limiting the parameters and the affected output under](#)
18 [consideration \(as described by Jakeman and Hornberger, 1993; Hay et al., 2006\) .](#)

19 In conclusion, results of this study indicate that it is possible to identify the influence of
20 different hydrologic processes when simulating with a distributed-parameter hydrology model
21 on the basis of parameter sensitivity analysis. Factors influencing this analysis include
22 geographic area, topography, land cover, soil, geology, climate, and other unidentified
23 physical effects. Identification of these processes allows the modeler to focus on the more
24 important aspects of the model input and output, which can simplify all facets of the
25 hydrologic modeling application.

26

1 **Data availability**

2 The Precipitation-Runoff Modeling System software used in this study is developed,
3 documented, and distributed by the U.S. Geological Survey. It is in the public domain and
4 freely available from their web site (<http://wwwbrr.cr.usgs.gov/prms>). Data analysis and
5 plotting is done with the R software package (<http://www.r-project.org>), which is freely
6 available, subject to the GNU General Public License.

7 The climate forcing data set used in this study came from the U.S. Geological Survey Geo
8 Data Portal (<http://cida.usgs.gov/climate/gdp>). The HRU delineation and default
9 parameterization came from the U.S. Geological Survey GeoSpatial Fabric
10 (http://wwwbrr.cr.usgs.gov/projects/SW_MoWS/GeospatialFabric.html). Finally, the
11 parameter sensitivity output values that were used to make the maps and tables in this article
12 are available at <ftp://brrftp.cr.usgs.gov/pub/markstro/hess>.

13

1 **References**

- 2 [Ali, G., Tetzlaff, D., Soulsby, C., McDonnell, J. and Capell, R.: A comparison of similarity](#)
3 [indices for catchment classification using a cross-regional dataset, *Advances in Water*](#)
4 [*Resources*, 40:11-22, doi: 10.1016/j.advwatres.2012.01.008, 2012.](#)
- 5 Amorochó, J. and Hart, W. E.: A critique of current methods in hydrologic systems
6 investigation, *Trans. Am. Geophys. Un.*, 45, 307-321, 1964.
- 7 Archfield, S. A., Kennen, J. G., Carlisle, D. M., and Wolock, D. M.: An objective and
8 parsimonious approach for classifying nature flow regimes at a continental scale, *River*
9 *Research and Applications*, 30, 9, 1166-1183, 2014.
- 10 Battaglin, W. A., Hay, L. E., and Markstrom, S. L.: Simulating the potential effects of climate
11 change in two Colorado Basins and at two Colorado ski areas, *Earth Interactions*, 15, 22, 1–
12 23, 2011.
- 13 [Beven, K., *Changing ideas in hydrology—The case of physically-based models*, *J. Hydrol.*,](#)
14 [105, 157–172, 1989.](#)
- 15 Beven, K: A manifesto for the equifinality thesis, *Journal of Hydrology*, 320, 18-36, doi:
16 10.1016/j.jhydrol.2005.07.007, 2006.
- 17 Bock, A. R., Hay, L. E., McCabe, G. J., Markstrom, S. L., and Atkinson, R. D.: Parameter
18 regionalization of a monthly water balance model for the conterminous United States. *Hydrol.*
19 *Earth Syst. Sci. Discuss.*, 12, 10023-10066, doi:10.5194/hessd-12-10023-2015, 2015.
- 20 Bower, D. E.: Evaluation of the Precipitation-Runoff Modeling System, Beaver Creek,
21 Kentucky, U.S. Geological Survey Scientific Investigations Report 84–4316, 39, 1985.
- 22 Boyle, D. P., Lamorey, G. W., Huggins, A. W.: Application of a hydrologic model to assess
23 the effects of cloud seeding in the Walker River basin, Nevada, *Journal of Weather*
24 *Modification*, 38, 66–67, 2006.
- 25 Brun, R., Reichert, P., and Kunsch, H. R.: Practical identifiability analysis of large
26 environmental simulation models, *Water Resources Research*, 37, 1015-1030, doi:
27 10.1029/2000wr900350, 2001.

1 Cary, L. E.: Techniques for estimating selected parameters of the U.S. Geological Survey's
2 Precipitation-Runoff Modeling System in eastern Montana and northeastern Wyoming, U.S.
3 Geological Survey Water-Resources Investigations Report 91-4068, 39, 1991.

4 Chaney, N. W., Herman, J. D. Reed, P. M., and Wood, E. F.: Flood and drought hydrologic
5 monitoring: the role of model parameter uncertainty, *Hydrology and Earth System Sciences*,
6 19, 7, 3239-3251, 2015.

7 Clark, M. P. and J. A. Vrugt: Unraveling uncertainties in hydrologic model calibration:
8 Addressing the problem of compensatory parameters, *Geophysical Research Letters*, 33, doi:
9 10.1029/2005gl025604, 2006.

10 Cukier, R. I., Fortuin, C. M., and Shuler, K. E.: Study of the sensitivity of coupled reaction
11 systems to uncertainties in rate coefficients I, *J. Chem. Phys.*, 59, 8, 3873-3878, 1973.

12 Cukier, R. I., Schaibly, J. H., and Shuler, K. E.: Study of the sensitivity of coupled reaction
13 systems to uncertainties in rate coefficients III, *J. Chem. Phys.*, 63, 3, 1140-1149, 1975.

14 [Cuntz, M., Mai, J., Zink, M., Thober, S., Kumar, R., Schafer, D., Schron, M., Craven, J.,](#)
15 [Rakovec, O., Spieler, D., Prykhodko, V., Dalmaso, G., Musuuza, J., Langenberg, B.,](#)
16 [Attinger, S., and Samaniego, L.: Computationally inexpensive identification of](#)
17 [noninformative model parameters by sequential screening, *Water Resour. Res.*, 51, 6417-](#)
18 [6441, doi:10.1002/2015WR016907, 2015.](#)

19 [Duan, Q., Schaake, J., Andréassian, V., Franks, S., Goteti, G., Gupta, H. V., Gusev, Y. M.,](#)
20 [Habets, F., Hall, A., Hay, L., Hogue, T., Huang, M., Leavesley, G., Liang, X., Nasonova, O.](#)
21 [N., Noilhan, J., Oudin, L., Sorooshian, S., Wagener, T. & Wood, E. F.: Model Parameter](#)
22 [Estimation Experiment \(MOPEX\): An overview of science strategy and major results from](#)
23 [the second and third workshops, *J. Hydrol.* 320, 3-17, 2006.](#)

24 Dudley, R. W.: Simulation of the quantity, variability, and timing of streamflow in the
25 Dennys River Basin, Maine, by use of a precipitation-runoff watershed model, U.S.
26 Geological Survey Scientific Investigations Report 2008-5100, 44, 2008.

27 Ewan, J.: Hydrograph matching method for measuring model performance, *Journal of*
28 *Hydrology*, 408, 178-187, doi:10.1016/j.jhydrol.2011.07.038, 2011.

29 Freeze, R. A. and Harlan, R. L.: Blueprint for a physically-based, digitally-simulated
30 hydrologic response model, *Journal of Hydrology*, 9, 237-258, 1969.

1 [Grayson, R. B., Moore, I. D. and McMahon, T. A.: Physically based hydrologic modeling, 2,](#)
2 [Is the concept realistic? Water Resour. Res., 28, 2659-2666, 1992.](#)

3 Gupta, H. V., Clark, M. P., Vrugt, J. A., Abramowitz, G., and Ye, M.: Towards a
4 comprehensive assessment of model structural adequacy, *Water Resources Research*, 48, doi:
5 10.1029/2011wr011044, 2012.

6 Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean
7 squared error and NSE performance criteria: Implications for improving hydrological
8 modelling, *Journal of Hydrology*, 377, 80-91, doi: 10.1016/j.jhydrol.2009.08.003. 2009.

9 Gupta, H. V., Wagener, T., and Liu, Y. Q.: Reconciling theory with observations: elements of
10 a diagnostic approach to model evaluation, *Hydrological Processes*, 22, 3802-3813, doi:
11 10.1002/hyp.6989, 2008.

12 Guse, B., Reusser, D. E., and Fohrer, N.: How to improve the representation of hydrological
13 processes in SWAT for a lowland catchment – Temporal analysis of parameter sensitivity and
14 model performance, *Hydrol. Process.*, 28, 2651–2670, doi:10.1002/hyp.9777, 2014.

15 Hay, L. E., Leavesley, G. H., Clark, M. P., Markstrom, S. L., Viger, R. J., and Umemoto,
16 M.: Step-wise, multiple-objective calibration of a hydrologic model for a snowmelt-
17 dominated basin, *Journal of American Water Resources*, 42, 4, 891-900, 2006.

18 Hay, L. E., Markstrom, S. L., and Ward-Garrison, C. D. Watershed-scale response to climate
19 change through the 21st century for selected basins across the United States, *Earth*
20 *Interactions*, 15, 17, 1–37, 2011.

21 Hay, L. E. and Umemoto, M.: Multiple-objective stepwise calibration using Luca, U.S.
22 Geological Survey Open-File Report 2006-1323, 25, 2006.

23 Hrachowitz, M., O. Fovet, L. Ruiz, T. Euser, S. Gharari, R. Nijzink, J. Freer, H. H. G.
24 Savenije, and C. Gascuel-Oudou: Process consistency in models: The importance of system
25 signatures, expert knowledge, and process complexity, *Water Resour. Res.*, 50,
26 doi:10.1002/2014WR015484, 2014

27 Jakeman, A. and Hornberger, G.: How much complexity is warranted in a rainfall-runoff
28 model? *Water Resources Research*, 29, 2637-2649, 1993.

29 Kirchner, J. W., Hooper, R. P., Kendall, C., Neal, C., and Leavesley, G. H.: Testing and
30 validating environmental models, *Science of the Total Environment*, 183, 33-47, 1996.

1 Koczo, K. M., Markstrom, S. L., and Hay, L. E.: Effects of baseline conditions on the
2 simulated hydrologic response to projected climate change, *Earth Interactions*, 15, 27, 1–23,
3 2011.

4 Krause, P., Boyle, D. P., and Bäse, F.: Comparison of different efficiency criteria for
5 hydrological model assessment, *Adv. Geosci.*, 5, 89–97, 2005.

6 LaFontaine, J. H., Hay, L. E., Viger, R. J., Markstrom, S. L., Regan, R. S., Elliott, C. M., and
7 Jones, J. W.: Application of the Precipitation-Runoff Modeling System (PRMS) in the
8 Apalachicola–Chattahoochee–Flint River Basin in the southeastern United States, U.S.
9 Geological Survey Scientific Investigations Report 2013–5162, 118, 2013.

10 Markstrom, S. L., Hay, L. E., Ward-Garrison, C. D., Risley, J. C., Battaglin, W. A., Bjerklie,
11 D. M., Chase, K. J., Christiansen, D. E. Dudley, R. W., Hunt, R. J., Koczo, K. M., Mastin, M.
12 C., Regan, R. S., Viger, R. J., Vining, K. C., and Walker, J. F.: Integrated watershed scale
13 response to climate change for selected basins across the United States, U.S. Geological
14 Survey Scientific Investigations Report 2011–5077, 143, 2012.

15 Markstrom, S. L., Regan, R. S., Hay, L. E., Viger, R. J., Webb, R. M. T., Payn, R. A., and
16 LaFontaine, J. H.: PRMS-IV, the precipitation-runoff modeling system, version 4, U.S.
17 Geological Survey Techniques and Methods, book 6, chap. B7, 158,
18 <http://dx.doi.org/10.3133/tm6B7>, 2015.

19 Mayer, D. G., and Butler, D. G.: Statistical validation, *Ecological Modelling*, 68, 21–32, 1993.

20 McDonnell, J., Sivapalan, M., Vaché, K., Dunn, S., Grant, G., Haggerty, R., Hinz, C. Hooper,
21 R., Kirchner, J., and Roderick, M.: Moving beyond heterogeneity and process complexity: a
22 new vision for watershed hydrology, *Water Resources Research*, 43, doi:
23 10.1029/2006wr005467, 2007.

24 Mendoza, P. A., Clark, M. P., Barlage, M., Rajagopalan, B., Samaniego, L., Abramowitz, G.,
25 and Gupta, H. V.: Are we unnecessarily constraining the agility of complex process-based
26 models? *Water Resources Research*, doi: 10.1002/2014WR015820, 2015a.

27 Mendoza, P. A., Clark, M. P., Mizukami, N., Newman, A. J., Barlage, M. E., Gutmann, D.
28 Rasmussen, R. M., Rajagopalan, B., Brekke, L. D., and Arnold, J. R.: Effects of hydrologic
29 model choice and calibration on the portrayal of climate change impacts, *Journal of*
30 *Hydrometeorology*, 16, 762–780, 2015b.

1 Merz, R., Blöschl, G.: Regionalisation of catchment model parameters, Journal of Hydrology
2 287, 95–123, 2004.

3 Newman, A. J., Clark, M. P., Sampson, K., Wood, A., Hay, L. E., Bock, A., Viger, R. J.,
4 Blodgett, D., Brekke, L., Arnold, J. R., Hopson, T., and Duan Q.: Development of a large-
5 sample watershed-scale hydrometeorological data set for the contiguous USA: data set
6 characteristics and assessment of regional variability in hydrologic model performance,
7 Hydrology and Earth System Sciences, 19, 1, 209-223, 2015.

8 Perrin, C., Michel, C., and Andreassian, V.: Does a large number of parameters enhance
9 model performance? Comparative assessment of common catchment model structures on 429
10 catchments, Journal of Hydrology, 242, 275-301, doi: 10.1016/s0022-1694(00)00393-0, 2001.

11 Pfannerstill, M., Guse, B., Reusser, D., and Fohrer, N.: Process verification of a hydrological
12 model using a temporal parameter sensitivity analysis, Hydrol. Earth Syst. Sci., 19, 4365–
13 4376, 2015, doi:10.5194/hess-19-4365-2015.

14 R Core Team: R: A language and environment for statistical computing, R Foundation for
15 Statistical Computing, Vienna, Austria. URL <http://www.R-project.org/>, 2015.

16 Reusser, D. E.: Implementation of the Fourier amplitude sensitivity test (FAST), R package
17 version 0.63. <http://CRAN.R-project.org/package=fast>, 2013.

18 Reusser, D. E., Buytaert, W., and Zehe E.: Temporal dynamics of model parameter sensitivity
19 for computationally expensive models with the Fourier amplitude sensitivity test, Water
20 Resour. Res., 47, W07551, doi:10.1029/2010WR009947, 2011.

21 Reusser, D.E., and Zehe, E.: Inferring model structural deficits by analyzing temporal
22 dynamics of model performance and parameter sensitivity. Water Resources Research, 47(7),
23 W07550. DOI:10.1029/2010WR009946, 2011.

24 Saltelli A., Ratto, Marco, Tarantola, Stefano: Sensitivity analysis practices: strategies for
25 model-based inference, Reliability Engineering & System Safety, 10, 91, 1109-1125, 2006.

26 Schaeffli, B. and Gupta, H. V.: Do Nash values have value? Hydrological Processes, 21, 2075-
27 2080, 2007.

28 Schaibly, J.H. and Shuler, K.E.: Study of the sensitivity of coupled reaction systems to
29 uncertainties in rate coefficients. II, applications, J. Chem. Phys., 59, 3879-3888, 1973.

1 Samaniego, L., R. Kumar, and Attinger, S.: Multiscale parameter regionalization of a grid-
2 based hydrologic model at the mesoscale. Water Resour. Res., 46, W05523,
3 doi:10.1029/2008WR007327, 2010.

4 Sanadhya, P., Giron J., and Arabi, M.: Global sensitivity analysis of hydrologic processes in
5 major snow-dominated mountainous river basins in Colorado, Hydrological Processes, 28,
6 34043418, doi:10.1002/hyp, 2013.

7 Seibert, J.: Regionalization of parameters for a conceptual rainfall-runoff model, Agricultural
8 and Forest Meteorology 98, 279–293, 1999.

9 Sivakumar, B.: Dominant processes concept in hydrology: moving forward, Hydrological
10 Processes, 18, 12, 2349-2353, 2004.

11 Sivakumar, B., Jayawardena, A. W., and Li W. K.: Hydrologic complexity and classification:
12 a simple data reconstruction approach, Hydrological Processes, 21, 20, 2713-2728, 2007.

13 Sivakumar, B. and Singh, V. P.: Hydrologic system complexity and nonlinear dynamic
14 concepts for a catchment classification framework, Hydrology and Earth System Sciences, 16,
15 11, 4119-4131, 2012.

16 Thornton, P. E., Thornton, M. M., Mayer, B. W., Wilhelm, N., Wei, Y., Devarakonda, R.,
17 and Cook, R.B.: Daymet: daily surface weather data on a 1-km grid for North America,
18 version 2. data set, Available on-line [<http://daac.ornl.gov>] from Oak Ridge National
19 Laboratory Distributed Active Archive Center, Oak Ridge, Tennessee, USA.
20 <http://dx.doi.org/10.3334/ORNLDAAAC/1219>, 2014.

21 van Werkhoven, K., Wagener, T., Reed, P., and Tang, Y.: Characterization of watershed
22 model behavior across a hydroclimatic gradient, Water Resour. Res., 44, W01429,
23 doi:10.1029/2007WR006271, 2008.

24 Viger, R. J.: Preliminary spatial parameters for PRMS based on the geospatial fabric,
25 NLCD2001 and SSURGO, U.S. Geological Survey,
26 <http://dx.doi.org/doi:10.5066/F7WM1BF7>, 2014.

27 Viger, R. J. and Bock, A.: GIS features of the geospatial fabric for national hydrologic
28 modeling, U.S. Geological Survey, <http://dx.doi.org/doi:10.5066/F7542KMD>, 2014.

29 Vogel, R.M.: Regional Calibration of Watershed Models. In: Singh, V.P., Frevert, D.F.
30 (Eds.), Chapter 3 in Watershed Models. CRC Press, 2005.

- 1 Wagener, T., McIntyre, N., Lees, M.J., Wheater, H.S., Gupta, H.V.: Towards reduced
2 uncertainty in conceptual rainfall–runoff modelling: dynamic identifiability analysis.
3 *Hydrological Processes*, 17, 455–476, 2003.
- 4 [Winter, T. C.: The concept of hydrologic landscapes, *Journal of the American Water*](#)
5 [Resources Association](#), 37: 335–349. doi:10.1111/j.1752-1688.2001.tb00973.x, 2001.
- 6 [Wolock, D.M., Winter, T.C., and McMahon, G.:](#) [Delineation and evaluation of hydrologic-](#)
7 [landscape regions in the United States using geographic information system tools and](#)
8 [multivariate statistical analyses, *Environmental Management*, vol. 34 \(Supplement 1\), p. S71-](#)
9 [S88. doi: 10.1007/s00267-003-5077-9, 2004.](#)
- 10 Woods, R.: Seeing catchments with new eyes, *Hydrological Processes*, 16, 1111–1113, 2002.
- 11 Yilmaz, K. K., Gupta, H. V., and Wagener, T.: A process-based diagnostic approach to model
12 evaluation: Application to the NWS distributed hydrologic model, *Water Resour. Res.*, 44,
13 W09417, doi:10.1029/2007WR006716, 2008.
- 14

1 Tables

2 Table 1. Precipitation Runoff Modeling System (PRMS) calibration parameters used in this
 3 study. The values in the column labeled “PRMS module” identify the module type equation(s)
 4 from the PRMS source code (see Markstrom et al., 2015).

Parameter name	Description	PRMS module	Range
adjmix_rain	Factor to adjust rain proportion in a mixed rain/snow event	climate	0.6—1.4
tmax_allrain	Maximum air temperature above which precipitation is rain	climate	-8.0—60.0
tmax_allsnow	Maximum air temperature below which precipitation is snow	climate	-10.0—40.0
dday_intcp	Intercept in degree-day equation	solar radiation	-60.0—10.0
dday_slope	Slope in degree-day equation	solar radiation	0.2—0.9
ppt_rad_adj	Solar radiation adjustment threshold for precipitation days	solar radiation	0.0—0.5
radj_sppt	Solar radiation adjustment on summer precipitation days	solar radiation	0.0—1.0
radj_wppt	Solar radiation adjustment on winter precipitation days	solar radiation	0.0—1.0
radmax	Maximum solar radiation due to atmospheric effects	solar radiation	0.1—1.0
tmax_index	Temperature to determine precipitation adjustments to solar radiation	solar radiation	-10.0—110.0
jh_coef	Coefficient used in Jensen-Haise potential ET computations	Potential ET	0.005—0.06
jh_coef_hru	Coefficient used in Jensen-Haise potential ET computations	Potential ET	5.0—25.0
srain_intcp	Summer rain interception storage capacity	interception	0.0—1.0
wrain_intcp	Winter rain interception storage capacity	interception	0.0—1.0
cecn_coef	Convection condensation energy coefficient	snow	2.0—10.0
emis_noppt	Average emissivity of air on days without precipitation	snow	0.757—1.0
freeh2o_cap	Free-water holding capacity of snowpack	snow	0.01—0.2
potet_sublim	Snow sublimation fraction of potential ET	snow	0.1—0.75
carea_max	Maximum area contributing to surface runoff	surface runoff	0.0—1.0
smidx_coef	Non-linear contributing area coefficient	surface runoff	0.001—0.06
smidx_exp	Exponent in non-linear contributing area coefficient	surface runoff	0.1—0.5
fastcoef_lin	Linear coefficient in equation to route preferential-flow	soil-zone	0.001—0.8
fastcoef_sq	Non-linear coefficient in equation to route preferential-flow	soil-zone	0.001—1.0
pref_flow_den	Fraction of the soil zone in which preferential flow occurs	soil-zone	0.0—0.1
sat_threshold	Water capacity between field capacity and total saturation	soil-zone	1.0—999.0
slowcoef_lin	Linear coefficient for interflow routing	soil-zone	0.001—0.5
slowcoef_sq	Non-linear coefficient for interflow routing	soil-zone	0.001—1.0
soil2gw_max	Maximum soil water excess that is routed directly to groundwater	soil-zone	0.0—0.5
soil_moist_max	Maximum available water holding capacity of soil-zone	soil-zone	0.001—10.0
soil_rechr_max	Maximum available water holding capacity of recharge zone	soil-zone	0.001—5.0
ssr2gw_exp	Non-linear coefficient in equation used to route soil-zone water to groundwater	soil-zone	0.0—3.0
ssr2gw_rate	Linear coefficient in equation used to route soil-zone water to	soil-zone	0.05—0.8

	<u>groundwater</u>		
<u>transp_tmax</u>	<u>Temperature that determines start of the transpiration period</u>	<u>soil-zone</u>	<u>0.0—1000.0</u>
<u>gwflow_coef</u>	<u>Linear groundwater discharge coefficient</u>	<u>groundwater</u>	<u>0.001—0.5</u>
<u>carea_max</u>	<u>Maximum area contributing to surface runoff</u>	<u>surface runoff</u>	
<u>cecn_coef</u>	<u>Convection condensation energy coefficient</u>	<u>snow</u>	
<u>dday_intep</u>	<u>Intercept in degree-day equation</u>	<u>solar radiation</u>	
<u>dday_slope</u>	<u>Slope in degree-day equation</u>	<u>solar radiation</u>	
<u>emis_noppt</u>	<u>Average emissivity of air on days without precipitation</u>	<u>snow</u>	
<u>fastcoef_lin</u>	<u>Linear coefficient in equation to route preferential flow</u>	<u>soil-zone</u>	
<u>fastcoef_sq</u>	<u>Non-linear coefficient in equation to route preferential flow</u>	<u>soil-zone</u>	
<u>freeh2o_cap</u>	<u>Free water holding capacity of snowpack</u>	<u>snow</u>	
<u>gwflow_coef</u>	<u>Linear groundwater discharge coefficient</u>	<u>groundwater</u>	
<u>jh_coef</u>	<u>Coefficient used in Jensen-Haise potential ET computations</u>	<u>Potential ET</u>	
<u>jh_coef_hru</u>	<u>Coefficient used in Jensen-Haise potential ET computations</u>	<u>Potential ET</u>	
<u>potet_sublim</u>	<u>Snow sublimation fraction of potential ET</u>	<u>snow</u>	
<u>ppt_rad_adj</u>	<u>Solar radiation adjustment threshold for precipitation days</u>	<u>solar radiation</u>	
<u>pref_flow_den</u>	<u>Fraction of the soil zone in which preferential flow occurs</u>	<u>soil-zone</u>	
<u>rad_trnef</u>	<u>Winter transmission coefficient for short-wave radiation</u>	<u>snow</u>	
<u>radj_sppt</u>	<u>Solar radiation adjustment on summer precipitation days</u>	<u>solar radiation</u>	
<u>radj_wppt</u>	<u>Solar radiation adjustment on winter precipitation days</u>	<u>solar radiation</u>	
<u>radmax</u>	<u>Maximum solar radiation due to atmospheric effects</u>	<u>solar radiation</u>	
<u>sat_threshold</u>	<u>Water capacity between field capacity and total saturation</u>	<u>soil-zone</u>	
<u>slowcoef_lin</u>	<u>Linear coefficient for interflow routing</u>	<u>soil-zone</u>	
<u>slowcoef_sq</u>	<u>Non-linear coefficient for interflow routing</u>	<u>soil-zone</u>	
<u>smidx_coef</u>	<u>Non-linear contributing area coefficient</u>	<u>surface runoff</u>	
<u>smidx_exp</u>	<u>Exponent in non-linear contributing area coefficient</u>	<u>surface runoff</u>	
<u>soil2gw_max</u>	<u>Maximum soil water excess that is routed directly to groundwater</u>	<u>soil-zone</u>	
<u>soil_moist_max</u>	<u>Maximum available water holding capacity of soil-zone</u>	<u>soil-zone</u>	
<u>soil_rechr_max</u>	<u>Maximum available water holding capacity of recharge zone</u>	<u>soil-zone</u>	
<u>srain_intep</u>	<u>Summer rain interception storage capacity</u>	<u>interception</u>	
<u>ssr2gw_exp</u>	<u>Non-linear coefficient in equation used to route soil-zone water to groundwater</u>	<u>soil-zone</u>	
<u>ssr2gw_rate</u>	<u>Linear coefficient in equation used to route soil-zone water to groundwater</u>	<u>soil-zone</u>	
<u>tmax_allrain</u>	<u>Maximum air temperature above which precipitation is rain</u>	<u>climate</u>	
<u>tmax_allsnow</u>	<u>Maximum air temperature below which precipitation is snow</u>	<u>climate</u>	
<u>tmax_index</u>	<u>Temperature to determine precipitation adjustments to solar radiation</u>	<u>solar radiation</u>	
<u>transp_tmax</u>	<u>Temperature that determines start of the transpiration period</u>	<u>evaporation</u>	
<u>wrain_intep</u>	<u>Winter rain interception storage capacity</u>	<u>interception</u>	

1 Table 2. Ordered list of most sensitive Precipitation-Runoff Modeling System calibration
2 parameters by process and performance statisticmeasure. The parameters listed in each cell of
3 the table are those that are required to account for 90 percent of the cumulative sensitivity
4 across all hydrologic response units (HRUs). The number in parentheses following the
5 parameter name is the proportion of the CONUS HRUs, in percent, in which that parameter is
6 part of the set that accounts for 90 percent of the cumulated sensitivity on an HRU-by-HRU
7 basis. These parameters are described in Table 1.

Process	Performance <u>StatisticMeasure</u>		
	Mean	CV	AR 1
Baseflow	jh_coef(100), soil_moist_max(91), dday_intcp(81), soil2gw_max(74), radmax(64), carea_max(37), jh_coef_hru(36)	gwflow_coef(48), soil_moist_max(40), jh_coef(28), soil2gw_max(28), smidx_coef(20), carea_max(16), tmax_allsnow(13), dday_intcp(12), smidx_exp(8)	gwflow_coef(48), soil_moist_max(44), soil2gw_max(22), carea_max(18)
Evapo- transpiration	jh_coef(100), soil_moist_max(96), dday_intcp(96), radmax(92), jh_coef_hru(62), smidx_coef(37), dday_slope(25)	radmax(100), jh_coef(100), soil_moist_max(95), dday_intcp(73), dday_slope(67), soil_rechr_max(34)	jh_coef(100), radmax(100), dday_slope(75), soil_moist_max(74), dday_intcp(67), soil_rechr_max(49)
Runoff	jh_coef(100), dday_intcp(96), soil_moist_max(96), radmax(93), jh_coef_hru(62), smidx_coef(37), dday_slope(26)	gwflow_coef(97), soil_moist_max(81), fastcoef_lin(76), pref_flow_den(71), carea_max(58), jh_coef(54), smidx_exp(49), smidx_coef(42), soil2gw_max(36), tmax_allsnow(15)	slowcoef_sq(90), soil2gw_max(90), gwflow_coef(82), carea_max(81), soil_moist_max(78), smidx_exp(72), smidx_coef(60), fastcoef_lin(36), pref_flow_den(35), jh_coef(30), slowcoef_lin(22)
Infiltration	smidx_exp(99), soil_moist_max(99), carea_max(99), smidx_coef(95), jh_coef(64), srain_intcp(50)	carea_max(80), tmax_allsnow(69), jh_coef(63), smidx_exp(62), srain_intcp(54), smidx_coef(54), tmax_allrain(48), radmax(37),	carea_max(72), soil_moist_max(64), smidx_exp(61), tmax_allsnow(60), srain_intcp(60), tmax_allrain(42), jh_coef(35), smidx_coef(24),

		freeh2o_cap(36), soil_moist_max(35), dday_intcp(31), rad_trncf(18)	freeh2o_cap(16), dday_intcp(16)
Snowmelt	tmax_allsnow(96), tmax_allrain(92)	tmax_allsnow(39), tmax_allrain(38), rad_trncf(9), freeh2o_cap(8), dday_intcp(7)	tmax_allsnow(34), dday_intcp(29), rad_trncf(28), radmax(24), tmax_allrain(17), jh_coef(15), freeh2o_cap(14), cecn_coef(14), emis_noppt(13), jh_coef_hru(13), potet_sublim(10)
Soil moisture	soil_moist_max(100), jh_coef(99), dday_intcp(94), radmax(82)	jh_coef(98), radmax(98), soil_moist_max(97), dday_intcp(94)	soil_moist_max(99), jh_coef(98), dday_intcp(89), radmax(35)
Surface runoff	smidx_exp(98), carea_max(98), soil_moist_max(98), smidx_coef(96), jh_coef(90), dday_intcp(33)	carea_max(93), smidx_exp(82), jh_coef(64), tmax_allsnow(55), smidx_coef(52), srain_intcp(33), soil_moist_max(23), tmax_allrain(22)	soil_moist_max(92), carea_max(83), jh_coef(65), smidx_exp(64), smidx_coef(42), tmax_allsnow(39), dday_intcp(25), srain_intcp(23), tmax_allrain(16), radmax(15)
Interflow	soil_moist_max(99), soil2gw_max(94), pref_flow_den(90), jh_coef(84), carea_max(65), smidx_exp(45), dday_intcp(31), smidx_coef(19)	fastcoef_lin(100), soil_moist_max(87), pref_flow_den(71), jh_coef(61), carea_max(49), soil2gw_max(29), smidx_exp(25), tmax_allsnow(17), dday_intcp(16)	soil_moist_max(96), fastcoef_lin(89), slowcoef_sq(83), carea_max(72), jh_coef(61), pref_flow_den(47), smidx_exp(47), ssr2gw_exp(40), soil2gw_max(26), dday_intcp(18), tmax_allsnow(16)
Parameters not sensitive			
adjmix_rain, fastcoef_sq, ppt_rad_adj, radj_sppt, radj_wppt, sat_threshold, ssr2gw_rate, tmax_index, transp_tmax, wrain_intcp			

1

2

1 Figures




2



3

4

- 1 Figure 1. Location Map of the conterminous United States showing the different geographic
- 2 regions referred to this study.
- 3

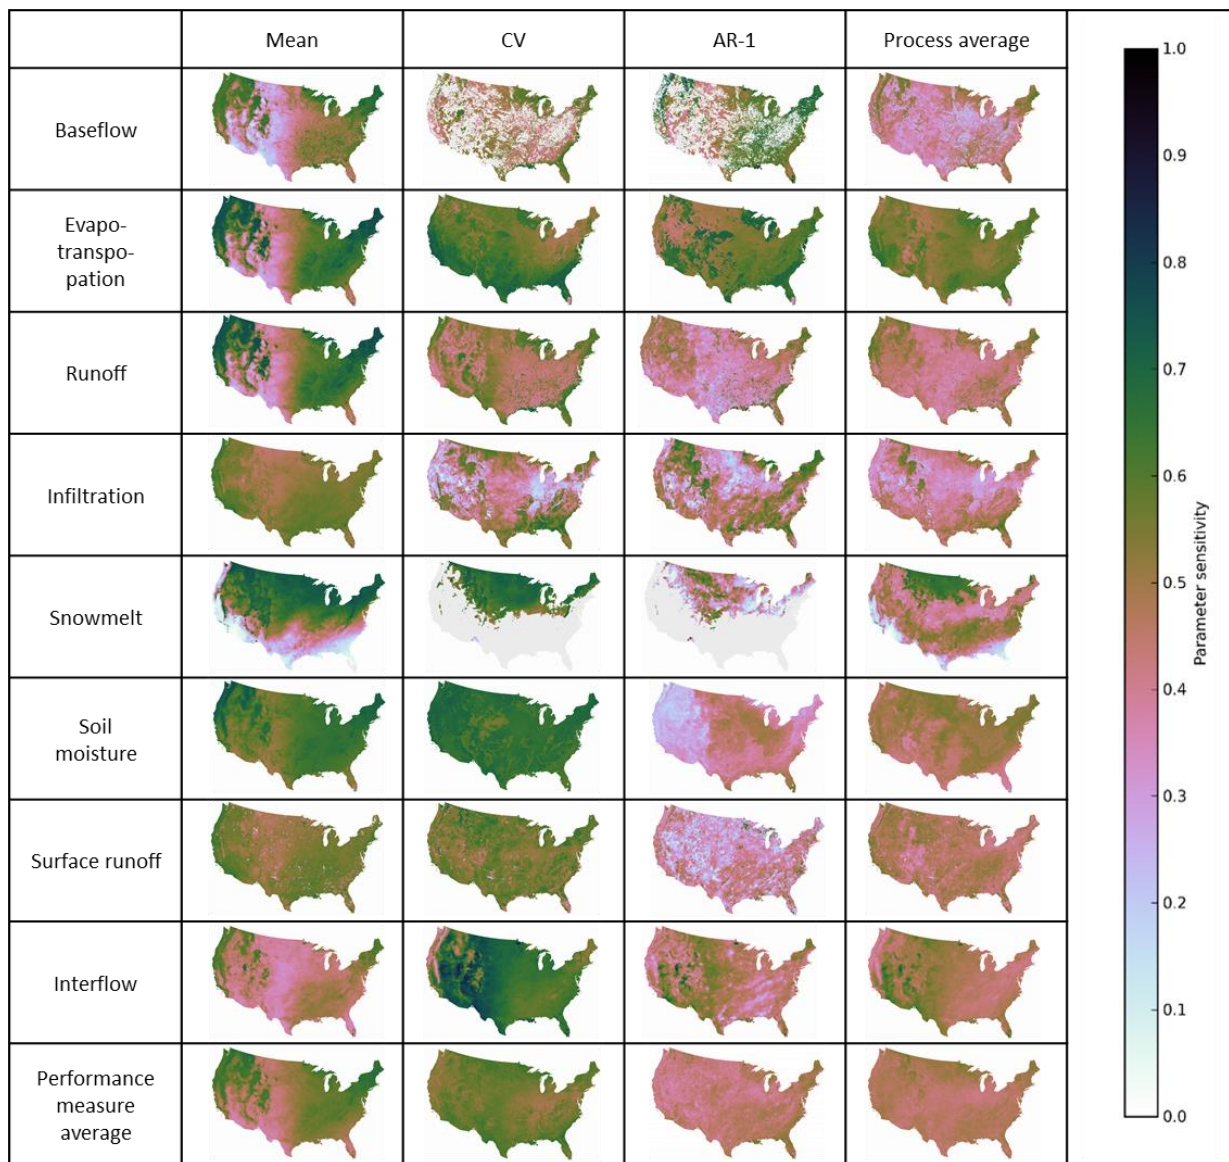



1

2 Figure 2. Maps of the conterminous United States showing Precipitation-Runoff Modeling
 3 System parameter sensitivity by Hydrologic Response Unit (HRU) by process and
 4 performance statisticmeasure. The HRUs parameter sensitivity is computed by summing the
 5 first-order sensitivity for all parameters. The process average maps are made by averaging
 6 the parameter sensitivity values computed for the different performance statistics measures.
 7 The performance statisticmeasure maps are made averaging the parameter sensitivity values
 8 computed for the different processes.

9

Number of calibration parameters

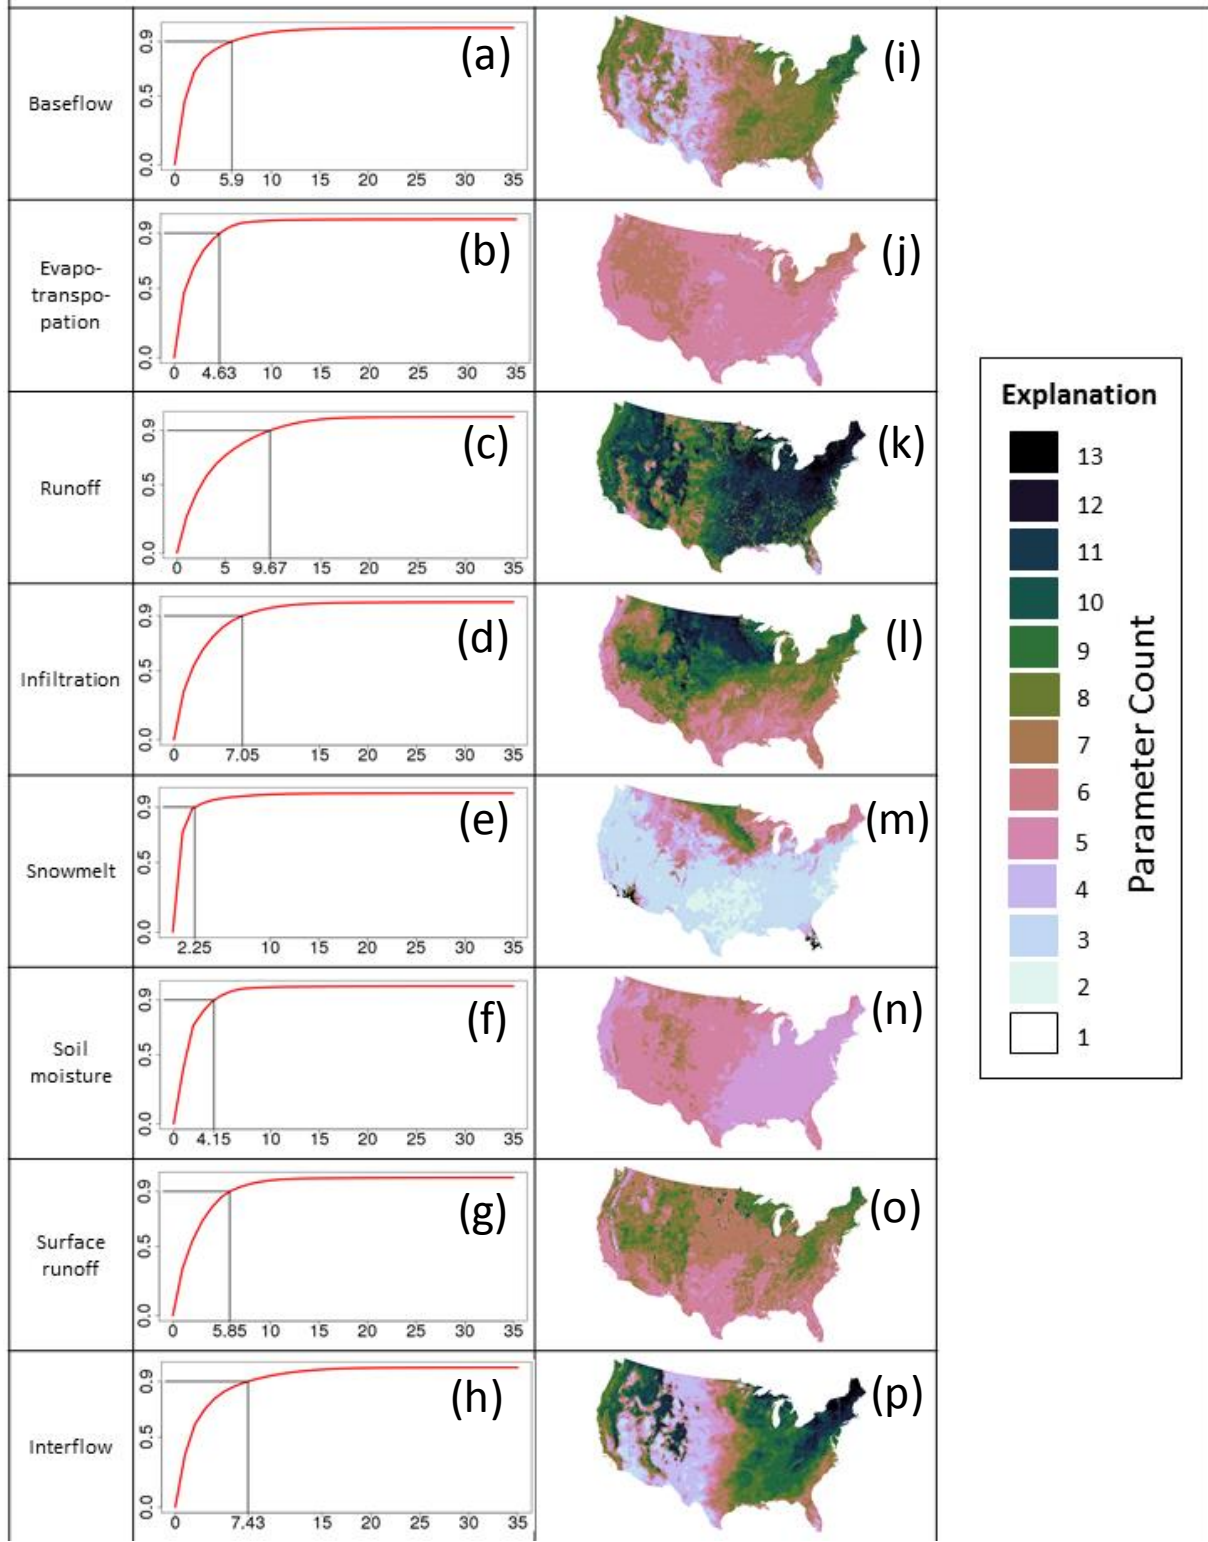

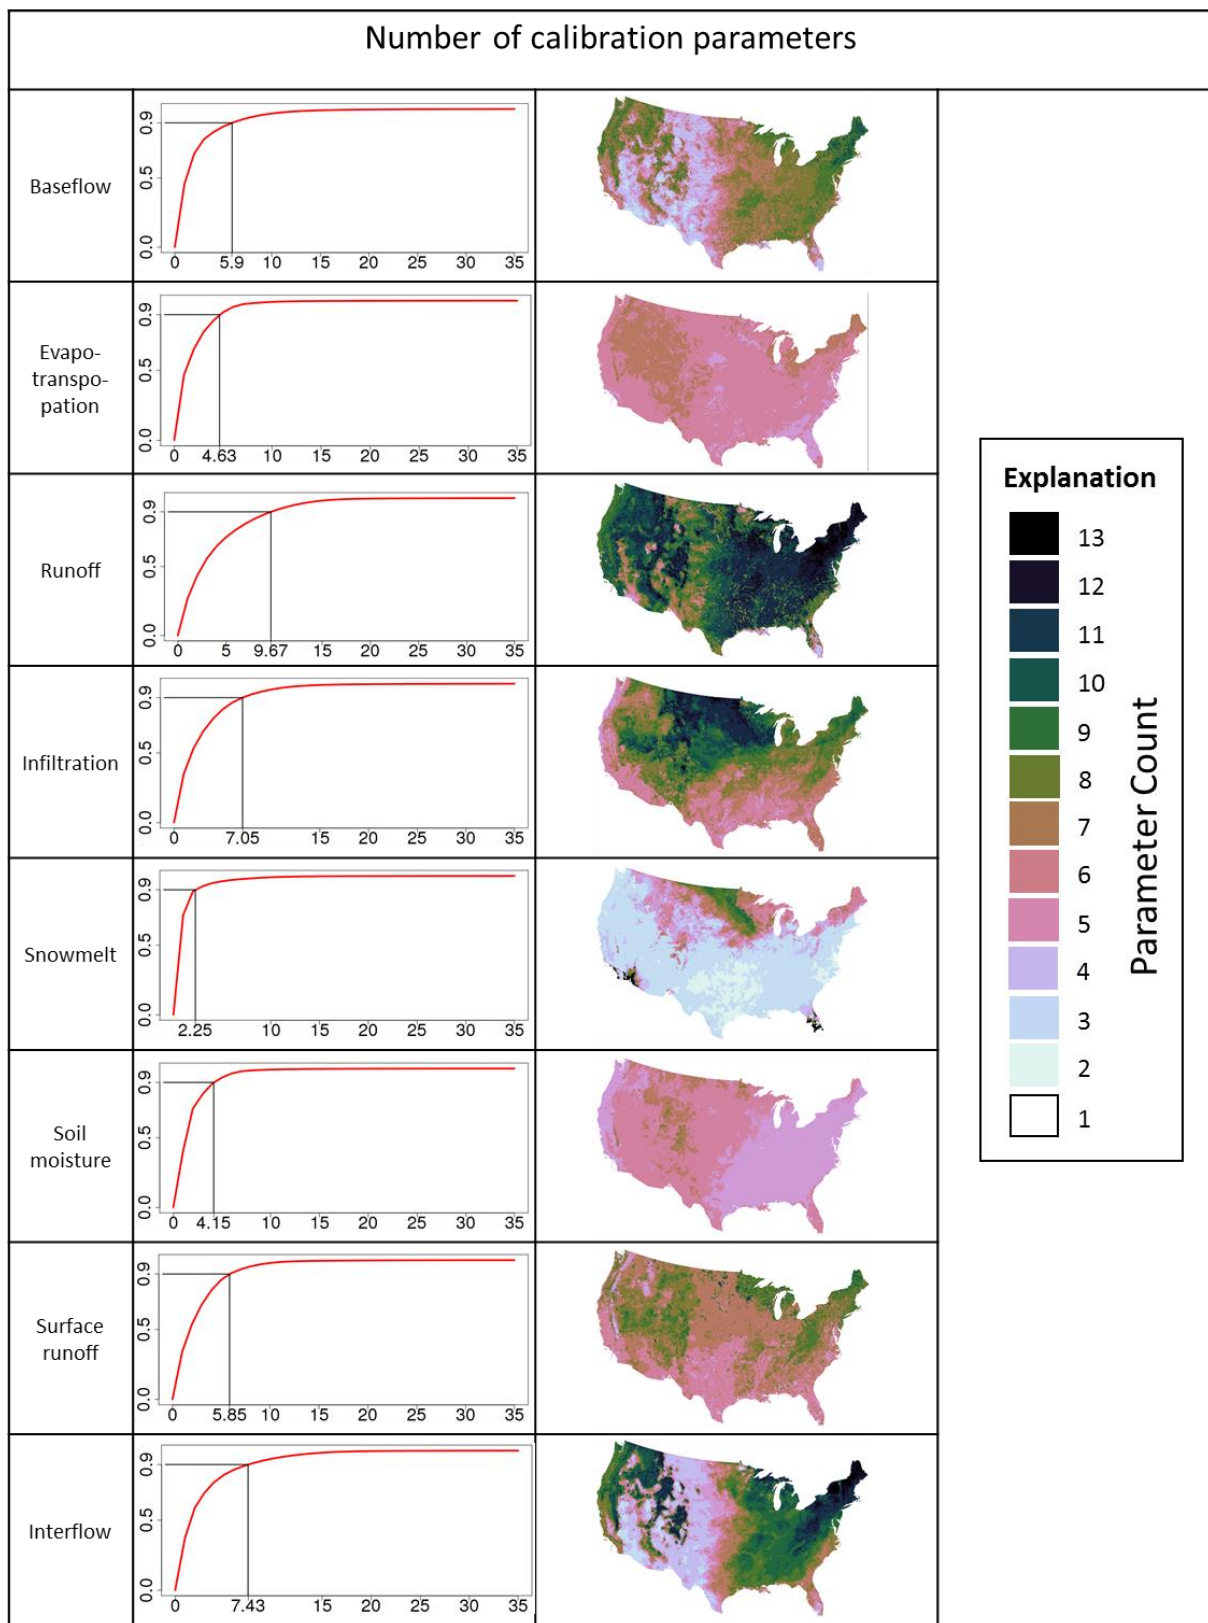


1


2 Figure 3. Cumulative parameter sensitivity across all Hydrologic Response Units (HRUs) in
 3 the CONUS Precipitation-Runoff Modeling System application are shown by process. The
 4 plots (a)—(h) show the parameter count necessary to account for 90% of the cumulative

1 parameter sensitivity, summarized across all HRUs. For this count, the parameters are ranked
2 and summed until the 90% level is reached. The maps (i)—(p) show the count of ranked
3 parameters required to reach the 90% level on an HRU-by-HRU basis, by process.

4

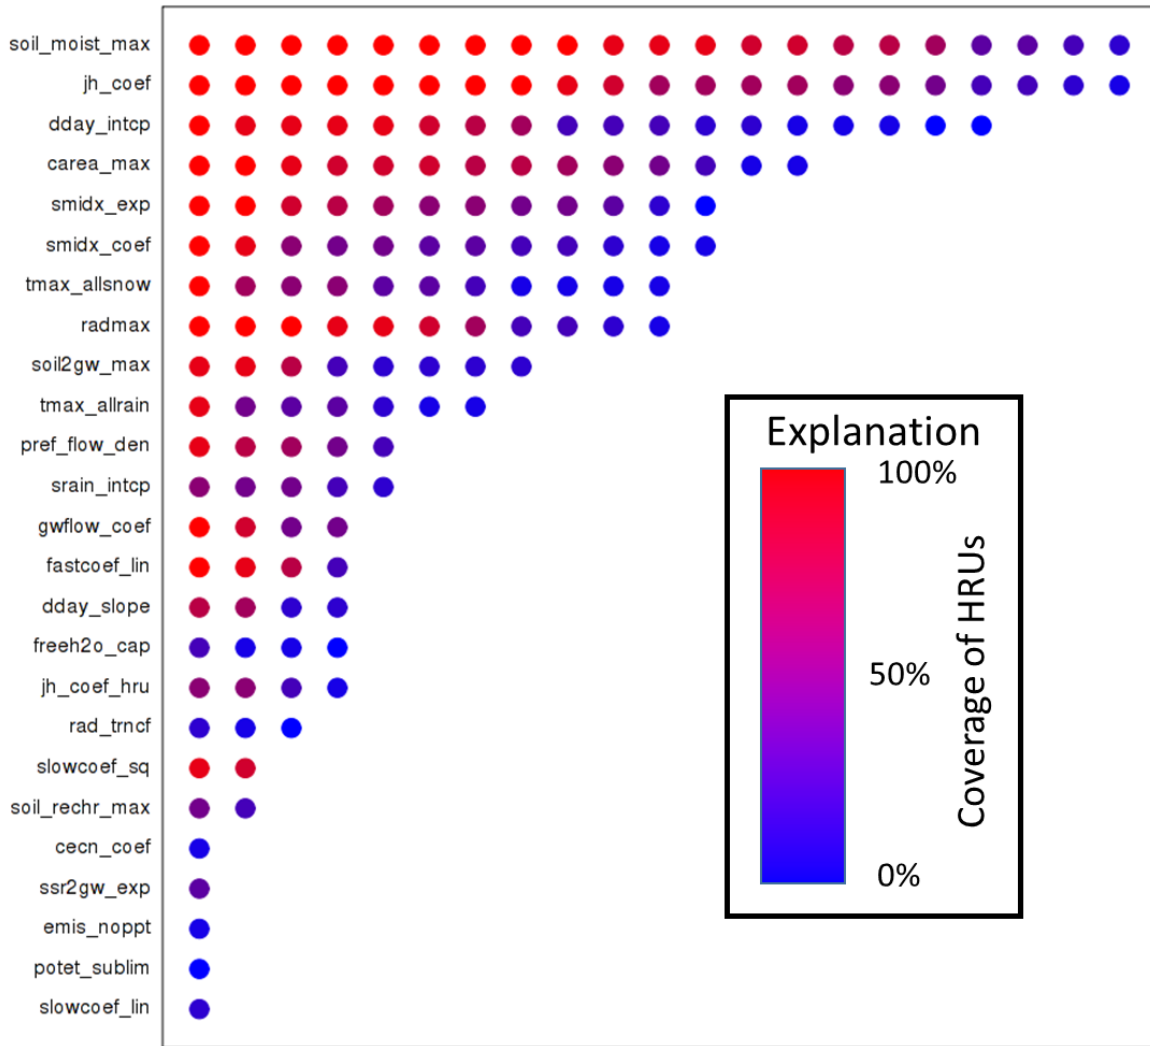

Parameter Occurrence

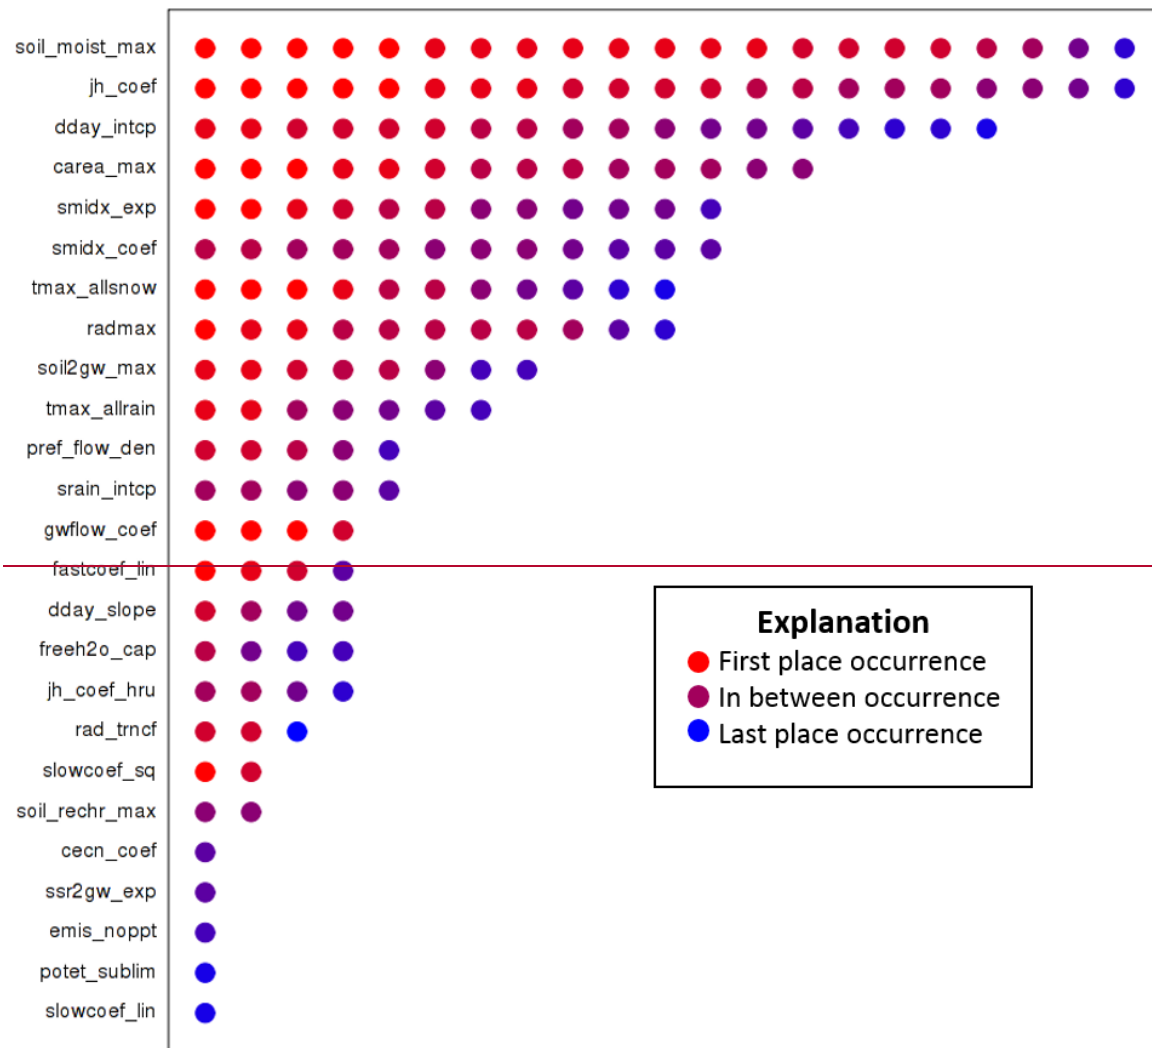


Parameter Occurrence

1

2 Figure 4. Summarizes the frequency of occurrence of the different calibration parameters in
 3 the process/performance statistic/measure categories of Table 2. The circles in each row
 4 adjacent to a parameter name indicate how many times the respective parameter occurs in
 5 these different categories. ~~The color of each circle indicates the ranking of that occurrence~~
 6 ~~within the category, red corresponding to a higher ranking than blue.~~ Parameters with more
 7 circles are affecting more process categories. The color of each circle indicates the extent of
 8 the spatial coverage of that occurrence, specifically, rRed circles (as opposed to blue) indicate
 9 that more Hydrologic Response Units are affected by the respective parameter.

10

11

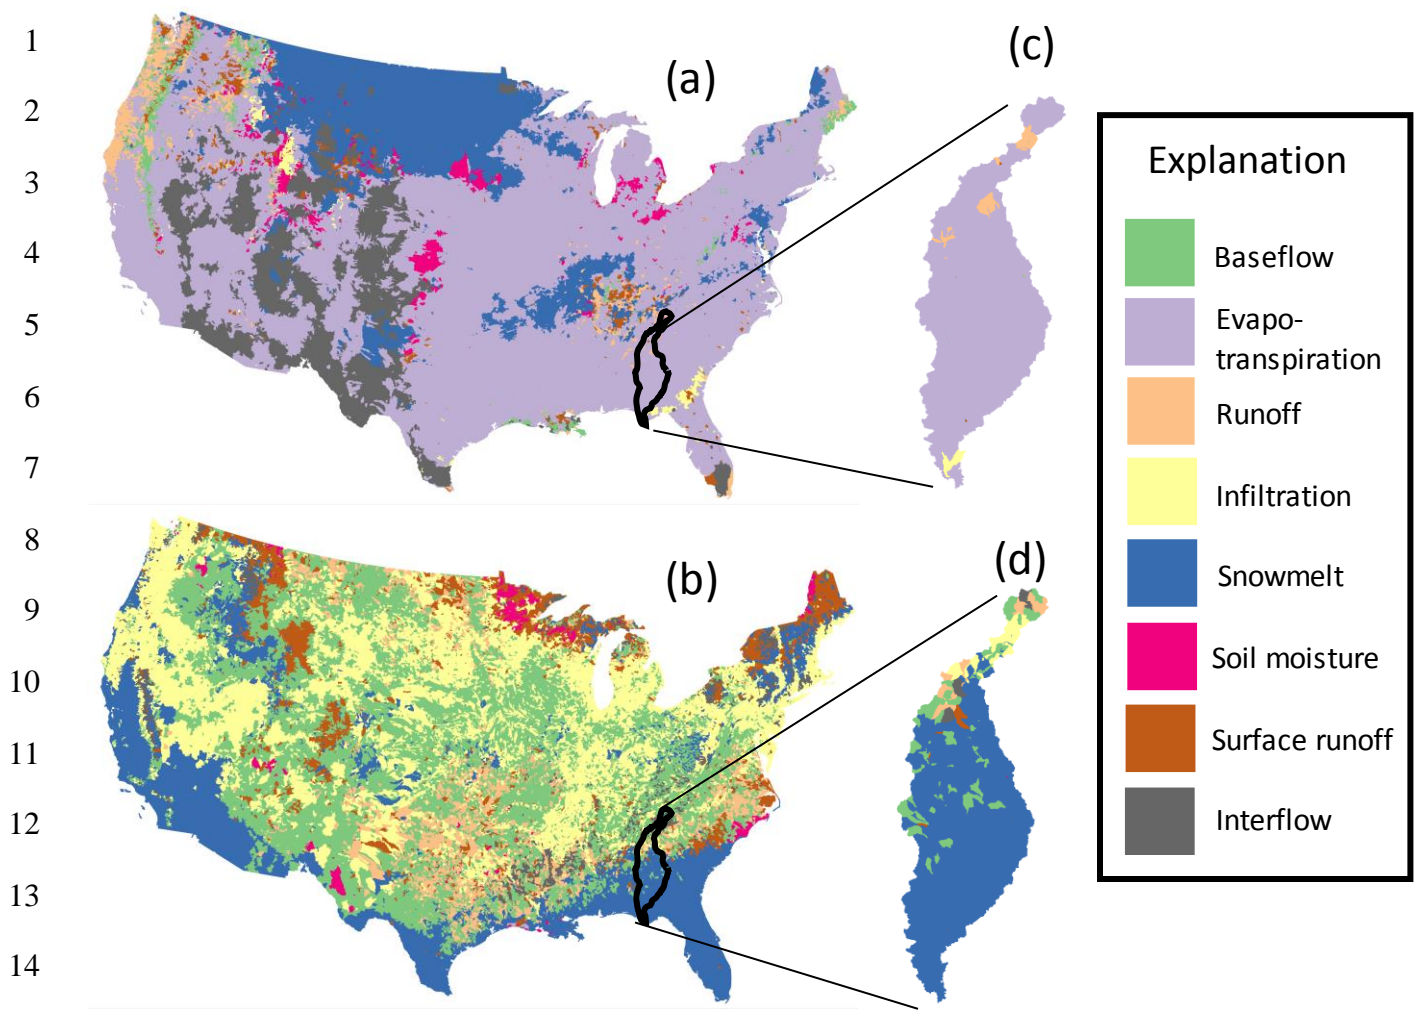

19 Figure 5. Precipitation-Runoff Modeling System parameter sensitivity organized by process
 20 ranked for each hydrologic response unit for the entire conterminous United States (maps (a)
 21 and (b)) and for the Apalachicola – Chattahoochee – Flint River basin (maps (c) and (d)). The
 22 maps on the top ((a) and (c)) show the most dominant ~~dominate~~ process, while the maps on
 23 the bottom ((b) and (d)) show the most inferior process.

24