

Hydrology and Earth System Sciences (HESS) paper number hess-2015-544
**A Bayesian Consistent Dual Ensemble Kalman Filter for State-Parameter
Estimation in Subsurface Hydrology**
by B. Ait-El-Fquih, M.E. Gharamti and I. Hoteit

Dear Professor Mauro Giudici,

First, we would like to thank you for giving us a chance to revise the manuscript. We also would like to thank you, as well as the referees, for all the constructive suggestions and comments you have made throughout the review process of our manuscript.

We have done our best to address your concerns as well as those of Referee #3. In particular, we have addressed your main suggestions, about improving the description of the novelty of our approach in the introduction section, and the discussion of the numerical (test case) results more highlighting how much they can be generalized and applicable to real case studies. We have further described in details the main concerns of Referee #3 as making clearer how the ensemble of members is initialized, among others.

All your comments and those of Referee #3 were carefully considered in the revised manuscript and detailed replies are given below.

We thank you again for all your editorial efforts.

Sincerely yours,
B. Ait-El-Fquih, M.E. Gharamti and I. Hoteit

- Reply to Editor -

Main concerns

C1. *The novelty of the paper is described in a more appropriate way in the revised version of the manuscript (in sections 2 and 3), but it should be clear also from the introductory section.*

R1. We have followed the editor's suggestion to highlight more the novelty of our work in the introduction section. Thank you.

C2. *The numerical test has a purely "numerical" value, because the values of conductivity, recharge and well extractions are not realistic. Sorry to insist on this problem, but I am very convinced that it need to be fixed. At line 388, please erase "that is similar to a real-world application", or at least reformulate the sentence, because it seems to claim that the aquifer system under study is realistic, which is not the case.*

Reply to comment 7 of the Referee #1 is not satisfactory. Above all, it should be clearly stated in the text that the conductivity field and the well pumping rates are not realistic. The average pumping rate for PW2 is about 2 nanoliters/second, if I performed correctly the units transformation! I am sure that you agree that this is a senseless value for real case studies. I understand that an increase of this value would cause drying of the aquifer, because the average conductivity is excessively (and unrealistically) small! Then, I expect you can add a discussion about the generalisation of the numerical results of this paper to real case studies. In other words, are your conclusion, still valid (not only from a qualitative point of view, but also from the quantitative point of view), for a real life application? Can you prove this?

R2. We thank the editor for the comment. We have deleted "that is similar to a real-world application" and revised the corresponding sentence in the revised manuscript. We agree that the values assigned for conductivity and recharge rates are perhaps smaller than what is generally used in real-applications. This however should not affect the performance of the tested schemes. This is now acknowledged in the revised manuscript as suggested by the reviewer.

Technical comments

C1. *Line 149: Please, provide an explicit definition of $\theta_{|n-1}^{(m)}$, in order to facilitate the reader. Please, rephrase “representing”.*

R1. $\theta_{|n-1}^{(m)}$ is now explicitly defined in the revised manuscript and the term “representing” replaced by “sampled from”. Thank you.

C2. *Line 158: Please, rephrase “the mean of...”, possibly using the same symbol for expected value as used in equation (2).*

R2. This sentence is now rephrased to: “The state forecast estimate, which is the mean of $p(\mathbf{x}_n|\mathbf{y}_{0:n-1})$ (i.e., $\mathbb{E}_{p(\mathbf{x}_n|\mathbf{y}_{0:n-1})}[\mathbf{x}_n]$), is taken as the empirical mean of the forecast ensemble, $\hat{\mathbf{x}}_n^f$.” Thank you.

C3. *Line 183: If I understand correctly, the previous steps are the same as for Dual EnKF. If so, please, state it explicitly; if not, please clarify the difference.*

R3. Correct, the parameter subfilter of the Dual-EnKF computes the parameters ensemble members exactly as in the Joint-EnKF (eqs. (5), (6), (8)). This is now explicitly stated in line 181 of the revised manuscript. Thank you.

C4. *Line 197: Substitute “geophysics” with “geophysical”.*

R4. Done. Thank you.

C5. *Line 376: Information about the height of the impermeable bottom of the aquifer, which is necessary to compute b , is missing.*

R5. Here we just assume the value of b as 25 m. Again, we would like to mention that this is similar to what Bailey and Baù (2010) have considered in their assimilation study (as already mentioned in the manuscript).

C6. *Line 377. Substitute “Neumann with no flow conditions” with “impermeable”.*

R6. Done. Thank you.

C7. *Lines 385 & 386: Please, substitute “with a mean of $13 \log(m/s)$, a variance of $1.5 \log(m^2/s^2)$,” with “with a geometric mean of $10^{-13} m/s$, a variance of $Y = \log K$ of 1.5,”. I suggest you to use the same format throughout the whole paper, including tables and figures. Notice that the variance of $Y =$ is independent of the measurements units of K .*

R7. Done. Thank you for the suggestion.

C8. *Line 488: Erase “s” from “deteriorates”.*

R8. Done. Thank you.

C9. *Lines 539ff: Sorry, but this is a mere description of the figure; please, provide a discussion of the results, otherwise the paragraph is of poor interest.*

R9. We thought that Figure 6 was well discussed in paragraph that contains line 539. We are not sure if the editor is referring to another paragraph/figure?

C10. *Line 580: Please, check the use of the expression “observation frequency” throughout the whole paper (including figures): “observation frequency” (whose dimension is inverse time) should be often replaced with “sampling period” (whose dimension is time).*

R10. Done. thank you.

C11. *Table 3: The number of decimal and significant figures is different for different values. Please, unify the format and check whether it is physically consistent.*

R11. Done. Thank you.

C12. *Figure 3: Numbers on the contour lines cannot be read.*

R12. We have improved the labelling of the figure. Thank you.

C13. *Figure 7: I see two scenarios only in the figures, not four. Please, check the plots.*

R13. We updated the caption of the figure. Thank you.

Hydrology and Earth System Sciences (HESS) paper number hess-2015-544
**A Bayesian Consistent Dual Ensemble Kalman Filter for State-Parameter
Estimation in Subsurface Hydrology**

by B. Ait-El-Fquih, M.E. Gharamti and I. Hoteit

- Reply to Referee #3 -

We would like to thank the referee for carefully reviewing our work and for his/her constructive comments. We have revised the manuscript taking into account all the referee comments and suggestions. Our detailed replies are given below.

Detailed comments

C1. *Lines 51-55: I suggest relaxing this sentence and limiting the ability to handle model structure errors to the cases presented in the cited reference (Hendricks Franssen and Kinzelbach, 1998). In fact the EnKF has been proven to be ineffective when other model structure errors such as, e.g., uncertain variogram model parameters, need to be taken into account (see, e.g., Jafarpour and Tarrahi, 2011: <http://dx.doi.org/10.1029/2010WR009090> - “Assessing the performance of the ensemble Kalman filter for subsurface flow data integration under variogram uncertainty”).*

R1. We have revised the sentence following the reviewer’s comment. Thank you.

C2. *Lines 124-125: is it necessary to assume that parameters and state variables are independent? This doesn’t seem to be realistic to me. You also state that there must be consistency between model parameters and initial hydraulic head fields (lines 439-442).*

R2. The referee is right. This assumption is not needed and the sentence was removed accordingly. Thank you.

C3. *Figure 1: I suggest adding the x and y axes labels with the corresponding units.*

R3. We thank the referee for the suggestion. The units are already included in the upper-left corner of the domain. x and y labels are now described in the caption.

C4. *Table 2 (caption): please correct “variorum” in “variogram”.*

R4. Done. Thank you.

C5. *Lines 430-442: the procedure through which you initialize your ensemble members and the motivations for doing so are not clear to me. In more details:*

- *Lines 430-431: what is the “mean hydraulic head of the reference run solution”? Spatial mean? Temporal mean?*
- *line 432: “randomly select” from which set? Regardless of the fact that the same procedure has already been used by Gharamti et al. (2014), I suggest that all this initialization methodology should be explained more clearly in the manuscript.*

R5. The reference run is performed over a period of 1.5 years. Snapshots from the reference simulation are retained every time step; i.e., every 12 hours. Thus in total, we obtain 1095 hydraulic heads’ snapshots. The temporal mean at every grid cell is then computed and used to carry out a new run with the perturbed forecast model over a 5 years period. This provided a set of 3650 head maps by saving the model outputs every time step. From these, we randomly select N_e head maps and use it as the initial hydraulic head ensemble.

C6. *Equations 38-39: defined in this way, and consistently with the definition of vector \mathbf{x} in equation (1), the two metrics AAE and AESP should refer to system states only. Subsequently, you employ AAE with reference to log-conductivities (e.g., in Figure 4, 5). Please consider revising this inconsistency.*

R6. We have generalized both metrics to account for both state and parameters. Thank you for the comment.

C7. *Line 476 and 478, caption of Table 3: I don’t understand the reason for using the word “mean” before AESP. Shouldn’t the AESP be an averaged quantity? Please consider dropping the word “mean” in “mean AESP”. Otherwise state more clearly what you intend with the word “mean” in this context.*

R7. By “mean” we are referring to a temporal-mean AESP. The AESP is indeed a spatially-averaged quantity but in Table 3 we intended to show the overall mean from the entire 1.5-years assimilation. We have clarified this in the revised manuscript. Thank you.

C8. *Table 3: the results presented in Table 3 in my opinion are not adequately commented: the AESP indices related to log-conductivity do not increase with ensemble size as stated at lines 477. On the same line, it is not clear why the authors say “as expected”.*

R8. The analysis of Table 3 results has been revised following the referee’s comment. We agree with the referee, the ensemble spread for the state and the parameters behave differently as we change the size of the ensemble. The revised text reads as follows: “For all schemes, increasing the ensemble would increase the spread of the hydraulic head ensemble due to the natural variability of the considered subsurface system. In contrast, the AESP conductivity decreases as N_e increases, probably because of the persistence nature of its prescribed dynamics.”.

C9. *Lines 504-506: Does this mean that updating the model variables is more expensive*

than running the forward model? Commonly, the updating step consists of a few algebraic equations that can be solved in a very short time, while the forward model run usually requires more time. Could you provide further details for this behavior?

R9. We totally agree with the referee. However, given the simplicity of our model, the cost of integrating a single member for 12 hours (one time step) is not very expensive compared to the update step. We further run all members in parallel on a 4-core machine. Yet, the forecast step is still more expensive than the analysis step. In realistic systems, the analysis step should be cheap compared to the forecast step. This was made clearer in the text.

C10. *Section 5.4 (and also in many other further instances): you probably mean that the standard deviation of the measurement error is, e.g., 0.10 m, not the measurement error itself.*

R10. The referee is right, we meant the standard deviation of the measurement error. We updated the text accordingly.

A Bayesian Consistent Dual Ensemble Kalman Filter for State-Parameter Estimation in Subsurface Hydrology

B. Ait-El-Fquih ¹, M.E. Gharamti ^{1,2}, and I. Hoteit ¹

¹Department of Earth Sciences and Engineering, King Abdullah University of Science and Technology (KAUST), Thuwal 23955-6900, Kingdom of Saudi Arabia.

²Mohn-Sverdrup Center for Global Ocean Studies and Operational Oceanography, Nansen Environmental and Remote Sensing Center (NERSC), Bergen 5006, Norway.

Correspondence to: I. Hoteit (ibrahim.hoteit@kaust.edu.sa)

Abstract. Ensemble Kalman filtering (EnKF) is an efficient approach to addressing uncertainties in subsurface groundwater models. The EnKF sequentially integrates field data into simulation models to obtain a better characterization of the model’s state and parameters. These are generally estimated following joint and dual filtering strategies, in which, at each assimilation cycle, a forecast step by the model is followed by an update step with incoming observations. The Joint-EnKF directly updates the augmented state-parameter vector while the Dual-EnKF empirically employs two separate filters, first estimating the parameters and then estimating the state based on the updated parameters. To develop a Bayesian consistent dual approach and improve the state-parameters estimates and their consistency, we propose in this paper a one-step-ahead (OSA) smoothing formulation of the state-parameter Bayesian filtering problem from which we derive a new dual-type EnKF; the Dual-EnKF_{OSA}. Compared with the standard Dual-EnKF, it imposes a new update step to the state, which is shown to enhance the performance of the dual approach with almost no increase in the computational cost. Numerical experiments are conducted with a two-dimensional synthetic groundwater aquifer model to investigate the performance and robustness of the proposed Dual-EnKF_{OSA}, and to evaluate its results against those of the Joint- and Dual-EnKFs. The proposed scheme is able to successfully recover both the hydraulic head and the aquifer conductivity, further providing reliable estimates of their uncertainties. It is further found more robust to different assimilation settings, such as the spatial and temporal distribution of the observations, and the level of noise in the data. Based on our experimental setups, it yields up to 25% more accurate state and parameters estimates than the joint and dual approaches.

1 Introduction

In modern hydrology research, uncertainty quantification studies have focused on field applications, including surface and subsurface water flow, contaminant transport, and reservoir engineering. The

motivations behind these studies were driven by the uncertain and stochastic nature of hydrological systems. For instance, surface rainfall-runoff models that account for soil moisture and streamflows are subject to many uncertain parameters, such as free and tension water storage content, water depletion rates, and melting threshold temperatures (Samuel et al., 2014). Groundwater flow models, on the other hand, depend on our knowledge of spatially variable aquifer properties, such as porosity and hydraulic conductivity, which are often poorly known (Chen and Zhang, 2006; Hendricks Franssen and Kinzelbach, 2008). In addition, contaminant transport models that investigate the migration of pollutants in subsurface aquifers are quite sensitive to reaction parameters like sorption rates, radioactive decay, and biodegradation (Gharamti and Hoteit, 2014; Gharamti et al., 2014b). To this end, it is important to study the variability of hydrological parameters and reduce their associated uncertainties in order to obtain reliable simulations. To achieve this goal, hydrologists have resorted to various inverse and Monte Carlo-based statistical techniques with the standard procedure of pinpointing parameter values that, when integrated with the simulation models, allow some system-response variables (e.g., hydraulic head, solute concentration) to fit given observations (Vrugt et al., 2003; Valstar et al., 2004; Alcolea et al., 2006; Feyen et al., 2007; Hendricks Franssen and Kinzelbach, 2009; Zhou et al., 2014). Recently, sequential data assimilation techniques, such as the particle filter (PF), have been proposed to handle any type of statistical distribution, Gaussian or not, to properly deal with strongly nonlinear systems (Chang et al., 2012). The PF may require, however, a prohibitive number of particles (and thus model runs) to accurately sample the distribution of the state and parameters, making this scheme computationally intensive for large-scale hydrological applications (Doucet et al., 2001; Moradkhani et al., 2005a; Hoteit et al., 2008; Montzka et al., 2011). This problem has been partially addressed by the popular ensemble Kalman filter (EnKF), which further provides robustness, efficiency and non-intrusive formulation (Reichle et al., 2002; Vrugt et al., 2006; Zhou et al., 2011; Gharamti et al., 2013; Panzeri et al., 2014; Crestani et al., 2013; McMillan et al., 2013; Erdal and Cirpka, 2015) to tackle the state-parameter estimation problem.

The EnKF is a filtering technique that is relatively simple to implement, even with complex nonlinear models, requiring only an observation operator that maps the state variables from the model space into the observation space. Compared with traditional inverse and direct optimization techniques, which are generally based on least-squares-like formulations, the EnKF has the advantage of being able to account for ~~model errors that are not only present in the uncertain parameters but also in the model structure and inputs, such as external forcings~~ some forms of model errors (Hendricks Franssen and Kinzelbach, 2008). ~~In addition, and because~~ Because of its sequential formulation, ~~it the EnKF~~ does not require storing all past information about the states and parameters, leading to consequent savings in computational cost (McLaughlin, 2002; Gharamti et al., 2014b).

The EnKF is widely used in surface and subsurface hydrological studies to tackle state-parameters estimation problems (Zhou et al., 2014; Panzeri et al., 2014). Two approaches are usually considered based on the joint and the dual estimation strategies. The standard joint approach concurrently

estimates the state and the parameters by augmenting (in the same vector) the state variables with the unknown parameters, that do not vary in time. The parameters could also be set to follow an artificial evolution (random walk) before they get updated with incoming observations (Wan et al., 1999). One of the early applications of the Joint-EnKF to subsurface groundwater flow models was
65 ~~given~~presented by Chen and Zhang (2006). In their study, a conceptual subsurface flow system was considered and ensemble filtering was performed to estimate the transient pressure field alongside the hydraulic conductivity. In a reservoir engineering application, Nævdal et al. (2005) considered a two-dimensional North Sea field model and considered the joint estimation problem of the dynamic pressure and saturation on top of the static permeability field. Groundwater contamination problems
70 were also tackled using the Joint-EnKF (e.g., Li et al., 2012; Gharamti and Hoteit, 2014), in which the hydraulic head, contaminant concentration and spatially variable permeability and porosity parameters were estimated for coupled groundwater flow and contaminant transport systems.

Several studies argued that the Joint-EnKF may suffer from important inconsistencies between the estimated state and parameters that could degrade the filter performance, especially with large-
75 dimensional and strongly nonlinear systems (e.g., Moradkhani et al., 2005b; Chen and Zhang, 2006; Wen and Chen, 2007). One classical approach that has been proposed to tackle this issue is the so-called dual filter which separately updates the state and parameters using two interactive EnKFs, one acting on the state and the other on the parameters (Moradkhani et al., 2005b). The Dual-EnKF has been applied to streamflow forecasting problems using rainfall-runoff models (e.g., Lü et al., 2013; Samuel et al., 2014), subsurface contaminant (e.g., Tian et al., 2008; Lü et al., 2011; Gharamti et al.,
80 2014b) and compositional flow models (e.g., Phale and Oliver, 2011; Gharamti et al., 2014a), to cite but a few. Gharamti et al. (2014a) concluded that the dual scheme provides more accurate state and parameters estimates than the joint scheme when implemented with large enough ensembles. In terms of complexity, however, the dual scheme requires integrating the filter ensemble twice with
85 the numerical model at every assimilation cycle, and is therefore computationally more demanding. In related works, Gharamti et al. (2013) extended the dual filtering scheme to tackle the state estimation problem of one-way coupled models, and to the framework of Hybrid-EnKF (Gharamti et al., 2014b).

The dual filter has been basically introduced as a heuristic scheme and is not consistent with the
90 Bayesian filtering framework (Hendricks Franssen and Kinzelbach, 2008). A first attempt to build a Bayesian consistent dual-like filter was recently proposed by Gharamti et al. (2015) in which a new Joint-EnKF scheme was derived following the one-step-ahead (OSA) smoothing formulation of the Bayesian filtering problem. The new joint scheme reverses the order of the measurement-update and the forecast- (or time-) update, leading to two Kalman-like update steps based on the current
95 observations; one for state smoothing and one for parameters updating.

Motivated by the promising results of Gharamti et al. (2015), we follow here the same OSA smoothing formulation to derive a new Dual-EnKF, which we refer to as the Dual-EnKF_{OSA} here-

after, generalizing the joint scheme of Gharamti et al. (2015) and, in particular, the standard Dual-EnKF. Our goal is to derive a new Dual-EnKF-like algorithm that retains the separate formulation of the state and parameters update steps, within a fully Bayesian framework. ~~This not only allows us to derive a more general and efficient dual-like filtering scheme~~ The new dual-type filter relaxes the assumption of independence between the state and its observation conditionally on the previous state and parameters, that has been imposed by Gharamti et al. (2015). Exploiting the conditional dependency between the state and its observation leads to one more Kalman-like update of the state, ~~generalizing the joint scheme of Gharamti et al. (2015),~~ at practically no increase in the computational cost. Likewise, the new dual filtering scheme is not only more general than the standard dual scheme, but also ~~to explicitly put in context~~ explicitly derives the conditions under which the (heuristic) steps of the standard Dual-EnKF can be derived ~~in a Bayesian setting, within a Bayesian framework.~~ Synthetic numerical experiments based on a groundwater flow model and estimating the hydraulic head and the conductivity parameter field, are conducted to assess the ~~performances~~ performance of the proposed Dual-EnKF_{OSA} and to compare ~~them against its results against those of~~ the Joint- and the Dual-EnKFs, which we consider as references to evaluate the behavior of the Dual-EnKF_{OSA}. The numerical results suggest that the proposed scheme is beneficial in terms of estimation accuracy compared to the two standard joint and dual schemes, and is more robust to various ~~experiment settings and observation~~ experimental settings and observational scenarios.

The rest of the paper is organized as follows. Section 2 reviews the standard Joint- and Dual-EnKF strategies. The Dual-EnKF_{OSA} is derived in Section 3 and its relation with the Joint- and Dual-EnKFs is discussed. Section 4 presents a conceptual groundwater flow model and outlines the experimental setup. Numerical results are presented and discussed in Section 5. Conclusions are offered in Section 6, followed by an Appendix.

2 Joint and dual ensemble Kalman filtering

2.1 Problem formulation

Consider a discrete-time state-parameter dynamical system:

$$\begin{cases} \mathbf{x}_n &= \mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta) + \eta_{n-1} \\ \mathbf{y}_n &= \mathbf{H}_n \mathbf{x}_n + \varepsilon_n \end{cases}, \quad (1)$$

in which $\mathbf{x}_n \in \mathbb{R}^{N_x}$ and $\mathbf{y}_n \in \mathbb{R}^{N_y}$ denote the system state and the observation at time t_n , of dimensions N_x and N_y respectively, and $\theta \in \mathbb{R}^{N_\theta}$ is the parameter vector of dimension N_θ . \mathcal{M}_n is a nonlinear operator integrating the system state from time t_n to t_{n+1} , and the observational operator at time t_n , \mathbf{H}_n , is assumed to be linear for simplicity; the proposed scheme can be easily extended to the nonlinear case¹. The model process noise, $\eta = \{\eta_n\}_{n \in \mathbb{N}}$, and the observation process noise,

¹The term $\mathbf{H}_n \mathbf{x}_n^{f,(m)}$ is replaced by $\mathcal{H}_n(\mathbf{x}_n^{f,(m)})$ in (26), and $\mathbf{H}_n \xi_n^{(m)}$ is replaced by $\mathcal{H}_n(\xi_n^{(m)})$ in (34).

130 $\varepsilon = \{\varepsilon_n\}_{n \in \mathbb{N}}$, are assumed to be independent, jointly independent and independent of \mathbf{x}_0 and θ ; **which, in turn, are assumed to be independent.** Let also η_n and ε_n be Gaussian with zero means and covariances \mathbf{Q}_n and \mathbf{R}_n , respectively. Throughout the paper, $\mathbf{y}_{0:n} \stackrel{\text{def}}{=} \{\mathbf{y}_0, \mathbf{y}_1, \dots, \mathbf{y}_n\}$, and $p(\mathbf{x}_n)$ and $p(\mathbf{x}_n | \mathbf{y}_{0:l})$ stand for the prior probability density function (pdf) of \mathbf{x}_n and the posterior pdf of \mathbf{x}_n given $\mathbf{y}_{0:l}$, respectively. All other used pdfs are defined in a similar way.

135 We focus on the state-parameter *filtering* problem, say, the estimation at each time, t_n , of the state, \mathbf{x}_n , as well as the parameters vector, θ , from the history of the observations, $\mathbf{y}_{0:n}$. The standard solution of this problem is the *a posteriori* mean (AM):

$$\mathbb{E}_{p(\mathbf{x}_n | \mathbf{y}_{0:n})} [\mathbf{x}_n] = \int \mathbf{x}_n p(\mathbf{x}_n, \theta | \mathbf{y}_{0:n}) d\mathbf{x}_n d\theta, \quad (2)$$

$$\mathbb{E}_{p(\theta | \mathbf{y}_{0:n})} [\theta] = \int \theta p(\mathbf{x}_n, \theta | \mathbf{y}_{0:n}) d\mathbf{x}_n d\theta, \quad (3)$$

140 which minimizes the *a posteriori* mean square error. In practice, analytical computation of Eqs. (2) and (3) is not feasible, mainly due to the nonlinear character of the system. The Joint- and Dual-EnKFs have been introduced as efficient schemes to compute approximations of (2) and (3). These algorithms are reviewed in the next section.

2.2 The Joint- and Dual- EnKFs

145 2.2.1 The Joint-EnKF

The key idea behind the Joint-EnKF is to transform the state-parameter system (1) into a classical state-space system based on the augmented state, $\mathbf{z}_n = [\mathbf{x}_n^T \theta^T]^T$, on which the classical EnKF can be directly applied. The new augmented state-space system can be written as:

$$\begin{cases} \mathbf{z}_n &= \widetilde{\mathcal{M}}_{n-1}(\mathbf{z}_{n-1}) + \widetilde{\eta}_{n-1} \\ \mathbf{y}_n &= \widetilde{\mathbf{H}}_n \mathbf{z}_n + \varepsilon_n \end{cases}, \quad (4)$$

150 in which $\widetilde{\mathcal{M}}_{n-1}(\mathbf{z}_{n-1}) = \begin{bmatrix} \mathcal{M}_{n-1}(\mathbf{z}_{n-1}) \\ \theta \end{bmatrix}$, $\widetilde{\eta}_{n-1} = [\eta_{n-1}^T \mathbf{0}]^T$, $\widetilde{\mathbf{H}}_n = [\mathbf{H}_n \mathbf{0}]$, with $\mathbf{0}$ a zero matrix with appropriate dimensions. $\mathbf{x}_n^{f,(m)}$, $\mathbf{x}_n^{a,(m)}$ and $\mathbf{x}_n^{s,(m)}$ respectively denote the m^{th} forecast, analysis and (OSA)-smoothing member of the state, \mathbf{x}_n , while $\theta_{|n}^{(m)}$ denotes the m^{th} sample of the parameters posterior pdf, $p(\theta | \mathbf{y}_{0:n})$. Since the parameters are static (i.e., time-independent), $\theta_{|n}^{(m)}$, $n = 1, 2, \dots$, could be considered as analysis, forecast or smoothing members.

155 Starting at time t_{n-1} from an analysis ensemble of size N_e , $\{\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$ **representing sampled from** $p(\mathbf{z}_{n-1} | \mathbf{y}_{0:n-1})$, the EnKF uses the augmented state model (1st Eq. of (4)) to compute the forecast ensemble, $\{\mathbf{x}_n^{f,(m)}, \theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$, approximating $p(\mathbf{z}_n | \mathbf{y}_{0:n-1})$. The observation model (2nd Eq. of (4)) is then used to obtain the analysis ensemble, $\{\mathbf{x}_n^{a,(m)}, \theta_{|n}^{(m)}\}_{m=1}^{N_e}$, at time t_n . Let, for an ensemble $\{\mathbf{r}^{(m)}\}_{m=1}^{N_e}$, $\hat{\mathbf{r}}$ denote its empirical mean and \mathbf{S}_r a matrix with N_e -columns whose m^{th} column is defined as $(\mathbf{r}^{(m)} - \hat{\mathbf{r}})$. The Joint-EnKF steps can be summarized as follows:

160

- *Forecast step:* The parameters vector members, $\theta_{|n-1}^{(m)}$, are kept invariant, while the state vector members, $\mathbf{x}_{n-1}^{a,(m)}$, are integrated in time through the dynamical model as:

$$\mathbf{x}_n^{f,(m)} = \mathcal{M}_{n-1} \left(\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)} \right) + \eta_{n-1}^{(m)}; \quad \eta_{n-1}^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_{n-1}). \quad (5)$$

165 ~~An approximation of the forecast state, $\hat{\mathbf{x}}_{n|n-1}$~~ The state forecast estimate, which is ~~by definition,~~ the mean of $p(\mathbf{x}_n | \mathbf{y}_{0:n-1})$ (as in (2)), ~~is given by i.e., $\mathbb{E}_{p(\mathbf{x}_n | \mathbf{y}_{0:n-1})}[\mathbf{x}_n]$,~~ is taken as the empirical mean of the forecast ensemble, $\hat{\mathbf{x}}_n^f$. The associated forecast error covariance is estimated as $\mathbf{P}_{\mathbf{x}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\mathbf{x}_n^f} \mathbf{S}_{\mathbf{x}_n^f}^T$.

- *Analysis step:* Once a new observation is available, all members, $\mathbf{x}_n^{f,(m)}$ and $\theta_{|n-1}^{(m)}$, are updated as in the Kalman filter (KF):

$$170 \quad \mathbf{y}_n^{f,(m)} = \mathbf{H}_n \mathbf{x}_n^{f,(m)} + \varepsilon_n^{(m)}; \quad \varepsilon_n^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{R}_n), \quad (6)$$

$$\mathbf{x}_n^{a,(m)} = \mathbf{x}_n^{f,(m)} + \mathbf{P}_{\mathbf{x}_n^f, \mathbf{y}_n^f} \underbrace{\mathbf{P}_{\mathbf{y}_n^f}^{-1} \left(\mathbf{y}_n - \mathbf{y}_n^{f,(m)} \right)}_{\mu_n^{(m)}}, \quad (7)$$

$$\theta_{|n}^{(m)} = \theta_{|n-1}^{(m)} + \mathbf{P}_{\theta_{|n-1}, \mathbf{y}_n^f} \cdot \mu_n^{(m)}. \quad (8)$$

The (cross-)covariances in Eqs. (7) and (8) are practically evaluated from the ensembles as:

$$\mathbf{P}_{\mathbf{x}_n^f, \mathbf{y}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\mathbf{x}_n^f} \mathbf{S}_{\mathbf{y}_n^f}^T, \quad (9)$$

$$175 \quad \mathbf{P}_{\mathbf{y}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\mathbf{y}_n^f} \mathbf{S}_{\mathbf{y}_n^f}^T, \quad (10)$$

$$\mathbf{P}_{\theta_{|n-1}, \mathbf{y}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\theta_{|n-1}} \mathbf{S}_{\mathbf{y}_n^f}^T. \quad (11)$$

The analysis estimates, (2) and (3), and their error covariances, can thus be approximated by the analysis ensemble means, $\hat{\mathbf{x}}_n^a$ and $\hat{\theta}_{|n}$, and covariances $\mathbf{P}_{\mathbf{x}_n^a} = (N_e - 1)^{-1} \mathbf{S}_{\mathbf{x}_n^a} \mathbf{S}_{\mathbf{x}_n^a}^T$ and $\mathbf{P}_{\theta_{|n}} = (N_e - 1)^{-1} \mathbf{S}_{\theta_{|n}} \mathbf{S}_{\theta_{|n}}^T$, respectively. Note that $\mathbf{P}_{\mathbf{x}_n^f, \mathbf{y}_n^f} \mathbf{P}_{\mathbf{y}_n^f}^{-1}$ in (7) represents the Kalman

180 Gain, $\mathbf{P}_{\mathbf{x}_n^f} \mathbf{H}_n^T \left[\mathbf{H}_n \mathbf{P}_{\mathbf{x}_n^f} \mathbf{H}_n^T + \mathbf{R}_n \right]^{-1}$. This statistical formulation of the Kalman Gain offers more flexibility to deal with nonlinear observational operators (Moradkhani et al., 2005b).

2.2.2 The Dual-EnKF

In contrast with the Joint-EnKF, the Dual-EnKF is empirically designed following a conditional estimation strategy, operating as a succession of two EnKF-like filters. First, a (parameter) filter is applied to compute $\{\theta_{|n}^{(m)}\}_{m=1}^{N_e}$ from $\{\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$ ~~based on the following two steps: exactly~~ as in the Joint-EnKF:

- *Forecast step:* The parameters ensemble, $\{\theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$, is kept invariant, while the state samples are integrated in time as in (5) to compute the forecast ensemble, $\{\mathbf{x}_n^{f,(m)}\}_{m=1}^{N_e}$.

- *Analysis step:* As in (6), the observation forecast ensemble $\{\mathbf{y}_n^{f,(m)}\}_{m=1}^{N_e}$ is computed from $\{\mathbf{x}_n^{f,(m)}\}_{m=1}^{N_e}$. This is then used to update the parameters ensemble, $\{\theta_{|n}^{(m)}\}_{m=1}^{N_e}$, following (8).

Another (state) filter is then applied to compute $\{\mathbf{x}_n^{a,(m)}\}_{m=1}^{N_e}$ from $\{\mathbf{x}_{n-1}^{a,(m)}\}_{m=1}^{N_e}$ as well as the new parameter ensemble, $\{\theta_{|n}^{(m)}\}_{m=1}^{N_e}$, again in two steps that can be summarized as follows.

- *Forecast step:* Each member, $\mathbf{x}_{n-1}^{a,(m)}$, is propagated in time with the dynamical model using the updated parameters ensemble:

$$\tilde{\mathbf{x}}_n^{f,(m)} = \mathcal{M}_{n-1} \left(\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n}^{(m)} \right). \quad (12)$$

- *Analysis step:* As in the parameter filter, $\{\tilde{\mathbf{y}}_n^{f,(m)}\}_{m=1}^{N_e}$ is computed from $\{\tilde{\mathbf{x}}_n^{f,(m)}\}_{m=1}^{N_e}$ using (6), which finally yields $\{\mathbf{x}_n^{a,(m)}\}_{m=1}^{N_e}$ as in (7).

To better understand how the Dual-EnKF differs from the Joint-EnKF, we focus on how the analysis members at time t_n , namely, $\mathbf{x}_n^{a,(m)}$ and $\theta_{|n}^{(m)}$, are obtained starting from their counterparts at previous time, $\mathbf{x}_{n-1}^{a,(m)}$ and $\theta_{|n-1}^{(m)}$. The parameters members, $\theta_{|n}^{(m)}$, are computed based on the same equation (8) in both algorithms. For the state members, $\mathbf{x}_n^{a,(m)}$, we have:

$$\mathbf{x}_n^{a,(m)} \stackrel{\text{Joint-EnKF}}{=} \mathcal{M}_{n-1} \left(\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)} \right) + \mathbf{P}_{\mathbf{x}_n^f, \mathbf{y}_n^f} \underbrace{\mathbf{P}_{\mathbf{y}_n^f}^{-1} \left(\mathbf{y}_n - \mathbf{y}_n^{f,(m)} \right)}_{\mu_n^{(m)}}, \quad (13)$$

$$\mathbf{x}_n^{a,(m)} \stackrel{\text{Dual-EnKF}}{=} \underbrace{\mathcal{M}_{n-1} \left(\mathbf{x}_{n-1}^{a,(m)}, \overbrace{\theta_{|n-1}^{(m)} + \mathbf{P}_{\theta_{|n-1}, \mathbf{y}_n^f} \cdot \mu_n^{(m)}}^{\theta_{|n}^{(m)}} \right)}_{\tilde{\mathbf{x}}_n^{f,(m)}} + \mathbf{P}_{\tilde{\mathbf{x}}_n^f, \tilde{\mathbf{y}}_n^f} \underbrace{\mathbf{P}_{\tilde{\mathbf{y}}_n^f}^{-1} \left(\mathbf{y}_n - \tilde{\mathbf{y}}_n^{f,(m)} \right)}_{\tilde{\mu}_n^{(m)}}. \quad (14)$$

For simplicity, we ignore here the process noise term, η_n , which is commonly applied in [geophysics](#) [geophysical](#) applications. As one can see, the Joint-EnKF updates the state members using one Kalman-like correction (term of $\mu_n^{(m)}$ in (13)), while the Dual-EnKF applies two Kalman-like corrections. More specifically, the Dual-EnKF updates first the parameters members, $\theta_{|n-1}^{(m)}$, as in the Joint-EnKF, leading to $\theta_{|n}^{(m)}$; these are then used to propagate $\mathbf{x}_{n-1}^{a,(m)}$, with the model to provide the “forecast” members $\tilde{\mathbf{x}}_n^{f,(m)}$. The $\tilde{\mathbf{x}}_n^{f,(m)}$ are finally updated using a Kalman-like correction (term of $\tilde{\mu}_n^{(m)}$ in (14)), to obtain the analysis members $\mathbf{x}_n^{a,(m)}$. Such a separation of the update steps is expected to provide more consistent estimates of the parameters. The dual-update framework was indeed shown to provide better performances than the Joint-EnKF, at the cost of increased computational burden (see for instance, Moradkhani et al., 2005b; Samuel et al., 2014; Gharamti et al., 2014a).

2.2.3 Probabilistic formulation

Following a probabilistic formulation, the augmented state system (4) can be viewed as a continuous state Hidden Markov Chain (HMC) with transition density,

$$p(\mathbf{z}_n|\mathbf{z}_{n-1}) = p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta)p(\theta|\theta) = \mathcal{N}_{\mathbf{x}_n}(\mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta), \mathbf{Q}_{n-1}), \quad (15)$$

220 and likelihood,

$$p(\mathbf{y}_n|\mathbf{z}_n) = p(\mathbf{y}_n|\mathbf{x}_n) = \mathcal{N}_{\mathbf{y}_n}(\mathbf{H}_n\mathbf{x}_n, \mathbf{R}_n), \quad (16)$$

where $\mathcal{N}_{\mathbf{v}}(\mathbf{m}, \mathbf{C})$ represents a Gaussian pdf of argument \mathbf{v} and parameters (\mathbf{m}, \mathbf{C}) .

One can then easily verify that the Joint-EnKF can be derived from a direct application of two classical results of random sampling (Properties 1 and 2 in Appendix A) on the following classical
225 generic formulas:

$$p(\mathbf{z}_n|\mathbf{y}_{0:n-1}) = \int p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta)p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n-1})d\mathbf{x}_{n-1}, \quad (17)$$

$$p(\mathbf{y}_n|\mathbf{y}_{0:n-1}) = \int p(\mathbf{y}_n|\mathbf{x}_n)p(\mathbf{x}_n|\mathbf{y}_{0:n-1})d\mathbf{x}_n, \quad (18)$$

$$p(\mathbf{z}_n|\mathbf{y}_{0:n}) = \frac{p(\mathbf{z}_n, \mathbf{y}_n|\mathbf{y}_{0:n-1})}{p(\mathbf{y}_n|\mathbf{y}_{0:n-1})}. \quad (19)$$

Eq. (17) refers to a *Markovian* step (or time-update step) and uses the transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta)$,
230 of the Markov chain, $\{\mathbf{z}_n\}_n$, to compute the forecast pdf of \mathbf{z}_n from the previous analysis pdf. Eq. (19) refers to a *Bayesian* step (or measurement-update step) since it uses the Bayes' rule to update the forecast pdf of \mathbf{z}_n using the current observation \mathbf{y}_n . Now, establishing the link between the Joint-EnKF and Eqs. (17)-(19), one can show that Property 1 and Eq. (17) lead to the forecast ensemble of the state (5). Property 1 and Eq. (18) lead to the forecast ensemble of the observations (6). Property
235 2 and Eq. (19) then provide the analysis ensemble of the state (7) and the parameters (8).

Regarding the Dual-EnKF, the forecast ensemble of the state and observations in the parameter filter can be obtained following the same process as in the Joint-EnKF. This is followed by the computation of the analysis ensemble of the parameters using Property 2 and

$$p(\theta|\mathbf{y}_{0:n}) = \frac{p(\theta, \mathbf{y}_n|\mathbf{y}_{0:n-1})}{p(\mathbf{y}_n|\mathbf{y}_{0:n-1})}. \quad (20)$$

240 However, in the state filter, the ensemble, $\{\tilde{\mathbf{x}}_n^{f,(m)}\}_{m=1}^{N_e}$, obtained via Eq. (12) in the forecast step does not represent the forecast pdf, $p(\mathbf{x}_n|\mathbf{y}_{0:n-1})$, since Eq. (12) involves $\theta_{|n}^{(m)}$ rather than $\theta_{|n-1}^{(m)}$. Accordingly, the Dual-EnKF is basically a heuristic algorithm in spite of its proven performance.

3 One-step-ahead smoothing-based Dual-EnKF (Dual-EnKF_{OSA})

The classical (time-update, measurement-update) path (17)-(19) to compute the analysis pdf $p(\mathbf{z}_n|\mathbf{y}_{0:n})$
245 from $p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n-1})$, is not the only possible one. One may indeed reverse the order the time- and

measurement-update steps by involving the OSA smoothing pdf, $p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n})$, between two successive analysis pdfs, $p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n-1})$ and $p(\mathbf{z}_n|\mathbf{y}_{0:n})$. Desbouvieries et al. (2011) considered the OSA smoothing-based filtering problem in low-dimensional state-space systems to derive a class of KF- and PF-like algorithms for filtering the state. The more recent work of Lee and Farmer (2014) proposes a number of algorithms to estimate both the system state and the model noise based on a similar strategy. In the context of large-dimensional state-parameters filtering, we show in this section that this leads to a new fully Bayesian consistent dual-like filtering scheme, the Dual-EnKF_{OSA}, which, compared to the standard Dual-EnKF, not only introduces another Kalman-like update of the state but also involves a (new) smoothing step that constraints the state with the future observation. Exploiting the future observation should be particularly beneficial in the context of the EnKF as it includes more information in the estimation process that may help mitigating for the suboptimal character of the EnKF-like methods, being formulated under a linear Gaussian framework, and usually implemented with limited ensembles and crude approximate noise statistics.

3.1 The one-step-ahead smoothing-based dual filtering algorithm

The analysis pdf, $p(\mathbf{x}_n, \theta|\mathbf{y}_{0:n})$, can be computed from $p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_{0:n-1})$ in two steps:

- *Smoothing step:* The one-step-ahead smoothing pdf, $p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_{0:n})$, is first computed as,

$$p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_{0:n}) \propto p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_{0:n-1}), \quad (21)$$

with,

$$\begin{aligned} p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1}) &= \int p(\mathbf{y}_n|\mathbf{x}_n, \mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})d\mathbf{x}_n, \\ &= \int p(\mathbf{y}_n|\mathbf{x}_n)p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta)d\mathbf{x}_n. \end{aligned} \quad (22)$$

Eq. (22) is derived from the fact that in the state-parameter model (1), the observation noise, ε_n , and the model noise, η_{n-1} , are independent of $(\mathbf{x}_{n-1}, \theta)$ and past observations $\mathbf{y}_{0:n-1}$.

The smoothing step (21) is indeed a measurement-update step since given $\mathbf{y}_{0:n-1}$, Eq. (21) translates the computation of the posterior, $p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_n)$, as a normalized product of the prior, $p(\mathbf{x}_{n-1}, \theta)$, and the likelihood, $p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta)$ (note from (22) that $p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1}) = p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta)$).

- *Forecast step:* The smoothing pdf at t_{n-1} is then used to compute the current analysis pdf, $p(\mathbf{x}_n, \theta|\mathbf{y}_{0:n})$, as

$$p(\mathbf{x}_n, \theta|\mathbf{y}_{0:n}) = \int p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n})p(\mathbf{x}_{n-1}, \theta|\mathbf{y}_{0:n})d\mathbf{x}_{n-1}, \quad (23)$$

with,

$$p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n}) \propto p(\mathbf{y}_n|\mathbf{x}_n)p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta), \quad (24)$$

which, in turn, arises from the fact that ε_n and η_{n-1} are independent of $(\mathbf{x}_{n-1}, \theta)$ and $\mathbf{y}_{0:n-1}$ (see smoothing step above). We note here that only the (marginal) analysis pdf of \mathbf{x}_n , $p(\mathbf{x}_n|\mathbf{y}_{0:n})$, is of interest since the analysis pdf of θ has already been computed in the smoothing step.

280 From (24), $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n}) = p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$. Thereby, there is a similarity between Eq. (23) and the forecast step (17) in the sense that (23) can be seen as a forecast step once the observation \mathbf{y}_n is known, *i.e.*, (23) coincides with “(17) given the observation \mathbf{y}_n ”. Accordingly, and without abuse of language, we refer to (23)-(24) as the *forecast* step.

3.2 Ensemble Formulation

285 Since it is not possible to derive the analytical solution of (21)-(24) because of the nonlinear character of the model, $\mathcal{M}(\cdot)$, we use Properties 1 and 2 (see Appendix A) to propose an EnKF-like formulation, assuming that $p(\mathbf{y}_n, \mathbf{z}_{n-1}|\mathbf{y}_{0:n-1})$ is Gaussian for all n . This assumption implies that $p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n-1})$, $p(\mathbf{z}_{n-1}|\mathbf{y}_{0:n})$ and $p(\mathbf{y}_n|\mathbf{y}_{0:n-1})$ are Gaussian.

3.2.1 Smoothing step

290 Starting at time t_{n-1} , from an analysis ensemble, $\{\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$, one can use Property 1 in Eq. (22) to sample the observation forecast ensemble, $\{\mathbf{y}_n^{f,(m)}\}_{m=1}^{N_e}$, as

$$\mathbf{x}_n^{f,(m)} = \mathcal{M}_{n-1}(\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)}) + \eta_{n-1}^{(m)}, \quad (25)$$

$$\mathbf{y}_n^{f,(m)} = \mathbf{H}_n \mathbf{x}_n^{f,(m)} + \varepsilon_n^{(m)}, \quad (26)$$

with $\eta_{n-1}^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_{n-1})$ and $\varepsilon_n^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{R}_n)$. Property 2 is then used in Eq. (21) to compute the
295 smoothing ensemble, $\{\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)}\}_{m=1}^{N_e}$, as

$$\mathbf{x}_{n-1}^{s,(m)} = \mathbf{x}_{n-1}^{a,(m)} + \mathbf{P}_{\mathbf{x}_{n-1}^a, \mathbf{y}_n^f} \underbrace{\mathbf{P}_{\mathbf{y}_n^f}^{-1} (\mathbf{y}_n - \mathbf{y}_n^{f,(m)})}_{\nu_n^{(m)}}, \quad (27)$$

$$\theta_{|n}^{(m)} = \theta_{|n-1}^{(m)} + \mathbf{P}_{\theta_{|n-1}, \mathbf{y}_n^f} \cdot \nu_n^{(m)}. \quad (28)$$

The (cross-) covariances in equations (27) and (28) are defined and evaluated similarly to (9)-(11).

3.2.2 Forecast step

300 The analysis ensemble, $\{\mathbf{x}_n^{a,(m)}\}_{m=1}^{N_e}$, can be obtained from $\{\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)}\}_{m=1}^{N_e}$ using Property 1 in Eq. (23), once the *a posteriori* transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$, is computed via Eq. (24). Furthermore, one can verify that Eq. (24) leads to a Gaussian pdf:

$$p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n) = \mathcal{N}_{\mathbf{x}_n} \left(\mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta) + \tilde{\mathbf{K}}_n (\mathbf{y}_n - \mathbf{H}_n \mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta)), \tilde{\mathbf{Q}}_{n-1} \right), \quad (29)$$

with $\tilde{\mathbf{K}}_n = \mathbf{Q}_{n-1} \mathbf{H}_n^T [\mathbf{H}_n \mathbf{Q}_{n-1} \mathbf{H}_n^T + \mathbf{R}_n]^{-1}$ and $\tilde{\mathbf{Q}}_{n-1} = \mathbf{Q}_{n-1} - \tilde{\mathbf{K}}_n \mathbf{H}_n \mathbf{Q}_{n-1}$. However, when
305 the state dimension, N_x , is very large, the computational cost of $\tilde{\mathbf{K}}_n$ and $\tilde{\mathbf{Q}}_{n-1}$ (which may be

a non-diagonal matrix even when \mathbf{Q}_{n-1} is diagonal) may become prohibitive. One way to avoid this problem is to directly sample from $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$ without explicitly computing this pdf in (29). Let $\{\tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)\}_{m=1}^{N_e}$ denotes an ensemble of samples drawn from $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$. The notation $\tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$ refers to a function $\tilde{\mathbf{x}}_n^{(m)}$ of $(\mathbf{x}_{n-1}, \theta)$; similar notations hold for $\tilde{\xi}_n^{(m)}(\cdot)$ and $\tilde{\mathbf{y}}_n^{(m)}(\cdot)$ in (30) and (31), respectively. Using Properties 1 and 2, an explicit form of such samples can be obtained as (see Appendix B),

$$\tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta) = \mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta) + \eta_{n-1}^{(m)}; \quad \eta_{n-1}^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_{n-1}), \quad (30)$$

$$\tilde{\mathbf{y}}_n^{(m)}(\mathbf{x}_{n-1}, \theta) = \mathbf{H}_n \tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta) + \varepsilon_n^{(m)}; \quad \varepsilon_n^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{R}_n), \quad (31)$$

$$\tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}, \theta) = \tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta) + \mathbf{P}_{\tilde{\xi}_n, \tilde{\mathbf{y}}_n} \mathbf{P}_{\tilde{\mathbf{y}}_n}^{-1} [\mathbf{y}_n - \tilde{\mathbf{y}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)], \quad (32)$$

where the (cross)-covariances, $\mathbf{P}_{\tilde{\xi}_n, \tilde{\mathbf{y}}_n}$ and $\mathbf{P}_{\tilde{\mathbf{y}}_n}$, are evaluated from the ensembles $\{\tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta)\}_{m=1}^{N_e}$ and $\{\tilde{\mathbf{y}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)\}_{m=1}^{N_e}$, similarly to (9)-(11). Now, using Property 1 in Eq. (23), one can compute an analysis ensemble, $\{\mathbf{x}_n^{a,(m)}\}_{m=1}^{N_e}$, from the smoothing ensemble, $\{\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)}\}_{m=1}^{N_e}$, using the functional form (32). More precisely, we obtain, $\mathbf{x}_n^{a,(m)} = \tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)})$, which is equivalent to set $\mathbf{x}_{n-1} = \mathbf{x}_{n-1}^{s,(m)}$ and $\theta = \theta_{|n}^{(m)}$ in (30)-(32).

3.2.3 Summary of the Dual-EnKF_{OSA} algorithm

Starting from an analysis ensemble, $\{\mathbf{x}_{n-1}^{a,(m)}, \theta_{|n-1}^{(m)}\}_{m=1}^{N_e}$, at time t_{n-1} , the updated ensemble of both state and parameters at time t_n is obtained with the following two steps:

- *Smoothing step:* The state forecast ensemble, $\{\mathbf{x}_n^{f,(m)}\}_{m=1}^{N_e}$, is first computed by (25), and then used to compute the observation forecast ensemble, $\{\mathbf{y}_n^{f,(m)}\}_{m=1}^{N_e}$, as in (26). This latter is then used to compute the one-step-ahead smoothing ensemble of the state, $\{\mathbf{x}_{n-1}^{s,(m)}\}_{m=1}^{N_e}$, and parameters, $\{\theta_{|n}^{(m)}\}_{m=1}^{N_e}$, based on the Kalman-like updates (27) and (28), respectively.
- *Forecast step:* The analysis ensemble of the state $\{\mathbf{x}_n^{a,(m)}\}_{m=1}^{N_e}$ is obtained as:

$$\xi_n^{(m)} = \mathcal{M}_{n-1}(\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)}) + \eta_{n-1}^{(m)}; \quad \eta_{n-1}^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_{n-1}), \quad (33)$$

$$\tilde{\mathbf{y}}_n^{f,(m)} = \mathbf{H}_n \xi_n^{(m)} + \varepsilon_n^{(m)}; \quad \varepsilon_n^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{R}_n), \quad (34)$$

$$\mathbf{x}_n^{a,(m)} = \xi_n^{(m)} + \mathbf{P}_{\xi_n, \tilde{\mathbf{y}}_n^f} \mathbf{P}_{\tilde{\mathbf{y}}_n^f}^{-1} (\mathbf{y}_n - \tilde{\mathbf{y}}_n^{f,(m)}), \quad (35)$$

$$\text{with } \mathbf{P}_{\xi_n, \tilde{\mathbf{y}}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\xi_n} \mathbf{S}_{\tilde{\mathbf{y}}_n^f}^T \text{ and } \mathbf{P}_{\tilde{\mathbf{y}}_n^f} = (N_e - 1)^{-1} \mathbf{S}_{\tilde{\mathbf{y}}_n^f} \mathbf{S}_{\tilde{\mathbf{y}}_n^f}^T.$$

The proposed Dual-EnKF_{OSA} is an ensemble **Monte Carlo** implementation, under the common Gaussian assumption, of the generic Bayesian filtering algorithm presented in Section 3.1. This justifies its Bayesian consistency in contrast with the standard Dual-EnKF which, as discussed in Section 2.2.3, lacks a **probabilistic-Bayesian** interpretation. In contrast with the Dual-EnKF which uses $\theta_{|n}^{(m)}$ and $\mathbf{x}_{n-1}^{a,(m)}$ **for computing to compute** $\mathbf{x}_n^{a,(m)}$ (see Eq. (14)), the proposed Dual-EnKF_{OSA} uses $\theta_{|n}^{(m)}$ and the smoothed state members, $\mathbf{x}_{n-1}^{s,(m)}$, which are the $\mathbf{x}_{n-1}^{a,(m)}$ after an update with the

current observation, \mathbf{y}_n , following (27). Therefore, when including the Kalman-like correction term as well, the observation, \mathbf{y}_n , is used three times in the Dual-EnKF_{OSA} in a fully consistent Bayesian formulation, compared to only twice in the Dual-EnKF. This means that the Dual-EnKF_{OSA} exploits the observations more efficiently than the Dual-EnKF, which should provide more information for improved and more consistent state and parameters estimates. Note that the Dual-EnKF_{OSA} reduces to the Dual-EnKF in the particular case of a perfect model and $\mathbf{x}_{n-1}^{s,(m)} = \mathbf{x}_{n-1}^{a,(m)}$.

The Joint-EnKF_{OSA} of Gharamti et al. (2015) has been derived following the same approach under the assumption of independence between the state, \mathbf{x}_n , and its observation, \mathbf{y}_n , given the previous state, \mathbf{x}_{n-1} , and parameters, θ (assumption (16) in (Gharamti et al., 2015)). This assumption has been adopted to avoid evaluating the computationally demanding term $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$ and replace by replacing it with the more easily sampled state transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta) = \mathcal{N}_{\mathbf{x}_n}(\mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta), \mathbf{Q}_{n-1})$, to draw the state analysis ensemble. Here, we propose a more efficient approach to directly sample the analysis ensemble without explicitly computing $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$ and without the need of any additional assumption. The Joint-EnKF_{OSA} is therefore a particular case of the Dual-EnKF_{OSA}, involving two Kalman-like updates only (those of the smoothing step), since in the forecast step, the state analysis members, $\mathbf{x}_n^{a,(m)}$, are computed from the smoothed members, $(\mathbf{x}_{n-1}^{s,(m)}, \theta_{|n}^{(m)})$, by integrating them with the model and without any update with the current observation. More specifically, Eqs. (33)-(35) above reduce in Gharamti et al. (2015) to Eq. (33) (i.e., $\mathbf{x}_n^{a,(m)} = \xi_n^{(m)}$).

Despite the smoothing formulation of the Dual-EnKF_{OSA}, this algorithm obviously addresses the state forecast problem as well. As discussed in the smoothing step above, the (one-step-ahead) forecast members are inherently computed. The j -step-ahead forecast member, denoted by $\mathbf{x}_{n+j|n}^{(m)}$ for $j \geq 2$, can be computed following a recursive procedure where, for $\ell = 2, 3, \dots, j$, one has

$$\mathbf{x}_{n+\ell|n}^{(m)} = \mathcal{M}_{n+\ell-1}(\mathbf{x}_{n+\ell-1|n}^{(m)}, \theta_{|n}^{(m)}) + \eta_{n+\ell-1}^{(m)}, \quad \eta_{n+\ell-1}^{(m)} \sim \mathcal{N}(\mathbf{0}, \mathbf{Q}_{n+\ell-1}). \quad (36)$$

3.3 Complexity of the Joint-EnKF, Dual-EnKF, and Dual-EnKF_{OSA}

The computational complexity of the different state-parameter EnKF schemes can be split between the forecast (time-update) step and the analysis (measurement-update) step. The Joint-EnKF requires N_e model runs (for forecasting the state ensemble) and N_e Kalman corrections (for updating the forecast ensemble). This is practically doubled when using the Dual-EnKF, since the latter requires $2N_e$ model runs and $2N_e$ Kalman corrections; N_e corrections for each of the forecast state ensemble and the forecast parameter ensemble. As presented in the previous section, the Dual-EnKF_{OSA} smoothes the state estimate at the previous time step before updating the parameters and the state at the current time. Thus, the Dual-EnKF_{OSA} requires as many model runs ($2N_e$) as the Dual-EnKF, and an additional N_e correction steps to apply smoothing. In large scale geophysical applications, the correction step of the ensemble members is often computationally not significant compared to the cost of integrating the model in the forecast step. The approximate computational complexity and

memory storage for each algorithm are summarized in Table 1. The tabulated complexities for each
 375 method are valid under the assumption that $N_y \ll N_x$, *i.e.*, the number of state variables is much
 larger than the number of observations. This is generally the case for subsurface flow applications
 due to budget constraints given the consequent costs needed for drilling and maintaining subsurface
 wells.

4 Numerical experiments

380 4.1 Transient groundwater flow problem

We adopt in this study the subsurface flow problem of Bailey and Baù (2010). The system consists
 of a two-dimensional (2D) transient flow with an areal aquifer area of 0.5 km² (Figure 1). Constant
 head boundaries of 20 m and 15 m are placed on the west and east ends of the aquifer, respectively,
 with an average saturated thickness, b , of 25 m. The north and south boundaries are assumed to be
 385 ~~Neumann with no flow conditions~~ impermeable (Figure 1). The mesh is discretized using a cell-
 centered finite difference scheme with 10 m × 20 m rectangles, resulting in 2500 elements. The
 following 2D saturated groundwater flow system is solved:

$$\frac{\partial}{\partial x} \left(T_x \frac{\partial h}{\partial x} \right) + \frac{\partial}{\partial y} \left(T_y \frac{\partial h}{\partial y} \right) = S \frac{\partial h}{\partial t} + q, \quad (37)$$

where T is the transmissivity [L²T⁻¹], which is related to the conductivity, K , through $T = Kb$, h
 390 is the hydraulic head [L], t is time [T], S is storativity [-], and q denotes the sources as recharge or
 sinks due to pumping wells [LT⁻¹]. Unconfined aquifer conditions are simulated by setting $S = 0.20$
 to represent the specific yield. A log-conductivity field is generated using the sequential Gaussian
 simulation toolbox, GCOSIM3D (Gómez-Hernández and Journel, 1993), with a geometric mean of
 $-13 \log(\text{m/s})$, a variance $Y = \log K$ of $1.5 \log(\text{m}^2/\text{s}^2)$, and a Gaussian variogram with a range equal
 395 to 250 m in the x-direction and 500 m in the y-direction (Figure 1).

We consider a dynamically complex experimental ~~setup that is similar to a real-world application~~
~~and is based on~~ setting involving various time-dependent external forcings. The recharge is assumed
 spatially heterogenous and sampled using the GCOSIM3D toolbox (Gómez-Hernández and Journel,
 1993) with statistical parameters shown in Table 2. Three different pumping wells (PW) are inserted
 400 within the aquifer domain and can be seen in Figure 1 (square symbols). From these wells, transient
 pumping of groundwater takes place with different daily values as plotted in the left panel of Figure
 2. The highest pumping rates are associated with PW2 with an average daily rate of 5.935×10^{-7}
 m³/day. Smaller temporal variations in water pumping rates are assigned to PW1 and PW3. Three
 other monitoring wells (MW1, MW2, MW3) are also placed within the aquifer domain to evaluate
 405 the groundwater flow filters estimates. We further assess the prediction skill of the model after data
 assimilation using a control well (CW) placed in the middle of the aquifer (indicated by a diamond
 symbol). The assigned values for the hydraulic conductivity and recharge rates might be smaller than

what is generally used in real world applications. This however should not affect the performance of the tested schemes.

410 Prior to assimilation, a reference run is first conducted for each experimental setup using the prescribed parameters above, and is considered as the truth. We simulate the groundwater flow system over a year-and-a-half period using the classical fourth-order Runge Kutta method with a time step of 12 hours. The initial hydraulic head configuration is obtained after a 2-years model spin-up starting from a uniform 15 m head. Reference heterogenous recharge rates are used in the setup as explained
415 before. The water head changes (in m) after 18 months are displayed with contour lines in the left panel of Figure 3. One can notice larger variations in the water head in the lower left corner of the aquifer domain, consistent with the high conductivity values in that region. The effects of transient pumping in addition to the heterogenous recharge rates are also well observed in the vicinity of the pumping wells.

420 4.2 Assimilation Experiments

To imitate a realistic setting, we impose various perturbations on the reference model and set our goal to estimate the water head and the hydraulic conductivity fields using an imperfect forecast model and perturbed data extracted from the reference (true) run. This experimental framework is known as "twin-experiments". In the forecast model, we perturb both transient pumping and spatial
425 recharge rates. The perturbed recharge field, as compared to the reference recharge in Figure 2, is sampled with different variogram parameters as shown in Table 2. Pumping rates from PW1, PW2 and PW3 are perturbed by adding a Gaussian noise with mean zero and standard deviation equal to 20% of the reference transient rates. The flow field simulated by the forecast (perturbed) model after 18 months is shown in the right panel of Figure 3. Compared to the reference field, there are clear
430 spatial differences in the hydraulic head, especially around the first and second pumping wells.

To demonstrate the effectiveness of the proposed Dual-EnKF_{OSA}, we evaluate its performances against the standard Joint- and Dual-EnKFs under different experimental scenarios. We further conduct a number of sensitivity experiments, changing: (1) the ensemble size, (2) the temporal frequency of available observations, (3) the number of observation wells in the domain, and (4) the measurement error. For the frequency of the observations, we consider 6 scenarios in which hydraulic head
435 measurements are extracted from the reference run every 1, 3, 5, 10, 15, and 30 days. Of course, $\mathbf{x}_n^{a,(m)}$ is equal to $\mathbf{x}_n^{f,(m)}$ when no observation is assimilated. We also test four different observational networks assuming 9, 15, 25 and 81 wells uniformly distributed throughout the aquifer domain (Figure 3 displays two of these networks; with 9 and 25 wells). We evaluate the algorithms under 10
440 different scenarios in which the observations were perturbed with Gaussian noise of zero mean and a standard deviation equal to 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.50, 1, 2 and 3 m. Such measurement errors, which can be due to instruments errors, conversion of pressure to water head, or piezometer

well defects, are typical values (order of centimetres to meters) observed at real hydrologic sites (Post and von Asmuth, 2013).

445 To initialise the filters, we follow Gharamti et al. (2014a) and perform a 5-years **simulation** (**spin-up**) run using the perturbed forecast model starting from the mean hydraulic head, \bar{h}_{REF} , of the reference run solution. ~~Then, we randomly select~~ \bar{h}_{REF} is calculated as the temporal mean at every grid cell of the reference run snapshots (a total of 1095, retained every 12 hours). After 5 years, a set of 3650 head maps are obtained. From these, we randomly select N_e head maps and
 450 use it as the initial hydraulic head snapshots to form the initial state ensemble. By doing so, the dynamic head changes that may occur in the aquifer are well represented by the initial ensemble. The corresponding parameters' realizations are sampled with the geostatistical software, GCOSIM3D, using the same variogram parameters of the reference conductivity field but conditioned on two hard measurements as indicated by black crosses in Figure 1. The two data points capture some parts of
 455 the high conductivity regions in the domain, and thus one should expect a poor representation of the low conductivity areas in the initial $\log(K)$ ensemble. This is a challenging case for the filters especially when a sparse observational network is considered. To ensure consistency between the hydraulic heads and the conductivities at the beginning of the assimilation, we conduct a spin-up of the whole state-parameters ensemble for a 6-months period using perturbed recharge time-series for
 460 each ensemble member.

The filter estimates resulting from the different filters are evaluated based on their average absolute forecast errors (AAE) and their average ensemble spread (AESP):

$$AAE = N_{xz}^{-1} N_e^{-1} \sum_{j=1}^{N_e} \sum_{i=1}^{N_{xz}} \left| \mathbf{x}z_{j,i}^{f,e} - \mathbf{x}z_i^t \right|, \quad (38)$$

$$AESP = N_{xz}^{-1} N_e^{-1} \sum_{j=1}^{N_e} \sum_{i=1}^{N_{xz}} \left| \mathbf{x}z_{j,i}^{f,e} - \hat{\mathbf{z}}_i^{f,e} \right|, \quad (39)$$

465 where $\mathbf{x}z_i^t$ is the reference "true" value of the variable (state or parameter) at cell i , $\mathbf{x}z_{j,i}^{f,e}$ is the forecast ensemble value of the variable, and $\hat{\mathbf{z}}_i^{f,e}$ is the forecast ensemble mean at location i . AAE measures the estimate-truth misfit and AESP measures the ensemble spread, or the confidence in the estimated values (Hendricks Franssen and Kinzelbach, 2008). N_z is the total number of variables in the domain and equal to N_x or N_θ . We further assess the accuracy of the estimates by
 470 plotting the resulting field and variance maps of both hydraulic head and conductivities.

5 Results and Discussion

5.1 Sensitivity to the ensemble size

We first study the sensitivity of the three algorithms to the ensemble size, N_e . In realistic ground-water applications, we would be restricted to small ensembles due to computational limitations.

475 Obtaining accurate state and parameter estimates with small ensembles is thus desirable. We carry
the experiments using three ensemble sizes, $N_e = 50, 100$ and 300 , and we fix the frequency of
the observations to half a day, the number of wells to nine (Figure 3, left observation network) and
the measurement error standard deviation to 0.50 m. We plot the resulting AAE time series of the
state and parameters in Figure 4. As shown, the performance of the Joint-EnKF, Dual-EnKF, Joint-
480 EnKF_{OSA} and Dual-EnKF_{OSA} improves as the ensemble size increases, reaching a mean AAE of
 $0.161, 0.160$, and 0.156 m for $N_e = 300$, respectively. The Joint-EnKF and the Dual-EnKF exhibit
similar behaviors, with a slight advantage for the Dual-EnKF. As argued by Gharamti et al. (2014a),
the Dual-EnKF is generally expected to produce more accurate results only when large enough en-
sembles are used. We have tested the Joint- and the Dual-EnKFs using 1000 members and found
485 that the Dual-EnKF is around 9% more accurate in term of AAE. The proposed Dual-EnKF_{OSA}
provides the best estimates in all tested scenarios. The Joint-EnKF_{OSA} outperforms the Joint- and
Dual-EnKFs, but is about 5% less accurate than the Dual-EnKF_{OSA}, especially after the first year
of assimilation. On average, with changing ensemble size, the Dual-EnKF_{OSA} leads to about 7%
improvement compared with the standard joint and dual schemes. In terms of the conductivity esti-
490 mates, the proposed scheme produces more accurate estimates for all three ensemble sizes. At the
early assimilation stage, the four schemes seem to provide similar results, but this eventually changes
after 6 months beyond which the Dual-EnKF_{OSA} clearly outperforms the other schemes.

We furthermore examined the estimated uncertainties about the forecast estimates by computing
the average spread of both the hydraulic head and conductivity ensembles. To do this, we evaluated
495 the mean-temporal-mean AESP of both variables and tabulated the results for the three ensemble
sizes in Table 3. For all schemes ~~and as expected, -, increasing the ensemble would increase the~~
~~spread seems to increase as the ensemble size increases.~~ spread of the hydraulic head ensemble due
to the natural variability of the considered subsurface system. In contrast, the AESP conductivity
decreases as N_e increases, probably because of the persistence nature of its prescribed dynamics.
500 The Dual-EnKF_{OSA} has the smallest mean AESP for all cases, suggesting more confidence in the
head and conductivity estimates.

One could also exploit the computed AAE and AESP to assess whether the filters suffer from the
inbreeding problem. Filter inbreeding occurs when the variance of the state and parameters ensem-
ble is increasingly reduced over time. This may not only ~~deteriorates~~ deteriorate the quality of the
505 estimated filter error covariance matrices, but also wrongly suggests more confidence in the forecast
and strongly limits the filter update by the incoming observation. One standard test for examining
inbreeding is to compute the ratio of the AAE to the AESP (Hendricks Franssen and Kinzelbach,
2008). In a well designed assimilation system (that does not suffer from inbreeding) such a ratio
should be close to one; in other words, the AAE and AESP are almost of the same order. Examining
510 Figure 4 and Table 4, the ratio of the AAE to the AESP for the different tested ensemble sizes is,
on-average, very close to 1 for all three schemes, as reported in Table 4. This clearly suggests that

no filtering inbreeding issues are encountered in the present setup. This could be due to the imposed stochastic model errors (as described in Section 4), which seems to maintain enough spread in the hydraulic head and conductivity ensembles. Another method for tackling the inbreeding problem is to combine the EnKF with the so-called stochastic moments equations that govern the time evolution of conditional expectations of the state and parameters as well as the associated covariances, as suggested by Panzeri et al. (2013, 2015).

In terms of computational cost, we note that our assimilation results were obtained using a 2.30 GHz MAC workstation and 4 cores for parallel looping while integrating the ensemble members. The Joint-EnKF is the least intensive requiring 70.61 sec to perform a year-and-a-half assimilation run using 50 members. The Dual-EnKF and Dual-EnKF_{OSA}, on the other hand, require 75.37 and 77.04 sec, respectively. The Dual-EnKF is computationally more demanding than the Joint-EnKF because it includes an additional propagation step of the ensemble members as discussed in Section 3.3. Likewise, the proposed Dual-EnKF_{OSA} requires both an additional propagation step and an update step of the state members. Its computational complexity is thus greater than the joint scheme and roughly equivalent to that of the Dual-EnKF. Note that in the current setup the cost of integrating the groundwater model is not very significant as compared to the cost of the update step. This is ~~however usually not the case in~~ due to the simplified structure of the utilized hydrological model. This however should not hold for large-scale hydrological applications.

5.2 Sensitivity to the frequency of observations

In the second set of experiments, we test the filters' behavior with different temporal frequency of observations, i.e., the times at which head observations are assimilated. We implement the three filters with 100 members and use data from nine observation wells perturbed with 0.10 m noise.

Figure 5 plots the mean AAE of the hydraulic conductivity estimated using the three filters for the six different ~~observation frequency scenarios~~ observations sampling frequencies. The Dual- and Joint-EnKFs lead to comparable performances, but the latter performs slightly better when data are assimilated more frequently, i.e., every five and three days. The performance of the proposed Dual-EnKF_{OSA}, as seen from the plot, is rather good and its estimates are more consistent with the data than those computed by the other two filters. The best Dual-EnKF_{OSA} results are obtained when assimilating data every 1, 3, and 5 days. The improvements over the joint and the dual schemes decrease as the frequency of observations in time decreases. The reason for this is related to the nature of the Dual-EnKF_{OSA} algorithm, which adds a one-step-ahead-smoothing to the analyzed head ensemble members before updating the forecast parameters and the state samples. Therefore, the more data are available, the greater the number of applied smoothing steps, and hence the better the characterization of the state and parameters. To illustrate, the smoothing step of the state ensemble enhances its statistics and eventually provides more consistent state-parameters cross-correlations to

better predict the data. When assimilating hydraulic head data on a daily basis, the proposed Dual-EnKF_{OSA} leads to about 24% more accurate conductivity estimates than the Joint and Dual-EnKFs.

We have also compared the hydraulic head estimates ~~when changing the temporal frequency for~~
550 different sampling frequencies of observations. Similar to the parameters, the improvements of the Dual-EnKF_{OSA} algorithm over the other schemes become significant when more data are assimilated over time. Overall, the benefits of the proposed scheme ~~are~~ seem to be more pronounced for the estimation of the parameters, probably because the conductivity values at all aquifer cells are indirectly updated using hydraulic head data, requiring more observations for efficient estimation.

555 One effective way to evaluate the estimates of the state is to examine the evolution of the reference heads and the forecast ensemble members at various aquifer locations. For this, we plot in Figure 6 the true and the estimated time-series change in hydraulic head at the assigned monitoring wells as they result from the Joint-EnKF, Dual-EnKF and the Dual-EnKF_{OSA}. We use 100 ensemble members and assume the 9 data points are available every five days. At MW1, the performance of the
560 three filters is quite similar and they all successfully reduce the uncertainties and recover the true evolution of the hydraulic head at that location. We note that between the 5th and the 9th month, the Dual-EnKF seems to underestimate the reference values of the hydraulic head as compared to the other two schemes. At MW2 and MW3, the ensemble spread of all three filters shrinks shortly after the start of assimilation, but remains larger than those at MW1. The proposed Dual-EnKF_{OSA}
565 ~~performs fairly well, providing a reasonable recovery of~~ well recovers the reference trajectory at MW2 and MW3. The ensemble head values obtained using the Joint- and the Dual-EnKFs at MW2 are less accurate. Furthermore, the Joint and the Dual-EnKF ensemble members tend to underestimate the reference hydraulic head at MW3 over the first 6 months of assimilation. Beyond this, there is a clear overestimation of the head values, especially by the Dual-EnKF, up to the end of the first
570 year.

5.3 Sensitivity to the number of observations

We further examine the robustness of the proposed Dual-EnKF_{OSA} against the Joint- and Dual-EnKFs to different numbers of observation wells inside the aquifer domain. We thus compare our earlier estimates resulting from only nine wells, five days ~~observation frequency~~ sampling period,
575 and 0.10 m measurement error standard deviation with a new set of estimates resulting from more dense observational networks with 15, 25 and 81 wells. Figure 7 plots the time-series curves of the AAE as they result from the four observational scenarios for hydraulic head and conductivity. As shown, the behavior of the filters improves as more data are assimilated. Clearly, the proposed scheme provides the best estimates over the entire simulation window. More precisely, and towards
580 the end of assimilation, the Dual-EnKF_{OSA} with only nine data points exhibits less forecast errors for conductivity than does the Dual-EnKF (and Joint-EnKF) with 81 data points. Likewise when

assimilating head data from 15 and 25 wells, the proposed algorithm outperforms the Joint and Dual EnKFs and yields more accurate hydraulic head estimates by the end of the simulation window.

To further assess the performance of the filters we analyze the spatial patterns of the estimated fields. To do so, we plot and interpret the ensemble mean of the conductivity as it results from the three filters using nine observation wells. We compare the estimated fields after 18 months (Figure 8) with the reference conductivity. As can be seen, the Joint- and the Dual-EnKFs exhibit some overshooting in the southern (low conductivity) and central regions of the domain. In contrast, the Dual-EnKF_{OSA} better delineates these regions and further provides reasonable estimates of the low conductivity area in the northwest part of the aquifer. In general and for all tested schemes, the estimated conductivity field does not capture very well the spatial variability of the reference field. This is due to the large model errors imposed on the recharge and pumping rates during the forecasts. This limits the efficiency of the assimilation system, especially with the recovery of small scale conductivity structures, but also allows for more straightforward assessment of the different techniques.

5.4 Sensitivity to measurement errors

In the last set of sensitivity experiments, we fix the number of wells to nine, the ~~observation frequency~~ sampling period to 5 days, and ~~we use different measurement errors test with different standard deviations of measurement error~~ to perturb the observations. We plot the results of ten different observational error scenarios in Figure 9 and compare the conductivity estimates obtained using the Joint-EnKF, Dual-EnKF and the Dual-EnKF_{OSA}. In general, the performance of the filters appears to degrade as the observations are perturbed with larger degree of noise. All three filters exhibit similar performances with large observational error; i.e., 1, 2 and 3 m. This can be expected because larger observational errors decrease the impact of data assimilation, and ~~thus may reduce~~ the estimation process ~~is reduced~~ to a model prediction only. The plot also suggests that the estimates of the Dual-EnKF_{OSA} with 0.30 m measurement ~~errors error standard deviation~~ are better than those of the Joint- and the Dual-EnKFs with 0.10 m error. With 0.10 m measurement error standard deviation, the estimate of the Dual-EnKF_{OSA} is also approximately 12% better.

Finally, we investigated the time-evolution of the ensemble variance of the conductivity estimates as they result from the Dual-EnKF and the Dual-EnKF_{OSA} with 0.10 m measurement noise. Spatially, the ensemble variance maps provide insight about the uncertainty reduction due to data assimilation. The initial map (left panel, Figure 10) exhibits zero variance at the sampled two locations and increasing variance away from these locations. The ensemble spread of conductivity field from the two filters (right panels, Figure 10) after 6 and 18 months is quite small and comparable. The Dual-EnKF_{OSA}, however, tends to maintain a larger variance towards the north edges than the Dual-EnKF, which in turn help increase the weight of the observations in this area.

5.5 Prediction capability assessment

To further assess the system performance in terms of parameters retrieval, we have integrated the model in prediction mode (without assimilation) for an additional period of 18 months starting from the end of the assimilation period. We plot in Figure 11, using the final estimates of the conductivity as they result from the three filters (after 18 months), the time evolution of the hydraulic head at the control well (CW). The ensemble size is set to 100, ~~observation~~-observations sampling frequency is 1 day, number of data wells is 25 and measurement noise is 0.5 m. The reference head trajectory at the CW decreases from 17.5 to 16.9 m in the first 2 years, and then slightly increases to 17.2 m in the rest of the year. The forecast ensemble members of the Joint-EnKF at this CW fail to capture to reference trajectory of the model. This is due to the large measurement noise imposed on the head data. The Dual-EnKF performs slightly better and predicts hydraulic head values that are closer to the reference solution. The performance of the Dual-EnKF_{OSA}, as shown, is the closest to the reference head trajectory and moreover, one of the forecast ensemble members successfully captures the true head evolution. We further plot the absolute bias of the hydraulic head during the prediction phase, i.e., after 1.5 years, using the three filtering schemes. As shown, the bias in the Joint-EnKF reaches about 0.6 m after 3 years. On the other hand, the Dual-EnKF_{OSA} and, to a lesser extent, the Dual-EnKF, clearly lead to more accurate long term forecasts with smaller bias in the resulting hydraulic head estimates. Similar tests was also conducted at other locations in the aquifer, all resulting in similar conclusions.

Finally, in order to demonstrate that our results are statistically robust, 10 other test cases with different reference conductivity and heterogeneous recharge maps were investigated. In each of these cases, we sampled the reference fields by varying the variogram parameters, such as variance, x and y ranges, etc. The pumping rates and the initial head configuration among the cases were also altered. For all 10 test cases, we fixed the ensemble size to 100 and used data from nine observation wells every 3 days. We set the measurement error standard deviation to 0.10 m. We plot the resulting conductivity estimates (mean AAE) from each case in Figure 12. ~~The~~-As shown in the plot, the estimates of the three filters ~~, as shown on the plot,~~ give a statistical evidence that the proposed scheme always provides more accurate estimates than the Joint-/Dual-EnKF and is more robust to changing dynamics and experimental setups. Similar results were obtained for the hydraulic head estimates. Averaging over all test cases, the proposed scheme provides about 17% more accurate estimates in term of AAE than the standard Joint- and Dual-EnKFs.

6 Conclusions

We presented a one-step-ahead smoothing based dual ensemble Kalman filter (Dual-EnKF_{OSA}) for state-parameter estimation of subsurface groundwater flow models. The Dual-EnKF_{OSA} is derived using a Bayesian probabilistic formulation combined with two classical stochastic sampling proper-

ties. It differs from the standard Joint-EnKF and Dual-EnKF in the fact that the order of the time-update step of the state (forecast by the model) and the measurement-update step (correction by the incoming observations) is inverted. Compared with the Dual-EnKF, this introduces a smoothing step
655 to the state by future observations, which seems to provide the model, at the time of forecasting, with better and rather physically-consistent state and parameters ensembles.

We tested the proposed Dual-EnKF_{OSA} on a conceptual groundwater flow model in which we estimated the hydraulic head and spatially variable conductivity parameters. We conducted a number of sensitivity experiments to evaluate the accuracy and the robustness of the proposed scheme and
660 to compare its performance against those of the standard Joint and Dual EnKFs. The experimental results suggest that the Dual-EnKF_{OSA} is more robust, successfully estimating the hydraulic head and the conductivity field under different modeling scenarios. Sensitivity analyses demonstrate that when more observations are assimilated, the Dual-EnKF_{OSA} becomes more effective and significantly outperforms the standard Joint- and Dual-EnKF schemes. In addition, when using a sparse
665 observation network in the aquifer domain, the accuracy of the Dual-EnKF_{OSA} estimates is better preserved, unlike the Dual-EnKF, which seems to be more sensitive to the number of hydraulic wells. Moreover, the Dual-EnKF_{OSA} results are shown to be more robust against observation noise. On average, the Dual-EnKF_{OSA} scheme leads to around 10% more accurate state and parameters solutions than those resulting from the standard Joint- and Dual-EnKFs.

The proposed scheme is easy to implement and only requires minimal modifications to a standard
670 EnKF code. It is further computationally feasible, requiring only a marginal increase in the computational cost compared to the Dual-EnKF. This scheme should therefore be beneficial to the hydrology community given its consistency, high accuracy, and robustness to changing modeling conditions. It could serve as an efficient estimation tool for real-world problems, such as groundwater, contaminant transport and reservoir monitoring, in which the available data are often sparse and noisy.
675 Potential future research includes testing the Dual-EnKF_{OSA} with realistic large-scale groundwater, contaminant transport and reservoir monitoring problems. Furthermore, combining the proposed state-parameter estimation scheme with other iterative and hybrid ensemble approaches may be a promising direction for further improvements.

680 Appendix A

The following classical results of random sampling are extensively used in the derivation of the ensemble-based filtering algorithms presented in this paper.

Property 1 (Hierarchical sampling (Robert, 2007)). Assuming that one can sample from $p(\mathbf{x}_1)$ and $p(\mathbf{x}_2|\mathbf{x}_1)$, then a sample, \mathbf{x}_2^* , from $p(\mathbf{x}_2)$ can be drawn as follows:

- 685 1. $\mathbf{x}_1^* \sim p(\mathbf{x}_1)$;
2. $\mathbf{x}_2^* \sim p(\mathbf{x}_2|\mathbf{x}_1^*)$.

Property 2 (Conditional sampling (Hoffman and Ribak, 1991)). Consider a Gaussian pdf, $p(\mathbf{x}, \mathbf{y})$, with \mathbf{P}_{xy} and \mathbf{P}_y denoting the cross-covariance of \mathbf{x} and \mathbf{y} and the covariance of \mathbf{y} , respectively. Then a sample, \mathbf{x}^* , from $p(\mathbf{x}|\mathbf{y})$, can be drawn as follows:

- 690 1. $(\tilde{\mathbf{x}}, \tilde{\mathbf{y}}) \sim p(\mathbf{x}, \mathbf{y});$
 2. $\mathbf{x}^* = \tilde{\mathbf{x}} + \mathbf{P}_{xy} \mathbf{P}_y^{-1} [\mathbf{y} - \tilde{\mathbf{y}}].$

Appendix B

We show here that the samples, $\tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$, given in (32), are drawn from the *a posteriori* transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$. Lets start by showing how Eqs. (30)-(31) are obtained. According to
 695 (15), on can show that the members, $\tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$, given by (30), are samples from the transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta) = \mathcal{N}_{\mathbf{x}_n}(\mathcal{M}_{n-1}(\mathbf{x}_{n-1}, \theta), \mathbf{Q}_{n-1})$. Furthermore, one may use Property 1 in (22), which is recalled here,

$$p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta) = \int \underbrace{p(\mathbf{y}_n|\mathbf{x}_n)}_{\mathcal{N}_{\mathbf{y}_n}(\mathbf{H}_n \mathbf{x}_n, \mathbf{R}_n)} \underbrace{p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta)}_{\approx \{\tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta)\}_{m=1}^{N_e}} d\mathbf{x}_n, \quad (\text{B1})$$

to obtain the members, $\tilde{\mathbf{y}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$, given by (31); such members are, indeed, samples from
 700 $p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta)$.

Now, using the samples $\tilde{\xi}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$ of $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta) = p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})$ and the samples $\tilde{\mathbf{y}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$ of $p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta) = p(\mathbf{y}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})$, one can apply Property 2 to the joint pdf, $p(\mathbf{x}_n, \mathbf{y}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n-1})$, assuming it Gaussian, to show that the samples $\tilde{\mathbf{x}}_n^{(m)}(\mathbf{x}_{n-1}, \theta)$, given in (32), are drawn from the *a posteriori* transition pdf, $p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_{0:n}) = p(\mathbf{x}_n|\mathbf{x}_{n-1}, \theta, \mathbf{y}_n)$.

705 *Acknowledgements.* Research reported in this publication was supported by King Abdullah University of Science and Technology (KAUST).

References

- Alcolea, A., Carrera, J., and Medina, A.: Pilot points method incorporating prior information for solving the groundwater flow inverse problem, *Advances in water resources*, 29, 1678–1689, 2006.
- 710 Bailey, R. and Baù, D.: Ensemble smoother assimilation of hydraulic head and return flow data to estimate hydraulic conductivity distribution, *Water Resources Research*, 46, 2010.
- Chang, S.-Y., Chowhan, T., and Latif, S.: State and parameter estimation with an SIR particle filter in a three-dimensional groundwater pollutant transport model, *Journal of Environmental Engineering*, 138, 1114–1121, 2012.
- 715 Chen, Y. and Zhang, D.: Data assimilation for transient flow in geologic formations via ensemble Kalman filter, *Advances in Water Resources*, 29, 1107–1122, 2006.
- Crestani, E., Camporese, M., Ba, D., and Salandin, P.: Ensemble Kalman filter versus ensemble smoother for assessing hydraulic conductivity via tracer test data assimilation, *Hydrology and Earth System Sciences*, 17, 1517–31, 2013.
- 720 Desbouvries, F., Petetin, Y., and Ait-El-Fquih, B.: Direct, Prediction- and Smoothing-based Kalman and Particle Filter Algorithms, *Signal Processing*, 91, 2064–2077, 2011.
- Doucet, A., de Freitas, N., and Gordon, N., eds.: *Sequential Monte Carlo Methods in Practice*, Statistics for Engineering and Information Science, Springer Verlag, New York, 2001.
- Erdal, D. and Cirpka, O. A.: Joint inference of groundwater-recharge and hydraulic-conductivity fields from head data using the Ensemble-Kalman filter, *Hydrology and Earth System Sciences*, 12, 5565–99, 2015.
- 725 Feyen, L., Vrugt, J. A., Nualláin, B. Ó., van der Knijff, J., and De Roo, A.: Parameter optimisation and uncertainty assessment for large-scale streamflow simulation with the LISFLOOD model, *Journal of Hydrology*, 332, 276–289, 2007.
- Gharamti, M. and Hoteit, I.: Complex step-based low-rank extended Kalman filtering for state-parameter estimation in subsurface transport models, *Journal of Hydrology*, 509, 588–600, 2014.
- 730 Gharamti, M., Kadoura, A., Valstar, J., Sun, S., and Hoteit, I.: Constraining a compositional flow model with flow-chemical data using an ensemble-based Kalman filter, *Water Resources Research*, 2014a.
- Gharamti, M., Valstar, J., and Hoteit, I.: An adaptive hybrid EnKF-OI scheme for efficient state-parameter estimation of reactive contaminant transport models, *Advances in Water Resources*, 71, 1–15, 2014b.
- 735 Gharamti, M. E., Hoteit, I., and Valstar, J.: Dual states estimation of a subsurface flow-transport coupled model using ensemble Kalman filtering, *Advances in Water Resources*, 60, 75–88, 2013.
- Gharamti, M. E., Ait-El-Fquih, B., and Hoteit, I.: An iterative ensemble Kalman filter with one-step-ahead smoothing for state-parameters estimation of contaminant transport models, *Journal of Hydrology*, 527, 442–57, 2015.
- 740 Gómez-Hernández, J. J. and Journel, A. G.: Joint sequential simulation of multigaussian fields, in: *Geostatistics Troia '92*, pp. 85–94, Springer, 1993.
- Hendricks Franssen, H. and Kinzelbach, W.: Real-time groundwater flow modeling with the Ensemble Kalman Filter: Joint estimation of states and parameters and the filter inbreeding problem, *Water Resources Research*, 44, 2008.
- 745 Hendricks Franssen, H. and Kinzelbach, W.: Ensemble Kalman filtering versus sequential self-calibration for inverse modelling of dynamic groundwater flow systems, *Journal of hydrology*, 365, 261–274, 2009.

- Hoffman, Y. and Ribak, E.: Constrained realizations of Gaussian fields - a simple algorithm, *The Astrophysical Journal*, 380, L5–L8, 1991.
- 750 Hoteit, I., Pham, D.-T., Triantafyllou, G., and Korres, G.: A New Approximate Solution of the Optimal Nonlinear Filter for Data Assimilation in Meteorology and Oceanography, *Monthly Weather Review*, 136, 317–334, 2008.
- Lee, W. and Farmer, C.: Data Assimilation by Conditioning of Driving Noise on Future Observations, *IEEE Transactions on Signal Processing*, 62, 3887–3896, 2014.
- 755 Li, L., Zhou, H., Gómez-Hernández, J. J., and Hendricks Franssen, H.-J.: Jointly mapping hydraulic conductivity and porosity by assimilating concentration data via ensemble Kalman filter, *Journal of Hydrology*, 428, 152–169, 2012.
- Lü, H., Yua, Z., Zhu, Yonghua, D.-S., Hao, Z., and Sudicky, A. E.: Dual state-parameter estimation of root zone soil moisture by optimal parameter estimation and extended Kalman filter data assimilation, *Advances in Water Resources*, 34, 395–406, 2011.
- 760 Lü, H., Hou, T., Horton, R., Zhu, Y., Chen, X., Jia, Y., Wang, W., and Fu, X.: The streamflow estimation using the Xinanjiang rainfall runoff model and dual state-parameter estimation method, *Journal of Hydrology*, 480, 102–114, 2013.
- McLaughlin, D.: An integrated approach to hydrologic data assimilation: interpolation, smoothing, and filtering, *Advances in Water Resources*, 25, 1275–1286, 2002.
- 765 McMillam, H. K., Hreinsson, E. Ö., Clark, M. P., Singh, S. K., Zammit, C., and Uddstrom, M. J.: Operational hydrological data assimilation with the recursive ensemble Kalman filter, *Hydrology and Earth System Sciences*, 17, 21–38, 2013.
- Montzka, C., Moradkhani, H., Weihermüller, L., Franssen, H.-J. H., Canty, M., and Vereecken, H.: Hydraulic parameter estimation by remotely-sensed top soil moisture observations with the particle filter, *Journal of hydrology*, 399, 410–421, 2011.
- 770 Moradkhani, H., Hsu, K.-L., Gupta, H., and Sorooshian, S.: Uncertainty assessment of hydrologic model states and parameters: Sequential data assimilation using the particle filter, *Water Resources Research*, 41, 2005a.
- Moradkhani, H., Sorooshian, S., Gupta, H. V., and Houser, P. R.: Dual state-parameter estimation of hydrological models using ensemble Kalman filter, *Advances in Water Resources*, 28, 135–147, 2005b.
- 775 Nævdal, G., Johnsen, L. M., Aanonsen, S. I., Vefring, E. H., et al.: Reservoir monitoring and continuous model updating using ensemble Kalman filter, *SPE journal*, 10, 66–74, 2005.
- Panzeri, M., Riva, M., Guadagnini, A., and Neuman, S. P.: Data assimilation and parameter estimation via ensemble Kalman filter coupled with stochastic moment equations of transient groundwater flow, *Water Resources Research*, 49, 1334–44, 2013.
- 780 Panzeri, M., Riva, M., Guadagnini, A., and Neuman, S. P.: Comparison of Ensemble Kalman Filter Groundwater-Data Assimilation Methods Based on Stochastic Moment Equations and Monte Carlo Simulation, *Advances in Water Resources*, 66, 8–18, 2014.
- Panzeri, M., Riva, M., Guadagnini, A., and Neuman, S. P.: EnKF coupled with groundwater flow moment equations applied to Lauswiesen aquifer, Germany, *Journal of Hydrology*, 521, 205–16, 2015.
- 785 Phale, H. A. and Oliver, D. S.: Data Assimilation Using the Constrained Ensemble Kalman Filter, *Society of Petroleum Engineers*, 16, 331–342, 2011.

- Post, V. E. and von Asmuth, J. R.: Review: Hydraulic head measurements-new technologies, classic pitfalls, *Hydrogeology Journal*, 21, 737–750, 2013.
- 790 Reichle, R. H., McLaughlin, D. B., and Entekhabi, D.: Hydrologic data assimilation with the ensemble Kalman filter, *Monthly Weather Review*, 130, 103–114, 2002.
- Robert, C.: *The Bayesian Choice: From Decision-Theoretic Foundations to Computational Implementation*, Springer Science & Business Media, New York, 2007.
- Samuel, J., Coulibaly, P., Dumedah, G., and Moradkhani, H.: Assessing Model State and Forecasts Variation in Hydrologic Data Assimilation, *Journal of Hydrology*, 2014.
- 795 Tian, X., Xie, Z., and Dai, A.: A land surface soil moisture data assimilation system based on the dual-UKF method and the Community Land Model, *Journal of Geophysical Research*, 113, 2008.
- Valstar, J. R., McLaughlin, D. B., Te Stroet, C., and van Geer, F. C.: A representer-based inverse method for groundwater flow and transport applications, *Water Resources Research*, 40, 2004.
- Vrugt, J. A., Gupta, H. V., Bouten, W., and Sorooshian, S.: A Shuffled Complex Evolution Metropolis algorithm 800 for optimization and uncertainty assessment of hydrologic model parameters, *Water Resources Research*, 39, 2003.
- Vrugt, J. A., Gupta, H. V., Nualláin, B., and Bouten, W.: Real-time data assimilation for operational ensemble streamflow forecasting, *Journal of Hydrometeorology*, 7, 548–565, 2006.
- Wan, E. A., Van Der Merwe, R., and Nelson, A. T.: Dual Estimation and the Unscented Transformation., in: 805 *NIPS*, pp. 666–672, Citeseer, 1999.
- Wen, X. H. and Chen, W. H.: Real-time reservoir updating using ensemble Kalman Filter: The confirming approach, *Society of Petroleum Engineering*, 11, 431–442, 2007.
- Zhou, H., Gómez-Hernández, J. J., Hendricks Franssen, H.-J., and Li, L.: An approach to handling non-Gaussianity of parameters and state variables in ensemble Kalman filtering, *Advances in Water Resources*, 810 34, 844–864, 2011.
- Zhou, H., Gómez-Hernández, J. J., and Li, L.: Inverse methods in hydrogeology: evolution and recent trends, *Advances in Water Resources*, 63, 22–37, 2014.

Table 1. Approximate computational complexities of the Joint-EnKF, the Dual-EnKF, and the Dual-EnKF_{OSA} algorithms. Notations are as follows. N_x : number of state variables, N_θ : number of parameter variables, N_y : number of observations, N : number of assimilation cycles, N_e : ensemble size, C_x : state model cost ($= N_x^2$ is the linear KF), C_θ : parameter model cost (usually free \equiv identity), C_y : observation operator cost ($= N_y N_x$ in the linear KF), S_x : storage volume for one state vector, S_θ : storage volume for one parameter vector.

Algorithm	Time-update	Measurement-update	Storage
<i>Joint-EnKF</i>	$NN_e(C_x + C_\theta)$	$NN_e(C_y + N_y N_\theta) + NN_e^2(N_x + N_\theta)$	$2NN_e(S_x + S_\theta)$
<i>Dual-EnKF</i>	$NN_e(2C_x + C_\theta)$	$2NN_e C_y + NN_e^2(N_x + N_\theta)$	$2NN_e(S_x + S_\theta)$
<i>Dual-EnKF_{OSA}</i>	$NN_e(2C_x + C_\theta)$	$2NN_e C_y + NN_e^2(2N_x + N_\theta)$	$2NN_e(S_x + S_\theta)$

Table 2. Parameters of the random functions for modeling the spatial distributions of the reference and perturbed recharge fields. The ranges in x and y directions for the [variogram-variogram](#) model are given by λ_x and λ_y , respectively. τ denotes the rotation angle of one clockwise rotation around the positive y -axis.

Recharge	Mean	Variance	Variogram	λ_x	λ_y	τ
Reference Field	-20 (m ³ /day)	1.03 (m³/day) ²	Gaussian	50 (m)	100 (m)	45°
Perturbed Field	-20 (m ³ /day)	1.21 (m³/day) ²	Gaussian	50 (m)	50 (m)	45°

Table 3. Mean average ensemble spread (AESP) of the water head and the hydraulic conductivity for three different ensemble sizes. The reported values are given for the Joint-EnKF, Dual-EnKF, Joint-EnKF_{OSA} and the proposed Dual-EnKF_{OSA}.

	Hydraulic Head			Conductivity		
	$N_e = 50$	$N_e = 100$	$N_e = 300$	$N_e = 50$	$N_e = 100$	$N_e = 300$
<i>Joint-EnKF</i>	0.12294 <u>0.123</u>	0.144	0.20014 <u>0.200</u>	1.0763 <u>1.076</u>	1.0144 <u>1.014</u>	0.95128 <u>0.951</u>
<i>Dual-EnKF</i>	0.1256 <u>0.126</u>	0.14469 <u>0.145</u>	0.20081 <u>0.201</u>	1.0745 <u>1.075</u>	1.0155 <u>1.016</u>	0.95129 <u>0.951</u>
<i>Joint-EnKF_{OSA}</i>	0.12498 <u>0.125</u>	0.14484 <u>0.145</u>	0.2006 <u>0.201</u>	1.0264 <u>1.026</u>	0.97651 <u>0.977</u>	0.9084 <u>0.908</u>
<i>Dual-EnKF_{OSA}</i>	0.11737 <u>0.117</u>	0.14125 <u>0.141</u>	0.18259 <u>0.183</u>	1.0388 <u>1.039</u>	0.90654 <u>0.907</u>	0.8791 <u>0.879</u>

Table 4. Filter inbreeding indicator: Ratio of the mean average-absolute-error (AAE) and mean average-ensemble-spread (AESP) of the water head and the hydraulic conductivity for three different ensemble sizes. The reported values are given for the Joint-EnKF, Dual-EnKF and the proposed Dual-EnKF_{OSA}.

	Hydraulic Head			Conductivity		
	$N_e = 50$	$N_e = 100$	$N_e = 300$	$N_e = 50$	$N_e = 100$	$N_e = 300$
<i>Joint-EnKF</i>	1.734	1.680	1.619	1.539	1.507	1.134
<i>Dual-EnKF</i>	1.449	1.443	1.360	1.123	1.123	0.834
<i>Dual-EnKF</i> _{OSA}	0.805	0.802	0.854	0.793	0.792	0.801

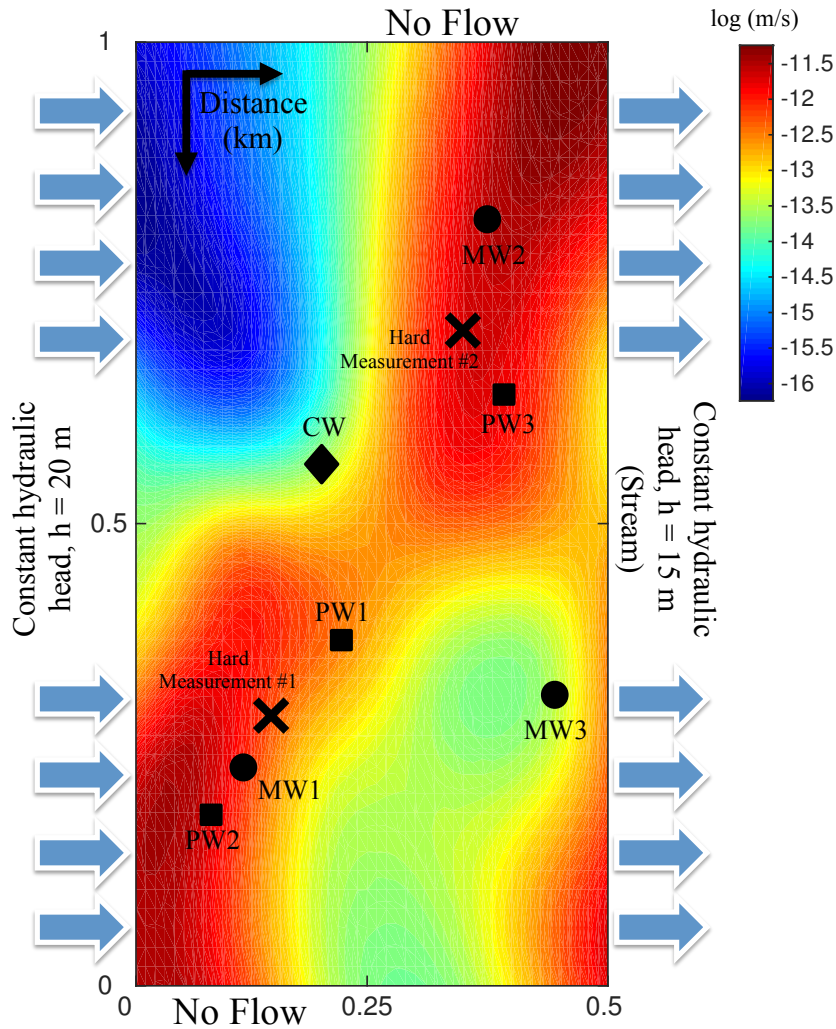


Figure 1. Plan view of the conceptual model for the 2D transient groundwater flow problem. East and west boundaries ([x direction](#)) are Dirichlet with a given prescribed hydraulic heads. North and south boundaries ([y direction](#)) are impermeable (no flow boundaries). The reference log-conductivity field was obtained using the sequential Gaussian simulation code (Gómez-Hernández and Journel, 1993). A Gaussian variogram model is considered with a mean of $-13 \log(\text{m/s})$, variance $Y = \log K$ of $1.5 \log(\text{m}^2/\text{s}^2)$, and range equal to 250 m and 500 m in the x and y directions, respectively. The black squares represent the pumping wells whereas the black circles denote the position of 3 monitoring wells. The black diamond is a control well. The two black crosses correspond to the locations where the conductivity values were used to condition the geostatistical simulation.

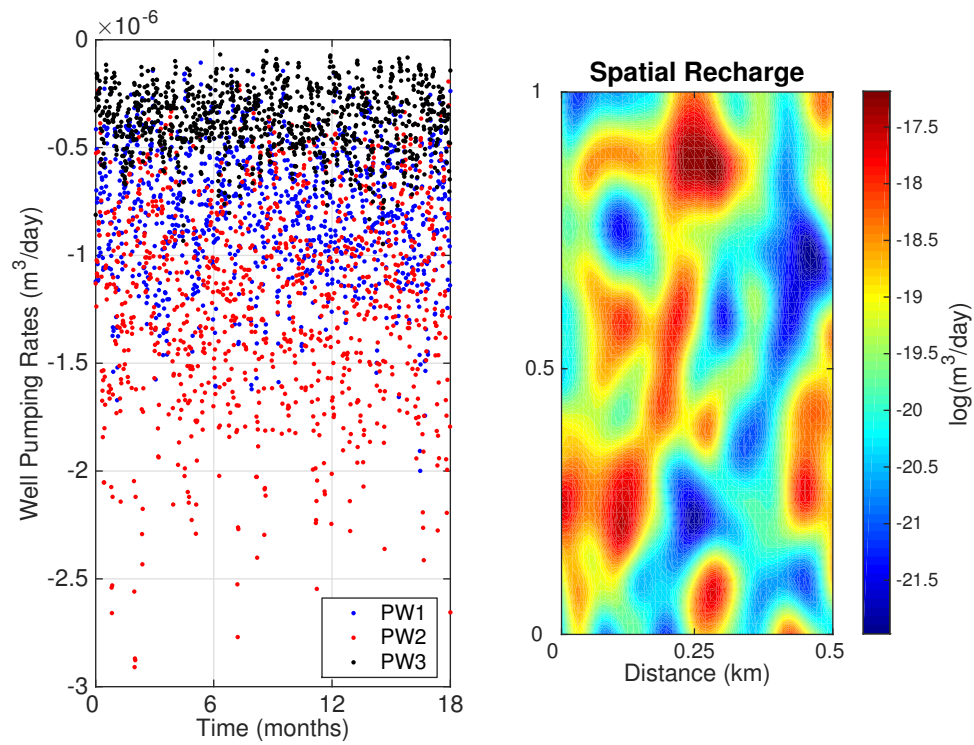


Figure 2. Left-Panel: Daily transient reference pumping rates from wells PW1, PW2 and PW3. Negative values indicate pumping or groundwater that is being removed from the aquifer. Right-Panel: Reference heterogeneous spatial recharge values obtained using the sequential Gaussian simulation code (Gómez-Hernández and Journel, 1993) with parameters given in Table 2.

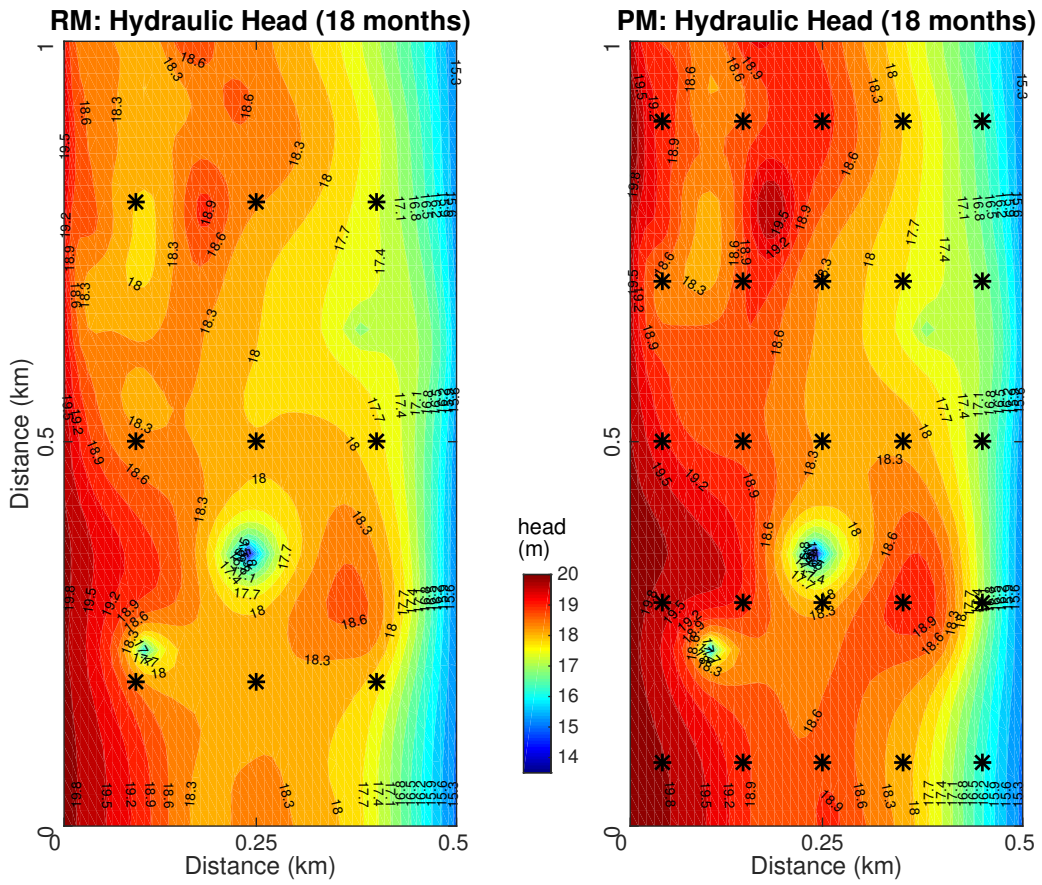


Figure 3. Groundwater flow contour maps obtained using the reference run (left panel) and the perturbed forecast model (right panel) after 18 months of simulation. The well locations from which head data are extracted are shown by black asterisks. In the left panel, we show the first network consisting of nine wells. In the right panel, the other network with 25 wells is displayed.

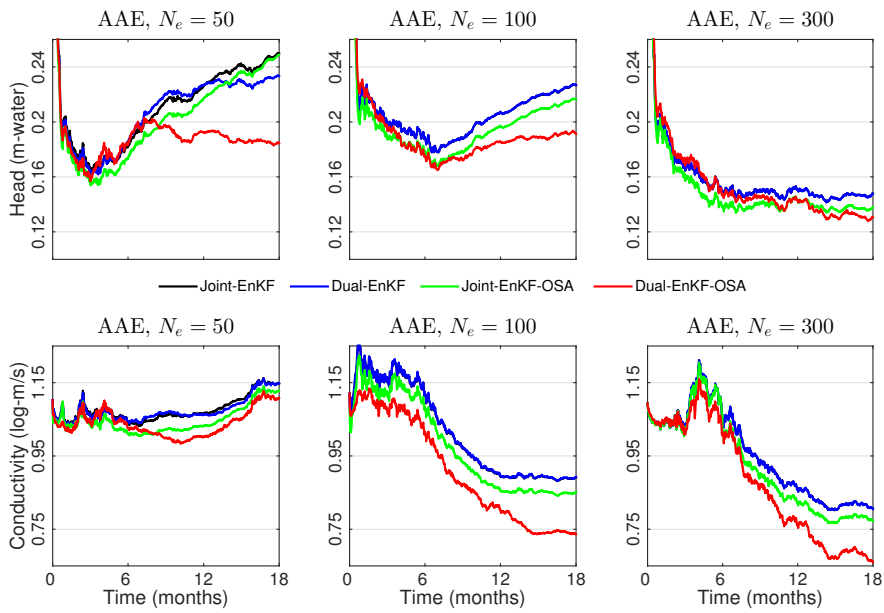


Figure 4. AAE time-series of the hydraulic head and conductivity using the Joint-EnKF, Dual-EnKF, Joint-EnKF_{OSA} and Dual-EnKF_{OSA}. Results are shown for 3 scenarios in which assimilation of hydraulic head data are obtained from nine wells every 0.5 days. The three experimental scenarios use 50, 100 and 300 ensemble members with 0.50 m as the measurement error [standard deviation](#).

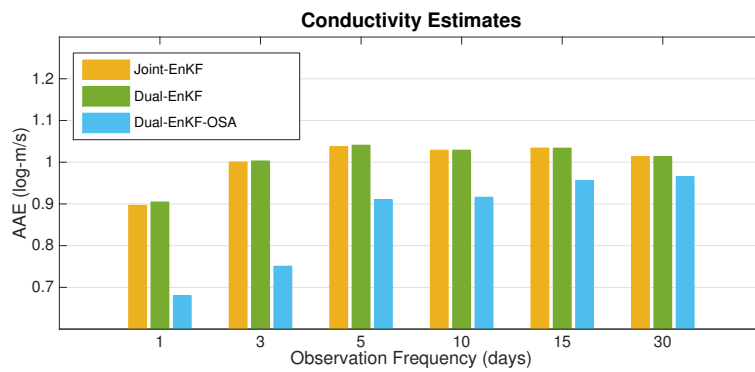


Figure 5. Mean average absolute errors (AAE) of log-hydraulic conductivity, $\log(K)$, obtained using the Joint-EnKF, Dual-EnKF, and Dual-EnKF_{OSA} schemes. Results are shown for 6 different scenarios in which assimilation of hydraulic head data are obtained from nine wells every 1, 3, 5, 10, 15 and 30 days. All 6 experimental scenarios use 100 ensemble members and 0.10 m as the measurement error standard deviation.

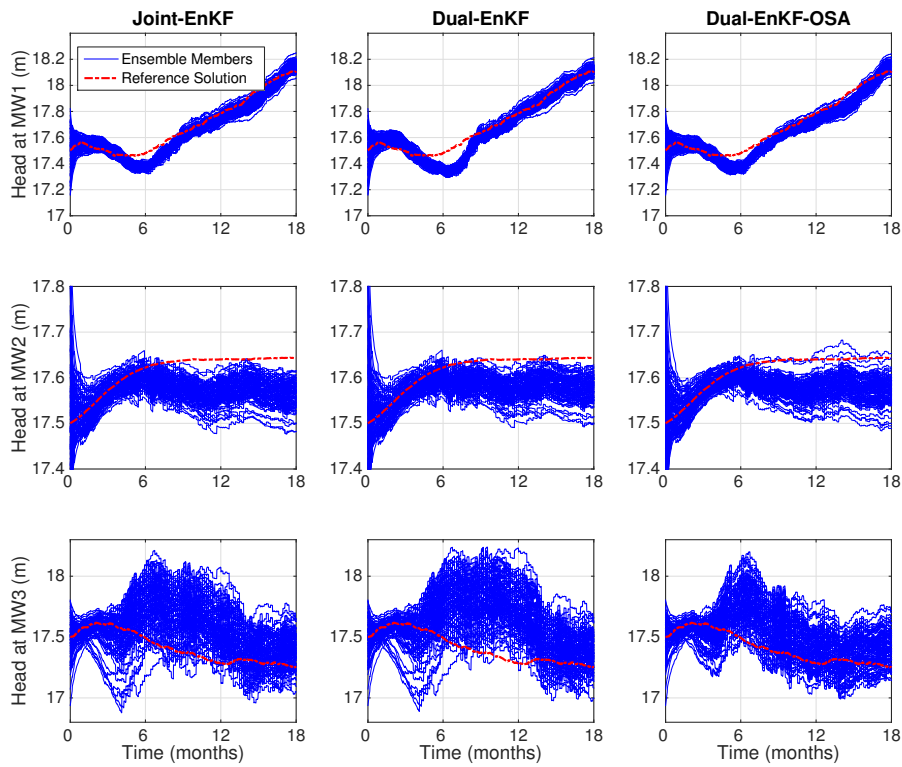


Figure 6. Reference (dashed) and predicted (solid) hydraulic head evolution at monitoring wells MW1, MW2, and MW3. Results are obtained using the Joint-EnKF and the Dual-EnKF_{OSA} schemes with 100 members, 5 days as observation frequencysampling period, 9 observation wells, and 0.10 m of measurement noise.

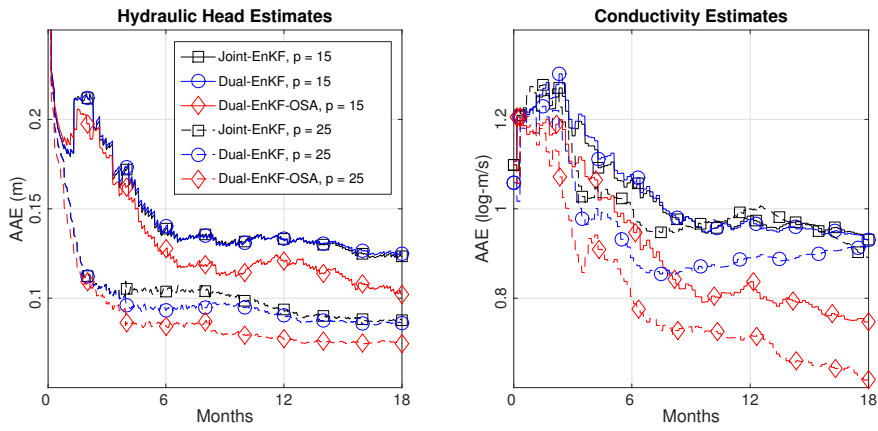


Figure 7. Time series of AAE of hydraulic head (left panel) and conductivity (right panel) using the Joint-EnKF, Dual-EnKF and Dual-EnKF_{OSA} schemes. Results are shown for 4-2 scenarios in which assimilation of hydraulic head data are obtained from 9-15, 25 and 81-25 wells (uniformly distributed throughout the aquifer domain) every 5 days. The four experimental scenarios use 100 ensemble members and 0.10 m as the measurement error standard deviation. The number of wells is denoted by p .

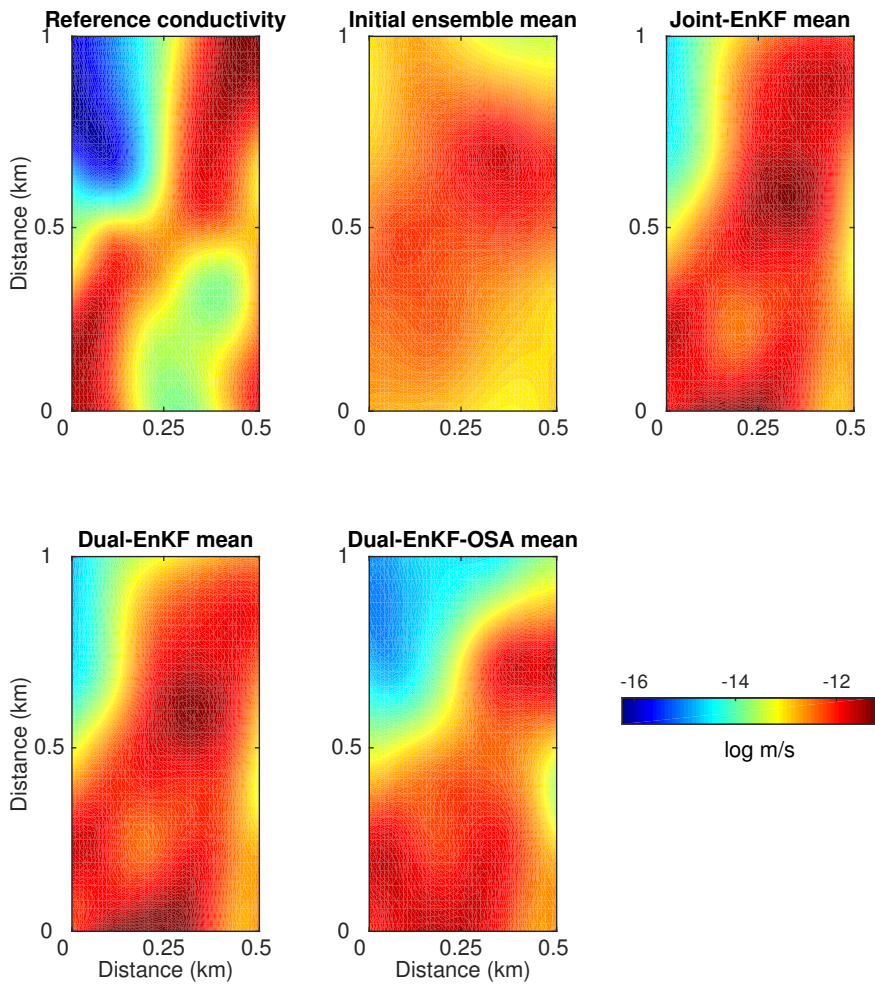


Figure 8. Spatial maps of the reference, initial and recovered ensemble means of hydraulic conductivity using the Joint-EnKF, Dual-EnKF, and Dual-EnKF_{OSA} schemes. Results are shown for a scenario in which assimilation of hydraulic head data is obtained from nine wells every five days. This experiment uses 100 ensemble members and 0.10 m as the measurement error standard deviation.

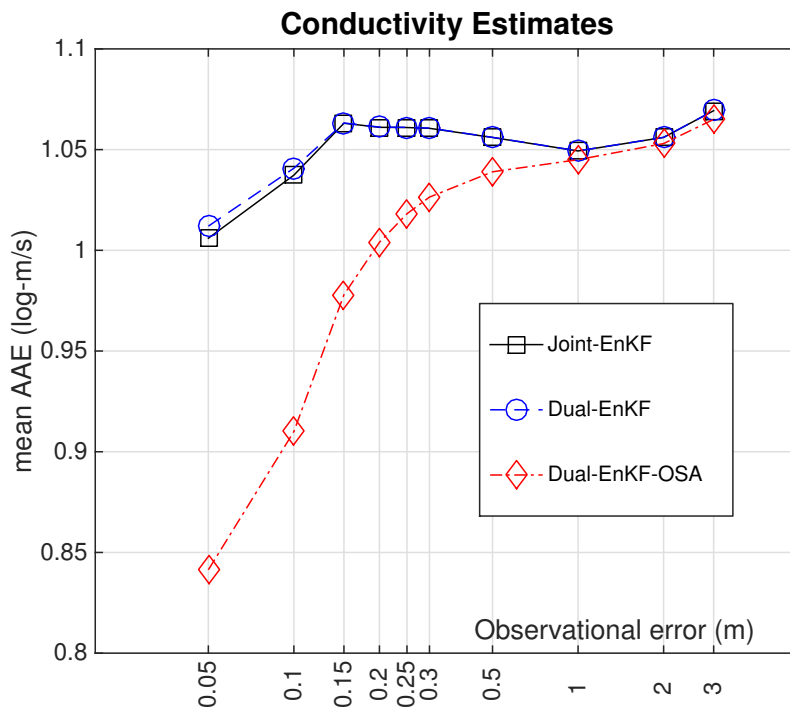


Figure 9. Mean AAE of the hydraulic conductivity using the Joint-EnKF, Dual-EnKF and Dual-EnKF_{OSA} schemes. Results are shown for 10 different scenarios in which assimilation of hydraulic head data is performed using 9 wells with measurement **errors** error standard deviations of 0.05, 0.10, 0.15, 0.20, 0.25, 0.3, 0.5, 1, 2 and 3 m. The four experimental scenarios use 100 ensemble members and 5 days as **observation** frequency sampling period. The x-axis is displayed in log scale.

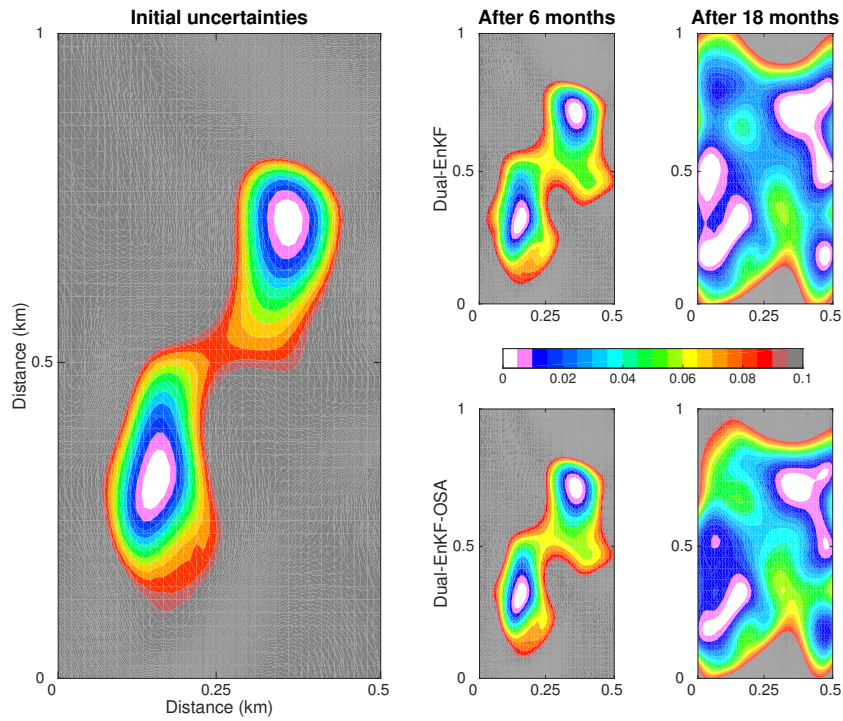


Figure 10. Left panel: Ensemble variance map of the initial conductivity field. Right sub-panels: Ensemble variance maps of estimated conductivity after 6 and 18 month assimilation periods using the Dual-EnKF and the proposed Dual-EnKF_{OSA} schemes. These results are obtained with 100 members, 5 days of **observation frequency** sampling period, 9 observation wells, and 0.10 m as measurement noise.

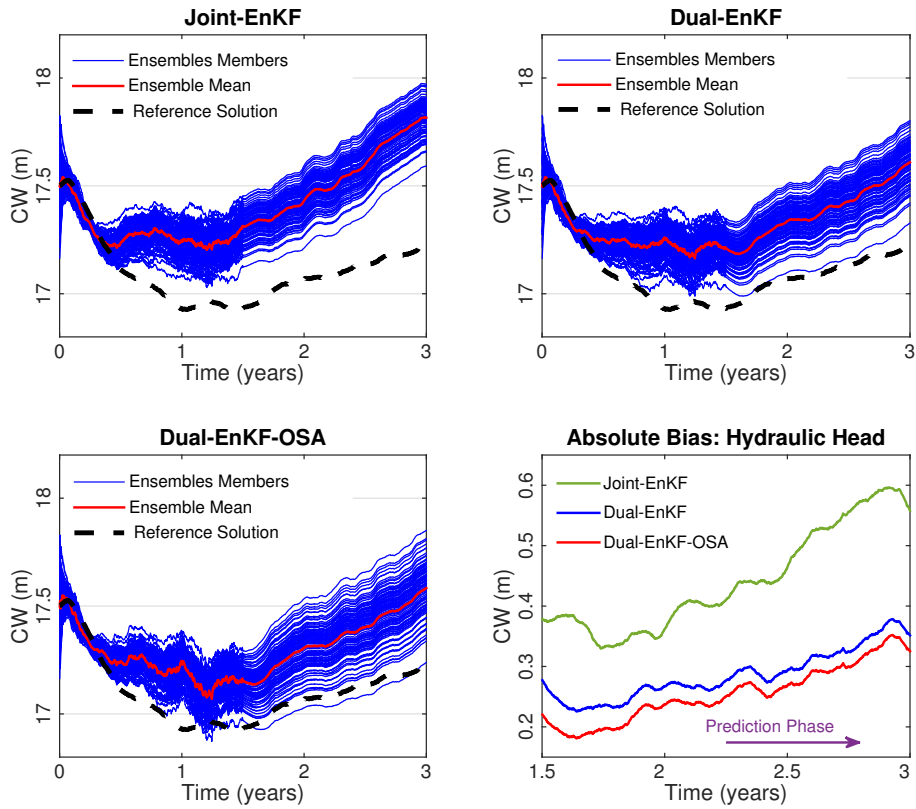


Figure 11. Reference (dashed) and predicted (solid) hydraulic head evolution at the control well: CW. Results are obtained using the Joint-EnKF, Dual-EnKF and the Dual-EnKF_{OSA} schemes with 100 members, 1 day as [observation frequency](#) [sampling period](#), 25 observation wells, and 0.50 m of measurement noise. The last 18 months are purely based on the forecast model prediction with no assimilation of data. In the bottom-right subplot, the absolute bias of hydraulic head is evaluated for all schemes during the prediction phase only (i.e., after 1.5 years).

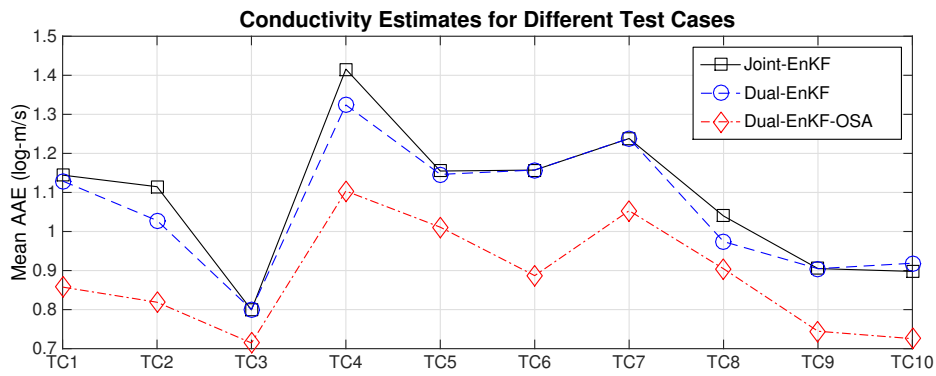


Figure 12. Performance of the Joint-/Dual-EnKF and the proposed Dual-EnKF_{OSA} schemes in 10 different test cases (TC1, TC2, ...). Mean AAE of the conductivity estimates are displayed. These results are obtained with 100 members, 3 days of ~~observation frequency~~ sampling period, 9 observation wells, and 0.10 m as measurement noise.