August 8th, 2017

Dr. Graham Jewitt Professor of Hydrology University of Kwazulu-Natal Durban, South Africa

Subject: Revision to manuscript HESS-2016-114 "Technical Note: A hydrological routing scheme for the Ecosystem Demography model (ED2+R) tested in the Tapajós river basin, in the Brazilian Amazon."

On behalf of the co-authors, I would like to thank you for accepting our work for publication in Hydrology and Earth System Sciences.

As you suggested, we performed an additional proofreading of the document and corrected the remaining grammatical errors. Please, find below a copy of the manuscript with tracked changes.

Regarding the quality of the images, we apologize for the last submission: the final PDF document uploaded on July 20th was mistakenly created in a low resolution mode. We hope that the quality of the current document meets the standards of the journal. JPEG files of the final images were also uploaded in the online submission page.

Once again thank you very much for your support in handling this manuscript during the review process and for giving us the possibility to publish in Hydrology and Earth System Sciences.

Kind regards,

Fabio Farinosi

Fabio Farinosi, PhD
Scientific Officer
European Commission
DG Joint Research Center
Directorate D – Sustainable Resources
Unit D.02 Water and Marine Resources
Via E.Fermi, 2749 - 21027 Ispra (VA) Italy TP 121
fabio.farinosi@gmail.com

Editor's report:

Dear Authors

Thank you for the time and effort you have put into addressing the referees comments and suggestions. I am now happy for the paper to be published. Despite it being longer than normal for a Technical Note, I think that will provide a valuable resource for other modellers.

Please note the few suggestions for technical corrections to text and figures and address these.

Regards

Graham

Non-public comments to the Author:

Dear Authors

Prior to publication, please;

- Do a thorough proof read of the document. There are a few places where your amendments have caused some grammatical errors.
- I am concerned that the figures will not reproduce clearly. In the pdf I have, most figures are not clear and are captures/exported at low resolution. For example,
- Figure 3c Cannot see any detail, making the figure irrelevant
- Figure 4 the upper legend and scale are very difficult to read

Figure 6 Lines and legends of the axes are difficult to read. Thicker lines for the results from each basin would make the figure easier to analyse

Figure 7 the non coloured lines have faded out completely

Figure 8 - Axes lines cannot be seen and flow is difficult to interpret. ED2 lines cannot be seen at all. Also consider using a log scale for this figure as the low flows cannot be seen in the figure in its current form.

Figure 9 - Axes difficult to read. Higher resolution version is needed.

- 1 Technical Note: A hydrological routing scheme for the
- 2 Ecosystem Demography model (ED2+R) tested in the
- 3 Tapajós river basin, in the Brazilian Amazon.

- 5 Fabio F. Pereira^{1,*}, Fabio Farinosi^{1,2}, Mauricio E. Arias^{1,-3}, Eunjee Lee^{1,†}, John
- 6 Briscoe^{1,#}, and Paul R. Moorcroft¹
- 7 [1]{Sustainability Science Program, Kennedy School of Government, Harvard University,
- 8 Cambridge, MA 02138, USA}
- 9 [2]{Ca' Foscari University of Venice, Venice, Italy}
- 10 [3] {Department of Civil and Environmental Engineering, University of South Florida, Tampa,
- 11 FL 33620, USA
- 12 [*]{now at: Department of Renewable Energy Engineering, Federal University of Alagoas,
- 13 Maceió, AL, Brazil }
- 14 [†] {now at: Goddard Earth Sciences Technology and Research, Universities Space Research
- 15 Association, Columbia, MD, 21046, USA. Current address: Global Modeling and Assimilation
- Office, NASA Goddard Space Flight Center, Greenbelt, MD 22071, USA
- 17 [#] {Deceased November 12th 2014}

18

19 Correspondence to: Fabio Farinosi (fabio.farinosi@gmail.com)

20

21

Abstract

- 22 Land surface models are excellent tools for studying how climate change and land use affect
- surface hydrology. However, in order to assess the impacts of earth processes on river flows,
- simulated changes in runoff need to be routed through the landscape. In this Technical Note,
- 25 we describe the integration of the Ecosystem Demography (ED2) model with a hydrological
- 26 routing scheme. The purpose of the study was to create a tool capable of incorporating to
- 27 hydrological predictions the terrestrial ecosystem responses to climate, carbon dioxide, and
- 28 land-use change— as simulated with terrestrial biosphere models. The resulting ED2+R model

calculates the lateral routing of surface and subsurface runoff resulting from the terrestrial 1 2 biosphere models' vertical water balance in order to determine spatio-temporal patterns of river flows within the simulated region. We evaluated the ED2+R model in the Tapajós, a 476,674 3 km² river basin in southeastern Amazonia, Brazil. The results showed that the integration of 4 5 ED2 with the lateral routing scheme results in an adequate representation (Nash Sutcliff Efficiency up to 0.76, Kling Gupta Efficiency up to 0.86, Pearson's R up to 0.88, and Volume 6 7 Ratio up to 1.06) of daily to decadal river flow dynamics in the Tapajós. These results are a 8 consistent step forward with respect to the 'no river representation' common among terrestrial 9 biosphere models as the native version of ED2.

10

11

12

13

14

15

16 17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

1 Introduction

Understanding the impacts of deforestation (e.g., Lejeune et al. 2015; Medvigy et al. 2011; Andréassian 2004) and climate change (e.g., Jiménez-Cisneros et al. 2014) on the earth's water cycle has been a topic of substantial interest in recent years because of given its potential implications to for ecosystems and society (e.g., Wohl et al. 2012; Brown et al., 2005). Analyses of impacts of climate change impacts on the earth's water cycle are increasingly usinguse terrestrial biosphere models, which are capable of estimating changes in the vertical water balance as a function of climate forcing and and/or land-use induced changes in canopy structure and composition (Zulkafli et al. 2013). Terrestrial biosphere models actively used for hydrological and earth systems sciences include: the Joint UK Land Environment Simulator (JULES) (Best et al. 2011; Clark et al. 2011); the Community Land Model (CLM) (Lawrence et al. 2011; Oleson et al. 2010); the Lund-Potsdam-Jena (LPJ) land model (Gerten et al. 2004; Sitch et al. 2003); the Max Plank Institute MPI-JSBACH model (Vamborg et al. 2011; Raddatz et al. 2007); and the Integrated Biosphere Simulator (IBIS) (Kucharik et al. 2000). Initial formulations of the hydrological processes within terrestrial biosphere models were based on simple "bucket" model formulations (Cox et al. 1999 after Carson 1982). Moisture within each climatological grid cell of the domain was simulated in a single below-ground pool in which surface temperature and specific soil moisture factors determined evaporation, while runoff was equal to the bucket overflow (Cox et al. 1999; Carson 1982). Since that formulationRecently, the hydrologic schemes within terrestrial biosphere models have become increasingly sophisticated. In the most recent generation of land surface models, water fluxes in and out of the soil column are vertically-resolved and take into account feedbacks among feedback from the different components, for instance, through an explicit formulation of

2 the soil-plant-atmosphere continuum that allows. This enables the models to provide a detailed

3 representation of the interactions between evapotranspiration, soil moisture and runoff (Clark

4 et al. 2015).

1

5

6

7

8

9

10

11

12

13

14

15

16 17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

To couple the calculation of the one-dimensional water balance towith the estimation of daily river flows, thereit is the neednecessary to simulate multiple hydrological dynamics involved in the lateral flow propagation through the landscape, ideally including the most complex hydraulic features of floodplains, lakes, and wetlands (Yamazaki et al. 2011). The first step towards representing the finer scale hydrodynamic processes responsible for patterns in river gauge observations, is to consider the topographic and geomorphological features that control water flow (Arora et al. 1999). The coarse spatial resolution of regional land surface models, due to imposed by computational constraints, does not allow for proper simulation of the complex hydrological dynamics determined by fine scale topography in river channels and floodplains (Yamazaki et al. 2011; Kauffeldt et al. 2016). However, the combination of the terrestrial models with routing schemes can be used to simulate the implications of global and regional environmental changes for flood/drought forecasting, water resources planning and management, and infrastructure development (Andersson et al. 2015). Consequently, several terrestrial biosphere models have been integrated with routing schemes. For example, JULES has been integrated with the Total Runoff Integrating Pathways (TRIP) to evaluate the accuracy of its estimates of annual streamflow (Oki et al. 1999). This integrated model was used to investigate the status of the global water budget (Oki et al. 2001). Rost et al. (2008) also used a modelling framework composed of the global dynamic vegetation model, LPJ, and a simple water balance model to quantify the global consumption of water for rainfed and irrigated agriculture. An offline coupling of the dynamic vegetation model, ISIS, and HYDRA – which simulates the lateral transport of water through river, lakes and wetlands – was proposed in Coe et al. (2008) with the purpose of reproducing linkages between land use, hydrology and climate. Moreover, Liang et al. (1994) developed and tested the coupling of the well-known VIC model with a general circulation model (GCM) to improve the GCM's eapabilityability to capture the interactions between surface hydrology and atmosphere. For the same purpose, the MPI hydrological discharge model was validated with NCEP reanalysis and parametrized for simulating the river routing for climate analysis at global scale (Hagemann and Gates 2001; Hagemann and Dumenil 1997). Several routing schemes have been designed over timeto date, including: normal depth, modified pulse, simple Muskingum, and Muskingum-Cunge (USACE 1 1991). In particular Most notably, the semi-distributed kinematic wave routing Muskingum-

2 Cunge method has been recognized for its stability over different spatial and temporal modeling

3 resolutions (USACE 1991; Miller and Cunge 1975; Cunge 1969), and it was been adopted

4 inby the most widely used regional scale hydrological models, such as VIC, SWAT, and MGB-

5 IPH.

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

2829

30

31

32

Recent studies have investigated the influence of land-use on regional patterns of rainfall and biosphere temperature as influenced by land-use (Ostberg et al. 2015; Bahn et al. 2014; Pearson et al. 2013). These studies evidenced tracked how the occurrence of conversion of land from its natural state over the same time frame as observed fluctuations of rainfall and air temperature occurred, aspects fully analysed by terrestrial biosphere models (Hurtt et al. 2006; Goldewijk 2001; Ramankutty and Foley 1999). However, these modeling frameworks tend to assume models assumed that global and regional changes in the biosphere aswere a result of dynamics of vegetation in a collection of landscapes given by forests, deserts, and farmland only. Inland surface waters (e.g. rivers, lakes and wetlands) were not considered as an interactive component of the biosphere, and hence the climate system (Cole et al. 2007).

The Ecosystem Demography (ED2) is a terrestrial biosphere model that simulates the coupled water, carbon, and energy dynamics of terrestrial land surfaces (Longo 2014; Medvigy et al. 2009; Moorcroft et al. 2001) to describe the coupled water, carbon and energy dynamics of heterogeneous landscapes (Hurtt et al. 2013; Medvigy et al. 2009; Moorcroft et al. 2001). ED2's ability to incorporate sub-grid scale ecosystem heterogeneity arising from land-use change makes the model suited for investigating how the combined impacts of changes in climate, atmospheric carbon dioxide concentrations, and land-cover affect terrestrial ecosystems. For example, ED2 was successfully used to simulate the carbon flux dynamics in the North American continent (Hurtt et al. 2002; Albani et al. 2006), and to assess the impacts on Amazonian ecosystems of changes in climate, atmospheric carbon dioxide and land use (Zhang et al. 2015). Moreover, ED2, coupled with a regional atmospheric circulation component, has also been also successfully applied to assess the impacts of deforestation on the Amazonian climate (Knox et al. 2015; Swann et al. 2015). The mentioned aforementioned studies were not aimed at assessing hydrological implications of changes in land use and climate. These works proveddemonstrated the validity of ED2 as a tool able to assessing impacts of global and regional changes on ecosystem function, and built the basis for a possible development offoundations for an integrated tool aimed at analyzing hydrological implications.

In this technical note, we describe the integration of ED2 with a hydrological routing scheme. The hydrological routing scheme chosen was adapted from the MGB-IPH (Collischonn et al. 2007). This exercise is aimed at calculatingaims to calculate the lateral propagation and attenuation of the surface and subsurface runoff resulting from the vertical balance calculations, in order to simulate daily river flows through a large river basin. The advantage of the proposed model is theits ability to predict the sensitivity of river flows to global and regional environmental changes such as climate and land-use changes. The new product combines the advantages of biosphere and hydrological models, bringing together global, regional, and local scale hydrological dynamics in a single modeling framework. The resulting model is intended to be used in future studies as a computational tool to explore, in future studies, various a variety of research questions. In particular, it could be used to analyse: how current and future climate and land cover affect water availability in river systems; how land-use driven changes can influence the water availability for human activities (hydropower, food production, urban supply); what the implications of those changes are for water and land resources management. The identified research areas are in line with key problems raised in the literature, focusing on the importance of large scale modelling and remote sensing to fill knowledge gaps in water resources and hydrological dynamics (Alsdorf et al. 2007; Prigent et al. 2007). The product obtained from this exercise was tested in the Tapajós basin, a large river system in southeastern Amazonia, Brazil.

2 Ecosystem Demography (ED2) model

ED2 is a terrestrial biosphere simulation model capable of representing biological and physical processes driving the dynamics of ecosystems as a function of climate and soil properties. Rather than using a conventional "ecosystem as big-leaf" assumption, ED2 is formulated at the scale of functional and age groups of plants. Ecosystem-scale dynamics and fluxes are calculated through a scaling procedure to reproduce which reproduces the macroscopic behavior of the ecosystem within each climatological grid-cell. It simulates ecosystem structure and dynamics as well as the corresponding carbon, energy, and water fluxes (Figure 1; Hurtt et al. 2013; Medvigy et al. 2009; Moorcroft et al. 2001). ED2 simulates the dynamics of different plant functional types subdivided into tiles with a homogeneous canopy (Swann et al. 2015; Medvigy et al. 2009). The dynamic tiles represent the sub-grid scale heterogeneity in ecosystem composition within each cell. Grid cell size is determined by the resolution of meteorological

forcing and soil characteristics data, typically from 1 to 0.001 degrees (~ 110 to 1 km). ED2 simulates biosphere dynamics by taking into consideration natural disturbances, such as forest fires and plant mortality due to changing environmental conditions, as well as human-caused disturbances, such as deforestation and forest harvesting (Medvigy et al. 2009; Albani et al. 2006). Disturbances are expressed in the model as annual transitions between primary vegetation, secondary vegetation, and agriculture (cropland and pasture) (Albani et al. 2006). Natural disturbance, such as wildfire, is represented in the model by the transition from primary vegetation (forest in the case of the Amazon) to grassland-shrubland, and subsequently to secondary vegetation (forest re-growth); the abandonment of an agricultural area is represented with the conversion from grassland to secondary vegetation, while forest logging is represented by the transition from primary or secondary vegetation to grassland. The model is composed of several modules operating at multiple temporal and spatial scales, including plant mortality, plant growth, phenology, biodiversity, soil biogeochemistry, disturbance, and hydrology (Longo 2014; Medvigy et al. 2009). A selection of the main parameters and the input used for this study are presented in Table 1, and for a more complete description of the model, we refer the reader to the literature available (Zhang et al. 2015; Longo 2014; Kim et al. 2012; Medvigy et al. 2009; Moorcroft et al. 2001).

2.1 ED2 hydrology module

The hydrological module of the ED2 model is derived from the Land Ecosystem-Atmospheric Feedback model (LEAF-2) (Walko et al. 2000). The model computes the water cycle through the vegetation, air-canopy space, and soils, which results inyielding daily estimates of subsurface and surface runoff from each grid cell, isolated from the others in the domain. The number of soil layers and their thickness influence the accuracy with which the model is able to represent the gradients near the surface. Soil composition was derived from Quesada et al. (2010) and from the IGBP-DIS global soil data (Global Soil Data Task 2014). As described in Zhang et al. (2015), the mean fraction values of sand and clay were assigned to each grid-cell at 1 km resolution and then aggregated at 1 degree resolution. Due to limited data availability, soils were assumed to be homogeneous for a depth of 6 meters. Hydraulic conductivity of the soil layers is a function of soil texture and moisture (Longo 2014). Groundwater exchange is a function of hydraulic conductivity, soil temperature and terrain topography. Water percolation is limited to the bottom layer by the subsurface drainage, determining the bottom boundary

- 1 conditions. Vegetation historical records and land use transitions were derived from the Global
- 2 Land Use Dataset (Hurtt et al. 2006). A more detailed description of the hydrological sub-
- 3 component of the ED2 model is available in Longo (2014).

5

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

3 ED2 runoff routing scheme (ED2+R)

- 6 River routing schemes are commonly often used to compute the lateral movement of water over
- 7 land in hydrological models for large river basins. In this way, the prediction performance of
- 8 models can be evaluated using river discharge measurements. The use of routing schemes was
- 9 then extended to earth system models in order to capture the impacts of man-made structures
- 10 (e.g. dams and reservoirs) and floodplain wetlands on the climate system (Li et al., 2011;
- 11 Yamazaki et al., 2011).
 - Daily runoff estimates from ED2 were computed for specific grid cells independently; therefore a. A hydrological routing scheme was then linked to this model in order to estimate flow attenuation and accumulation as water movesmoved through the landscape. The hydrological routing scheme chosen was adapted from the original formulation of the MGB-IPH, a rainfallrunoff model that has been used extensively in large river basins in South America (Collischonn et al. 2007). This model was later developed using hydrodynamic solutions and floodplain coupling (Pontes et al. 2015; Paiva et al. 2013). Although the later development increased the modeling capabilities of the MGB-IPH in representing fine scale dynamics, given the regional application of our tool, for the ED2+R we decided to use the typical application of the MGB-IPH characterized by the Muskingum-Cunge approach. The original MGB-IPH model is composed of four different sub-models: soil water balance, evapotranspiration, intra-cell flow propagation, and inter-cell routing through the river network. In the present study, only the catchment and river routing methods were utilized. The resulting ED2+R model computes the daily total volume of water passing through any given grid cell in the resulting drainage network in two separate steps: first, ED2 estimates of daily surface and subsurface runoff from each grid cell are divided into three linear reservoirs with different residence times to represent overland flow, interflow and subsurface water flow (Figure 2). The reservoirs are used to determine the contribution and attenuation of river flow by different soil layers, characterized by different routing times. The sum of overland flow, interflow, and subsurface water flow is then moved from each grid cell into the drainage network, designed in the pre-processing phase using data from a digital elevation model (DEM) from the Shuttle Radar Topography Mission (SRTM) at

a 90-meter resolution and the Cell Outlet Tracing with an Area Threshold algorithm (COTAT) 2 (Reed 2003). Each DEM grid cell therefore becomes part of a flow path, which then accumulates water to a final downstream drainage network outlet. A complete description of 3 4 the technique for defining drainage networks from DEMs employed in this study can be found 5 in Paz et al. (2006). Once water reaches the drainage network, ED2+R adopts the Muskingum-Cunge numerical scheme for the solution of the kinematic wave equation, which also accounts 7 for flow attenuation, using a finite-difference method as a function of river length, width, depth 8 and roughness, as well as terrain elevation slope (Collischonn et al. 2007; Reed 2003). Statistical relationships for the river morphology were obtained as a function of the drainage 10 area based on geomorphic data collected by Brazil's National Water Agency (ANA) and the Observation Service for the geodynamical, hydrological and biogeochemical control of 12 erosion/alteration and material transport in the Amazon basin (HyBAM) at several gauging 13 stations in the Amazon and Tocantins basins as presented by Coe et al. (2008). Further studies 14 successfully derived geomorphological relations in order to estimate river geometric parameters 15 and carry out hydrodynamic simulations of the Amazon River system using a similar approach (Paiva et al., 2013; Paiva et al., 2011). Multiple groups of grid cells with common hydrological 16 17 features, or hydrological response units, can be created in order to parameterize and calibrate 18 ED2+R. In our approach, hydrological traits associated with soil and land cover are primarily 19 computed in ED2, thus we calibrated ED2+R at the sub-basin level as delineated based on the DEM. Details about the calibration procedure are provided in the next section. 20

1

6

9

11

26

27

28

30

- 21 Model's performance was calculated through the adoption of widely used indicators:
- 22 Pearson's R correlation coefficient (Pearson 1895), calculated as in Equation 1:

$$R = \frac{\sum sim*obs - \frac{(\sum sim)(\sum obs)}{n}}{\sqrt[2]{\left(\sum sim^2 - \frac{(\sum sim)^2}{n}\right)\left(\sum obs^2 - \frac{(\sum obs)^2}{n}\right)}}}$$
(1)

- Where sim and obs are the simulated and observed time series, while n is the number of time 24 steps of the simulation period. 25
 - Volume Ratio, calculated as ratio of the simulated (sim) and observed (obs) total water volume in the simulation period without consideration for the seasonal distribution of flow, as in Equation 2:

$$VR = Vol_{sim}/Vol_{obs}$$
 (2)

Nash-Sutcliffe Efficiency (NSE) coefficient (Nash & Sutcliffe 1970), calculated as in 1 2 Equation 3:

3

$$NSE = 1 - \frac{\sum_{1}^{n} |obs_{i} - sim_{i}|^{2}}{\sum_{1}^{n} |obs_{i} - \overline{obs_{i}}|^{2}}$$
(3)

- Where obs_i and sim_i are the observed and simulated data at time i, $\overline{obs_i}$ is the mean of the 5 6 observed data, and n is number of time steps of the simulation period.
- 7 Kling Gupta Efficiency (KGE) index, both 2009 and 2012 versions, calculated as in 8 Equation 4:

9
$$KGE = 1 - \sqrt{(s[1](r-1))^2 + (s[2](vr_{2009 or 2012} - 1))^2 + (s[3](\beta - 1))^2}$$
 (4)

- - Where, s are scaling factors (set to 1 in this case); r is the Pearson's correlation coefficient; β 11
 - 12 is the ratio between the mean of the observed values and the mean of the simulated values; vr
 - 13 is the variability ratio, defined as vr_{2009} (simulated vs observed standard deviation ratio,
 - 14 Equation 5) for the 2009 method, and vr_{2012} (ratio of coefficient of variation of simulated and
 - 15 coefficient of variation of observed values, Equation 6) for the 2012 method (Kling et al. 2012;
 - 16 Gupta et al. 2009).

$$vr_{2009} = \sigma_{sim}/\sigma_{obs} \tag{5}$$

$$vr_{2012} = \frac{cV_{sim}}{cV_{obs}} = \frac{\sigma_{sim}/\mu_{sim}}{\sigma_{obs}/\mu_{obs}}$$
 (6)

- 20
- 21 The optimal value for the Pearson's R, VR, NSE, and KGE indexes is 1: the closer to this value,
- 22 the more accurately the model reproduces the observed values.
- 23 Missing observations in the river flow records (HYBAM and ANA) were filled via linear spatial
- 24 and temporal interpolation between the series in neighboring gauge stations (Equation 7):
- 25

$$26 \quad Obs_{\nu}(t) = K + \beta_1 \cdot Obs_{\nu}(t) + \beta_2 \cdot Obs_{\sigma}(t) + \beta_3 \cdot Obs_{\nu}(t - 365) + \beta_4 \cdot Obs_{\nu}(t + 365)$$
 (7)

- 27
- Where z, y, and q are three gauge stations with time series highly correlated (Pearson's $r \ge 0.85$), 28
- 29 and t expresses time in days. The estimated β coefficients in Equation 7 were used for the
- 30 estimation of the missing observations in the site y (Table 2). The interpolation of the gauge

- 1 historical records was necessary to have continuous time series with a sufficient number of
- 2 observations to calibrate and validate the ED2+R application in the basin.
- 3 For the presentation of the results, in order to compare the simulated and observed values, we
- 4 also used flow duration curves (FDCs). FDC's are cumulate frequency plots that show the
- 5 percentage of simulations steps (days in the case presented in this study) in which the discharge
- 6 is likely to equal or exceed a specific value, without taking into consideration the sequence of
- 7 the occurrence.

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

4 Case Study: Tapajós river basin

The ED2+R formulation was parameterized and evaluated for the Tapajós River Basin, the fifth largest tributary of the Amazon. HeThis basin drains an area of 476,674 km² in southeastern Amazonia, within the Brazilian states of Mato Grosso, Pará and Amazonas. The main rivers in the basin are the Tapajós (with a length greater than 1,800 km and average discharge of 11,800 m^3 s⁻¹), Juruena (length of approximately 1,000 km and discharge of 4,700 m^3 s⁻¹), and Teles Pires (also known by the name São Manoel, about 1,600 km long and average discharge of 3,700 m³ s⁻¹). The river system flows northwards, with terrain elevation ranging from about 800 meters above sea level in the southern partregion, to a few meters above sea level at its confluence with the Amazon river (ANA, 2011). The basin ecosystems are mainly represented by tropical evergreen rainforests in the northern partregion (in the states of Amazonas and Pará), and Cerrado dry vegetation in the south (Mato Grosso). Precipitation ranges from about 1,500 mm y⁻¹ in the headwaters (southern partregion), to about 2,900 mm y⁻¹ towards the basin's outlet (Figure 3 a - b). Rainfall temporal distribution is characterized by a clear seasonal distinction; total precipitation in the wet season (September to May) could be as high as 400 mm month⁻¹ in the most tropical areas, whereas in the dry season (June to August), precipitation is close to zero in the Cerrado and as low as 50 mm month⁻¹ in the wetter areas (Mohor et al., 2015). As a result of the large rainfall seasonal variability, river flows are also extremely variable: the mean monthly flow of the Tapajós river ranges between about 2,300 and 28,600 m³ s⁻¹ according to the historical records used for the calibration of the ED2+R model. Soils vary from those typically seen in the Brazilian shield in the south of the basin to alluvial sediments in the north. Land-use, almost completely represented by primary forest until the 1970s, was radically changed in recent decades. As estimated from the land-use/land-cover dataset used in this study (Hurtt et al. 2006), in the late 2000s only about 56% of the basin

(270,000 km²) was covered by the original vegetation cover. Large parts of the basin laying in 1 2 the territory of Mato Grosso, were cleared to make room for agricultural and livestock production, while vast areas around the border between the state of Pará and Mato Grosso were 3 4 cleared for cattle production. The northern portion of the basin is largely protected by natural 5 parks or indigenous lands, but largesignificant deforestation hotspots could be identified around the cities of Santarem and Itaituba and along the main transportation routes (Figure 3c). For a 6 7 more detailed description of the basin's physical characteristics and historical analysis of trends 8 in deforestation, precipitation and discharge, we refer the reader to Arias et al. and Farinosi et 9 al. (under review). 10 For calibration purposes the basin was divided into seven sub-basins, each of them with a corresponding gauge for which historical daily river flow observations were available (Figure 11 12 4a). The domain was gridded with a spatial resolution of 0.5° by 0.5°, roughly corresponding to 55 km by 55 km. Simulations were carried out for the period 1970-2008. The ED2 model was 13 forced using reconstructed climate (Sheffield et al. 2006) and land use/land cover data (Hurtt et 14 15 al. 2006; Soares-Filho et al. 2006) at 1-degree spatial resolution. The original meteorological

routing component of the ED2+R. The parameterization of the ED2 terrestrial biosphere model was developed and evaluated independently using eddy-flux tower observations of carbon,

water, and energy fluxes and forest inventory observations of above-ground biomass dynamics.

dataset has a 3-hour temporal resolution, which was downscaled to an hourly resolution, as

described in Zhang et al. (2015). In this technical note, we describe the calibration of the flow

Further details are available elsewhere (in Zhang et al. (2015,) and Longo (2014).

16

17

20

22

23

24

25

2627

28

29

30

31

32

ED2+R Model Calibration: The ED2+R model was manually calibrated using gauge observations (HYBAM and ANA) spanning a period of 17 years, from 1976 to 1992 (the period 1970-1975 was not considered in order to avoid simulation initiation effects) through a two-step procedure, as highlighted in Figure 2. The first step is the-partitioning of the flows from the two reservoirs (surface and sub-surface) of the ED2 biosphere model to the three reservoirs (surface, intermediate, base) of the ED2+R routed biosphere model (parameters α and β in Figure 2). In particular, α (ranging from 0 to 1, or from 0% to 100%) represents the share of ED2 surface runoff allocated to the ED2+R surface reservoir. The remaining part (1 – α) is allocated to the ED2+R intermediate reservoir a similar partitioning coefficient for the ED2 sub-surface reservoir to the ED2+R intermediate and base reservoirs. The second step relates to the adjustment of the residence times of the water flows in the three

reservoirs for each of the grid cells in each of the sub-basins (overland, intermediate, and 1 2 subsurface water flows – represented by the adjustment parameters CS, CI, CB in Figure 2). 3 In the first step, following the methodology described by Anderson (2002), the sensitivity of 4 the α and β parameters was tested by running the model multiple times (~35). For each run, the 5 Nash-Sutcliffe indicator (NSE) (Nash & Sutcliffe 1970) was quantified by comparing the 6 results of the simulation to historical flow observations. The combinations of the α and β 7 parameters characterized by the largest NSE were selected. Parameters α and β were assumed 8 to be uniform for the whole basin. Figure 5 shows the different combinations of the α and β 9 parameters introduced in Figure 2. The color bar indicates the NSE resulting from the 10 comparison between the simulated and observed river flow values obtained using different 11 combinations of the parameters α (x axis) and β (y axis). The chosen combination (indicated by 12 an x in Figure 5) lies in one of the optimal combination areas (NSE ~ 0.8). In the second step, the residence times (τ) of flow within the ED2+R reservoirs of each grid cell 13 14 in the domain were calibrated through the adjustment of the non-dimensional parameters (CS, CI, and CB in Figure 2) used to correct the Kirpich formula for time of concentration (as 15 16 explained in Collischonn et al. 2007). The calibration procedure characterizing the second step 17 is similar to the previous one but in this case the calibration is repeated for each sub-basin 18 sequentially. The calibration process was conducted from the furthest upstream sub-basins – 19 headwaters – to the final outlet of the basin (Anderson 2002). The model was run multiple times 20 (between 30 and 50 per sub-basin) with different combinations of the three parameters (CS, CI, and CB in Figure 2); for each run, the goodness-of-fit was quantified. This allowed us to design 21 22 a sensitivity curve of the model to different combinations of the three parameters for each of 23 the seven sub-basins, and to select the combination that best approaches the historical 24 observations. Figure 6 shows how the model is sensitive to marginal variation in initial 25 conditions of baseflow, particularly in the upstream section (i.e. UTP - Upper Teles Pires, UJ -Upper Juruena, and LTP – Lower Teles Pires). Changes in initial subsurface water were 26 controlled by the initialization five year period, thus contributions to the downstream part of 27 the basin had minimal impact (i.e. UT and LT - Upper and Lower Tapajós). 28 29 Figure 7 describes the calibration of the residence time adjustment parameters for each of the 30 sub-basins, as well as an approximate calculation of the corresponding time of concentration

for each of the reservoirs in the cell. The different combinations of the values assigned to the

parameters CS, CI, and CB significantly affect the overall goodness-of-fit of the river flow

31

- simulations (NSE indicator). The calibration process was conducted from the furthest upstream
- 2 sub-basins headwaters (UTP Upper Teles Pires, UJ Upper Juruena, and JA Jamanxim)
- 3 to the final outlet of the basin (LT Lower Tapajós). The different combinations are marked
- 4 with the corresponding NSE value; the optimal combination is marked in red (Figure 7).
- 5 The period 1993-2008 was used for model evaluation. Comparison between observations and
- 6 simulated flows (goodness-of-fit) were carried out using Pearson's R correlation coefficient
- 7 (Pearson 1895), volume ratio (VR), the Nash-Sutcliffe Efficiency (NSE) coefficient (Nash &
- 8 Sutcliffe 1970), and the Kling Gupta Efficiency (KGE) index (Kling et al. 2012; Gupta et al.
- 9 2009) (Table 3).

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

5 Results

The integration of the routing scheme with ED2 increases the ability of the model to reproduce the observed temporal variations in river flows at the basin outlet (Figure 8). This statement applies to all of the sub-basins, as the application of the routing scheme improved the model's performance between simulated and observed values with respect to all the four measures selected (Nash-Sutcliffe (NSE), Kling Gupta (KGE), Pearson's R correlation, and volume ratio) (Table 3). Both routed (ED2+R) and non-routed (ED2) simulation results manage to reproduce the observed water availability (quantity of water available) in the basin in terms of volume. The volume ratio at the furthest downstream sub-basin (Lower Tapajós), in fact, ranges around the optimal value for both validation and calibration periods (ED2 1.11-1.13, ED2+R 1.06-1.13). The routing scheme improves the ability of the model to reproduce the spatiotemporal distribution of water flows across the basin: both the NSE and the KGE indexes reached values ranging between 0.76 and 0.86 in the calibration, and 0.68-0.80 in the validation period (Table 3). Also, the correlation values confirm the results of the other indexes, reaching 0.88 for the calibration and 0.86 for the validation period. The performance of the presented tool is evident also analyzing FDCs (Figure 9 a - g). The adoption of the river routing scheme allows a more realistic representations of the high discharge values (flow equaled or exceeded 0 to 20/30% of the time), and low discharge values (flow equaled or exceeded 60 to 100% of the time) in all the sections of the basin (Figure 9). The model's performance in simulating river flows is generally more robust in the downstream sub-basins (NSE 0.68-0.77, and KGE 0.76-0.84 in the Upper and Lower Tapajós) and poorer in the headwaters (NSE 0.28-0.45, and KGE 0.38-0.61 in the Upper Juruena and Upper Teles Pires). In the Upper Teles Pires and Upper

Juruena, the model achieved the lowest NSE (0.28 and 0.29 respectively in the calibration, and 1 2 0.37 and 0.45 in the validation period), and KGE values (0.61 and 0.50 calibration, and 0.63 and 0.38 validation). Although water volumes are correctly reproduced in both the sub-basins 3 4 (VR between 1.01 and 0.98 in the calibration, and 1.03 and 1.01 in the validation period), the 5 seasonal variability is less accurate (correlation 0.64-0.68, and 0.63-0.54). The KGE, NSE and 6 correlation indices are closer to the optimal value in the central and lower part of the basin, in 7 particularly in the Lower Juruena (calibration - NSE 0.65, KGE 0.64, correlation 0.82; 8 validation - NSE 0.63, KGE 0.67, correlation 0.81), Lower Teles Pires (calibration - NSE 0.71, 9 KGE 0.67, correlation 0.85; validation - NSE 0.67, KGE 0.60, correlation 0.85), Upper Tapajós 10 (calibration - NSE 0.77, KGE 0.82, correlation 0.88; validation - NSE 0.75, KGE 0.81, 11 correlation 0.88), and Lower Tapajós (calibration - NSE 0.76, KGE 0.83, correlation 0.88; validation - NSE 0.68, KGE 0.76, correlation 0.82) (Table 3). 12 13 FDCs, representing the probability of the flow values to exceed a specific discharge, highlight 14 the positive effect of the application of the routing scheme in ED2+R across the entire range of 15 flow variability (Figure 9). The simulated FDCs follow the same shape of the observed ones in the furthest upstream sub-basins, especially in the cases of the Upper Juruena and Upper Teles 16 Pires, implying that the routing scheme is effective in maintaining the simulated discharge range 17 (Upper Juruena 1,200-2,480 m³ sec⁻¹, Upper Teles Pires 393-4,130 m³ sec⁻¹) in line with the 18 observations (1,030-2,400 and 302–2,767 m³ sec⁻¹, respectively). This is especially true for the 19 lowest flows, where the error between simulated and observed curves is lower than 15% (Figure 20 21 9 a-b, Figure A.1). Regarding the intermediate sub-basins, Lower Juruena and Lower Teles 22 Pires, flood duration curves show that the model overestimates the lowest values of the 23 distribution by approximately 30% of the observed values (flow equaled or exceeded 60 to 100% of the time in Figure 9 c-d). Similar overestimation of the model could be noticed in the 24 25 furthest downstream sub-basins, Upper and Lower Tapajós (Figure 9 e–g). The overestimation of the lower discharge values highlighted in Figure 9g,9 g is also evident in the multiyear 26 27 hydrograph (Figure 8), which shows that the ED2+R simulation results overestimate (by about 28 40% on average in the discharge values included in the range 60 to 100% in Figure 9 g) the 29 observations during the dry seasons of the period under consideration.

6 Discussion

As the results in Table 3 and Figures 8 - 9 show, the one-way integration of ED2 with a routing scheme improves the performance of simulated daily discharges. Although this could appear obvious from a hydrological modeling perspective, the significance of this study lies in the fact that terrestrial biosphere models, which are widely applied to examine the impacts of climate and land use on the hydrology of the land surface, are typically "no river representation" models. The incorporation of ecosystem responses to climate, carbon dioxide, and land-use changes simulated by terrestrial biosphere models with hydrological modeling improves the representation of the hydrological characteristics of basins characterized by large forest cover and/or large deforestation rates. In applications in the tropics, the one-way integration of the terrestrial biosphere model and the routing scheme (i.e. the two tools are not fully coupled) could lead to a partially inaccurate representation of the seasonally flooded ecosystems, a relevant aspect as documented in the literature (e.g., Cole et al. 2007).

As seen in Figure 9, the performance of the model in simulating river flows in the basin is generally higher in the downstream sub-basins and poorer in the headwaters. Several factors are likely to cause this issue, both from the simulation of the hydrological dynamics in ED2, the flow partitioning (α and β parameters), and the basin hydraulic characteristics in ED2+R. The accurate calibration of the biosphere model with flux tower observations (Zhang et al. 2015; Longo et al. 2014) and the optimization of the flow partitioning, make us believe that this variation in performance is due to the relatively coarse spatial resolution of the model in combination with the limitations typical of most land surface models in capturing the interactions with deep groundwater (Lobligeois et al. 2014; Zulkafli et al. 2013; Smith et al. 2004). We believe that the error is arising from the complexities associated with deep soils present in the headwaters of the Tapajós basin. In particular, in the model application developed, soil layers are represented to a depth of 6 meters (Table 1), which might be too shallow to realistically represent the conditions in the headwaters of the basin. The importance of groundwater is also evident from the calibration of the residence time parameter of the subsurface water flow: as shown in Figure 7, in fact, especially in the headwaters, even small variations in the CB parameter greatly affect the model performance (specifically quantified with NSE in Figure 7). The combined effect of groundwater interactions and spatial resolution is more evident in the upstream sub-basins because of the greater marginal contribution of baseflow in these areas. Surface flow accumulation, in fact, is lower in the headwaters.

Therefore, in relative terms, the role of baseflow is more relevant in this portion of any basin. Further downstream, the effect of groundwater interactions and spatial resolution is, at least in part, masked by the larger rainfall-runoff contribution and the overall flow accumulation from the upstream sub-basins. Other recent hydrological simulations of the Tapajós have obtained higher accuracy (e.g. Mohor et al. 2015; Collischonn et al. 2008; Coe et al. 2008); however, these simulations were set up discretizing the basin into a finer spatial resolution grid (9 to 20 km versus ~ 55 km grid cells) and using hydrological tools able to reproduce highly detailed hydrodynamic characteristics of complex river systems (i.e. floodplain, lakes, wetlands, backwater effects) that are out of the scope of the tool presented in this study. The advantage of the ED2+R model is the ability to study the sensitivity of the river flows to global and regional changes as computed by traditional terrestrial biosphere models, but adding a more detailed hydrological feature with respect to a very simplistic- of no-river representation. The coarse spatial resolution of the global datasets used as input for ED2+R is, however, a limiting factor. Higher resolution climatological data, vegetation, and land use datasets, while allowing which would allow a finer resolution of the hydrological grid, are expected to improve the performance of the model by providing more detailed hydrological processes. On the other hand, a finer spatial resolution of the hydrological grid would also require a more detailed representation of the subsurface water in the model. In general, the tool can be used to study how different hydrological systems are being affected by changes in climate forcing and changes in ecosystem composition and structure arising from the combination of: changing climate, rising atmospheric carbon dioxide, and land-use transformation. Additionally, ED2+R could potentially bridge one of the missing gaps for diagnosing and assessing feedbacks between atmosphere and biosphere with inland surface waters being represented as a dynamic system.

25

26

27

28

29

30

31

32

1

2

3

4

5

6 7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

7 Conclusion

In this Technical Note, we present the integration of the terrestrial biosphere model Ecosystem Demography 2 (ED2) with the Muskingum-Cunge routing scheme. We tested the integrated model (ED2+R) in the Tapajós river basin, a large tributary of the Amazon in Brazil, for the period 1970-2008. The results showed that the integration of a biosphere model with a routing scheme improves the ability of the land surface simulation to reproduce the hydrological and river flow dynamics at the basin scale. The main limitations highlighted in this case study were

linked to the relatively coarse spatial resolution of the model and the rough representation of subsurface water flow typical of this kinds of models. Moreover, the terrestrial biosphere model ED2 and the routing scheme are presented here in a one-way integration. The full coupling of 3 the routing scheme and ED2 could further improve the tool's ability to reproduce the water 4 balance considering flooded ecosystems, a relevant feature in the simulation of environments like the tropical forest, where local evapotranspiration plays a primary role in the specific 7 ecosystem's dynamics. In this first integration, our goal was to give the possibility to the terrestrial biosphere model the ability to reproduce river flows through a routing scheme. With a fully coupled (i.e. two-way) integration, the model would be able to determine the grid cells that are likely to be saturated and use this information for the modeling of the ecosystem's dynamics. For instance, this could determine the increase of the mortality rate of plants that are sensitive to inundation. An additional limitation of the model, could be identified in its inability to reproduce highly detailed hydrological dynamics of complex river systems (as for instance, 14 floodplain hydraulic features, or backwater effects), however, such a detailed hydrological complexity was out of the scope of this study. Future efforts will be oriented towards the resolution of address the highlighted limitations and current research is focusing on the application of, while upcoming studies will use ED2+R on understandingto understand 18 historical changes and future projections of the impacts of climate change and deforestation on the Amazon's water resources. 19

20

21

1

2

5

6

8

9

10

11

12

13

15

16

17

Author's contribution

- 22 F. Pereira, P. Moorcroft and J. Briscoe designed the study; F. Pereira developed the ED2+R
- 23 model code; F. Farinosi, M. Arias, and E. Lee calibrated the model and carried out the analysis;
- F. Farinosi, M. Arias and P. Moorcroft wrote the paper. 24

25

26

Acknowledgements

- 27 This work was conducted while F. F. Pereira, F. Farinosi, E. Lee, and M. E. Arias were Giorgio
- Ruffolo Fellows in the Sustainability Science Program at Harvard University. F. Farinosi was 28
- also funded through a doctoral scholarship by Ca' Foscari University of Venice. Support from 29
- Italy's Ministry for Environment, Land and Sea is gratefully acknowledged. We would like to 30
- thank Marcos Longo for letting us use one of his figures, and Angela Livino for the useful 31

- 1 comments. The authors would like to dedicate this study to the late Professor John Briscoe
- 2 (1948 2014), who envisioned and co-led the Amazon Initiative of Harvard's Sustainability
- 3 Science Program. We are grateful to the Editor, Professor Graham Jewitt, and to the four
- 4 Anonymous Referees for the valuable comments received during the review process.

6

References

- 8 Albani, M., Medvigy, D., Hurtt, G. C. and Moorcroft, P. R.: The contributions of land-use
- 9 change, CO 2 fertilization, and climate variability to the Eastern US carbon sink, Glob.
- 10 Chang. Biol., 12(12), 2370–2390, doi:10.1111/j.1365-2486.2006.01254.x, 2006.
- Alsdorf, D. E., Rodríguez, E. and Lettenmaier, D. P.: Measuring surface water from space,
- 12 Rev. Geophys., 45(2), RG2002, doi:10.1029/2006RG000197, 2007.
- 13 ANA: Plano Estratégico de Recursos Hídricos da Bacia Amazônica Afluentes da Margem
- Direita (in Portuguese), Brasilia, Brazil, Brazil. [online] Available from:
- 15 http://margemdireita.ana.gov.br/, 2011.
- Anderson, E. A.: Calibration of Conceptual Models for Use in River Forecasting. [online]
- Available from: http://www.nws.noaa.gov/oh/hrl/calb/calibration1102/main.htm, 2002.
- 18 Andersson, J. C. M., Pechlivanidis, I. G., Gustafsson, D., Donnelly, C. and Arheimer, B.: Key
- 19 factors for improving large-scale hydrological model performance, Eur. Water, (49), 77–88,
- 20 2015.
- 21 Andréassian, V.: Waters and forests: from historical controversy to scientific debate, J.
- 22 Hydrol., 291(1-2), 1–27, doi:10.1016/j.jhydrol.2003.12.015, 2004.
- Arias, M. E., Lee, E., Farinosi, F., Pereira, F. F., Moorcroft, P. R. and Briscoe, J.: Decoupling
- 24 the effects of deforestation and climate variability in large tropical river basins (under
- 25 review), J. Hydrol., n.d.
- Arora, V. K., Chiew, F. H. S. and Grayson, R. B.: A river flow routing scheme for general
- 27 circulation models, J. Geophys. Res., 104(D12), 14347, doi:10.1029/1999JD900200, 1999.

- 1 Bahn, M., Reichstein, M., Dukes, J. S., Smith, M. D. and McDowell, N. G.: Climate-
- biosphere interactions in a more extreme world, New Phytol., 202(2), 356–359,
- 3 doi:10.1111/nph.12662, 2014.
- 4 Baker, T. R., Phillips, O. L., Malhi, Y., Almeida, S., Arroyo, L., Di Fiore, A., Erwin, T.,
- 5 Killeen, T. J., Laurance, S. G., Laurance, W. F., Lewis, S. L., Lloyd, J., Monteagudo, A.,
- 6 Neill, D. A., Patino, S., Pitman, N. C. A., M. Silva, J. N. and Vasquez Martinez, R.: Variation
- 7 in wood density determines spatial patterns in Amazonian forest biomass, Glob. Chang. Biol.,
- 8 10(5), 545–562, doi:10.1111/j.1365-2486.2004.00751.x, 2004.
- 9 Best, M. J., Pryor, M., Clark, D. B., Rooney, G. G., Essery, R. . L. H., Ménard, C. B.,
- Edwards, J. M., Hendry, M. A., Porson, A., Gedney, N., Mercado, L. M., Sitch, S., Blyth, E.,
- Boucher, O., Cox, P. M., Grimmond, C. S. B. and Harding, R. J.: The Joint UK Land
- 12 Environment Simulator (JULES), model description Part 1: Energy and water fluxes,
- 13 Geosci. Model Dev., 4(3), 677–699, doi:10.5194/gmd-4-677-2011, 2011.
- Brown, A. E., Zhang, L., McMahon, T. A., Western, A. W. and Vertessy, R. A.: A review of
- paired catchment studies for determining changes in water yield resulting from alterations in
- 16 vegetation, J. Hydrol., 310(1-4), 28–61, doi:10.1016/j.jhydrol.2004.12.010, 2005.
- 17 Calvo-Alvarado, J., McDowell, N. and Waring, R.: Allometric relationships predicting foliar
- biomass and leaf area: sapwood area ratio from tree height in five Costa Rican rain forest
- 19 species, Tree Physiol., 11, 1601–1608, 2008.
- 20 Carson, D.: Current parametrisations of land-surface processes in atmospheric general
- 21 circulation models, in Land surface processes in atmospheric general circulation models,
- edited by P. Eagleson, Cambridge University Press, Cambridge, UK., 1982.
- Clark, D. B., Mercado, L. M., Sitch, S., Jones, C. D., Gedney, N., Best, M. J., Pryor, M.,
- Rooney, G. G., Essery, R. L. H., Blyth, E., Boucher, O., Harding, R. J., Huntingford, C. and
- 25 Cox, P. M.: The Joint UK Land Environment Simulator (JULES), model description Part 2:
- 26 Carbon fluxes and vegetation dynamics, Geosci. Model Dev., 4(3), 701–722,
- 27 doi:10.5194/gmd-4-701-2011, 2011.
- 28 Clark, M. P., Fan, Y., Lawrence, D. M., Adam, J. C., Bolster, D., Gochis, D. J., Hooper, R. P.,
- 29 Kumar, M., Leung, L. R., Mackay, D. S., Maxwell, R. M., Shen, C., Swenson, S. C. and
- 30 Zeng, X.: Improving the representation of hydrologic processes in Earth System Models,
- 31 Water Resour. Res., 51(8), 5929–5956, doi:10.1002/2015WR017096, 2015.

- 1 Coe, M. T., Costa, M. H. and Howard, E. A.: Simulating the surface waters of the Amazon
- 2 River basin: impacts of new river geomorphic and flow parameterizations, Hydrol. Process.,
- 3 22(14), 2542–2553, doi:10.1002/hyp.6850, 2008.
- 4 Cole, J. J., Prairie, Y. T., Caraco, N. F., McDowell, W. H., Tranvik, L. J., Striegl, R. G.,
- 5 Duarte, C. M., Kortelainen, P., Downing, J. A., Middelburg, J. J. and Melack, J.: Plumbing
- 6 the Global Carbon Cycle: Integrating Inland Waters into the Terrestrial Carbon Budget,
- 7 Ecosystems, 10(1), 172–185, doi:10.1007/s10021-006-9013-8, 2007.
- 8 Cole, T. G. and Ewel, J. J.: Allometric equations for four valuable tropical tree species, For.
- 9 Ecol. Manage., 229(1-3), 351–360, doi:10.1016/j.foreco.2006.04.017, 2006.
- 10 Collischonn, B., Collischonn, W. and Tucci, C. E. M.: Daily hydrological modeling in the
- Amazon basin using TRMM rainfall estimates, J. Hydrol., 360(1-4), 207–216,
- doi:10.1016/j.jhydrol.2008.07.032, 2008.
- 13 Collischonn, W., Allasia, D., Da Silva, B. C. and Tucci, C. E. M.: The MGB-IPH model for
- large-scale rainfall—runoff modelling, Hydrol. Sci. J., 52(5), 878–895,
- 15 doi:10.1623/hysj.52.5.878, 2007.
- 16 Cox, P. M., Betts, R. A., Bunton, C. B., Essery, R. L. H., Rowntree, P. R. and Smith, J.: The
- impact of new land surface physics on the GCM simulation of climate and climate sensitivity,
- 18 Clim. Dyn., 15(3), 183–203, doi:10.1007/s003820050276, 1999.
- 19 Cunge, J. A.: On The Subject Of A Flood Propagation Computation Method (MuskIngum
- 20 Method), J. Hydraul. Res., 7(2), 205–230, doi:10.1080/00221686909500264, 1969.
- Farinosi, F., Arias, M. E., Lee, E., Longo, M., Pereira, F. F., Livino, A., Moorcroft, P. R. and
- Briscoe, J.: Future climate and land use change impacts on river flows in the Tapajós Basin in
- the Brazilian Amazon (under review), Earth's Future, n.d.
- Gerten, D., Schaphoff, S., Haberlandt, U., Lucht, W. and Sitch, S.: Terrestrial vegetation and
- 25 water balance—hydrological evaluation of a dynamic global vegetation model, J. Hydrol.,
- 26 286(1-4), 249–270, doi:10.1016/j.jhydrol.2003.09.029, 2004.
- 27 Global Soil Data Task: Global Soil Data Products CD-ROM Contents (IGBP-DIS). Data Set,
- 28 Oak Ridge, Tennessee, U.S.A., 2014.
- 29 Goldewijk, K. K.: Estimating global land use change over the past 300 years: The HYDE
- 30 Database, Global Biogeochem. Cycles, 15(2), 417–433, doi:10.1029/1999GB001232, 2001.

- 1 Gupta, H. V., Kling, H., Yilmaz, K. K. and Martinez, G. F.: Decomposition of the mean
- 2 squared error and NSE performance criteria: Implications for improving hydrological
- 3 modelling, J. Hydrol., 377(1-2), 80–91, doi:10.1016/j.jhydrol.2009.08.003, 2009.
- 4 Hagemann, S. and Dumenil, L.: A parametrization of the lateral waterflow for the global
- 5 scale, Clim. Dyn., 14(1), 17–31, doi:10.1007/s003820050205, 1997.
- 6 Hagemann, S. and Gates, L. D.: Validation of the hydrological cycle of ECMWF and NCEP
- 7 reanalyses using the MPI hydrological discharge model, J. Geophys. Res., 106(D2), 1503,
- 8 doi:10.1029/2000JD900568, 2001.
- 9 Hurtt, G. C., Pacala, S. W., Moorcroft, P. R., Caspersen, J., Shevliakova, E., Houghton, R. A.
- and Moore, B.: Projecting the future of the U.S. carbon sink, Proc. Natl. Acad. Sci., 99(3),
- 11 1389–1394, doi:10.1073/pnas.012249999, 2002.
- Hurtt, G. C., Frolking, S., Fearon, M. G., Moore, B., Shevliakova, E., MALYSHEV, S.,
- 13 PACALA, S. W. and Houghton, R. A.: The underpinnings of land-use history: three centuries
- of global gridded land-use transitions, wood-harvest activity, and resulting secondary lands,
- 15 Glob. Chang. Biol., 12(7), 1208–1229, doi:10.1111/j.1365-2486.2006.01150.x, 2006.
- Hurtt, G. C., Moorcroft, P. R. and Pacala, S. W.: Ecosystem Demography Model: Scaling
- 17 Vegetation Dynamics Across South America, Ecosyst. Demogr. Model Scaling Veg. Dyn.
- 18 Across South Am. Model Prod. [online] Available from:
- 19 http://daac.ornl.gov/MODELS/guides/EDM_SA_Vegetation.html, 2013.
- Jiménez-Cisneros, B. E., Oki, T., Arnell, N. W., Benito, G., Cogley, J. G., Döll, P., Jiang, T.
- and Mwakalila, S. S.: Freshwater resources., in Climate Change 2014: Impacts, Adaptation,
- 22 and Vulnerability. Part A: Global and Sectoral Aspects. Contribution of Working Group II to
- 23 the Fifth Assessment Report of the Intergovernmental Panel on Climate Change, edited by C.
- B. Field, V. R. Barros, D. J. Dokken, K. J. Mach, M. D. Mastrandrea, T. E. Bilir, M.
- Chatterjee, K. L. Ebi, Y. O. Estrada, R. C. Genova, B. Girma, E. S. Kissel, A. N. Levy, S.
- 26 MacCracken, P. R. Mastrandrea, and L. L. White, pp. 229–269., Cambridge University Press,
- ambridge, United Kingdom and New York, NY, USA. [online] Available from: https://ipcc-
- wg2.gov/AR5/images/uploads/WGIIAR5-Chap3_FINAL.pdf, 2014.
- 29 Kauffeldt, A., Wetterhall, F., Pappenberger, F., Salamon, P. and Thielen, J.: Technical review
- 30 of large-scale hydrological models for implementation in operational flood forecasting

- schemes on continental level, Environ. Model. Softw., 75, 68–76,
- 2 doi:10.1016/j.envsoft.2015.09.009, 2016.
- 3 Kim, Y., Knox, R. G., Longo, M., Medvigy, D., Hutyra, L. R., Pyle, E. H., Wofsy, S. C.,
- 4 Bras, R. L. and Moorcroft, P. R.: Seasonal carbon dynamics and water fluxes in an Amazon
- 5 rainforest, Glob. Chang. Biol., 18(4), 1322–1334, doi:10.1111/j.1365-2486.2011.02629.x,
- 6 2012.
- 7 Kling, H., Fuchs, M. and Paulin, M.: Runoff conditions in the upper Danube basin under an
- 8 ensemble of climate change scenarios, J. Hydrol., 424-425, 264–277,
- 9 doi:10.1016/j.jhydrol.2012.01.011, 2012.
- 10 Knox, R. G., Longo, M., Swann, A. L. S., Zhang, K., Levine, N. M., Moorcroft, P. R. and
- Bras, R. L.: Hydrometeorological effects of historical land-conversion in an ecosystem-
- 12 atmosphere model of Northern South America, Hydrol. Earth Syst. Sci., 19(1), 241–273,
- 13 doi:10.5194/hess-19-241-2015, 2015.
- 14 Kucharik, C. J., Foley, J. A., Delire, C., Fisher, V. A., Coe, M. T., Lenters, J. D., Young-
- 15 Molling, C., Ramankutty, N., Norman, J. M. and Gower, S. T.: Testing the performance of a
- dynamic global ecosystem model: Water balance, carbon balance, and vegetation structure,
- 17 Global Biogeochem. Cycles, 14(3), 795–825, doi:10.1029/1999GB001138, 2000.
- Lawrence, D. M., Oleson, K. W., Flanner, M. G., Thornton, P. E., Swenson, S. C., Lawrence,
- 19 P. J., Zeng, X., Yang, Z.-L., Levis, S., Sakaguchi, K., Bonan, G. B. and Slater, A. G.:
- 20 Parameterization improvements and functional and structural advances in Version 4 of the
- Community Land Model, J. Adv. Model. Earth Syst., 3(3), M03001,
- 22 doi:10.1029/2011MS000045, 2011.
- Lejeune, Q., Davin, E. L., Guillod, B. P. and Seneviratne, S. I.: Influence of Amazonian
- 24 deforestation on the future evolution of regional surface fluxes, circulation, surface
- 25 temperature and precipitation, Clim. Dyn., 44(9-10), 2769–2786, doi:10.1007/s00382-014-
- 26 2203-8, 2015.
- 27 Li, R., Chen, Q. and Ye, F.: Modelling the impacts of reservoir operations on the downstream
- 28 riparian vegetation and fish habitats in the Lijiang River, J. Hydroinformatics, 13(2), 229,
- 29 doi:10.2166/hydro.2010.008, 2011.

- 1 Liang, X., Lettenmaier, D. P., Wood, E. F. and Burges, S. J.: A simple hydrologically based
- 2 model of land surface water and energy fluxes for general circulation model, J. Geophys.
- 3 Res., 99(D7), 14,415–14,428, 1994.
- 4 Lobligeois, F., Andréassian, V., Perrin, C., Tabary, P. and Loumagne, C.: When does higher
- 5 spatial resolution rainfall information improve streamflow simulation? An evaluation using
- 6 3620 flood events, Hydrol. Earth Syst. Sci., 18(2), 575–594, doi:10.5194/hess-18-575-2014,
- 7 2014.
- 8 Longo, M.: Amazon Forest Response to Changes in Rainfall Regime: Results from an
- 9 Individual-Based Dynamic Vegetation Model, Harvard University. [online] Available from:
- 10 http://dash.harvard.edu/handle/1/11744438, 2014.
- 11 Medvigy, D., Wofsy, S. C., Munger, J. W., Hollinger, D. Y. and Moorcroft, P. R.:
- Mechanistic scaling of ecosystem function and dynamics in space and time: Ecosystem
- Demography model version 2, J. Geophys. Res. Biogeosciences, 114(G1), G01002,
- 14 doi:10.1029/2008JG000812, 2009.
- 15 Medvigy, D., Walko, R. L. and Avissar, R.: Effects of Deforestation on Spatiotemporal
- Distributions of Precipitation in South America, J. Clim., 24(8), 2147–2163,
- 17 doi:10.1175/2010JCLI3882.1, 2011.
- 18 Miller, W. A. and Cunge, J. A.: Simplified equations of unsteady flow, in Unsteady Flow in
- 19 Open Channels, edited by K. Mahmood and V. Yevjevich., 1975.
- 20 Mohor, G. S., Rodriguez, D. A., Tomasella, J. and Siqueira Júnior, J. L.: Exploratory analyses
- 21 for the assessment of climate change impacts on the energy production in an Amazon run-of-
- 22 river hydropower plant, J. Hydrol. Reg. Stud., 4, 41–59, doi:10.1016/j.ejrh.2015.04.003,
- 23 2015.
- 24 Moorcroft, P. R., Hurtt, G. C. and Pacala, S. W.: A method for scaling vegetation dynamics:
- 25 The ecosystem demography model (ED), Ecol. Monogr., 71(4), 557–586, doi:10.1890/0012-
- 26 9615(2001)071[0557:AMFSVD]2.0.CO;2, 2001.
- Nash, E. and Sutcliffe, V.: River flow forecasting Through conceptual models PART I- A
- 28 Discussion of principles, J. Hydrol., 10, 282–290, 1970.
- Oki, T., Nishimura, T. and Dirmeyer, P.: Assessment of Annual Runoff from Land Surface
- 30 Models Using Total Runoff Integrating Pathways (TRIP), J. Meteorol. Soc. Japan, 77(1B),

- 1 235–255 [online] Available from:
- 2 https://www.jstage.jst.go.jp/article/jmsj1965/77/1B/77_1B_235/_article, 1999.
- 3 Oki, T., Agata, Y., Kanae, S., Saruhashi, T., Yang, D. and Musiake, K.: Global assessment of
- 4 current water resources using total runoff integrating pathways, Hydrol. Sci. J., 46(6), 983–
- 5 995, doi:10.1080/02626660109492890, 2001.
- 6 Oleson, K. W., Lawrence, D. M., Bonan, G. B., Flanner, M. G., Kluzek, E., Lawrence, P. J.,
- 7 Levis, S., Swenson, S. C. and Thornton, P. E.: Technical Description of version 4.0 of the
- 8 Community Land Model (CLM), Boulder, CO USA. [online] Available from:
- 9 http://www.cesm.ucar.edu/models/cesm1.0/clm/CLM4_Tech_Note.pdf, 2010.
- Ostberg, S., Schaphoff, S., Lucht, W. and Gerten, D.: Three centuries of dual pressure from
- land use and climate change on the biosphere, Environ. Res. Lett., 10(4), 044011,
- doi:10.1088/1748-9326/10/4/044011, 2015.
- Paiva, R. C. D., Collischonn, W. and Tucci, C. E. M.: Large scale hydrologic and
- 14 hydrodynamic modeling using limited data and a GIS based approach, J. Hydrol., 406(3-4),
- 15 170–181, doi:10.1016/j.jhydrol.2011.06.007, 2011.
- Paiva, R. C. D., Buarque, D. C., Collischonn, W., Bonnet, M. P., Frappart, F., Calmant, S. and
- Bulhões Mendes, C. A.: Large-scale hydrologic and hydrodynamic modeling of the Amazon
- 18 River basin, Water Resour. Res., 49(3), 1226–1243, doi:10.1002/wrcr.20067, 2013a.
- 19 Paiva, R. C. D., Collischonn, W. and Buarque, D. C.: Validation of a full hydrodynamic
- 20 model for large-scale hydrologic modelling in the Amazon, Hydrol. Process., 27(3), 333–346,
- 21 doi:10.1002/hyp.8425, 2013b.
- Paz, A. R., Collischonn, W. and Lopes da Silveira, A. L.: Improvements in large-scale
- drainage networks derived from digital elevation models, Water Resour. Res., 42(8),
- 24 doi:10.1029/2005WR004544, 2006.
- 25 Pearson, K.: Note on regression and inheritance in the case of two parents, Proc. R. Soc.
- 26 London, 58, 1895.
- Pearson, R. G., Phillips, S. J., Loranty, M. M., Beck, P. S. A., Damoulas, T., Knight, S. J. and
- Goetz, S. J.: Shifts in Arctic vegetation and associated feedbacks under climate change, Nat.
- 29 Clim. Chang., 3(7), 673–677, doi:10.1038/nclimate1858, 2013.

- 1 Pontes, P. R. M., Collischonn, W., Fan, F. M., Paiva, R. C. D. and Buarque, D. C.:
- 2 Modelagem hidrológica e hidráulica de grande escala com propagação inercial de vazões,
- 3 Rev. Bras. Recur. Hídricos, 20(4), 888–904, 2015.
- 4 Poorter, L., Bongers, L. and Bongers, F.: Architecture of 54 moist-forest tree species: traits,
- 5 trade-offs, and functional groups, Ecology, 87(5), 1289–1301, doi:10.1890/0012-
- 6 9658(2006)87[1289:AOMTST]2.0.CO;2, 2006.
- 7 Prigent, C., Papa, F., Aires, F., Rossow, W. B. and Matthews, E.: Global inundation dynamics
- 8 inferred from multiple satellite observations, 1993–2000, J. Geophys. Res., 112(D12),
- 9 D12107, doi:10.1029/2006JD007847, 2007.
- 10 Quesada, C. A., Lloyd, J., Schwarz, M., Patiño, S., Baker, T. R., Czimczik, C., Fyllas, N. M.,
- Martinelli, L., Nardoto, G. B., Schmerler, J., Santos, A. J. B., Hodnett, M. G., Herrera, R.,
- Luizão, F. J., Arneth, A., Lloyd, G., Dezzeo, N., Hilke, I., Kuhlmann, I., Raessler, M., Brand,
- W. A., Geilmann, H., Moraes Filho, J. O., Carvalho, F. P., Araujo Filho, R. N., Chaves, J. E.,
- 14 Cruz Junior, O. F., Pimentel, T. P. and Paiva, R.: Variations in chemical and physical
- properties of Amazon forest soils in relation to their genesis, Biogeosciences, 7(5), 1515–
- 16 1541, doi:10.5194/bg-7-1515-2010, 2010.
- 17 Raddatz, T. J., Reick, C. H., Knorr, W., Kattge, J., Roeckner, E., Schnur, R., Schnitzler, K.-
- 18 G., Wetzel, P. and Jungclaus, J.: Will the tropical land biosphere dominate the climate–carbon
- 19 cycle feedback during the twenty-first century?, Clim. Dyn., 29(6), 565–574,
- 20 doi:10.1007/s00382-007-0247-8, 2007.
- 21 Reed, S. M.: Deriving flow directions for coarse-resolution (1-4 km) gridded hydrologic
- 22 modeling, Water Resour. Res., 39(9), doi:10.1029/2003WR001989, 2003.
- Rost, S., Gerten, D., Bondeau, A., Lucht, W., Rohwer, J. and Schaphoff, S.: Agricultural
- 24 green and blue water consumption and its influence on the global water system, Water
- 25 Resour. Res., 44(9), n/a-n/a, doi:10.1029/2007WR006331, 2008.
- Sheffield, J., Goteti, G. and Wood, E. F.: Development of a 50-Year High-Resolution Global
- 27 Dataset of Meteorological Forcings for Land Surface Modeling, J. Clim., 19(13), 3088–3111,
- 28 doi:10.1175/JCLI3790.1, 2006.
- 29 Sitch, S., Smith, B., Prentice, I. C., Arneth, A., Bondeau, A., Cramer, W., Kaplan, J. O.,
- 30 Levis, S., Lucht, W., Sykes, M. T., Thonicke, K. and Venevsky, S.: Evaluation of ecosystem
- 31 dynamics, plant geography and terrestrial carbon cycling in the LPJ dynamic global

- 1 vegetation model, Glob. Chang. Biol., 9(2), 161–185, doi:10.1046/j.1365-2486.2003.00569.x,
- 2 2003.
- 3 Smith, M. B., Koren, V. I., Zhang, Z., Reed, S. M., Pan, J.-J. and Moreda, F.: Runoff response
- 4 to spatial variability in precipitation: an analysis of observed data, J. Hydrol., 298(1-4), 267–
- 5 286, doi:10.1016/j.jhydrol.2004.03.039, 2004.
- 6 Soares-Filho, B. S., Nepstad, D. C., Curran, L. M., Cerqueira, G. C., Garcia, R. A., Ramos, C.
- 7 A., Voll, E., McDonald, A., Lefebvre, P. and Schlesinger, P.: Modelling conservation in the
- 8 Amazon basin., Nature, 440(7083), 520–3, doi:10.1038/nature04389, 2006.
- 9 Swann, A. L. S., Longo, M., Knox, R. G., Lee, E. and Moorcroft, P. R.: Future deforestation
- in the Amazon and consequences for South American climate, Agric. For. Meteorol., 214-
- 11 215, 12–24, doi:10.1016/j.agrformet.2015.07.006, 2015.
- 12 USACE: A Muskingum-Cunge Channel Flow Routing Method for Drainage Networks.
- 13 [online] Available from: http://www.hec.usace.army.mil/publications/TechnicalPapers/TP-
- 14 135.pdf, 1991.
- Vamborg, F. S. E., Brovkin, V. and Claussen, M.: The effect of a dynamic background albedo
- scheme on Sahel/Sahara precipitation during the mid-Holocene, Clim. Past, 7(1), 117–131,
- 17 doi:10.5194/cp-7-117-2011, 2011.
- Walko, R. L., Band, L. E., Baron, J., Kittel, T. G. F., Lammers, R., Lee, T. J., Ojima, D.,
- 19 Pielke, R. A., Taylor, C., Tague, C., Tremback, C. J. and Vidale, P. L.: Coupled Atmosphere-
- 20 Biophysics-Hydrology Models for Environmental Modeling, J. Appl. Meteorol., 39(6), 931–
- 21 944, doi:10.1175/1520-0450(2000)039<0931:CABHMF>2.0.CO;2, 2000.
- Wohl, E., Barros, A., Brunsell, N., Chappell, N. A., Coe, M., Giambelluca, T., Goldsmith, S.,
- Harmon, R., Hendrickx, J. M. H., Juvik, J., McDonnell, J. and Ogden, F.: The hydrology of
- 24 the humid tropics, Nat. Clim. Chang., 2(9), 655–662, doi:10.1038/nclimate1556, 2012.
- 25 Yamazaki, D., Kanae, S., Kim, H. and Oki, T.: A physically based description of floodplain
- inundation dynamics in a global river routing model, Water Resour. Res., 47(4), n/a–n/a,
- 27 doi:10.1029/2010WR009726, 2011.
- 28 Zambrano-Bigiarini, M.: hydroGOF: Goodness-of-fit functions for comparison of simulated
- and observed hydrological time series. R package version 0.3-8, [online] Available from:
- 30 http://cran.r-project.org/package=hydroGOF, 2014.

- 1 Zhang, K., de Almeida Castanho, A. D., Galbraith, D. R., Moghim, S., Levine, N. M., Bras,
- 2 R. L., Coe, M. T., Costa, M. H., Malhi, Y., Longo, M., Knox, R. G., McKnight, S., Wang, J.
- and Moorcroft, P. R.: The fate of Amazonian ecosystems over the coming century arising
- 4 from changes in climate, atmospheric CO2, and land use, Glob. Chang. Biol., 21(7), 2569–
- 5 2587, doi:10.1111/gcb.12903, 2015.

- 6 Zulkafli, Z., Buytaert, W., Onof, C., Lavado, W. and Guyot, J. L.: A critical assessment of the
- 7 JULES land surface model hydrology for humid tropical environments, Hydrol. Earth Syst.
- 8 Sci., 17(3), 1113–1132, doi:10.5194/hess-17-1113-2013, 2013.

1 Figures

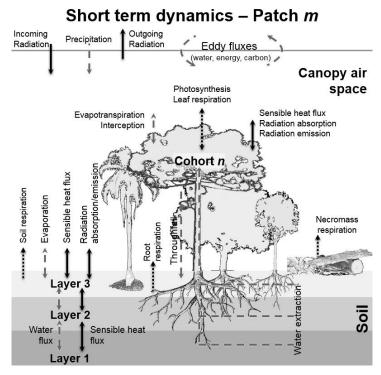


Figure 1. Schematic of the enthalpy fluxes (all arrows) and water fluxes (all but solid black arrows) that are solved in ED2. The schematic is based on Walko et al. (2000); and Medvigy et al. (2009). (Courtesy of Marcos Longo).

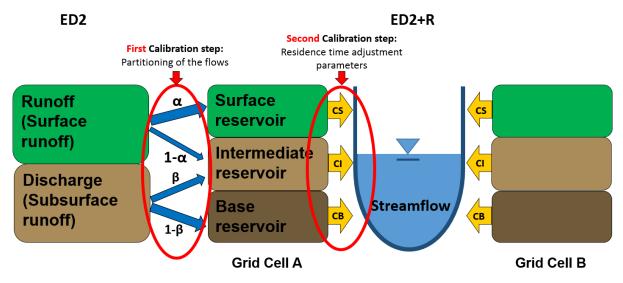


Figure 2. Schematic representation of the connection between the terrestrial biosphere model and the hydrological routing scheme. Calibrating parameters <u>are</u> circled in red. The reservoirs are used to determine the contribution of streamflow that comes from overland flow, interflow and groundwater flow. The daily sum of these three reservoirs is then moved from each grid cell into the drainage network.

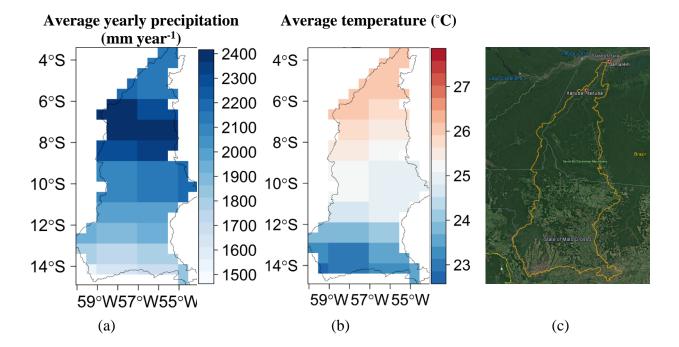


Figure 3. Average precipitation (a) and temperature (b) in the Tapajós river basin (1986 - 2005).
Redrafted from Farinosi et al. (under review). (c) Aerial imagery the Tapajós river basin illustrating land cover diversity in the catchment. Source: Google Earth Pro.

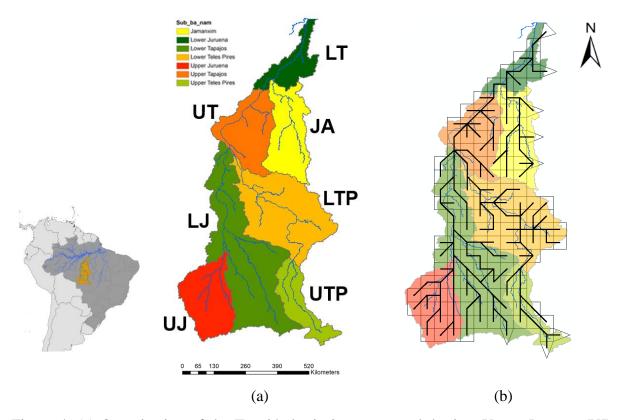


Figure 4. (a) Organization of the Tapajós basin into seven sub-basins: Upper Juruena (UJ); Lower Juruena (LJ); Upper Teles Pires (UTP); Lower Teles Pires (LTP); Jamanxim (JA); Upper

Tapajós (UT); and Lower Tapajós (LT). (b) ED2+R represents the domain in grid cells with 0.5° resolution (~ 55 km). The black segments indicate flow accumulation network.




Figure 5. Calibration of flow partitioning (parameters alpha and beta in <u>Figure 2</u>Figure 2) between the ED2 and the ED2+R reservoirs. Color bar indicates the NSE values of the simulated versus the observed river flow values (0 very different, 1 very similar)

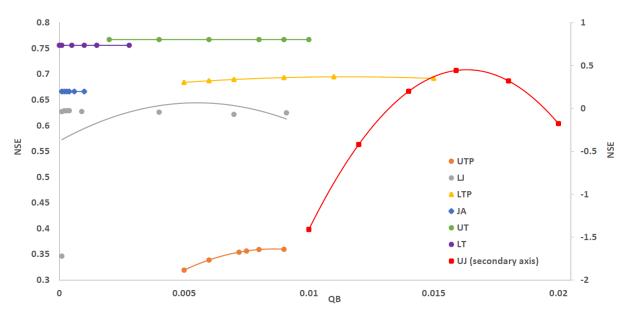
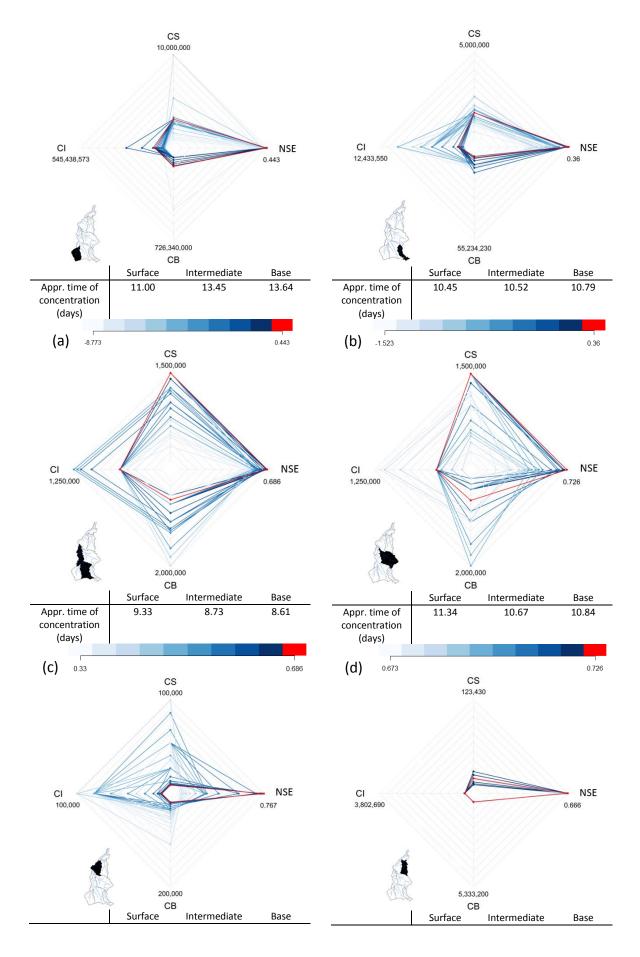


Figure 6. Model sensitivity to the initial conditions of baseflow (QB) for the different ED2+R sub-basins in the domain: Upper Juruena (UJ); Upper Teles Pires (UTP); Lower Juruena (LJ); Lower Teles Pires (LTP); Upper Tapajós (UT); Jamanxim (JA); and Lower Tapajós (LT).




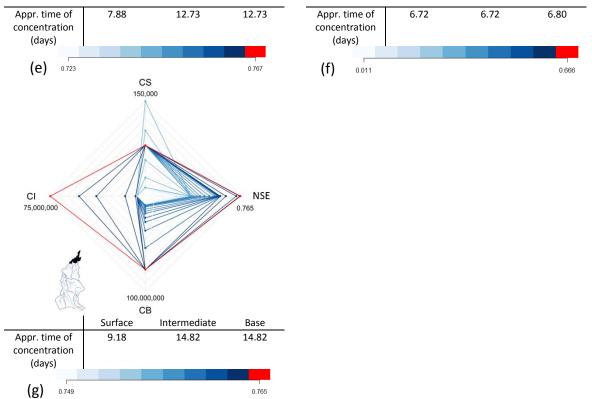


Figure 7. Calibration of the residence times (τ) of the flow within the ED2+R reservoirs of different grid cells in the domain through the adjustment of the non-dimensional C parameters. Overland, intermediate and subsurface water flows are calibrated respectively through the adjustment parameters CS, CI, and CB (Figure 2Figure 2). The color bars refer to the model performance (Nash-Sutcliffe Efficiency NSE) of the specific parameter combination in the specific sub-basin. In red the chosen combinations. At the bottom of each graph, a table providing the corresponding approximate average time of concentration (in days) for the cells in the sub-basin. (a) Upper Juruena (UJ); (b) Upper Teles Pires (UTP); (c) Lower Juruena (LJ); (d) Lower Teles Pires (LTP); (e) Upper Tapajós (UT); (f) Jamanxim (JA); and (g) Lower Tapajós (LT).

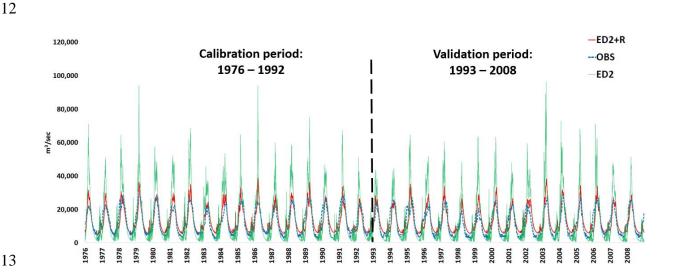

3

4

5

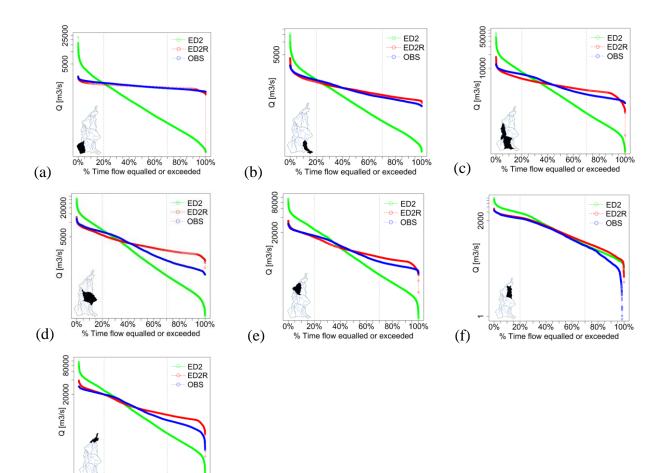


Figure 9. Flow duration curves (percentage of time that flow – m³/s – is likely to equal or exceed determined thresholds) of observed values (blue), ED2 outputs (green), ED2+R (red) at the outlet of the seven sub-basins. (a) Upper Juruena (UJ); (b) Upper Teles Pires (UTP); (c) Lower Juruena (LJ); (d) Lower Teles Pires (LTP); (e) Upper Tapajós (UT); (f) Jamanxim (JA); and (g) Lower Tapajós (LT).

20% 40% 60% 80% 100%

% Time flow equalled or exceeded

(g)

6 7

8 9

10

1 Tables

- Table 1. ED2+R calibrated parameters (based on Zhang et al., 2015; Longo et al., 2014; Knox et al., 2012). Additional information about ED2 parameter calibration for the Amazon basin are
- 4 available in Zhang et al. (2015) and Longo et al (2014).

Input	Source									
Meteorological forcing	Sheffield et al. (2006)									
Land use	Hurtts et al. (2006)									
Topography (DEM)	SRTM, Shuttle Radar Top resolution	ography Mission 90 mt								
Soil data	Quesada et al. (2010) -IGBP-DIS global soil data (Global Soil Data Task 2014)									
Geomorphological relations	Coe et al. (2008)									
Streamflow observations	HYBAM - ANA									
Carbon dioxide concentration	378 ppm									
Process	Method									
Integration scheme	4th order Runge-Kutta method	1								
Energy and water cycles	Knox (2012) and Longo (2014)	4)								
Temperature-dependent function for	Q ₁₀ function									
photosynthesis	Ç									
Canopy radiation scheme	Two-stream model									
Allometry for height	Based on Poorter et al. (2006))								
Allometry for above-ground biomass	Based on Eqn. (2) of Baker et									
Allometry for leaf biomass	Based on Cole & Ewel (2006) (2008)									
Parameter	Value	Units								
Biophysics time step	600	S								
Number of soil layers	16	-								
Depth of the deepest soil layer	6	m								
Depth of the shallowest soil layer	0.02	m								
Cohort water holding capacity	0.11	$kg_w m_{leaf+wood}^{-2}$								
Residual stomatal conductance	10,000	$\mu mol \ m^{-2}s^{-1}$								
Leaf-level water stress parameter	0.016	$mol_{H_2O} mol_{Air}^{-1}$								
Oxygenase/carboxylase ratio at 15°C	4000	-								
Power base for oxygenase/carboxylase ratio	0.57	_								
Power base for carboxylation rate	2.4									
Power base for dark respiration rate	2.4									
Environmentally-determined parameters	Value	Units								
Weight factor for stress due to light	1.0	-								
Maximum environmentally-determined mortality	5.0	yr^{-1}								
rate										
Steepness of logistic curve	10.0	-								
Band-dependent radiation parameters (*)	Value	Units								
Dry soil reflectance	(0.20; 0.31; 0.02)									
Wet soil reflectance	(0.10; 0.20; 0.02)	-								
Leaf transmittance	(0.05; 0.20; 0.00)									
Leaf reflectance (grasses)	(0.10; 0.40; 0.04)									
Leaf reflectance (trees)	(0.10; 0.40; 0.05)									
Wood transmittance	(0.05; 0.20; 0.00)									
Wood reflectance (trees)	(0.05; 0.20; 0.10)	-								
Plant Functional Type PFT-dependent parameters (**)	Value	Units								
Leaf orientation factor	(0.10; 0.10; 0.10)	_								

Leaf characteristic size	(0.10; 0.10; 0.10)	m
Max. carboxylation rate at 15°C	(18.75; 12.50; 6.25)	$\mu mol_C m_{leaf}^{-2} s^{-1}$
Dark respiration rate at 15°C	(0.272; 0.181; 0.091)	$\mu mol_C m_{leaf}^{-2} s^{-1}$ $\mu mol_C m_{leaf}^{-2} s^{-1}$
Quantum yield	(0.080; 0.080; 0.080)	-
Slope parameter for stomatal conductance	(9.0; 9.0; 9.0)	-
Fine root conductance parameter	(600; 600; 600)	$m^2kg_{C_{root}}^{-1}yr^{-1}$
River Routing Parameters (Section 4)	Value	Units
Grid-cell size (Figure 4)	0.5x0.5	degrees
Flow partitioning parameters $(\alpha; \beta)$ (Figure 5)	(0.70; 0.40)	-
Residence time adjustment parameters, respectively	Upper Juruena (2,600; 70,000;	
referring to overland (CS), intermediate (CI), and	90,000)	x1 '000 (***)
subsurface water flows (CB) (Figure 7)	Upper Teles Pires (1,600; 1,750;	;
(CS; CI; CB)	2,500)	
	Lower Juruena (1,500; 600; 500)	
	Lower Teles Pires (1,500; 650; 80	0)
	Jamanxim (10; 10; 11)	
	Upper Tapajós (75; 75,000; 75,00	
	Lower Tapajós (75; 75,000; 75,00	0)
Initial conditions of the baseflow (Figure 6)	Upper Juruena (0.0159)	
	Upper Teles Pires (0.009)	m^3km^2
	Lower Juruena (0.0004)	
	Lower Teles Pires (0.011)	
	Jamanxim (0.0001)	
	Upper Tapajós (0.0080)	
	Lower Tapajós (0.0005)	

(0.80; 0.80; 0.80)

Leaf clumping factor

^(*) Radiation-dependent parameters are given in the format (xPAR; xNIR; xTIR) corresponding to values for photosynthetically active, near infrared and thermal infrared, respectively.

^(**) PFT-dependent parameters are given in the format (xETR; xMTR; xLTR) corresponding to the values for early-, mid-, and late-successional cohorts, respectively.

^(***)The residence time parameters are dimensionless and used to correct the Kirpich formula for time of concentration as explained in Collischonn et al. (2007). Their magnitude is influenced by the size of the grid-cell and its topography.


Table 2. Statistics about the gauge information filling procedure (correlation with the station to be filled, number of original observations, filled number of observations).


Sub-basin name	Main river gauge	Original number of daily gauge	Gap filling station 1	Gap filling station 2	Number of daily
	station - z in	records (number of daily	$-\mathbf{q}$ in Equation 7 $-$	$-\mathbf{y}$ in Equation 7 $-$	records after filling
	Equation 7	observations)	[correlation with z]	[correlationwith z]	procedure (number of
					daily observations)
Jamanxin	Jamanxim	1,928	Jardim do Ouro	Novo Progresso	5,382
			[0.97]	[0.96]	
Upper Teles Pires	Cachoeirão	10,356	Teles Pires	Indeco	11,524
			[0.91]	[0.94]	
Upper Juruena	Fontanilhas	10,469	Foz do Juruena	Barra do São Manuel	11,688
			[0.94]	[0.89]	
Lower Teles Pires	Tres Marias	8,682	Barra do São Manuel	Santa Rosa	10,640
			[0.98]	[0.98]	
Lower Juruena	Foz do Juruena	2,074	Barra do São Manuel	Jatoba	11,447
			[0.98]	[0.97]	
Upper Tapajós	Jatoba	10,218	Fortaleza	Barra do São Manuel	11,517
			[0.99]	[0.98]	
Lower Tapajós	Itaituba	5,789	Fortaleza	Jatoba	11,688
÷ *			[0.99]	[0.98]	

Table 3. Calibration and validation results. Nash-Sutcliffe Efficiency, Kling Gupta (2009 and 2012 methods), Pearson's R correlation, and volume ratio. Optimal values = 1 (statistics where calculated using the R package hydroGOF - Zambrano-Bigiarini 2014).

	Calibration period (1976-1992)							Validation period (1993-2008)								
Sub-basin	Sub-basin Nash-Sutcliffe		Kling-Gupta [method 2009] {method 2012}		Pearson's R Correlation		Volume Ratio Vol sim/Vol Obs		Nash-Sutcliffe		Kling-Gupta [method 2009] {method 2012}		Pearson's R Correlation		Volume Ratio Vol sim/Vol Obs	
	ED vs OBS	ED2 +R vs	ED vs OBS	ED2+ R vs OBS	ED vs OBS	ED2+ R vs OBS	ED vs OBS	ED2+ R vs OBS	ED vs OBS	ED2 +R vs	ED vs OBS	ED2+ R vs OBS	ED vs OB	ED2+ R vs OBS	ED vs OB	ED2+ R vs OBS
Upper Juruena	-26.88	OBS 0.45	[-3.60] {-5.75}	[0.50] {0.51	0.61	0.68	0.72	0.98	-27.47	OBS 0.29	[-3.54] {-6.10}	[0.39] {0.38}	S 0.53	0.54	S 0.68	1.01
Upper Teles Pires	-3.35	0.37	[-0.51] {-0.64}	[0.61] {0.61	0.53	0.64	0.94	1.01	-3.19	0.28	[-0.51] {-0.59}	[0.63] {0.63}	0.57	0.63	0.96	1.03
Lower Juruena	-1.45	0.65	[-0.23] {-0.18}	[0.64] {0.67	0.77	0.82	1.02	0.94	-2.17	0.63	[-0.43] {-0.30}	[0.72] {0.67}	0.75	0.81	1.05	1.08
Lower Teles Pires	-0.20	0.71	[0.25] {0.27}	[0.68] {0.67	0.80	0.85	1.01	1.02	-0.34	0.67	[0.17] {0.34}	[0.69] {0.60}	0.82	0.85	1.11	1.17
Jamanxim	-0.74	0.67	[0.01] {0.39}	[0.79] {0.78	0.82	0.85	1.55	1.13	-0.10	0.55	[0.23] {0.52}	[0.75] {0.73}	0.83	0.77	1.43	1.09
Upper Tapajós	-1.01	0.77	[-0.13] {0.21}	[0.82] {0.83	0.84	0.88	1.20	0.99	-1.23	0.75	[-0.22] {0.16}	[0.84] {0.81}	0.84	0.88	1.21	1.08
Lower Tapajós	-0.40	0.76	[-0.09] {0.28}	[0.86] {0.83	0.84	0.88	1.11	1.06	-0.50	0.68	[0.09] {0.29}	[0.80] {0.76}	0.82	0.86	1.13	1.13

1 Annex A

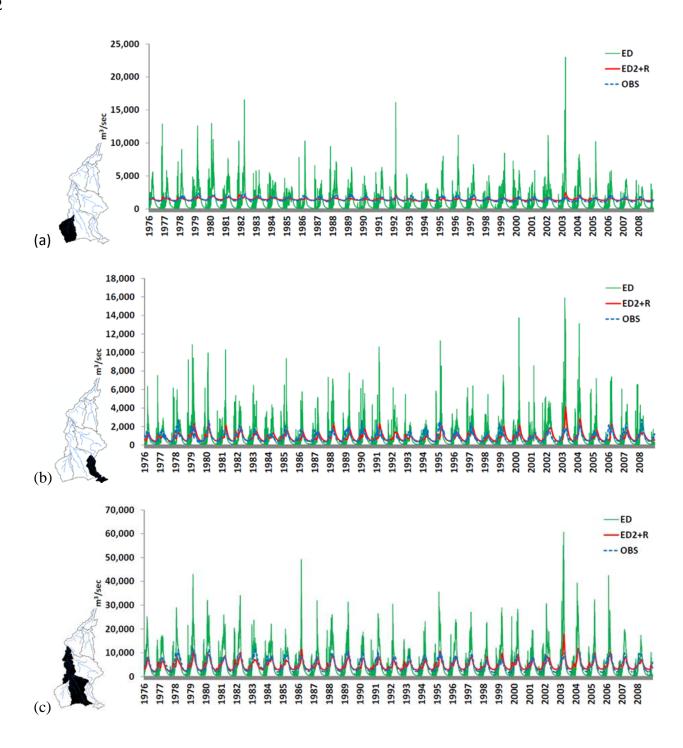

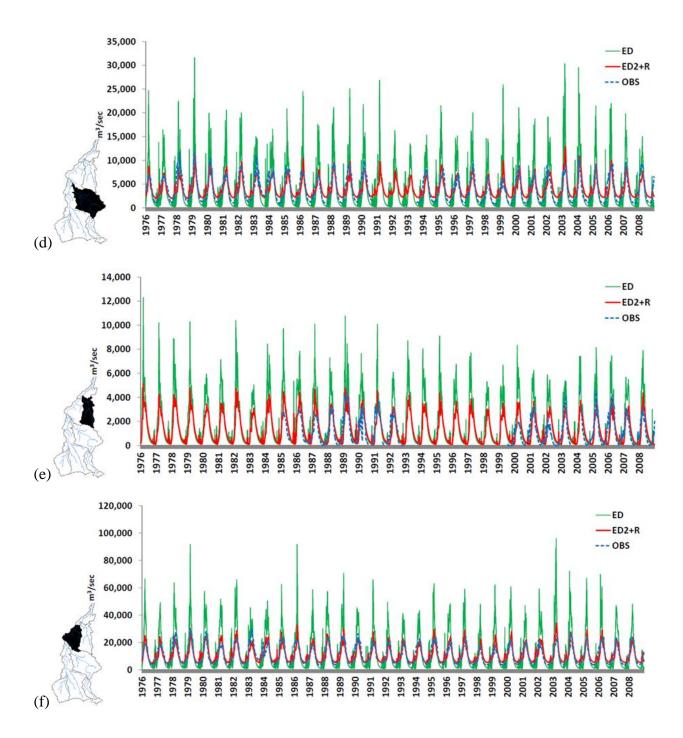

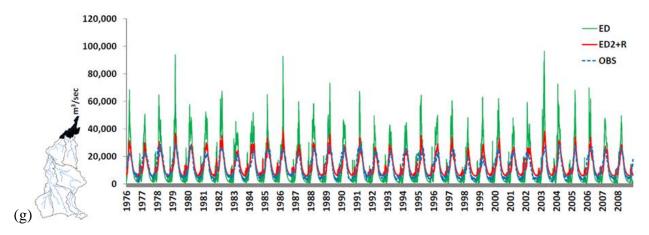


Figure A1. Time series of river flow (m3/sec) at the outlet of each sub-basins. ED2 output (green line), ED2+R (red line), and Observations (blue dotted line). (a) Upper Juruena (UJ); (b) Upper Teles Pires (UTP); (c) Lower Juruena (LJ); (d) Lower Teles Pires (LTP); (e) Jamanxim (JA); (f) Upper Tapajós (UT); and (g) Lower Tapajós (LT).