Authors' reply to Editor and Referees "Heterogeneity measures in hydrological frequency analysis: review and new developments" by A. I. Requena et al.

A) Authors' reply to Editor Dr. Stacey Archfield

Editor Decision: Reconsider after major revisions COMMENTS TO THE AUTHOR:

1. This manuscript received three constructive reviews and, at this time, I instruct the authors to make their proposed changes to revise the manuscript. Given the feedback of the reviews and the required changes, the manuscript will be sent back out for review once the revisions are made. Final acceptance is not guaranteed.

<u>Reply</u>: The authors thank the editor for managing the present manuscript, as well as for her constructive comments. The revised version of the manuscript where the changes described in the present document are included has been submitted for its assessment.

2. All reviewers noted that a lack of application to observed data detracted from the manuscript. In my reading of the manuscript, the comments, and the responses, I share in their comment. I appreciate the need to perform simulated experiments to evaluate the various heterogeneity measures and recognize that simulation experiments have been published alone in previous papers. However, with regional frequency analysis now having well-established and widely accepted practices, assessing the overall effect of any proposed change in the overall practice would provide an even stronger case for use of a different method in assessing heterogeneity.

For this reason, I strongly encourage the authors to think about adding a section that applies the Gini Index to observed data. As the authors note in their reply, assessing heterogeneity is only one step in a multi-step process. Perhaps the authors' experience with regional flood frequency analysis has resulted in a readily available dataset for which the Gini Index could be applied and

contrasted with previously-computed heterogeneity metrics and, ultimately, regional flood frequency estimates to determine the overall effect the Gini Index has.

<u>Reply</u>: The authors understand the point of the editor and referees. A new Sect. 6 entitled "Illustrative application" has been included in the revised manuscript. In such a section, the GI and commonly used criteria are applied on a real case study for didactical purposes, and discussion about the obtained results is provided. Please, see Authors' reply to Specific Comment 8 of Referee#2 and new Sect. 6 in the revised manuscript.

B) Authors' reply to Referee #1 C. Rojas-Serna

It's a good idea to determine the homogeneous zones from the identification of the heterogeneity between both, nevertheless, the amount of data used in this work is poor. This has consequences in the discussion of results because is not clear which is the hydrological variable that determines the heterogeneity. My comment is focused in the data used in this work: There is not a section where data used to apply the methodology are presented. This limits the understanding of the heterogeneity in hydrology. It is unclear whether this is a watershed or region where the variable n is gauging stations. Or maybe n may be the number of meteorological stations. In that case the heterogeneity would be defined by climatic characteristics. I suggest include a section where the study area and the hydrological variable that is considered to define heterogeneity will be presented. So also describe the importance of data in the discussion of the results.

<u>Reply</u>: The authors thank the reviewer for the time spent in this revision as well as for her comments. The present study is based on synthetic regions that are simulated by a Monte Carlo procedure. The definition of these regions was presented in the second paragraph of Sect. 2 "Assessment of a heterogeneity measure" of the original manuscript. First, the authors agree with the reviewer that this can be more clearly highlighted as a new Sect. 2.1 "Synthetic regions", which has been included in the revised version of the manuscript. In addition, the following words marked between hyphens have also been added to the text: "The procedure is based on synthetic regions generated through Monte Carlo simulations from a representative – flood – parent distribution [...]." (page 4 line 21 of the revised manuscript); "A region is defined by its number of – gauging – sites (N), at-site data length (n), [...]" (page 4 line 22 of the revised manuscript).

Since the regions are simulated, the amount of available flood data is very large and the regions present a variety of situations. This can be seen for instance by looking at Figs. 1, 2 and 3. A large amount of simulated data is essential to perform the proposed assessment procedure through which the potential heterogeneity measures are evaluated according to different factors and criteria.

Finally, the authors think that it is important to highlight the purpose of this study. The heterogeneity measure identified by the four-step assessment procedure proposed in this study will be used for quantifying the degree of heterogeneity of a given region. This is a part of a whole regional frequency analysis in which a given region would have been previously defined by using climatic, hydrologic and/or physiographic descriptors, a given delineation method, etc (e.g. see new Sect. 6 "Illustrative application" in the revised manuscript). The heterogeneity measure will be then applied on the flood data of the given defined region to quantify its degree of regional heterogeneity, in an analogous way to when homogeneity tests are applied. Note that the heterogeneity of a given region in this study, as well as in the literature, is based on differences in any feature of the at-site frequency distribution among sites (e.g. Hosking and Wallis, 1997), where the L-variation coefficient may be considered as representative of them (e.g. Viglione, 2010). This is the reason of the use of simulated flood data in this study. This information can be found over the manuscript (Sect. 1, 2 and 5).

The use of simulated data in the assessment of new techniques in regional frequency analysis is a very well established approach and it has been used in a number of publications (for instance Hosking and Wallis, 1997; Seidou et al., 2006; Chebana and Ouarda, 2007). In fact, this is the only way to deal with issues related to data quality. These issues were rightfully raised by the reviewer. In this regard, the aforementioned explanation has been added at the end of new Sect. 2.1: "It is important to highlight that the use of simulated data in the assessment of new techniques in regional frequency analysis is a very well established approach and it has been used in a number of publications (e.g. Hosking and Wallis, 1997; Seidou et al., 2006; Chebana and Ouarda, 2007). Indeed, this is the only way to deal with issues related to data quality.

If observed data is used, we will be faced with issues related to the size of the record, sampling uncertainty, ignorance of parent distribution, ignorance of the true nature of the link between physiographical-meteorological variables and hydrological ones, etc. The authors agree that this element needed to be more clearly presented in the manuscript. Please, see the illustrative application on a real case study that has been added for didactical purposes as a new Sect. 6, where discussion is also shown. The authors wish to thank the reviewer for having pointed out this element.

References:

- Chebana, F. and Ouarda, T.B.M.J.: Multivariate L-moment homogeneity test, Water Resources Research. 43, W08406, 2007.
- Hosking, J.R.M and Wallis, J.R.: Regional frequency analysis: an approach based on Lmoments, Cambdridge University Press, 240 pages, 1997.
- Seidou, O., Ouarda, T.B.M.J., Barbet, M., Bruneau, P. and Bobée, B.: A parametric Bayesian combination of local and regional information in flood frequency analysis, Water Resources Research. 42, W11408, 2006.
- Viglione, A.: Confidence intervals for the coefficient of L-variation in hydrological applications, Hydrol. Earth Syst. Sc., 14, 2229-2242, 2010.

C) Authors' reply to Anonymous Referee #2

GENERAL COMMENTS

I really enjoyed reading this paper. I appreciate the efforts taken by the authors in contributing to the field of Regional Frequency analysis (RFA) by proposing a new index to assess heterogeneity of a region. There is clarity in describing the assumptions/drawbacks associated with the existing heterogeneity measures. Also, it is nicely stated why there is a need for new heterogeneity measures in RFA. The criteria that are defined to compare various heterogeneity measures with a new measure look adequate.

<u>Reply</u>: The authors thank the reviewer for the thorough revision as well as for the constructive comments provided.

SPECIFIC COMMENTS

1. In the introduction section, literature review regarding regional hydrological frequency analysis is not complete.

<u>Reply</u>: The literature review on regional hydrological frequency analysis included in the introduction of this study is not intended to be exhaustive. Its aim is to provide a general idea of the diversity of tools and methods existing for performing regional hydrological frequency analysis, with the aim of underlining the need for heterogeneity measures for the evaluation of the corresponding regional heterogeneity. In order to guide the reader in the search of additional references, "see Ali et al., 2012" has been changed to "see Ali et al., 2012 and references herein" (page 2 line 7 of the revised manuscript). Also, the sentence "For further references on regional flood frequency analysis, please see Ouarda (2013), Salinas et al. (2013) and references herein" has been added to page 2 lines 11-12 of the revised manuscript.

2. Page 3, Line 32, "... focused on the delineation step". What do you mean by "..focussed on delineation step"? How Gini Index (proposed in this paper) account for the delineation step?

<u>Reply</u>: The authors apologise for the lack of clarity. The intention was to highlight that the use of a heterogeneity measure will allow direct comparison of the heterogeneity of regions delineated by different methods. Please, see Authors' Reply to Specific Comment 6 for additional explanations about the use of the Gini Index for comparing the heterogeneity of regions delineated by different delineation methods. For clarity, "[...] and focused on the delineation step" has been replaced by the aforementioned explanation "Furthermore, the use of a heterogeneity measure should allow direct comparison of the heterogeneity of regions delineated by different methods" (page 3 lines 33-34 of the revised manuscript).

3. Page 4, line 28-29; what is the reason behind considering a linear relationship for L-CV and why gamma/2 was used?

<u>Reply</u>: This linear relation and the use of gamma/2 is a common and plausible way of simulating a varying at-site L-CV over a region. It has been used in other studies, such as Hosking and Wallis (1997) and Wright et al. (2015). In this regard, the following sentence has been added to page 5 lines 2-4 of the revised manuscript: "Note that this relation is commonly used in other studies (e.g. Hosking and Wallis, 1997; Wright et al., 2015) as a plausible way of simulating varying conditions over a region".

4. Page 10, line 25-26; Gini index considered in this study is a function L-CV. Can GI be expressed in terms of L-skewness coefficient on the similar line as it was expressed in terms of L-CV? If yes, then will there be any change in the overall results from this study? I am asking this question because L-skewness would be more uncertain for observed data (due to involvement of higher (third) moment) which can influence the heterogeneity measure H2 or V2 (e.g variation in (V2) H2 heterogeneity measure would be more as compared to (V1) H1 heterogeneity measure; even visible in Figures 1, 2 and 3). As the indices are compared based on hypothetical regions (using Monte Carlo simulation), the effect on L-skewness coefficient may not be noticeable. But in practice, there can be uncertainty associated with the estimation of L-skewness coefficient.

<u>Reply</u>: The GI has been expressed in terms of the L-CV due to the fact that the L-CV has been recognised as a good surrogate of the difference between at-site flood distributions. It also has a

physical meaning, as it is related to the slope of the frequency curve. In theory, the GI could be expressed in terms of the L-skewness as well. However, as mentioned by the reviewer, the use of the L-skewness would imply high uncertainty when applying it to real data. Note that the length of observed data is usually short to obtain an appropriate estimation of the L-skewness in practice, making the use of a lower L-moment such as the L-CV preferable. Also note that when traditionally assessing the homogeneity of a region, the use of the H1 statistic (only based on L-CV) has been generally recognised as more powerful than others such as H2 (based on L-CV and on L-skewness), and that to our knowledge, statistics only based on L-skewness are not usually considered.

5. What is the range GI index?

<u>Reply</u>: This can be found in Sect. 3.3, after Eq. (10): "Theoretically, GI ranges from zero to one. The former is obtained when all the x_i values are equal, and the latter is given when all but one value equals zero (in an infinite population)".

6. Page 16, line 3-10 describes use of GI in assessing the delineation methods. The methodology discussed is not clear. Different delineation methods have different criteria to select the optimal delineation/regionalization solution (e.g. AIC or BIC, Davies- Bouldin index in the case of hard clustering algorithms, Xie-Beni in the case of fuzzy clustering algorithm). Are you trying to say that we can rank the delineation methods based on GI index value to arrive at best delineation method for regionalization which then can be used to perform regional frequency analysis? If yes, then I think this kind of approach is even possible with any other Index (e.g., H1, H2). Authors have mentioned on Page 3, line 32 that the proposed index (e.g., GI) can alleviate the drawback associated with delineation method as compared to the conventional heterogeneity indices (H1, H2 etc).

<u>Reply</u>: The authors apologise for the lack of clarity. The GI is intended to be used in assessing delineation methods by comparing the heterogeneity of the regions already identified as the "best regions" by each delineation method. For instance, each one of two different delineation methods (methodA and methodB) delineates two different sub-regions (sub-regionA1 and sub-regionA2; sub-regionB1 and sub-regionB2). The GI will then be applied on the at-site L-CV obtained from

the flood data of each sub-region (GIA1, GIA2, GIB1, GIB2); and the GI for each delineation method will be obtained as the GI average of the corresponding sub-regions (GIA, GIB). Then, the best delineation method will be the one with the smallest GI (i.e., min(GIA,GIB)), as it obtains the less heterogeneous sub-regions. This is clearly shown in new Sect. 6 "Illustrative application". For guiding the reader in this regard, the sentence "(see Sect. 6 for an illustrative application)" has been included in Discussion (page 16 line 26 of the revised manuscript). Note that the GI is identified as the best measure for ranking regional heterogeneity in this study, as it is the one with the best behaviour over the four steps of the assessment procedure.

Regarding the comment of the reviewer concerning the text in page 3 line 32 of the original manuscript, the authors also apologise for the lack of clarity. Such a drawback was not related to conventional heterogeneity indices, but to procedures that imply the need of performing additional steps in the regional analysis for comparing delineations methods. Please, see Author' Reply to Specific Comment 2 for further explanations.

7. In Figure 7, impact of heterogeneity due to addition of discordant sites to homogeneous regions is presented. A similar observation can be concluded from Figures 1 where the indices are assessed with increase in the heterogeneity percent (gamma value). In the case of Figure 1, mean of conventional heterogeneity measures (H1, H2, AD) tend to diverge with increase in the degree of heterogeneity while in Figure 7, Heterogeneity measures tend to converge (coming close) with increase in the number of discordant sites (i.e. increase in the degree of heterogeneity). Kindly clarify this point. However, in the case of GI, in both figures1 and 7, convergence is visible. Why is this happening?

<u>Reply</u>: It is important to highlight that, although both graphics have in common an increase in the regional heterogeneity, their characteristics and displayed information are different. In the case of Fig. 1, heterogeneous regions with increasing heterogeneity (from 0% to 100%) are generated by considering two different regional L-CVs and their heterogeneity values are compared. As a result, measures such as H1 and H2 "diverge" with increasing heterogeneity, as these measures are not originally thought to compare several (heterogeneous) regions. In the case of Fig. 7 the situation is different. A given homogeneous region is considered, and "homogenous" sites are exchanged by "discordant" sites. Hence, in this case, progressive changes in the heterogeneity of a given region are assessed (not between different regions). As a

result, the heterogeneity of the region is more difficult to be ranked for all measures when there is an increase in the number of discordant sites and in the difference between L-CVs (of homogeneous region and discordant sites). For clarity, the following sentence has been added after the existing description of Fig. 7 to the first paragraph in Sect. 4.4: "Note that unlike Fig. 1, where the heterogeneity value of two kinds of regions with the same degree of heterogeneity but different regional L-CV may be compared; in Fig. 7 progressive changes in the heterogeneity of a single homogeneous region are assessed."

8. The results obtained from the Monte Carlo simulation study are encouraging. Only thing missing from the paper is to perform analysis using observed data which would help to strengthen the conclusions drawn from the study. Analysis based on observed data would provide more clarity on the aforementioned concerns especially on Specific comment 4.

<u>Reply</u>: The authors agree with the reviewer on the need to extend the present study to observed data. However, the authors believe that the present manuscript is itself a very dense paper, and such application would imply the delineation of homogenous regions for a given case study by using different delineation methods, which may be considered as a whole new study. The authors would also like to highlight that many studies over the literature compared measures by using simulations without including a real case study (e.g. Genest et al. 2009). Furthermore, in a real case study, the performance of the measures cannot be evaluated because of the absence of the reference heterogeneity value (unlike in simulations).

Nevertheless, for didactical purposes and encouraged by the editor, the authors have decided to include an "illustrative application" as new Sect. 6. In such a section, the GI and commonly used criteria for assessing the performance of delineation methods are applied on a real case study. As illustration, simple clustering settings are used for delineating the regions and discussion about results is provided. Please, see new Sect. 6 in the revised manuscript.

In this regard, the following sentences have also been added to the revised manuscript. Sentence added to the last paragraph of Conclusions: "In this study, an illustrative application is also included for didactical purposes. The subjectivity related to commonly used criteria in assessing the performance of different delineation methods is underlined through it. In this regard, further research may also focus on the application of heterogeneity measures to a variety of case studies

in order to analyse practical aspects". Sentence added at the end of the abstract: "An illustrative application is also presented for didactical purposes, through which the subjectivity of commonly used criteria in assessing the performance of different delineation methods is underlined". Regarding Specific Comment 4, please see the corresponding Authors' Reply to that point.

TECHNICAL CORRECTIONS

1. First line of Abstract reads "Regional frequency analysis is needed to estimate hydrological quantiles at ungauged sites or to improve estimates at sites with short record lengths, by transferring information from gauged sites." I think the regional transfer of information is possible with hydrologically similar sites only. Hence, "…hydrologically similar gauged sites" instead of "… gauged sites" looks more appropriate.

<u>Reply</u>: The suggestion of the reviewer has been taken into account when moving the aforementioned sentence from the abstract to the Introduction as suggested by Referee#3: "[...]. This is done by transferring information from hydrologically similar gauged sites" (page 1 line 27 of the revised manuscript). The authors thank the reviewer for this comment.

References:

- Genest, C., Rémillard, B. and Beaudoin, D.: Goodness-of-fit tests for copulas: A review and a power study, Insurance: Mathematics and economics, 44(2), 199-213, 2009.
- Hosking, J.R.M. and Wallis, J.R.: Regional frequency analysis: an approach based on Lmoments, Cambridge University Press, 240 pages, 1997.
- Ouarda, T.B.M.J.: Hydrological Frequency Analysis, Regional. Encyclopedia of Environmetrics, John Wiley & Sons, Ltd, 2013.
- Salinas, J., Laaha, G., Rogger, M., Parajka, J., Viglione, A., Sivapalan, M., et al.: Comparative assessment of predictions in ungauged basins–Part 2: Flood and low flow studies, Hydrology and Earth System Sciences, 17, 2637-2652, 2013.
- Wright, M.J., Houck, M.H. and Ferreira, C.M.: Discriminatory Power of Heterogeneity Statistics with Respect to Error of Precipitation Quantile Estimation, J. Hydrol. Eng., 04015011, 2015.

D) Authors' reply to Anonymous Referee #3

The manuscript titled 'Heterogeneity measures in hydrological studies: review and new developments' presents a summary of the state current state of Regional Hydrologic Frequency Analysis (RHFA). Generally, I found the manuscript to be a very interesting and information dense product that I enjoyed reading. However, I think that there are missing components that limited my understanding of the implications of this study. This manuscript has a lot of ground to cover to get to it's results, and I encourage the authors to include key information and reorganize some of the sections as per my general comments below.

<u>Reply</u>: The authors thank the reviewer for the thorough revision of the manuscript as well as for the constructive comments provided. The authors tried to address all the comments raised by the reviewer. Please, see the reply to general comments below.

1. I was not able to find the data source in which the study was applied. It seems as though the data might be synthetic and generated as a hypothetical, but that is not clear. Please include at lease a small section specifically about how the data was used (if measured from real data) or synthesized (if it was generated by the authors). Please include this data, or summary of data, either in the manuscript itself or as supplemental material.

Reply: The present study is based on synthetic data, as it was briefly described in the second paragraph of Sect. 2 "Assessment of a heterogeneity measure" of the original manuscript. In this regard, the authors agree with the reviewer about the need of including a specific section "Synthetic regions", to better underline this; which has been carried out in the revised manuscript through new Sect. 2.1. Also, for clarity reasons, "simulation-based" has been added to an existing sentence in Conclusions (page 18 line 27 of the revised manuscript): "In the present paper, a simulation-based general framework is presented [...]" The authors understand the suggestion of the reviewer about including the synthetic data used or a summary of them. Nevertheless, the amount of data used in this study is very large and their characteristics change depending on the step of the methodology applied for their assessment. The description of the general way in which the regions are generated is included in new Sect. 2.1. The authors believe that this information together with the current description of the specific values considered for

generating the regions of study in each step of the methodology may be considered as enough for understanding the data used. The authors would like to note that many simulation studies present their results in a similar way (e.g. Viglione et al. 2007; Wright et al. 2015).

2. The Gini Index is a very popular index to determine economic equality as the authors mention, but there should be additional descriptions about why the Gini Index was applied in the way that it was. Many of the other methods have been used in the past and are presented as benchmarks. However, the Gini Index is fairly new in hydrologic studies, and extra explanation of implementation should be added.

<u>Reply</u>: The authors agree with the reviewer. The Gini Index has not been directly applied to hydrology. However, as mentioned in Sect. 3.3, it is connected with the well-known L-moments which do. Indeed, the Gini Index corrected for short samples corresponds to the sample L-CV. Then, the Gini Index applied on the at-site L-CV in a region provides a value of the dispersion of the at-site L-CV in such a region, and hence it can be seen as a measure of its heterogeneity. Please, see Sect. 3.3 for changes included in the revised manuscript in this regard.

3. I would consider changing the title to the manuscript to something more reflective of the end goals of the paper. While a review of past heterogeneity measures is vital to introducing new methods, I am confused as to why " in hydrologic studies" is used. The connotation seems to be that you are applying new methods to the results of past studies, which is not the case. Consider "New developments of heterogeneity measures for synthetic distributions of extreme hydrologic events."

<u>Reply</u>: The authors thank the reviewer for pointing this out and agree that the use of "in hydrologic studies" may be confusing. They also thank the reviewer for the new title suggestion. In this regard, the authors prefer not to use "synthetic distributions" in the title to avoid misunderstandings. Note that in this study the heterogeneity measures are assessed by using simulated data, but they will be applied on real data in practice (as in new Sect. 6 "Illustrative application" in the revised manuscript). The synthetic data simulate real hydrologic conditions and in no way restrict the scope of the analysis. The title of the paper has been changed from "Heterogeneity measures in hydrological studies: review and new developments" to

"Heterogeneity measures in hydrological frequency analysis: review and new developments", based on the reviewer suggestion. The authors wish again to thank the reviewer for his important input concerning the title of the paper.

4. Specific comments: Line 8 Page 1 - I found the first sentence "Regional frequency analysis is needed to..." to be misleading. While this statement is certainly true, I did not find this to be a major part of this study. This statement should be in the introduction as background instead.

<u>Reply</u>: The authors agree with the reviewer. The sentence has been removed from the abstract; and for clarity, the words marked between hyphens have been added to the sentence "Some regional procedures - to estimate hydrological quantiles at ungauged sites - , such as the index-flood method, [...]" (page 1 line 8 of the revised manuscript). Moreover, the sentence removed from the abstract has been adapted to the introduction as follows "[...]. This is done by transferring information from hydrologically similar gauged sites." (page 1 line 27 of the revised manuscript).

References:

- Viglione, A., Laio, F. and Claps, P.: A comparison of homogeneity tests for regional frequency analysis, Water Resour. Res., 43, 2007.
- Wright, M.J., Houck, M.H. and Ferreira, C.M.: Discriminatory Power of Heterogeneity Statistics with Respect to Error of Precipitation Quantile Estimation, J. Hydrol. Eng., 04015011, 2015.

Deleted: studies

Heterogeneity measures in hydrological <u>frequency analysis</u>: review and new developments

Ana I. Requena¹, Fateh Chebana¹, Taha B. M. J. Ouarda^{2,1}

¹ Institut National de la Recherche Scientifique (INRS), Centre Eau Terre Environnement (ETE), Quebec, G1K-9A9, Canada
 ² Institute Center for Water and Environment (iWATER), Masdar Institute of Science and Technology, Abu Dhabi, PO Box 54224, United Arab Emirates

Correspondence to: Ana I. Requena (ana.requena@ete.inrs.ca)

Abstract: Some regional procedures to estimate hydrological quantiles at ungauged sites, such as the index-flood method, require the delineation of homogeneous regions as a basic step for their application. The homogeneity of these delineated

- 10 regions is usually tested providing a yes/no decision. However, complementary measures that are able to quantify the degree of heterogeneity of a region are needed to compare regions, evaluate the impact of particular sites and rank the performance of different delineating methods. Well-known existing heterogeneity measures are not well-defined for ranking regions, as they entail drawbacks such as assuming a given probability distribution, providing negative values and being affected by the region size. Therefore, a framework for defining and assessing desirable properties of a heterogeneity measure in the
- 15 regional hydrological context is needed. In the present study, such a framework is proposed through a four-step procedure based on Monte Carlo simulations. Several heterogeneity measures, some of which commonly known, others derived from recent approaches or adapted from other fields are presented and developed to be assessed. The assumption-free Gini Index applied on the at-site L-variation coefficient (L-CV) over a region led to the best results. The measure of the percentage of sites for which the regional L-CV is outside the confidence interval of the at-site L-CV is also found to be relevant, as it
- 20 leads to more stable results regardless of the regional L-CV value. <u>An illustrative application is also presented for didactical</u> <u>purposes, through which the subjectivity of commonly used criteria in assessing the performance of different delineation</u> <u>methods is underlined.</u>

Keywords: hydrology; regional analysis; ungauged site estimate; heterogeneity degree; L-variation coefficient; Gini Index.

1 Introduction

- 25 Regional hydrological frequency analysis (RHFA) is needed to estimate extreme hydrological events when no hydrological data are available at a target site or to improve at-site estimates especially for short data records (e.g. Burn and Goel, 2000; Requena et al., 2016). This is done by transferring information from hydrologically similar gauged sites. Delineation of homogeneous regions is a basic step for the application of a number of regional procedures such as the well-known index-flood method (Dalrymple, 1960; Chebana and Ouarda, 2009). Such a method employs information from sites within a given
- 30 homogeneous region to estimate required quantiles at a given target site. The heterogeneity concept has been considered in a

Deleted: Regional frequency analysis needed to estimate hydrological quantile ungauged sites or to improve estimates a sites with short record lengths, by transferring information from gauged sit

Deleted: Thus, the application of both measures is recommended in practice.

number of fields, including ecology, geology and information sciences (e.g. Li and Reynolds, 1995; Mays et al., 2002; Wu et al., 2008). However, the present paper focuses on the heterogeneity concept in hydrology derived from 'regional homogeneity'. In this regard, regional homogeneity is often defined as the condition that floods at all the sites in a region have the same probability distribution except for a scale factor (e.g. Cunnane, 1988).

- In order to delineate homogeneous regions, numerous studies have proposed and compared similarity measures entailing climatic (e.g. mean annual rainfall), hydrologic (e.g. mean daily flow), physiographic (e.g. drainage area) and combined descriptors (see Ali et al., 2012 and references herein) to be used as input to statistical tools for grouping sites. The selection of these descriptors is carried out by stepwise regression, principal components or canonical correlation, among others (e.g. Brath et al., 2001; Ouarda et al., 2001; Ilorme and Griffis, 2013). Known statistical tools, such as cluster analysis, or new
- 10 approaches, such as the affinity propagation algorithm, are considered to form homogeneous regions based on the previously identified similarity measures (e.g. Burn, 1989; Ouarda and Shu, 2009; Ali et al., 2012; Wazneh et al., 2015). For further references on regional flood frequency analysis, please see Ouarda (2013), Salinas et al. (2013) and references herein. Moreover, many tests have been introduced and compared throughout the literature to decide whether a given delineated region can be considered as homogenous (e.g. Dalrymple, 1960; Wiltshire, 1986; Scholz and Stephens, 1987; Chowdhury et al. (2013).
- al., 1991; Fill and Stedinger, 1995; Viglione et al., 2007). The homogeneity test proposed by Hosking and Wallis (1993) is usually utilised. In this test the statistic *H* is related to the variability of the at-site L-variation coefficient (L-CV) over a region (e.g. Alila, 1999; Burn and Goel, 2000; Castellarin et al., 2001; Shu and Burn, 2004; Smith et al., 2015). In practice, apart from determining if a region can be considered as homogeneous by making a yes/no binary decision (e.g. Warner, 2008) generally based on a significance test, the quantification of the degree of heterogeneity is also necessary.
- 20 Heterogeneity measures are required for such a task. Two approaches can be considered in this regard: (i) the use of heterogeneity measures for determining the effect of the departure from the homogeneous region assumption on the quantile estimate; and (ii) the use of heterogeneity measures for ranking regions according to their degree of heterogeneity. Regarding the former, quantifying the degree of heterogeneity provides a notion of the inaccuracy incurred through the estimation of quantiles by a regional method, for which homogeneous regions are assumed but a 'non-perfect' homogeneous region is
- 25 used. This approach has already been studied, being closely related to the homogeneity test notion (e.g. Hosking and Wallis, 1997; Wright et al., 2014), which is further explained below. The second approach corresponds to the focus of the present paper. Through this second approach, different regional below.

delineation methods can be properly compared to identify the best one. This will be the method delineating the 'most homogeneous region'. Also, heterogeneity measures can be helpful in ranking potential homogeneous regions formed by

30 removing discordant sites. By analogy with distribution selection (e.g. Laio et al., 2009), the concept of heterogeneity measure considered here plays the role of a 'model selection criterion', such as the Akaike Information Criterion (Akaike, 1973); whereas the homogeneity test plays the role of a 'goodness-of-fit test'. The former ranks delineated regions by providing unambiguous results to identify the best one in terms of heterogeneity; whereas the latter indicates if the given region can be considered as homogeneous or not.

In relation to the use of heterogeneity measures as a proxy for quantile error (approach (i)), the test statistic H is indeed considered by Hosking and Wallis (1993) as a heterogeneity measure for which given thresholds are established. These thresholds are obtained as a trade-off between quantile error due to regional heterogeneity and gain obtained by considering the whole regional information instead of that of a sub-region or at-site data. Therefore, instead of providing a binary

- 5 decision based on a given significance level (α), e.g. reject the region as homogenous when H > 1.64 for α = 5%; as a more general guideline the region is considered as 'acceptably homogeneous' if H < 1, 'possibly heterogeneous' if 1 ≤ H < 2 or 'definitely heterogeneous' if H ≥ 2. Recently, Wright et al. (2015) compared the performance of five statistics in this regard: the three L-moment-based statistics of Hosking and Wallis (1993) and two non-parametric statistics, the Anderson-Darling and the Durbin-Knott test statistic.</p>
- 10 A number of studies have proposed and compared methods in which different combinations of similarity measures and/or statistical tools are considered for delineating regions (references below). As a consequence of the non-availability of a well-justified heterogeneity measure for comparison purposes (approach (ii)), studies usually consider measures based either on *H* or on errors from the quantile estimate step. Shu and Burn (2004) utilised the percentage of (initially) homogeneous regions and the mean of *H* over regions obtained by each considered method for distinguishing the best one. Farsadnia et al. (2014)
- 15 identified the best grouping method among those analysed as that leading to the lowest number of 'possibly homogeneous' and 'heterogeneous' regions according to *H*. Ilorme and Griffis (2013) used an *H* weighted average regarding the data length of each region to compare regions obtained by removing discordant sites based on different criteria. However, *H* is not well-defined for ranking regions according to their heterogeneity degree, as it possesses several drawbacks. First, it is originally built as a significance test. Thus, its value depends on specific assumptions that may not be
- 20 fulfilled in practice, such as assuming a regional kappa distribution that even though flexible may not characterise the data. Second, it may entail negative values for particular situations, which may distort results making difficult the suitable ranking of regions. Third, it is affected by the number of sites in the region, tending to obtain small heterogeneity values for small regions even if they are not homogeneous (Hosking and Wallis, 1997, page 66-67). This tends to complicate comparison among regions with different sizes.
- 25 Instead of using measures based on *H*, other studies quantified the performance of different delineating methods by comparing quantile errors (e.g. Castellarin et al., 2001; Ouali et al., 201<u>6</u>). However, the latter approach implies performing the last step of a regional analysis (i.e. quantile estimation) when dealing with an initial step (i.e. region delineation); which involves additional calculations, uncertainty due to the assumption of a given parent distribution for the data and a non direct assessment of the delineation method. A different approach was recently proposed by Viglione (2010) and Das and Cunnane
- 30 (2011) regarding the use of the confidence intervals for L-CV to assess heterogeneity, for which details are given in Sect. 3. Therefore, a general framework is needed to allow defining and assessing desirable properties of a heterogeneity measure in the regional hydrological context in order to properly identify a suitable measure. Such a measure should overcome the aforementioned drawbacks: it should be free of assumptions, positive, and not affected by region size, Furthermore, the use of a heterogeneity measure should allow direct comparison of the heterogeneity of regions delineated by different methods.

Deleted: 5

Deleted:

Deleted: and focused on the delineati

Indeed, it should allow ranking the heterogeneity degree of several regions to identify 'the most homogeneous region' or to assess the effect of some sites on the 'heterogeneity degree' of the region. In the present paper, such a framework is proposed under an evaluation of the heterogeneity measures based on Monte Carlo simulations. Several measures extracted from literature in hydrology and other fields are presented and/or adapted to be assessed as well-justified heterogeneity measures. The present paper is organised as follows. The procedure for the assessment of a heterogeneity measure is presented in Sect. 2. The heterogeneity measures considered to be checked by the proposed procedure are introduced in Sect. 3. Results of the assessment are illustrated in Sect. 4. Discussion of results is presented in Sect. 5. An illustrative application is shown in Sect. 6 and conclusions are summarised in Sect. 7.

Deleted: 6

Deleted: Also

2 Assessment of a heterogeneity measure

- 10 A simulation-based procedure consisting of four steps is proposed to study the behaviour of a given heterogeneity measure (generically denoted Z) regarding its desirable properties in the regional hydrological context. The steps of the procedure are: (i) sensitivity analyses of varying factors involved in the definition of a region; (ii) success rate in identifying the most heterogeneous region; (iii) evolution of the variability for the Z average with respect to the degree of regional heterogeneity; and (iv) effect of discordant sites. The first step is applied to all the considered heterogeneity measures (presented in Sect. 3),
- 15 while the remaining steps are applied to those not entailing unacceptable results from the first step. Some elements of the procedure are inspired and adapted from studies where different aims were sought (e.g. Hosking and Wallis, 1997; Viglione et al., 2007; Chebana and Ouarda, 2007; Castellarin et al., 2008; Wright et al., 2015).

2.1. Synthetic regions

5

Before further describing the aforementioned steps and desirable properties, elements of the framework needed for 20 performing the assessment procedure are presented. The procedure is based on synthetic regions generated through Monte 20 Carlo simulations from a representative <u>flood</u> parent distribution commonly used in frequency analysis, the Generalised 21 Extreme Value (GEV) distribution. A region is defined by its number of <u>gauging</u> sites (*N*), at-site data length (*n*), regional 22 average L-CV (τ^R), regional average L-skewness coefficient (τ_3^R) and a unit regional sample mean. The heterogeneity of a 23 given region may be due to differences in any feature of the at-site frequency distribution among sites. In particular the L-

- 25 CV, which is a dimensionless measure of the dispersion of the distribution that is also related to the slope of the associated flood frequency curve, has been considered as representative of such differences (e.g. Stedinger and Lu, 1995; Viglione, 2010). In the present study, heterogeneous regions are simulated using the heterogeneity rate γ , defined as $\gamma = (\max_i(\tau^i) - \min_i(\tau^i))/\tau^R$ (e.g. Hosking and Wallis, 1997; Das and Cunnane, 2012), where τ^i is the L-CV at site *i* with *i* = 1, ..., *N*. Since in practice large values of the L-skewness coefficient (τ_3) are related to large values of the L-CV τ (Hosking and
- 30 Wallis, 1997, page 68), the same heterogeneity rate of τ is considered for τ_3 . A region is defined as homogeneous for $\gamma = 0\%$, implying that τ^i and τ^i_3 are the same for all the sites in the region (i.e. $\tau^i = \tau^R$ and $\tau^i_3 = \tau^R_3$). The heterogeneity of a given

region increases as γ increases from 0% to 100%. This implies that τ^i and τ_3^i vary linearly. We then have for the first site $\tau^1 = \tau^R - \tau^R \gamma/2$ and for the last site $\tau^N = \tau^R + \tau^R \gamma/2$. The same can be written for τ_3^i . Note that this relation is commonly used in other studies (e.g. Hosking and Wallis, 1997; Wright et al., 2015) as a plausible way of simulating varying conditions over a region.

- 5 Finally, a given region consists of at-site data generated from a GEV distribution with parameters obtained through at-site Lmoments. At-site data are standardised by their sample mean to frame them in the regional context (e.g. Bocchiola et al., 2003; Requena et al., 2016). Note that heterogeneity measures directly based on L-moments lead to the same results for standardised or non-standardised data. A region with N = 15, n = 30, $\tau^R = 0.2$ and $\tau^R_3 = 0.2$ is considered as a reference for the simulation study. Hereafter, the value of τ_3 is (usually) omitted, as τ_3 is considered to have the same value as τ . The number
- 10 of simulations N_S of a given region is taken to be equal to 500, which is considered large enough to obtain robust results. These fixed values of the factors, as well as their varying values used below, are selected according to the literature and with the aim of providing a general view of the behaviour of the measures without excessively complicating the simulation study. It is important to highlight that the use of simulated data in the assessment of new techniques in regional frequency analysis is a very well established approach and it has been used in a number of publications (e.g. Hosking and Wallis, 1997; Seidou
- 15 et al., 2006; Chebana and Ouarda, 2007). Indeed, this is the only way to deal with issues related to data quality.

2.2. Sensitivity analyses

The first step of the assessment of a heterogeneity measure Z is the analysis of the effect of varying factors involved in the definition of a region. This step is performed through sensitivity analysis to identify if the behaviour of Z is acceptable in relation to what is ideally expected from a heterogeneity measure.

- 20 Effect of the heterogeneity rate: The degree of heterogeneity of a region is the aimed value to be quantified by Z. A surrogate of such a degree of regional heterogeneity is the heterogeneity rate γ , which is used to initially define the heterogeneity of the simulated region to be evaluated by Z. Hence, Z should increase with γ . This analysis is performed by obtaining Z for $\gamma = 0\%$, 10%, ..., 90%, 100% over $N_{\rm S} = 500$, keeping the remaining values of the reference region (i.e. N = 15; n = 30; $\tau^{R} = 0.2$).
- 25 Effect of the number of sites: The size of a region, represented by the number of sites N, is a relevant factor to the degree of its heterogeneity. A large N is required to properly estimate quantiles associated with high return periods, as more data are available; yet homogeneous regions are more difficult to obtain for large N due to more potential dissimilarities between sites (Ouarda et al., 2001; Chebana and Ouarda, 2007). Nevertheless, by definition Z should not be affected by N, as it should provide the same results for regions with a different size but the same degree of heterogeneity. Therefore, the smaller
- 30 is the influence of N on Z the better Z is. This analysis is performed by obtaining Z for N = 5, 10, 15, 20, 25, 30, 40, 50, 60, 70 over $N_{\rm S} = 500$, keeping the remaining values of the reference region (i.e. n = 30; $\tau^R = 0.2$). Two different values of the

heterogeneity rate ($\gamma = 0\%$ and 50%) are also considered to identify if the behaviour of Z changes depending on the degree of heterogeneity.

Effect of the regional average L-moment ratios: Z should ideally provide similar results for regions entailing the same degree of heterogeneity, regardless of the values of τ^R and τ_3^R , in order to provide an appropriate comparison and ranking of

- 5 the regions. For instance, two regions with sites generated from a different τ^R value but considering the same value $\gamma = 0\%$ should entail similar Z values, as both are 'perfectly' homogeneous. However, such an output may not be easy to obtain due to the fact that τ^R is associated with a measure of dispersion. Thus, the smaller the influence of τ^R and τ_3^R on Z the better Z will be. This analysis is performed by comparing the results of $\tau^R = 0.2$, which is related to the reference region, with those obtained by $\tau^R = 0.4$. It is done by varying the heterogeneity rate γ and by varying the number of sites N. Recall that τ_3^R is
- 10 considered to have the same value as τ^{R} .

Effect of the record length: The amount of available at-site information, represented by the data length n, is associated with the accuracy of the value of Z. The longer n is the better will be the information provided by each site to determine the regional degree of heterogeneity. Therefore, the analysis of the effect of n should be focused on identifying the minimum n required to obtain reliable values of Z. This analysis is performed by obtaining Z for n = 10, 20, ..., 90, 100 over $N_{\rm S} = 500$,

15 keeping the remaining values of the reference region (i.e. N = 15; $\tau^R = 0.2$). Two different values of the heterogeneity rate ($\gamma = 0\%$ and 50%) are also considered to identify if the behaviour of *Z* changes depending on the degree of heterogeneity.

2.3. Success rate

The second step in the assessment of Z is the evaluation of its success rate (SR) for identifying the most heterogeneous region. Note that the SR notion is commonly used in a number of fields such as biology (e.g. Canaves et al., 2004). Without

- 20 loss of generality, such an evaluation is performed on two regions A and B. For $\gamma_A < \gamma_B$, *SR* is defined as the ratio of the number of samples simulated from a given region A and a given region B, for which *Z* correctly identifies γ_B as the most heterogeneous region, to the total number of simulated samples. Thus, the larger *SR* is the better *Z* will be. The aim is to verify the ability of *Z* to compare regions with different degrees of heterogeneity, when entailing or not different characteristics (i.e., $\tau^A \neq \tau^B$ or $\tau^A = \tau^B$, and $N_A \neq N_B$ or $N_A = N_B$). A large set of 48 cases is considered to obtain a wide
- 25 view of the behaviour of Z, as combination of the following factor values: $\gamma_A = 0\%$, 30%, 50%, 70% with $\gamma_B = \gamma_A + 10\%$, $\gamma_A + 20\%$, $\gamma_A + 30\%$; $N_A = N_B$, $N_A \neq N_B$ (for N = 10, 25); $\tau^A = \tau^B$, $\tau^A \neq \tau^B$ (for $\tau^R = 0.1, 0.2, 0.3, 0.4$) over $N_S = 500$, keeping the remaining values of the reference region (i.e. n = 30).

2.4. Evolution of the variability for the Z average with respect to the degree of regional heterogeneity

The third step of the assessment of Z is the analysis of the evolution of the variability of the average value of Z as a function of the degree of regional betargeoretic. The sim is to determine the consolities of Z to convertely rank regions according to

30 of the degree of regional heterogeneity. The aim is to determine the capability of Z to accurately rank regions according to their degree of heterogeneity when it is summarised as an average of the Z values obtained for several (sub)regions that are

obtained by a given delineation method. This provides an assessment of its capability to compare results from several delineation methods. This is a twofold analysis. Firstly, a monotonic relation should exist between the average Z and the degree of heterogeneity, as explained in Sect. 2.2. Secondly, the variability of the average Z along such a monotonic relation should be small enough to not affect a proper ranking of the regions.

- 5 We consider two regions A and B, without loss of generality. The idea is that (sub)regions delineated by a given method should theoretically entail different τ^R values ($\tau^A \neq \tau^B$), having similar or different values of other characteristics (i.e. $N_A \neq N_B$ or $N_A = N_B$). In order to be able to evaluate the behaviour of the *Z* average, the same degree of heterogeneity is considered for both regions ($\gamma_A = \gamma_B = \gamma$), as under this assumption *Z* values should be similar. The procedure is the following: $N_S = 500$ simulated regions A and B with $\gamma_A = \gamma_B = \gamma$ and given values N_A , τ^A and N_B , τ^B are generated, obtaining for each simulation
- 10 the average of Z over the two regions. These averages are aggregated into their mean value over Ns as representative value. The representative value is obtained for 22 cases as a result of combining: $N_A = 10, 25$; $N_B = 10, 25$; and $\tau^R = 0.1, 0.2, 0.3, 0.4$ with $\tau^A \neq \tau^B$, keeping the remaining values of the reference region (i.e. n = 30). Then, the variability of the set of representative values of the Z average is analysed through a boxplot for the given γ . The aforementioned procedure is performed for each $\gamma = 0\%, 10\%, ..., 90\%, 100\%$, obtaining a boxplot for each γ value. For a given γ , Z is better as the
- 15 variability of the corresponding set of representative values is smaller, since similar values of Z should be expected due to γ_A = γ_B . Then, Z is better as the interquantile range is shorter, where the interquantile range is the box of the boxplot. For varying γ , Z is better as it does not imply overlapping of the interquantile ranges for different γ values, which leads to a more appropriate ranking of the regions.

2.5. Effect of discordant sites

- 20 The fourth step of the assessment of Z is the analysis of the effect of discordant sites in a region. The aim is to check the capability of Z to show a progressive variation of its value as a consequence of a progressive change in the degree of regional heterogeneity, induced here by replacing given 'homogeneous' sites by given 'discordant' sites in a region. Both the effect of the 'nature' of the discordant sites, characterised by the L-CV τ^d and L-skewness coefficient τ_3^d of their parent distribution, and the effect of the number of such discordant sites (k) are considered.
- The procedure is described below. Note that the values of the factors used in this section are selected to facilitate the graphical representation. Thus, a homogeneous region (i.e. $\gamma = 0\%$) with N = 20, $\tau^R = 0.25$ and n = 30 is considered as the initial region. Then, k of its sites (with k = 1, ..., N/2) are replaced by k discordant sites belonging to a parent distribution characterised by τ^d , with $\gamma_d = 0\%$ within the group of discordant sites. The analysis is performed for $\tau^d = 0.1, 0.2, 0.25, 0.3, 0.4$. Remark that $\tau^R = 0.25$ is considered for the homogeneous region so that the discordant sites are not 'discordant' at the
- 30 midpoint of the range used for τ^d (i.e. at $\tau^R = \tau^d = 0.25$). The procedure is repeated for $N_s = 500$ simulations of the initial homogeneous region, estimating a mean value of Z over Ns for each (τ^d , k) pair. For the region formed by 'homogenous' and 'discordant' sites, named as mixed region, Z is expected to be larger for larger k values. Indeed, a larger number of

Deleted: 1

discordant sites in the region should increase the degree of regional heterogeneity. Also, Z is expected to be larger as the difference between τ^R and τ^d gets larger, since the addition of sites with a 'larger discordance' should increase the degree of regional heterogeneity. On the other hand, for the sub-region formed by the sites belonging to the initial homogeneous region, Z is expected to keep the same values regardless of the value of k, which in this case is the number of initial sites removed. The degree of regional heterogeneity should be relatively constant in this case, since all the sites belong to the same initial homogeneous region. Note that a mixed region can be seen as a sort of bimodal region used in other studies (e.g. Chebana and Ouarda, 2007).

3 Heterogeneity measures

5

The aim of this section is to present and develop heterogeneity measures based on different approaches to be assessed by the procedure proposed in Sect. 2. Heterogeneity measures are selected as a result of a general and comprehensive literature review in a number of fields including hydrology. We can distinguish three types of measures: (a) known in RHFA; (b) derived from recent approaches in RHFA; and (c) used in other fields and adapted here to the regional hydrological context. Therefore, a total of eight measures are considered.

3.1. Measures known in RHFA

15 The first group consists of the well-known statistics *H*, *V*, *H*₂ and *V*₂ (Hosking, 2015), as well as the k-sample Anderson-Darling (*AD*) statistic (Scholz and Stephens, 1987; Scholz and Zhu, 2015).

Even though H is not properly defined as a heterogeneity measure for ranking the degree of heterogeneity of several regions (see Sect. 1), it is considered in this study because it is commonly adopted in regional analysis. As the aim of this study is to provide a general heterogeneity measure, its associated distribution-free statistic V is also considered. Specifically, V is a statistic of the dispersion of the sample L-CV t in a region, expressed as:

$$V = \sqrt{\frac{\sum_{i=1}^{N} n_i (t^i - t^R)^2}{\sum_{i=1}^{N} n_i}},$$
(1)

with

20

$$t^{R} = \frac{\sum_{i=1}^{N} n_{i} t^{i}}{\sum_{i=1}^{N} n_{i}},$$
(2)

where t^i is the sample L-CV at site *i* and t^R is its associated regional average. *H* is a measure of the variability of *t* in the region compared with that expected for simulated homogeneous regions. It is built by normalising *V* by its mean μ_V and standard deviation σ_V :

$$H = \frac{V - \mu_V}{\sigma_V},\tag{3}$$

where μ_V and σ_V are obtained from $N_{\rm H} = 500$ simulated homogeneous regions with the same *n* and *N* as the given region, generated from a kappa distribution fitted to the regional average L-moment ratios.

The extensions of V and H by considering not only t but also the sample L-skewness coefficient t_3 , traditionally known as V_2 and H_2 , are also included in this study. Their inclusion is motivated by recent results regarding the usefulness of H_2 for testing homogeneity when considering different thresholds from those of H (Wright et al., 2014):

5

$$V_2 = \frac{\sum_{i=1}^{N} n_i \sqrt{\left(t^i - t^R\right)^2 + \left(t_3^i - t_3^R\right)^2}}{\sum_{i=1}^{N} n_i},\tag{4}$$

$$H_2 = \frac{V_2 - \mu_{V_2}}{\sigma_{V_2}},$$
(5)

where t_3^i is the sample L-skewness coefficient at site *i* and t_3^R is its associated regional average. t_3^R is defined analogous to t^R in Eq. (2). In order to avoid results conditioned on the given value of t^R and t_3^R , *V* and V_2 are standardised here by their regional values, defining *V'* and V_2' respectively as:

$$V' = \sqrt{\frac{\sum_{i=1}^{N} n_i \left(\frac{t^i - t^R}{t^R}\right)^2}{\sum_{i=1}^{N} n_i}}$$
(6)

$$V_{2}' = \frac{\sum_{i=1}^{N} n_{i} \sqrt{\left(\frac{t^{i} - t^{R}}{t^{R}}\right)^{2} + \left(\frac{t_{3}^{i} - t_{3}^{R}}{t_{3}^{R}}\right)^{2}}}{\sum_{i=1}^{N} n_{i}}$$
(7)

The *AD* statistic, which is a rank-based statistic based on comparing the at-site empirical distributions with the pooled 10 empirical distribution of the data, is also included in this first group:

$$AD = \frac{1}{M} \sum_{i=1}^{N} \frac{1}{n_i} \sum_{j=1}^{M-1} \frac{\left(Mm_{ij} - jn_i\right)^2}{j(M-j)},\tag{8}$$

where $M = \sum_{i=1}^{N} n_i$ and m_{ij} is the number of observations in the *i*th sample not greater than y_j , where $y_1 < \cdots < y_M$ is the pooled ordered sample of the data, which in the regional context entails considering the data of each site first divided by its corresponding mean and then ordered. The *AD* statistic has already been considered in several studies. Viglione et al. (2007) assessed its behaviour as a homogeneity test statistic, recommending its use when $t_3^R > 0.23$. Wright et al. (2015) evaluated

15 its performance as a heterogeneity measure regarding its ability to be a surrogate of the quantile error, yet obtaining a weak performance partially attributed to a possible influence of the procedure used for estimating errors.

3.2. Measures derived from recent approaches in RHFA

variability or to regional heterogeneity.

5

25

The second group is represented by a measure derived from a relatively novel approach in which the confidence interval for the at-site L-CV t^i (with *i*: 1,...N) is estimated and compared with t^R . The focus is to evaluate how often the latter is included in such confidence intervals in order to assess if differences between t^i and t^R can be attributed to sample

Viglione (2010) proposed a procedure for obtaining the confidence interval for L-CV without considering a given parent distribution of the data, applying it to a didactic illustration for comparing several regional approaches. The procedure is summarised below: the variance of the sample L-CV *t*, var(*t*), is estimated according to Elamir and Scheult (2004) which is

- 10 implemented in Viglione (2014); simple empirical corrections are applied on t and var(t) based on the values of t_3 and n; and the confidence interval for t is then obtained from a log-Student's distribution considering corrected values of t and var(t). For instance, for a 90% confidence interval, a region is considered as heterogeneous if $100 - (P_{05} + P_{95}) \ll 90\%$, where P_{05} (P_{95}) is the percentage of sites for which t^R is below (above) the confidence interval for t^i . The larger $(P_{05} + P_{95})$ is, the larger the regional heterogeneity will be. Das and Cunnane (2011) obtained such a confidence interval based on simulations
- 15 from a GEV distribution, with the aim of evaluating if a usual method to select catchment descriptors for delineating regions in Ireland provided homogeneous regions. The number of sites for which t^R is outside the t^i confidence intervals is considered as a measure of heterogeneity, also expressed as a percentage of sites.

In the present study, the heterogeneity measure considered regarding this approach is named as P_{CI} and defined as the total percentage of sites in the region for which t^R is outside the 90% confidence interval for t^i . As the parent distribution of the

20 data is unknown in practice, such a confidence interval is estimated following the aforementioned distribution-free approach.

3.3. Measures used in other fields and adapted here to the regional hydrological context

The last group consists of the Gini index (*GI*) (Gini, 1912; Ceriani and Verme, 2012), which is a measure of inequality of incomes in a population commonly used in economics; and of a measure based on the entropy-based Kullback-Leibler (*KL*) divergence (Kullback and Leibler, 1951), which estimates the distance between two probability distributions and is used for different purposes in a number of fields including hydrology (e.g. Weijs et al., 2010).

The definition of the *GI* is usually given according to the Lorenz curve (Gastwirth, 1972), but it can be expressed in other ways. Specifically, the sample *GI*:

$$GI = \frac{\sum_{i=1}^{n} \sum_{j=1}^{n} |x_i - x_j|}{2n^2 \mu},\tag{9}$$

corrected for short sample sizes can be defined as (Glasser, 1962; Zeileis, 2014):

$$GI = \frac{\sum_{i=1}^{n} (2i - n - 1)x_{i:n}}{n(n - 1)\mu},$$
(10)

where $x_{i:n}$ are the sample order statistics and μ is their mean. Theoretically, *GI* ranges from zero to one. The former is obtained when all the x_i values are equal, and the latter is given when all but one value equals zero (in an infinite population). Note that <u>although *GI* has not been directly applied to hydrology, it</u> is connected with the <u>well-known L</u>-moments which do. Both are based on sample order statistics. Indeed, $GI = GMD/2\mu$ (for $\mu > 0$), where *GMD* is the Gini's mean difference statistic (Yitzhaki and Schechtman, 2012); and $GMD = 2l_2$, where l_2 is the second sample L-moment

(Hosking and Wallis, 1997). Hence, GI corrected for short samples corresponds to the sample L-CV t (Hosking, 1990), which implies that if GI is applied on the flood observations at site i, the result is t^i . Then, in order to adapt GI to the regional hydrological context, in this study GI is applied on t^i over sites. This provides a value of the inequality or variability of the at-site L-CV t^i in the region, and hence it can be seen as a measure of the heterogeneity of the region. Therefore, the measure considered in this study is $GI(t^i, i = 1, ..., N)$:

10

15

5

$$GI = \frac{\sum_{i=1}^{N} (2i - N - 1)t_{i:n}}{N(N - 1)\overline{t}},$$
(11)

where $t_{i:n}$ are the sample order statistics, \bar{t} is their mean, and the number of sites N corresponds to the data length of t. Note that $GI(t^i, i = 1, ..., N)$ is equivalent to $t(t^i, i = 1, ..., N)$. Also, note that this is somehow analogous to the approach based on moments used in early studies (e.g. Stedinger and Lu, 1995), where the coefficient of variation ($Cv = \sigma/\mu$) of the coefficient of variation of the data (i.e. $Cv(Cv^i, i = 1, ..., N)$) was used for building simulated regions; defining homogeneous regions for $Cv(Cv^i) = 0$ and extremely heterogeneous regions for $Cv(Cv^i) \ge 0.4$.

The KL divergence (so-called relative entropy) of the probability distribution P with respect to Q is defined as:

$$KL(P||Q) = \int p(x)\ln[p(x)/q(x)] dx$$
(12)

where p and q are the density functions. The expression related to the discrete case is the following (e.g. Hausser and Strimmer, 2009)

$$KL(P||Q) = \sum_{m} P_m \ln\left(\frac{P_m}{Q_m}\right)$$
(13)

for which nonparametric versions of the probabilities P and Q may be considered, such as a kernel density function, in order 20 to avoid subjectivity in selecting a given parametric probability distribution. KL_{ij} can then be defined as the KL divergence of the probability distribution at site *i* with respect to the probability distribution at site *j*, where $KL_{ij} \neq KL_{ji}$. The dissimilarity matrix of the region is obtained by computing the KL divergence between sites as:

Deleted: as b

Deleted: I

Deleted: , providing Deleted: measure Deleted: , Deleted: ,

$$D_{KL} = \begin{pmatrix} KL_{11} & \dots & KL_{1N} \\ \vdots & KL_{ij} & \vdots \\ KL_{N1} & \dots & KL_{NN} \end{pmatrix}$$
(14)

The degree of regional heterogeneity is then evaluated by $||D_{KL}||$, which in this study is considered as the absolute column sum normalized norm:

$$\|D_{KL}\| = \frac{\max_j \sum_i |KL_{ij}|}{N}$$
(15)

4 Results

Simulation results obtained by the application of the proposed assessment procedure (Sect. 2) to the considered

5 heterogeneity measures (Sect. 3) are presented in this section. Note that a summary of the results obtained from each step is presented in Table 1.

4.1. Sensitivity analyses

Results of the effect of varying factors defining a region (Sect. 2.2) are presented through boxplots and mean values of the heterogeneity measure over Ns = 500 simulations of the corresponding region, in order to show complete information.

10 Results for $\tau^R = 0.2$ refer to those related to the reference region. Figure 1 shows that all the considered measures show a good behaviour regarding the heterogeneity rate γ , as their values increase with γ . This dependence is less pronounced for H_2 and V'_2 , which are the measures that depend on both t and t_3 ; and for AD and $||D_{KL}||$, which are based on the whole information.

The effect of N on the considered measures is shown for $\tau^R = 0.2$ when $\gamma = 0\%$ (i.e. 'perfect' homogeneous regions) and $\gamma =$

15 50% in Figs. 2 and 3, respectively. In both cases, it is found that V', V'_2 , P_{CI} and GI are not affected by N, although they show some departure from their constant Z mean value and a larger variability (i.e. larger box) when $N \le 10$. In this regard, Das and Cunnane (2012) also found an effect for N < 10 on quantile error measures (considering n = 35). In general this effect is less marked for GI when $\gamma = 0\%$ (Fig. 2c,d) and for V' and V'_2 when $\gamma = 50\%$ (Fig. 3a,b).

It is also found that results for H, and to a lower degree for H_2 , change depending on the value of γ . Both measures behave 20 correctly for $\gamma = 0\%$ (Fig. 2a,b); yet they depend on N for $\gamma = 50\%$ (Fig. 3a,b). This is likely due to the nature of H and H_2 as homogeneity test statistics. Note that this undesirable effect increases as γ increases (e.g. Fig. 4). $||D_{KL}||$ does not behave correctly neither for $\gamma = 0\%$ nor $\gamma = 50\%$, as it depends on N. The same holds for AD, for which such dependence is higher. The influence of varying regional average L-moments is shown by comparing the Z mean values for $\tau^R = 0.4$ with those previously obtained for $\tau^R = 0.2$. Z mean values varying γ are displayed in Fig. 1b,d. In this regard, V'_2 and AD are shown not

25 to be suitable, as results for $\tau^R = 0.2$ and $\tau^R = 0.4$ varying γ are far from each other. H and H₂ work worse for higher degrees

of regional heterogeneity than for smaller ones; whereas V', GI and $||D_{KL}||$ show the opposite behaviour with an overall better performance of V' and GI. P_{CI} presents a favorable similar behaviour for both small and high γ . Results for Z mean values varying N are displayed for $\gamma = 0\%$ in Fig. 2b,d; and for $\gamma = 50\%$ in Fig. 3b,d. In both cases V'_2 and AD present a similar bad behaviour to the one shown in Fig. 1b,d. A suitable behaviour is found for V', P_{CI} and GI for $\gamma = 50\%$, while a worse behaviour is found for H, H_2 and $||D_{KL}||$ (Fig. 3b,d). Such a behaviour of H, H_2 and $||D_{KL}||$ is also shown for $\gamma = 0\%$

- 5 worse behaviour is found for H, H_2 and $||D_{KL}||$ (Fig. 3b,d). Such a behaviour of H, H_2 and $||D_{KL}||$ is also shown for $\gamma = 0\%$ (Fig. 2b,d), for which the remaining measures also present similar bad results. In this regard, it is important to remark that no 'perfect' homogeneous regions exist in reality (Stedinger and Lu, 1995). And that according to the practical threshold H < 2, commonly used for considering a region as homogeneous enough to perform a regional analysis, even regions with $\gamma = 50\%$ may be taken as homogenous in practice (see values of H for γ in Fig. 1a). Hence, for the purpose of the assessment of the 10 regional heterogeneity degree, the behaviour of the measures for $\gamma = 50\%$ is more relevant than for $\gamma = 0\%$.
- Finally, the effect of varying the record length *n* for $\gamma = 0\%$ and $\gamma = 50\%$ is shown in Fig. 5. Recall that it is expected that increasing *n* affects *Z*, as more information of the at-site distributions is available in such a case. In this regard, it is found that the measures *H*, *H*₂, *AD* and *P*_{CI} are not (or slightly) affected by *n* when $\gamma = 0\%$, but they highly increase their values as *n* increases when $\gamma = 50\%$. Whereas *V'*, *V'*₂, *GI* and $||D_{KL}||$ are affected by *n* when $\gamma = 0\%$; becoming less affected when $\gamma =$
- 15 50%, by decreasing less their values as *n* increases. As a result, V'and *GI* are the only measures that become relatively stable for a given data length. Such a data length is around n = 30, which is a value usually considered in practice (e.g. Hosking and Wallis, 1997, page 134; Chebana and Ouarda, 2009). It can be mentioned that for a very small data length (n = 10), the approximation used in P_{CI} for estimating var(*t*) was not reliable. Nevertheless, this issue is not relevant since such a data length is too short to be considered in practice, and such values do not affect the overall interpretation of the results.
- 20 As a result of the aforementioned sensitivity analyses (see Table 1 for a summary), V', P_{CI} and GI are considered as potentially suitable heterogeneity measures. Thus, the following steps of the assessment procedure are only applied to these measures. Results of H are also included for comparison purposes.

4.2. Success rate

The ability of the measures to identify the most heterogeneous region between two regions A and B is shown via the success 25 rate *SR* (Sect. 2.2). A summary of the results obtained for $\tau^{A} = \tau^{B}$ and $\tau^{A} \neq \tau^{B}$ (with $\gamma_{A} < \gamma_{B}$), when considering several values of *N* and γ for each region is displayed in Table 2 to facilitate their interpretation. Note that each combination τ^{A} vs. τ^{B} corresponds to a total of 48 cases obtained by varying *N* and γ . Results for a small difference between τ^{R} values, characterised by $\tau^{A} = 0.2 \neq \tau^{B} = 0.3$ and vice versa; and for a large difference, characterised by $\tau^{A} = 0.1 \neq \tau^{B} = 0.4$ and vice versa, are displayed as representative of the behaviour of the measures. Note that the summarised information reflects 30 the main conclusions extracted from the partial results.

The *SR* average is shown as a notion of the overall behaviour of the measures. Recall that the larger *SR* is, the better *Z* will be. When $\tau^{A} = \tau^{B}$ the *SR* average of *H*, *V*' and *GI* are comparable, with *V*' and *GI* leading to the largest values; while *P*_{CI}

Deleted: 2

leads to the lowest ones. When $\tau^A < \tau^B$ the largest *SR* average is obtained for *V'* and is very closely followed by *GI*. Yet, in this case *H* presents a worse behaviour, which is similar to that of P_{CI} . When $\tau^A > \tau^B$ the situation changes, with *H* leading to the largest values. Yet, the difference between the values obtained by *V'* (or *GI*) and *H* is less marked than when $\tau^A < \tau^B$. Note that the larger the difference between τ^A and τ^B is, the larger the difference between the *SR* average of *H* and *V'* (or *GI*).

5 is; whereas the value of P_{CI} remains almost constant. Therefore, although P_{CI} does not obtain the greatest values in any case, it outperforms *H* or *GI* (and *V'*) when $\tau^A \ll \tau^B$ or when $\tau^A \gg \tau^B$, respectively, i.e. for high differences between τ^A and τ^B . The best results for the total *SR* average are obtained by *GI*, followed by *V'*.

The SR minimum and SR maximum are displayed as a notion of the variability of the SR results (Table 2). Results related to the SR minimum are analogous to those obtained by the SR average; giving H an overall worse behaviour. This highlights

- 10 the low ability of *H* to identify the most heterogeneous region in certain circumstances. Note that the overall behaviour of *H* regarding *SR* is partially due to existing trends regarding *N* and τ^R . *H* obtains larger heterogeneity values as *N* increases and as τ^R decreases (as shown in Fig. 3b), entailing an 'unfounded' better behaviour when $\tau^A > \tau^B$ and $N_A < N_B$, and vice versa. Also note that all measures have difficulties obtaining a large *SR* minimum when $\tau^A > \tau^B$. This includes *H* also, even though it obtained a good *SR* average in such a situation. This arises from the fact that, in such a case, the region with the lowest
- 15 degree of heterogeneity (region A) is associated with a larger τ^R entailing a larger sample variability, and complicating its identification as the less heterogeneous region. *SR* maximum values show that even though the maximum difference between γ_A and γ_B considered in the analysis is 30%, all measures obtain (in certain circumstances) a *SR* equal or close to 100%. In summary, *GI* obtains the best results for the *SR* analysis followed by *V'*.

4.3. Evolution of the variability of the Z average with respect to the degree of regional heterogeneity

- 20 The variability of the heterogeneity measures as a function of the degree of regional heterogeneity, represented by γ, is shown in Fig. 6. The boxplot of the 22 representative (mean over Ns = 500) values of Z obtained from cases in which a given region A and a given region B with the same γ but different characteristics are considered is shown for varying values of γ in the *x*-axis (see Sect. 2.4). As expected from the results of Fig. 1, heterogeneity measures in Fig. 6 increase with γ, showing a monotonic positive dependence. Regarding their variability along such a monotonic relation, *H* presents a different
- 25 behaviour from the rest of the measures. It shows a strong increasing variability as γ increases. Then, in this case, *H* overlaps its interquantile ranges from $\gamma = 70\%$ to 100%. This behaviour may imply an unappropriated ranking of the regions with these high values of the heterogeneity rate γ . Indeed, overlapped values cannot be considered significantly different, whereas they correspond to two different γ values. Such behaviour is not seen for the other considered measures. In this regard, an overall favorable larger distance between interquantile ranges is found for *V*', followed by *P*_{CI} and then *GI*. However, the
- 30 four considered measures present an overlapping for $\gamma = 0\%$ and 10%. This may imply an unappropriated ranking of the regions related to these very small values of γ , yet those regions are less common in practice. In summary, V' obtains the best

Deleted: 3

performance for the variability evolution analysis. It presents a small variability for a given γ value; and it almost presents no overlapping between interquantile ranges for varying $\gamma_{\mathbf{v}}$

4.4. Effect of discordant sites

5

The effect of discordant sites (Sect. 2.5) is shown in Fig. 7. The mean values of the heterogeneity measures over Ns = 500 are obtained when replacing k sites (with k = 1,..., 10) in an initially homogeneous region (with N = 20) by k discordant sites belonging to a given parent distribution defined by τ^d . Note that unlike Fig. 1, where the heterogeneity value of two kinds of regions with the same degree of heterogeneity but different regional L-CV may be compared; in Fig. 7 progressive changes in the heterogeneity of a single homogeneous region are assessed. For the mixed region formed by sites from both τ^R and τ^d , the overall results confirm that the considered measures involve larger values of Z for larger k values, as a result of replacing

10 a larger number of discordant sites in the region; and larger values of Z as the difference between τ^R and τ^d increases, as a result of replacing sites with a larger discordance (Fig. 7a).

However, when $\tau^d > \tau^R$ (Fig. 7b) the measures face some difficulties in ranking the degree of heterogeneity for high values of *k*. This is due to the larger sample variability entailed by the discordant sites in such a case, which makes the whole mixed region seem less heterogeneous. Note that this is also the reason of the lack of asymmetry of the results regarding the vertical

- 15 line at the midpoint of the x-axis (i.e. $\tau^d = 0.25 = \tau^R$). Nevertheless, not all measures are equally affected by this issue. *GI* obtains the best results, as for instance it is able to differentiate the degree of heterogeneity for $k \le 8$ when $\tau^d = 0.35$ and 0.4. It is followed by P_{CI} , which behaves properly for $k \le 8$ when $\tau^d = 0.35$ and for $k \le 7$ when $\tau^d = 0.4$; and by V', which obtains adequate results for $k \le 7$ when $\tau^d = 0.35$ and $k \le 6$ when $\tau^d = 0.4$. The worst results are obtained by H, which only behaves properly for $k \le 6$ when $\tau^d = 0.35$ and $k \le 4$ when $\tau^d = 0.4$. Results for the sub-region formed by the remaining (N k) sites
- 20 of the initial homogeneous region (Fig. 7a) support the results in Fig. 2, as *H* and *GI* are practically not affected by the number of sites of the homogeneous region, while V' and P_{CI} present a slight decrease in their heterogeneity values as the number of sites (*N* k) decreases. In summary, *GI* presents the best results for the analysis of discordant sites.

5 Discussion

Overall, GI can be considered as the best heterogeneity measure among all the evaluated measures, closely followed by V'
(see a summary in Table 1). However, as expected, none of the measures are perfect, due to their inability to perfectly fulfill all the desirable properties in practice. GI presents the advantage of being computed as a measure of the standardised mean distance between pairs of tⁱ values. Hence, it does not depend on any assumptions concerning parameters or parent distributions. V' is similar but it specifically depends on the estimate of the regional average t^R, as it compares it to each tⁱ value. Thus, due to the similar but slightly better results obtained by GI and its widely accepted use in other fields, the use of

30 *GI* would be preferable in practice.

Deleted: ¶

Deleted: 4

H is by nature the statistic of a homogeneity test. Hence, it is defined to identify whether a given region can be considered as homogeneous or not, not to compare the heterogeneity degree of several regions. Note that this is also valid for other test statistics (e.g. *AD*). As a consequence of the intrinsic disadvantages of *H* (see Sect. 1) and the obtained results, the use of *H* as a heterogeneity measure for ranking regions is not recommended. The unsatisfactory results obtained for V'_2 and H_2 could

- 5 be related to the way in which *t* and t_3 are combined (see Sect. 3), which may not be appropriate for assessing the degree of regional heterogeneity. The unsuitable results associated with $||D_{KL}||$ could be related to considering the whole information of the data, which may mask the effect of factors favouring heterogeneity. It should be noted that other norms aside from the one in Eq. (15) were considered, but they did not lead to better performances. Further research should focus on the development of a better adaptation of the entropy-based measures to estimate the degree of regional heterogeneity.
- 10 The P_{CI} measure is obtained without assuming a given parent distribution of the data; although it considers a log-Student distribution for estimating the L-CV confidence interval. Also, even though it depends partially on the selected confidence level, mean P_{CI} values over Ns = 500 for different confidence levels (90% and 95%) were found to be highly correlated (not shown). This fact removes subjectivity from the use of P_{CI} as a heterogeneity measure, as for such a purpose only the ranking of values is needed. It is also important to highlight the stable performance of P_{CI} regardless of the value of τ^R . This makes
- 15 P_{CI} outperform *GI* and *V'* for identifying the most heterogeneous region when such a region has a much lower τ^R than others to be compared with (see Table 2). As a consequence, P_{CI} and *GI* could be used together in practice as two different and complementary criteria. This is common in other applications; for instance several criteria are commonly applied when ranking candidate distributions (e.g. the Akaike information criterion and the Bayesian information criterion). It is important to mention that the use of P_{CI} as a homogeneity test in practice may lead to the false rejection of homogeneous regions.
- 20 Indeed, even when a region is 'perfectly' homogeneous ($\gamma = 0\%$) the mean value of P_{CI} may indicate slight heterogeneity (e.g. it is slightly larger than 10% in Fig. 1).

As indicated in Sect. 1, the heterogeneity measures selected in this study may be used for the assessment of the degree of heterogeneity of regions obtained through the use of different delineation methods. When a region is divided into several sub-regions by a given delineation method, the GI (or P_{CI}) value can be evaluated at each sub-region. Then, the average

- 25 value can be used to compare several delineation methods applied on the given region. The best delineation method will be the one with the lowest GI (or P_{CI}) value for the region of study (see Sect. 6 for an illustrative application). It is important to note that a heterogeneity measure should not be used as a decision variable for the delineation of regions, as it would imply using redundant information at different steps of the regional analysis. The heterogeneity measure can also be used for evaluating the heterogeneity of a given region when particular sites are removed, with the aim of helping in the identification
- 30 of homogeneous regions. For instance, if a region is found as heterogeneous by using a given test and by entailing a number of discordant sites, the heterogeneity measure can help in the identification of the 'most homogeneous region' as a result of removing different combinations of sites. However, it is important to highlight that physical reasoning has to be provided for removing a given (discordant) site. Thus the heterogeneity measure serves only as a facilitator for the identification of the site(s) to be further analysed (e.g. Viglione, 2010; Ilorme and Griffis, 2013).

6 Illustrative application

An illustrative application on observed data is presented for didactical purposes. The considered case study consists of 44 sites from the hydrometric station network of the southern part of the province of Quebec, Canada (for more description of the data and the region see Chokmani and Ouarda 2004). The flow data are managed by the Ministry of the Environment of

- 5 Quebec services. Descriptors and at-site spring flood quantiles are available for the considered sites (Kouider et al. 2002). A summary of the statistics associated with the spring maximum peak flow data, relevant descriptors for flood frequency analysis (e.g. Shu and Ouarda 2007) and at-site spring flood quantiles is shown in Table 3. Note that due to the data used in this application are observed instead of simulated, the real degree of heterogeneity of the regions, as well as the real parent distribution of the data are unknown. Thus, it is not possible to truly compare the performance of the different heterogeneity.
- 10 <u>measures. In this regard, it is important to remark that the purpose of this illustrative application is then to show that commonly used criteria for identifying the best method for delineating regions may be subjective, as well as to guide practitioners in the use of heterogeneity measures.</u>

The heterogeneity of the whole study region is evaluated by using a homogeneity test (Hosking and Wallis 1997), resulting in a heterogeneous region ($H \ge 2$, see Table 4). Hence, the region is then divided into sub-regions by using cluster analysis

- 15 (e.g. Burn 1989) with the Ward's method, as it is one of the most applied in hydrology (e.g. Hosking and Wallis 1997, Mishra et al. 2008). Because of the illustrative character of this application, three simple clustering settings are considered as the different delineation methods. Clustering A consists in applying cluster analysis based on catchment area, annual mean total precipitation and annual mean degree-days below 0°C (see Table 3). Clustering B consists in applying cluster analysis only based on the catchment mean slope; and Clustering C is based on catchment slope and fraction of the catchment
- 20 controlled by lakes (see Table 3). Catchment area and annual mean total precipitation are descriptors generally recognised as very relevant for flood frequency analysis. Hence, it is expected that the sub-regions formed by Clustering A are more appropriate than the sub-regions formed by Clusterings B or C, which in this context implies that such sub-regions are less heterogeneous.

The results obtained by applying the best heterogeneity measure found in the present study, the GI, are shown in Table 4. For

- 25 comparison purposes, the results obtained by applying commonly used criteria for identifying the best delineation method are also shown. They are *H*, and the quantile error calculated as the relative root mean square error (RRMSE) (see Sect. 1). No more results are shown for space reasons and simplicity. Remind that the lower the heterogeneity measure or RRMSE value is, the better the delineation method will be. Note that in this case study, identifying the best delineation method implies identifying the best clustering setting. Two distributions commonly used in regional flood frequency analysis are
- 30 considered when applying the index-flood method (Dalrymple 1960) for estimating the quantiles to be evaluated through <u>RRMSE</u>. These distributions are the GEV and the generalised logistic (GLO) distribution; and the quantiles to be evaluated are the 10- and 100-year return period (*T*) spring flood quantile. RRMSE results related to a given distribution are only

shown in Table 4 if the regional distribution is accepted by a goodness-of-fit measure (Hosking 2015). For comparison purposes, RRMSE results are obtained even if the given region is not "homogeneous" according to the homogeneity test.

According to the results in Table 4, H identifies Clustering B as the best delineation method by considering either the H average or the H weighted average. Nevertheless, due to H is based on simulations, the H value for the sub-regions slightly

- 5 change if the procedure is repeated. In this particular case study, this implies that in some cases *H* average in Clustering B becomes larger than *H* average in Clustering A, and then Clustering A is selected as the best one. Moreover, although not happening in this case study, it may occur that *H* has negative values which may also contribute to complicate the evaluation of its average.
- RRMSE average for T = 100 identifies Clustering A as the best delineation method. However, RRMSE average for T = 10identifies Clustering C as the best one. Hence, a different decision is taken depending on the quantile considered for the
assessment. Besides, it is also relevant to indicate that the selection of the best delineation method based on RRMSE may
also depend on the regional distribution used. For instance, different distributions could be accepted for a given sub-region,
resulting in different RRMSE values which could affect the final decision. In this regard, it is important to remark that when
observed data are used, it is not possible to know neither the real regional parent distribution of the data, nor the real parent
- 15 distribution to be used in obtaining the at-site quantiles used for evaluating RRMSE. In the present application, the *GI* identifies Clustering A as the best delineation method, where the descriptors used for such purpose are expected to be more relevant. The *GI* is a more objective criterion for identifying the heterogeneity of a region than criteria commonly used in practice. Besides, its use as heterogeneity measure is supported by the four-step simulation-based assessment procedure performed in the present paper.

20 7 Conclusions

Delineation of homogeneous regions is required for the application of regional frequency analysis methods such as the index flood procedure. The availability of an estimate of the degree of heterogeneity of these delineated regions is necessary in order to compare the performances of different delineation methods or to evaluate the impact of including particular sites. Due to the unavailability of a well-justified and generally recognised measure for performing such comparisons, a number of

25 studies have relied on measures that are not well-defined or approaches that involve additional steps during the delineation stage of regional frequency analysis.

In the present paper, a <u>simulation-based</u> general framework is presented for assessing the performance of potential heterogeneity measures in the field of regional hydrological frequency analysis (RHFA), according to a number of desirable properties. The proposed four-step assessment procedure consists of: sensitivity analysis by varying the factors of a region;

30 evaluation of the success rate for identification of the most heterogeneous region; estimation of the evolution of the variability for the heterogeneity measure average with respect to the degree of regional heterogeneity; and study of the effect of discordant sites. The procedure is applied on a set of measures including commonly used ones, measures that are derived

from recent approaches, and measures that are adapted from other fields to the regional hydrological context. The assumption-free Gini Index (*GI*) frequently considered in economics and applied here on the L-variation coefficient (L-CV) of the regional sites obtained the best results. A lower performance was obtained for the measure of the percentage of sites (P_{CI}) for which the regional L-CV is outside the confidence interval for the at-site L-CV. However, this measure was

- 5 considered relevant because of its stable behaviour regardless of the regional value of L-CV. The application of both measures <u>may be</u> recommended in practice. The use of different criteria to determine the degree of regional heterogeneity can help adequately identify the sites to be further analysed for obtaining homogeneous regions. Further research efforts are necessary to develop robust and general heterogeneity measures in the field of RHFA. <u>In this study, an illustrative</u> <u>application is also included for didactical purposes. The subjectivity related to commonly used criteria in assessing the</u>
- 10 performance of different delineation methods is underlined through it. In this regard, further research may also focus on the application of heterogeneity measures to a variety of case studies in order to analyse practical aspects.

Acknowledgements

The financial support provided by the Natural Sciences and Engineering Research Council of Canada (NSERC) and the Merit scholarship program for foreign students – Postdoctoral research fellowship of the Ministère de l'Éducation et de

15 <u>*l'Enseignement Supérieur du Québec* managed by the *Fonds de recherche du Québec – Nature et technologies* is gratefully acknowledged.</u>

References

25

- Akaike, H.: Information theory and an extension of the maximum likelihood principle, Second International Symposium on Information Theory, edited by B. N. Petrov and F. Csaki, 267-281, Acad. Kiadó, Budapest, 1973.
- 20 Ali, G., Tetzlaff, D., Soulsby, C., McDonnell, J.J. and Capell, R.: A comparison of similarity indices for catchment classification using a cross-regional dataset, Adv.Water Resour., 40, 11-22, 2012.
 - Alila, Y.: A hierarchical approach for the regionalization of precipitation annual maxima in Canada, J. Geophys. Res.-Atmos., 104, 31645-31655, 1999.

Bocchiola, D., De Michele, C. and Rosso, R.: Review of recent advances in index flood estimation, Hydrol. Earth Syst. Sc., 7, 283-296, 2003.

Brath, A., Castellarin, A., Franchini, M. and Galeati, G.: Estimating the index flood using indirect methods, Hydrolog. Sci. J., 46, 399-418, 2001.

Burn, D.H.: Cluster analysis as applied to regional flood frequency, J. Water Res. Pl.-ASCE, 115, 567-582, 1989. Burn, D.H. and Goel, N.: The formation of groups for regional flood frequency analysis, Hydrolog. Sci. J., 45, 97-112, 2000.

Deleted: is

- Canaves, J.M., Page, R., Wilson, I.A. and Stevens, R.C.: Protein biophysical properties that correlate with crystallization success in Thermotoga maritima: maximum clustering strategy for structural genomics, J. Mol. Biol., 344, 977-991, 2004.
- Castellarin, A., Burn, D. and Brath, A.: Homogeneity testing: How homogeneous do heterogeneous cross-correlated regions
 seem?, J. Hydrol., 360, 67-76, 2008.
 - Castellarin, A., Burn, D. and Brath, A.: Assessing the effectiveness of hydrological similarity measures for flood frequency analysis, J. Hydrol., 241, 270-285, 2001.
 - Ceriani, L. and Verme, P.: The origins of the Gini index: extracts from Variabilità e Mutabilità (1912) by Corrado Gini, The Journal of Economic Inequality, 10, 421-443, 2012.
- 10 Chebana, F. and Ouarda <u>T.B.M.J.</u>: Index flood-based multivariate regional frequency analysis, Water Resour. Res., 45, W10435, 2009.

Chebana, F. and Ouarda, T.B.M.J.: Multivariate L-moment homogeneity test, Water Resour. Res., 43, 2007.

Chokmani, K. and Ouarda, T.B.M.J.: Physiographical space-based kriging for regional flood frequency estimation at ungauged sites, Water Resour, Res., 40, W12514, 2004.

15 Chowdhury, J.U., Stedinger, J.R. and Lu, L.: Goodness-of-fit tests for regional generalized extreme value flood distributions, Water Resour. Res., 27, 1765-1776, 1991.

Cunnane, C.: Methods and merits of regional flood frequency analysis, J. Hydrol., 100, 269-290, 1988.

Dalrymple, T.: Flood frequency analyses, U.S. Geol. Surv. Water Supply Pap, 1543A, 11-51, 1960.

Das, S. and Cunnane, C.: Performance of flood frequency pooling analysis in a low CV context, Hydrolog. Sci. J., 57, 433-444, 2012.

20

25

30

Das, S. and Cunnane, C.: Examination of homogeneity of selected Irish pooling groups, Hydrol. Earth Syst. Sci., 15, 819-830, 2011.

Elamir, E.A. and Seheult, A.H.: Exact variance structure of sample L-moments, J. Stat. Plan. Infer., 124, 337-359, 2004.

Farsadnia, F., Kamrood, M.R., Nia, A.M., Modarres, R., Bray, M. and Han, D.: Identification of homogeneous regions for regionalization of watersheds by two-level self-organizing feature maps, J. Hydrol., 509, 387-397, 2014.

Fill, H.D. and Stedinger, J.R.: Homogeneity tests based upon Gumbel distribution and a critical appraisal of Dalrymple's test, J. Hydrol., 166, 81-105, 1995.

Gastwirth, J.L.: The estimation of the Lorenz curve and Gini index, Rev. Econ. Stat., 306-316, 1972.

- Gini, C.: Variabilità e Mutuabilità. Contributo allo Studio delle Distribuzioni e delle Relazioni Statistiche, C. Cuppini, Bologna, 1912.
- Glasser, G.J.: Variance formulas for the mean difference and coefficient of concentration, J. AM. Stat. Assoc., 57, 648-654, 1962.
- Hausser, J. and Strimmer, K.: Entropy inference and the James-Stein estimator, with application to nonlinear gene association networks, J. Mach. Learn. Res., 10, 1469-1484, 2009.

- Hosking, J.R.M.: Regional frequency analysis using L-moments, R package, version 3.0-1, 2015. http://CRAN.R-project.org/package=lmomRFA.
- Hosking, J.R.M.: L-Moments: Analysis and Estimation of Distributions Using Linear Combinations of Order Statistics, J. R. Stat. Soc., Series B (Methodological), 52, 105-124, 1990.
- 5 Hosking, J.R.M. and Wallis, J.R.: Regional frequency analysis: an approach based on L-moments, Cambridge University Press, 240 pages, 1997.
 - Hosking, J.R.M. and Wallis, J.R.: Some statistics useful in regional frequency analysis, Water Resour.Res., 29, 271-281, 1993.
- Ilorme, F. and Griffis, V.W.: A novel procedure for delineation of hydrologically homogeneous regions and the classification of ungauged sites for design flood estimation, J. Hydrol., 492, 151-162, 2013.
 - Kouider, A., Gingras, H., Ouarda, T.B.M.J., Ristic-Rudolf, Z. and Bobée, B.: Analyse fréquentielle locale et régionale et cartographie des crues au Québec, Rep. R-627-el, INRS-ETE, Ste-Foy, Canada, 2002.

Kullback S. and Leibler R.A.: On information and sufficiency, The annals of mathematical statistics, 22(1), 79-86, 1951.

Laio, F., Di Baldassarre, G. and Montanari, A.: Model selection techniques for the frequency analysis of hydrological extremes, Water Resour, Res., 45, 2009.

Li, H. and Reynolds, J.: On definition and quantification of heterogeneity, Oikos., 280-284, 1995.

Mays, D.C., Faybishenko, B.A. and Finsterle, S.: Information entropy to measure temporal and spatial complexity of unsaturated flow in heterogeneous media, Water Resour. Res., 38, 49-1-49-11, 2002.

Mishra, B. K., Takara, K., and Tachikawa, Y.: Regionalization of Nepalese river basins for flood frequency analysis, Journal

20 of Hydraulic Engineering, 52, 91-96, 2008.

Ouali, D., Chebana, F. and Ouarda, <u>T.</u>B.M.J.: Non-linear canonical correlation analysis in regional frequency analysis, Stoch. Env. Res. Risk. A.,<u>30(2),449-462</u>, 2016.

Ouarda, T.B.M.J.: Hydrological frequency analysis, Regional, Encyclopedia of Environmetrics, John Wiley & Sons, Ltd, 2013.

- 25 Ouarda, <u>T.B.M.J.</u> and Shu, C.: Regional low-flow frequency analysis using single and ensemble artificial neural networks, Water Resour. Res., 45(11), 2009.
 - Ouarda, T.B.M.J., Girard, C., Cavadias, G.S. and Bobée, B.: Regional flood frequency estimation with canonical correlation analysis, J. Hydrol., 254, 157-173, 2001.
 - Requena, A.I., Chebana, F. and Mediero, L.: A complete procedure for multivariate index-flood model application, J.

30 Hydrol., 535, 559-580, 2016.

15

- Salinas, J., Laaha, G., Rogger, M., Parajka, J., Viglione, A., Sivapalan, M. et al.: Comparative assessment of predictions in ungauged basins- Part 2: Flood and low flow studies, Hydrol. Earth Syst. Sc., 17, 2637-2652, 2013.
- Seidou, O., Ouarda T.B.M.J, Barbet, M., Bruneau, P. and Bobée, B.: A parametric Bayesian combination of local and regional information in flood frequency analysis, Water Resources Research, 42, W11408, 2006.

Deleted: 1-14

Deleted: 5

Yitzhaki, S. and Schechtman, E.: The Gini Methodology: A primer on a statistical methodology, Vol. 272, Springer Science & Business Media, 2012.

Scholz, F.W. and Stephens, M.A.: K-sample Anderson-Darling tests, J. AM. Stat. Assoc., 82, 918-924, 1987.

Scholz, F.W. and Zhu, A.: kSamples: K-Sample Rank Tests and their Combinations, R package version 1.0.1., 2015. http://CRAN.R-project.org/package=kSamples

Shu, C. and Burn, D.H.: Homogeneous pooling group delineation for flood frequency analysis using a fuzzy expert system with genetic enhancement, J. Hydrol., 291, 132-149, 2004.

Shu, C., and Ouarda, T.B.M.J.: Flood frequency analysis at ungauged sites using artificial neural networks in canonical correlation analysis physiographic space, Water Resour. Res., 43, W07438, 2007.

10 Smith, A., Sampson, C. and Bates, P.: Regional flood frequency analysis at the global scale, Water Resour. Res., 51, 539-553, 2015.

Stedinger, J. and Lu, L.: Appraisal of regional and index flood quantile estimators, Stoch. Hydrol. Hydraul., 9, 49-75, 1995.

Viglione, A.: nsRFA: Non-supervised Regional Frequency Analysis, R package version 0.7-12, 2014. http://CRAN.Rproject.org/package=nsRFA

15 Viglione, A.: Confidence intervals for the coefficient of L-variation in hydrological applications, Hydrol. Earth Syst. Sc., 14, 2229-2242, 2010.

Viglione, A., Laio, F. and Claps, P.: A comparison of homogeneity tests for regional frequency analysis, Water Resour. Res., 43, 2007.

Warner, R.M.: Applied statistics: From bivariate through multivariate techniques, Sage, 2008.

- 20 Wazneh, H., Chebana, F. and Ouarda, <u>T.</u>B.M.J.: Delineation of homogeneous regions for regional frequency analysis using statistical depth function, J. Hydrol., 521, 232-244, 2015.
 - Weijs, S. V., Schoups, G. and Van De Giesen, N.: Why hydrological predictions should be evaluated using information theory, Hydrol. Earth Syst. Sc., 14, 2545-2558, 2010.

Wiltshire, S.: Regional flood frequency analysis I: Homogeneity statistics, Hydrolog. Sci. J., 31, 321-333, 1986.

25 Wright, M.J., Houck, M.H. and Ferreira, C.M.: Discriminatory Power of Heterogeneity Statistics with Respect to Error of Precipitation Quantile Estimation, J. Hydrol. Eng., 04015011, 2015.

Wright, M., Ferreira, C. and Houck, M.: Evaluation of heterogeneity statistics as reasonable proxies of the error of precipitation quantile estimation in the Minneapolis-St. Paul region, J. Hydrol., 513, 457-466, 2014.

Wu, J., Tan, Y., Deng, H. and Zhu, D.: A new measure of heterogeneity of complex networks based on degree sequence,

30 Unifying Themes in Complex Systems, Springer, pp. 66-73, 2008.

5

Zeileis, A.: ineq: Measuring Inequality, Concentration, and Poverty, R package version 0.2-13, 2014. http://CRAN.R-project.org/package=ineq

Table 1. Summary of the results of the studied measures for the four-step assessment procedure. The behaviour of a given measure for each sensitivity analysis in step (i) is graded as: good (G), acceptable (A), bad (B) or unacceptable (U). Measures entailing an 'unacceptable (U)' behaviour are not assessed by the rest of steps; yet a complete assessment of H is performed for comparison purposes. For steps (ii), (iii) and (iv) considered measures are ranked from the best results (1st) to the worst results (4th).

		(i) Sen	sitivity anal	yses		(11) A				
Measures	γ		τ^R	п	 (ii) Success rate (SR) 	(iii) Variability evolution	(iv) Effect of discordant sites			
		$\gamma = 0\%$	$\gamma = 50\%$	_						
Н	G	G	U	В	В	3 rd *	4 th ***	4 th		
H_2	Α	G	U	В	В	-	-	-		
V'	G	А	G	А	Α	2 nd	1 st	3 rd		
V_2'	Α	А	G	U	В	-	-	-		
AD	Α	U	U	U	В	-	-	-		
$P_{\rm CI}$	G	А	Α	А	В	4 th **	2^{nd}	2 nd		
GI	G	G	Α	А	А	1^{st}	3 rd	1 st		
$\ D_{KL}\ $	A	U	U	В	В	-	-	-		

(*) High limitations for given circumstances; (**) Favorable stable values regardless of τ^R ; (***) Unacceptable results.

Table 2. Summary of the success rate (*SR*) minimum, average and maximum of the considered measures (*H*, *V'*, P_{CI} and *GI*), expressed in percentage, when comparing the heterogeneity of two regions A and B. For a given τ^A and τ^B , such values are computed as the minimum, average and maximum of *SR* over 48 cases, respectively. For each case, *SR* is obtained as the mean over *N*s = 500 simulations of two regions with *n* = 30 and given N_A , N_B , γ_A and γ_B . Values in bold indicate the measure obtaining the largest *SR* minimum, *SR* average and *SR* maximum, respectively.

τ^A vs. τ^B	τ^{A}	τ^{B}		Mir	nimum			Ave	erage			Max	kimum	
t 1 5. t	c	·	Н	V'	$P_{\rm CI}$	GI	Н	V'	$P_{\rm CI}$	GI	Н	V'	$P_{\rm CI}$	GI
$\tau^A = \tau^B$	0.2	0.2	33	47	40	50	74.5	77.9	67.3	77.7	99	99	91	100
	0.3	0.3	36	46	34	51	72.2	74.4	65.1	75.2	98	94	87	98
$\tau^A < \tau^B$	0.1	0.4	7	69	36	57	58.8	86.4	61.4	85.7	87	98	83	98
	0.2	0.3	24	59	40	62	68.1	81.0	64.1	80.8	96	97	88	98
$\tau^A > \tau^B$	0.3	0.2	47	34	33	34	77.3	70.4	67.6	71.8	100	96	92	97
$\tau^{1} > \tau^{2}$	0.4	0.1	33	14	26	15	80.5	61.0	69.1	63.3	100	94	95	99
Total average:		30	45	35	45	71.9	75.2	65.8	75.7	97	96	89	98	

Variables		<u>Unit</u>	Min	Mean	Max	Std.
	Catchment area	<u>km²</u>	<u>208</u>	<u>1062</u>	<u>5820</u>	<u>1075</u>
	Catchment mean slope	<u>%</u>	<u>0.99</u>	<u>2.67</u>	<u>6.81</u>	<u>1.29</u>
Descriptors	Fraction of the catchment controlled by lakes	<u>%</u>	<u>0.1</u>	<u>1.63</u>	<u>5</u>	1075 1.29 1.38 62 1432 16.7 209.7 0.036 0.098 298.93
	Annual mean total precipitation	<u>mm</u>	<u>932</u>	<u>1057</u>	<u>1195</u>	<u>62</u>
	Annual men degree-days below 0°C	<u>degree-</u> <u>day</u>	<u>8589</u>	<u>11769</u>	<u>14158</u>	<u>1432</u>
Spring	Data length	<u>years</u>	<u>15</u>	<u>36</u>	<u>80</u>	<u>16.7</u>
maximum	At-site mean	$m^{3}s^{-1}$	<u>46.7</u>	<u>235.1</u>	<u>1137.4</u>	<u>209.7</u>
peak flow	<u>At-site L-CV (t)</u>		<u>0.145</u>	<u>0.199</u>	<u>0.319</u>	<u>0.036</u>
series	At-site L-skewness (t3)		<u>-0.032</u>	<u>0.139</u>	<u>0.404</u>	<u>0.098</u>
At-site	<u>10- year spring flood quantile</u>	$m^{3}s^{-1}$	<u>70.8</u>	<u>342.49</u>	<u>1616.08</u>	<u>298.93</u>
quantiles	100-year spring flood quantile	$m^{3}s^{-1}$	107.8	469.11	2006.38	<u>375.52</u>

Table 3. Summary of the statistics of descriptors, spring maximum peak flow series, and available at-site quantiles for the 44 sites considered in the illustrative application.

Unisiering				<u>H</u>		<u></u>			<u>RRMSE (%)</u>						
	<u>Sub-</u> region	<u>Nbr</u> sites	Value	Average	Weighted average	-	Value	Average	-	T = 100		-	T	T = 10	
			value	<u>Average</u>		_		<u>Average</u>	_	Value	<u>Average</u>	_	<u>Value</u>	<u>Average</u>	
Whole regio	<u>on</u>	<u>44</u>	<u>2.21</u>	<u>2.21</u>	<u>2.21</u>	_	<u>0.092</u>	<u>0.092</u>	_	<u>17.81</u>	<u>17.81</u>	_	<u>5.81</u>	<u>5.81</u>	
	<u>A1</u>	<u>31</u>	<u>2.06</u>	<u>1.23</u>	<u>1.57</u>	_	<u>0.101</u>	<u>0.087</u>	-	<u>18.03</u>	<u>14.94</u>		<u>6.26</u>	<u>5.64</u>	
A	<u>A2</u>	<u>13</u>	<u>0.4</u>			_	<u>0.074</u>		_	<u>(11.85)</u>			<u>(5.01)</u>		
D	<u>B1</u>	<u>25</u>	<u>0.49</u>	<u>1.21</u>	1.11	_	<u>0.077</u>	0.004	-	<u>16.34</u>	19.26		<u>5.22</u>	5.02	
<u>B</u>	<u>B2</u>	<u>19</u>	<u>1.93</u>		<u>1.11</u>	_	<u>0.111</u>	<u>0.094</u>	_	<u>20.18</u>	<u>18.26</u>		<u>6.63</u>	<u>5.93</u>	
<u>C</u>	<u>C1</u>	<u>26</u>	<u>2.05</u>	1 20	1.51		<u>0.100</u>	0.001		<u>18.46</u>	<u>16.92</u>		<u>6.22</u>	5 49	
	<u>C2</u>	<u>18</u>	<u>0.73</u>	<u>1.39</u>	<u>1.51</u>		<u>0.082</u>	<u>0.091</u>		<u>(15.38)</u>			<u>(4.74)</u>	<u>5.48</u>	

Table 4. Results of the illustrative application: heterogeneity measures *H* and *GI*, and RRMSE. RRMSE values are associated with the GLO regional distribution; RRMSE values within parenthesis are associated with the GEV regional distribution. Bold values indicate the best result for each criterion.

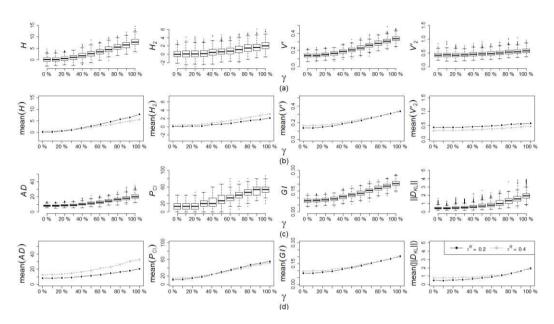


Fig. 1. Sensitivity analysis: (a) (c) boxplots of the heterogeneity measures for Ns = 500 simulations of the reference region (N = 15, n = 30 and $\tau^R = 0.2$) varying the heterogeneity rate γ ; and (b) (d) comparison of the corresponding mean with the one obtained by considering $\tau^R = 0.4$.

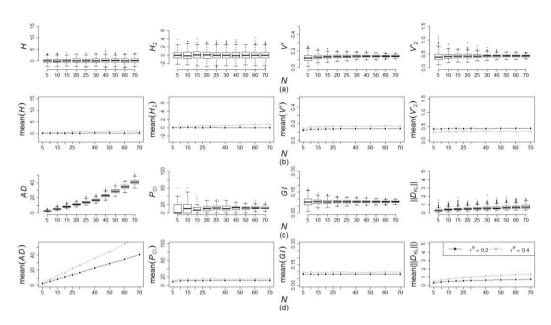


Fig. 2. Sensitivity analysis: (a) (c) boxplots of the heterogeneity measures for Ns = 500 simulations of the reference region (n = 30 and $\tau^R = 0.2$), with a heterogeneity rate $\gamma = 0\%$, varying the number of sites N; and (b) (d) comparison of the corresponding mean with the one obtained by considering $\tau^R = 0.4$.

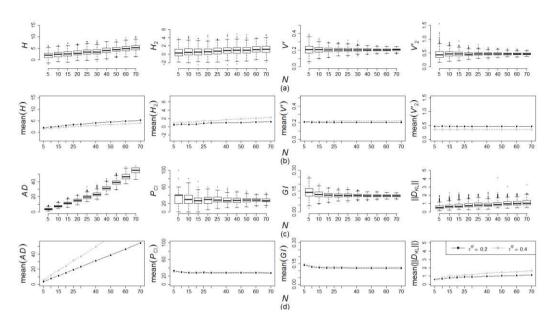


Fig. 3. Sensitivity analysis: (a) (c) boxplots of the heterogeneity measures for Ns = 500 simulations of the reference region (n = 30 and $\tau^R = 0.2$), with a heterogeneity rate $\gamma = 50\%$, varying the number of sites N; and (b) (d) comparison of the corresponding mean with the one obtained by considering $\tau^R = 0.4$.




Fig. 4. Sensitivity analysis: mean of H and H_2 over Ns = 500 simulations of the reference region (n = 30 and $\tau^R = 0.2$) for a heterogeneity rate $\gamma = 100\%$, varying the number of sites N.

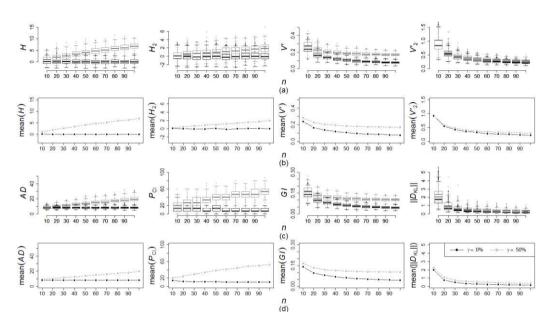


Fig. 5. Sensitivity analysis: (a) (c) boxplots of the heterogeneity measures for Ns = 500 simulations of the reference region (N = 15 and $\tau^R = 0.2$), for a heterogeneity rate $\gamma = 0\%$ and $\gamma = 50\%$, varying the data length *n*; and (b) (d) comparison of the corresponding mean for $\gamma = 0\%$ and $\gamma = 50\%$.


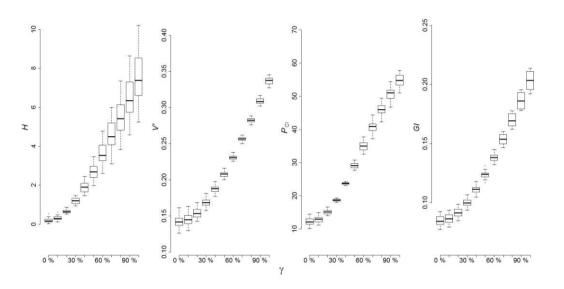


Fig. 6. Boxplots of representative values of the heterogeneity measure average obtained for 22 cases, varying the heterogeneity rate γ in the *x*-axis. For each case, such a representative value is obtained as the average between a given region A and a given region B over $N_{\rm S} = 500$ simulations of the given regions, entailing the same γ (i.e. $\gamma_{\rm A} = \gamma_{\rm B}$) but different characteristics (i.e. $N_{\rm A} \neq N_{\rm B}$ or $N_{\rm A} = 5$ $N_{\rm B}$ with $\tau^{\rm A} \neq \tau^{\rm B}$).

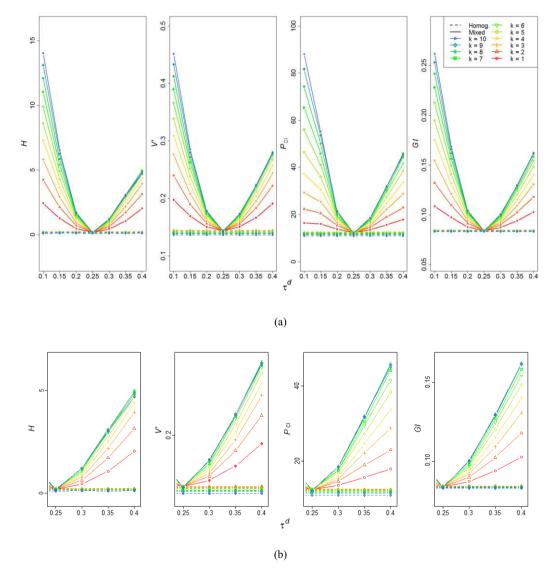

5 Fig. 7. Mean values of the heterogeneity measures over Ns = 500 simulations of a given homogeneous region with N = 20 sites, n = 30 and $\tau^R = 0.25$, for which k sites are replaced by k discordant sites generated by a GEV with L-Cv τ^d , varying τ^d in the x-axis: (a) full plot; and (b) zoom to the right part of the x-axis.