

Reservoir storage and hydrologic responses to droughts in the Paraná River Basin, Southeast Brazil

Davi C. D. Melo^{1,2}, Bridget R. Scanlon², Zizhan Zhang², Edson Wendland¹, and Lei Yin³

¹Department of Hydraulic and Sanitary Engineering, University of São Paulo, Avenida Trabalhador São-carlense, 400 - Parque Arnold Schmidt, São Carlos - SP, 13566-590, Brazil

²Bureau of Economic Geology, University of Texas at Austin, 10100 Burnet Rd, Austin, TX 78758, USA

³Department of Geological Sciences, Jackson School of Geosciences, University of Texas at Austin, 23 San Jacinto Blvd & E 23rd St, Austin, TX 78712, USA

Correspondence to: Davi de C. D. Melo (melo.dcd@gmail.com)

Abstract. Droughts are particularly critical for Brazil because of impacts on water supply and because most (70 %) of its electricity is derived from hydroelectric generation. The Paraná Basin (PB), a major hydroelectric producing region with 32 % (60 million people) of Brazil's population, recently experienced the most severe drought since the 1960s, compromising the water supply for 11 million people in São Paulo city. The objective of this study was to quantify linkages between meteorological and hydrological droughts based on remote sensing, modelling, and monitoring data using the Paraná River Basin in South-east Brazil as a case study. Two major meteorological droughts were identified in the early 2000s and 2014, with precipitation 20–50 % below the long-term mean. Total water storage change estimated from the Gravity Recovery and Climate Experiment (GRACE) satellites declined by 150 km³ between Apr 2011 and Apr 2015. Simulated soil moisture storage declined during the droughts, resulting in decreased runoff into reservoirs. As a result, reservoir storage decreased 30 % relative to the systems maximum capacity, with negative trends ranging from 17 km³ yr⁻¹ (May 1997–Apr 2001) to 25 km³ yr⁻¹ (May 2011–Apr 2015). Storage in upstream reservoirs is mostly controlled by natural climate forcing whereas storage in downstream reservoirs also reflects dam operations. This study emphasizes the importance of integrating remote sensing, modelling, and monitoring data to evaluate droughts and to establish a comprehensive understanding of the linkages between a meteorological and hydrological drought for future management.

1 Introduction

Droughts have large scale socio-economic impacts, responsible for 35 % of disaster-related deaths and 200 billion US dollars (US\$, adjusted to 2012 by WMO) in losses globally between 1970 and 2012 (WMO, 2014). In South America, 48 droughts were responsible for 23 % (US\$16.5 billion) of losses caused by disasters (1970–2012), including the 1978 Brazilian drought, responsible for a loss of US\$ 8 billion (WMO, 2014).

There are a variety of different types of droughts, including meteorological, agricultural, hydrological, and socio-economic (Wilhite and Glantz, 1985). Investigating individual types of drought limits understanding of how they are connected, i.e. how meteorological drought (precipitation deficit) propagates through the hydrological system resulting in socio-economic drought,

for example. Socio-economic drought is characterized by the failure to supply economic goods (water, hydroelectric power, etc) as a result of water deficits (Wilhite and Glantz, 1985). Because these drought types are usually related to one another, societal impacts of droughts are often conveyed through linkages between them (Fiorillo and Guadagno, 2009).

Establishing linkages between meteorological and hydrologic droughts is challenging due to the large spatio-temporal variability in water distribution. Increasing availability of remotely sensed anomalies in terrestrial total water storage (TWSA) data from the Gravity Recovery and Climate Experiment (GRACE) satellites, precipitation estimates from Tropical Rainfall Measuring Mission (TRMM), and evapotranspiration (ET) estimates from Moderate Resolution Imaging Spectroradiometer (MODIS) greatly enhances our ability to assess linkages between the different types of droughts (Tapley et al., 2004; Huffman et al., 2007; Mu et al., 2007). In addition to remote sensing data, Global Land Data Assimilation Systems (GLDAS) land surface models (LSMs) provide valuable data on water budgets related to droughts (Rodell et al., 2004).

Meteorological drought indicators, such as the standardized precipitation index (SPI), have been used to forecast hydrologic droughts based on a streamflow Drought Index (Tigkas et al., 2012; Fiorillo and Guadagno, 2009). Major hydrological regimes have been characterized using satellite data (GRACE, TRMM) and GLDAS LSMs (Awange et al., 2014). GRACE satellite data have been used to assess impacts of droughts on TWSA in large basins globally (Long et al., 2013; Leblanc et al., 2009).

In Brazil, drought related studies have focused mostly on the Amazon basin (Frappart et al., 2012; Nepstad et al., 2004; Yin et al., 2014) or semi-arid North-east Brazil (Marengo et al., 2013). However, South-east Brazil (80 million people), accounting for 55 % of national GDP in 2012 (IBGE, 2010, 2014), has been subjected to two major droughts since 2000. The early 2000s drought was responsible for a major energy crisis in Brazil, leading to energy-rationing programs and even blackouts, attributed in part to limited transmission and interconnection (Rosa and Lomardo, 2004). The more recent drought (2014) compromised the water supply for 11 million people in Brazil's largest Metropolis: São Paulo.

Reservoir levels in São Paulo's main water supply system (Cantareira System) dropped below 15 % of capacity. The 2014 drought jeopardized potable water supplies of 130 cities (28 million people) in the South-east region (Lobel et al., 2014), where there are ≈ 50 reservoirs with individual areas exceeding 1000 ha, mostly in the Paraná basin. The 2014 water year (Sep 2013–Aug 2014) was the driest on record in São Paulo city area since 1962 (Coelho et al., 2015a) with simulated reservoir dynamics changing in response to drought (Coutinho et al., 2015). Analysis of GRACE TWSA data indicate that between Feb 2012 and Jan 2015, total water storage declined by 6 cm yr^{-1} ($56 \text{ km}^3 \text{ yr}^{-1}$; totalling 160 km^3) in South-east Brazil as a result of reduced rainfall (Getirana, 2015).

In this context, it is reasonable to ask whether the meteorological forcing is primarily responsible for the socio-economic droughts in the region. Would an improved electric distribution system avoid the blackouts that occurred in the early 2000s? Is the water crisis in São Paulo solely linked to meteorological factors? Was 2014 also the driest water year in the entire South-east region in decades? Were these two droughts similar and, if so, did they result in similar impacts? Finding the linkages between different types of droughts is important to answer these questions. Hence, the objective of this study was to address the following questions related to linking meteorological and hydrological droughts in the Paraná River Basin in South-east Brazil:

- What is the intensity, extent, and duration of the recent droughts?

- What are the drought impacts on terrestrial total water storage and reservoir storages?
- How do the droughts propagate through the hydrologic system?
- 60 – How are different reservoirs operated under droughts conditions?

The Paraná basin (PB) was selected as a case study because of the severity of recent droughts and widespread impacts on water supply and hydroelectricity generation. To answer these questions, we used remotely-sensed total water storage anomalies from GRACE (Section 2.1, Supplementary Information (SI) Section S3.4), remotely-sensed and ground-based gridded rainfall datasets (Section 2.1, SI Section S3.3), remotely sensed ET (Section 2.1, SI Section S3.3), simulated soil moisture storage and runoff from four LSMs (2.1, SI Section 3.2), and monitoring data from 37 reservoirs (2.1, SI Section 3.1). We used (i) statistical indices to characterize meteorological and hydrologic droughts (Section 2.2, SI Section S4.3), (ii) tests statistics to evaluate the impacts on reservoir storage (Section 2.2, SI Sects. 4.1 and 4.2) and (iii) studied differences and similarities between individual reservoirs (Section 2.2, SI Section S4.4).

- 5 Unique aspects of this study include the preliminary assessment of droughts using a variety of remote sensing, modelling and monitoring approaches and indicators, comparison of multiple droughts and related hydrologic impacts, and variety of scales of analyses from regional evaluation using GRACE satellites to local reservoir responses. This study builds on previous studies, such as the evaluation of drought in South-east Brazil based on GRACE satellite data by Getirana (2015) by expanding remote sensing, modelling, and monitoring data. The Paraná basin is one of the most studied areas in Brazil, given its relevance
10 in the national context.

Previous hydrologic studies in this area include assessment of climate change impacts on water resources (Adam et al., 2015; Nóbrega et al., 2011), energy and hydrologic modelling (Camilloni et al., 2013; Ruhoff et al., 2013; Getirana et al., 2010), assessment of remotely sensed evapotranspiration (Ruhoff et al., 2013) and energy-based estimation of evapotranspiration (Ruhoff et al., 2012). In terms of drought-related studies, the area of the Paraná River Basin is much larger than evaluated in
15 some previous analyses that were restricted to São Paulo city (Coelho et al., 2015b, a; Coutinho et al., 2015). Another recent study brought some insight regarding drought propagation by quantifying the time lag responses of the hydrological system to meteorological shifts; they found a lag of ≈ 6 months between significant change in SPI and reservoir storage; and ≈ 1 month between SPI and river discharge (Melo and Wendland, 2016). The large areal extent allows surface reservoir impacts to be assessed at local to system scales, considering upstream-downstream drought impacts based on observed reservoir storage
20 (RESS) data. The results of this study should enhance our understanding of linkages between meteorological and hydrologic droughts to better manage water resources in this region and similar other regions.

2 Study area, data and methods

The study area ($830,000\text{km}^2$) comprises the contributing basins to 37 reservoirs: 35 within the Paraná basin (PB) and two other nearby reservoirs (Três Marias and Paraibuna) selected because they are in areas affected by the 2014 drought (Fig. 1, Table
25 S2). The Paraná basin was originally covered by Cerrado and Mata Atlantica biomes which have been replaced by pasture

(44 %), annual crops (24 %), sugarcane (9 %) with original Cerrado and forests only occupying 7–9 % each of the land area (FEALQ, 2014). Most of the reservoirs are located near the center of the basin, where the land use consists, basically, of annual crops and sugar cane. Center pivots in the region are mainly located in the northern and southeastern parts of the PB (Fig S2f). Mean rainfall is $1,500 \text{ mm yr}^{-1}$ and temperature is $23 \text{ }^\circ\text{C}$ (1980-2014) (Xavier et al., 2015).

30 The topography in the PB consists, basically, of high plains with maximum altitudes higher than 2,000 m a.m.s.l. (Fig. 1). Most of PB is under temperate highland tropical climate with dry winters (Cwb) and humid subtropical climate with hot summer (Cfa) or with dry winter (Cwa) (Fig. S3b). This basin covers parts of seven Brazilian states (SP, MG, DF, GO, MS, PR and SC) (Fig. 1). Population in the basin (60 million in 2010) represents 32 % of the Brazilian population (SI, section S2.2), including the most populated city in Brazil (São Paulo), with 11 million people in 2015 (ANA, 2010).

35 The Cantareira system, São Paulo’s main water supply system, has an overall storage capacity of 1.45 km^3 , including the following reservoirs and respective storage capacities: Jaguari (0.14 km^3), Jacaré (0.89 km^3), Cachoeira (0.11 km^3) and Atibainha (0.3 km^3). Extended dry periods can be critical for the Cantareira and other surface systems. Since the 1960s, five droughts (1977, 1984, 1990, 1992, 2001, 2012 and 2014) reduced reservoir storage supplies for São Paulo (Coelho et al., 2015a). The Cantareira system contribute 47 % ($33 \text{ m}^3 \text{ s}^{-1}$) of the total water supply to São Paulo’s metropolitan region that
40 encompasses 39 municipalities (19.6 million people in 2007) (Whately and Diniz, 2009). Before the water crises caused by the 2014 drought, 8.8 million people were supplied by the Cantareira system with ≈ 164 litres per inhabitant per day (SABESP, 2014).

2.1 Data sources and processing

This section provides a general overview of the data sets used in this study. Additional details are provided in SI, Section S3.0.

45 Ground-based rainfall data (P_{obs}) from ≈ 1270 gauges (Fig. S3) for the period 1995–2013 were interpolated to a $0.25^\circ \times 0.25^\circ$ grid by Xavier et al. (2015). Because P_{obs} is not available throughout the whole analysed period, remotely sensed rainfall estimates (P_{Sat}) were derived from the Tropical Rainfall Measuring Mission (TRMM) Multisatellite Precipitation Analysis (TMPA) 3B43 version 7 product, for the period 2013–2015.

The GRACE-based monthly gravity solutions in spherical harmonic format from Apr 2002 through Apr 2015 were obtained
50 from the University of Texas Center of Space Research (CSR) (Bettadpur, 2012). To reduce noise while minimizing signal loss, we applied standard post-processing, including truncation to degree and order 60, de-striping (Swenson and Wahr, 2006), and application of a 250 km Fan filter (Zhang et al., 2015). Then the filtered monthly gravity fields, after removing the mean, were converted to total water storage anomalies (TWSA) in gridded $1^\circ \times 1^\circ$ degree solutions to match outputs from land surface models spatially.

55 The analysis of soil moisture storage (SMS) and runoff (R_{off}) is based on outputs from four Land Surface Models (LSM) from GLDAS 1.0: NOAH, Mosaic, VIC, and CLM (Rodell et al., 2004). The number of vertical layers (VL) and respective depths (D) vary among LSMs: CLM (10 VL, $0 \leq D \leq 3.43 \text{ m}$), Mosaic (3 VL, $0 \leq D \leq 3.5 \text{ m}$), NOAH (4 VL, $0 \leq D \leq 2.0 \text{ m}$) and VIC (3 VL, $0 \leq D \leq 2.0 \text{ m}$). SMS is the average layer soil moisture (ALSM) from individual LSMs. ALSM was obtained by depth-averaging the water amounts in specific soil layers. Descriptions of the LSMs and GLDAS are provided in Section

60 S3.2, SI. The *ET* datasets used were derived from the global ET algorithm (ETGlob) developed by Zhang et al. (2010) and from MOD16 global evapotranspiration product (Mu et al., 2011) (SI, section S3.3).

There is a large number of reservoirs in the PB, several of which with negligible volumes in the context of this study. Considering the effort to compile and process the data from individual reservoirs, only reservoirs with individual areas exceeding 1000 ha were selected for analysis (criterion I). The volume of a reservoir with area inferior to 1000 ha ranges around 0.25 km²,
65 accounting for less than 0.1 % of the average storage capacity analysed in this study. Approximately 50 reservoirs remained after the application of criteria I. Most of those reservoirs have the primary purpose of generating hydroelectricity. A second criterion was applied, removing cases whose time series contained gaps accounting for more than 50 % of their records. Due to data limitations, only 37 of the 50 reservoirs were considered in this study. The maximum storage capacity of the 37 reservoirs is ≈ 250 km³. Daily data on inflow, outflow, water level and storage for 37 reservoirs were downloaded from the Brazilian
70 Water Agency (ANA, Agência Nacional de Águas) web site for the period Jan 1995–Jun 2015.

2.2 Data analyses

The Standardized Precipitation Index (SPI) was selected as the meteorological drought index because it is probabilistic, its implementation is relatively simple, and its interpretation is spatially invariant (Guttman, 1998). SPI uses historical rainfall data to determine, at different timescales, the periods of positive and negative anomalies in rainfall based on the cumulative
75 probability of rainfall occurrence over an area or at point (McKee et al., 1993). We used the 12 month SPI based on historical monthly rainfall data relative to a 35-year time span (1980–2015) (SI, Section 4.3).

The Streamflow Drought Index (SDI) (Nalbantis and Tsakiris, 2008) was selected as the hydrologic drought index because it is analogous to SPI in that it is computationally inexpensive, easy to implement, and reduces the drought characterization to a simple severity versus frequency relationship (Nalbantis and Tsakiris, 2008). For each water year, SDI is obtained for
80 overlapping periods of 3, 6, 9 and 12 months based on cumulative streamflow data. In addition, it is not data demanding as it requires only streamflow data (SI, Section S4.3). For practical purposes, drought onsets were classified when SPI or SDI were < -1 for at least 6 months. Further details related to calculating SDI are provided in SI, Section 4.3.

The statistical significance of reservoir depletion and trends in monthly reservoir storage were investigated by applying the non-parametric Mann-Whitney U-test (MW U) and a modified version of the rank-based non-parametric Mann-Kendall test
85 (MK), respectively (Mann and Whitney, 1947; Kendall, 1975). The MW U test is a common alternative to the parametric Student's t-test for testing whether two samples come from the same population (SI, Section 4.1). The MK method is used to avoid making assumptions regarding the distribution of the data and reducing sensitivity to outliers (Hamed, 2008). To overcome possible issues due to positive correlation in the analysed time series (SI, Section S4.2), we adopted a modified MK trend test for seasonal data with serial correlation (Hirsch and Slack, 1984).

90 Hierarchical clustering (HC) was used to group the reservoirs and is a commonly adopted approach to identify similar groups among hydrological time series (Brito Neto et al., 2015). The similarities among elements and groups of elements are measured by a distance function (Bailey, 1994) which, along with the maximum cluster distance, compose the main parameters to be defined in a HC method. In this study, we used the Euclidean distance (see Sec. 4.4 in SI for equations) as distance function

because it's been shown to produce good results in past studies (Ramoni et al., 2002) and is available in the Matlab toolbox
95 used here. The maximum cluster distance (MCD) defines the distance below which the objects are considered as part of a
single group (see SI, Fig. S12). In this study, we adopted an interactive process to define MCD in which various values were
tested, the resulting clusters were observed and a final option was chosen based on its capability to represent the variability
existing in the sample. The elements used to generate the clusters are time series of normalized monthly reservoir storage (SI,
Section S4.4), that is, we seek to group the reservoirs with similar responses at monthly scale. Hence, the clustering analysis
100 performed here does not consider other reservoir characteristics such as storage capacity, location, shape, etc.

3 Results

3.1 Meteorological droughts

Two distinct droughts were identified in the Paraná Basin between 1995 and 2015 based on SPI (Fig. 2). The first drought
began in Oct 1999 and extended through Aug 2000, during which SPI was ≤ -1.25 , characterizing a moderate to severe
drought ($-2 \leq \text{SPI} \leq -1$). This drought was followed by a moderate dry year as the average SPI was ≈ -0.6 during the rainy
season of 2001 (Dec–Feb). The second driest period occurred between Feb 2014 and Nov 2014, with $\text{SPI} \leq -1.20$ (Fig. 2).
The first drought is hereafter referred to as the early 2000s drought and the second drought as 2014 drought. The 2014 rainfall
deficit was previously identified as part of a prolonged drought (2012–2015) by Getirana (2015), who applied break tests to
5 TWSA time series and found a change occurring in Feb 2012. Although our analysis of GRACE-based TWSA also indicates
an abrupt change between 2011 and 2012, this change in TWSA reflects a hydrological drought.

The intensity and duration of the drought is spatially variable. Rainfall anomalies in water year (WY) 2001 (Sep 2000–
Aug 2001) were more negative over the eastern and northern part of the Paraná Basin whereas the spatial extent of the 2014
drought was greater as most of the PB experienced a reduction of 20–40 % in annual rainfall (Fig. 3). Most of the reservoirs are
10 in areas where rainfall deficits ranged from 20–50 % of the long-term average (1982–2015). The negative rainfall anomalies
decreased towards the south-west portion of the basin which experienced a positive anomaly of up to 20 %. Between 2002 and
2009, two periods of average rainfall with different inter-annual ranges were found followed by an extremely wet year (WY
2010), mainly over the south-eastern part of the PB (Fig. 3), after which rainfall systematically decreased.

3.2 GRACE Total Water Storage Anomaly and Component Storages

15 The GRACE satellite data provide valuable information on regional extent of drought impacts on total water storage anomaly
(TWSA), despite its coarse spatial resolution ($\approx 100\text{--}200 \text{ km}^2$) (Fig. 4). TWSA data from GRACE does not include the 2001
drought as its monitoring period is from 2002 to present. Analysis of GRACE data indicate greater depletion in TWSA (≈ -60
to $\approx -90 \text{ mm yr}^{-1}$ between Apr 2011 and Apr 2015) in South-eastern Brazil, which corresponds to the north-east part of PB.
This range encompasses the results reported for the period between Feb 2012 and Jan 2015 by Getirana (2015) whose findings
20 indicate a water depletion rate of -61 mm yr^{-1} in southeastern Brazil ($\approx 920 \text{ km}^2$), corresponding to $\approx 160 \text{ km}^3$ over three

years. The spatial extent of the negative TWSA (Fig. 4) is generally consistent with the spatial distribution in the negative rainfall anomaly in WY 2014 (Fig. 3).

GRACE-TWSA shows large seasonal variability that can be accounted for by seasonal fluctuations in soil moisture storage (SMS) from LSMs and monitored reservoir storage RESS (Fig. 5). Inter-annual variability in GRACE TWSA shows anomalously wet years in 2007 and 2010, related to elevated rainfall. SMS and RESS were also above average in those years. The peak TWSA in Jan 2007 shows the rapid response of the system to the peak in SPI during the same period (Fig 2). Note that SPI was low or close to 1 between 1999 and 2006; therefore, the peak TWSA was not preceded by high rainfall in 2006. There is a long-term decline in TWSA from Apr 2011 to Apr 2015 ($37 \text{ km}^3 \text{ yr}^{-1}$, 42 mm yr^{-1}), totalling 148 km^3 . Depletion in TWS (42 mm yr^{-1}) is greater than that in SMS and RESS combined (24 mm yr^{-1}) by $\approx 40 \%$. The discrepancy is most likely related to depletion in deep SMS or groundwater storage (GWS). Simulated SMS from LSMs is restricted to the upper 2 m of the soil profile.

3.3 Analysis of Combined Reservoirs as an Equivalent System

This section presents the results relative to the analysis of the total monthly storage of all 37 reservoirs considered as one equivalent system. According to the MW U test, there is strong evidence (probability $\geq 95 \%$) that the early 2000s (p-value = 0.027) and 2014 (p-value = 0.01) droughts resulted in significant depletion of the total reservoir storage. This depletion corresponds to a reduction of 40 km^3 (17 %) in WY 2001 and 34 km^3 (15 %) in WY 2014 of the average storage volume and of 90 km^3 (–33 %) and 86 km^3 (–31 %) below the equivalent system maximum capacity.

Comparing the negative trends in RESS, the recent drought was more intense than the earlier drought: between 1997 and 2001, the equivalent RESS decreased by $17.1 \text{ km}^3 \text{ yr}^{-1}$ relative to $25.3 \text{ km}^3 \text{ yr}^{-1}$ between 2011 and 2015 (SI, Fig. S10). The reservoir system responded rapidly to the meteorological shifts. RESS was lowest at the beginning of the water year 2001; SPI values indicate the meteorological drought began in Oct 1999, when the SPI was at -1.3 . During the wet period of 2002, the reservoir systems began to recover and by early 2003 the reservoirs were operating at normal capacity, even though the SPI indicated a normal-to-moderately dry condition. Additional information about the recovery/depletion of reservoirs in a spatial context is presented in SI, Section S5.7

3.4 Drought propagation through the system

Variations in precipitation translate to changes in soil moisture storage (SMS) that affect runoff (R_{off}) and ultimately impact RESS. SMS and R_{off} were similarly affected by the early 2000s drought (Fig. 2). After 2001, the almost one decade of relatively normal rainfall was insufficient for SMS and R_{off} to recover from the drought. Not even the extreme wet period in 2010/2011 resulted in SMS and R_{off} recovery. Given that rainfall continued to decrease in the following years, the negative trend in SMS and R_{off} persisted.

The average temperature in the Paraná basin decreased by $0.04 \text{ }^\circ\text{C yr}^{-1}$ within the past 20 years (SI, Fig. S9). However, the analysis of both temperature and ET were inconclusive regarding their impacts on reservoir storage change. Comparison between ET estimates from the global algorithm (ET_{Glob}) by Zhang et al. (2010) and from the MOD16 algorithm (ET_{MOD})

by Mu et al. (2011) indicate a larger inter-annual variation of the latter relative to the former (Fig. 2). Given the uncertainty
55 involved in remotely sensed ET (Long et al., 2014), no attempt was made to identify whether the minimums are overestimated
by ET_{Glob} or underestimated by ET_{MOD} ; rather, we analyse the changes in ET signal. Although no significant trend of ET
in response to the analysed droughts was observed with a confidence level $\geq 95\%$ ($\alpha = 0.05$), ET decreased -2.8 cm yr^{-1}
between Jan 1998 and Jan 2001, and -0.3 cm yr^{-1} between Feb 2010 and Feb 2014 (Fig. 6). From Jan 2003 to Jan 2010, a
60 positive trend, significant at $\alpha = 0.05$, show that ET increased 3 cm yr^{-1} . Such increase reflects the recovery of the hydrologic
system as the moisture, absent due to the drought, becomes available again to be consumed by the vegetation.

In terms of annual ET , ET_{MOD} signal is practically invariant from 2000 through 2006 but a discrete increase in the moving
average suggests that ET rates were higher in the following years (2007–2014) (Fig. 6). An increase of ET (70 to 200 mm) was
observed in most of the Paraná basin, especially over the contributing areas of most of the analysed reservoirs (Fig. 6). Loarie
et al. (2011) showed that replacing pasture by sugar cane in the Cerrado bioma increases ET ; and São Paulo state (30% of
65 the PB) has been reported as the largest producer of sugar cane (Rudorff et al., 2010). However, the comparison between Figs.
1 and 6 show higher increase of ET ($\geq 120\text{ mm}$) in the PB occurring mostly in areas with annual crops and pasture, whereas
the increase of ET in areas preponderantly occupied by sugar cane ranged from 0 to 200 mm. Further investigation would be
necessary to, precisely, identify the causes for that increase.

The analysis of R_{off} , SMS and TWSA provides insights into the mechanisms that may explain the reservoir responses
70 to droughts. According to the SPI, the rainfall regimes during both droughts are similar; however, the greater impacts on
reservoir storage in 2014 is likely explained by different antecedent soil moisture conditions. The fact that SMS did not
recover after the early 2000s drought implies that higher rainfall amounts would be required for recovery to overcome the
cumulative SMS deficit. The extremely wet conditions in 2010/2011 were only sufficient to partially replenish the reduced
SMS. Complementary graphs are presented in Supplementary Information, Section S4.2. Runoff can be classified as infiltration
75 excess (when rainfall exceeds the infiltration rate of the soils) or saturation excess (when soils are close to saturation) and
differs from river discharge. Therefore, R_{off} is highly sensitive to SMS conditions. If rainfall is insufficient to recover SMS,
then R_{off} cannot recover either. After 2010/2011, SMS, R_{off} , and TWSA continued to decline, hence, the main inflow to the
reservoirs (river discharge), which depends on runoff and base-flow (groundwater discharge to streams), also decreased. The
years preceding the early 2000s drought were wetter than those preceding the 2014 drought: SPI exceeded 1.5 (severely wet)
80 throughout most of the 1997 through 1999 period, and SMS and R_{off} were more than 20% higher than the following years.
Therefore, SMS links meteorological drought to R_{off} , which affects the the primary input to RESS: streamflow.

Streamflow data was used to calculate the Streamflow Drought Index and provide insights on linkages between meteorolog-
ical and hydrologic droughts (Fig. 7) for the water years of 2001 (WY 2001) and 2014 (WY 2014). In general, meteorological
droughts resulted in hydrologic droughts, as indicated by the extreme low values of SDI where SPI was negative (Fig. 7).
85 However, some upstream reservoirs (highlighted with arrows) seem to have buffered the effects of the 2014 drought in the
downstream reservoirs. Although the SPI indicate a severe to extreme dry situation ($SPI < -2$) over those reservoirs, SDI
increased from upstream ($SDI < -2.50$) to downstream ($-2.5 < SDI < -2.0$). This means that the river discharge deficit (hydro-
logic drought) caused by the meteorological drought was (modestly) attenuated by the upstream reservoirs.

Comparison between WY 2001 and 2014 show a larger extend of the most recent drought within the Paraná basin, which
90 agrees with the rainfall anomaly in Fig. 3. Except for the south and central-south of the PB, the extent of the hydrologic drought
was more critical in WY 2014 than that observed for WY 2001. For instance, the same sub-basin in the center of the PB had,
in WY 2001, $-1 < SDI \leq 0$, whereas, in WY 2014, $-2.7 < SDI \leq -2.00$.

3.5 Cluster analysis applied to reservoir storage

Changes in RESS reflect the impacts of climate extremes through SMS and R_{off} and also reservoir management for hydro-
95 electricity and water supply. Cluster analysis suggested that the reservoirs could be subdivided into six groups (G1, G2, ...,
G6) based on the time series signal of monthly storage (Figs. 8 and 9). The main features intended to be highlighted by cre-
ating those clusters in Fig.9 are: seasonality and changes in time, which will be discussed below. The hierarchical tree of the
groups and linkages between them shown in a dendrogram was obtained by setting the maximum cluster distance (MCD)=0.6
(Fig. 8). Although the dendrogram in Fig. 8 may suggest higher link consistency for $MCD \approx 0.5$, similar characteristics of
100 the seasonal signal would be present in the new groups formed from G1 (SI, Section 5.6). Hence, the configuration in Fig. 8
was kept. Further details and discussion about such choice is provided in Sec. S5.4 in the Supplementary Information. Dam
operations are constrained by non-human-controlled variables (e.g. natural inflows) and legal obligations to maintain outflows
exceeding a minimum value (Q_{min_out}) at all times. The compliance with Q_{min_out} aims to guarantee multiple uses of water
resources and is defined by the Electric System National Operator (ONS - Operador Nacional do Sistema Elétrico) for each
105 hydroelectric power plant (HEP). Hence, even though the released outflow from a given reservoir may be reduced to control
the decline in storage during a drought, the reservoir will, eventually, experience some depletion given the need to observe
 Q_{min_out} . To manage hydroelectric generation, ONS uses rainfall-runoff models forced with rainfall forecast from the ETA
model (Mesinger et al., 2012); then discharge forecasts are used in stochastic models to generate scenarios of projected natural
discharges at different timescales. Here, we sought to identify how human control and natural forcing dictate the responses in
5 each reservoir.

3.5.1 Natural controls

The reservoirs in group 1 (G1, 15 out of 37) are characterized by well-defined seasonal variations, with good correspondence
between storage change and natural input to the contributing basins (Figs. 9, 10). In general, their storage through time is
similar to that described by the equivalent system of reservoirs in terms of depletion during the early 2000s and 2014 droughts.
10 Within G1 reservoirs, the inflows compare well with SPI, indicating a major role of natural forcing on reservoirs responses.

Similarly, comparison between SPI, SDI and RESS in G3 reservoirs also suggests their responses are strongly affected by
natural variability (SI, Figs. A1–A15). Different responses between G1 and G3 reservoirs can be explained by climatological
variations (Fig. 10). The main climatic difference between G1 and G3 reservoirs is the pronounced dry season that occurs in
the climate sub-types Cwa (humid subtropical with dry winter), Cwb (temperate highland tropical) and Aw (tropical wet and
15 dry) in G1 reservoirs whereas rainfall is more evenly distributed throughout the year in the sub-type Cfa (humid subtropical)
in G3 reservoirs. The occurrence or absence of dry winters affects the seasonal distribution of inflows to reservoirs, hence,

impacting the seasonal signal in reservoir storage. Good correspondence between reservoir response and precipitation regime is not restricted to reservoirs in the upper part of the basin, i.e. reservoirs with no upstream reservoir affecting their inflow. What happens in the other cases is that the natural inflow (from undisturbed basins) contributes to the total inflow that explains the reservoir storage change as much as the regulated discharge delivered by the reservoir(s) upstream or the outflow from upstream mimics natural discharge variations (SI, section S5.7).

Although G6 reservoirs are similar to G1 reservoirs in terms of having a well-defined seasonal variations with good correspondence between precipitation variability and reservoir storage change, G6 reservoirs seem to deplete/recover more slowly than those in G1. The reservoirs of the Cantareira System are included within G6 reservoirs (Fig. S53). This system experienced major depletion as result of natural water stress imposed by the recent drought (2014) combined with high demand from São Paulo metropolitan area. The total rainfall in the 2014 water year was 1150 mm, 25 % lower than the average since 1995, resulting in $SPI \leq -2$ (extremely dry). The lowest reservoir levels registered in the storage of the system (early 2015) reached 10 % of the total capacity, making the impacts of the 2014 drought unique.

3.5.2 Anthropogenic controls

Reservoirs in G2 and G5 do not show distinct seasonal variations, indicating that their responses are mainly governed by how they are operated and how the upstream dam is operated, given that all reservoirs in these groups are downstream of other hydroelectric power plants. In addition, the natural component of the total inflow is minimal because the upper undisturbed basin accounts for a small fraction of the total contributing area (Figs. A16–A20 and A31–S34). As a result, SPI fluctuations are not always reflected in reservoir storage. In such cases, analysis of SDI is inconclusive as it cannot provide information on natural discharge variability unless the human-controlled component of Q is removed.

For example, storage doubled in the Jaguará reservoir (G2) between 2001 and 2005 (0.04 to 0.08 km^3) even though SPI and SDI indicate the onset of a meteorological and hydrological drought (Fig. S34). That period was followed by an extremely wet year (2007/2008) but the rainfall increase was not reflected in the inflow ($SDI \approx 0$) or in increased reservoir storage. Finally, no significant depletion was found during the extremely dry period in 2014. The main difference between G2 and G5 reservoirs is the change in average reservoir level (mainly after 2002), positive for G2 and negative to G5, displayed by most of those reservoirs (Fig. 9).

3.5.3 Natural and Anthropogenic controls

Responses in G4 indicate that these reservoirs are equally controlled by natural and operational forcing. The natural component is reflected in the seasonality of storage variation. Their location in the PB, downstream to large reservoirs (Figs. A25-A30), makes them vulnerable to anthropogenic controls. Similar to G2 and G5 reservoirs, storage changes in G4 reservoirs are highly affected by dam operations, which implies that a precipitation deficit can be compensated by reducing outflow and benefiting from regulated discharge from upstream. However, persistence of low inflow may require operation that drastically reduces reservoir storage to maintain Q_{min_out} . That is precisely what happened at the M. M. Moraes Hydroelectric Power Plant (Fig.

S43) in 2014 as the Electric System National Operator (ONS - Operador do Sistema Elétrico) decided to reduce the reservoir level by 8 m.

3.6 Future research

The findings presented here and in previous studies related to drought impacts in the Paraná basin are baseline for future analysis. There are a number of gaps that need to be addressed; here we name some. A first prospect to be considered in the future is to quantify drought impacts on the regional water budget. Because remote sensing data sets, especially *ET* estimates, are not sufficiently reliable to close the budget (Sheffield et al., 2009; Long et al., 2014), future studies should incorporate more ground-based data, such as groundwater level data.

Further analysis on drought propagation features is necessary to better characterize such extreme event in the PB. Van Loon et al. (2012) compiled a number of studies on that topic and identified the following features: pooling (combined meteorological droughts causes a prolonged hydrologic drought); attenuation (terrestrial stores attenuate meteorological drought); lag (between meteorological drought, soil moisture and hydrological drought); and lengthening (longer droughts moving through soil moisture to hydrological droughts). The lag feature was partially addressed by Melo and Wendland (2016) as lag times between changes in SPI, reservoir storage and river discharge were estimated. Future researches can profit from more detailed information regarding the decision processes considered for dam operations. Such information is not usually publicly available in Brazil. Hence, this can create a good opportunity to promote more bi-lateral collaboration, especially between hydrology researchers and engineers.

4 Summary

Regional intense droughts in south-east Brazil have caused major depletion in water resources. We analysed remote sensing, monitoring, modelling data to identify linkages between meteorological and hydrological droughts. Based on SPI, two major meteorological droughts occurred in the Paraná basin between 1995 and 2015. A moderate to severe drought ($-2 \leq \text{SPI} \leq -1$) occurred in the early 2000s with $\text{SPI} \leq -1.25$ between Oct 1999 and Aug 2000. The second driest period occurred between Feb and Nov 2014, with $\text{SPI} \leq -1.20$. Droughts intensity and duration are spatially variable. The 2014 drought was more critical over the north-eastern part of the study area, with rainfall anomalies ranging between -20 to -60 %, resulting in SPI values ≤ -2.0 for 6–12 months in some cases (e.g. Furnas reservoir, Fig. 10).

The recent drought monitored by GRACE satellites shows depletion of TWSA of $37 \text{ km}^3 \text{ yr}^{-1}$ (42 mm yr^{-1}) over four years from 2011 to 2015 in the Paraná Basin, totaling 150 km^3 . Simulated SMS and monitored RESS together decreased by 24 mm yr^{-1} , accounting for 60 % of TWSA depletion. This recent drought was preceded by an earlier drought (early 2000s) that occurred prior to GRACE monitoring. Reduced rainfall and negative SPI during this drought translated to low SMS and reduced runoff (SDI anomalies) decreasing RESS by 30 km^3 in 2001 relative to the average storage volume. Depletion of reservoir storage caused by the early 2000s and 2014 droughts correspond to a 31 % reduction relative to the reservoir equivalent

80 system maximum capacity. Two negative short-term trends in RESS were found during the studied period: $-17.1 \text{ km}^3 \text{ yr}^{-1}$ (1997–2001) and $25.3 \text{ km}^3 \text{ yr}^{-1}$ (2011–2015), totalling 68 and 101.2 km^3 , respectively.

The period between these two droughts is characterized by slightly below average to near normal rainfall; however, rainfall levels were insufficient to overcome the cumulative water deficit that built up during the early drought. Low SMS compromised recovery even after the severely-wet year in 2010. As a result, the system storage reserves were low going into the recent
85 drought and were rapidly depleted during 2014.

While GRACE satellites provide data on regional water storage depletion and recovery related to drought, SMS and R_{off} from LSMs link meteorological drought to hydrologic drought as shown by streamflow anomalies (SDI) that are reflected in inflows anomalies to the reservoirs. However, detailed assessment of drought impacts on reservoir storage requires more thorough analysis of reservoirs at the local scale. Clustering analyses in this study revealed three groups of reservoirs (23 reservoirs)
90 with storage controlled mainly by natural climatic forcing, two groups (9 reservoirs) controlled mainly by reservoir operations and one group (6 reservoirs) controlled by a combination of natural and anthropogenic forcing (dam operations). The analysis highlights the importance of reservoir location within the system (upstream vs. downstream) in determining the dominant controls on drought impacts on reservoir storage. For most reservoirs, including the Cantareira System, meteorological droughts were reflected in the hydrologic system through reduced inflow to the reservoirs. The vulnerability to recent droughts in São
95 Paulo underscores the need for reservoir storage expansion but also reinforces the urgency for diversifying the water sources to enhance drought resilience. In other cases, the upstream reservoirs performed an important role in regulating river discharge and, hence, reducing meteorological drought impacts on inflow to downstream reservoirs.

A preliminary understanding on drought propagation, i. e. how the meteorological drought culminate in hydrological drought, was presented here. Our analysis indicate that socio-economic droughts (failure to supply water, electricity, etc) in the PB are
100 subject to a natural cascade effect (rainfall deficits > soils moisture reduction > run-off reduction > reservoir depletion), that are related to antecedent soil moisture conditions and dam operation.

An important practical measure is to continuously monitor meteorological indices, such as SPI. Based on such indices, it may be possible to anticipate and reduce drought impacts by means of public campaigns to alert the population about the potential drought and to encourage reduction in water and electricity consumption. The lag time between meteorological droughts and hydrologic responses results in time for some actions to be taken to reduce drought impacts, such as modifying dam operations. Given the spatial variability of droughts and the interconnected electric grid in Brazil, another possible measure is to reduce hydroelectric generation in a region potentially affected by an imminent drought and, temporarily, increase electricity
5 generation in other regions.

Given the uncertainties in the modelling process adopted by ONS to manage hydroelectric generation, dam operators can profit from radar-based real-time rainfall measurements or remotely-sensed near-real-time rainfall estimates. The difficulty of gathering station data for short timescales emphasizes the importance of remote sensing rainfall for reservoir operations. Finally, land surface models can be used in addition to the rainfall-runoff models currently used by ONS, to project hydrologic
10 responses by inputting weather forecast data.

This study emphasizes the importance of integrating remote sensing, modelling and monitoring data to quantify the duration, extent, and severity of regional droughts and their impacts on water resources, specifically reservoir storage; system evaluation and detailed analysis of individual reservoirs to determine controls on reservoir response to drought (e.g. natural climate forcing versus dam operations), and the importance of this comprehensive understanding on the linkages between the meteorological and hydrologic droughts for future management.

Author contributions. The first author collected and processed the data from GLDAS, ANA and ONS. ZZ processed and analysed the data from GRACE. LY processed the rainfall data. EW and BS analysed the data and commented on the paper, which was written by DM and BS.

5 Data availability

All the data used in this study is hosted by the Laboratory of Computational Hydraulics of the University of São Paulo and is available at <http://albatroz.shs.eesc.usp.br/?q=dados-de-pesquisa>.

Acknowledgements. The first author would like to thank the National Council for Scientific and Technological Development (CNPq- Conselho Nacional de Desenvolvimento Científico e Tecnológico) for the financial support (Grant agreement numbers 206857/2014-4 and 142252/2013-1).

References

- 25 Adam, K. N., Fan, F. M., Pontes, P. R. M., Bravo, J. M., and Collischonn, W.: Mudanças Climáticas e vazões extremas na bacia do Rio Paraná, *Brazilian Journal of Water Resources*, 20, doi:10.21168/rbrh.v20n4.p999-1007, 2015.
- ANA: Atlas Brasil: abastecimento urbano de água: panorama nacional, Tech. rep., Agência Nacional de Aguas, Brasília, 2010.
- Awange, J. L., Gebremichael, M., Forootan, E., Wakbulcho, G., Anyah, R., Ferreira, V. G., and Alemayehu, T.: Characterization of Ethiopian mega hydrogeological regimes using GRACE, TRMM and GLDAS datasets, *Advances in Water Resources*, 74, 64–78, doi:10.1016/j.advwatres.2014.07.012, <http://www.sciencedirect.com/science/article/pii/S0309170814001523>, 2014.
- 30 Bailey, K. D.: *Tipologies and taxonomies: an introduction to classification techniques*, Sage University Paper series on Quantitative Applications in the Social Sciences, Thousand Oaks, CA, 1994.
- Bettadpur, S.: *UTCSR Level-2 Processing standards document*, Tech. rep., Center for Space Research University of Texas, 2012.
- Brito Neto, R. T., Santos, C. A. G., Mulligan, K., and Barbato, L.: Spatial and temporal water-level variations in the Texas portion of the Ogallala Aquifer, *Natural Hazards*, 80, 351–365, doi:10.1007/s11069-015-1971-8, <http://dx.doi.org/10.1007/s11069-015-1971-8>, 2015.
- 35 Camilloni, I. A., Saurral, R. I., and Montroull, N. B.: Hydrological projections of fluvial floods in the Uruguay and Paraná basins under different climate change scenarios, *International Journal of River Basin Management*, 11, 389–399, doi:10.1080/15715124.2013.819006, <http://dx.doi.org/10.1080/15715124.2013.819006>, 2013.
- Coelho, C. A. S., Cardoso, D. H. F., and Firpo, M. A. F.: Precipitation diagnostics of an exceptionally dry event in São Paulo, Brazil, *Theoretical and Applied Climatology*, pp. 1–16, doi:10.1007/s00704-015-1540-9, <http://link.springer.com/article/10.1007/s00704-015-1540-9>, 2015a.
- 40 Coelho, C. A. S., Oliveira, C. P. d., Ambrizzi, T., Reboita, M. S., Carpenedo, C. B., Campos, J. L. P. S., Tomaziello, A. C. N., Pampuch, L. A., Custódio, M. d. S., Dutra, L. M. M., Rocha, R. P. D., and Rehbein, A.: The 2014 southeast Brazil austral summer drought: regional scale mechanisms and teleconnections, *Climate Dynamics*, pp. 1–16, doi:10.1007/s00382-015-2800-1, <http://link.springer.com/article/10.1007/s00382-015-2800-1>, 2015b.
- 45 Coutinho, R. M., Kraenkel, R. A., and Prado, P. I.: Catastrophic Regime Shift in Water Reservoirs and São Paulo Water Supply Crisis, *PLoS ONE*, 10, e0138278, doi:10.1371/journal.pone.0138278, <http://dx.doi.org/10.1371/journal.pone.0138278>, 2015.
- FEALQ: *Análise Territorial para o Desenvolvimento da Agricultura Irrigada no Brasil*, Tech. rep., Instituto Interamericano de Cooperação para a Agricultura, Fundação de Estudos Agrários Luiz de Queiroz, 2014.
- 50 Fiorillo, F. and Guadagno, F. M.: Karst Spring Discharges Analysis in Relation to Drought Periods Using the SPI, *Water Resources Management*, 24, 1867–1884, doi:10.1007/s11269-009-9528-9, <http://link.springer.com/article/10.1007/s11269-009-9528-9>, 2009.
- Frappart, F., Papa, F., da Silva, J. S., Ramillien, G., Prigent, C., Seyler, F., and Calmant, S.: Surface freshwater storage and dynamics in the Amazon basin during the 2005 exceptional drought, *Environmental Research Letters*, 7, 044010, <http://stacks.iop.org/1748-9326/7/i=4/a=044010>, 2012.
- 55 Getirana, A. C. V.: Extreme water deficit in Brazil detected from space, *Journal of Hydrometeorology*, doi:10.1175/JHM-D-15-0096.1, <http://journals.ametsoc.org/doi/abs/10.1175/JHM-D-15-0096.1>, 2015.
- Getirana, A. C. V., Bonnet, M.-P., Rotunno Filho, O. C., Collischonn, W., Guyot, J.-L., Seyler, F., and Mansur, W. J.: Hydrological modelling and water balance of the Negro River basin: evaluation based on in situ and spatial altimetry data, *Hydrological Processes*, 24, 3219–3236, doi:10.1002/hyp.7747, <http://onlinelibrary.wiley.com/doi/10.1002/hyp.7747/abstract>, 2010.

- 60 Guttman, N. B.: Comparing the Palmer Drought Index and the Standardized Precipitation Index, *JAWRA Journal of the American Water Resources Association*, 34, 113–121, doi:10.1111/j.1752-1688.1998.tb05964.x, <http://onlinelibrary.wiley.com/doi/10.1111/j.1752-1688.1998.tb05964.x/abstract>, 1998.
- Hamed, K. H.: Trend detection in hydrologic data: The Mann–Kendall trend test under the scaling hypothesis, *Journal of Hydrology*, 349, 350–363, doi:10.1016/j.jhydrol.2007.11.009, <http://www.sciencedirect.com/science/article/pii/S0022169407006865>, 2008.
- 65 Hirsch, R. M. and Slack, J. R.: A non parametric trend test for seasonal data with serial correlation, *Water Resources Research*, 20, 727–732, 1984.
- Huffman, G. J., Adler, R. F., Bolvin, D. T., Gu, G., Nelkin, E. J., Bowman, K. P., Hong, Y., Stocker, E. F., and Wolff, D. B.: The TRMM Multi-satellite Precipitation Analysis: Quasi-Global, Multi-Year, Combined-Sensor Precipitation Estimates at Fine Scale, *J. Hydrometeorol.*, pp. 38–55, 2007.
- 70 IBGE: Censo demográfico 2010. Características da população e dos domicílios: resultados do universo, Tech. rep., Instituto Brasileiro de Geografia e Estatística, Rio de Janeiro, http://www.ibge.gov.br/home/estatistica/populacao/censo2010/caracteristicas_da_populacao/resultados_do_universo.pdf, 2010.
- IBGE: Contas regionais do Brasil, Tech. rep., Instituto Brasileiro de Geografia e Estatística, Rio de Janeiro, <http://biblioteca.ibge.gov.br/visualizacao/livros/liv89103.pdf>, 2014.
- 75 Kendall, M. G.: Rank correlation measures, Charles Griffin, London, UK, 1975.
- Leblanc, M. J., Tregoning, P., Ramillien, G., Tweed, S. O., and Fakes, A.: Basin-scale, integrated observations of the early 21st century multiyear drought in southeast Australia, *Water Resources Research*, 45, n/a–n/a, doi:10.1029/2008WR007333, <http://dx.doi.org/10.1029/2008WR007333>, 2009.
- Loarie, S. R., Lobell, D. B., Asner, G. P., Mu, Q., and Field, C. B.: Direct impacts on local climate of sugar-cane expansion in Brazil, *Nature Climate Change*, 1, 105–109, doi:10.1038/nclimate1067, <http://www.nature.com/nclimate/journal/v1/n2/full/nclimate1067.html>, 2011.
- 80 Lobel, F., Maia, D., Soares, M., and Leite, M.: Drought in Southeast Brazil Hits 133 Cities with Consequences for the Economy, <http://www1.folha.uol.com.br/internacional/en/brazil/2014/11/1542425-drought-in-southeast-brazil-hits-133-cities-with-consequences-for-the-economy.shtml>, 2014.
- Long, D., Scanlon, B. R., Longuevergne, L., Sun, A. Y., Fernando, D. N., and Save, H.: GRACE satellite monitoring of large depletion in water storage in response to the 2011 drought in Texas, *Geophysical Research Letters*, 40, 3395–3401, doi:10.1002/grl.50655, <http://onlinelibrary.wiley.com/doi/10.1002/grl.50655/abstract>, 2013.
- 85 Long, D., Longuevergne, L., and Scanlon, B. R.: Uncertainty in evapotranspiration from land surface modeling, remote sensing, and GRACE satellites, *Water Resources Research*, 50, 1131–1151, doi:10.1002/2013WR014581, 2014.
- Mann, H. B. and Whitney, D. R.: On a Test of Whether one of Two Random Variables is Stochastically Larger than the Other, *The Annals of Mathematical Statistics*, 18, 50–60, <http://www.jstor.org/stable/2236101>, 1947.
- 90 Marengo, J. A., Alves, L. M., Soares, W. R., Rodriguez, D. A., Camargo, H., Riveros, M. P., and Pabló, A. D.: Two Contrasting Severe Seasonal Extremes in Tropical South America in 2012: Flood in Amazonia and Drought in Northeast Brazil, *Journal of Climate*, 26, 9137–9154, doi:10.1175/JCLI-D-12-00642.1, <http://journals.ametsoc.org/doi/abs/10.1175/JCLI-D-12-00642.1>, 2013.
- McKee, T. B., Doesken, N. J., and Kleist, J.: Drought Monitoring with Multiple Time Scales, in: 9th AMS Conference on Applied Climatology, pp. 233–236, 1993.
- 95

- Melo, D. d. C. D. and Wendland, E.: Hydrological system time lag responses to meteorological shifts, *Brazilian Journal of Water Resources*, pp. 0 – 0, doi:10.1590/2318-0331.011616083, http://www.scielo.br/scielo.php?script=sci_arttext&pid=S2318-03312016005001107&nrm=iso, 2016.
- Mesinger, F., Chou, S. C., Gomes, J. L., Jovic, D., Bastos, P., Bustamante, J. F., Lazic, L., Lyra, A. A., Morelli, S., Ristic, I., and Veljovic, K.: An upgraded version of the Eta model, *Meteorology and Atmospheric Physics*, 116, 63–79, doi:10.1007/s00703-012-0182-z, <http://dx.doi.org/10.1007/s00703-012-0182-z>, 2012.
- Mu, Q., Heinsch, F. A., Zhao, M., and Running, S. W.: Development of a global evapotranspiration algorithm based on {MODIS} and global meteorology data, *Remote Sensing of Environment*, 111, 519 – 536, doi:http://dx.doi.org/10.1016/j.rse.2007.04.015, <http://www.sciencedirect.com/science/article/pii/S0034425707001903>, 2007.
- 105 Mu, Q., Zhao, M., and Running, S. W.: Improvements to a MODIS global terrestrial evapotranspiration algorithm, *Remote Sensing of Environment*, 115, 1781–1800, doi:10.1016/j.rse.2011.02.019, <http://www.sciencedirect.com/science/article/pii/S0034425711000691>, 2011.
- Nalbantis, I. and Tsakiris, G.: Assessment of Hydrological Drought Revisited, *Water Resources Management*, 23, 881–897, doi:10.1007/s11269-008-9305-1, <http://link.springer.com/article/10.1007/s11269-008-9305-1>, 2008.
- Nepstad, D., Lefebvre, P., Lopes da Silva, U., Tomasella, J., Schlesinger, P., Solórzano, L., Moutinho, P., Ray, D., and Guerreira Benito, J.: Amazon drought and its implications for forest flammability and tree growth: a basin-wide analysis, *Global Change Biology*, 10, 704–717, doi:10.1111/j.1529-8817.2003.00772.x, <http://dx.doi.org/10.1111/j.1529-8817.2003.00772.x>, 2004.
- 5 Nóbrega, M. T., Collischonn, W., Tucci, C. E. M., and Paz, A. R.: Uncertainty in climate change impacts on water resources in the Rio Grande Basin, Brazil, *Hydrology and Earth System Sciences*, 15, 585–595, doi:10.5194/hess-15-585-2011, <http://www.hydrol-earth-syst-sci.net/15/585/2011/>, 2011.
- Ramoni, M. F., Sebastiani, P., and Kohane, I. S.: Cluster analysis of gene expression dynamics, *Proceedings of the National Academy of Sciences*, 99, 9121–9126, doi:10.1073/pnas.132656399, <http://www.pnas.org/content/99/14/9121>, 2002.
- 10 Rodell, M., Houser, P. R., Jambor, U., Gottschalck, J., Mitchell, K., Meng, C.-J., Arsenault, K., Cosgrove, B., Radakovich, J., Bosilovich, M., Entin*, J. K., Walker, J. P., Lohmann, D., and Toll, D.: The Global Land Data Assimilation System, *Bulletin of the American Meteorological Society*, 85, 381–394, doi:10.1175/BAMS-85-3-381, <http://journals.ametsoc.org/doi/abs/10.1175/BAMS-85-3-381>, 2004.
- Rosa, L. P. and Lomardo, L. L. B.: The Brazilian energy crisis and a study to support building efficiency legislation, *Energy and Buildings*, 36, 89 – 95, doi:http://dx.doi.org/10.1016/j.enbuild.2003.09.001, <http://www.sciencedirect.com/science/article/pii/S037877880300094X>,
- 15 2004.
- Rudorff, B. F. T., Aguiar, D. A., Silva, W. F., Sugawara, L. M., Adami, M., and Moreira, M. A.: Studies on the rapid expansion of sugarcane for ethanol production in São Paulo State (Brazil) using Landsat data, *Remote Sensing*, 2, 1057–1076, 2010.
- Ruhoff, A. L., Paz, A. R., Collischonn, W., Aragao, L. E., Rocha, H. R., and Malhi, Y. S.: A MODIS-Based Energy Balance to Estimate Evapotranspiration for Clear-Sky Days in Brazilian Tropical Savannas, *Remote Sensing*, 4, 703, doi:10.3390/rs4030703, <http://www.mdpi.com/2072-4292/4/3/703>, 2012.
- 20 Ruhoff, A. L., Paz, A. R., Aragao, L. E. O. C., Mu, Q., Malhi, Y., Collischonn, W., Rocha, H. R., and Running, S. W.: Assessment of the MODIS global evapotranspiration algorithm using eddy covariance measurements and hydrological modelling in the Rio Grande basin, *Hydrological Sciences Journal*, 58, 1658–1676, doi:10.1080/02626667.2013.837578, <http://dx.doi.org/10.1080/02626667.2013.837578>, 2013.
- 25 SABESP: Relatório de sustentabilidade, Tech. rep., Companhia de saneamento básico do estado de São Paulo, http://site.sabesp.com.br/uploads/file/sociedade_meioamb/rs_2014.pdf, 2014.

- Sheffield, J., Ferguson, C. R., Troy, T. J., Wood, E. F., and McCabe, M. F.: Closing the terrestrial water budget from satellite remote sensing, *Geophysical Research Letters*, 36, L07 403, doi:10.1029/2009GL037338, <http://onlinelibrary.wiley.com/doi/10.1029/2009GL037338/abstract>, 2009.
- 30 Swenson, S. and Wahr, J.: Post-processing removal of correlated errors in GRACE data, *Geophysical Research Letters*, 33, n/a–n/a, doi:10.1029/2005GL025285, <http://dx.doi.org/10.1029/2005GL025285>, 108402, 2006.
- Tapley, B. D., Bettadpur, S., Watkins, M., and Reigber, C.: The gravity recovery and climate experiment: Mission overview and early results, *Geophysical Research Letters*, 31, n/a–n/a, doi:10.1029/2004GL019920, <http://dx.doi.org/10.1029/2004GL019920>, 109607, 2004.
- Tigkas, D., Vangelis, H., and Tsakiris, G.: Drought and climatic change impact on streamflow in small watersheds, *Science of The Total Environment*, 440, 33–41, doi:10.1016/j.scitotenv.2012.08.035, <http://www.sciencedirect.com/science/article/pii/S0048969712011199>, 2012.
- 35 Valeriano, M. M. and Rossetti, D. d. F.: Topodata: Brazilian full coverage refinement of {SRTM} data, *Applied Geography*, 32, 300 – 309, doi:<http://dx.doi.org/10.1016/j.apgeog.2011.05.004>, <http://www.sciencedirect.com/science/article/pii/S0143622811000786>, 2012.
- Van Loon, A. F., Van Huijgevoort, M. H. J., and Van Lanen, H. A. J.: Evaluation of drought propagation in an ensemble mean of large-scale hydrological models, *Hydrology and Earth System Sciences*, 16, 4057–4078, doi:10.5194/hess-16-4057-2012, <http://www.hydrol-earth-syst-sci.net/16/4057/2012/>, 2012.
- 40 Whately, M. and Diniz, L. T.: Água e esgoto na grande São Paulo: situação atual, nova lei de saneamento e programas governamentais propostos, Tech. rep., ISA - Instituto Socioambiental, São Paulo, https://www.socioambiental.org/banco_imagens/pdfs/10369.pdf, 2009.
- Willhite, D. A. and Glantz, M. H.: Understanding: the Drought Phenomenon: The Role of Definitions, *Water International*, 10, 111–120, doi:10.1080/02508068508686328, <http://dx.doi.org/10.1080/02508068508686328>, 1985.
- 45 WMO, W. M. O.: Atlas of Mortality and Economic Losses from Weather, Climate and Water Extremes (1970–2012), Tech. rep., World Meteorological Organization, iISBN 978-92-63-11123-4, 2014.
- Xavier, A. C., King, C. W., and Scanlon, B. R.: Daily gridded meteorological variables in Brazil (1980–2013), *International Journal of Climatology*, pp. n/a–n/a, doi:10.1002/joc.4518, <http://dx.doi.org/10.1002/joc.4518>, 2015.
- Yin, L., Fu, R., Zhang, Y.-F., Arias, P. A., Fernando, D. N., Li, W., Fernandes, K., and Bowerman, A. R.: What controls the interannual variation of the wet season onsets over the Amazon?, *Journal of Geophysical Research: Atmospheres*, 119, 2314–2328, doi:10.1002/2013JD021349, <http://dx.doi.org/10.1002/2013JD021349>, 2014.
- 50 Zhang, K., Kimball, J. S., Nemani, R. R., and Running, S. W.: A continuous satellite-derived global record of land surface evapotranspiration from 1983 to 2006, *Water Resources Research*, 46, W09 522, doi:10.1029/2009WR008800, <http://onlinelibrary.wiley.com/doi/10.1029/2009WR008800/abstract>, 2010.
- 55 Zhang, Z., Chao, B., Chen, J., and Wilson, C.: Terrestrial water storage anomalies of Yangtze River Basin droughts observed by GRACE and connections with ENSO, *Global and Planetary Change*, 126, 35 – 45, doi:<http://dx.doi.org/10.1016/j.gloplacha.2015.01.002>, <http://www.sciencedirect.com/science/article/pii/S092181811500017X>, 2015.

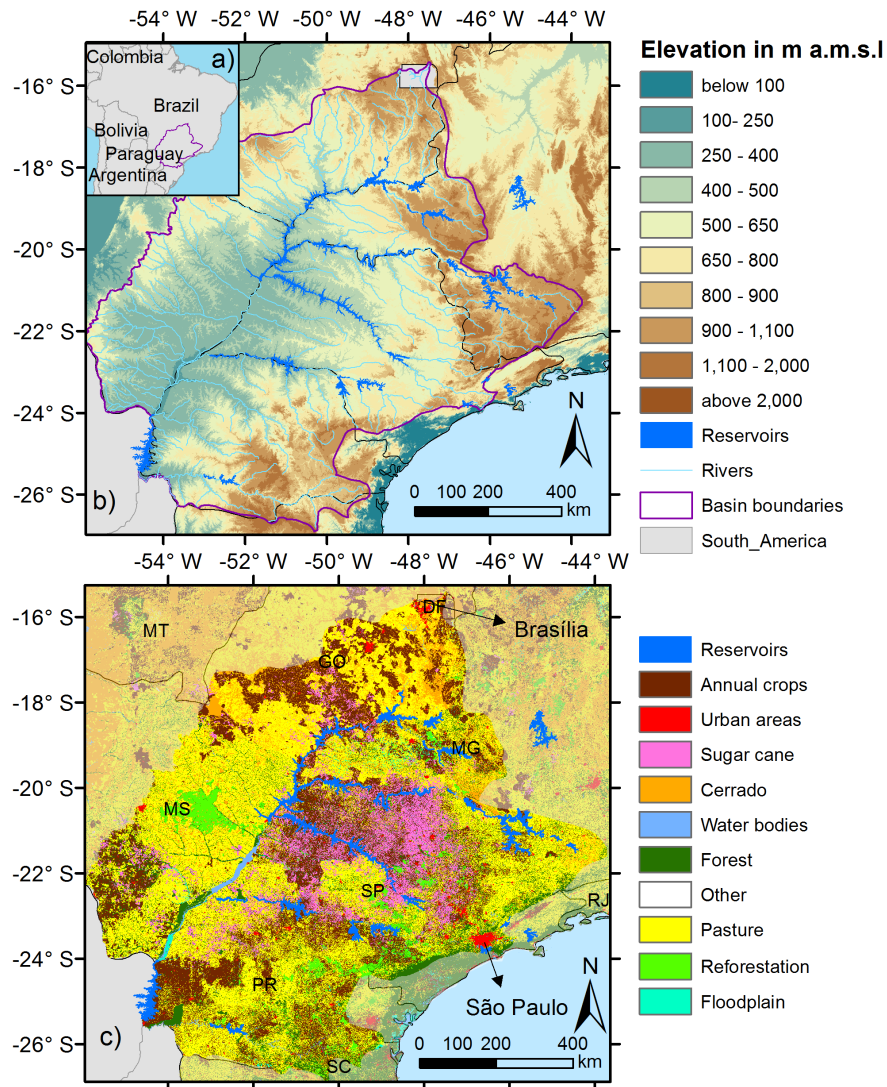


Figure 1. (a) The Paraná River Basin in the national context. (b) The analysed reservoirs are highlighted in the digital elevation map (1" horizontal resolution) (Valeriano and Rossetti, 2012) and in (c) the 2012 land use map (FEALQ, 2014). States include: Distrito Federal (DF), Goiás (GO), Minas Gerais (MG), São Paulo (SP), Paraná (PR), Santa Catarina (SC) and Mato Grosso do Sul (MS).

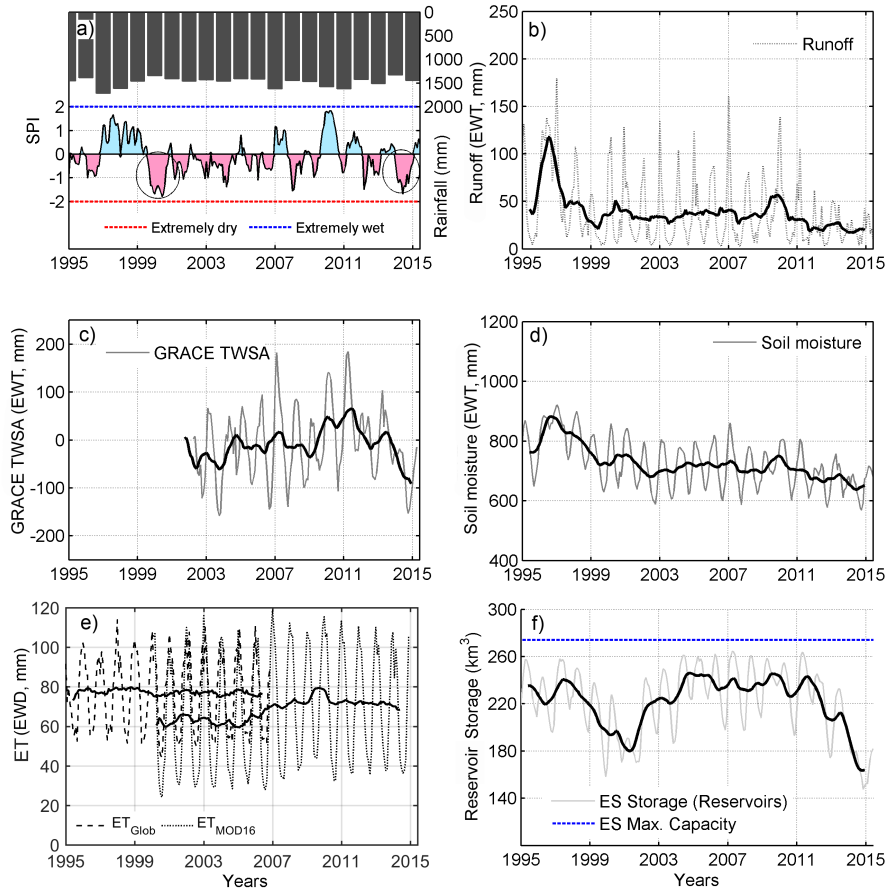


Figure 2. Time series of (a) rainfall and SPI, (b) runoff, (c) GRACE total water storage anomaly (TWSA), (d) soil moisture, (e) evapotranspiration and (f) reservoir storage in the equivalent system (ES). (a) Standardized Precipitation Index (SPI) categories include: extremely wet ($SPI > 2$); severely wet ($1.5 \leq SPI < 2$); moderately wet ($1 \leq SPI < 1.5$); wet ($0.5 \leq SPI < 1$); normal ($-0.5 \leq SPI < 0.5$); moderately dry ($-1 < SPI \leq -0.5$); dry ($-1.5 < SPI \leq -1$); severely dry ($-2 < SPI \leq -1.5$); extremely dry ($SPI < -2$). (b) runoff, (c) GRACE total water storage anomaly (TWSA) and (d) soil moisture are expressed in equivalent water thickness (EWT).

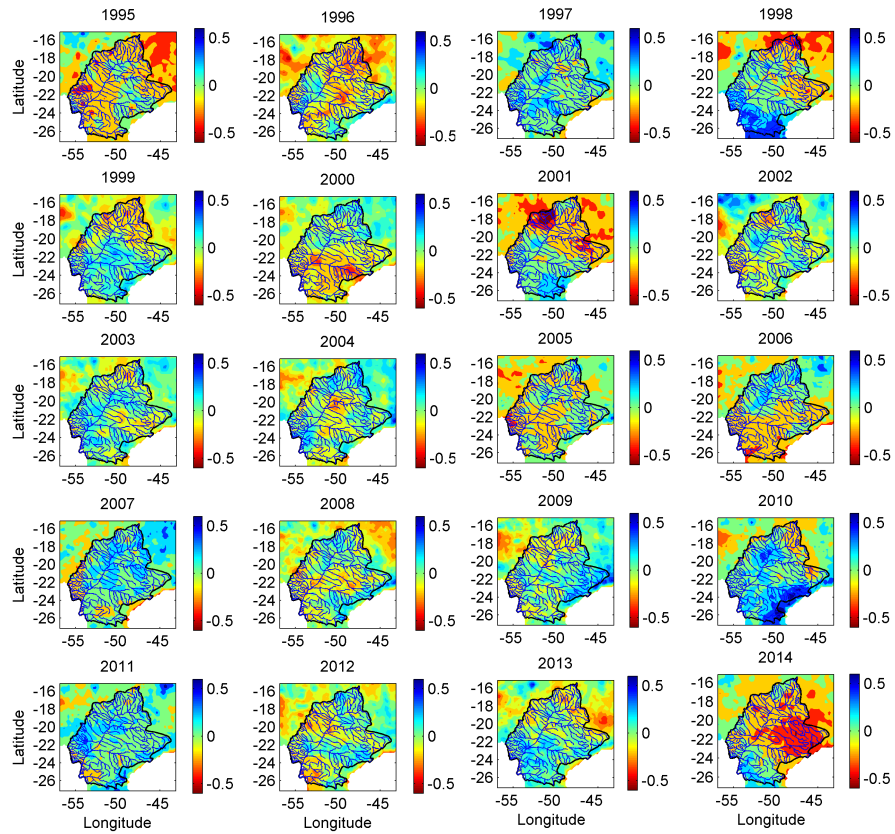


Figure 3. Rainfall anomaly relative to the 1982–2015 mean for 20 analysed water years (Sep–Aug).

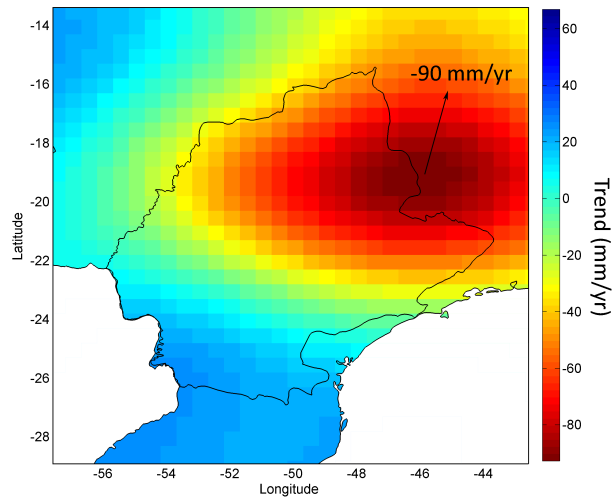


Figure 4. Spatial trends of TWSA between Apr 2011 and Apr 2015

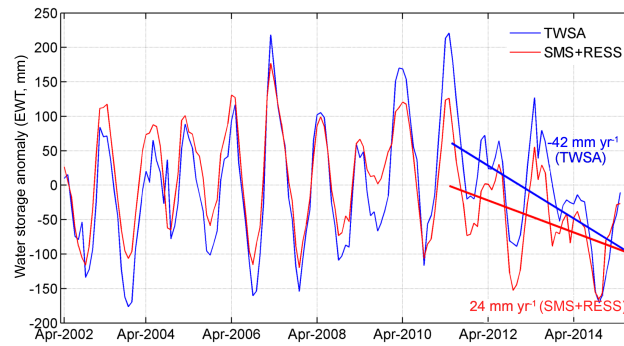


Figure 5. Water Storage Anomalies from GRACE TWSA, soil moisture storage (SMS) and reservoir storage (RESS), all expressed as equivalent water thickness.

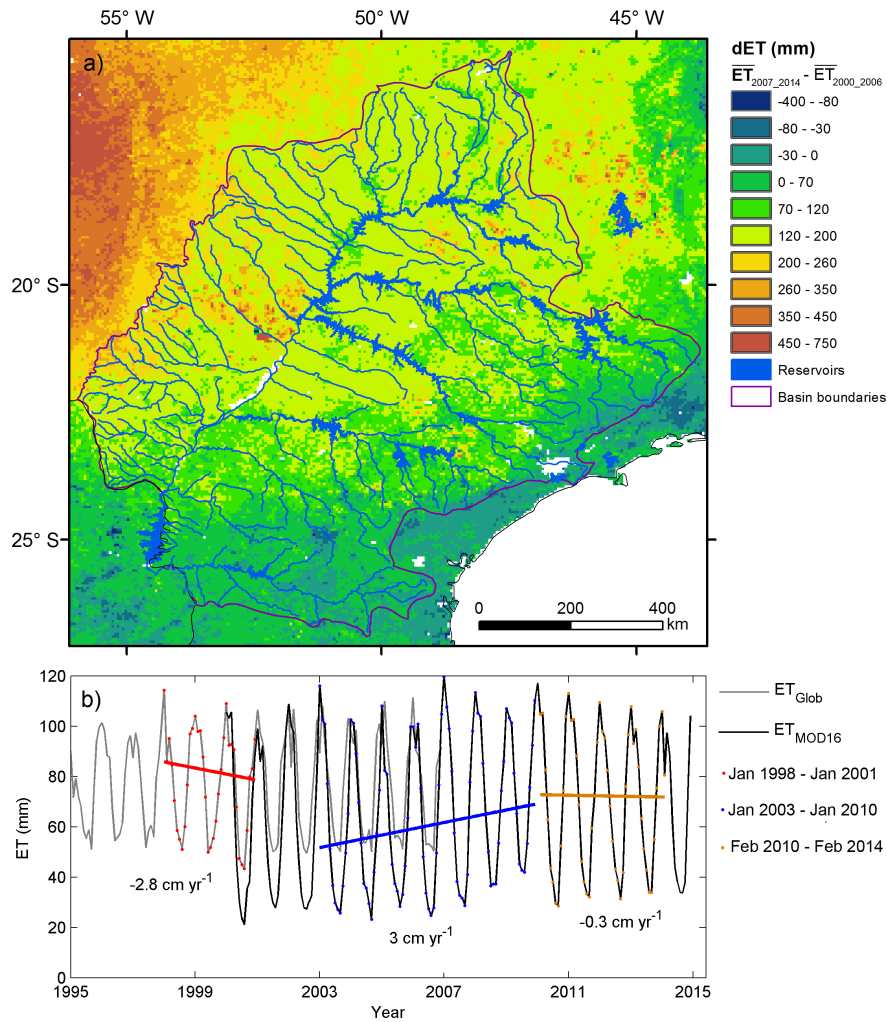


Figure 6. (a) Changes between the mean annual ET from 2007 to 2014 and 2000 to 2006; (b) short-term trends of ET in the Paraná basin

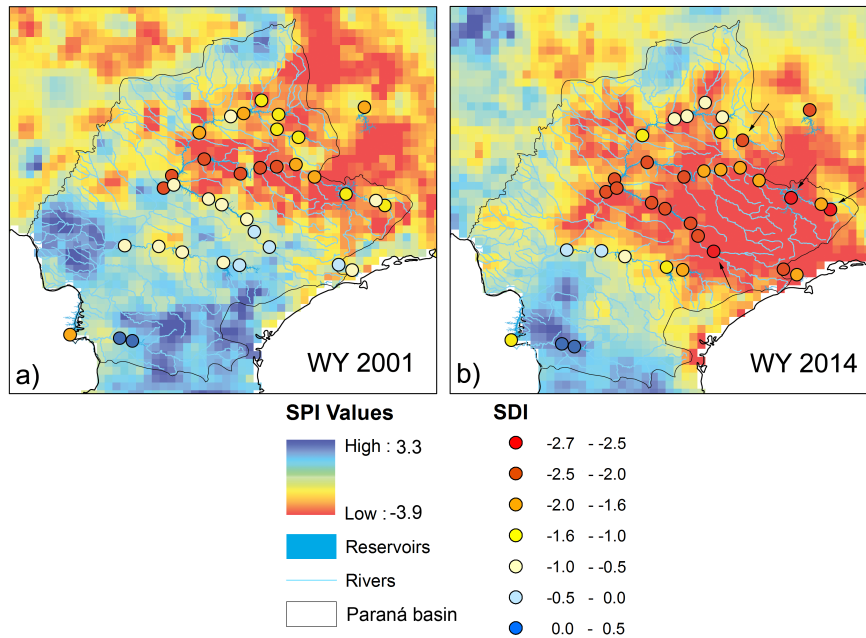


Figure 7. Spatial variation of the Standardized Precipitation Index (SPI) and Streamflow Drought Index (SDI) in the period of two droughts. SPI and SDI are shown for the water years of 2000 (Sep 2000 to Aug 2001) and 2014 (Sep 2013 to Aug 2014).

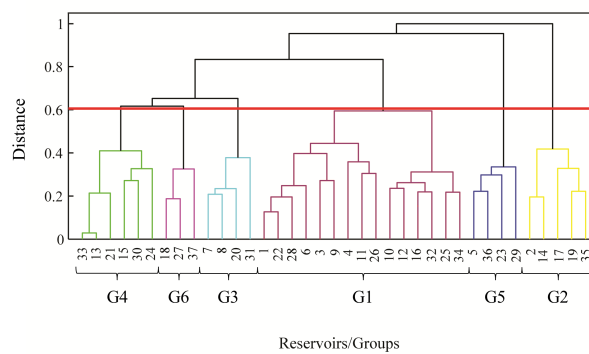


Figure 8. Dendrogram plot showing the hierarchical cluster tree. The distance between individual clusters is given by the height of the links. The red horizontal line indicates the maximum cluster distance (MCD) adopted to determine the clusters.

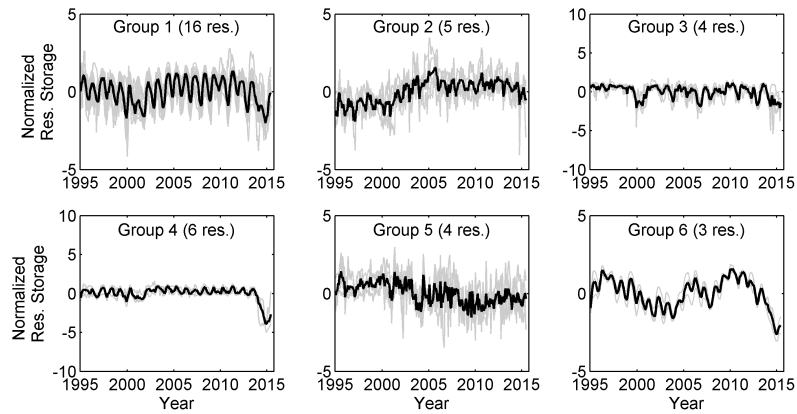


Figure 9. Time series of monthly reservoir storage of the 6 reservoir groups. Individual reservoirs are in light grey. Black lines show the group average.

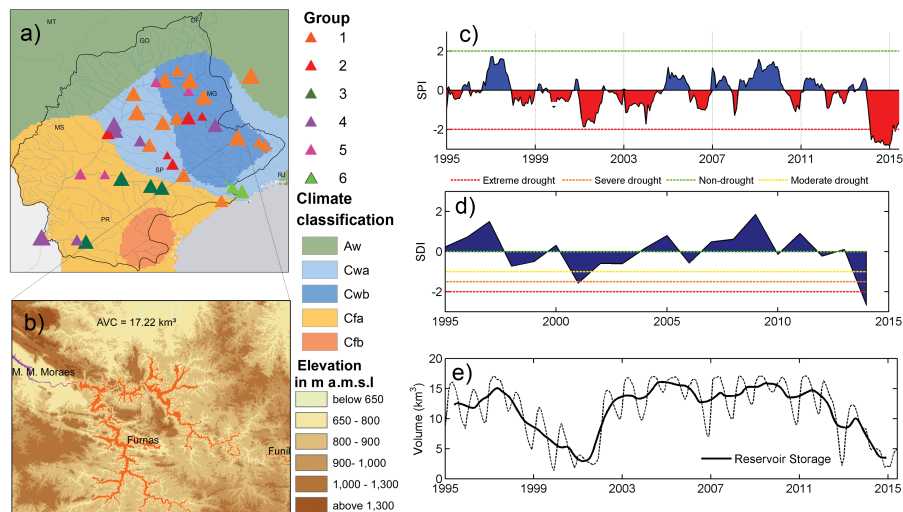


Figure 10. (a) The 37 analyzed reservoirs in the context of the Paraná Basin clustered in six groups and the number of elements per group. (b) Example of a typical reservoir from group 1 (16 reservoirs): Furnas hydroelectric power plant (HEP). Time series of monthly rainfall relative to the contributing area of Furnas HEP and inflow to Furnas reservoir were used to derive the Standardized Precipitation Index (SPI) (c) and Streamflow Drought Index (SDI) (d). Furnas monthly storage is shown in km³ (e). Hydrologic dry conditions are defined by the following states: $SDI \geq 0$: non-drought, $-1 \leq SDI < 0$: Mild drought, $-1.5 \leq SDI < -1$: Moderate drought, $-2 \leq SDI < -1.5$: Severe drought and $SDI < -2$: extreme drought.