

Rapid surface water volume estimations in beaver ponds

Daniel J. Karran¹, Cherie J. Westbrook¹, Joseph M. Wheaton², Carol A. Johnston³, Angela Bedard-Haughn⁴

¹Department of Geography and Planning, Centre for Hydrology, University of Saskatchewan, Saskatoon, SK S7N 5C8, Canada

²Department of Watershed Sciences, Utah State University, Logan, UT 84322-5210, USA

5 ³Department of Natural Resource Management, South Dakota State University, Brookings, SD 57007, USA

⁴Department of Soil Science, University of Saskatchewan, Saskatoon, SK S7N 5A8, Canada

Correspondence to: Daniel J. Karran (daniel.karran@usask.ca)

Abstract. Beaver ponds are surface water features that are transient through space and time. Such qualities complicate the inclusion of beaver ponds in local and regional water balances, and in hydrological models, as reliable estimates of surface water storage are difficult to acquire without time and labour intensive topographic surveys. A simpler approach to overcome this challenge is needed, given the abundance of the beaver ponds in North America, Eurasia and southern South America. We investigated whether simple morphometric characteristics derived from readily available aerial imagery or quickly measured field attributes of beaver ponds can be used to approximate surface water storage among the range of environmental settings in which beaver ponds are found. Studied were a total of 40 beaver ponds from four different sites in North and South America. The Simplified V-A-h approach, originally developed for prairie potholes, was tested. With only two measurements of pond depth and corresponding surface area, this method estimated surface water storage in beaver ponds within 5% on average. Beaver pond morphometry was characterized by a median basin coefficient of 0.91, and dam length and pond surface area were strongly correlated with beaver pond storage capacity, regardless of geographic setting. These attributes provide a means for coarsely estimating surface water storage capacity in beaver ponds. Overall, this research demonstrates that reliable estimates of surface water storage in beaver ponds only requires simple measurements derived from aerial imagery and/or brief visits to the field. Future research efforts should be directed at incorporating these simple methods into both broader beaver-related tools and catchment scale hydrological models.

1 Introduction

The volume of water stored at the surface of wetlands, ponds and lakes (as a function of stage) is of great concern to those responsible for assessing risks and balancing water supplies to societal demands. Arriving at reliable estimates of such storage is difficult without some knowledge of the feature's morphometry; i.e., information that is often time consuming and impractical to acquire, especially when the features are numerous and transient through space and time (Milly et al., 2008). This is particularly true for beaver ponds owing to their cyclic creation and abandonment.

30 Beaver dams and their associated ponds are ubiquitous in streams and wetlands in the northern hemisphere and southern South America (Whitfield et al. 2015). Beaver dam densities have been reported to exceed 40 dams per kilometer (Macfarlane et al., 2015), making them one of the most frequent obstructions to flowing water (Naiman et al., 1986; Pollock et al., 2003). Beaver dams increase open water area within watersheds (Hood and Bayley, 2008) and ponds bring numerous ecosystem benefits (Johnston, 2011). But, beaver ponds can also be viewed as burdensome or even dangerous from an anthropomorphic perspective (Butler and Malanson, 2005; Green and Westbrook, 2009). Such concerns, whether positive or negative, generally centre around the pond's capacity to store water and sediment, highlighting the need for quick and accurate surface water storage estimation methods.

Numerous hydrological investigations have sought to estimate surface water storage in other types of wetlands (Trigg et al., 2014; Xu and Singh, 2004). For hydrological modellers, an ideal approach is one that overcomes the need for often time-intensive topographic surveys and that is more practical for use in models at varying scales and locations. Previous studies have set about this by defining statistical relationships between surface area and volume for wetlands of specific physiographic regions (Gleason et al., 2007; Hubbard, 1982; Lane and D’Amico, 2010; Wiens, 2001). Such approaches have been found useful for modelling entire watersheds (Gleason et al., 2007), but limited for estimating storage in individual wetlands because depth and basin morphometry (i.e. surface area, volume, depth) are not considered (Huang et al., 2011; Lane and D’Amico, 2010; Wiens, 2001). Brooks and Hayashi (2002) presented an equation that includes depth and basin morphometry, but to use it, basin morphometry must be predefined and no such information yet exists for beaver ponds.

Another approach, the Simplified Volume-Area-Depth (V-A-h) method (Hayashi and van der Kamp, 2000), accounts for depth and calculates basin morphometry for each individual wetland. Requiring only two measurements of depth and surface area, it has been shown to provide reliable estimates of surface water storage in the pothole wetlands of the North American prairies for which it was designed (Minke et al., 2010). Prairie potholes are depressional wetlands that have fairly regular shapes, i.e. concave profiles with smooth slopes. Beaver ponds, by contrast, typically encompass a bathymetry that is far more complex because their size and shape is controlled by the dimensions of the dam and the land surface that becomes flooded upon dam establishment (Johnston and Naiman, 1987). Whether statistical or analytical approaches can reliably estimate water storage in beaver ponds has yet to be determined. Our goal was thus to explore tools useful for estimating surface water storage in beaver ponds. We studied beaver ponds across much of their habitat range and: i) evaluated the utility of the Simplified V-A-h method in estimating surface water storage; ii) evaluated correlations between surface water storage and beaver pond morphometry; and, iii) described beaver pond morphometry in relation to surface water storage capacity.

2 Methods

2.1 The Simplified V-A-h method

The Simplified V-A-h method is based on a simple power equation (Hayashi and van der Kamp, 2000), where the area of a pond (A), at a given height above the pond bottom (h), is described as:

$$A = s \left(\frac{h}{h_0} \right)^{2/p}, \quad (1)$$

where h_0 is the unit height of the water surface (e.g. 1 m for SI units), s is a scaling coefficient that represents the area of a circle (m^2) with a radius that corresponds to h_0 , and p is a dimensionless morphometry coefficient that represents the shape of the bathymetric curve (i.e. the area-depth relationship of the pond). The volume of the pond is then determined by integrating all the area profiles below h to give:

$$V(h) = \int_0^h s \left(\frac{h^*}{h_0} \right)^{2/p} dh^* = \left(\frac{s}{1 + 2/p} \right) \left(\frac{h^{1+2/p}}{h_0^{2/p}} \right). \quad (2)$$

Using Eq. (1) and Eq. (2) requires parameterizing the s and p coefficients. The Simplified V-A-h method arrives at these values by rearranging Eq. (1) to give (Minke et al., 2010):

$$s = A_1 \left(\frac{h_1}{h_2} \right)^{-2/p}, \quad (3)$$

And

$$p = 2 \left(\frac{\text{Log} \left(\frac{h_1}{h_2} \right)}{\text{Log} \left(\frac{A_1}{A_2} \right)} \right), \quad (4)$$

where A_1 and A_2 are surface areas of the pond at corresponding depths of h_1 and h_2 , respectively, and $h_1 < h_2$. With only two measurements of area and depth in time, Eq. (3) and Eq. (4) can be used to calculate s and p coefficients that are then reinserted into Eq. (1) and Eq. (2) to define the entire area-depth and volume-depth relationship of the pond.

5 2.2 Beaver pond morphometry

2.2.1 Metrics for surface water volume estimations

A beaver pond's capacity to store surface water is defined simply by its bathymetry, and can be directly calculated if an accurate topographic survey is available. The problem here relates to how well we can approximate that volume given some simple measures of the dam and pond dimensions. To discover if metrics exist, a series of morphometric variables were generated in addition to the p coefficient described in Eq. (1). They include: the maximum dam height (h_{\max}) defined as the difference in elevation (m) between the dam crest and the lowest point in the pond; the maximum surface area (A_{\max}) at h_{\max} ; and, the length (m) of the dam (D_{len}) measured along its crest. Regression analysis was then used to determine if any of the variables are correlated to the maximum volume of the pond (V_{\max}).

15 2.2.2 Morphometric analysis

Understanding the underlying mechanics of the Simplified V-A-h method and how morphometry relates to a pond's capacity to store water requires a deeper analysis of the bathymetric curve. The bathymetric curve is equivalent to the hypsometric curve defined by Strahler (1952) as the ground surface area of a landmass with respect to elevation. To compare curves for ponds of different size and relief, it is necessary to express the variables as relative depth (R_D) and relative area (R_A) as:

$$R_D = \frac{h}{h_{\max}}, \quad (5)$$

20 and

$$R_A = \frac{a}{A_{\max}}, \quad (6)$$

where, h is the stage (m) elevation of the pond and a is the corresponding surface area (m^2) at any given h . For ease of visual interpretation, we express the bathymetric curve as R_D vs. $1-R_A$ (Fig. 1). Power functions described by Eq. (1) can then be fit to a bathymetric curve with the following equation:

$$R_D = (1 - R_A)^{p/2}, \quad (7)$$

where the p coefficient here is equal to the p coefficient in Eq. (1). This allows for a visual aid in the analysis of error by superimposing estimated curves produced via either Eq. (1) or Eq. (4) to the pond's actual bathymetric curve. It also eliminates issues of scale between different ponds so that bathymetric curves can be visually compared to one another.

From the relative bathymetric curve, it is possible to compute the Bathymetric Integral (B_I), a modified form of the hypsometric integral defined as the measure of landmass volume with respect the entire reference solid created by the maximum dimensions of the pond (Fig.1; Strahler, 1952):

$$B_I = \frac{V_{\text{land}}}{h_{\max} A_{\max}} = \int_0^1 R_A dR_D. \quad (8)$$

Equation 10 produces values between 0 and 1, with 1 representing a reference solid entirely composed of landmass. Using the B_1 , we introduce a new metric that represents the pond's bathymetric capacity to store water (B_{WC}). Since the total volume of the reference solid is comprised of either land or water, the B_{WC} , relative to the reference solid, is expressed as:

$$B_{WC} = 1 - B_1 = \frac{V_{\max}}{h_{\max}A_{\max}}. \quad (9)$$

The B_1 and B_{WC} are quantitative measurements of the pond's morphometry and capacity to store water, respectively. The value in using these metrics is that they facilitate the comparison of surface water storage capacity among beaver ponds and other wetland types.

Finally, we described the shape of the beaver pond surface using a dimensionless Shape Index (S_1), which is essentially the ratio of the pond perimeter to the circumference of a circle with the same area (Hutchinson, 1957):

$$S_1 = \frac{P}{2\sqrt{\pi A_{\max}}}, \quad (10)$$

where P is the perimeter of the pond (m). Ponds with $S_1 = 1$ have shapes that are perfectly circular, whereas ponds with $S_1 > 1$ are increasingly complex. Pond shape is an important metric as much of the interaction between surface water and groundwater happens at the shoreline (Shaw and Prepas, 1990). We chose S_1 as it is easy to interpret and enables a relative comparison between the shapes of beaver ponds and other types of wetlands (Minke et al., 2010).

2.3 V-A-h models for surface water storage estimation in beaver ponds

Three versions of the power function model described by Eq. (1) were tested in this study. They are referred to as the Full, Simplified, and Optimized models. The Simplified model is the actual test of the Simplified V-A-h method and the other two models were included to aid in the analysis of this approach.

The Full model is a power function fitted to the complete dataset of each pond's bathymetry (i.e. empirical fit). We arrive at values for s and p by fitting a simple power function, $y = ax^b$, to the pond's bathymetric curve, and assume $a = s$ and $b = 2/p$ in accordance with Eq. (1). Non-linear least squares regression was used to determine the best-fit; the ability of this model to make accurate area and volume estimates depends on its 'goodness of fit' to the dataset. Analysis of the Full model was included to: i) identify the p coefficient that best describes each beaver pond's morphometry; and, ii) assess the overall suitability of power functions to describe beaver pond bathymetry.

The Simplified model is a power function using s and p coefficients created from the same two relative measurements of depth (i.e. h_1 and h_2 as a percentage of h_{\max}) in each pond. Minke et al. (2010) evaluated the Simplified V-A-h method by applying it to two scenarios: a dry one where h_1 and h_2 are taken at 0.1 m and 25% of h_{\max} , and a wet one where h_1 and h_2 are taken at 50% and 75% of h_{\max} . They found that estimation errors were lowest using the wet scenario; therefore, we chose this scenario to simulate the application of the Simplified V-A-h method as it may be practically used in the field.

The Optimized model differs from the Simplified model through parameterizing coefficients via the optimum combination of h_1 and h_2 for each pond. This required calculating s and p coefficients at every possible combination of h_1 and h_2 along the bathymetric curve (Note: h_1 and h_2 are expressed as a percentage of h_{\max} from 1–100; therefore, the total number of combinations where $h_1 < h_2$ is 5000 for each pond). Each set of s and p coefficients was then reinserted into Eq. (1) and Eq. (2) to estimate area

and volume, respectively, and the set that produced the least combined area and volume error was selected as the optimum. The Optimum model was included in this study to discover how best to use the Simplified V-A-h method with regards to differences in pond morphometry.

- 5 Error for all three models was evaluated using root mean square error (E_{RMS}), defined as:

$$E_{RMS} = \sqrt{\frac{1}{m} \sum_{i=1}^m (D_{ACT} - D_{EST})^2}, \quad (11)$$

where m is the number of data points, D_{ACT} is the point on the actual bathymetric curve calculated from the pond itself, and D_{EST} is the point on the estimated bathymetric curve derived from the s and p coefficients at a given combination of h_1 and h_2 . Finally, to allow for coherent comparisons of error among the different beaver ponds, the magnitude of error, referred to as A_{ERR} (%) for area and V_{ERR} (%) for volume, was calculated by dividing the E_{RMS} by the actual area and volume of the pond at 80% of h_{max} .

- 10 This particular depth was chosen to avoid inconsistencies in error magnitudes that arise when the evaluation depth is set too close to the minimum and maximum (Minke et al., 2010).

2.4 Test sites

Forty beaver ponds were selected for this study and simulated in digital elevation models (DEMs). Our sample design captured the range of structures built by beaver along streams with mineral and organic substrates in both mountainous and lowland terrain. Beaver ponds were thus analyzed from multiple locations where bathymetric data existed, which included: Kananaskis Provincial Park, Alberta, Canada; Escondido, Tierra del Fuego, Argentina; the Logan River watershed, Utah, USA; and, Voyageurs National Park, Minnesota, USA. Details of the location, terrain, number of ponds, survey methods, and survey resolution for each site are provided in (Table 1).

2.5 DEM creation and manipulation for variable calculations

20 Sites selected for this study were former beaver ponds that had drained sufficiently to either reveal pond bottom bathymetry or allow it to be surveyed. Beaver ponds extracted from LiDAR, when available, were fully drained with visible relic dams, whereas some ponds surveyed by total station and rtkGPS often were still full with water up to their crest elevations, but not enough to impede point collection by wading. DEMs that relied on total station and rtkGPS surveys were created with Surfer® v10 (Golden Software, Colorado) using ordinary kriging. The beaver ponds were then isolated from the unneeded areas of the DEM by extracting all the points in the raster below and upstream of the dam crest (i.e. h_{max}). This was done in ArcGIS v10.2 (ESRI, 2015) as was the calculation of the morphometric variables. The $V-h$ relationship and bathymetric curve of each pond was calculated at 5 cm increments using a script written in Python™ that utilizes the 'volume' feature of ArcGIS Toolbox. The $V-h$ relationship and bathymetric curve of each pond were the primary inputs for the three models, which were built and run in R Studio (RStudio Team, 2015). Finally, the bathymetric curve for each pond was established using linear interpolation to create 30 100 points, i.e. 1–100% of h_{max} .

3 Results

3.1 Beaver pond morphometry

Pond morphometric characteristics are provided in Table 2 and examples of the DEMs from each location are provided in Fig. 2. The 40 ponds well represented the various types of beaver ponds that are created in riverine and wetland habitats (Baker and Hill, 2003), with max dam heights (h_{\max}) ranging from 0.25–2 m and dam lengths (D_{len}) spanning 3–308 m, with medians of 0.83 m and 40 m, respectively. Pond volumes (V_{\max}) ranged between 1–9,001 m³ and showed strong power correlations to D_{len} , h_{\max} and A_{\max} (Fig. 3). Among the ponds, there was considerable variability in shape as S_I values ranged from 1.5–5.3 (mean = 2.6). No strong correlations (i.e. $-0.10 > R^2 < 0.10$) were found between S_I and the other morphometric variables used in this study (i.e. p , B_I , B_{WC} , D_{len} , h_{\max}).

10

The p coefficients for the beaver ponds followed a log normal distribution, and ranged from 0.45–2.58 (median of 0.91) (Fig. 4). Of the 40 beaver ponds analyzed, 70% (28) had p coefficients that were <1 , indicating that beaver ponds tend to have convex bathymetries. Most beaver ponds tended to be more convex than they are concave, given the shape of the bathymetric curves (Fig. 5) and the range of B_I (0.45–0.85; median of 0.69). In all but one case, V_{land} was greater than 50% of the total volume of space, indicating that most beaver ponds are shallow, which limits the volume of surface water they can store. This phenomenon is well described by the strong exponential relationship between the p coefficient ($R^2 = 0.96$) and B_I and B_{WC} (Fig. 6). Soil substrate type (Table 1; organic vs. mineral) did not affect the value of the p coefficient, as evidenced by a t -test ($P = 0.97$).

15

3.2 Surface water storage estimations

The Full model had the least A_{ERR} , and the Optimized model had the least V_{ERR} (Fig. 7; Table 3). The highest A_{ERR} and V_{ERR} was associated with Simplified model estimates, which also produced the greatest variability of error among the different ponds. With regards to study locations, Full V_{ERR} ranked as Escondido<Voyageurs<Logan<Kananaskis, whereas Full A_{ERR} ranked Logan<Escondido<Kananaskis<Voyageurs. Overall, the beaver ponds in Kananaskis proved most difficult to model (i.e. highest V_{ERR} and A_{ERR} overall); however, mean error for the Full model remained below 5% for both area and volume estimates.

20

25 Compared to the Full model (Fig. 7), the Simplified model had higher V_{ERR} in 65% of cases (26 ponds) and higher A_{ERR} in 98% of cases (39 ponds), whereas the Optimized model had lower V_{ERR} in 100% of cases but slightly ($<1\%$) higher A_{ERR} in 100% of cases. The optimum p coefficients for volume tended to be slightly different than the optimum p coefficients for area, which are the coefficients derived from the empirical fit of the Full model. The Optimum model proved useful for revealing the two points on the bathymetric curve that can be used to obtain the optimum p coefficient for volume estimates. Pond 7 had the largest A_{ERR} and V_{ERR} (Fig. 7), and so was selected for more detailed study (Fig. 8). The optimum points were found at the approximate location of where the empirical fit intersects with the bathymetric curve. Thus, using the optimum points in Eq. (4) computes a p coefficient that is closest to the same coefficient generated by the curve fitted by non-linear least squares regression. The points used by the Simplified model for Pond 7 fall on segments of the bathymetric curve that are farther away in distance from the empirical fit; hence, the p coefficient generated by these points creates a curve that is farther away from the bathymetric curve, which ultimately leads to a less accurate estimate of volume.

30

35

In a number of ponds, the empirical fit nearly overlapped the entire bathymetric curve, and in such cases, there were many combinations of h_1 and h_2 that produced reasonable estimates of volume. For example, Pond 10 had the lowest Full A_{ERR} and

V_{ERR} of all the beaver ponds. In this case, there were 1899 combinations of h_1 and h_2 that produced estimates with total error below 5%, and the distance between the points ranged from 1% to 84% of h_{max} . Overall, the error was not sensitive to distance between h_1 and h_2 if the points were on or near the Full fitted curve. That said, the average minimum and maximum for h_1 (for all the optimum combinations for each pond) was 18–74%, respectively, and for h_2 , it was 42–98%, respectively.

5 4 Discussion

The Simplified V-A-h method estimated surface water storage in the beaver ponds with high accuracy. Also, strong statistical relationships were found between surface water storage capacity in beaver ponds and the dimensions of the dam and pond. The beaver ponds studied have a convex shape that permits less water storage than do other open water wetland types. Surface water storage estimates can be made in beaver ponds without the need for topographic surveys if pond morphology is used instead.

10 4.1 V-A-h model performance in beaver ponds

The low Full A_{ERR} and V_{ERR} overall indicates that beaver pond morphometry is adequately described by power functions. This is because the bathymetric curve proved resilient to fluctuations in ‘elevation’ inherent to the impounded land surface. Also, the dams, intricate canals and holes that beaver create in the areas they inhabit (Hood and Larson, 2015) do not warp the shape of the bathymetric curve enough that a power function becomes inappropriate to sufficiently describe it. However, it appears that volume estimations are more resilient to aberrations in the bathymetric curve than are area estimates. The power functions in the Full model are fitted to pond bathymetry. When the power curve moves up and down, A_{ERR} will increase, but sometimes the V_{ERR} can decrease because volume is the integration of everything above the bathymetric curve. When the curve moves slightly up or down from the empirical fit, irregularities on the bathymetric curve are captured, which improves volume estimations at the sacrifice of area estimations. This explains why the Optimum p coefficients for volume are different than they are for area. It also explains why, in many cases, the Simplified model had V_{ERR} that was less than 10%, while A_{ERR} was greater than 25%. Without a complete set of pond bathymetry, it is unlikely that users of the Simplified V-A-h method would be able to discern the optimum points for h_1 and h_2 ; however, as long the chosen values for h_1 and h_2 are selected within the range identified here (i.e. 18–74% of h_{max} for h_1 and 42–98% of h_{max} for h_2), fairly accurate estimates of surface water storage should be expected. Overall, the Simplified model performed reasonably, exceeding 10% V_{ERR} in only three cases. Given that the Simplified V-A-h method appears to work well across the broad range of beaver pond bathymetry reported here, and across a wide range of prairie potholes (e.g. Minke et al., 2010), it should be a robust enough approach to be used other open water wetlands.

4.2 Beaver pond morphometry and surface water storage capacity

Our results show that p coefficients in beaver ponds are lower overall than those reported in prairie wetlands (Hayashi and van der Kamp, 2000) and those reported in forest pools in New England (Brooks and Hayashi, 2002). Because of the strong exponential relationship between p coefficients and B_{WC} , we can conclude that beaver ponds typically store less water. For example, the prairie potholes studied by Hayashi and van der Kamp (2000) had a median p coefficient of 3.22. Using Fig. 6, this p coefficient is equivalent to a B_{WC} of 0.61, which is almost double the median beaver pond B_{WC} equivalent of 0.32. The most likely explanation for this is the ontogeny of beaver ponds compared to other open water wetland types. Beaver ponds occur via inundation of an existing channel and adjacent riparian area surface, whereas prairie potholes are bowl shaped geomorphic depressions created by the deposition of glacial till (Richardson et al., 1994). These different origins are reflected in the shape of the bathymetric curves, and they also explain the strong statistical relationships between surface water storage capacity and the

dimensions of the dam and pond. The stream channel in Fig. 3, for example, is represented on the far-right side of the bathymetric curve. Beaver ponds built on deeper and narrower stream channels tend to have lower p coefficients than ponds built on wider, less constrained channels. This happens because there is a rapid expansion of surface area inundated as the dam exceeds the height and width of the stream channel; a phenomenon that is well described by the ‘power’ relationships between D_{len} , h_{max} , A_{max} and V_{max} . Pond 12 is a good example of this; the p coefficient was highest (2.58) and a distant outlier compared to the other ponds. The uniqueness of this site is that the beaver built a small dam (0.3 m) with excavated peat and impounded groundwater seepage rather than damming channel flows. Even though the dam is relatively small, it has a large B_{WC} (0.55) relative to the other ponds because the dam is entirely dedicated to impounding a mostly flat land surface. In contrast, Pond 6, which was also built in a peatland, has a much lower B_{WC} (0.26) because most of the dam height (2 m) is dedicated to impounding water in an incised stream channel. An advantage of using the B_{WC} metric over pond volumes is that it allows for a comparison of surface water storage capability in a way that is independent of pond size and shape.

4.3 Tools for surface water storage estimation in beaver ponds

There are a variety of ways our results can be used to estimate surface water storage in beaver ponds under different data availability scenarios. In situations where only aerial or remotely sensed imagery is available (i.e. world-wide), dam length and pond area can be approximated and used in the generalized power regression relationships presented in Fig. 3. This is a quick and easy way to incorporate beaver pond surface water storage capacity into land-use planning decisions and watershed-scale hydrological models. However, this approach is not suitable for detailed study in individual beaver ponds as it does not account for pond morphometry (Huang et al., 2011; Wiens, 2001). Including dam height should improve estimates. Measuring dam height in the field is quick and straight forward, but it can also be reasonably approximated with remotely sensed imagery alone using spectral-depth correlation methods (e.g. Passalacqua et al., 2015). If dam heights are available, we recommend using our median p coefficient (0.91) for beaver ponds in the equation presented by Brooks and Hayashi (2002):

$$V_{\text{max}} = \frac{A_{\text{max}} \times h_{\text{max}}}{1 + 2/p}. \quad (12)$$

This equation is a modified form of Eq. (2) used to estimate surface water storage capacity. It is easily incorporated into spatially distributed hydrological models. Fang et al. (2010) had success in using this approach, albeit for prairie potholes, in their Cold Regions Hydrological Model.

With a moderate amount of data, the Simplified V-A-h method offers an alternative that produces surface water storage estimates with minimal error. The advantage of this method over the others is that it is robust, it is customized to each pond’s basin morphometry, and it calculates a coefficient of scale (i.e. s coefficient) for use in estimating surface water storage across the range of pond stages, unlike the generalized power regression models and Eq. (12), which are limited to estimates of V_{max} . Combined with a few field visits and something as simple as automated water level observations, the Simplified V-A-h method can be a powerful tool. But, it also has practical application in relatively data rich environments. For example, many LiDAR datasets are collected when beaver ponds are not fully drained. If the beaver pond is not entirely full, the measurements for A_2 and h_2 can be measured within the vertical distance between the crest of the dam and the surface of the water, thus allowing an appropriate p coefficient to be derived. Furthermore, the Simplified V-A-h method is increasingly practical with the advent of new technologies. For example, Structure from Motion software facilitates the creation of high resolution DEMs from ordinary photographs (Javernick et al., 2014). Theoretically, with both tools, one field visit to collect a few pictures and depths measurements should be all that is needed to make reliable estimates of wetland surface water storage.

4.4 Implications of study results

The results of our study provide some simple tools that enable surface water storage in beaver ponds to be estimated without the need for topographic surveys. This allows environmental managers to better assess the risks and benefits associated with beaver ponds that appear on landscapes, and allows the easy inclusion of the surface water storage component of beaver ponds into hydrological models at various scales. This study also demonstrates that beaver pond morphometry is different than other types of wetlands, which requires consideration. For example, based on this analysis we might expect beaver ponds to reach their capacity faster during rainfall events, while impounding larger surface areas than depressional wetlands. Although we show that some beaver ponds store less surface water than other wetland types, their relevance to local and regional water balances should not be underestimated. Beaver population recovery, post fur trade, has led to the creation of between 9,494–42,236 km² of new beaver ponds globally (Whitfield et al. 2014). Using Whitfield et al.'s (2014) estimates and our median p coefficient (0.91) and median dam height (0.83 m) in Eq. (12), we crudely estimate that between 2.5 and 11 km³ of water are stored in beaver ponds.

5 Conclusions

The primary goal of this study was to test the utility of readily applicable tools for estimating surface water storage in beaver ponds. We examined whether the Simplified V-A-h method was appropriate for this purpose and described beaver pond morphology to explore its relationship to surface water storage capacity. A number of valuable insights were revealed. The Simplified V-A-h method proved to be a simple and effective tool as it was able to estimate beaver pond surface water storage with an average volume error of 5%. The median basin coefficient for beaver ponds was 0.91, suggesting that they tend to have a convex basin morphometry, and that they typically store less water than other wetlands studied in the same way. Pond capacity was strongly correlated to the dimensions of the dam and surface area of the pond, further cementing the idea that beaver ponds exhibit characteristic traits in pond morphometry that make reliable estimates of surface water storage possible without the need for topographic surveys. Future research efforts should be directed at applying these simple methods more remotely, and incorporating them into both broader beaver-related planning tools and catchment-scale hydrological models.

Acknowledgements We thank Carlie Elliott, Kirsten Allen, Larisa Barber, Kenny DeMeurichy, Ryan Lokteff, and Konrad Hafen for field assistance. We also thank the staff and students of the Centre for Hydrology, particularly Sebastian Krogh, Chris Marsh, and Phillip Harder for their assistance with computer programming. The University of Calgary Biogeoscience Institute provided accommodation and access to their facilities. The project was funded through a Natural Sciences and Engineering Research Council (NSERC) of Canada Doctoral Graduate scholarship, an NSERC Discovery Grant (RGPIN 32837-20), a Global Institute for Water Security grant, a United States Department of Agriculture Grant (NIFA Hatch Project SD00H505-15), and a National Science Foundation Grant (DEB-1349240). The Utah field data collection was funded by the United States Forest Service (Cooperative Agreement 09-CS-1300001885391 awarded to Utah State University, Award 100030) and facilitated by USFS partner Brett Roper. Research in Argentina was conducted under SDSyA Resolution #414/2013 and facilitated by Drs. Christopher Anderson and Alejandro Valenzuela.

References

Baker, B. W. and Hill, E. P.: Beaver (*Castor canadensis*), in *Wild Mammals of North America: Biology, Management, and Conservation*, edited by G. Feldhamer, B. Thompson, and J. Chapman, pp. 288–310, The John Hopkins University Press,

- Baltimore, Maryland., 2003.
- Brooks, R. T. and Hayashi, M.: Depth-Area-Volume and Hydroperiod Relationships of Ephemeral (Vernal) Forest Pools in Southern New England, *Wetlands*, 22(2), 247–255, 2002.
- Butler, D. R. and Malanson, G. P.: The geomorphic influences of beaver dams and failures of beaver dams, *Geomorphology*, 5 71(1–2), 48–60, doi:10.1016/j.geomorph.2004.08.016, 2005.
- ESRI: ArcGIS Desktop, [online] Available from: <http://www.esri.com>, 2015.
- Fang, X., Pomeroy, J. W., Westbrook, C. J., Guo, X., Minke, A. G. and Brown, T.: Prediction of snowmelt derived streamflow in a wetland dominated prairie basin, *Hydrol. Earth Syst. Sci.*, 991–1006, doi:10.5194/hess-14-991-2010, 2010.
- Gleason, R. a, Tangen, B. a, Laubhan, M. K., Kermes, K. E. and Euliss, N. H.: Estimating water storage capacity of existing and 10 potentially restorable wetland depressions in a subbasin of the Red River of the North., 2007.
- Green, K. C. and Westbrook, C. . J.: Changes in riparian area structure, channel hydraulics, and sediment yield following loss of beaver dams, *BC J. Ecosyst. Manag.*, 10(1), 68–79, 2009.
- Hayashi, M. and van der Kamp, G.: Simple equations to represent the volume-area-depth relations of shallow wetlands in small topographic depressions, *J. Hydrol.*, 237(1–2), 74–85, doi:10.1016/S0022-1694(00)00300-0, 2000.
- 15 Hood, G. a. and Larson, D. G.: Ecological engineering and aquatic connectivity: a new perspective from beaver-modified wetlands, *Freshw. Biol.*, 60(1), 198–208, doi:10.1111/fwb.12487, 2015.
- Hood, G. A. and Bayley, S. E.: Beaver (*Castor canadensis*) mitigate the effects of climate on the area of open water in boreal wetlands in western Canada, *Biol. Conserv.*, 141(2), 556–567, doi:10.1016/j.biocon.2007.12.003, 2008.
- Huang, S., Young, C., Feng, M., Heidemann, K., Cushing, M., Mushet, D. M. and Liu, S.: Demonstration of a conceptual model 20 for using LiDAR to improve the estimation of floodwater mitigation potential of Prairie Pothole Region wetlands, *J. Hydrol.*, 405(3–4), 417–426, doi:10.1016/j.jhydrol.2011.05.040, 2011.
- Hubbard, D. E.: Surface area-volume relationship of wetland basins in the interior of the Coteau Des Prairies, *Proc. South Dakota Acad. Sci.*, 61, 154–158, 1982.
- Hutchinson, G. E.: *A Treatise on Limnology*, Vol. 1. “Geology, Physics and Chemistry,” John Wiley and Sons, New York., 25 1957.
- Javernick, L., Brasington, J. and Caruso, B.: Modeling the topography of shallow braided rivers using Structure-from-Motion photogrammetry, *Geomorphology*, 213, 166–182, doi:10.1016/j.geomorph.2014.01.006, 2014.
- Johnston, C. A.: Beaver Wetlands, in *Inland Wetlands*, pp. 161–171., 2011.
- Johnston, C. A. and Naiman, R. J.: Boundary dynamics at the aquatic-terrestrial interface: The influence of beaver and 30 geomorphology, *Landsc. Ecol.*, 1(1), 47–57, doi:10.1007/BF02275265, 1987.
- Lane, C. R. and D’Amico, E.: Calculating the ecosystem service of water storage in isolated wetlands using LiDAR in north central Florida, USA, *Wetlands*, 30(5), 967–977, doi:10.1007/s13157-010-0085-z, 2010.
- Macfarlane, W. W., Wheaton, J. M., Bouwes, N., Jensen, M. L., Gilbert, J. T., Hough-Snee, N. and Shivik, J. A.: Modeling the capacity of riverscapes to support beaver dams, *Geomorphology*, doi:10.1016/j.geomorph.2015.11.019, 2015.
- 35 Milly, P. C. D., Betancourt, J., Falkenmark, M., Hirsch, R. M., Kundzewicz, Z. W., Lettenmaier, D. P. and Stouffer, R. J.: Climate change. Stationarity is dead: whither water management?, *Science*, 319, 573–574, doi:10.1126/science.1151915, 2008.
- Minke, A. G., Westbrook, C. J. and van der Kamp, G.: Simplified volume-area-depth method for estimating water storage of prairie potholes, *Wetlands*, 30(3), 541–551, doi:10.1007/s13157-010-0044-8, 2010.
- Naiman, R. J., Melillo, J. M. and Hobbie, J. E.: Ecosystem alteration of boreal forest streams by beaver (*Castor Canadensis*), 40 *Ecology*, 67(5), 1254–1269 [online] Available from: <http://www.jstor.org/stable/1938681>, 1986.

- Passalacqua, P., Belmont, P., Staley, D. M., Simley, J. D., Arrowsmith, J. R., Bode, C. A., Crosby, C., DeLong, S. B., Glenn, N. F., Kelly, S. A., Lague, D., Sangireddy, H., Schaffrath, K., Tarboton, D. G., Wasklewicz, T. and Wheaton, J. M.: Analyzing high resolution topography for advancing the understanding of mass and energy transfer through landscapes: A review, *Earth-Science Rev.*, 148, 174–193, doi:10.1016/j.earscirev.2015.05.012, 2015.
- 5 Pollock, M. M., Heim, M. and Werner, D.: Hydrologic and geomorphic effects of beaver dams and their influence on fishes, *Am. Fish. Soc. Symp.*, 37, 213–233, 2003.
- Richardson, J. L., Arndt, J. L. and Freeland, J.: Wetland soils of the prairie potholes, *Adv. Agron.*, 52(C), 121–171, doi:10.1016/S0065-2113(08)60623-9, 1994.
- RStudio Team: Integrated Development for R, [online] Available from: <http://www.rstudio.com/>, 2015.
- 10 Shaw, R. D. and Prepas, E. E.: Groundwater-lake interactions: II. Nearshore seepage patterns and the contribution of groundwater to lakes in central Alberta, *J. Hydrol.*, 119, 121–136, 1990.
- Strahler, A. N.: Hypsometric (area - altitude) analysis of erosional topography, *Geol. Soc. Am. Bull.*, 63(11), 1117–1142, doi:10.1130/0016-7606(1952)63, 1952.
- Trigg, M. A., Cook, P. G. and Brunner, P.: Groundwater fluxes in a shallow seasonal wetland pond: The effect of bathymetric uncertainty on predicted water and solute balances, *J. Hydrol.*, 517, 901–912, doi:10.1016/j.jhydrol.2014.06.020, 2014.
- 15 Westbrook, C. J., Cooper, D. J. and Butler, D. R.: Beaver hydrology and geomorphology, in *Treatise on Geomorphology*, vol. 12, edited by J. Shroder, D. Butler, and C. Hupp, pp. 293–306, Academic Press, San Diego., 2013.
- Wiens, L.: A surface area-volume relationship for prairie wetlands in the upper Assiniboine River Basin, Saskatchewan, Can. *Water Resour. J.*, 1784(May), doi:10.4296/cwrj2604503, 2001.
- 20 Woo, M. and Waddington, J. M.: Effects of beaver dams on subarctic wetland hydrology, *Arctic*, 43(3), 223–230 [online] Available from: <http://www.jstor.org/stable/40511261> ., 1990.
- Xu, C.-Y. and Singh, V. P.: Review on regional water resources assessment models under stationary and changing climate, *Water Resour. Manag.*, 18(6), 591–612, doi:10.1007/s11269-004-9130-0, 2004.

TABLES

Table 1 Site locations, characteristics and details of topographic pond surveys. "n" is the number of ponds studied at each site

Site	Latitude and Longitude (°, ')	n	Soil Substrate Type	Terrain	Survey method	DEM resolution (m)
Kananaskis Provincial Park, AB, Canada	51° 3.553' N, 114° 52.009' W	10	Organic	Mountainous	rtkGPS	1
Escondido, Tierra del Fuego, Argentina	54° 36.908' S, 67° 44.540' W	3	Organic	Mountainous	rtkGPS	1
Logan River Watershed, UT, USA	41° 50.327' N, 111° 33.668' W	14	Mineral	Mountainous	Total Station	0.1
	41° 49.568' N, 111° 34.516' W	2	Mineral	Mountainous	Total Station	0.1
	41° 48.868' N, 111° 35.553' W	5	Mineral	Mountainous	Total Station	0.1
Voyageurs National Park, MN, USA	48° 32.773' N, 93° 4.328' W	1	Organic	Lowland	LIDAR	1
	48° 27.975' N, 92° 53.864' W	3	Mineral	Lowland	LIDAR	1
	48° 30.405' N, 92° 40.331' W	1	Mineral	Lowland	LIDAR	1
	48° 31.262' N, 92° 52.794' W	1	Mineral	Lowland	LIDAR	1

Table 2 Pond morphometric characteristics, including the morphometry (p) and scaling (s) coefficient, shape index (S_1), bathymetric integral (B_1), bathymetric water capacity (B_{WC}), length of the dam (D_{len}), and maximum depth (h_{max}), area (A_{max}), and volume (V_{max}) of the ponds.

Location	Pond #	S_1	B_1	B_{WC}	p	s (m^2)	D_{len} (m)	h_{max} (m)	A_{max} (m^2)	V_{max} (m^3)
Kananaskis	1	2.05	0.75	0.25	0.69	889	164	1.50	2974	1135
	2	2.37	0.77	0.23	0.61	356	152	1.75	2006	867
	3	2.57	0.69	0.31	0.97	959	127	0.85	686	186
	4	1.79	0.77	0.23	0.61	123	27	1.50	446	163
	5	3.71	0.77	0.23	0.62	705	226	1.95	5496	2503
	6	3.47	0.74	0.26	0.67	1845	199	2.00	16357	9001
	7	1.76	0.76	0.24	0.56	1334	308	1.85	12912	5734
	8	2.55	0.75	0.25	0.63	701	159	1.80	3787	1757
	9	1.71	0.68	0.32	0.92	290	39	1.25	448	184
	10	1.51	0.66	0.34	1.05	247	30	1.10	297	113
Escondido	11	2.32	0.59	0.41	1.16	5352	162	0.55	1528	325
	12	1.72	0.45	0.55	2.58	2181	59	0.30	748	130
	13	1.99	0.54	0.46	1.61	3223	124	0.55	1342	344
Logan	14	2.19	0.66	0.34	1.06	438	7	0.30	54	6
	15	2.03	0.72	0.29	0.83	464	3	0.25	15	1
	16	1.89	0.56	0.44	1.51	87	4	0.60	41	11
	17	2.63	0.75	0.25	0.67	112	17	0.75	52	10
	18	2.14	0.70	0.30	0.91	91	19	0.80	63	15
	19	2.17	0.67	0.33	0.97	138	10	0.65	53	11
	20	1.95	0.67	0.33	0.94	352	16	0.45	50	8
	21	2.47	0.64	0.36	1.11	179	11	0.50	45	8
	22	2.70	0.67	0.33	0.98	96	7	0.45	17	2
	23	1.90	0.64	0.36	1.20	56	10	0.55	23	5
	24	1.97	0.69	0.31	0.80	430	27	0.60	82	15
	25	2.37	0.59	0.41	1.36	154	6	0.30	22	3
	26	2.83	0.75	0.25	0.68	124	21	0.90	90	19
	27	2.79	0.73	0.27	0.75	114	5	0.60	36	6
	28	1.73	0.67	0.33	0.96	278	13	1.00	265	87
	29	4.32	0.81	0.19	0.45	975	87	1.00	980	189
	30	3.43	0.71	0.29	0.79	620	21	0.85	374	94
31	5.31	0.69	0.31	0.90	551	43	0.85	432	115	
32	2.61	0.69	0.31	0.83	1647	46	0.50	210	32	
33	2.59	0.66	0.34	0.99	409	51	1.65	1123	621	
34	2.40	0.58	0.42	1.41	470	12	0.45	130	26	
Voyageurs	35	4.65	0.71	0.29	0.83	3683	144	1.10	4725	1517
	36	3.82	0.70	0.31	0.94	4539	161	1.10	5928	1999
	37	3.54	0.72	0.28	0.78	36105	57	0.40	2297	264
	38	2.52	0.66	0.34	0.88	11836	58	1.10	12985	4740
	39	2.72	0.61	0.39	1.11	18033	97	0.90	12482	4350
	40	2.78	0.63	0.37	1.18	4867	41	0.55	1504	316

Table 3 V-A-h model performance comparisons based on the mean (\pm standard deviation) volume (V_{ERR}) and area (A_{ERR}) error magnitude. “n” is the number of ponds studied at each site.

Site	n	Full		Simplified		Optimized	
		$V_{ERR}(\%)$	$A_{ERR}(\%)$	$V_{ERR}(\%)$	$A_{ERR}(\%)$	$V_{ERR}(\%)$	$A_{ERR}(\%)$
Kananaskis	10	4.3 \pm 3.1	3.8 \pm 2.1	7.2 \pm 6.0	14.6 \pm 12.3	2.3 \pm 1.6	4.2 \pm 2.5
Escondido	3	3.1 \pm 1.4	3.8 \pm 0.7	4.3 \pm 2.5	6.7 \pm 3.8	1.6 \pm 0.7	4.0 \pm 0.9
Logan	21	4.0 \pm 2.6	3.6 \pm 1.7	4.6 \pm 3.5	9.9 \pm 8.5	2.0 \pm 1.2	3.9 \pm 1.9
Voyageurs	6	3.8 \pm 1.8	4.1 \pm 1.6	3.8 \pm 1.8	4.1 \pm 1.6	1.9 \pm 0.9	4.4 \pm 1.7
All Ponds	40	4.0 \pm 2.5	3.8 \pm 1.7	5.2 \pm 4.1	11.0 \pm 9.4	2.1 \pm 1.2	4.0 \pm 1.9

5


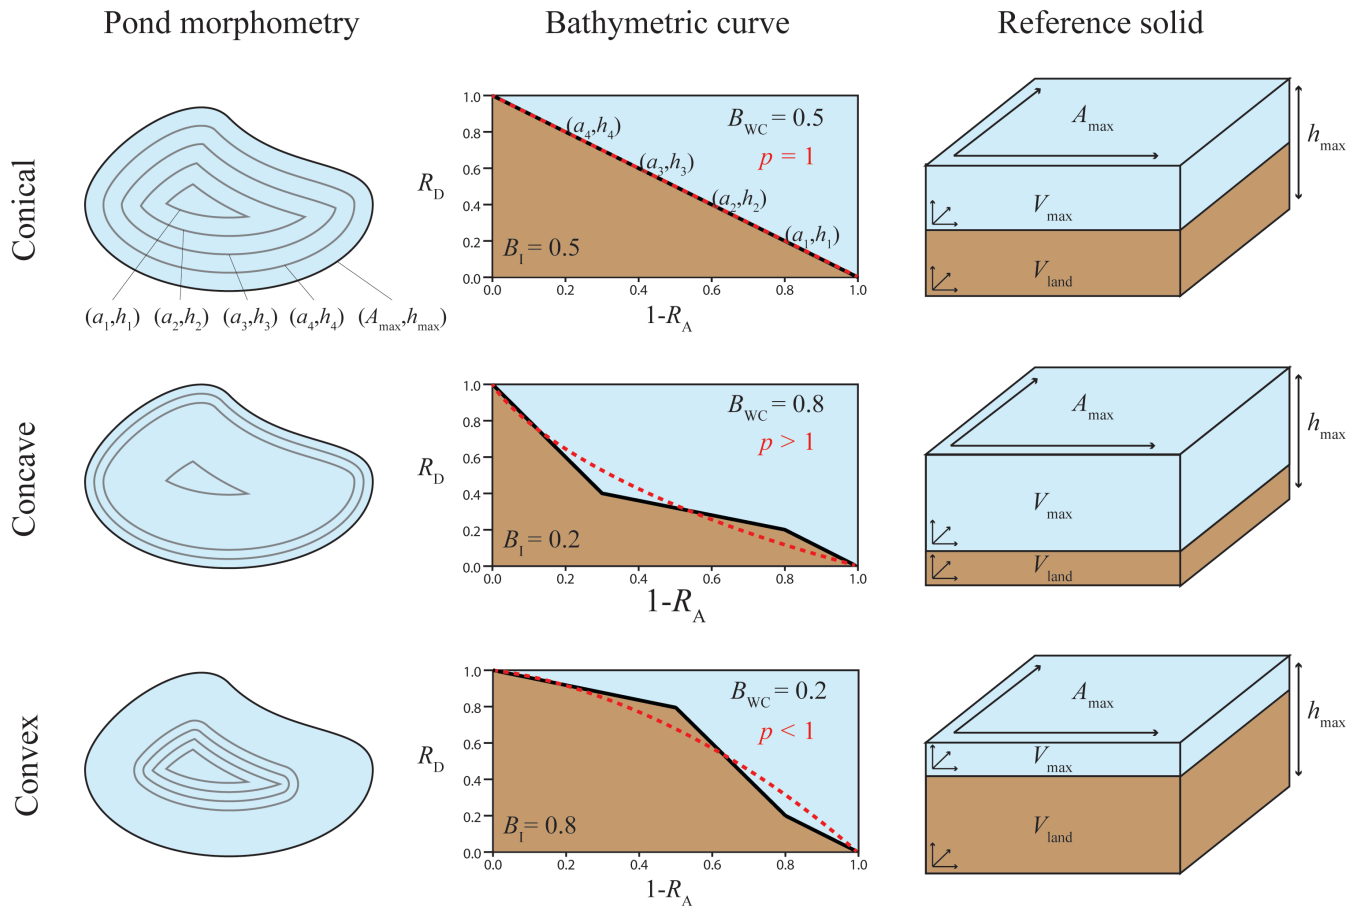


Fig. 1. Perceptual diagram of the relationship between morphometric variables. The area (a) at a given stage of the pond (h) is a point on the bathymetric curve (thick black line), where R_A is the relative area and R_D is the relative depth. The bathymetric integral (B_I) is the integration of everything below the bathymetric curve and the pond's capacity to store water (B_{WC}) is the integration of everything above the bathymetric curve. The morphology (p) coefficient represents the shape of the bathymetric curve in the power function equation (red-dashed line; Eq. (7)). The reference solid is the box created by multiplying the maximum height of the dam (h_{max}) by the maximum surface area created by the pond (A_{max}), and is entirely comprised of land (V_{land}) and/or water (V_{max}) proportional to B_I and B_{WC} .


5

Pond 12 - Escondido

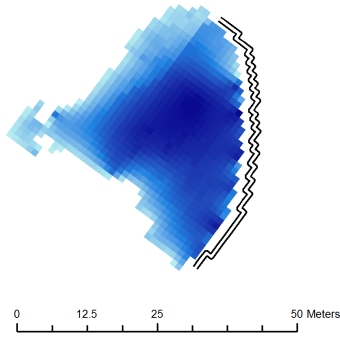


$S_I = 1.72$
 $B_I = 0.45$
 $B_{WC} = 0.55$
 $p = 2.58$
 $s = 2181 \text{ m}^2$
 $D_{len} = 59 \text{ m}$
 $h_{max} = 0.3 \text{ m}$
 $A_{max} = 748 \text{ m}^2$
 $V_{max} = 130 \text{ m}^3$

Pond 29 - Logan

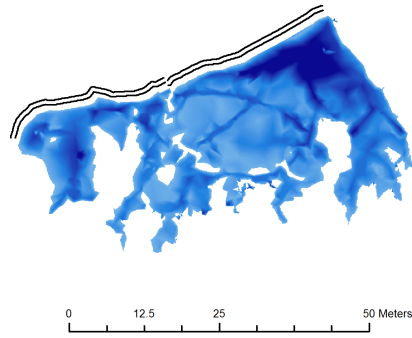


$S_I = 5.31$
 $B_I = 0.81$
 $B_{WC} = 0.19$
 $p = 0.45$
 $s = 975 \text{ m}^2$
 $D_{len} = 87 \text{ m}$
 $h_{max} = 1.0 \text{ m}$
 $A_{max} = 980 \text{ m}^2$
 $V_{max} = 189 \text{ m}^3$

Pond 39 - Voyageurs

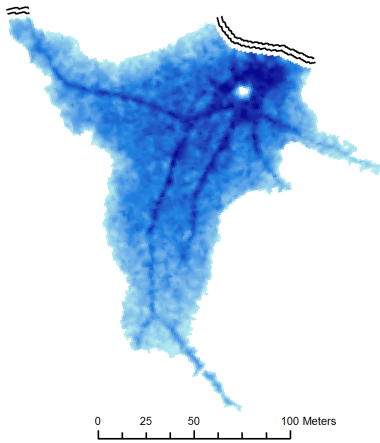

$S_I = 2.72$
 $B_I = 0.61$
 $B_{WC} = 0.39$
 $p = 1.11$
 $s = 18,033 \text{ m}^2$
 $D_{len} = 97 \text{ m}$
 $h_{max} = 0.9 \text{ m}$
 $A_{max} = 12,482 \text{ m}^2$
 $V_{max} = 4350 \text{ m}^3$

Pond 6 - Kananaskis

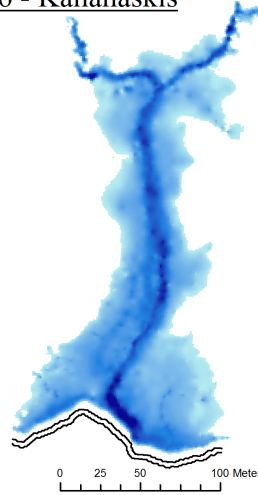

$S_I = 3.47$
 $B_I = 0.74$
 $B_{WC} = 0.26$
 $p = 0.67$
 $s = 1845 \text{ m}^2$
 $D_{len} = 199 \text{ m}$
 $h_{max} = 2.0 \text{ m}$
 $A_{max} = 16,357 \text{ m}^2$
 $V_{max} = 9001 \text{ m}^3$





Fig. 2. Four examples of detrended beaver pond DEMs used for this study, one from each study area. (S_I = shape index, B_I = Bathymetric integral, B_{WC} = Bathymetric water capacity, p = Morphometry coefficient, s = Scaling coefficient, D_{len} = Dam length, h_{max} = Maximum height of the dam, A_{max} = Maximum surface area of the pond, and V_{max} = Maximum volume of the pond)

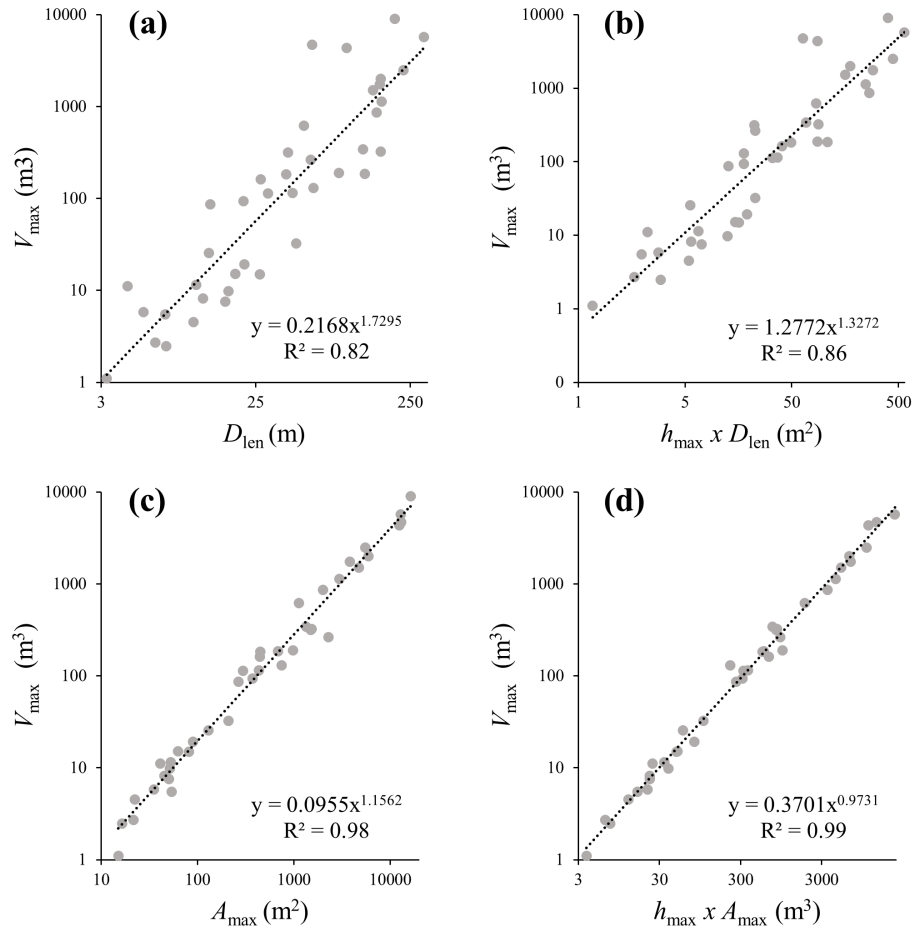

10 **Fig. 3.** Power regression relationships between the maximum volume of the beaver ponds (V_{\max}) and: (a) the length of the beaver dams (D_{len}); (b) the product of the maximum depth of the ponds (h_{\max}) and the length of the beaver dams; (c) the maximum surface area (A_{\max}) of the ponds; and, (d) the product of the maximum surface area and maximum depth of the pond.


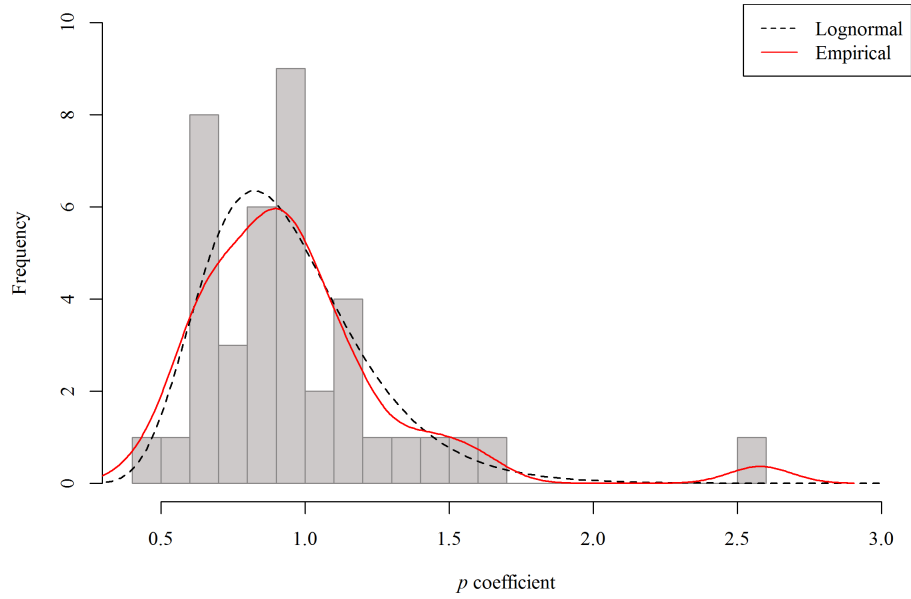


Fig. 4. Distribution of morphometry (p) coefficients for all beaver ponds sampled ($n=40$).

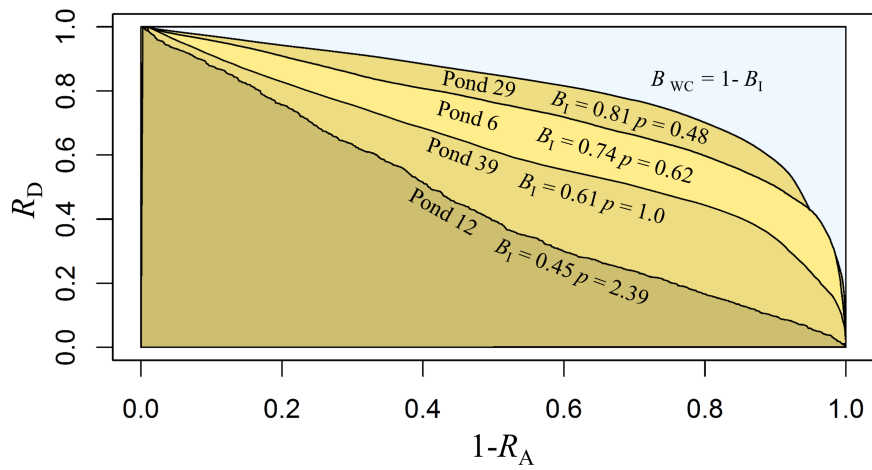

5

Fig. 5. Bathymetric curves for ponds shown in Figure 1. R_D is relative depth, R_A is relative area, B_1 is the bathymetric integral, B_{WC} is the bathymetric water capacity, and p is the morphometry coefficient.

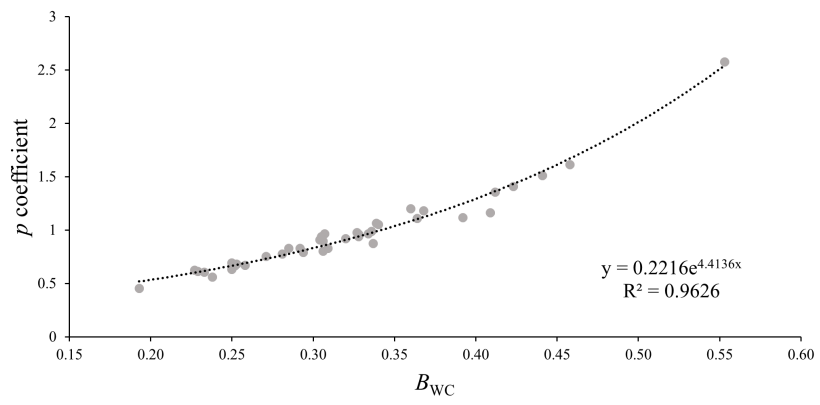


Fig. 6. Relationship between the morphometry (p) coefficient and the bathymetric water capacity (B_{WC}).

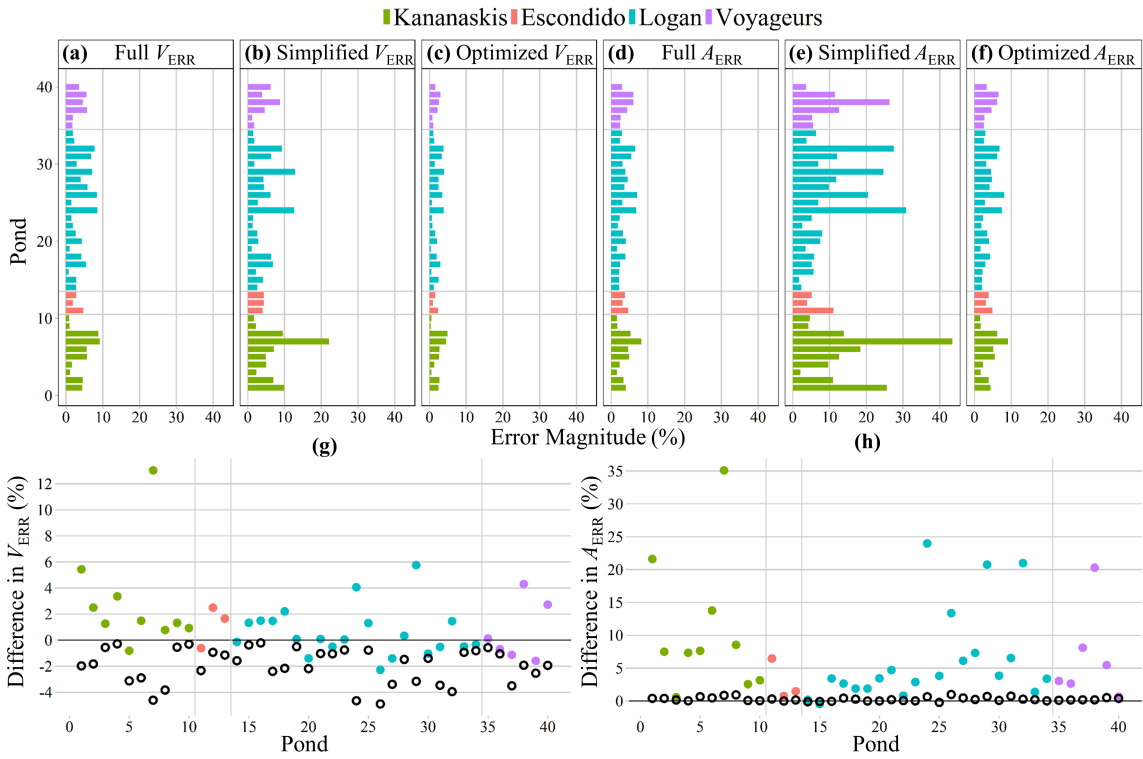


Fig. 7. Volume (V_{ERR}) and area error (A_{ERR}) from each beaver pond using the three different approaches (a-f). Plots on the bottom show the difference in volume (g) and area (h) error of the Simplified (solid circles) and Optimized (open circles) models relative to the Full model (the Full model is represented by the solid black line at zero on the y-axis). Bars and solid circles are colour coded by location as per the legend at the top of the figure.

5

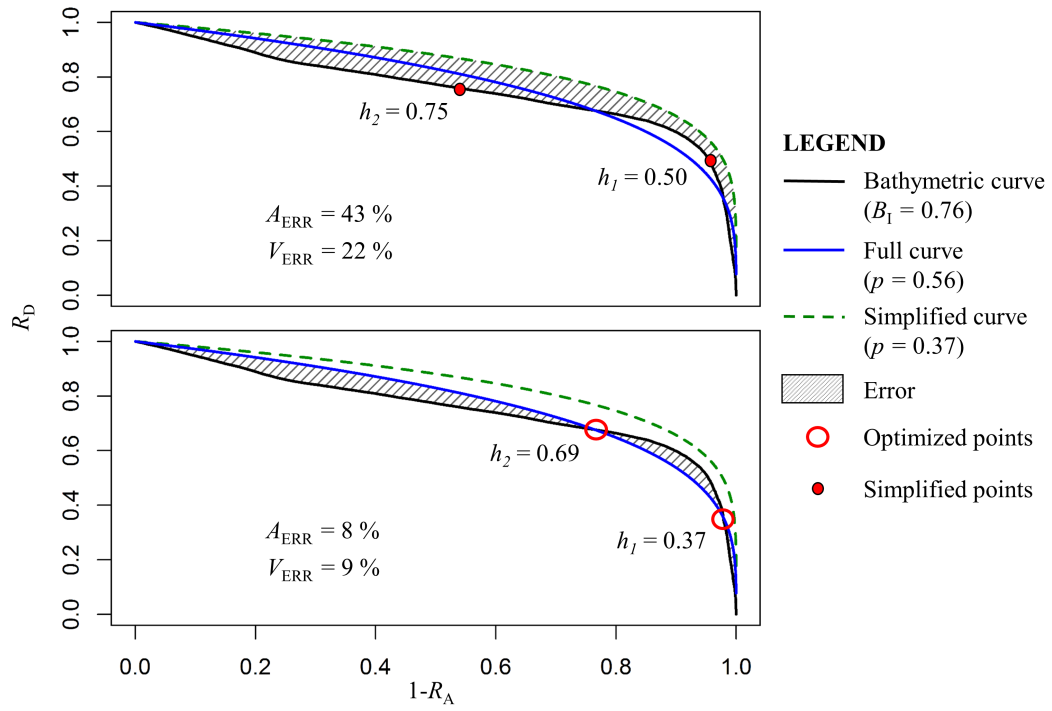


Fig. 8. Comparison of the hypsometric curve for Pond 7 with the Full and Simplified curve. The top shows the area (A_{ERR}) and volume (V_{ERR}) error associated with the Simplified curve that was calculated using Simplified depths h_1 and h_2 and the bottom shows the error associated with the Full curve and the optimum location for depths h_1 and h_2 . R_D is relative depth, R_A is relative area, B_1 is the bathymetric integral, and p is the morphometry coefficient.

5