

Quantifying hydrologic connectivity of wetlands to surface water systems

Ali A. Ameli¹, Irena F. Creed¹

¹Department of Biology, Western University, London, Ontario, Canada

Correspondence to: Irena Creed (icreed@uwo.ca)

Abstract. Hydrologic connectivity of wetlands is poorly characterized and understood. Our inability to quantify this connectivity compromises our understanding of the potential impacts of wetland loss on watershed structure, function and water supplies. We develop a computationally efficient physically-based subsurface-surface hydrological model to characterize both the subsurface and surface hydrologic connectivity of “geographically isolated” wetlands and explore the time and length variations in these connections to a river within the Prairie Pothole Region of North America. Despite a high density of geographically isolated wetlands (i.e., wetlands without surface inlets or outlets), modeled connections show that these wetlands are not hydrologically isolated. Subsurface connectivity differs significantly from surface connectivity in terms of timing and length of connections. Slow subsurface connections between wetlands and the downstream river originate from wetlands throughout the watershed, whereas fast surface connections were limited to large events and originate from wetlands located near the river. This modeling approach provides first ever insight on the nature of geographically isolated wetland subsurface and surface hydrological connections to rivers, and provides valuable information to support watershed-scale decision making for water resource management.

Keywords: wetland, geographically isolated wetlands, hydrologic connectivity, surface water, groundwater, Prairie Pothole Region

1 Introduction

Enhanced protection of wetlands is urgently needed (Dixon et al., 2016). Geographically isolated wetlands (GIWs) (Tiner, 2003) are in particular need of protection, as these are small features are vulnerable to filling or drainage (Cohen et al., 2016). Geographical isolation does not imply hydrologic, biogeochemical or biological isolation (Mushet et al., 2015; Leibowitz, 2015; Marton et al., 2015; Rains et al., 2015). Rather, GIW hydrologic connections vary in time and space, and these connections can occur through persistent but slow velocity groundwater pathways (McLaughlin and Cohen, 2013; Brannen et al., 2015; Hayashi et al., 2016) or transient but fast surface water pathways via mechanisms analogous to fill-and-spill runoff generation (Rains et al., 2006; Shaw et al., 2012; Leibowitz and Vining, 2003). Wetland ecosystem functions (e.g., collecting, storing, filtering or discharging water, sediments and solutes) arise from the cumulative effects of these diverse hydrologic connections (Cohen et al., 2016). For example, a lack of persistent surface connection from wetlands to rivers leads to the restriction of material and organism exchanges in landscapes; this restriction provides a wide range of GIW functions for surface water resources (US-EPA, 2015), including enhanced flood regulation and surface water quality (Golden et al., 2014; Leibowitz, 2003). Subsurface connections of wetlands, on the other hand, also affect surface water resources (Cook and Hauer, 2007; Euliss et al., 2004). For example, groundwater connections between GIWs and rivers can regulate the groundwater table, stabilize base flows and change base flow chemistry (McLaughlin et al., 2014). Characterization of both surface and subsurface connections are crucial for the provision of important aquatic ecosystem services (Winter and LaBaugh, 2003).

1 The quantification of wetland connectivity (i.e., subsurface and surface connections among wetlands and between
2 wetlands and rivers) remains a significant scientific challenge (US-EPA, 2015; Cohen et al., 2016; Golden et al., 2017). Our
3 inability to quantify wetland connections compromises our understanding of (1) the role of the continuum in the timing and
4 length of wetland connections on landscape functions; (2) the effects of environmental stressors (e.g., climate and land use or
5 land cover change) on this continuum of wetland connections; and (3) the effects of human alterations of wetland connections on
6 downstream waters. More importantly, our inability to quantify wetland connectivity may lead to inappropriate management
7 decisions regarding wetland protection *vs.* removal (Van Meter and Basu, 2015). Indeed, decisions to protect or drain GIWs are
8 often made based on their proximity to a major drainage network (Cohen et al., 2016). The quantification of wetland connectivity
9 is required to enable prioritization of wetland protection and restoration, where the optimum location of drainage or restoration
10 of wetlands and the hydrologic, biogeochemical and biological functions of each individual drained or restored wetland can be
11 evaluated (Golden et al., 2017).

12 Effective quantification of wetland connectivity requires a modeling tool that can explicitly take into account various
13 types (surface and subsurface) and lengths of wetland connectivity under different climate and land use or land cover scenarios.
14 Process-based modeling tools (e.g., SWAT) are useful for assessing *aggregated* impacts of wetland connectivity on watershed-
15 scale targets (e.g., watershed-scale phosphorus load or peak flow reduction) (Shrestha et al., 2012). However, these modeling
16 tools cannot explicitly consider individual wetlands and characterize their links to other wetlands and rivers, particularly in
17 wetland dominated systems (Golden et al., 2014); these considerations are necessary if one intends to prioritize protection and
18 restoration of individual wetlands (Golden et al., 2017). In contrast, numerical physically-based groundwater-surface water flow
19 and transport modeling tools have the ability to sufficiently incorporate subsurface and surface wetland connections (Golden et
20 al., 2014). These models, however, are typically grid-based (i.e., discrete) and require high level modeling expertise and high
21 computational power, particularly for the simulation of watershed-scale subsurface connections. This is particularly true when
22 these models are confronted with a range of wetland sizes; although a small sub-watershed system can be discretized so that a
23 single wetland falls within a single grid cell, incorporation of wetlands with a variety of sizes in larger wetland-dominated
24 watersheds is challenging and prone to discretization artifacts (Golden et al., 2014). Furthermore, watershed-scale tracking of
25 water that flows from a wetland to other local or regional surface waters within such grid-based modeling systems can be
26 challenging and inefficient, particularly when the size of grid spacing increases to reduce computational cost (c.f., Salamon et al.
27 (2006)).

28 There is currently no physically-based model that adequately captures watershed-scale wetland connectivity. Recently,
29 Ameli and Craig (2014) developed a grid-free physically-based integrated flow and transport scheme for simulation of 3D
30 groundwater-surface water interactions. This 3D grid-free model is scale-independent, implying that it has the potential to
31 efficiently simulate “watershed-scale” (or even larger scale) groundwater-surface water interaction and subsurface connections
32 among individual wetlands and between each wetland and regional surface waters without domain discretization artifacts. Here,
33 we use this model to map watershed-scale *subsurface* connections, and then link this model with a physically-based transient
34 surface flow routing simulator to map watershed-scale *surface* connections.

35 Specifically, for a large watershed dominated with GIWs within the prairie pothole region (PPR) of North America, we:
36 (1) Assess the performance of the 3D groundwater-surface water interaction model at regional scales against ground-based
37 (hydrometric, tracer, isotopic) measurements; (2) Compare the distribution of time and length characteristics of simulated
38 wetland subsurface *vs.* surface connections; (3) Explore if the shortest distance of a wetland to other surface water bodies is an
39 appropriate indicator of wetland connectivity; and (4) Explore if our findings can be extended to the other parts of PPR. Our

1 wetland connectivity modeling approach fills a fundamental gap toward advancing the science and management of wetland
2 hydrologic, biogeochemical and biological connectivity in landscapes.

3 **2 Material and methods**

4 **2.1 Experimental watershed**

5 The Beaverhill watershed comprises 4,405 km² and is situated on the north-western edge of the Prairie Pothole Region
6 (PPR) (Figure 1). The watershed is centered on the Cooking Lake moraine and drains into the North Saskatchewan River near
7 Edmonton, Alberta, Canada. The watershed is dominated by natural forest within the moraine and agriculture (predominately
8 grassland and pastureland) outside the moraine, with a considerable amount of urban and industrial development near the North
9 Saskatchewan River and the city of Edmonton (Serran and Creed, 2015). The Cooking Lake moraine was recently recognized as
10 a biosphere reserve by UNESCO and contains Beaverhill Lake located in the eastern portion of the watershed, which is
11 recognized as a wetland of international importance by the RAMSAR convention on wetlands.

12 The climate, geology and topography have collectively created a hydrological system dominated by numerous lakes and
13 wetlands as well as only a few intermittent or slow-moving streams. The climate is continental with cold winters and warm
14 summers. Based on the 40-year (1974-2014) climatic data collected at the Edmonton International Airport, the average January
15 temperature is -13.5 °C and the average July temperatures is 15.9 °C (<http://climate.weather.gc.ca/>). Average annual precipitation
16 is 483 mm, of which almost 70% falls as rain between May and September, a period when the potential evapotranspiration is as
17 large as 450 mm. This means that there is generally little surface runoff, although spring snowmelt can be an important
18 contributor of local runoff to a wetland.

19 The geology is dominated by glacial deposits resulting from the Pleistocene continental glaciers. Three till sequences
20 with variable thickness were left as a result of the last glaciation. The higher permeability shallow till often extends from the land
21 surface down to below the average position of the water table. For example, within the St. Denis National Wildlife Area located
22 500 km east of the Beaverhill watershed, van der Kamp and Hayashi (2009) reported a thickness of 4-5 m with an approximate
23 range of saturated hydraulic conductivity between 2×10^{-2} to 2 m/d, and a saturated hydraulic conductivity of less than 2×10^{-3}
24 m/d below this layer. While the transmission rate of water from the shallow to deeper geological deposits is slow, the moraine
25 still serves as an important source of groundwater recharge in the area, with the annual groundwater recharge rate within the
26 Beaverhill moraine estimated to vary spatially from 5×10^{-5} m/d to 1.9×10^{-4} m/d (Barker et al., 2011; Sass et al., 2014). The
27 surficial bedrock geology is predominantly characterized by the Horseshoe Canyon Formation that is composed of fine to
28 medium grained sediments, inter-fingered within muddy, transgressive sediments (Barker et al., 2011). The lithology of the
29 surficial bedrock suggests that Ca and Mg are dominant weathering-derived products at the Beaverhill watershed.

30 The topographic relief ranges from a high of 812 m a.s.l. in the moraine to a low of 586 m a.s.l. along the North
31 Saskatchewan River, and reflects glacial depositional processes comprising knob, kettle and hummocky formations in the
32 moraine surrounded by flat to rolling areas in lower elevations.

33 **2.2 Mapping wetlands**

34 A total of 130,157 wetlands were delineated based on the assumption that there is a strong association between terrain
35 depressions and wetland occurrence. A Light Detection and Ranging (LiDAR) DEM captured in 2009 with a horizontal
36 resolution of 3 m and an estimated vertical accuracy of 15 cm was used to map the probability of depression using the approach
37 offered by Lindsay and Creed (2005). The depression probability map was then segmented into image objects using the multi-

1 resolution segmentation algorithm (Batz and Schäpe, 2000). Average depression probability values were used to classify objects
2 as wetland or non-wetland, and adjacent classified wetland objects were dissolved into a single wetland (Serran and Creed,
3 2015). Note that this method delineated both potential wetlands without surface outlets (i.e., GIWs) and with surface outlets;
4 given the sparsity of permanent streams in the watershed most of the delineated wetlands can be considered *a priori* as GIWs.
5 This is consistent with the observation of GIW predominance in the PPR (Cohen et al., 2016).

6 **2.3 Modelling wetland connectivity**

7 A 3D steady-state groundwater-surface water interaction model was used to simulate watershed-scale subsurface flow
8 and velocity fields as well as to calibrate infiltration rate (Sect. 2.3.1). The mathematical formulation, solution parameters and
9 boundary conditions used in the model as well as the incorporation of the map of wetlands within the model algorithm are
10 explained in Appendix A. The calibrated infiltration rate was combined with meteorological data in a 2D transient overland flow
11 model to simulate surface flow routing (via a fill and spill mechanism) and to simulate watershed-scale surface water level and
12 velocity fields (Sect. 2.3.2). This one-way coupled subsurface-surface model does not consider thoroughly the potential
13 feedbacks from subsurface flow on surface flow routing. Finally, continuous watershed-scale maps of subsurface and surface
14 velocity were generated and coupled with the wetland map to track water movement and to determine if water issued from an
15 individual wetland reached a discharge surface water body (e.g., North Saskatchewan River) via subsurface or surface pathways
16 (Sect. 2.3.3). Note that to characterize the map of connectivity to North Saskatchewan River, we assumed a 500 m buffer around
17 the original line segment of the River which was obtained from a standard hydrography dataset.

18 **2.3.1 Groundwater-Surface water interaction model**

19 The 3D groundwater-surface water interaction model used a free boundary condition to determine the location of the
20 water table. This condition was iteratively imposed using a recharge-water table depth relation scheme (Ameli and Craig 2014)
21 that creates a spatially variable recharge rate and enables delineation of discharge areas where the water table reaches the land
22 surface. This scheme assumed a steady-state subsurface flow and a hydraulic connection between groundwater and wetland
23 water levels. The assumption of steady-state subsurface flow is strongly supported by empirical groundwater table observations
24 collected from the closest piezometer at the Vegreville Environment Center station (located 15 km east of the Beaverhill
25 watershed boundary), where the water table varied with a coefficient of variation of < 0.9% in 2009 (a year when observations
26 were used to develop the steady-state groundwater-surface water interaction model), and a coefficient of variation of 4% over 32
27 years (August 1985-July 2016) (Figure 2a). In another piezometer at the Barrhead Environment Center station located 65 km
28 west of the Beaverhill watershed boundary, water table varied even less with a coefficient of variation of ~0% during 2009, and a
29 coefficient of variation of 0.01% over 40 years (1977-2016) (Figure 2b). The assumption of hydraulic connection between
30 groundwater and wetland water levels is supported by previously reported empirical observations at the St. Denis National
31 Wildlife Area, 500 km east of the Beaverhill watershed, that showed a maximum difference of less than 10 cm between the
32 groundwater level at a piezometer located 7 m from the wetland edge and the wetland water level (van der Kamp and Hayashi,
33 2009).

34 The model was calibrated using saturated hydraulic conductivities of the two-layer unconfined aquifer and actual
35 infiltration rate (see Appendix A for more details). The model performance was assessed for its ability to map groundwater
36 discharge vs. recharge areas and subsurface connections using multiple lines of corroborating hydrometric, chemical and isotopic
37 evidence. First, we compared the simulated groundwater discharge and recharge areas to one derived from hydrometric
38 measurements. We used measurements of hydraulic heads in 1,413 artesian groundwater wells installed in the bedrock and

1 screened 30 to 80 m below the land surface (<http://aep.alberta.ca/water/reports-data/alberta-water-well-information-database/>)
2 and used a kriging approach to map the potentiometric surface throughout the entire watershed for summer 2009 (see Figure 1
3 for the location of the artesian wells). Groundwater discharge and recharge areas are inferred as areas wherein potentiometric
4 surface is above and below land surface, respectively (Barker et al. (2011).

5 Second, we determined if the simulated groundwater discharge and recharge areas had different chemical signatures. It
6 is known that the concentration of weathering-derived products (such as Ca and Mg), chemical measures affected by weathering
7 processes (such as alkalinity and electric conductivity, EC) and total dissolved solids (TDS) can be enhanced along the
8 subsurface flow pathways as transit time, and therefore contact time with rock, increases (e.g., Burns et al., 2003; Maher and
9 Druhan, 2014; Godsey et al., 2009; Cook and Hauer, 2007; Ameli et al., 2017). This implies that the concentration of Ca, Mg,
10 alkalinity, EC and TDS in groundwater wells and surface water bodies (e.g., wetlands, lakes) located within discharge areas will
11 be higher than recharge areas (Cook and Hauer, 2007; Euliss et al., 2004; Barker et al., 2011). We mapped Ca, Mg, alkalinity, EC
12 and TDS measurements of 121 shallow (< 10 m deep) groundwater wells located throughout the watershed provided by Alberta
13 Water Well Information Database (Figure 1), and for 208 surface waters including lakes and wetlands located throughout the
14 watershed (Figure 1) in summer 2009. For the latter, water samples were collected at a depth of 1 meter using an integrated
15 sampling tube at the center of small, shallow wetlands and 100 meters from the shores of large, deep lakes. A non-parametric
16 Wilcoxon rank sum test was used to see if Ca, Mg, alkalinity, EC and TDS concentrations or values were significantly different
17 (higher) at groundwater wells and wetlands located in discharge areas compare to recharge areas based on comparing the *p*
18 values of the statistical tests to the significance level of 0.10. At any *p* values larger (smaller) than 0.10 we accept that the
19 concentrations at discharge and recharge areas are (are not) from distributions with equal medians.

20 Third, we determined if the simulated discharge and recharge surface water bodies had different isotopic signatures. It is
21 known that ¹⁸O and ²H signatures vary between discharge and recharge areas; indeed, discharge waters that have more old water
22 will have different isotopic signatures than recharge waters that have new water only, either from direct precipitation or indirect
23 precipitation via overland flow (McGuire and McDonnell, 2006; Kirchner, 2016; McDonnell and Beven, 2014). This implies that
24 the average isotopic concentration (ratio ‰) in discharge wetlands shows greater deviation from the average watershed
25 concentration of surface waters than the deviation of recharge wetlands. We mapped isotopic ¹⁸O and ²H signatures in samples
26 collected for the same 208 surface waters for which the chemical tracers were sampled (Figure 1) in summer 2009, and used
27 Wilcoxon rank sum test to assess the potential differences in isotopic signatures between discharge and recharge wetlands.

28 The first line of corroborating evidence (hydrometric) was used to calibrate the groundwater-surface water interaction
29 model, and the second and third lines of corroborating evidence (chemical and isotopic) were used to evaluate the performance
30 of the model.

31 **2.3.2 Surface “Fill and Spill” overland flow model**

32 The 2D transient fill and spill surface flow routing approach within the numerical physically-based HydroGeoSphere
33 model (Therrien et al., 2008) was used to simulate watershed-scale surface water level and overland flow routing and ultimately
34 to determine the surface connectivity of wetlands using a transient water particle tracking scheme. The 2D surface of the
35 watershed was discretized into 22,383 grid points (43,836 triangular elements). The parameters regarding time-discretization
36 were: maximum time step = 8640 sec; initial time step = 1800 sec; maximum time step multiplier = 1.5; and minimum time step
37 multiplier = 0.5. A critical depth boundary condition was assigned to the grid points representing the location of the Beaverhill
38 Creek monitoring station (Figure 1) where stream flow observations were available. A no-flow boundary condition was assigned
39 to the watershed boundaries.

1 The 2D overland flow model was calibrated using the Manning roughness coefficients (Manning et al., 1890) in x and y
2 directions (n_x and n_y) as well as rill depth. The former is an empirically derived coefficient, which is dependent on surface
3 roughness and surface cover, and the latter represents the depth that must be filled at each point before any lateral surface flow
4 can occur. Frei and Fleckenstein (2014) suggested that the implementation of an acceptable uniform value for rill depth within
5 the HydroGeoSphere overland flow simulator leads to an accurate prediction of watershed-scale surface flow routing. The
6 calibration was made to match observed and simulated stream flow at the Beaverhill Creek monitoring station (Figure 1) during
7 a period when stream flow measurements were available (April 1 to August 1 1983). The inputs to the model included daily
8 precipitation, evapotranspiration (after Morton 1978, Morton 1983) and snow water equivalent (after Sturm et al. 2010) from
9 data collected at the Vegreville Environment Center meteorological station (15 km east of the Beaverhill watershed boundary) as
10 well as the steady-state infiltration rate obtained using the 3D groundwater-surface water interaction model. We did not have
11 access to evapotranspiration data before 2000 (including the calibration period, April 1 to August 1, 1983). Instead, we used the
12 calculated evapotranspiration time history of 2015 for the same period (April 1 to August 1, 2015), because the monthly average
13 humidity, maximum air temperature and minimum air temperature were similar between April 1 to August 1, 1983 and April 1 to
14 August 1, 2015.

15 The calibrated 2D overland flow model was then used to simulate surface flow routing from April 1 to August 1, 2009
16 as well as from April 1 to August 1, 2013 using meteorological data for these periods as inputs to the model. The chosen time
17 periods include the smallest and the largest cumulative net water (precipitation-minus evapotranspiration) depth observed at the
18 Vegreville station since 2000, reflecting the minimum and maximum probability of occurrence of surface flow and therefore
19 surface connections among wetlands since 2000. Once the surface flow routing model was developed, the discretized surface
20 water velocities in x and y directions at each grid point and each time step were extracted. Continuous maps of surface water
21 velocity in x and y directions throughout the watershed were then approximated by interpolating the discretized surface water
22 velocities. A Fourier-based interpolation scheme with 10,000 Fourier series terms was used to complete the interpolation process
23 and generate the continuous maps of surface velocity in x ($V_s^x(x, y, t)$) and y ($V_s^y(x, y, t)$) directions for the entire watershed; the
24 overall correlation coefficient between estimated velocities using the interpolation method and original modeled velocities at
25 each grid point and time step was $r^2=89\%$ ($p < 0.001$).

26 2.3.3 Subsurface and surface wetland connections

27 The continuous maps of subsurface steady-state ($V_m^x(x, y, z)$, $V_m^y(x, y, z)$, $V_m^z(x, y, z)$, Eq. A.4) and transient surface
28 velocity ($V_s^x(x, y, t)$, $V_s^y(x, y, t)$) were used to track water particles and generate a connectivity map using water particle
29 tracking approach as follows.

$$30 \text{ In the subsurface domain: } \begin{aligned} x_p(t) &= x_p(t - \Delta t) + V_m^x(x_p(t - \Delta t), y_p(t - \Delta t), z_p(t - \Delta t)) * \Delta t \\ y_p(t) &= y_p(t - \Delta t) + V_m^y(x_p(t - \Delta t), y_p(t - \Delta t), z_p(t - \Delta t)) * \Delta t \\ z_p(t) &= z_p(t - \Delta t) + V_m^z(x_p(t - \Delta t), y_p(t - \Delta t), z_p(t - \Delta t)) * \Delta t \end{aligned} \quad (1a)$$

$$34 \text{ In the surface domain: } \begin{aligned} x_p(t) &= x_p(t - \Delta t) + V_s^x(x_p(t - \Delta t), y_p(t - \Delta t), t - \Delta t) * \Delta t \\ y_p(t) &= y_p(t - \Delta t) + V_s^y(x_p(t - \Delta t), y_p(t - \Delta t), t - \Delta t) * \Delta t \end{aligned} \quad (1b)$$

35
36
37 where $x_p(t)$, $y_p(t)$ and $z_p(t)$ are the position of the particle p at time t , and $x_p(t - \Delta t)$, $y_p(t - \Delta t)$ and $z_p(t - \Delta t)$ are the
38 position of the particle p at time $t - \Delta t$. In the particle tracking algorithm, a small value of time step ($\Delta t = 0.1$ day) was
39 assumed to ensure precise calculation of particle location and movement. A similar particle tracking method was recently used in

1 Ameli et al. (2016b) and Ameli et al. (2016a). Water particle release points in the tracking approach were placed uniformly with
 2 500 m spacing along the land surface. This placement meant that there was a possibility that not all wetland connections were
 3 captured (i.e., water particle release points and small wetlands in between the 500 m placement would have been missed);
 4 nonetheless, it allowed for a consistent comparison of the general trend in subsurface and surface connections of wetlands. The
 5 generated connections were used to estimate subsurface and surface transit times (τ) and flowpath lengths (l) that were then fitted
 6 with a Gamma distribution (which provided the best fit, data not shown) to generate the transit time distribution (TTD) and
 7 flowpath length distribution (FLD):

$$8 \quad \text{TTD}(\tau) = \frac{a(\frac{\tau}{\tau_0})^{a-1}}{\tau_0 \Gamma(a)} e^{-a(\frac{\tau}{\tau_0})} \quad \& \quad \text{FLD}(l) = \frac{a(\frac{l}{l_0})^{a-1}}{l_0 \Gamma(a)} e^{-a(\frac{l}{l_0})} \quad (2)$$

9 where τ_0 and l_0 are the mean transit time and length of connection, $\Gamma(a)$ is the Gamma function and a is the Gamma shape
 10 parameter. The simulated subsurface connections were tested by correlating the simulated mean transit time (MTT) of water
 11 particles discharged into wetlands and the concentration of chemical tracers (Ca, Mg, EC and TDS) in wetlands and determining
 12 if wetlands with longer transit times had higher concentrations or values of Ca, Mg, alkalinity, EC and TDS. The time (and
 13 length) characteristics of the simulated subsurface and surface connections of wetlands were then compared.

14 We calculated the relationship between subsurface (and surface) flow contribution of each individual wetland to the
 15 North Saskatchewan River and the distance of the wetland from the river to determine whether proximity of wetlands to the
 16 North Saskatchewan River is a proxy for their hydrologic connection to the river.

17 The generalizability of our findings to the entire PPR was assessed by comparing climate, geology and topography of
 18 the Beaverhill watershed to the other parts of the prairie potholes regions of North America. We compared monthly-averaged
 19 climatic measures (including precipitation, evapotranspiration, snow water equivalent and temperature) of the Beaverhill
 20 watershed to the entire Prairie Pothole Region. We compared the average porosity and permeability of the Beaverhill watershed
 21 to the average of these measures in the entire Prairie Pothole region. We also compared the distribution of observed shortest
 22 distances among nearest wetland neighbour and distances between wetlands and stream network at the Beaverhill watershed to a
 23 prairie pothole landscape in North Dakota. We obtained wetland polygons in North Dakota from the National Wetlands
 24 Inventory (<https://www.fws.gov/wetlands/> and stream polylines from the National Hydrography Dataset: <http://nhd.usgs.gov/>).
 25 To do the latter comparison, we used Quantile-Quantile plot which is a graphical non-parametric method for comparing
 26 probability distributions of two unpaired samples by plotting their quantiles against each other. If the two distributions being
 27 compared are statistically similar, the theoretical line of the Quantile-Quantile plot will be $y = x$ and the quantile pairs will
 28 approximately lie on this line. If the distributions are not statistically similar, the theoretical line of the Quantile-Quantile plot
 29 will be a linear line, but not following $y = x$.

30 **3. Results**

31 **3.1 Groundwater-Surface water interaction model**

32 The calibrated values of the saturated hydraulic conductivities are 10^{-1} m/d and 10^{-3} m/d for the top and bottom layers
 33 respectively. The calibrated value for infiltration rate (which here is equal to maximum groundwater recharge rate) is 1×10^{-4}
 34 m/d.

35 The simulated groundwater discharge/recharge map is consistent with the map of groundwater discharge/recharge
 36 inferred from measured hydraulic head (potentiometric surface) in piezometric wells (Figure 3). Figure 3a shows the spatial
 37 distribution of groundwater discharge (negative) and recharge (positive) fluxes along the land surface obtained using the
 38 groundwater-surface water interaction model. Figure 3b shows the distance of potentiometric surface from the land surface, with

1 negative values (above land surface) representing discharge areas and positive values (below land surface) representing recharge
2 areas, with the larger negative (or positive) values equal to larger discharge (or recharge) potential. The correlation coefficient
3 between simulated groundwater fluxes at the land surface and the distance of potentiometric surface above and below land
4 surface is 75% ($p < 0.001$). Figure 3 also shows the predominance of recharge area within the moraine and discharge area outside
5 of the moraine.

6 The performance of the model was also assessed using chemical and isotopic tracer data. The concentrations or values
7 of chemical tracers (Ca, Mg, EC and TDS) of water in shallow groundwater wells are different between the simulated discharge
8 and recharge areas ($p < 0.10$) (Table 1). The average concentrations of chemical tracers are higher in the simulated discharge
9 areas than the simulated recharge areas. In addition, the concentrations or values of all chemical tracers (except Mg) in simulated
10 discharge wetlands are statistically different from simulated recharge wetlands ($p < 0.10$) (Table 2). The average concentrations
11 of all chemical tracers are higher in the simulated discharge wetlands than the simulated recharge wetlands. Higher
12 concentrations of weathering products reflect the existence of longer pathlines with larger transit times within simulated
13 discharge areas.

14 The average concentration of isotopic tracers (^{18}O and ^2H) in simulated discharge and recharge wetlands are
15 significantly different ($p < 0.001$) (Table 2). Also for ^{18}O (^2H), the average isotopic concentration in simulated discharge areas
16 deviates 3‰ (8‰), whereas the average isotopic concentration in simulated recharge areas deviates only 0.9‰ (3‰) compared
17 to the watershed average isotopic concentrations. This reflects a mixture of old and new waters in simulated discharge wetlands,
18 but mostly new waters in simulated recharge wetlands, which is consistent with our expectations.

19 **3.2 Surface “Fill and Spill” overland flow model**

20 The manually calibrated values of the uniformly-distributed Manning roughness coefficient is $0.05 \frac{\text{sec}}{\text{m}^{1/3}}$ (equal in both x
21 and y directions) and the rill storage height is 0.001 m. Figure 4a shows that the simulated vs. observed stream flow at the
22 Beaverhill creek near the mouth measurement station for the major summer rainfall period from April 1 to August 1 1983 are
23 significantly correlated ($r^2 = 0.87$, $p < 0.001$). Two statistical tests, including Wilcoxon Rank Sum (equality of median) and
24 Levene (equality of variance), also suggest that the median and variance of both simulated and observed hydrographs are similar
25 (p values are 0.44 and 0.95, respectively). We did not expect that the surface flow model would exactly simulate the hydrograph
26 in 1983, as we used evapotranspiration data from 2015 for 1983 (as explained in section 2.3.2). This simplification could have
27 affected the simulated hydrograph shape leading to an earlier second peak (Figure 4a). We think this simplification would have
28 had minimal effect on the simulated connectivity lines, as at the end of simulation period, the cumulative simulated flow ($2.4 \cdot 10^7$
29 m^3) at the measurement station was only 7% less than the cumulative observed flow ($2.6 \cdot 10^7 \text{m}^3$). Indeed, for the particle
30 tracking scheme used to characterize the surface connectivity map, it did not make a substantial difference if the particle was at
31 its highest velocity (e.g., June 20 vs. June 24 of 1983). Figure 4 also suggests a small contribution of base flow (almost zero from
32 early spring to end of June) to observed stream flow; this justifies the calibration of the overland flow model with the observed
33 stream flow at the Beaverhill Creek stream flow monitoring station.

34 **3.3 Wetland connectivity**

35 **3.3.1 Subsurface connections**

36 The subsurface connectivity map (Figure 5a) indicates that recharge wetlands of a wide range of distances from the
37 North Saskatchewan River can be connected to the river (red lines). These wetlands range from those located in the moraine,

1 where the length of connectivity to the river is up to 30 km, as well as those located in the vicinity of the river, where the length
2 of connectivity to the river is less than 5 km. The total steady-state groundwater contribution of these recharge wetlands to the
3 North Saskatchewan River is $0.775 \times 10^6 \text{ m}^3$ per month. Furthermore, water particles released from the recharge wetlands located
4 in the moraine traverse from hundreds of meters (as small as 100 m) and reach discharge wetlands located in the moraine, or tens
5 of kilometers (up to 36 km) and reach Beaverhill lake as well as discharge wetlands located outside of the moraine (blue lines).
6 There is also possibility for subsurface connections between recharge wetlands located at the east of the watershed to Beaverhill
7 Lake (data not shown).

8 **3.3.2 Surface connections**

9 The North Saskatchewan River receives a majority of its wetland-originated surface waters from wetlands located in the
10 riparian area of the river. For the period from April 1 to August 2013, when the largest net surface water fluxes since 2000
11 occurred, the length of the surface connections ranged from 50 m to 8 km (Figure 6b), with the total surface water flow
12 contribution from these wetlands being $1.43 \times 10^6 \text{ m}^3$ per month. For the period from April 1 to August 1 2009, when the
13 smallest net surface water fluxes since 2000 occurred, the length of the surface connections ranged from 50 m to 3 km (Figure
14 6c), with the total surface water flow contribution from these wetlands being $0.81 \times 10^6 \text{ m}^3$ per month. Within the moraine,
15 surface connections among wetlands are primarily between neighboring wetlands. For the period from April 1 to August 2013,
16 the length of connection ranged from 25 m to 7 km (Figure 6b); only one water particle released from wetlands in the moraine
17 reached outside the moraine during this period. For the period from April 1 to August 2009, the length of connection ranged
18 from 25 m to 3 km (Figure 6c); no water particle released from wetlands in the moraine reached outside the moraine during this
19 period. The modeling approach we used was a one-way coupling of subsurface and surface flow processes that could not
20 consider thoroughly the subsurface flow exfiltration feedbacks on surface flow routing. This simplification had negligible effects
21 on wetland connectivity within the moraine, as the moraine mostly consists of recharge zones with minimum subsurface
22 exfiltration (Figure 3). This simplification could have affected the map of surface connectivity of wetlands located in close
23 vicinity of the North Saskatchewan River (within a 1000 m buffer) wherein subsurface water can exfiltrate and enhance surface
24 connectivity. However, the rate of subsurface exfiltration in these riparian areas was on average $1 \times 10^{-4} \text{ m/d}$ (Figure 3a), which
25 is considerably smaller than the average of net atmospheric inputs (precipitation-evapotranspiration) from April 1 to August 1
26 2013 that was equal to $7 \times 10^{-3} \text{ m/d}$ and from April 1 to August 1 2009 that was equal to $4 \times 10^{-3} \text{ m/d}$. Therefore, the one-way
27 coupling simplification had minimum effects on surface flow routing along the riparian wetlands located in the riparian areas.

28 **3.3.3 Timing and length of subsurface and surface connections**

29 Subsurface connections between wetlands and the North Saskatchewan River (Figure 6a) and from wetlands located in
30 moraine to other wetlands in the watershed (Figure 6b) showed a significantly slower and longer time scale compared to surface
31 connections. The average time of the subsurface connections between wetlands and North Saskatchewan River was orders of
32 magnitude longer than the average time of the surface connections. This difference between surface and subsurface transit times
33 led to discontinuity in the continuum of transit times to the river as shown in Figs. 6a and 6b (left panel). This discontinuity may
34 have been attributed to the lack of fast subsurface flow in our landscape. Fast subsurface flow has been widely observed in
35 humid forested landscapes with a high frequency of macropores (and thus large hydraulic conductivities in the shallow portions
36 of the soil). Available observations in the Canadian Prairie Pothole region do not support such high frequency of macropores and
37 large shallow hydraulic conductivity. Similarly, the average length of subsurface connections of wetlands to the North

1 Saskatchewan River was longer than the average length of surface connections. Furthermore, among wetlands, the average of
2 both time and length of subsurface connections were longer compared to surface connections.

3 Figure 7 shows the relation between simulated subsurface mean transit time of each discharge wetland and observed
4 concentration and values of Ca, Mg, EC and TDS of the discharge wetland. We expected that the concentration of weathering-
5 derived products and TDS and the value of EC within discharge wetlands would be positively correlated to the subsurface mean
6 transit time of water particles discharged into the wetland. Figure 7 shows a strong positive correlation between simulated mean
7 transit time and the concentration or value of the different constituents within the discharge wetlands.

8 **3.3.4 Relation between wetland flow contribution to the river and wetland-river distance**

9 To determine whether proximity of wetlands to the North Saskatchewan River is a proxy for their hydrologic
10 connection to the river, we calculated subsurface and surface flow contributions of each wetland to the North Saskatchewan
11 River for a period of four months. The flow contribution-distance relationship of connected wetlands to the river (Figure 8)
12 suggests that subsurface flow contribution of wetlands to the river is in general insensitive to their distance to the river, with a
13 negligible correlation coefficient ($\rho = -0.001\%$) between subsurface flow contribution and distance. However, proximal wetlands
14 contribute more surface flow to the river than distal wetlands, with a more pronounced correlation coefficient ($\rho = -15\%$) from
15 April 1 to August 2009, when the smallest net surface water fluxes since 2000 occurred, compared to April 1 to August 2013 (ρ
16 $= -6\%$), when the largest net surface water fluxes since 2000 occurred.

17

18 **3.4 Extendibility to the entire PPR**

19 Figure 9 shows that the distributions of observed shortest distance of wetlands to their nearest wetland neighbor and
20 shortest distance of wetlands to nearest major stream are statistically similar between Beaverhill watershed and a large portion of
21 prairie potholes in North America (the theoretical lines between distributions in Quantile-Quantile plot is $x = y$). Table 3
22 compares average monthly climatic measures in the Beaverhill watershed to the entire PPR. There is no significant difference in
23 the median and variance of temperature between Beaverhill watershed and the entire PPR at significance levels of 0.05 and 0.10,
24 respectively. There is no significant difference in the median and variance of precipitation minus evapotranspiration between the
25 Beaverhill watershed and the entire PPR ($p > 0.10$). While there is a difference in the median snow water equivalent between
26 Beaverhill watershed and the entire PPR ($p < 0.10$), there is no significant difference in the variance of SWE ($p = 0.92$). The
27 geology of the Beaverhill watershed is also consistent with the geology of the entire PPR (Table 4). These similarities may
28 suggest that the behavior of subsurface and surface connections of wetlands within the Beaverhill watershed can be extended to
29 the other parts of the PPR.

30 **4 Discussion**

31 Hydrologic connectivity of wetlands determines in part their hydrologic, biogeochemical and biological functions.
32 Hydrologic connectivity, however, is poorly understood and modeled (Cohen et al., 2016). While existing models may be able to
33 emulate aggregate influence of wetland connectivity on the quantity and quality of downstream waters (e.g., Shook et al., 2013),
34 very few of these models have been designed with connectivity in mind, and thus are not able to determine the local and regional
35 interactions between wetlands and other hydrologic features in wetland-dominated landscapes.

1 Here, we couple a steady-state groundwater-surface water interaction model with a transient surface flow routing model
2 to assess wetland connectivity in a large wetland-dominated watershed within the Prairie Pothole Region. The modeling
3 approach uses a one-way coupling of subsurface and surface flow processes, and therefore ignores the potential subsurface
4 exfiltration feedback on surface flow routing. Nonetheless, the modeling approach enables answers to long-standing questions on
5 watershed-scale surface and subsurface connections of wetlands that far outweigh its limitations.
6

7 *Model performance*

8 The calibrated parameters of the groundwater-surface water interaction model including saturated hydraulic
9 conductivities of the subsurface and recharge rate were consistent with observations within or close to the Beaverhill watershed.
10 The groundwater-surface water interaction model predicts reasonably groundwater discharge/recharge areas along the land
11 surface compared to groundwater discharge/recharge areas inferred from hydraulic head measurements, chemical tracers and
12 isotopic signatures. The “fill and spill” overland flow model predicted observed stream flow close to the Beaverhill watershed
13 outlet with acceptable accuracy.

14 *Timing and length of connection*

15 The coupled model was used to map wetland connectivity and quantify the continuum of time and length variations of
16 this connectivity. Our results reveal that wetlands in the Beaverhill watershed, with a high density of geographically isolated
17 wetlands (GIWs), are not hydrologically isolated. Furthermore, the subsurface and surface connections show diverse number,
18 timing and length. The number of wetlands connected to the major drainage network (here the North Saskatchewan River) from
19 subsurface pathways was significantly larger than the number of wetlands connected from surface pathways, even in response to
20 large precipitation events (Figure 5). Fast surface connections originated from the wetlands located near the river (with a
21 maximum distance of 8 km) whereas slow subsurface connections originated from a wide range of close and distant wetlands
22 with a maximum distance of 30 km from the river. Indeed, model simulations reveal that regional surface waters integrate the
23 entire continuum of time and length variations of connectivity, not just rapid or surface-connected flowpaths located at the top of
24 this continuum.

25 Watershed hydrologic, biogeochemical and biological functions in wetland-dominated landscapes such as the Beaverhill
26 watershed are influenced by the transit times, velocities (rates) and mode (pathways) of hydrologic connection (Bracken and
27 Croke, 2007; Cohen et al., 2016). Wetlands that connect rapidly (but not persistently) to the river via surface fill-and-spill
28 mechanism constrain peak flow volumes, delay peak timing, and retain sediments (Craft and Casey, 2000). However, wetlands
29 that connect to the river only via slower subsurface flowpaths regulate water table depth (Lane et al., 2015), maintain base flow
30 and recession rate of river hydrographs (McLaughlin et al., 2014; Golden et al., 2015), and retain and transform pollutants
31 (Marton et al., 2015). Furthermore, long transit times and lengths of subsurface connections impact biogeochemical processes in
32 the vicinity of the river and enhance the concentration of solutes discharged into the river, by facilitating completion of
33 kinetically-limited reactions and enhance retention, sorption and transformation of nutrients (Min et al., 2010), metals (Mays and
34 Edwards, 2001) and likely pesticides (Ameli, 2016), all of which influence aquatic ecosystem structure and function (e.g., Euliss
35 et al., 2004; Cook and Hauer, 2007). Figure 6c depicts the simulated cumulative probability of transit time distribution of North
36 Saskatchewan River (ensemble of surface and subsurface wetland-originated contributions), and summarizes the potential
37 ecosystem services of each portion of this continuum.

1 *Distance not a proxy for connectivity*

2 Our results show that all wetlands located within a distance of 30 km can affect the quantity and quality of water in the
3 North Saskatchewan River. Contrary to Hayashi et al. (2016) who hypothesized that wetlands in PPR can only be connected to
4 closely adjacent water bodies and subsurface flow through the deeper portions is insignificant, our findings using novel 3D
5 watershed-scale subsurface-surface connectivity model corroborates the simple pond water budget calculations of Brannen et al.
6 (2015) who showed that wetlands in PPR can be connected to stream network through subsurface flow. Quantification of the
7 contribution of wetlands to the river suggests that slow subsurface flow contribution to the river flow is substantial (0.775×10^6
8 m^3 per month) and comparable to the surface flow contribution ($0.81 \times 10^6 \text{ m}^3$ per month during the driest year and $1.43 \times 10^6 \text{ m}^3$
9 per month during the wettest year since 2000). In addition, although the surface flow contribution from wetlands to the river is
10 correlated with the wetlands distance to the river, subsurface flow contribution from wetlands to the river had a weak relationship
11 with the distance between wetlands and the river (Figure 8), and a broad range of proximal and distal wetlands can be connected
12 to the river (Figure 6a) and influence the river quality and quantity. This implies that decisions to protect GIWs based only on
13 distance of the wetland to a river (e.g., 2015 U.S. Clean Water Rule (Federal Register 80: 37054-37127)), may lead to the loss of
14 distal wetlands with important watershed functions. These findings can be extended to the entire PPR, since the climate, geology
15 and topography can be considered similar throughout the PPR.

16 *Guidelines for wetland protection, removal and restoration*

17 Human alteration has changed the natural continuum and timing of hydrologic connectivity (Min et al., 2010; Pringle,
18 2003). Given that the aforementioned ecosystem services accrue from a continuum of transit times, the cumulative impact of
19 such alteration can be significant (Johnston, 1991; Zedler, 2003). Current wetland management strategies in the PPR are likely to
20 lead to loss of wetlands (particularly GIWs) located far from regional surface waters (Van Meter and Basu, 2015; Serran and
21 Creed, 2015). Removing these wetlands can increase surface pathways towards rivers with potential consequences of flooding
22 and eutrophication during large events. For example, the loss of GIWs in watersheds including the Beaverhill watershed has been
23 implicated as one cause of the increase in phosphorus loading to Lake Winnipeg, located 1,300 km east of the Beaverhill
24 watershed, leading to eutrophication events and the 2013 listing of Lake Winnipeg as the most threatened lake in the world
25 (Ulrich et al., 2016).

26 Our modeling approach can explicitly assess and evaluate the hydrologic connectivity of individual wetlands, providing
27 scientists and conservation authorities with information to understand and manage the potential response of the entire watershed
28 to direct and indirect changes such as wetland drainage or restoration. Furthermore, coupling robust hydrologic connectivity
29 models with biogeochemical and biological data can (1) improve our understanding of landscape hydrologic connectivity and its
30 impact on the structure and function of wetlands, and (2) aid in the assessment of feedbacks between hydrology, biogeochemistry
31 and biology.

32 **5 Conclusion**

33 A one-way coupled subsurface-surface model was developed to assess the continuum of time and distance variations of
34 hydrologic connectivity of wetlands in a large watershed with a high density of geographically-isolated wetlands in the Prairie
35 Pothole Region. The model showed that wetlands are not hydrologically isolated, and that the surface and subsurface hydrologic
36 connections vary significantly in terms of their timing and length. Contributions of slow, subsurface connections from both
37 proximal and distal wetlands to the river are substantial and comparable to the contributions of fast, surface connections.

1 Prioritization of protection of wetlands that relies on shortest distance of wetland to the river or surface connections alone can
 2 lead to unintended consequences in terms of loss of attending wetland ecosystem functions, services and their benefits to society.
 3 The subsurface-surface model is computationally efficient, enabling upscaling to the entire Prairie Pothole Region (and
 4 elsewhere) to assess wetland connectivity that was heretofore difficult to quantify, and providing guidance on the development of
 5 watershed management and conservation plans (e.g., wetlands drainage/restoration) under different climate and land
 6 management scenarios.

7 **Data and code availability**

8 The data used in this paper are available upon request from the corresponding author.

9 **Appendix A: Mathematical formulation of Groundwater-Surface water interaction model**

10 At each layer ($m = 1 \dots M$) of an unconfined aquifer, the exact 3D series solution to the saturated steady flow
 11 governing equation, with no-flow conditions along the sides of the computational domain, was obtained in terms of discharge
 12 potential function ($\phi_m = K_m h_s$) as (Ameli and Craig, 2014):

$$13 \quad \phi_m(x, y, z) = \sum_{j=0}^{J-1} \sum_{n=0}^{N-1} \cos \omega_j x \cos \omega_n y [A_{jn}^m \cosh(\gamma_{jn} z) + B_{jn}^m \sinh(\gamma_{jn} z)] \quad (\text{A.1})$$

$$14 \quad \text{where } \omega_j = \frac{j\pi}{L_x}; \omega_n = \frac{n\pi}{L_y}; \gamma_{jn} = \pi \sqrt{\frac{j^2}{L_x^2} + \frac{n^2}{L_y^2}} \text{ for } j = 0 \dots J-1 \text{ \& } n = 0 \dots N-1$$

15 In eq. (A.1), $h_s(x, y, z)$ is the total hydraulic head, and K_m (LT^{-1}) is the m^{th} layer saturated hydraulic conductivity. In addition, j
 16 and n represent the coefficient index, whereas J and N refer to number of series in the x and y directions, respectively. A total of
 17 144 series terms ($N=12$ and $J=12$) were used. The series coefficients associated with the m^{th} layer and j^{th} and n^{th} series term are
 18 A_{jn}^m and B_{jn}^m . The rectangular computational domain with no-flow side boundaries has a length of $L_x = 84.5$ km and $L_y = 95.4$
 19 km in x and y directions, respectively, which embeds the watershed boundary as shown in Fig. 1. No-flow side boundaries were
 20 placed on average 20 km away from the watershed original border; this treatment minimized the impact of side boundaries on
 21 flow behaviour and subsurface connections. A continuous map of hydraulic head was then obtained as:

$$22 \quad h_s(x, y, z) = \frac{\phi_m(x, y, z)}{K_m} \quad (\text{A.2})$$

23 To complete the solution, the unknown series solution coefficients of each layer (A_{jn}^m, B_{jn}^m) were calculated by imposing
 24 infiltration rate along the topographic surface, the no-flow condition along the bottom boundary, and the continuity of flux and
 25 head conditions along the layer interface of the multi-layer unconfined aquifer. A simple numerical least square scheme was used
 26 to impose these boundary and continuity conditions. In general, this continuous solution (Eq. (A.1)) exactly satisfies the mass
 27 balance and Darcy equations in the entire watershed, except along the boundaries where mass balance and Darcy equations are
 28 prone to numerical least square error. Ameli and Craig (2014) showed that this error can be negligible when sufficient number
 29 of control points was used within numerical least square algorithm. To ensure minimum numerical least square error along the
 30 boundary and layer interfaces, 806130 control points (uniformly-spaced at each 100 m) were placed along two boundary
 31 interfaces and the layer interface of the computational domain.

32 The continuous maps of Darcy fluxes at the m^{th} layer and at each x, y and z directions can be computed by the following
 33 equation:

$$34 \quad q_m^x(x, y, z) = \frac{d\phi_m(x, y, z)}{dx} \quad (\text{A.3a})$$

1
$$q_m^y(x, y, z) = \frac{d\phi_m(x, y, z)}{dy} \quad (\text{A.3b})$$

2
$$q_m^z(x, y, z) = \frac{d\phi_m(x, y, z)}{dz} \quad (\text{A.3c})$$

3 Equation (A.3) can also be used to determine groundwater discharge fluxes at discharge areas (seepage faces) along the
4 land surface as well as groundwater recharge fluxes where the water table is below the land surface. A subsurface map of pore
5 water velocities (V), which is required to perform subsurface water particle tracking, was obtained as:

6
$$V_m^x(x, y, z) = \frac{1}{\theta_s} q_m^x(x, y, z) \quad (\text{A.4a})$$

7
$$V_m^y(x, y, z) = \frac{1}{\theta_s} q_m^y(x, y, z) \quad (\text{A.4b})$$

8
$$V_m^z(x, y, z) = \frac{1}{\theta_s} q_m^z(x, y, z) \quad (\text{A.4c})$$

9 where θ_s is subsurface porosity. Inputs to the model included: (1) the location and water level of wetlands; and (2) material
10 properties of the subsurface. For (1), the delineated wetlands explained in Sect. 2.2 were used, and we assumed that the water
11 level was equal to the average elevation of each wetland boundary. This water level was used as a constant head boundary
12 condition at each wetland. For (2), a two-layer unconfined aquifer with a 5 m thick shallow layer was used to characterize the
13 subsurface (as suggested in van der Kamp and Hayashi, 2009). The bottom boundary of the computational domain was assumed
14 to be at $Z = 0$ with a no-flow condition. A porosity (θ_s) value of 0.14 equal to the average measured porosity at the Beaverhill
15 watershed (Gleeson et al., 2014) was also used.

16 **Competing interests**

17 The authors declare that they have no conflict of interest.

18 **Acknowledgements**

19 This research was funded by a NSERC Discovery Grant and an Alberta Land Institute Grant to I-F-C. The authors
20 gratefully acknowledge Alberta Agriculture and Forestry, Alberta Environment and Parks, Alberta Geological Survey and
21 Environment and Climate Change Canada for providing some of the data and measurements used in this paper. The authors
22 would also like to thank Dr. Jeffrey McDonnell, Dr. Allan Rodhe, Dr. Kevin Bishop and Dr. Thomas Grabs for providing
23 insightful comments which improved the quality of the manuscript.

1 **References**

- 2 Ameli, A. A., and Craig, J. R.: Semianalytical series solutions for three-dimensional groundwater-surface water interaction,
3 Water Resources Research, 50, 2014.
- 4 Ameli, A. A.: Controls on subsurface transport of sorbing contaminant, Hydrology Research, 10.2166/nh.2016.170, 2016.
- 5 Ameli, A. A., Amvrosiadi, N., Grabs, T., Laudon, H., Creed, I., McDonnell, J., and Bishop, K.: Hillslope permeability
6 architecture controls on subsurface transit time distribution and flow paths, Journal of Hydrology, 543, 17-30,
7 10.1016/j.jhydrol.2016.04.071, 2016a.
- 8 Ameli, A. A., McDonnell, J. J., and Bishop, K.: The exponential decline in saturated hydraulic conductivity with depth and its
9 effect on water flow paths and transit time distribution, Hydrological Processes, 30, 12, 10.1002/hyp.10777, 2016b.
- 10 Ameli, A. A., Beven, K., Erlandsson, M., Creed, I., McDonnell, J., and Bishop, K.: Primary weathering rates, water transit times
11 and concentration-discharge relations: A theoretical analysis for the critical zone, Water Resources Research, 52,
12 10.1002/2016WR019448, 2017.
- 13 Baatz, M., and Schäpe, A.: Multiresolution segmentation: an optimization approach for high quality multi-scale image
14 segmentation, Angewandte Geographische Informationsverarbeitung XII, 12-23, 2000.
- 15 Barker, A., Riddell, J., Slattery, S., Andriashek, L., Moktan, H., Wallace, S., Lyster, S., Jean, G., Huff, G., and Stewart, S.:
16 Edmonton–Calgary corridor groundwater atlas, Energy Resources Conservation Board, ERCB/AGS Information Series, 140, 90,
17 2011.
- 18 Bracken, L. J., and Croke, J.: The concept of hydrological connectivity and its contribution to understanding runoff-dominated
19 geomorphic systems, Hydrological processes, 21, 1749-1763, 2007.
- 20 Brannen, R., Spence, C., and Ireson, A.: Influence of shallow groundwater–surface water interactions on the hydrological
21 connectivity and water budget of a wetland complex, Hydrological Processes, 29, 3862-3877, 2015.
- 22 Burns, D. A., Plummer, L. N., McDonnell, J. J., Busenberg, E., Casile, G. C., Kendall, C., Hooper, R. P., Freer, J. E., Peters, N.
23 E., and Beven, K.: The geochemical evolution of riparian ground water in a forested piedmont catchment, Ground Water, 41,
24 913-925, 2003.
- 25 Cohen, M. J., Creed, I. F., Alexander, L., Basu, N. B., Calhoun, A. J., Craft, C., D’Amico, E., DeKeyser, E., Fowler, L., and
26 Golden, H. E.: Do geographically isolated wetlands influence landscape functions?, Proceedings of the National Academy of
27 Sciences, 201512650, 2016.
- 28 Cook, B. J., and Hauer, F. R.: Effects of hydrologic connectivity on water chemistry, soils, and vegetation structure and function
29 in an intermontane depression wetland landscape, Wetlands, 27, 719-738, 2007.
- 30 Craft, C. B., and Casey, W. P.: Sediment and nutrient accumulation in floodplain and depression freshwater wetlands of
31 Georgia, USA, Wetlands, 20, 323-332, 2000.

- 1 Dixon, M., Loh, J., Davidson, N., Beltrame, C., Freeman, R., and Walpole, M.: Tracking global change in ecosystem area: the
2 Wetland Extent Trends index, *Biological Conservation*, 193, 27-35, 2016.
- 3 Euliss, N. H., LaBaugh, J. W., Fredrickson, L. H., Mushet, D. M., Laubhan, M. K., Swanson, G. A., Winter, T. C., Rosenberry,
4 D. O., and Nelson, R. D.: The wetland continuum: a conceptual framework for interpreting biological studies, *Wetlands*, 24, 448-
5 458, 2004.
- 6 Frei, S., and Fleckenstein, J. H.: Representing effects of micro-topography on runoff generation and sub-surface flow patterns by
7 using superficial rill/depression storage height variations, *Environmental Modelling & Software*, 52, 5-18,
8 10.1016/j.envsoft.2013.10.007, 2014.
- 9 Gleeson, T., Moosdorf, N., Hartmann, J., and Beek, L.: A glimpse beneath earth's surface: GLobal HYdrogeology MaPS
10 (GLHYMPS) of permeability and porosity, *Geophysical Research Letters*, 41, 3891-3898, 2014.
- 11 Godsey, S. E., Kirchner, J. W., and Clow, D. W.: Concentration–discharge relationships reflect chemostatic characteristics of US
12 catchments, *Hydrological Processes*, 23, 1844-1864, 2009.
- 13 Golden, H., Creed, I. F., Ali, G., Basu, N. B., Neff, B., Rains, M., McLaughlin, D., Alexander, L., Ameli, A. A., Christensen, J.,
14 Evenson, G., Jones, C., Lane, C., and Lang, M.: Scientific tools for integrating geographically isolated wetlands into land
15 management decisions, *Frontiers in Ecology and the Environment*, under review, 2017.
- 16 Golden, H. E., Lane, C. R., Amatya, D. M., Bandilla, K. W., Kiperwas, H. R., Knightes, C. D., and Ssegane, H.: Hydrologic
17 connectivity between geographically isolated wetlands and surface water systems: a review of select modeling methods,
18 *Environmental Modelling & Software*, 53, 190-206, 2014.
- 19 Golden, H. E., Sander, H. A., Lane, C. R., Zhao, C., Price, K., D'Amico, E., and Christensen, J. R.: Relative effects of
20 geographically isolated wetlands on streamflow: a watershed-scale analysis, *Ecology*, 2015.
- 21 Hayashi, M., van der Kamp, G., and Rosenberry, D. O.: Hydrology of prairie wetlands: understanding the integrated surface-
22 water and groundwater processes, *Wetlands*, 1-18, 2016.
- 23 Johnston, C. A.: Sediment and nutrient retention by freshwater wetlands: effects on surface water quality, *Critical Reviews in*
24 *Environmental Science and Technology*, 21, 491-565, 1991.
- 25 Kirchner, J.: Aggregation in environmental systems–Part 1: Seasonal tracer cycles quantify young water fractions, but not mean
26 transit times, in spatially heterogeneous catchments, *Hydrol. Earth Syst. Sci*, 20, 279-297, 2016.
- 27 Lane, C. R., Autrey, B., Jicha, T., Lehto, L., Elonen, C., and Seifert-Monson, L.: Denitrification Potential in Geographically
28 Isolated Wetlands of North Carolina and Florida, USA, *Wetlands*, 1-13, 2015.
- 29 Leibowitz, S. G.: Isolated wetlands and their functions: an ecological perspective, *Wetlands*, 23, 517-531, 2003.
- 30 Leibowitz, S. G., and Vining, K. C.: Temporal connectivity in a prairie pothole complex, *Wetlands*, 23, 13-25, 2003.
- 31 Leibowitz, S. G.: Geographically Isolated Wetlands: Why We Should Keep the Term, *Wetlands*, 35, 997-1003, 2015.

- 1 Lindsay, J. B., and Creed, I. F.: Sensitivity of digital landscapes to artifact depressions in remotely-sensed DEMs,
2 Photogrammetric Engineering & Remote Sensing, 71, 1029-1036, 2005.
- 3 Maher, K., and Druhan, J.: Relationships between the transit time of water and the fluxes of weathered elements through the
4 critical zone, *Procedia Earth and Planetary Science*, 10, 16-22, 2014.
- 5 Manning, R., Griffith, J. P., Pigot, T., and Vernon-Harcourt, L. F.: On the flow of water in open channels and pipes, 1890.
- 6 Marton, J. M., Creed, I. F., Lewis, D. B., Lane, C. R., Basu, N. B., Cohen, M. J., and Craft, C. B.: Geographically Isolated
7 Wetlands are Important Biogeochemical Reactors on the Landscape, *BioScience*, biv009, 2015.
- 8 Mays, P., and Edwards, G.: Comparison of heavy metal accumulation in a natural wetland and constructed wetlands receiving
9 acid mine drainage, *Ecological Engineering*, 16, 487-500, 2001.
- 10 McDonnell, J. J., and Beven, K.: Debates—The future of hydrological sciences: A (common) path forward? A call to action
11 aimed at understanding velocities, celerities and residence time distributions of the headwater hydrograph, *Water Resources*
12 *Research*, 50, 5342-5350, 2014.
- 13 McGuire, K. J., and McDonnell, J. J.: A review and evaluation of catchment transit time modeling, *Journal of Hydrology*, 330,
14 543-563, 2006.
- 15 McLaughlin, D. L., and Cohen, M. J.: Realizing ecosystem services: wetland hydrologic function along a gradient of ecosystem
16 condition, *Ecological Applications*, 23, 1619-1631, 2013.
- 17 McLaughlin, D. L., Kaplan, D. A., and Cohen, M. J.: A significant nexus: Geographically isolated wetlands influence landscape
18 hydrology, *Water Resources Research*, 50, 7153-7166, 2014.
- 19 Min, J.-H., Perkins, D. B., and Jawitz, J. W.: Wetland-groundwater interactions in subtropical depression wetlands, *Wetlands*,
20 30, 997-1006, 2010.
- 21 Mushet, D. M., Calhoun, A. J., Alexander, L. C., Cohen, M. J., DeKeyser, E. S., Fowler, L., Lane, C. R., Lang, M. W., Rains, M.
22 C., and Walls, S. C.: Geographically isolated wetlands: rethinking a misnomer, *Wetlands*, 35, 423-431, 2015.
- 23 Pringle, C.: The need for a more predictive understanding of hydrologic connectivity, *Aquatic Conservation: Marine and*
24 *Freshwater Ecosystems*, 13, 467-471, 2003.
- 25 Rains, M., Leibowitz, S., Cohen, M., Creed, I., Golden, H., Jawitz, J., Kalla, P., Lane, C., Lang, M., and McLaughlin, D.:
26 Geographically isolated wetlands are part of the hydrological landscape, *Hydrological Processes*, 30, 153-160, 2015.
- 27 Rains, M. C., Fogg, G. E., Harter, T., Dahlgren, R. A., and Williamson, R. J.: The role of perched aquifers in hydrological
28 connectivity and biogeochemical processes in vernal pool landscapes, Central Valley, California, *Hydrological Processes*, 20,
29 1157-1175, 2006.
- 30 Salamon, P., Fernández-García, D., and Gómez-Hernández, J. J.: A review and numerical assessment of the random walk
31 particle tracking method, *Journal of contaminant hydrology*, 87, 277-305, 2006.

- 1 Sass, G., Creed, I., Riddell, J., and Bayley, S.: Regional-scale mapping of groundwater discharge zones using thermal satellite
2 imagery, *Hydrological Processes*, 28, 5662-5673, 2014.
- 3 Serran, J., and Creed, I.: New mapping techniques to estimate the preferential loss of small wetlands on prairie landscapes,
4 *Hydrological Processes*, 2015.
- 5 Shaw, D. A., Vanderkamp, G., Conly, F. M., Pietroniro, A., and Martz, L.: The fill–spill hydrology of prairie wetland complexes
6 during drought and deluge, *Hydrological Processes*, 26, 3147-3156, 2012.
- 7 Shook, K., Pomeroy, J. W., Spence, C., and Boychuk, L.: Storage dynamics simulations in prairie wetland hydrology models:
8 Evaluation and parameterization, *Hydrological Processes*, 27, 1875-1889, 2013.
- 9 Shrestha, R. R., Dibike, Y. B., and Prowse, T. D.: Modeling climate change impacts on hydrology and nutrient loading in the
10 upper assiniboine catchment1, in *Wiley Online Library*, 2012.
- 11 Therrien, R., McLaren, R., Sudicky, E., and Panday, S.: HydroGeoSphere: A three-dimensional numerical model describing
12 fully-integrated subsurface and surface flow and solute transport, *Groundwater Simul. Group*, Waterloo, Ont., Canada, 2008.
- 13 Tiner, R. W.: Estimated extent of geographically isolated wetlands in selected areas of the United States, *Wetlands*, 23, 636-652,
14 2003.
- 15 Ulrich, A. E., Malley, D. F., and Watts, P. D.: Lake Winnipeg basin: advocacy, challenges and progress for sustainable
16 phosphorus and eutrophication control, *Science of the Total Environment*, 542, 1030-1039, 2016.
- 17 US-EPA: Connectivity of Streams and Wetlands to Downstream Waters: A Review and Synthesis of the Scientific Evidence (US
18 Environmental Protection Agency, Washington, DC), 2015.
- 19 van der Kamp, G., and Hayashi, M.: Groundwater-wetland ecosystem interaction in the semiarid glaciated plains of North
20 America, *Hydrogeology Journal*, 17, 203-214, 2009.
- 21 Van Meter, K. J., and Basu, N. B.: Signatures of human impact: size distributions and spatial organization of wetlands in the
22 Prairie Pothole landscape, *Ecological Applications*, 25, 451-465, 2015.
- 23 Winter, T. C., and LaBaugh, J. W.: Hydrologic considerations in defining isolated wetlands, *Wetlands*, 23, 532-540, 2003.
- 24 Zedler, J. B.: Wetlands at your service: reducing impacts of agriculture at the watershed scale, *Frontiers in Ecology and the*
25 *Environment*, 1, 65-72, 2003.
- 26

1 **Table 1: Average concentration of chemical tracers in hydrologically-simulated groundwater discharge and recharge**
 2 **areas, as well as p-values of non-parametric Wilcoxon rank sum test (equality of median) used to assess the differences in**
 3 **shallow groundwater chemistry between simulated groundwater discharge and recharge areas. p-values less than 0.10**
 4 **depicts a statistically significant difference between chemistry of simulated groundwater discharge and recharge areas.**

	Ca(mg/l)	Mg(mg/l)	TDS(mg/l)	EC(μ S/cm)
Discharge	123	46	1189	1631
Recharge	102	43	995	1443
<i>p</i> -value	0.09	0.02	0.09	0.05

5

6

7 **Table 2: Average concentration of chemical and isotopic tracers in hydrologically-simulated discharge and recharge**
 8 **wetlands, as well as p-values of non-parametric Wilcoxon rank sum test (equality of median) used to assess the**
 9 **differences in wetland chemistry and isotopic signatures between simulated discharge and recharge wetlands. The**
 10 **reported values in the parenthesis for ^{18}O (and ^2H) are the relative difference between average isotopic concentrations**
 11 **(ratio) in simulated discharge or recharge wetlands from average watershed concentration.**

	Ca(mg/l)	Mg(mg/l)	TDS(mg/l)	EC(μ S/cm)	ALK(mEq/l)	^{18}O (‰)	^2H (‰)
Discharge	65	42	1144	1502	241	-8.90 (3)	-105.37 (8)
Recharge	59	34	721	923	195	-6.28 (0.9)	-91.55 (3)
<i>p</i> -value	0.08	0.14	0.07	0.06	0.07	<0.001	<0.001

12

13

14 **Table 3: p-values of Wilcoxon rank sum and Levene tests that were used to assess the similarities in median and variance,**
 15 **respectively, between monthly-averaged climatic measures in the Beaverhill watershed and the entire Prairie Pothole**
 16 **Region. These statistical analyses were conducted based on 31 years (from 1981 to 2011) precipitation minus actual**
 17 **evapotranspiration (P-ET), snow water equivalent (SWE) and air temperature data. p-values greater than 0.10 indicate a**
 18 **similarity between climatic measures at a significance level of 0.10.**

	Wilcoxon rank sum	Levene
P-ET	0.38	0.44
SWE	0.02	0.92
Temperature	0.08	0.19

19


1

2 **Table 4: Comparison of the average values of geological features between Beaverhill watershed and the entire PPR. K**
3 **(m²) refers to permeability.**

	PPR	Beaverhill
Mean Porosity (%)	0.15	0.14
Mean Permeability No Permafrost (log(k))	-14.94	-15.13
Mean Permeability Permafrost (log(k))	-14.94	-15.13
Mean Permeability Standard Deviation (m ²)	1.79	1.82
Bedrock Geology - Sedimentary Rocks (% Area)	96.90%	97.67%

4

5

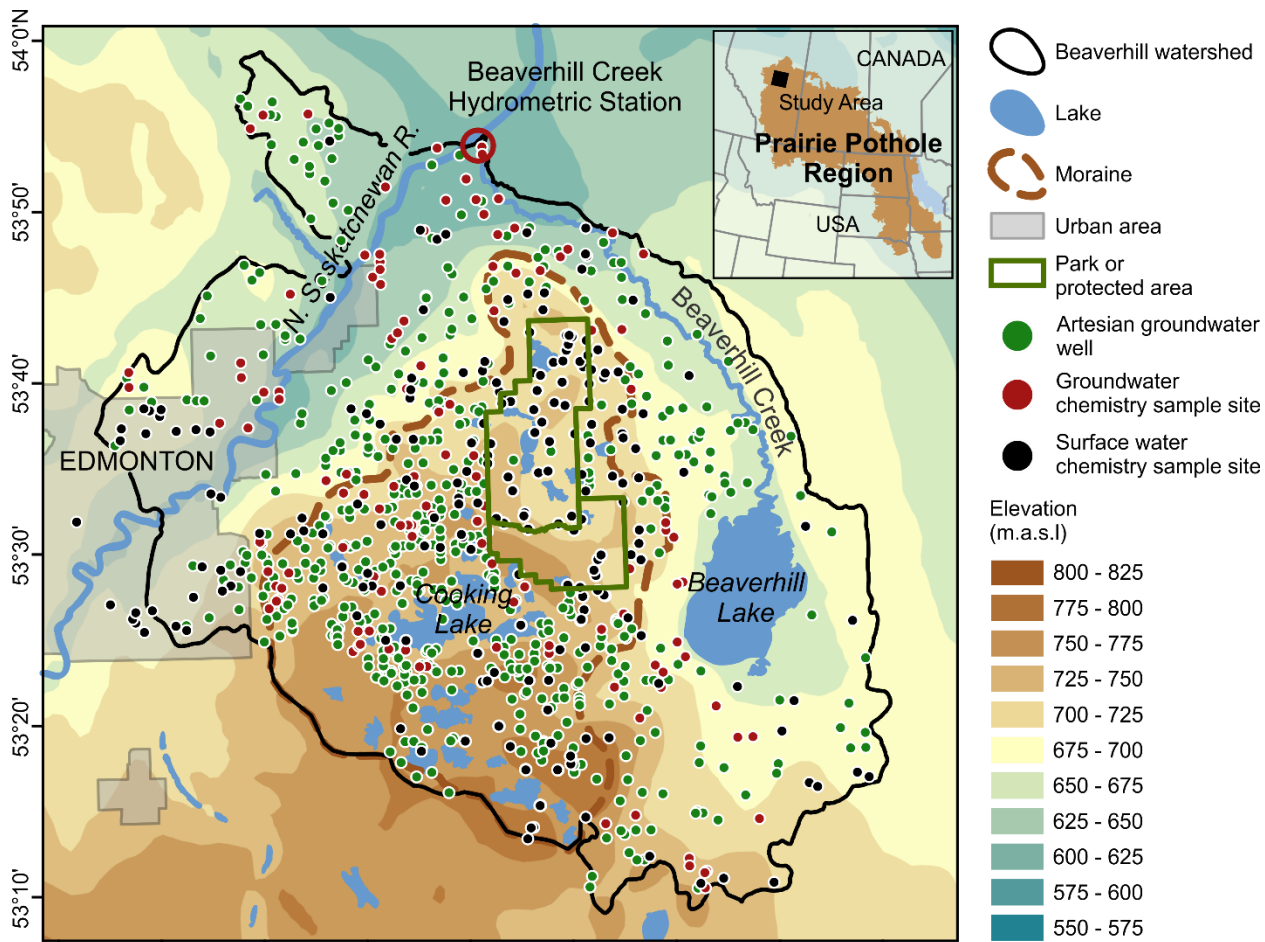

1 113°40'W 113°30' 113°20' 113°10' 113°0' 112°50' 112°40' 112°30' 112°20'

2 **Figure 1: Beaverhill watershed, Alberta, Canada. The location of 1,413 artesian groundwater wells installed in the**


3 **bedrock and screened 30 to 80 m below the land surface are shown (green dots). Black dots depict the location of 208**

4 **lakes, wetlands and ponds wherein chemistry and isotopic measurements were taken. Red dots depict the location of 121**


5 **shallow (< 10 m deep) groundwater wells wherein groundwater chemistry measurements were taken. The red ring shows**

6 **the location of Beaverhill Creek monitoring station. The inset shows the map of the Prairie Pothole region of North**


7 **America.**

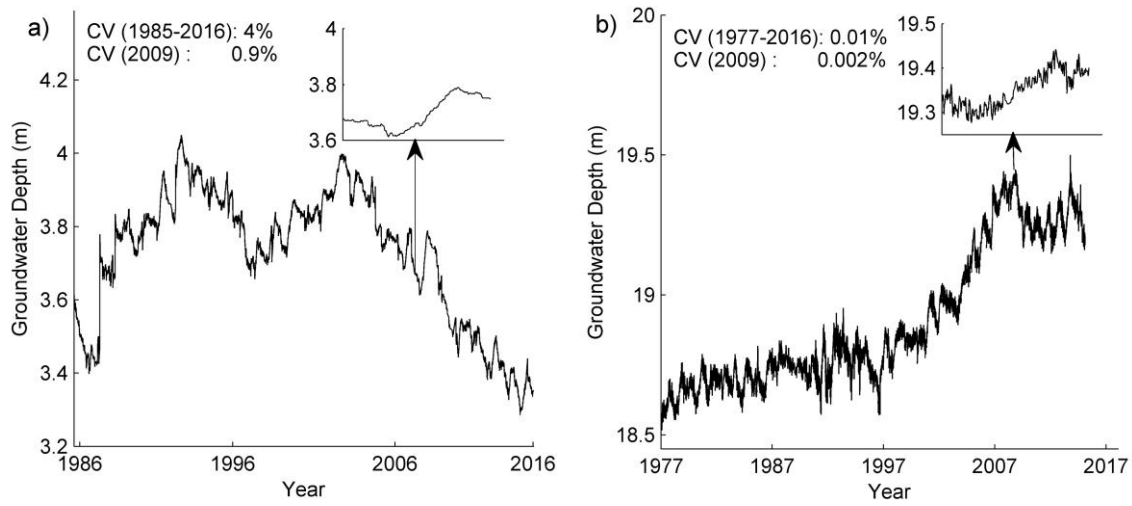

1
2 **Figure 2: Observed time series of groundwater depth at two measurement stations located east and west of the Beaverhill**
3 **watershed. a) Groundwater depth from August 1985 to July 2016 at the Vegreville measurement station located 15 km**
4 **east of the Beaverhill watershed boundary. b) Groundwater depth from October 1977 to October 2016 at the Barrhead**
5 **measurement station located 65 km east of the Beaverhill watershed boundary. The insets show the time series of**
6 **groundwater depth in 2009, when the observations used here to develop the steady-state groundwater-surface water**
7 **interaction model were available. CV refers to the coefficient of variation of groundwater depth data during the given**
8 **period.**

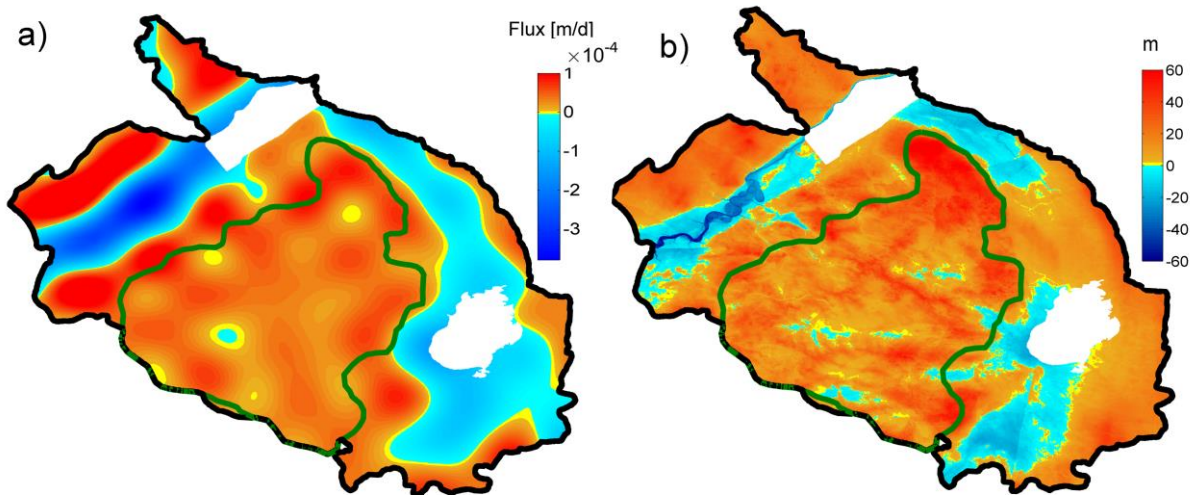


1
 2 **Figure 3: Comparison between simulated and inferred groundwater discharge/recharge areas. (a) Simulated**
 3 **groundwater discharge (blue surfaces with negative groundwater fluxes) and recharge (red surfaces with positive**
 4 **groundwater fluxes) areas. (b) Inferred groundwater discharge (blue surfaces) and recharge (red surfaces) areas from**
 5 **the potentiometric surface generated using measurements from 1,413 artesian wells. Areas where the presences of the**
 6 **Artesian wells were sparse (i.e., at the Beaverhill lake and in the vicinity of North Saskatchewan River, see Figure 1) were**
 7 **extracted. The correlation coefficient between simulated groundwater fluxes at the land surface and the distance of**
 8 **potentiometric surface above and below land surface is 75% ($p < 0.001$).**

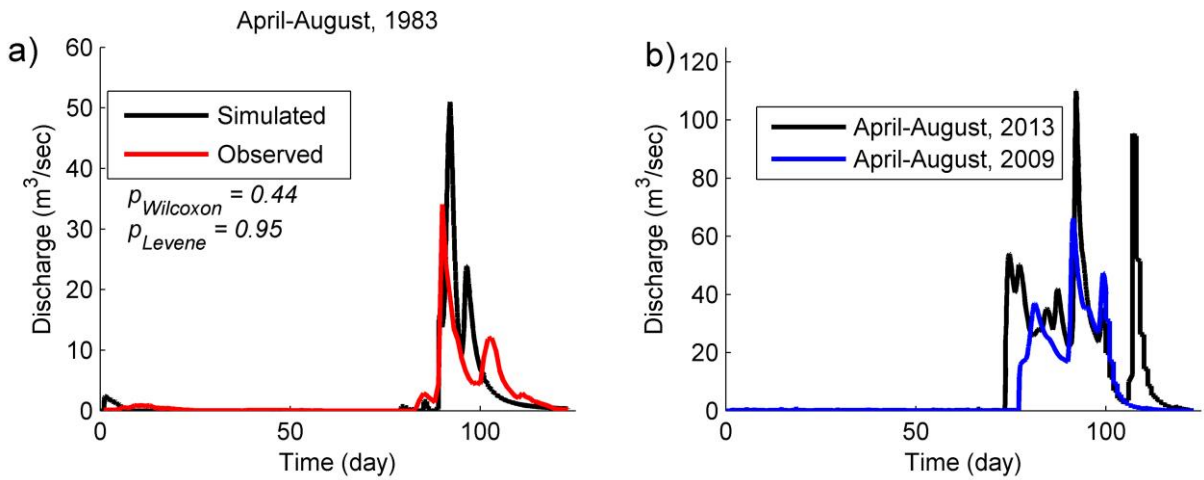


1
2 **Figure 4: Simulated and observed stream flow at the Beaverhill Creek monitoring station. a) Performance of the**
3 **developed overland flow model in the simulation of stream flow against observed stream flow from April 1,**
4 **1983, when stream flow observations were available. The correlation coefficient between observed and simulated**
5 **hydrographs was 87% ($p < 0.001$). $P_{Wilcoxon}$ and P_{Levene} refer to the P values of Wilcoxon and Levene tests used to assess the**
6 **similarity in median and variance between two hydrographs. b) Simulated hydrograph from April 1 to August 1, 2013**
7 **when the largest net surface water fluxes since 2000 occurred, and from April 1 to August 1, 2009 when the smallest net**
8 **surface water fluxes since 2000 occurred.**

9

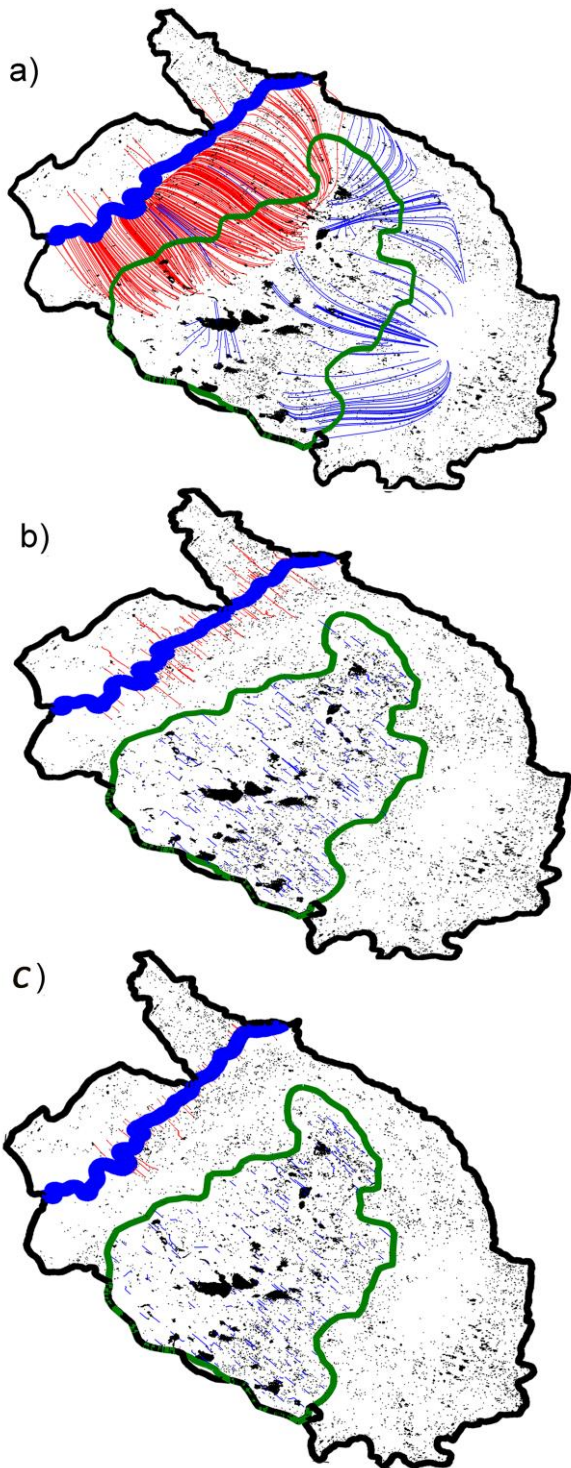


1
 2 **Figure 5: Hydrologic connectivity among wetlands (blue lines) and between wetlands and North Saskatchewan River (red**
 3 **lines). a) Map of subsurface connections, only particles released from recharge wetlands located in the moraine and**
 4 **reached the Beaverhill lake and discharge wetlands (blue lines), and particles discharged into North Saskatchewan River**
 5 **from recharge wetlands (red lines) are shown. b) Map of surface connections for the period from April 1 to August 2013,**
 6 **when the largest net surface water fluxes since 2000 occurred. c) Map of surface connections for the period from April 1**
 7 **to August 2009, when the smallest net surface water fluxes since 2000 occurred. Only surface connections between**
 8 **wetlands and North Saskatchewan River (red lines), and connections among wetlands within the Moraine (blue lines) are**
 9 **shown.**

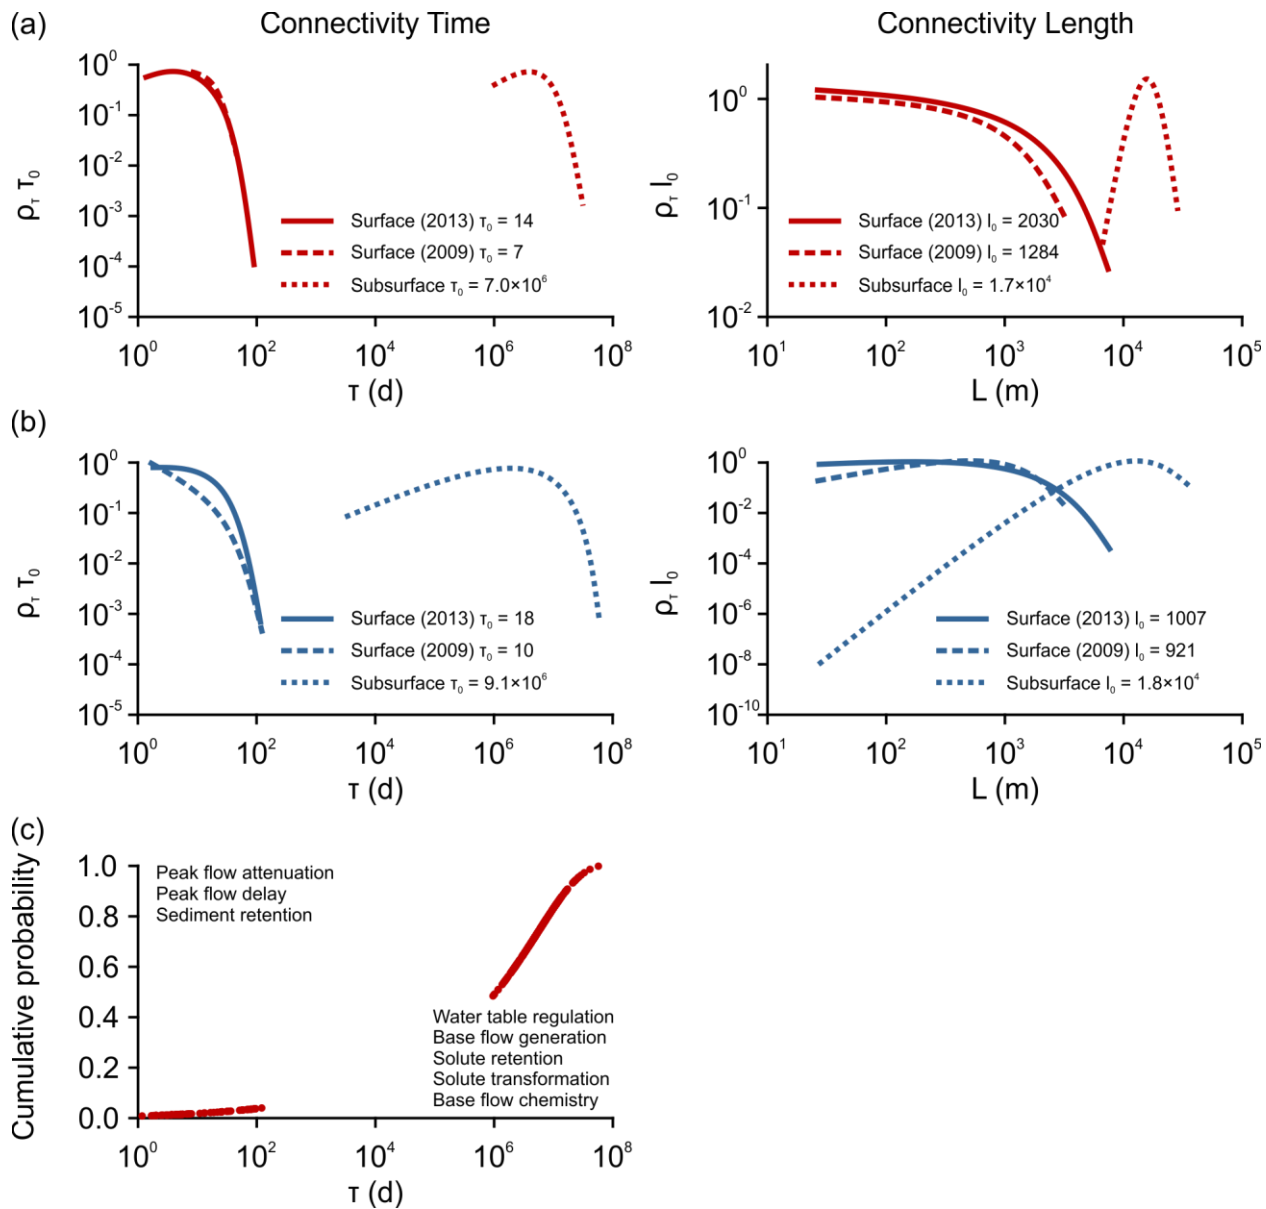

1


2 **Figure 6: Fitted probability density function of subsurface or surface (both 2009 and 2013) connection transit times (left**
 3 **panel) and lengths (right panel) a) between wetlands and North Saskatchewan River, and b) from wetlands located in the**
 4 **moraine and other wetlands throughout the watershed. l_0 [m] and τ_0 [d] refer to the average length and transit time,**
 5 **respectively. c) Cumulative probability of transit time distribution of water particles discharged from wetlands into**
 6 **North Saskatchewan River. The potential ecosystem services of each portion were also shown.**

7

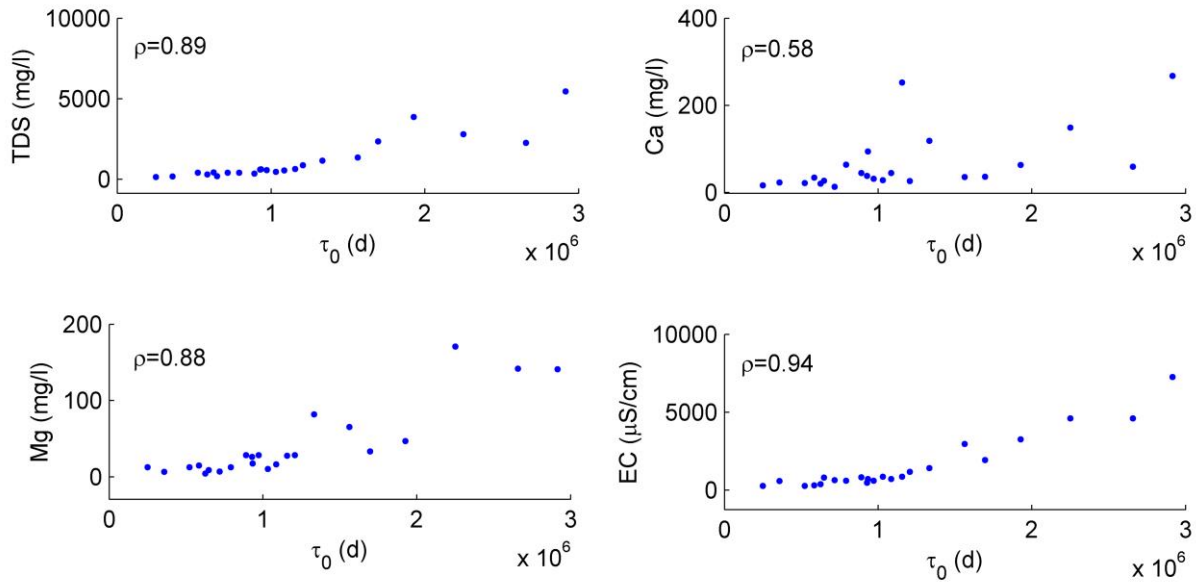


1
2 **Figure 7: Relation between simulated subsurface mean transit time (τ_0) of each discharge wetland and the concentration**
3 **of various chemical constituents in the wetland. Here, the pathlines discharged into each wetland and their associated**
4 **transit times were calculated by back tracking from 100 uniformly-distributed particle release points located at each**
5 **discharge wetland. ρ refers to the correlation coefficient between τ_0 chemical concentrations.**

6

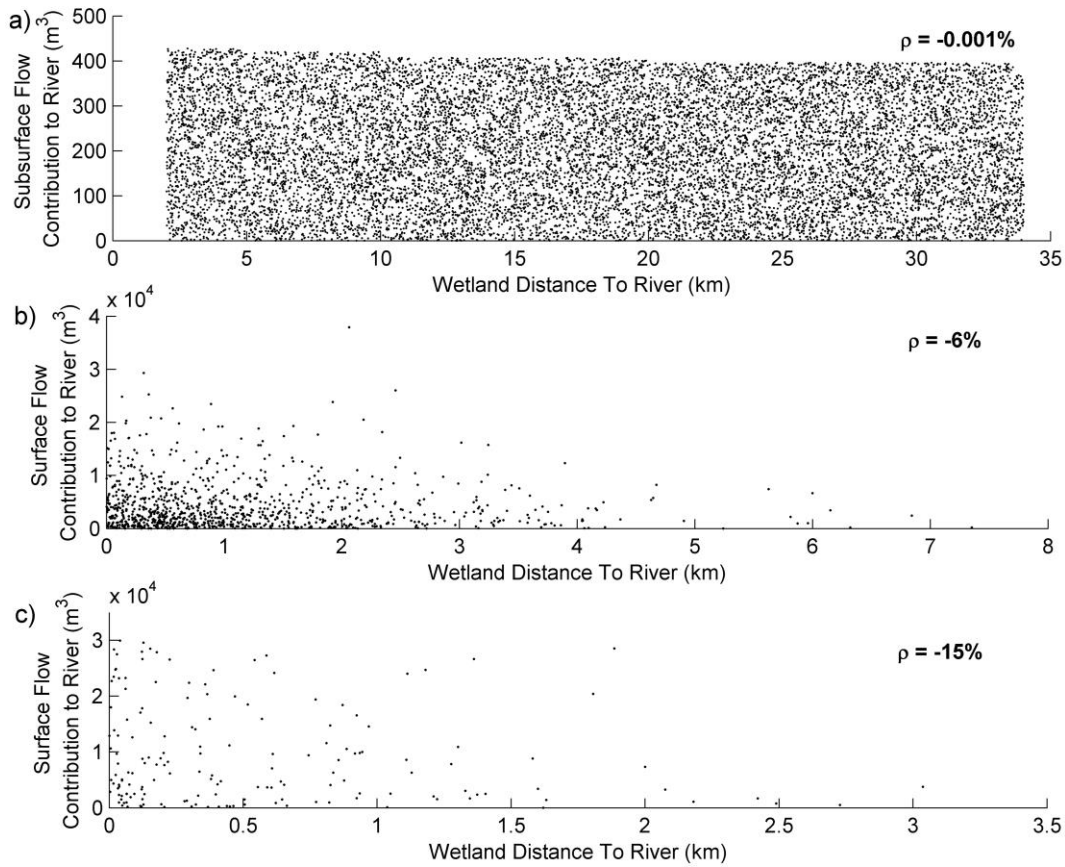

1

2 **Figure 8** The relationship between flow contribution of each wetland to the North Saskatchewan River and the distance
 3 of the wetland to the North Saskatchewan River. a) Subsurface flow contribution-distance relationship. Flow
 4 contribution was calculated for four months for each wetland using the steady-state model. b) Surface (April 1 to August
 5 2013) flow contribution-distance relationship. Flow contribution was calculated for four months (April 1 to August 2013)
 6 using the transient model. c) Surface (April 1 to August 2009) flow contribution-distance relationship. Flow contribution
 7 was calculated for four months (April 1 to August 2009) using the transient model.

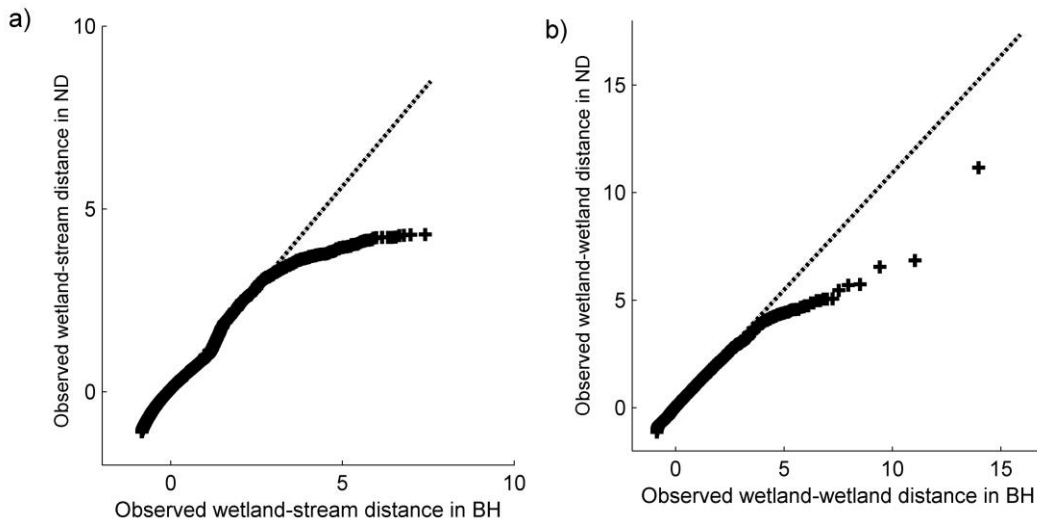

1
 2 **Figure 9: Quantile-Quantile (Q-Q) plot comparing the distributions of observed shortest distances between surface water**
 3 **bodies in Beaverhill watershed (BH) and prairie potholes in North Dakota (ND). (a) Standardized wetland-stream**
 4 **distance (observed shortest distances of wetland to nearest major stream) in the Beaverhill watershed (BH) vs.**
 5 **standardized wetland-stream distance in prairie potholes in North Dakota (ND). (b) Standardized wetland-wetland**
 6 **distance (observed shortest distances of wetlands to their nearest wetland neighbor) in the Beaverhill watershed (BH) vs.**
 7 **standardized observed wetland-wetland distance in prairie potholes in North Dakota (ND).**