

To Dr. Siebert and HESS editorial staff,

We greatly appreciate the AE's thoughtful review of the paper and his catch of several typos and poor language. We have revised the manuscript to carefully correct those mistakes, as well as the larger editorial and figure issues found by the AE. We believe these revisions have strongly improved the manuscript and made it ready for publication in HESS. Please see our response to these points in bold and blue below, with the line numbers referring to the track change version of the manuscript that is appended below.

Best,

Dr. Adrian Harpold and co-authors

1) Language: there are surprisingly many small language mistakes
just some examples from the abstract

L2: affect-affects

Changed

L27: verb missing after but (the 'are' from before does not work as 'a lack' is singular

Added 'there'

L32: include-includes

Changed

L37: delete algorithm (PP methods algorithms is double) (btw in this line: clarify too simple for what? Perhaps simplistic instead of 'too simple' is the better word here)

Agreed, and this was corrected in one other place.

Please go through the manuscript carefully and make sure to correct these language

2) P16,L477: here it is not clear what the difference between linear transition and min/max temperature is. Reading the text here I thought these would be the same approaches (linear transition between a min and max temp for the transition). First on the next page I realized that you in the latter were referring to min/max during a day. Even then, the min/max method remained unclear to me, Please explain better, perhaps include an equation. Actually, I think in general here a table with the mathematical expressions would be useful for all 4 approaches.

We liked the idea of a table summarizing these methods. This was added as Table 1 and referenced multiple times in the text.

3) Figure 1: Sorry, but this figure is rather unclear to me. I mean, the point you want to make is clear, but how does the fig help? The circles refer to some annual mean, I guess, but then the text boxes refer to timing in relation to vegetation, then below the text boxes

the lines go together, there is a horizontal line (why?) and below you have two hydrographs, where it is not clear whether you look at one event or a seasonal variation (x axis = month??). Also, why should an overprediction of rain lead to less rain runoff and more snow runoff???? I am honestly confused. Please reconsider this figure

We appreciate the AE's concern about the clarity of this figure. To improve these limitations we made several changes to figure 1) added text to clarify the pie charts were referring to cold-season hydrologic partitioning, 2) change the location of the blue arrows to indicate differences in timing, 3) stacked the line graphs to avoid implying either are associated with rain versus snow (and removed the extraneous horizontal line), and 4) added numbers to the x-axis of the line graphs to clarify season to annual time scales.

4) While I really like this manuscript and think many colleagues will find it useful, I felt, honestly, a bit lost in the end. You make the fully valid point that most hydro models use the simplest PPM and this is not good. But then, I miss some guidance on what to use in simple hydrological models. If one's model is a simple model with say 10 parameters for the hydrology, it is hard to motivate a highly detailed PPM. I guess what I was hoping for is some guidance what to use in different situations (depending on data, model, ...).

This point is well-taken. I think that information was there on how to improve simple models, but was mixed with more complex directions. To highlight this we have added a new paragraph starting on line 729: "We also highlight research gaps to improve relatively simple hydrological models without adding unnecessary complexity associated with sophisticated PPM approaches. For example, more efforts to verify the existing PPM in different climatic environments and during specific hydrometeorological events could help determine various temperature thresholds (Table 1) to apply in existing models (section 5.3). In addition, developing gridded precipitation phase products may eliminate the need to make existing models more complex by applying more complex PPM outside of those models, e.g. similar to precipitation distribution in existing gridded products used by many hydrological models. Ultimately, recognizing the sensitivity of hydrological model outcomes to PPM and identifying what climates and applications require higher phase prediction accuracy are crucial steps to determining the complexity of PPM required for specific applications."

We also added this sentence to the conclusion on line 893: "Improved PPM and existing phase products will also facilitate improvement of simpler hydrological models for which more complex PPM are not justified."

5) Most hydro models, even if lumped, use elevation zones, which, at the catchment scale, leads to a transition of the PP, in mountainous catchments. Just a thought, perhaps worth mentioning.

Agreed, a sentence was added on line 630: "It should be noted that many of these hydrological models lump by elevation zone, which improves estimates of the snow to rain transition elevation and phase prediction accuracy in complex terrain compared to models without elevation zones."

Other minor comments:

end of abstract: it is not clear to me why this should be modellers from hydro and atmo, but field persons only from hydro, if anything, I'd say the other way around

This was changed to include atmospheric field scientists

L408 heavier than what?

The specifics were added on line 454.

L906: precipitation misspelled, please check all references carefully

This was corrected and the references were carefully reviewed.

Rain or Snow: Hydrologic Processes, Observations, Prediction, and Research Needs

Adrian A. Harpold*, University of Nevada, Reno, aharpold@cabnr.unr.edu

Michael Kaplan, Desert Research Institute, michael.kaplan@dri.edu

P. Zion Klos, University of Idaho, zion.klos@gmail.com

Timothy Link, University of Idaho, tlink@uidaho.edu

James P. McNamara, Boise State University, jmcnamar@boisestate.edu

Seshadri Rajagopal, Desert Research Institute, Seshadri.Rajagopal@dri.edu

Rina Schumer, Desert Research Institute, rina@dri.edu

Caitriana M. Steele, New Mexico State University, caiti@nmsu.edu

*Corresponding author

17 **Abstract**

18 The phase of precipitation when it reaches the [ground](#) is a first-order driver of hydrologic
19 processes in a watershed. The presence of snow, rain, or mixed phase precipitation affects the
20 initial and boundary conditions that drive hydrological models. Despite their foundational
21 importance to terrestrial hydrology, typical phase prediction methods (PPM) specify phase based
22 on near-surface air temperature only. Our review conveys the diversity of tools available for
23 PPM in hydrological modeling and the advancements needed to improve predictions in complex
24 terrain with large spatiotemporal variations in precipitation phase. Initially, we review the
25 processes and physics that control precipitation phase as relevant to hydrologists, focusing on the
26 importance of processes occurring aloft. There [is](#) a wide range of options for field observations
27 of precipitation phase, but [there is](#) a lack of a robust observation networks in complex terrain.
28 New remote sensing observations have potential to increase PPM fidelity, but generally require
29 assumptions typical of other PPM and field validation before they are operational. We review
30 common PPM and find that accuracy is generally increased at finer measurement intervals and
31 by including humidity information. One important tool for PPM development is atmospheric
32 modeling, which includes [microphysical schemes](#) that have not been effectively linked to
33 hydrological models or validated against near-surface precipitation phase observations. The
34 review concludes by describing key research gaps and recommendations to improve PPM,
35 including better incorporation of atmospheric information, improved validation datasets, and
36 regional-scale gridded data products. Two key points emerge from this synthesis for the
37 hydrologic community: 1) current PPM [are too simple to capture important processes](#) and are not
38 well-validated for most locations, 2) lack of sophisticated PPM increases the uncertainty in
39 estimation of hydrological sensitivity to changes in precipitation phase at local to regional scales.
40 [The advancement of PPM is](#) a critical research frontier in hydrology that requires scientific
41 cooperation between hydrological and atmospheric modelers and field [scientists](#).

42
43 **Keywords:** precipitation phase, snow, rain, hydrological modeling

44
45 1. Introduction and Motivation

46 As climate warms, a major hydrologic shift in precipitation phase from snow to rain is expected
47 to occur across temperate regions that are reliant on mountain snowpacks for water [resource](#)
48 [provisioning](#) (Bales et al., 2006; Barnett et al., 2005). Continued changes in precipitation phase

Adrian Harpold 12/6/16 6:18 AM
Deleted: Earth surface

Adrian Harpold 12/6/16 6:18 AM
Deleted: are

Adrian Harpold 12/6/16 6:18 AM
Deleted: algorithms

Adrian Harpold 12/6/16 6:18 AM
Deleted: are

Adrian Harpold 12/6/16 6:18 AM
Deleted: hydrologists

Adrian Harpold 12/6/16 6:18 AM
Deleted: resources

are expected to alter snowpack dynamics and [both](#) streamflow timing and amounts (Cayan et al., 2001; Fritze et al., 2011; Luce and Holden, 2009; Klos et al., 2014; Berghuijs et al., 2014; Jepsen et al., 2016), increase rain-on snow flooding (McCabe et al., 2007), and challenge our ability to make accurate water supply forecasts (Milly et al., 2008). Accurate estimations of precipitation inputs are required for effective hydrological modeling in both applied and research settings. Snow storage delays the transfer of precipitation [to surface runoff, infiltration, and generation of streamflows](#) (Figure 1), affecting the timing and magnitude of peak flows (Wang et al., 2016), hydrograph recession (Yarnell et al., 2010) and the magnitude and duration of summer baseflow (Safeeq et al., 2014; Godsey et al., 2014). Moreover, the altered timing and rate of snow versus rain inputs can modify the partitioning of water to evapotranspiration versus runoff (Wang et al., 2013). Misrepresentation of precipitation phase within hydrologic models thus propagates into spring snowmelt dynamics (Harder and Pomeroy, 2013; Mizukami et al., 2013; White et al., 2002; Wen et al., 2013) and streamflow estimates used in water resource forecasting (Figure 1). The persistence of streamflow error is particularly problematic for hydrological models that are calibrated on observed streamflow [s](#) because this error can be compensated for by altering parameters that control other states and fluxes in the model (Minder, 2010; Shamir and Georgakakos, 2006; Kirchner, 2006). Expected changes in precipitation phase from climate warming presents a new set of challenges for effective hydrological modeling (Figure 1). A simple yet essential issue for nearly all runoff generation questions is this: Is precipitation falling as rain, snow, or a mix of both phases?

Despite advances in terrestrial process-representation within hydrological models in the past several decades (Fatichi et al., 2016), most state-of-the-art models rely on simple empirical algorithms to predict precipitation phase. For example, nearly all operational models used by the National Weather Service River Forecast Centers in the United States use some type of temperature-based precipitation phase partitioning method [\(PPM\)](#) (Pagano et al., 2014). These are often single or double temperature threshold models that do not consider other conditions important to the hydrometeor's energy balance. Although forcing datasets for hydrological models are rapidly being developed for a suite of meteorological variables, to date no gridded precipitation phase product has been developed over [regional to global scales](#). Widespread advances in both simulation of terrestrial hydrological processes and computational capabilities

Adrian Harpold 12/6/16 6:18 AM

Deleted: in

Adrian Harpold 12/6/16 6:18 AM

Deleted: and subsurface

Adrian Harpold 12/6/16 6:18 AM

Deleted: s

Adrian Harpold 12/6/16 6:18 AM

Deleted: a

90 may have limited improvements on water resources forecasts without commensurate advances in
91 PPM.

92

93 Recent advances in PPM incorporate effects of humidity (Harder and Pomeroy, 2013; Marks et
94 al., 2013), atmospheric temperature profiles (Froidurot et al., 2014), and remote sensing of phase
95 in the atmosphere (Minder, 2010; Lundquist et al., 2008). A challenge to improving and selecting
96 PPM is the lack of validation data. In particular, reliable ground-based observations of phase are
97 sparse, collected at the point scale over limited areas, and are typically limited to research rather
98 than operational applications (Marks et al., 2013). The lack of observations is particularly
99 problematic in mountain regions where snow-rain transitions are widespread and critical for
100 regional water resource evaluations (Klos et al., 2014). For example, direct visual observations
101 have been widely used (Froidurot et al., 2014; Knowles et al., 2006; U.S. Army Corps of
102 Engineers, 1956), but are decreasing in number in favor of automated measurement systems.
103 Automated systems use indirect methods to accurately estimate precipitation phase from
104 hydrometeor characteristics (i.e. disdrometers), as well as coupled measurements that infer
105 precipitation phase based on multiple lines of evidence (e.g. co-located snow depth and
106 precipitation). Remote sensing is another indirect method that typically uses radar returns from
107 ground and space-borne platforms to infer hydrometeor temperature and phase. A comprehensive
108 description of the advantages and disadvantages of current measurement strategies, and their
109 correspondence with conventional PPM, is needed to determine critical knowledge gaps and
110 research opportunities.

111

112 New efforts are needed to advance PPM to better inform hydrological models by integrating new
113 observations, expanding the current observation networks, and testing techniques over regional
114 variations in hydroclimatology. While calls to integrate atmospheric information are an
115 important avenue for advancement (Feiccabrino et al., 2013), hydrological models ultimately
116 require accurate and validated phase determination at the land surface. Moreover, any
117 advancement that relies on integrating new information or developing a new PPM technique will
118 require validation and training using ground-based observations. To make tangible hydrological
119 modeling [advancements](#), new techniques and datasets must be integrated with current modeling
120 tools. The first step towards improved hydrological modeling in areas with mixed precipitation

Adrian Harpold 12/6/16 6:18 AM

Deleted: the

Adrian Harpold 12/6/16 6:18 AM

Deleted: advancements in

123 phase is educating the scientific community about current techniques and limitations that convey
124 the areas where research is most needed.

Adrian Harpold 12/6/16 6:18 AM
Deleted: towards gaps

125
126 Our review paper is motivated by a lack of a comprehensive description of the state-of-the-art
127 PPM and observation tools. Therefore, we describe the current state of the science in a way that
128 clarifies the correspondence between techniques and observations, and highlights strengths and
129 weaknesses in the current scientific understanding. Specifically, subsequent sections will review:
130 1) the processes and physics that control precipitation phase as relevant to field hydrologists, 2)
131 current available options for observing precipitation phase and related measurements common in
132 remote field settings, 3) existing methods for predicting and modeling precipitation phase, and 4)
133 research gaps that exist regarding precipitation phase estimation. The overall objective is to
134 convey a clear understanding of the diversity of tools available for PPM in hydrological
135 modeling and the advancements needed to improve predictions in complex terrain characterized
136 by large spatiotemporal variations in precipitation phase.

Adrian Harpold 12/6/16 6:18 AM
Deleted: current

Adrian Harpold 12/6/16 6:18 AM
Deleted: science

Adrian Harpold 12/6/16 6:18 AM
Deleted: options

138 2. Processes and Physics Controlling Precipitation Phase

139 Precipitation formed in the atmosphere is typically a solid in the mid-latitudes and its phase at
140 the land surface is determined by whether it melts during its fall (Stewart et al., 2015). Most
141 hydrologic models do not simulate atmospheric processes and specify precipitation phase based
142 on surface conditions alone (see Section 4.1), ignoring phase transformations in the atmosphere.

143
144 Several important properties that influence phase changes in the atmosphere are not included in
145 hydrological models (Feicabrino et al., 2012), such as temperature and precipitation
146 characteristics (Theriault and Stewart, 2010), stability of the atmosphere (Theriault and Stewart,
147 2007), position of the 0 °C isotherm (Minder, 2010; Theriault and Stewart, 2010), interaction
148 between hydrometeors (Stewart, 1992), and the atmospheric humidity profile (Harder and
149 Pomeroy, 2013). The vertical temperature and humidity (represented by the mixing ratio) profile
150 through which the hydrometeor falls typically consists of three layers, a top layer that is frozen
151 (T < 0 °C) in winter in temperate areas (Stewart, 1992), a mixed layer where T can exceed 0 °C,
152 and a surface layer that can be above or below 0 °C (Figure 2). The phase of precipitation at the
153 surface partly depends on the phase reaching the top of the surface layer, which is defined as the

Adrian Harpold 12/6/16 6:18 AM
Deleted: potentially

Adrian Harpold 12/6/16 6:18 AM
Deleted: with

Adrian Harpold 12/6/16 6:18 AM
Deleted: >

161 | critical height. The temperature profile and depth of the surface layer control the precipitation
162 | phase reaching the ground surface. For example, in Figure 2a, if rain reaches the critical height, it
163 | may reach the surface as rain or ice pellets depending on small differences in temperature in the
164 | surface layer (Theriault and Stewart, 2010). Similarly, in Figure 2b, if snow reaches the critical
165 | height, it may reach the surface as snow if the temperature in the surface layer is below freezing.
166 | However, in Figure 2c, when the surface layer temperatures are close to freezing and the mixing
167 | ratios are neither close to saturation nor very dry, the phase at the surface is not easily
168 | determined by the surface conditions alone.

Adrian Harpold 12/6/16 6:18 AM
Deleted: s

169
170 | In addition to strong dependence on the vertical temperature and humidity profiles, precipitation
171 | phase is also a function of fall rate and hydrometeor size because they affect energy exchange
172 | with the atmosphere (Theriault et al., 2010). Precipitation rate influences the precipitation phase;
173 | for example, a precipitation rate of 10 mm h^{-1} reduces the amount of freezing rain by a factor of
174 | three over a precipitation rate of 1 mm h^{-1} (Theriault and Stewart, 2010) because there is less
175 | time for turbulent heat exchange with the hydrometeor. A solid hydrometeor that originates in
176 | the top layer and falls through the mixed layer can reach the surface layer as wet snow, sleet, or
177 | rain. This phase transition in the mixed layer is primarily a function of latent heat exchange
178 | driven by vapor pressure gradients and sensible heat exchange driven by temperature gradients.
179 | Temperature generally increases from the mixed layer to the surface layer causing sensible heat
180 | inputs to the hydrometeor. If these gains in sensible heat are combined with minimal latent heat
181 | losses resulting from low vapor pressure deficits, it is likely that the hydrometeor will reach the
182 | surface layer as rain (Figure 2). However, vapor pressure in the mixed layer is often below
183 | saturation leading to latent energy losses and cooling of the hydrometeor coupled with diabatic
184 | cooling of the local atmosphere, which can produce snow or other forms of frozen precipitation
185 | at the surface even when temperatures are above 0°C . Likewise, surface energetics affect local
186 | atmospheric conditions and dynamics, especially in complex terrain. For example, melting of the
187 | snowpack can cause diabatic cooling of the local atmosphere and affect the phase of
188 | precipitation, especially when air temperatures are very close to 0°C (Theriault et al., 2012).
189 | Many conditions lead to a combination of latent heat losses and sensible heat gains by
190 | hydrometeors (Figure 2). Under these conditions it can be difficult to predict the phase of

Adrian Harpold 12/6/16 6:18 AM
Deleted: exchange of

193 precipitation without sufficient information about humidity and temperature profiles, turbulence,
194 hydrometeor size, and precipitation intensity.

195

196 Stability of the atmosphere can also influence precipitation phase. Stability is a function of the
197 vertical temperature structure which can be altered by vertical air movement and hence influence
198 precipitation phase (Theriault and Stewart, 2007). Vertical air velocity changes the temperature
199 structure by adiabatic warming or cooling due to pressure changes of descending and ascending,
200 air parcels, respectively. These changes in temperature can generate under-saturated or
201 supersaturated conditions in the atmosphere that can also alter the precipitation phase. Even a
202 very weak vertical air velocity (< 10 cm/s) significantly influences the phase and amount of
203 precipitation formed in the atmosphere (Theriault and Stewart, 2007). The rain-snow line
204 predicted by atmospheric models is very sensitive to these microphysics (Minder, 2010) and
205 validating the microphysics across locations with complex physiography is challenging.
206 Incorporation and validation of atmospheric microphysics is rarely achieved in hydrological
207 applications (Feiccabrino et al., 2015).

208

209 3. Current Tools for Observing Precipitation Phase

210 3.1 In situ observations

211 In situ observations refer to methods wherein a person or instrument onsite records precipitation
212 phase. We identify 3 classes of approaches that are used to observe precipitation phase including
213 1) direct observations, 2) coupled observations, and 3) proxy observations.

214

215 Direct observations simply involve a person on-site noting the phase of falling precipitation.
216 Such data form the basis of many of the predictive methods that are widely used (Dai, 2008;
217 Ding et al., 2014; U.S. Army Corps of Engineers, 1956). Direct observations are useful for
218 “manned” stations such as those operated by the U.S. National Weather Service. Few research
219 stations, however, have this benefit, particularly in many remote regions and in complex terrain.

220 Direct observations are also limited in their temporal resolution and are typically reported only
221 once per day, with some exceptions (Froidurot et al., 2014). Citizen scientist networks have
222 historically provided valuable data to supplement primary instrumented observation networks.

223 The National Weather Service Cooperative Observer Program

224 (<http://www.nws.noaa.gov/om/coop/what-is-coop.html>, accessed 10/12/2016) is comprised of a

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

Adrian Harpold 12/6/16 6:18 AM

Deleted: will

Adrian Harpold 12/6/16 6:18 AM

Deleted: and

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

229 network of volunteers recording daily observations of temperature and precipitation, including
230 phase. The NOAA National Severe Storms Laboratory used citizen scientist observations of rain
231 and snow occurrence to evaluate the performance of the Multi-Radar Multi-Sensor (MRMS)
232 system in the meteorological Phenomena Identification Near the Ground (mPING) project (Chen
233 et al., 2015). [The mPING project has recently been expanded to allow citizen scientists](#)
234 [worldwide to easily report precipitation phase and characteristics using GPS-enabled smartphone](#)
235 [applications \(http://mping.nssl.noaa.gov, accessed 12/4/2016\).](#) The Colorado Climate Center
236 initiated [the](#) Community Collaborative Rain, Hail and Snow Network (CoCoRaHS) [which](#)
237 supplies volunteers with low cost instrumentation to observe precipitation characteristics,
238 including phase, and enables observations to be reported on the project website
239 (<http://www.cocorahs.org/>, accessed 10/12/2016). Although highly valuable, some limitations of
240 this system include the imperfect ability of observers to identify mixed phase events and the
241 temporal extent of storms, as well as the lack of observations in both remote areas and during
242 low light conditions.

243
244 Coupled observations link synchronous measurements of precipitation with secondary
245 observations to indicate phase. Secondary observations can include photographs of surrounding
246 terrain, snow depth measurements, and/or measurements of ancillary meteorological variables.
247 Photographs of vertical scales emplaced in the snow have been used to estimate snow
248 accumulation depth, which can then be coupled with precipitation mass to determine density and
249 phase (Berris and Harr, 1987; Floyd and Weiler, 2008; Garvelmann et al., 2013; Hedrick and
250 Marshall, 2014; Parajka et al., 2012). Mixed phase events, however, are difficult to quantify using
251 coupled depth- and photographic-based techniques (Floyd and Weiler, 2008). Acoustic distance
252 sensors, which are now commonly used to monitor the accumulation of snow (e.g. Boe, 2013),
253 have similar drawbacks in mixed phase events, but have been effectively applied to [discriminate](#)
254 [between](#) snow [and](#) rain (Rajagopal and Harpold, 2016). Meteorological information such as
255 temperature and relative humidity can be used to compute the phase of precipitation measured by
256 bucket-type gauges. Unfortunately, this approach generally requires incorporating assumptions
257 about the meteorological conditions that determine phase (see section 4.1). Harder and Pomeroy
258 (2013) used a comprehensive approach to determine the phase of precipitation. Every 15 minutes
259 during their study period phase was determined by evaluating weighing bucket mass, tipping

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

Adrian Harpold 12/6/16 6:18 AM

Deleted: separate

Adrian Harpold 12/6/16 6:18 AM

Deleted: from

263 bucket depth, albedo, snow depth, and air temperature. Similarly, Marks et al. (2013) used a
264 scheme based on co-located precipitation and snow depth to discriminate phase. A more
265 involved expert decision making approach by L'hôte et al. (2005) was based on six recorded
266 meteorological parameters: precipitation intensity, albedo of the ground, air temperature, ground
267 surface temperature, reflected long-wave radiation, and soil heat flux. The intent of most of these
268 coupled observations was to develop datasets to evaluate PPM. However, if observation systems
269 such as these were sufficiently simple, they could have the potential to be applied operationally
270 across larger meteorological monitoring networks encompassing complex terrain where snow
271 comprises a large component of annual precipitation (Rajagopal and Harpold, 2016).

272
273 Proxy observations measure geophysical properties of precipitation to infer phase. The hot plate
274 precipitation gauge introduced by Rasmussen et al. (2012), for example, uses a thin heated disk
275 to accumulate precipitation and then measures the amount of energy required to melt snow or
276 evaporate liquid water. This technique, however, requires a secondary measurement of air
277 temperature to determine if the energy is used to melt snow or only evaporate rain. Disdrometers
278 measure the size and velocity of hydrometeors. Although the most common application of
279 disdrometer data is to determine the drop size distribution (DSD) and other properties of rain, the
280 phase of hydrometeors can be inferred by relating velocity and size to density. Some disdrometer
281 technologies, which can be grouped into impact, imaging, and scattering approaches (Löffler-
282 Mang et al., 1999), are better suited for describing snow than others. Impact disdrometers, first
283 introduced by Joss and Waldvogel (1967), use an electromechanical sensor to convert the
284 momentum of a hydrometeor into an electric pulse. The amplitude of the pulse is a function of
285 drop diameter. Impact disdrometers have not been commonly used to measure solid precipitation
286 due to the different functional relationships between drop size and momentum for solid and
287 liquid precipitation. Imaging disdrometers use basic photographic principles to acquire images of
288 the distribution of particles (Borrmann and Jaenicke, 1993; Knollenberg, 1970). The 2D Video
289 Disdrometer (2DVD) described by Kruger and Krajewski (2002) records the shadows cast by
290 hydrometeors onto photodetectors as they pass through two sheets of light. The shape of the
291 shadows enables computation of particle size, and shadows are tracked through both light sheets
292 to determine velocity. Although initially designed to describe liquid precipitation, recent work
293 has shown that the 2DVD can be used to classify snowfall according to microphysical properties

Adrian Harpold 12/6/16 6:18 AM
Deleted: algorithms
Adrian Harpold 12/6/16 6:18 AM
Deleted: these
Adrian Harpold 12/6/16 6:18 AM
Deleted: may

Adrian Harpold 12/6/16 6:18 AM
Deleted: thin

Adrian Harpold 12/6/16 6:18 AM
Deleted: ,

299 of single hydrometeors (Bernauer et al., 2016). The 2DVD has been used to classify known rain
300 and snow events, but little work has been performed to distinguish between liquid and solid
301 precipitation. Scattering or optical disdrometers, measure the extinction of light passing between
302 a source and a sensor (Hauser et al., 1984; Löffler-Mang et al., 1999). Like the other types,
303 optical disdrometers were originally designed for rain, but have been periodically applied to
304 snow (Battaglia et al., 2010; Lempio et al., 2007). In a comparison study by Caracciolo et al.
305 (2006), the PARSIVEL optical disdrometer, originally described by Löffler-Mang et al. (1999)
306 did not perform well against a 2DVD because of problems related to the detection of slow fall
307 velocities for snow. It may be possible to use optical disdrometers to distinguish between rain,
308 sleet, and snow based on the existence of distinct shapes of the size spectra for each precipitation
309 type. More research on the relationship between air temperature and the size spectra produced by
310 the optical disdrometer is needed (Lempio et al., 2007). In summary, disdrometers of various
311 types are valuable tools for describing the properties of rain and snow, but require further testing
312 and development to distinguish between rain and snow, as well as mixed phase events.

313

314 3.2 Ground-based remote sensing observations

315 Ground-based remote sensing observations have been available for several decades to detect
316 precipitation phase using radar. Until recently, most ground-based radar stations were operated
317 as conventional Doppler systems that transmit and receive radio waves with single horizontal
318 polarization. Developments in dual polarization ground radar such as those that function as part
319 of the U.S. National Weather Service NEXRAD network (NOAA, 2016), have resulted in
320 systems that transmit radio signals with both horizontal and vertical polarizations. In general,
321 ground-based remote sensing observations, either single or dual-pol, remain underutilized for
322 detecting precipitation phase and are challenging to apply in complex terrain (Table 3).

323

324 Ground-based remote sensing of precipitation phase using single-polarized radar systems
325 depends on detecting the radar bright band. Radio waves transmitted by the radar system, are
326 scattered by hydrometeors in the atmosphere, with a certain proportion reflected back towards
327 the radar antenna. The magnitude of the measured reflectivity (Z) is related to the size and the
328 dielectric constant of falling hydrometeors (White et al., 2002). Ice particles aggregate as they
329 descend through the atmosphere and their dielectric constant increases, in turn increasing Z

Adrian Harpold 12/6/16 6:18 AM

Deleted: or

Adrian Harpold 12/6/16 6:18 AM

Deleted: individually

Adrian Harpold 12/6/16 6:18 AM

Deleted: disdrometers,

Adrian Harpold 12/6/16 6:18 AM

Deleted: 2

334 measured by the radar, creating the bright band, a layer of enhanced reflectivity just below the
335 elevation of the melting level (Lundquist et al., 2008). Therefore, bright band elevation can be
336 used as a proxy for the “snow level”, the bottom of the melting layer where falling snow
337 transforms to rain (White et al., 2010; White et al., 2002).

338

339 Doppler vertical velocity (DVV) is another variable that can be estimated from single-polarized
340 vertically profiling radar. DVV gives an estimate of the velocity of falling particles; as
341 snowflakes melt and become liquid raindrops, the fall velocity of the hydrometeors increases.

342 When combined with reflectivity profiles, DVV helps reduce false positive detection of the
343 bright band, which may be caused by phenomena other than snow melting to rain (White et al.,
344 2002). First, DVV and Z are combined to detect the elevation of the bottom of the bright band.

345 The algorithm then searches for maximum Z above the bottom of the bright band and determines
346 that to be the bright band elevation (White et al., 2002). However, a test of this algorithm on data
347 from a winter storm over the Sierra Nevada found root mean square errors of 326 to 457 m

348 compared to ground observations when the bright band elevation was assumed to represent the
349 surface transition from snow to rain (Lundquist et al., 2008). Snow levels in mountainous areas,

350 however, may also be overestimated by radar profiler estimates if they are unable to resolve
351 spatial variations close to mountain fronts, since snow levels have been noted to persistently drop
352 on windward slopes (Minder and Kingsmill, 2013). Despite the potential errors, the elevation of

353 maximum Z may be a useful proxy for snow level in hydrometeorological applications in
354 mountainous watersheds because maximum Z will always occur below the freezing level
355 (Lundquist et al., 2008; White et al., 2010)

356

357 Few published studies have explored the value of bright band-derived phase data for hydrologic
358 modeling. Maurer and Mass (2006) compared the melting level from vertically pointing radar
359 reflectivity against temperature-based methods to assess whether the radar approach could
360 improve determination of precipitation phase at the ground level. In that study, the altitude of the
361 top of the bright band was detected and applied across the study basin. Frozen precipitation was
362 assumed to be falling in model pixels above the altitude of the melting level and liquid
363 precipitation was assumed to be falling in pixels below the altitude of the melting layer (Maurer
364 and Mass, 2006). Maurer and Mass (2006) found that incorporating radar-detected melting layer

Adrian Harpold 12/6/16 6:18 AM
Deleted: altered

Adrian Harpold 12/6/16 6:18 AM
Deleted: Then

Adrian Harpold 12/6/16 6:18 AM
Deleted: ,

Adrian Harpold 12/6/16 6:18 AM
Deleted: variable

altitude improved streamflow simulation results. A similar study that used bright band altitude to classify pixels according to surface precipitation type was not as conclusive; bright band altitude data did not improve hydrologic model simulation results over those based on a temperature threshold (Mizukami et al., 2013). Also, the potential of the method is limited to the availability of vertically pointing radar; in complex, mountainous terrain the ability to estimate melting level becomes increasingly challenging with distance from the radar.

Dual-polarized radar systems generate more variables than traditional single-polarized systems. These polarimetric variables include differential reflectivity, reflectivity difference, the correlation coefficient, and specific differential phase. Polarimetric variables respond to hydrometeor properties such as shape, size, orientation, phase state, and fall behavior and can be used to assign hydrometeors to specific categories (Chandrasekar et al., 2013; Grazioli et al., 2015), or to improve bright band detection (Giangrande et al., 2008).

Various hydrometeor classification algorithms have been applied to X-, C-, and S-band wavelengths. Improvements in these algorithms over recent years have seen hydrometeor classification become an operational meteorological product (see Grazioli et al., 2015 for an overview). For example, the U.S. National Severe Storms Laboratory (NSSL) developed a fuzzy-logic hydrometeor classification algorithm for warm-season convective weather (Park et al., 2009) and this algorithm has also been tested for cold-season events (Elmore, 2011). Its skill was tested against surface observations of precipitation type but the algorithm did not perform well in classifying winter precipitation because it could not account for re-freezing of hydrometeors below the melting level (Figure 2, Elmore, 2011). Unlike warm season convective precipitation, the freezing level during a cold-season precipitation event can vary spatially. This phenomenon has prompted the use of polarimetric variables to first detect the melting layer, and then classify hydrometeors (Boodoo et al., 2010; Thompson et al., 2014). Although there has been some success in developing two-stage cold-season hydrometeor classification algorithms, there is little in the published literature that explores the potential contributions of these algorithms for partitioning snow and rain for hydrological modeling.

Adrian Harpold 12/6/16 6:18 AM

Deleted: -

400 3.3 Space-based remote sensing observations

401 Spaceborne remote sensing observations typically use passive or active microwave sensors to
402 determine precipitation phase (Table 3). Many of the previous passive microwave systems were
403 challenged by coarse resolutions and difficulties retrieving snowfall over snow-covered areas.
404 More recent active microwave systems are advantageous for detecting phase in terms of
405 accuracy and spatial resolution, but remain largely unverified. Table 3 provides an overview of
406 these space-based remote sensing technologies that are described in more detail below.

407

408 Passive microwave radiometers detect microwave radiation emitted by the Earth's surface or
409 atmosphere. Passive microwave remote sensing has the potential for discriminating between
410 rainfall and snowfall because microwave radiation emitted by the Earth's surface propagates
411 through all but the densest precipitating clouds, meaning that radiation at microwave
412 wavelengths directly interacts with hydrometeors within clouds (Olson et al., 1996; Ardanuy,
413 1989). However, the remote sensing of precipitation in microwave wavelengths and the
414 development of operational algorithms is dominated by research focused on rainfall (Arkin and
415 Ardanuy, 1989); by comparison, snowfall detection and observation has received less attention
416 (Noh et al., 2009; Kim et al., 2008). This is partly explained by examining the physical processes
417 within clouds that attenuate the microwave signal. Raindrops emit low levels of microwave
418 radiation increasing the level of radiance measured by the sensor; in contrast, ice hydrometeors
419 scatter microwave radiation, decreasing the radiance measured by a sensor (Kidd and Huffman,
420 2011). Land surfaces have a much higher emissivity than water surfaces, meaning that emission-
421 based detection of precipitation is challenging over land because the high microwave emissions
422 mask the emission signal from raindrops (Kidd, 1998; Kidd and Huffman, 2011). Thus,
423 scattering-based techniques using medium to high frequencies are used to detect precipitation
424 over land. Moreover, microwave observations at higher frequencies (> 89 GHz) have been
425 shown to discriminate between liquid and frozen hydrometeors (Wilheit et al., 1982).

426

427 Retrieving snowfall over land areas from spaceborne microwave sensors can be even more
428 challenging than for liquid precipitation because existing snow cover increases microwave
429 emission. Depression of the microwave signal caused by scattering from airborne ice particles
430 may be obscured by increased emission of microwave radiation from the snow covered land

Adrian Harpold 12/6/16 6:18 AM

Deleted: 2

Adrian Harpold 12/6/16 6:18 AM

Deleted: have advantage

Adrian Harpold 12/6/16 6:18 AM

Deleted: 2

434 surface. Kongoli et al. (2003) demonstrated an operational snowfall detection algorithm that
 435 accounts for the problem of existing snow cover. This group used data from the Advanced
 436 Microwave Sounding Unit-A (AMSU-A), a 15-channel atmospheric temperature sounder with a
 437 single high frequency channel at 89 GHz), and AMSU-B, a 5-channel high frequency microwave
 438 humidity sounder. Both sensors were mounted on the NOAA-16 and -17 polar-orbiting satellites.
 439 While the algorithm worked well for warmer, opaque atmospheres, it was found to be too noisy
 440 for colder, clear atmospheres. Additionally, some snowfall events occur under warmer conditions
 441 than those that were the focus of the study (Kongoli et al., 2003). Kongoli et al. (2015) further
 442 adapted their methodology for the Advanced Technology Microwave Sounder (ATMS - onboard
 443 the polar-orbiting Suomi National Polar-orbiting Partnership satellite) a descendant of the
 444 AMSU sounders. The latest algorithm assesses the probability of snowfall using the logistic
 445 regression and the principal components of seven high frequency bands at 89 GHz and above. In
 446 testing, the Kongoli et al. (2015) algorithm has shown skill in detecting snowfall both at variable
 447 rates and when snowfall is lighter and occurs in colder conditions. An alternative algorithm by
 448 Noh et al. (2009) used physically-based, radiative transfer modeling in an attempt to improve
 449 snowfall retrieval over land. In this case, radiative transfer modeling was used to construct an *a*
 450 *priori* database of observed snowfall profiles and corresponding brightness temperatures. The
 451 radiative transfer procedure yields likely brightness temperatures from modeling how ice
 452 particles scatter microwave radiation at different wavelengths. A Bayesian retrieval algorithm *is*
 453 then used to estimate snowfall over land by comparing *measured and modeled brightness*
 454 *temperatures* (Noh et al., 2009). The algorithm was tested during the early and late winter for
 455 *large snowfall events (e.g. 60 cm depth in 12 hours)*. Late winter retrievals indicated that the
 456 algorithm overestimated snowfall over surfaces with significant snow accumulation.
 457
 458 While results have been promising, the spatial resolution at which ATMS and other passive
 459 microwave data are acquired is very coarse (15.8 to 74.8 km at nadir), making passive
 460 microwave approaches more applicable for regional to continental scales. Temporal resolution of
 461 the data acquisition is another challenge. AMSU instruments are mounted on 8 satellites; the
 462 related ATMS is mounted on a single satellite and planned for two additional satellites.
 463 However, the satellites are polar-orbiting, not geostationary, so it is probable that a precipitation
 464 event could occur outside the field of view of one of the instruments.

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

Adrian Harpold 12/6/16 6:18 AM

Deleted: was

Adrian Harpold 12/6/16 6:18 AM

Deleted: measurements of brightness temperature with

Adrian Harpold 12/6/16 6:18 AM

Deleted: heavier

Adrian Harpold 12/6/16 6:18 AM

Deleted: .

471

472 Spaceborne active microwave or radar sensors measure the backscattered signal from pulses of
473 microwave energy emitted by the sensor itself. Much like the ground based radar systems, the
474 propagated microwave signal interacts with liquid and solid particles in the atmosphere and the
475 degree to which the measured return signal is attenuated provides information on the
476 atmospheric constituents. The advantage offered by spaceborne radar sensors over passive
477 microwave is the capability to acquire more detailed sampling of the vertical profile of the
478 atmosphere (Kulie and Bennartz, 2009). The first spaceborne radar capable of observing
479 snowfall is the Cloud Profiling Radar (CPR) onboard CloudSat (2006 – present). The CPR
480 operates at 94 GHz with an along-track (or vertical) resolution of ~1.5 km. Retrieval of dry
481 snowfall rate from CPR measurements of reflectivity have been shown to correspond with
482 estimates of snowfall from ground-based radars at elevations of 2.6 and 3.6 km above mean sea
483 level (Matrosov et al., 2008). Estimates at lower elevations, especially those in the lowest 1 km,
484 are contaminated by ground clutter. Alternative approaches, combining CPR data with ancillary
485 data have been formulated to account for this challenge (Kulie and Bennartz, 2009; Liu, 2008).
486 Known relationships between CPR reflectivity data and the scattering properties of non-spherical
487 ice crystals are used to derive snowfall at a given elevation above mean sea level; below this
488 elevation a temperature threshold derived from surface data is used to discriminate between rain
489 and snow events. Liu (2008) used 2 °C as the snow/rain threshold, whereas Kulie and Bennartz
490 (2009) used 0 °C as the snow/rain threshold. Temperature thresholds have been the subject of
491 much research and debate for discriminating precipitation phase, as is further discussed in
492 section 4.1.

493

494 CloudSat is part of the A-train or afternoon constellation of satellites, which includes Aqua, with
495 the Moderate Resolution Imaging Spectrometer (MODIS) and the Cloud–Aerosol Lidar and
496 Infrared Pathfinder Satellite Observations (CALIPSO) spacecraft with cloud-profiling Lidar. The
497 sensors onboard A-train satellites provided the unique combination of data to create an
498 operational snow retrieval product. The CPR Level 2 snow profile product (2C-SNOW-
499 PROFILE) uses vertical profile data from the CPR, input from MODIS and the cloud profiling
500 radar, as well as weather forecast data to estimate near surface snowfall (Kulie et al., 2016;
501 Wood et al., 2013). The performance of 2C-SNOW-PROFILE was tested by Cao et al. (2014).

Adrian Harpold 12/6/16 6:18 AM

Deleted: <

503 This group found the product worked well in detecting light snow but performed less
504 satisfactorily under conditions of moderate to heavy snow because of the non-stationary effects
505 of attenuation on the returned radar signal.

506

507 The launch of the Global Precipitation Mission (GPM) core observatory in February 2014 holds
508 promise for the future deployment of operational snow detection products. Building on the
509 success of the Tropical Rainfall Monitoring Mission (TRMM), the GPM core observatory
510 sensors include the Dual-frequency Precipitation Radar (DPR) and GPM Microwave Imager
511 (GMI). The GMI has two millimeter wave channels (166 and 183 GHz) that are specifically
512 designed to detect and retrieve light rain and snow precipitation. These are more advanced than
513 the sensors onboard the TRMM spacecraft and permit better quantification of the physical
514 properties of precipitating particles, particularly over land at middle to high latitudes (Hou et al.,
515 2014). Algorithms for the GPM mission are still under development, and are partly being driven
516 by data collected during the GPM Cold Season Experiment (GCPEX) (Skofronick-Jackson et al.,
517 2015). Using airborne sensors to simulate GPM and DPR measurements, one of the questions
518 that the GCPEX hoped to address concerned the potential capability of data from the DPR and
519 GMI to discriminate falling snow from rain or clear air (Skofronick-Jackson et al., 2015). The
520 initial results reported by the GCPEX study echo some of the challenges recognized for ground-
521 based single polarized radar detection of snowfall. The relationship between radar reflectivity
522 and snowfall is not unique. For the GPM mission, it will be necessary to include more variables
523 from dual frequency radar measurements, multiple frequency passive microwave measurements,
524 or a combination of radar and passive microwave measurements (Skofronick-Jackson et al.,
525 2015).

526

527 4. Current Tools for Predicting Precipitation Phase

528 4.1 Prediction Techniques from Ground-Based Observations

529 Discriminating between solid and liquid precipitation is often based on a near-surface air
530 temperature threshold (Martinec and Rango, 1986; U.S. Army Corps of Engineers, 1956; L'hôte
531 et al., 2005). Four prediction methods have been developed that use near-surface air temperature
532 for discriminating precipitation phase: 1) static threshold, 2) linear transition, 3) minimum and
533 maximum temperature, and 4) sigmoidal curve (Table 1). A static temperature threshold applies

Adrian Harpold 12/6/16 6:18 AM

Deleted: is

535 a single temperature value, such as mean daily temperature, where all of the precipitation above
 536 the threshold is rain, and all below the threshold is snow. Typically this threshold temperature is
 537 near 0 °C (Lynch-Stieglitz, 1994; Motoyama, 1990), but was shown to be highly variable across
 538 both space and time (Kienzle, 2008; Motoyama, 1990; Braun, 1984; Ye et al., 2013). For
 539 example, Rajagopal and Harpold (2016) optimized a single temperature threshold at Snow
 540 Telemetry (SNOTEL) sites across the western U.S. to show regional variability from -4 to 3 °C
 541 (Figure 3). A second discrimination technique is to linearly scale the proportion of snow and rain
 542 between a temperature for all rain (T_{rain}) and a temperature for all snow (T_{snow}) (Pipes and Quick,
 543 1977; McCabe and Wolock, 2010; Tarboton et al., 1995). Linear threshold models have been
 544 parameterized slightly differently across studies, e.g.: $T_{\text{snow}} = -1.0$ °C, $T_{\text{rain}} = 3.0$ °C (McCabe and
 545 Wolock, 2010), $T_{\text{snow}} = -1.1$ °C and $T_{\text{rain}} = 3.3$ °C (Tarboton et al., 1995), and $T_{\text{snow}} = 0$ °C and T_{rain}
 546 $= 5$ °C (McCabe and Wolock, 1999b). A third technique specifies a threshold temperature based
 547 on daily minimum and maximum temperatures to classify rain and snow, respectively, with a
 548 threshold temperature between the daily minimum and maximum producing a proportion of rain
 549 and snow (Leavesley et al., 1996). This technique can have a time-varying temperature threshold
 550 or include a T_{rain} that is independent of daily maximum temperature. A fourth technique applies a
 551 sigmoidal relationship between mean daily (or sub daily) temperature and the proportion or
 552 probability of snow versus rain. For example, one method derived for southern Alberta, Canada
 553 employs a curvilinear relationship defined by two variables, a mean daily temperature threshold
 554 where 50% of precipitation is snow, and a temperature range where mixed-phase precipitation
 555 can occur (Kienzle, 2008). Another sigmoidal-based empirical model identified a hyperbolic
 556 tangent function defined by four parameters to estimate the conditional snow (or rain) frequency
 557 based on a global analysis of precipitation phase observations from over 15,000 land-based
 558 stations (Dai, 2008). Selection of temperature-based techniques is typically based on available
 559 data, with a limited number of studies quantifying their relative accuracy for hydrological
 560 applications (Harder and Pomeroy, 2014).

Adrian Harpold 12/6/16 6:18 AM

Deleted: at

Adrian Harpold 12/6/16 6:18 AM

Deleted: between

561

562 Several studies have compared the accuracy of temperature-based PPM to one another and/or
 563 against an independent validation of precipitation phase. Sevruk (1984) found that only about
 564 68% of the variability in monthly observed snow proportion in Switzerland could be explained
 565 by threshold temperature based methods near 0 °C. An analysis of data from fifteen stations in

southern Alberta, Canada with an average of >30 years of direct observations noted over-estimations in the mean annual snowfall for static threshold (8.1%), linear transition (8.2%), minimum and maximum (9.6%), and sigmoidal transition (7.1%) based methods (Kienzle, 2008). An evaluation of PPM at three sites in the Canadian Rockies by Harder and Pomeroy (2013) found the largest percent error to occur using a static threshold (11% to 18%), followed by linear relationships (-8% to 11%), followed by sigmoidal relationships (-3 to 11%). Another study using 824 stations in China with >30 years of direct observations found accuracies of 51.4% using a static 2.2 °C threshold and 35.7% to 47.4% using linear temperature-based thresholds (Ding et al., 2014). Lastly, for multiple sites across the rain-snow transition in southwestern Idaho, static temperature thresholds produced the lowest proportion (68%) whereas a linear-based model produced the highest proportion (75%) of snow, respectively (Marks et al., 2013). These accuracy assessments generally demonstrated that static threshold methods produced the greatest errors, whereas sigmoidal relationships produced the smallest errors, although variations to this general rule existed across sites.

582

Near surface humidity also influences precipitation phase (see Section 2). Three humidity-dependent precipitation phase identification methods are found in the literature: 1) dewpoint temperature (T_d), 2) wet bulb temperature (T_w), and 3) psychometric energy balance. The dewpoint temperature is the temperature at which an air parcel with a fixed pressure and moisture content would be saturated. In one approach to account for measurement and instrument calibration uncertainties of ± 0.25 °C each, T_d and T_w below -0.5 °C was assumed to be all snow and above +0.5 °C all rain, with a linear relationship between the two being a proportional mix of snow and rain (Marks et al., 2013). T_d of 0.0 °C performed consistently better than T_a in one study by Marks et al. (2001) while a T_d of 0.1 °C for multiple stations in Sweden was less accurate than a T_a of 1.0 °C (Feicabrino et al., 2013). The wet or ice bulb temperature (T_w) is the temperature at which an air parcel would become saturated by evaporative cooling in the absence of other sources of sensible heat, and is the lowest temperature that falling precipitation can reach. Few studies have investigated the feasibility of T_w for precipitation phase prediction (Olsen, 2003; Ding et al., 2014; Marks et al., 2013). T_w significantly improved prediction of precipitation phase over T_a at 15-minute time steps, but only marginally improved predictions at daily time steps (Marks et al., 2013). Ding et al. (2014)

Adrian Harpold 12/6/16 6:18 AM

Deleted: a

Adrian Harpold 12/6/16 6:18 AM

Deleted: Generally

601 developed a sigmoidal phase probability curve based on T_w and elevation that outperformed T_a
602 threshold-based methods across a network of sites in China. Conceptually, the hydrometeor
603 temperature (T_i) is similar to T_w but is calculated using the latent heat and vapor density gradient.
604 Use of computed T_i values significantly improved precipitation phase estimates over T_a ,
605 particularly as time scales approached one day (Harder and Pomeroy, 2013).

606
607 There has been limited validation of humidity-based precipitation phase prediction techniques
608 against ground-truth observations. Ding et al. (2014) showed that a method based on T_w and
609 elevation increased accuracy by 4.8% to 8.9% over several temperature-based methods. Their
610 method was more accurate than a simpler T_w based method by Yamazaki (2001). Feiccabrino et
611 al. (2013) showed that T_d misclassified 3.0% of snow and rain (excluding mixed phase
612 precipitation), whereas T_a only misclassified 2.4%. Ye et al. (2013) found T_d less sensitive to
613 phase discrimination under diverse environmental conditions and seasons than T_a . Froidurot et
614 al. (2014) evaluated several techniques with a critical success index (CSI) at sites across
615 Switzerland to show the highest CSI values were associated with variables that included T_w or
616 relative humidity (CSI=84%-85%) compared to T_a (CSI=78%). Marks et al. (2013) evaluated the
617 time at which precipitation transitioned from snow to rain against field observations across a
618 range of elevations and found that T_d most closely predicted the timing of phase change, whereas
619 both T_a and T_w estimated earlier phase changes than observed. Harder and Pomeroy (2013)
620 compared T_i with field observations and found that error was <10% when T_i was allowed to vary
621 with each daily time-step and >10% when T_i was fixed at 0 °C. The T_i accuracy increased
622 appreciably (i.e. 5%-10% improvement) when the temporal resolution was decreased from daily
623 to hourly or 15-minute time steps. The validation studies consistently showed improvements in
624 accuracy by including humidity over PPM based only on temperature.

625
626 Hydrological models employ a variety of techniques for phase prediction using ground-based
627 observations (Table 2). All discrete hydrological models (i.e. not coupled to an atmospheric
628 model) investigated used temperature based thresholds that did not consider the near-surface
629 humidity. Moreover, most models use a single static temperature threshold that typically
630 produces lower accuracy than multiple temperature methods. It should be noted that many of
631 these hydrological models lump by elevation zone, which improves estimates of the snow to rain

Adrian Harpold 12/6/16 6:18 AM

Deleted: (

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

Adrian Harpold 12/6/16 6:18 AM

Deleted: d

Adrian Harpold 12/6/16 6:18 AM

Deleted: phase

Adrian Harpold 12/6/16 6:18 AM

Deleted: l

Adrian Harpold 12/6/16 6:18 AM

Deleted: , which was consistently shown to produce

639 [transition elevation and phase prediction accuracy in complex terrain compared to models](#)
640 [without elevation zones.](#) Hydrological models that are coupled to atmospheric models were
641 more able to consider important controls on precipitation phase, such as humidity and
642 atmospheric profiles. This compendium of model PPM highlights the current shortcomings in
643 phase prediction in conventional discrete hydrological models.

644

645 4.2 Prediction Techniques Incorporating Atmospheric Information

646 While many hydrologic models have their own formulations for determining precipitation phase
647 at the ground, it is also possible to initialize hydrologic models with precipitation phase fraction,
648 intensity, and volume from numerical weather simulation model output. Here we discuss the
649 limitations of precipitation phase simulation inherent to [the Weather Research and Forecasting](#)
650 [\(WRF\) model](#) (Kaplan et al., 2012; Skamarock et al., 2008) and other atmospheric simulation
651 models. The finest scale spatial resolution employed in atmospheric simulation models is ~1 km
652 and these models generate data at hourly or finer temporal resolutions. Regional climate models
653 (RCM) and global climate models (GCM) are typically coarser than local mesoscale models. The
654 physical processes driving both the removal of moisture from the air and the precipitation phase
655 (Section 2) occur at much finer spatial and temporal resolutions in the real atmosphere than
656 models typically resolve, i.e. <1 km. As with all numerical models, the representation of sub-grid
657 scale processes requires parameterization. At typical scales considered, characterization of mixed
658 phase processes within a condensing cloud depends on both cloud microphysics and kinematics
659 of the surrounding atmosphere. Replicating cloud physics at the multi-kilometer scale requires
660 empiricism. The 30+ cloud microphysics parameterization options in the research version of
661 WRF (Skamarock et al., 2008) vary in the number of classes described (cloud ice, cloud liquid,
662 snow, rain, graupel, hail, etc.), and may or may not accurately resolve changes in hydrometeor
663 phase and horizontal spatial location (due to wind) during precipitation. All microphysical
664 schemes predict cloud water and cloud ice based on internal cloud processes that include a
665 variety of empirical formulations or even simple lookup tables. These schemes vary greatly in
666 their accuracy with “mixed phase” schemes generally producing the most accurate simulations of
667 precipitation phase in complex terrain where much of the water is supercooled (Lin, 2007;
668 Reisner et al., 1998; Thompson et al., 2004; Thompson et al., 2008; Morrison et al., 2005; Zängl,
669 2007; Kaplan et al., 2012). Comprehensive validation of the microphysical schemes over

Adrian Harpold 12/6/16 6:18 AM
Deleted: WRF

671 different land surface types (e. g. warm maritime, flat prairie, etc.) with a focus on different
672 snowfall patterns is lacking. In particular, in transition zones between mountains and plains or
673 along coastlines, the complexity of the microphysics becomes even more extreme due the
674 dynamics and interactions of differing air masses with distinct characteristics. The
675 autoconversion and growth processes from cloud water or ice to hydrometeors contain a strong
676 component of empiricism, [and](#) in particular, the nucleation media and their chemical
677 composition. Different microphysical parameterizations lead to different spatial distributions of
678 precipitation and produce varying vertical distributions of hydrometeors (Gilmore et al., 2004).
679 Regardless, precipitation rates for each grid cell are averages requiring hydrological modelers to
680 consider the effects of elevation, aspect, etc. in resolving precipitation phase fractions for finer-
681 scale models.

682
683 Numerical models that contain sophisticated cloud microphysics schemes allow assimilation of
684 additional remote sensing data beyond conventional synoptic/large scale observations (balloon
685 data). This is because the coarse spatial and temporal nature of radiosonde data results in the
686 atmosphere being sensed imperfectly/incompletely compared with the scale of motion that
687 weather simulation models can numerically resolve. These observational inadequacies are
688 exacerbated in complex terrain, where precipitation phase fraction can vary on small scales [and](#)
689 radar can be blocked by topography and therefore rendered useless in the model initialization.

690 Accurate generation of liquid and frozen precipitation from vapor requires accurate depiction of
691 initial atmospheric moisture conditions (Kalnay and Cai, 2003; Lewis et al., 2006). In
692 acknowledgement of the difficulty and uncertainty of initializing numerical simulation models,
693 atmospheric modelers use the term “bogusing” to describe incorporation of individual
694 observations at a point location into large scale initial conditions in an effort to enhance the
695 accuracy of the simulation (Eddington, 1989). They also employ complex assimilation
696 methodologies to force the early period of the model solutions during the time integration
697 towards fine scale observations (Kalnay and Cai, 2003; Lewis et al., 2006). These asynoptic or
698 fine scale data sources often substantially improve the accuracy of the simulations as time
699 progresses.

700

Adrian Harpold 12/6/16 6:18 AM

Deleted: but

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

703 Hydrologists are increasingly using output from atmospheric models to drive hydrologic models
704 from daily to climatic or multi-decadal timescales (Tung and Haith, 1995; Pachauri, 2002; Wood
705 et al., 2004; Rojas et al., 2011; Yucel et al., 2015). These atmospheric models suffer from the
706 same data paucity and scale issues that likewise challenge the implementation and validation of
707 hydrologic models. Uncertainties in their output, including precipitation volume and phase,
708 begins with the initialization of the atmospheric model from measurements, increases with model
709 choice and microphysics as well as turbulence parameterizations, and is a strong function of the
710 scale of the model. The significance of these uncertainties varies by application, but should be
711 acknowledged. Furthermore, these uncertainties are highly variable in character and magnitude
712 from day to day and location to location. Thus, there has been very little published concerning
713 how well atmospheric models predict precipitation phase. Finally, lack of ground measurements
714 leaves hydrologists with no means to assess and validate atmospheric model predictions.

Adrian Harpold 12/6/16 6:18 AM

Deleted: e

716 5. Research Gaps

717 The incorrect prediction of precipitation phase leads to cascading effects on hydrological
718 simulations (Figure 1). Meeting the challenge of accurately predicting precipitation phase
719 requires the closing of several critical research gaps (Figure 4). Perhaps the most pressing
720 challenge for improving PPM is developing and employing new and improved sources of data.
721 However, new data sources will not yield much benefit without effective incorporation into
722 predictive models (Figure 4). Additionally, both the scientific and management communities
723 lack data products that can be readily understood and broadly used. Addressing these research
724 gaps requires simultaneous engagement both within and between the hydrology and atmospheric
725 observation and modeling communities. Changes to atmospheric temperature and humidity
726 profiles from regional climate change will likely challenge conventional precipitation phase
727 prediction in ways that demand additional observations and improved forecasts.

Adrian Harpold 12/6/16 6:18 AM

Deleted: modeling

Adrian Harpold 12/6/16 6:18 AM

Deleted: of data

729 We also highlight research gaps to improve relatively simple hydrological models without
730 adding unnecessary complexity associated with sophisticated PPM approaches. For example,
731 more efforts to verify the existing PPM in different climatic environments and during specific
732 hydrometeorological events could help determine various temperature thresholds (Table 1) to
733 apply in existing models (section 5.3). In addition, developing gridded precipitation phase

[products may eliminate the need to make existing models more complex by applying more complex PPM outside of those models, e.g. similar to precipitation distribution in existing gridded products used by many hydrological models. Ultimately, recognizing the sensitivity of hydrological model outcomes to PPM and identifying what climates and applications require higher phase prediction accuracy are crucial steps to determining the complexity of PPM required for specific applications.](#)

5.1 Conduct focused field campaigns

Intensive field campaigns are extremely effective approaches to address fundamental research gaps focused on the discrimination between rain, snow, and mixed-phase precipitation at the ground by providing opportunities to test novel sensors, [collect](#) detailed datasets to develop remote sensing retrieval algorithms, and improve PPM estimation methods. The recent Global Precipitation Measurement (GPM) Cold Season Precipitation Experiment (GCPEX) is an example of such a campaign in non-complex terrain where simultaneous observations using arrays of both airborne and ground-based sensors were used to measure and characterize both solid and liquid precipitation (e.g. Skofronick-Jackson et al., 2015). Similar intensive field campaigns are needed in complex terrain that is frequently characterized by highly dynamic and spatially variable hydrometeorological conditions. Such campaigns are expensive to conduct, but can be implemented as part of operational nowcasting to develop rich data resources to advance scientific understanding as was very effectively done during the Vancouver Olympic Games in 2010 (Isaac et al., 2014; Joe et al., 2014). The research community should utilize existing datasets and capitalize on similar opportunities and expand environmental monitoring networks to simultaneously advance both atmospheric and hydrological understanding, especially in complex terrain spanning the rain-snow transition zone.

5.2 Incorporate humidity information

Atmospheric humidity affects the energy budget of falling hydrometeors (Section 4.1), but is rarely considered in precipitation phase prediction. The difficulty in incorporating humidity mainly arises from a lack of observations, both as point measurements and distributed gridded products. For example, while some reanalysis products have humidity information (i.e. National Centers for Environmental Prediction, NCEP reanalysis) they are at spatial scales (i.e. > 1

Adrian Harpold 12/6/16 6:18 AM

Deleted: and

Adrian Harpold 12/6/16 6:18 AM

Deleted: ,

degree) [that are](#) too coarse for resolving precipitation phase in complex topography. Addition of high-quality aspirated humidity sensors at snow monitoring stations, such as the SNOTEL network, would advance our understanding of humidity and its effects on precipitation phase in the mountains. Because dry air masses have regional variations controlled by storm tracks and proximity to water bodies, sensitivity of precipitation phase to humidity variations driven by regional warming remains relatively unexplored.

Although humidity datasets are relatively rare in mountain environments, some gridded data products exist that can be used to investigate the importance of humidity information. Most interpolated gridded data products either do not include any measure of humidity (e.g. Daymet or WorldClim) or use daily temperature measurements to infer humidity conditions (e.g. PRISM). In complex terrain, air temperature can also vary dramatically at relatively small scales from ridgetops to valley bottoms due to cold air drainage (Whiteman et al., 1999) and hence can introduce errors into inferential techniques such as these. Potentially more useful are data assimilation products, such as NLDAS-2, that provide humidity and temperature values at 1/8th of a degree scale over the continental U.S. In addition, several data reanalysis products are often available at 1 to 3 year lags from present, including NCEP/NCAR, NARR, and the 20th Century reanalysis. Given the relatively sparse observations of humidity in mountain environments, the accuracy of gridded humidity products is rarely rigorously evaluated (Abatzoglou, 2013). More work is needed to understand the added skill provided by humidity datasets for predicting precipitation phase and its distribution over time and space.

5.2 Incorporate atmospheric information

We echo the call of Feiccabrino et al. (2015) for greater incorporation of atmospheric information into phase prediction and additional verification of the skill in phase prediction provided by atmospheric information.

Several avenues exist to better incorporate atmospheric information into precipitation phase prediction, including direct observations, remote sensing observations, and [synthetic](#) products. Radiosonde measurements made daily at many airports and weather forecasting centers have shown some promise for supplying atmospheric profiles of temperature and humidity (Froidurot

Adrian Harpold 12/6/16 6:18 AM

Deleted: model

et al., 2014). However, these data are only useful to initialize the larger scale structure of temperature and water vapor, and may not capture local-scale variations in complex terrain. It is also their lack of temporal and spatial frequency that prevents their use in accurate precipitation phase prediction, which is inherently a mesoscale problem, i.e., scales of motion <100 km. Atmospheric information on the bright-band height from Doppler radar has been utilized for predicting the altitude of the rain-snow transition (Lundquist et al., 2008; Minder, 2010), but has rarely been incorporated into hydrological modeling applications (Maurer and Mass, 2006; Mizukami et al., 2013). In addition to atmospheric observations, modeling products that assimilate observations or are fully physically-based may provide additional information for precipitation phase prediction. Numerous reanalysis products (described in Section 2.2) provide temperature and humidity at different pressure levels within the atmosphere. To our knowledge, information from reanalysis products has yet to be incorporated into precipitation phase prediction for hydrological applications. Bulk microphysical schemes used by meteorological models (e.g. WRF) provide physically-based estimates of precipitation phase. These schemes capture a wide-variety of processes, including evaporation, sublimation, condensation, and aggradation, and output between two and ten precipitation types. Historically, meteorological models have not been run at spatial scales capable of resolving convective dynamics (e.g. <2 km), which can exacerbate error in precipitation phase prediction in complex terrain with a moist neutral atmosphere. Coarse meteorological models also struggle to produce pockets of frozen precipitation from advection of moisture plumes between mountain ranges and cold air wedged between topographic barriers. However, reduced computational restrictions on running these models at finer spatial scales and over large geographic extents (Rasmussen et al., 2012) are enabling further investigations into precipitation phase change under historical and future climate scenarios. This suggests that finer dynamical downscaling is necessary to resolve precipitation phase which is consistent with similar work attempting to resolve winter precipitation amount in complex terrain (Gutmann et al., 2012). A potentially impactful area of research is to integrate this information into novel approaches to improve precipitation phase prediction skill.

5.3 Disdrometer networks operating at high temporal resolutions

An increase in the types and reliability of disdrometers over the last decade has provided a new suite of tools to more directly measure precipitation phase. Despite this new potential resource

Adrian Harpold 12/6/16 6:18 AM
Deleted: i.

Adrian Harpold 12/6/16 6:18 AM
Deleted: Weather Research and Forecasting

Adrian Harpold 12/6/16 6:18 AM
Deleted: model

Adrian Harpold 12/6/16 6:18 AM
Deleted: a

for distinguishing snow and rain, very limited deployments of disdrometers have occurred at the scale necessary to improve hydrologic modeling and rain-snow elevation estimates. The lack of disdrometer deployment likely arises from a number of potential limitations: 1) known issues with accuracy, 2) cost of these systems, and 3) power requirements needed for heating elements. These limitations are clearly a factor in procuring large networks and deploying disdrometers in complex terrain that is remote and frequently difficult to access. However, we advise that disdrometers offer numerous benefits that cannot be substituted with other measurements: 1) they operate at fine temporal scales, 2) they operate in low light conditions that limit other direct observations, and 3) they provide land surface observations rather than precipitation phase in the atmosphere (as compared to more remote methods). Moreover, improvements in disdrometer and power supply technologies that address these limitations would remove restrictions on increased disdrometer deployment.

Transects of disdrometers spanning the rain-snow elevations of key mountain areas could add substantially to both prediction of precipitation phase for modeling purposes, as well as validating typical predictive models. We advocate for transects over key mountain passes where power is generally available and weather forecasts for travel are particularly important. In addition, co-locating disdrometers at long-term research stations where precipitation phase observations could be tied to micro-meteorological and hydrological observations has distinct advantages. These areas often have power supplies and instrumentation expertise to operate and maintain disdrometer networks.

5.4 Compare different indirect phase measurement methods

There is an important need to evaluate the accuracy of different PPM to assess tradeoffs between model complexity and skill (Figure 4). Given the potential for several types of observations to improve precipitation phase prediction (section 5.1-5.3), quantifying the relative skill provided by these different lines of evidence is a critical research gap. Although assessing relative differences between methods is potentially informative, comparison to ground truth measurements is critical for assessing accuracy. Disdrometer measurements and video imaging (Newman et al., 2009) are ideal ground truthing methods that can be employed at fine time steps and under a variety of conditions (section 5.3). Less ideal for accuracy assessment studies are

868 direct visual observations that are harder to collect at fine time steps and in low light conditions.
869 Similarly, employing coupled observations of precipitation and snow depth has been used to
870 assess accuracy of different precipitation phase prediction methods (Marks et al., 2013; Harder
871 and Pomeroy, 2013), but accuracy assessment of these techniques themselves are lacking under a
872 wide range of [contrasting hydrometeorological](#) conditions.

Adrian Harpold 12/6/16 6:18 AM

Deleted: different

874 A variety of accuracy assessments are needed that will require co-located distributed
875 measurements. One critical accuracy assessment involves the consistency of different
876 precipitation phase prediction methods under different climate and atmospheric conditions.
877 Assessing the effects of climate and atmospheric conditions requires measurements from a
878 variety of sites covering a range of hydroclimatic conditions and record lengths that span the
879 conceivable range of atmospheric conditions at a given site. Another important evaluation metric
880 is the performance over different time steps. Harder and Pomeroy (2013) showed that
881 hydrometeor and temperature-based prediction methods had errors that substantially decreased
882 across shorter time steps. Identifying the effects of time step length on the accuracy of different
883 prediction methods has been relatively unexplored, but is critical to select the [most appropriate](#)
884 method for [specific](#) hydrological applications. Finally, the performance metrics used to assess
885 accuracy should be carefully considered. The applications of precipitation phase prediction
886 methods are diverse, necessitating a wide variety of performance metrics, including the
887 probability of snow versus rain (Dai, 2008), the error in annual or total snow/rain accumulation
888 (Rajagopal and Harpold, 2016), performance under extreme conditions of precipitation amount
889 and intensity, determination of the snow-rain elevation (Marks et al., 2013), and uncertainty
890 arising from measurement error and accuracy. Comparison of different metrics across a wide-
891 variety of sites and conditions is lacking but is greatly needed to advance [hydrologic science in](#)
892 [cold regions](#).

Adrian Harpold 12/6/16 6:18 AM

Deleted: ing

Adrian Harpold 12/6/16 6:18 AM

Deleted: proper

Adrian Harpold 12/6/16 6:18 AM

Deleted: different

894 5.5 Develop spatially resolved products

895 Many hydrological applications will benefit from gridded data products that are easily integrated
896 into standard hydrological models. Currently, very few options exist for gridded data
897 precipitation phase products. Instead, most hydrological models have some type of submodel or
898 simple scheme that specifies precipitation phase as rain, snow, or mixed-[phase precipitation](#) (see

Adrian Harpold 12/6/16 6:18 AM

Deleted: cold-region

904 Section 4). While testing PPM with ground based observations could lead to improved
905 submodels, we believe development of gridded forcing data may be an easier and more effective
906 solution for many hydrological modeling applications.

907

908 Gridded data products could be derived from a combination of remote sensing and existing
909 [synthetic](#) products, but would need to be extensively evaluated. The NASA GPM mission is
910 beginning to produce gridded precipitation phase products at 3-hour and 0.1 degree resolution.

911 However, GPM phase is measured at the top of the atmosphere, typically relies on simple
912 temperature-thresholds, and [has](#) yet to be validated with ground based observations. Another
913 existing product is the Snow Data Assimilation System (SNODAS) that estimates liquid and
914 solid precipitation at the 1 km scale. However, the developers of SNODAS caution that it is not
915 suitable for estimating storm totals or regional differences. Furthermore, to our knowledge the
916 precipitation phase product from SNODAS has not been validated with ground observations. We
917 suggest the development of new gridded data products that utilize new PPM (i.e. Harder and
918 Pomeroy, 2013) and new and expanded observational datasets, such as atmospheric information
919 and radar estimates. We advocate for the development of multiple gridded products that can be
920 evaluated with [surface](#) observations to compare and contrast their strengths. Accurate gridded
921 phase products rely on the ability to represent the physics of water vapor and energy flows in
922 complex terrain (e.g. Holden et al., 2010) where statistical downscaling methods are typically
923 insufficient (Gutmann et al., 2012). This would also allow for ensembles of phase estimates to be
924 used in hydrological models, similar to what is currently being done with gridded precipitation
925 estimates.

926

927 5.6 Characterization of regional variability and response to climate change

928 The inclusion of new datasets, better validation of PPM, and development of gridded data
929 products will poise the hydrologic community to improve hydrological predictions and better
930 quantify regional sensitivity of phase change to climate changes. Because broad-scale techniques
931 applied to assess changes in precipitation phase and snowfall have relied on temperature, both
932 regionally (Klos et al., 2014; Pierce and Cayan, 2013; Knowles et al., 2006) and globally
933 (Kapnick and Delworth, 2013; O’Gorman, 2014), they have not fully considered the potential
934 non-linearities created by the absence of wet bulb depressions and humidity in assessment of

Adrian Harpold 12/6/16 6:18 AM
Deleted: model

Adrian Harpold 12/6/16 6:18 AM
Deleted: is

Adrian Harpold 12/6/16 6:18 AM
Deleted: ground

938 sensitivity to changes in phase. Consequently, the effects of changes from snow to rain from
939 warming and corresponding changes in humidity will be difficult to predict with current PPM.
940 Recent efforts by Rajagopal and Harpold (2016) have demonstrated that simple temperature
941 thresholds are insufficient to characterize snow-rain transition across the western U.S. (Figure 3),
942 perhaps because of differences in humidity. An increased focus on future humidity trends,
943 patterns, GCM simulation errors (Pierce et al., 2013) and availability of downscaled humidity
944 products at increasingly finer scales (e.g.: Abatzoglou, 2013; Pierce and Cayan, 2016) will
945 enable detailed assessments of the relative role of temperature and humidity in future
946 precipitation phase changes. Recent remote sensing platforms, such as GPM, may offer an
947 additional tool to assess regional variability, however, the current GPM precipitation phase
948 product relies on wet bulb temperatures based on model output and not microwave-based
949 observations (Huffman et al., 2015). In addition to issues with either spatial or temporal
950 resolution or coverage, one of the main challenges in using remotely sensed data for
951 distinguishing between frozen and liquid hydrometeors is the lack of validation. Where products
952 have been validated, the results are usually only relevant for the locale of the study area.
953 Spaceborne radar combined with ground-based radar offers perhaps the most promising solution,
954 but given the non-unique relationship between radar reflectivity and snowfall, further testing is
955 necessary in order to develop reliable algorithms.

956

957 Future work is needed to improve projections of changes in snowpack and water availability
958 from regional to global scales. This local to sub-regional characterization is needed for water
959 resource prediction and to better inform decision and policy makers. In particular, the ability to
960 predict the transitional rain-snow elevations and its uncertainty is critical for a variety of end-
961 users, including state and municipal water agencies, flood forecasters, agricultural water boards,
962 transportation agencies, and wildlife, forest, and land managers. Fundamental advancements in
963 characterizing regional variability are possible by addressing the research challenges detailed in
964 sections 5.1-5.5.

965

966 6. Conclusions

967 This review paper is a step towards communicating the potential bottlenecks in hydrological
968 modeling caused by poor representation of precipitation phase (Figure 1). Our goals are to

Adrian Harpold 12/6/16 6:18 AM
Deleted: the

Adrian Harpold 12/6/16 6:18 AM
Deleted: and

Adrian Harpold 12/6/16 6:18 AM
Deleted: Besides

Adrian Harpold 12/6/16 6:18 AM
Deleted: information

Adrian Harpold 12/6/16 6:18 AM
Deleted: Our

974 demonstrate that major research gaps in our ability to PPM are contributing to errors and
975 reducing the predictive skill of hydrological models. By highlighting the research gaps that could
976 advance the science of PPM, we provide a roadmap for future advances (Figure 4). While many
977 of the research gaps are recognized by the community and are being pursued, including
978 incorporating atmospheric and humidity information, others remain essentially unexplored (e.g.
979 production of gridded data, widespread ground validation, and remote sensing validation).

Adrian Harpold 12/6/16 6:18 AM

Deleted: in

Adrian Harpold 12/6/16 6:18 AM

Deleted: ing

Adrian Harpold 12/6/16 6:18 AM

Deleted: while

980
981 The key points that must be communicated to the hydrologic community and its funding
982 agencies can be distilled into the following two statements: 1) current PPM are too simple to
983 capture important processes and are not well-validated for most locations, 2) the lack of
984 sophisticated PPM increases the uncertainty in estimation of hydrological sensitivity to changes
985 in precipitation phase at local to regional scales. We advocate for better incorporation of new
986 information (5.1-5.2) and improved validation methods (5.3-5.4) to advance our current PPM
987 and observations. These improved PPM and remote-sensing observations will be capable of
988 developing gridded datasets (5.5) and providing new insight that reduce the uncertainty of
989 predicting regional changes from snow to rain (5.6). Improved PPM and existing phase products
990 will also facilitate improvement of simpler hydrological models for which more complex PPM
991 are not justified. A concerted effort by the hydrological and atmospheric science communities to
992 address the PPM challenge will remedy current limitations in hydrological modeling of
993 precipitation phase, advance of understanding of cold regions hydrology, and provide better
994 information to decision makers.

Adrian Harpold 12/6/16 6:18 AM

Deleted: algorithms

Adrian Harpold 12/6/16 6:18 AM

Deleted: methods

Adrian Harpold 12/6/16 6:18 AM

Deleted: algorithms

995 Acknowledgements

996 This work was conducted as a part of an Innovation Working Group supported by the Idaho,
997 Nevada, and New Mexico EPSCoR Programs and by the National Science Foundation under
998 award numbers IIA-1329469, IIA-1329470 and IIA-1329513. Adrian Harpold was partially
999 supported by USDA NIFA NEV05293. Adrian Harpold and Rina Schumer were supported by
1000 the NASA EPSCoR Cooperative Agreement #NNX14AN24A. Timothy Link was partially
1001 supported by the Department of the Interior Northwest Climate Science Center (NW CSC)
1002 through a Cooperative Agreement #G14AP00153 from the United States Geological Survey
1003 (USGS). Seshadri Rajagopal was partially supported by research supported by NSF/USDA grant
1004

1011 (#1360506/#1360507) and startup funds provided by Desert Research Institute. The contents of
1012 this manuscript are solely the responsibility of the authors and do not necessarily represent the
1013 views of the NW CSC or the USGS. This manuscript is submitted for publication with the
1014 understanding that the United States Government is authorized to reproduce and distribute
1015 reprints for Governmental purposes.

1016 **References:**

- 1017 Abatzoglou, J. T.: Development of gridded surface meteorological data for ecological
1018 applications and modelling, International Journal of Climatology, 33, 121-131,
1019 10.1002/joc.3413, 2013.
- 1020 Anderson, E., 2006, Snow Accumulation and Ablation Model – Snow-17, available online at
1021 http://www.nws.noaa.gov/oh/hrl/nwsrfs/users_manual/part2/_pdf/22snow17.pdf, accessed August,
1022 2016.
- 1023 Arkin, P. A., and Ardanuy, P. E.: Estimating climatic-scale precipitation from space: a review, J.
1024 Climate, 2, 1229-1238, 1989.
- 1025 Arnold, J.G., Kiniry, J.R., Srinivasan R., Williams, J.R, Haney, E.B., and Neitsch S.L., 2012,
1026 SWAT Input/Output Documentation, Texas Water Resources Institute, TR-439, available
1027 online at <http://swat.tamu.edu/media/69296/SWAT-IO-Documentation-2012.pdf>, accessed
1028 August, 2016.
- 1029 Bales, R. C., Molotch, N. P., Painter, T. H., Dettinger, M. D., Rice, R., and Dozier, J.: Mountain
1030 hydrology of the western United States, Water Resources Research, 42,
1031 10.1029/2005wr004387, 2006.
- 1032 Barnett, T. P., Adam, J. C., and Lettenmaier, D. P.: Potential impacts of a warming climate on
1033 water availability in snow-dominated regions, Nature, 438, 303-309, 10.1038/nature04141,
1034 2005.
- 1035 Battaglia, A., Rustemeier, E., Tokay, A., Blahak, U., and Simmer, C.: PARSIVEL Snow
1036 Observations: A Critical Assessment, Journal of Atmospheric and Oceanic Technology, 27,
1037 333-344, 10.1175/2009jtecha1332.1, 2010.
- 1038 Berghuijs, W. R., Woods, R. A., and Hrachowitz, M.: A precipitation shift from snow towards
1039 rain leads to a decrease in streamflow, Nature Climate Change, 4, 583-586,
1040 10.1038/nclimate2246, 2014.
- 1041 Bernauer, F., Hurkamp, K., Ruhm, W., and Tschiersch, J.: Snow event classification with a 2D
1042 video disdrometer - A decision tree approach, Atmospheric Research, 172, 186-195, 2016.

Adrian Harpold 12/6/16 6:18 AM

Deleted: t

1044 Bergström, S. 1995. The HBV model. In: Singh, V.P. (Ed.) Computer Models of Watershed
1045 Hydrology. Water Resources Publications, Highlands Ranch, CO., pp. 443-476.

1046 Berris, S. N., and Harr, R. D.: Comparative snow accumulation and melt during rainfall in
1047 forested and clear-cut plots in the Western Cascades of Oregon, Water Resources Research,
1048 23, 135-142, 10.1029/WR023i001p00135, 1987.

1049 Bicknell, B.R., Imhoff, J.C., Kittle, J.L., Jr., Donigan, A.S., Jr., and Johanson, R.C.,
1050 Hydrological Simulation Program--Fortran, User's manual for version 11: U.S.
1051 Environmental Protection Agency, National Exposure Research Laboratory, Athens, Ga.,
1052 EPA/600/R-97/080, 755 p., 1997.

1053 Boe, E. T.: Assessing Local Snow Variability Using a Network of Ultrasonic Snow Depth
1054 Sensors, Master of Science in Hydrologic Sciences, Geosciences, Boise State, 2013.

1055 Boodoo, S., Hudak, D., Donaldson, N., and Leduc, M.: Application of Dual-Polarization Radar
1056 Melting-Layer Detection Algorithm, Journal of Applied Meteorology and Climatology, 49,
1057 1779-1793, 10.1175/2010jamc2421.1, 2010.

1058 Borrmann, S., and Jaenicke, R.: Application of microholography for ground-based in-situ
1059 measurements in stratus cloud layers - a case study, Journal of Atmospheric and Oceanic
1060 Technology, 10, 277-293, 10.1175/1520-0426(1993)010<0277:aomfgh>2.0.co;2, 1993.

1061 Braun, L. N.: Simulation of snowmelt-runoff in lowland and lower alpine regions of Switzerland,
1062 Diss. Naturwiss. ETH Zürich, Nr. 7684, 0000. Ref.: Ohmura, A.; Korref.: Vischer, D.;
1063 Korref.: Lang, H., 1984.

1064 Cao, Q., Hong, Y., Chen, S., Gourley, J. J., Zhang, J., and Kirstetter, P. E.: Snowfall
1065 Detectability of NASA's CloudSat: The First Cross-Investigation of Its 2C-Snow-Profile
1066 Product and National Multi-Sensor Mosaic QPE (NMQ) Snowfall Data, Progress in
1067 Electromagnetics Research-Pier, 148, 55-61, 10.2528/pier14030405, 2014.

1068 Cayan, D. R., Kammerdiener, S. A., Dettinger, M. D., Caprio, J. M., and Peterson, D. H.:
1069 Changes in the onset of spring in the western United States, Bulletin of the American
1070 Meteorological Society, 82, 399-415, 10.1175/1520-0477(2001)082<0399:citoos>2.3.co;2,
1071 2001.

1072 Chandrasekar, V., Keranen, R., Lim, S., and Moisseev, D.: Recent advances in classification of
1073 observations from dual polarization weather radars, *Atmospheric Research*, 119, 97-111,
1074 10.1016/j.atmosres.2011.08.014, 2013.

1075 Chen, S., Gourley, J. J., Hong, Y., Cao, Q., Carr, N., Kirstetter, P.-E., Zhang, J., and Flamig, Z.:
1076 Using citizen science reports to evaluate estimates of surface precipitation type, *Bulletin of*
1077 *the American Meteorological Society*, 10.1175/BAMS-D-13-00247.1, 2015.

1078 Dai, A.: Temperature and pressure dependence of the rain-snow phase transition over land and
1079 ocean, *Geophysical Research Letters*, 35, 10.1029/2008gl033295, 2008.

1080 Ding, B., Yang, K., Qin, J., Wang, L., Chen, Y., and He, X.: The dependence of precipitation
1081 types on surface elevation and meteorological conditions and its parameterization, *Journal*
1082 *of Hydrology*, 513, 154-163, 10.1016/j.jhydrol.2014.03.038, 2014.

1083 Eddington, L. W.: Satellite-Derived Moisture-Bogusing Profiles for the North Atlantic Ocean,
1084 DTIC Document, 1989.

1085 Elmore, K. L.: The NSSL Hydrometeor Classification Algorithm in Winter Surface
1086 Precipitation: Evaluation and Future Development, *Weather and Forecasting*, 26, 756-765,
1087 10.1175/waf-d-10-05011.1, 2011.

1088 Fang, X., Pomeroy, J. W., Ellis, C. R., MacDonald, M. K., DeBeer, C. M., and Brown, T.: Multi-
1089 variable evaluation of hydrological model predictions for a headwater basin in the Canadian
1090 Rocky Mountains, *Hydrol. Earth Syst. Sci.*, 17, 1635-1659, 10.5194/hess-17-1635-2013,
1091 2013.

1092 Fatichi, S., Vivoni, E. R., Ogden, F. L., Ivanov, V. Y., Mirus, B., Gochis, D., Downer, C. W.,
1093 Camporese, M., Davison, J. H., Ebel, B., Jones, N., Kim, J., Mascaro, G., Niswonger, R.,
1094 Restrepo, P., Rigon, R., Shen, C., Sulis, M., and Tarboton, D.: An overview of current
1095 applications, challenges, and future trends in distributed process-based models in hydrology,
1096 *Journal of Hydrology*, 537, 45-60, 2016.

1097 Feiccabrino, J., Lundberg, A., and Gustafsson, D.: Improving surface-based precipitation phase
1098 determination through air mass boundary identification, *Hydrology Research*, 43, 179-191,
1099 10.2166/nh.2012.060, 2013.

1100 Feiccabrino, J., Gustafsson, D., and Lundberg, A.: Surface-based precipitation phase
 1101 determination methods in hydrological models, *Hydrology Research*, 44, 44-57, 2015.

1102 Floyd, W., and Weiler, M.: Measuring snow accumulation and ablation dynamics during rain-on-
 1103 snow events: innovative measurement techniques, *Hydrological Processes*, 22, 4805-4812,
 1104 10.1002/hyp.7142, 2008.

1105 Fritze, H., Stewart, I. T., and Pebesma, E.: Shifts in Western North American Snowmelt Runoff
 1106 Regimes for the Recent Warm Decades, *Journal of Hydrometeorology*, 12, 989-1006,
 1107 10.1175/2011jhm1360.1, 2011.

1108 Froidurot, S., Zin, I., Hingray, B., and Gautheron, A.: Sensitivity of Precipitation Phase over the
 1109 Swiss Alps to Different Meteorological Variables, *Journal of Hydrometeorology*, 15, 685-
 1110 696, 10.1175/jhm-d-13-073.1, 2014.

1111 Garvelmann, J., Pohl, S., and Weiler, M.: From observation to the quantification of snow
 1112 processes with a time-lapse camera network, *Hydrology and Earth System Sciences*, 17,
 1113 1415-1429, 10.5194/hess-17-1415-2013, 2013.

1114 Giangrande, S. E., Krause, J. M., and Ryzhkov, A. V.: Automatic designation of the melting
 1115 layer with a polarimetric prototype of the WSR-88D radar, *Journal of Applied Meteorology*
 1116 and *Climatology*, 47, 1354-1364, 10.1175/2007jamc1634.1, 2008.

1117 Gilmore, M. S., Straka, J. M., and Rasmussen, E. N.: Precipitation Uncertainty Due to Variations
 1118 in Precipitation Particle Parameters within a Simple Microphysics Scheme, *Monthly*
 1119 *Weather Review*, 132, 2610-2627, 10.1175/MWR2810.1, 2004.

1120 Godsey, S. E., Kirchner, J. W., and Tague, C. L.: Effects of changes in winter snowpacks on
 1121 summer low flows: case studies in the Sierra Nevada, California, USA, *Hydrological*
 1122 *Processes*, 28, 5048-5064, 10.1002/hyp.9943, 2014.

1123 Grazioli, J., Tuia, D., and Berne, A.: Hydrometeor classification from polarimetric radar
 1124 measurements: a clustering approach, *Atmospheric Measurement Techniques*, 8, 149-170,
 1125 10.5194/amt-8-149-2015, 2015.

1126 Gusev, E.M. and Nasonova, O.N., Parameterization of Heat and Water Exchange on Land
 1127 Surface for Coupling Hydrologic and Climate Models, *Water Resources.*, 25(4): 421–431,
 1128 1998.

1129 Gutmann, E.D., Rasmussen, R.M., Liu, C., Ikeda, K., Gochis, D., Clark, P.P., Dudhia, J., and
 1130 Gregory, T.: A comparison of statistical and dynamical downscaling of winter precipitation
 1131 over complex terrain, *Journal of Climate*, 25(1): 262-281, 2012.

1132 Harder, P., and Pomeroy, J.: Estimating precipitation phase using a psychrometric energy
 1133 balance method, *Hydrological Processes*, 27, 1901-1914, 10.1002/hyp.9799, 2013.

1134 Harder, P., and Pomeroy, J. W.: Hydrological model uncertainty due to precipitation-phase
 1135 partitioning methods, *Hydrological Processes*, 28, 4311-4327, 2014.

1136 Hauser, D., Amayenc, P., and Nutton, B.: A new optical instrument for simultaneous
 1137 measurement of raindrop diameter and fall speed distributions, *Atmos. Oceanic Technol.*, 1,
 1138 256-259, 1984.

1139 HEC-1, 1998, Flood Hydrograph Package, User's Manual, CPD-1A, Version 4.1, available
 1140 online at, [http://www.hec.usace.army.mil/publications/ComputerProgramDocumentation/HEC-](http://www.hec.usace.army.mil/publications/ComputerProgramDocumentation/HEC-1_UsersManual_(CPD-1a).pdf)
 1141 [1_UsersManual_\(CPD-1a\).pdf](http://www.hec.usace.army.mil/publications/ComputerProgramDocumentation/HEC-1_UsersManual_(CPD-1a).pdf), accessed August, 2016.

1142 Hedrick, A. R., and Marshall, H.-P.: Automated Snow Depth Measurements in Avalanche
 1143 Terrain Using Time-Lapse Photography, 2014 International Snow Science Workshop, 2014,

1144 Holden, Z. A., Abatzoglou, J. T., Luce, C. H., & Baggett, L. S. Empirical downscaling of daily
 1145 minimum air temperature at very fine resolutions in complex terrain. *Agricultural and*
 1146 *Forest Meteorology*, 151, 1066-1073. doi:10.1016/j.agrformet.2011.03.011, 2011.

1147 Hou, A. Y., Kakar, R. K., Neeck, S., Azarbarzin, A. A., Kummerow, C. D., Kojima, M., Oki, R.,
 1148 Nakamura, K., and Iguchi, T.: The global precipitation measurement mission, *Bulletin of the*
 1149 *American Meteorological Society*, 95, 701-722, 2014.

1150 Isaac, G. A., Joe, P. I., Mailhot, J., Bailey, M., Bélair, S., Boudala, F. S., . . . Wilson, L. J.
 1151 Science of nowcasting Olympic weather for Vancouver 2010 (SNOW-V10): A World
 1152 Weather Research Programme project. *Pure and Applied Geophysics*, 171(1-2), 1-24.
 1153 doi:10.1007/s00024-012-0579-0, 2014.

1154 Jepsen, S. M., Harmon, T. C., Meadows, M. W., and Hunsaker, C. T.: Hydrogeologic influence
 1155 on changes in snowmelt runoff with climate warming: Numerical experiments on a mid-
 1156 elevation catchment in the Sierra Nevada, USA, *Journal of Hydrology*, 533, 332-342,
 1157 10.1016/j.jhydrol.2015.12.010, 2016.

1158 Joe, P., Scott, B., Doyle, C., Isaac, G., Gultepe, I., Forsyth, D., . . . Boudala, F. The monitoring
 1159 network of the Vancouver 2010 Olympics. *Pure and Applied Geophysics*, 171(1-2), 25-58,
 1160 doi:10.1007/s00024-012-0588-z, 2014.

1161 Joss, J., and Waldvogel, A.: Ein Spektograph fuer Niederschlagstropfen mit automatischer
 1162 Auswertung, *Pure Appl. Geophys*, 68, 240--246, 1967.

1163 Kalnay, E., and Cai, M.: Impact of urbanization and land-use change on climate, *Nature*, 423,
 1164 528-531, 10.1038/nature01675, 2003.

1165 Kaplan, M. L., Vellore, R. K., Marzette, P. J., and Lewis, J. M.: The role of windward-side
 1166 diabatic heating in Sierra Nevada spillover precipitation, *Journal of Hydrometeorology*, 13,
 1167 1172-1194, 2012.

1168 Kapnick, S. B. and Delworth, T. L.: Controls of global snow under a changed climate, *Journal of*
 1169 *Climate*, 26, 5537-5562, 2013.

1170 Kidd, C.: On rainfall retrieval using polarization-corrected temperatures, *International Journal of*
 1171 *Remote Sensing*, 19, 981-996, 10.1080/014311698215829, 1998.

1172 Kidd, C., and Huffman, G.: Global precipitation measurement, *Meteorological Applications*, 18,
 1173 334-353, 10.1002/met.284, 2011.

1174 Kienzle, S. W.: A new temperature based method to separate rain and snow, *Hydrological*
 1175 *Processes*, 22, 5067-5085, 10.1002/hyp.7131, 2008.

1176 Kim, M. J., Weinman, J. A., Olson, W. S., Chang, D. E., Skofronick-Jackson, G., and Wang, J.
 1177 R.: A physical model to estimate snowfall over land using AMSU-B observations, *Journal*
 1178 *of Geophysical Research-Atmospheres*, 113, 16, 10.1029/2007jd008589, 2008.

1179 Kirchner, J. W.: Getting the right answers for the right reasons: Linking measurements, analyses,
 1180 and models to advance the science of hydrology, *Water Resources Research*, 42,
 1181 10.1029/2005wr004362, 2006.

1182 Kite, G. 1995. The HBV model. In: Singh, V.P. (Ed.) *Computer Models of Watershed*
 1183 *Hydrology*. Water Resources Publications, Highlands Ranch, CO., pp. 443-476.

1184 Klos, P. Z., Link, T. E., and Abatzoglou, J. T.: Extent of the rain-snow transition zone in the
 1185 western US under historic and projected climate, *Geophysical Research Letters*, 41, 4560-
 1186 4568, 10.1002/2014gl060500, 2014.

1187 Knollenberg, R. G.: Some results of measurements of latent heat released from seeded stratus,
 1188 *Bulletin of the American Meteorological Society*, 51, 580-&, 1970.

1189 Knowles, N., Dettinger, M. D., and Cayan, D. R.: Trends in snowfall versus rainfall in the
 1190 Western United States, *Journal of Climate*, 19, 4545-4559, 2006.

1191 Kongoli, C., Pellegrino, P., Ferraro, R. R., Grody, N. C., and Meng, H.: A new snowfall
 1192 detection algorithm over land using measurements from the Advanced Microwave Sounding
 1193 Unit (AMSU), *Geophysical Research Letters*, 30, 10.1029/2003gl017177, 2003.

1194 Kongoli, C., Meng, H., Dong, J., and Ferraro, R.: A snowfall detection algorithm over land
 1195 utilizing high-frequency passive microwave measurements-Application to ATMS, *Journal*
 1196 *of Geophysical Research-Atmospheres*, 120, 1918-1932, 10.1002/2014jd022427, 2015.

1197 Kruger, A., and Krajewski, W. F.: Two-dimensional video disdrometer: A description, *Journal of*
 1198 *Atmospheric and Oceanic Technology*, 19, 602-617, 10.1175/1520-
 1199 0426(2002)019<0602:tdvdad>2.0.co;2, 2002.

1200 Kulie, M. S., Milani, L., Wood, N. B., Tushaus, S. A., Bennartz, R., and L'Ecuyer, T. S.: A
 1201 Shallow Cumuliform Snowfall Census Using Spaceborne Radar, *Journal of*
 1202 *Hydrometeorology*, 17, 1261-1279, 10.1175/jhm-d-15-0123.1, 2016.

1203 L'hôte, Y., Chevallier, P., Coudrain, A., Lejeune, Y., and Etchevers, P.: Relationship between
 1204 precipitation phase and air temperature: comparison between the Bolivian Andes and the
 1205 Swiss Alps/Relation entre phase de précipitation et température de l'air: comparaison entre
 1206 les Andes Boliviennes et les Alpes Suisses, *Hydrological sciences journal*, 50, 2005.

1207 Leavesley, G. H., Restrepo, P. J., Markstrom, S. L., Dixon, M., and Stannard, L. G.: The
 1208 Modular Modeling System (MMS): User's Manual, U.S. Geological Survey, Denver,
 1209 COOpen File Report 96-151, 1996.

1210 Lempio, G. E., Bumke, K., and Macke, A.: Measurement of solid precipitation with an optical
 1211 disdrometer, *Advances in Geosciences*, 10, 91-97, 2007.

1212 Lewis, J., Lakshmivarahan, S., and Dhall, S.: Dynamic Data Assimilation: A Least Squares
 1213 Approach, Cambridge Univ. Press, 745 pp., 2006.
 1214 Lin, Y.-L.: Mesoscale Dynamics, Cambridge University Press, 630 pp., 2007.
 1215 Liu, G.: Deriving snow cloud characteristics from CloudSat observations, Journal of Geophysical
 1216 Research-Atmospheres, 113, 10.1029/2007jd009766, 2008.
 1217 Loffler-Mang, M., Kunz, M., and Schmid, W.: On the performance of a low-cost K-band
 1218 Doppler radar for quantitative rain measurements, Journal of Atmospheric and Oceanic
 1219 Technology, 16, 379-387, 10.1175/1520-0426(1999)016<0379:otpoal>2.0.co;2, 1999.
 1220 Luce, C. H., and Holden, Z. A.: Declining annual streamflow distributions in the Pacific
 1221 Northwest United States, 1948-2006, Geophysical Research Letters, 36,
 1222 10.1029/2009gl039407, 2009.
 1223 Lundquist, J. D., Neiman, P. J., Martner, B., White, A. B., Gottas, D. J., and Ralph, F. M.: Rain
 1224 versus snow in the Sierra Nevada, California: Comparing Doppler profiling radar and
 1225 surface observations of melting level, Journal of Hydrometeorology, 9, 194-211,
 1226 10.1175/2007jhm853.1, 2008.
 1227 Lynch-Stieglitz, M.: The development and validation of a simple snow model for the GISS
 1228 GCM, Journal of Climate, 7, 1842-1855, 1994.
 1229 Marks, D., Link, T., Winstral, A., and Garen, D.: Simulating snowmelt processes during rain-on-
 1230 snow over a semi-arid mountain basin, Annals of Glaciology, 32, 195-202, 2001.
 1231 Marks, D., Winstral, A., Reba, M., Pomeroy, J., and Kumar, M.: An evaluation of methods for
 1232 determining during-storm precipitation phase and the rain/snow transition elevation at the
 1233 surface in a mountain basin, Advances in Water Resources, 55, 98-110,
 1234 <http://dx.doi.org/10.1016/j.advwatres.2012.11.012>, 2013.
 1235 Martinec, J., and Rango, A.: Parameter values for snowmelt runoff modelling, Journal of
 1236 Hydrology, 84, 197-219, [http://dx.doi.org/10.1016/0022-1694\(86\)90123-X](http://dx.doi.org/10.1016/0022-1694(86)90123-X), 1986.
 1237 Martinec J., Rango A., Roberts R., 2008, Snowmelt Runoff Model, User's Manual, available
 1238 online at http://aces.nmsu.edu/pubs/research/weather_climate/SRMSpecRep100.pdf, accessed
 1239 August, 2016.

1240 Matrosov, S. Y., Shupe, M. D., and Djalalova, I. V.: Snowfall retrievals using millimeter-
 1241 wavelength cloud radars, *Journal of Applied Meteorology and Climatology*, 47, 769-777,
 1242 10.1175/2007jame1768.1, 2008.

1243 Maurer, E. P., and Mass, C.: Using radar data to partition precipitation into rain and snow in a
 1244 hydrologic model, *Journal of Hydrologic Engineering*, 11, 214-221, 10.1061/(asce)1084-
 1245 0699(2006)11:3(214), 2006.

1246 McCabe, G. J., and Wolock, D. M.: General-circulation-model simulations of future snowpack in
 1247 the western United States 1. *JAWRA Journal of the American Water Resources Association*,
 1248 35(6), 1473-1484, 1999a.

1249 McCabe, G.J. and Wolock, D.M.: Recent Declines in Western U.S. Snowpack in the Context of
 1250 Twentieth-Century Climate Variability, *Earth Interactions*, 13, 1-15, DOI:
 1251 10.1175/2009EI283.1, 1999b.

1252 McCabe, G. J., Clark, M. P., and Hay, L. E.: Rain-on-snow events in the western United States,
 1253 *Bulletin of the American Meteorological Society*, 88, 319-+, 10.1175/bams-88-3-319, 2007.

1254 McCabe, G. J., and Wolock, D. M.: Long-term variability in Northern Hemisphere snow cover
 1255 and associations with warmer winters, *Climatic Change*, 99, 141-153, 2010.

1256 MIKE-SHE User Manual, available online at
 1257 ftp://ftp.cgs.si/Uporabniki/UrosZ/mike/Manuals/MIKE_SHE/MIKE_SHE.htm, accessed August,
 1258 2016.

1259 Milly, P. C. D., Betancourt, J., Falkenmark, M., Hirsch, R. M., Kundzewicz, Z. W., Lettenmaier,
 1260 D. P., and Stouffer, R. J.: Climate change - Stationarity is dead: Whither water
 1261 management?, *Science*, 319, 573-574, 10.1126/science.1151915, 2008.

1262 Minder, J. R.: The Sensitivity of Mountain Snowpack Accumulation to Climate Warming,
 1263 *Journal of Climate*, 23, 2634-2650, 10.1175/2009jcli3263.1, 2010.

1264 Minder, J. R., and Kingsmill, D. E.: Mesoscale Variations of the Atmospheric Snow Line over
 1265 the Northern Sierra Nevada: Multiyear Statistics, Case Study, and Mechanisms, *Journal of*
 1266 *the Atmospheric Sciences*, 70, 916-938, 10.1175/jas-d-12-0194.1, 2013.

1267 Mitchell K., Ek, M., Wong, V., Lohmann, D., Koren, V., Schaake, J., Duan, Q., Gayno, G.,
 1268 Moore, B., Grunmann, P., Tarpley, D., Ramsay, B., Chen, F., Kim, J., Pan, H.L., Lin, Y.,
 1269 Marshall, C., Mahrt, L., Meyers, T., and Ruscher, P.: 2005, Noah Land-Surface Model,
 1270 User's Guide, version 2.7.1, available at
 1271 ftp://ftp.emc.ncep.noaa.gov/mmb/gcp/ldas/noahlsn/ver_2.7.1, accessed August, 2016.

1272 Mizukami, N., Koren, V., Smith, M., Kingsmill, D., Zhang, Z. Y., Cosgrove, B., and Cui, Z. T.:
 1273 The Impact of Precipitation Type Discrimination on Hydrologic Simulation: Rain-Snow
 1274 Partitioning Derived from HMT-West Radar-Detected Brightband Height versus Surface
 1275 Temperature Data, *Journal of Hydrometeorology*, 14, 1139-1158, 10.1175/jhm-d-12-035.1,
 1276 2013.

1277 Morrison, H., Curry, J., and Khvorostyanov, V.: A new double-moment microphysics
 1278 parameterization for application in cloud and climate models. Part I: Description, *Journal of*
 1279 *the Atmospheric Sciences*, 62, 1665-1677, 2005.

1280 Motoyama, H.: Simulation of seasonal snowcover based on air temperature and precipitation,
 1281 *Journal of Applied Meteorology*, 29, 1104-1110, 1990.

1282 Newman, A. J., Kucera, P. A., & Bliven, L. F.. Presenting the snowflake video imager (SVI).
 1283 *Journal of Atmospheric and Oceanic Technology*, 26(2), 167-179, 2009.
 1284 doi:10.1175/2008jtecha1148.1

1285 NOAA, 2016. NEXRAD Data Archive, Inventory and Access, available online at
 1286 <https://www.ncdc.noaa.gov/nexradinv/> accessed 11/10/2016

1287 Noh, Y. J., Liu, G. S., Jones, A. S., and Haar, T. H. V.: Toward snowfall retrieval over land by
 1288 combining satellite and in situ measurements, *Journal of Geophysical Research-*
 1289 *Atmospheres*, 114, 10.1029/2009jd012307, 2009.

1290 O'Gorman, P.A.: Contrasting responses of mean and extreme snowfall to climate change,
 1291 *Nature*, 512, 416-418, 2014.

1292 Olsen, A.: Snow or rain?—A matter of wet-bulb temperature, thesis, Uppsala Univ., Uppsala,
 1293 Sweden.(Available at [http://www. geo. uu. se/luva/exarb/2003/Arvid_Olsen. pdf](http://www.geo.uu.se/luva/exarb/2003/Arvid_Olsen.pdf)), 2003.

1294 Olson, W. S., Kummerow, C. D., Heymsfield, G. M., and Giglio, L.: A method for combined
 1295 passive-active microwave retrievals of cloud and precipitation profiles, *Journal of Applied*
 1296 *Meteorology*, 35, 1763-1789, 10.1175/1520-0450(1996)035<1763:amfcpm>2.0.co;2, 1996.

1297 Pachauri, R. K.: Intergovernmental panel on climate change (IPCC): Keynote address,
 1298 *Environmental Science and Pollution Research*, 9, 436-438, 2002.

1299 Pagano, T. C., Wood, A. W., Ramos, M. H., Cloke, H. L., Pappenberger, F., Clark, M. P.,
 1300 Cranston, M., Kavetski, D., Mathevet, T., Sorooshian, S., and Verkade, J. S.: Challenges of
 1301 Operational River Forecasting, *Journal of Hydrometeorology*, 15, 1692-1707, 10.1175/jhm-
 1302 d-13-0188.1, 2014.

1303 Parajka, J., Haas, P., Kimbauer, R., Jansa, J., and Bloeschl, G.: Potential of time-lapse
 1304 photography of snow for hydrological purposes at the small catchment scale, *Hydrological*
 1305 *Processes*, 26, 3327-3337, 10.1002/hyp.8389, 2012.

1306 Park, H., Ryzhkov, A. V., Zrnica, D. S., and Kim, K.-E.: The Hydrometeor Classification
 1307 Algorithm for the Polarimetric WSR-88D: Description and Application to an MCS, *Weather*
 1308 *and Forecasting*, 24, 730-748, 10.1175/2008waf2222205.1, 2009.

1309 Pierce, D. W. and Cayan, D. R.: The uneven response of different snow measures to human-
 1310 induced climate warming. *Journal of Climate*, 26, 4148-4167, 2013.

1311 Pierce, D. W., Westerling, A. L., & Oyler, J.: Future humidity trends over the western united
 1312 states in the CMIP5 global climate models and variable infiltration capacity hydrological
 1313 modeling system. *Hydrology and Earth System Sciences*, 17(5), 1833-1850, 2013.

1314 Pierce, D. W. and Cayan, D. R.: Downscaling humidity with localized constructed analogs
 1315 (LOCA) over the conterminous united states. *Climate Dynamics*, 47, 411-431, 2016.

1316 Pipes, A., and Quick, M. C.: UBC watershed model users guide, Department of Civil
 1317 Engineering, University of British Columbia, 1977.

1318 Rajagopal, S., and Harpold, A.: Testing and Improving Temperature Thresholds for Snow and
 1319 Rain Prediction in the Western United States, *Journal of American Water Resources*
 1320 *Association*, 2016.

1321 Rasmussen, R., Baker, B., Kochendorfer, J., Meyers, T., Landolt, S., Fischer, A. P., Black, J.,
 1322 Thériault, J. M., Kucera, P., Gochis, D., Smith, C., Nitu, R., Hall, M., Ikeda, K., and
 1323 Gutmann, E.: How Well Are We Measuring Snow: The NOAA/FAA/NCAR Winter
 1324 Precipitation Test Bed, *Bulletin of the American Meteorological Society*, 93, 811-829,
 1325 10.1175/BAMS-D-11-00052.1, 2012.

1326 Reisner, J., Rasmussen, R. M., and Brientjes, R.: Explicit forecasting of supercooled liquid water
 1327 in winter storms using the MM5 mesoscale model, *Quarterly Journal of the Royal*
 1328 *Meteorological Society*, 124, 1071-1107, 1998.

1329 Rojas, R., Feyen, L., Dosio, A., and Bavera, D.: Improving pan-European hydrological
 1330 simulation of extreme events through statistical bias correction of RCM-driven
 1331 climate simulations, *Hydrology and Earth System Sciences*, 15, 2599, 2011.

1332 Safeeq, M., Mauger, G. S., Grant, G. E., Arismendi, I., Hamlet, A. F., and Lee, S. Y.: Comparing
 1333 Large-Scale Hydrological Model Predictions with Observed Streamflow in the Pacific
 1334 Northwest: Effects of Climate and Groundwater, *Journal of Hydrometeorology*, 15, 2501-
 1335 2521, 10.1175/jhm-d-13-0198.1, 2014.

1336 Sevruck, B.: Assessment of snowfall proportion in monthly precipitation in Switzerland, *Zbornik*
 1337 *meteoroloskih i Hidroloskih Radovav Beograd*, 10, 315-318, 1984.

1338 Shamir, E., and Georgakakos, K. P.: Distributed snow accumulation and ablation modeling in the
 1339 American River basin, *Advances in Water Resources*, 29, 558-570,
 1340 10.1016/j.advwatres.2005.06.010, 2006.

1341 Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Barker, D. M., Duda, M. G., Huang, X.-
 1342 Y., Wang, W., and Powers, J. G.: A description of the advanced research WRF version
 1343 3NCAR Tech. Note NCAR/TN-475+STR, 113, 2008.

1344 Skofronick-Jackson, G., Hudak, D., Petersen, W., Nesbitt, S. W., Chandrasekar, V., Durden, S.,
 1345 Gleicher, K. J., Huang, G.-J., Joe, P., Kollias, P., Reed, K. A., Schwaller, M. R., Stewart, R.,
 1346 Tanelli, S., Tokay, A., Wang, J. R., and Wolde, M.: Global Precipitation Measurement Cold
 1347 Season Precipitation Experiment (GCPEX): For Measurement's Sake, Let It Snow, *Bulletin*
 1348 *of the American Meteorological Society*, 96, 1719-1741, doi:10.1175/BAMS-D-13-00262.1,
 1349 2015.

1350 SNTHERM Online Documentation, available at
 1351 <http://www.geo.utexas.edu/climate/Research/SNOWMIP/SUPERSNOW2/rjordan.html>, accessed
 1352 August, 2016.

1353 Stewart, R. E.: Precipitation Types in the Transition Region of Winter Storms, Bulletin of the
 1354 American Meteorological Society, 73, 287-296, 10.1175/1520-
 1355 0477(1992)073<0287:PTITTR>2.0.CO;2, 1992.

1356 Stewart, R. E., Theriault, J. M., and Henson, W.: On the Characteristics of and Processes
 1357 Producing Winter Precipitation Types near 0 degrees C, Bulletin of the American
 1358 Meteorological Society, 96, 623-639, 10.1175/bams-d-14-00032.1, 2015.

1359 Tague, C.L., and Band, L.E.: RHESys: Regional Hydro-Ecologic Simulation System—An
 1360 Object Oriented Approach to Spatially Distributed Modeling of Carbon, Water, and Nutrient
 1361 Cycling, Earth Interactions, 8, 19, 1-42, 2004.

1362 Tarboton, D.G., and Luce, C.H., 1996, Utah Energy Balance Snow Accumulation and Melt
 1363 Model (UEB), available online at
 1364 http://www.fs.fed.us/rm/boise/publications/watershed/rmrs_1996_tarbotond001.pdf, accessed
 1365 August, 2016.

1366 Tarboton, D., Jackson, T., Liu, J., Neale, C., Cooley, K., and McDonnell, J.: A Grid Based
 1367 Distributed Hydrologic Model: Testing Against Data from Reynolds Creek Experimental
 1368 Watershed, Preprints AMS Conf. on Hydrol, 79-84, 1995.

1369 Theriault, J. M., and Stewart, R. E.: On the effects of vertical air velocity on winter precipitation
 1370 types, Natural Hazards and Earth System Sciences, 7, 231-242, 2007.

1371 Theriault, J. M., and Stewart, R. E.: A Parameterization of the Microphysical Processes Forming
 1372 Many Types of Winter Precipitation, Journal of the Atmospheric Sciences, 67, 1492-1508,
 1373 10.1175/2009jas3224.1, 2010.

1374 Theriault, J. M., Stewart, R. E., and Henson, W.: On the Dependence of Winter Precipitation
 1375 Types on Temperature, Precipitation Rate, and Associated Features, Journal of Applied
 1376 Meteorology and Climatology, 49, 1429-1442, 10.1175/2010jamc2321.1, 2010.

1377 Theriault, J. M., Stewart, R. E., and Henson, W.: Impacts of terminal velocity on the trajectory of
 1378 winter precipitation types, *Atmospheric Research*, 116, 116-129,
 1379 10.1016/j.atmosres.2012.03.008, 2012.

1380 Thompson, E. J., Rutledge, S. A., Dolan, B., Chandrasekar, V., and Cheong, B. L.: A Dual-
 1381 Polarization Radar Hydrometeor Classification Algorithm for Winter Precipitation, *Journal*
 1382 *of Atmospheric and Oceanic Technology*, 31, 1457-1481, 10.1175/jtech-d-13-00119.1,
 1383 2014.

1384 Thompson, G., Rasmussen, R. M., and Manning, K.: Explicit forecasts of winter precipitation
 1385 using an improved bulk microphysics scheme. Part I: Description and sensitivity analysis,
 1386 *Monthly Weather Review*, 132, 519-542, 2004.

1387 Thompson, G., Field, P. R., Rasmussen, R. M., and Hall, W. D.: Explicit forecasts of winter
 1388 precipitation using an improved bulk microphysics scheme. Part II: Implementation of a
 1389 new snow parameterization, *Monthly Weather Review*, 136, 5095-5115, 2008.

1390 Todini, E.: The ARNO Rainfall-runoff model, *Journal of Hydrology*, 175, 339-382, 1996.

1391 Tung, C.-P., and Haith, D. A.: Global-warming effects on New York streamflows, *Journal of*
 1392 *Water Resources Planning and Management*, 121, 216-225, 1995.

1393 U.S. Army Corps of Engineers: Summary Report of the Snow Investigation Hydrological
 1394 Practices, 3rd Edition, Chapter 2, 54-56, North Pacific Division, Portland, Oregon, 1956.

1395 Verseghy, D., 2009, CLASS-The Canadian Land Surface Scheme, Version 3.4, Technical
 1396 Documentation, Version 1.1, Environment Canada, available online at
 1397 http://www.usask.ca/ip3/download/CLASS_v3_4_Documentation_v1_1.pdf, accessed
 1398 August, 2016.

1399 VIC Documentation, available online at <https://vic.readthedocs.io/en/develop/>, accessed August,
 1400 2016.

1401 Wang, R., Kumar, M., and Marks, D. Anomalous trend in soil evaporation in a semi-arid, snow-
 1402 dominated watershed. *Advances in Water Resources*, 57, 32-40, 2013.

1403 Wang, R., Kumar, M., and Link, T. E.: Potential trends in snowmelt generated peak streamflows
 1404 in a warming climate, *Geophys. Res. Lett.* 43, 10.1002/ 2016GL068935, 2016.

1405 Wen, L., Nagabhatla, N., Lu, S., and Wang, S.-Y.: Impact of rain snow threshold temperature on
1406 snow depth simulation in land surface and regional atmospheric models, *Advances in*
1407 *Atmospheric Sciences*, 30, 1449-1460, 10.1007/s00376-012-2192-7, 2013.

1408 White, A. B., Gottas, D. J., Strem, E. T., Ralph, F. M., and Neiman, P. J.: An automated
1409 brightband height detection algorithm for use with Doppler radar spectral moments, *Journal*
1410 *of Atmospheric and Oceanic Technology*, 19, 687-697, 10.1175/1520-
1411 0426(2002)019<0687:aabhda>2.0.co;2, 2002.

1412 White, A. B., Gottas, D. J., Henkel, A. F., Neiman, P. J., Ralph, F. M., and Gutman, S. I.:
1413 Developing a Performance Measure for Snow-Level Forecasts, *Journal of*
1414 *Hydrometeorology*, 11, 739-753, 10.1175/2009jhm1181.1, 2010.

1415 Whiteman, C. D., Bian, X., & Zhong, S.: Wintertime evolution of the temperature inversion in
1416 the colorado plateau basin. *Journal of Applied Meteorology*, 38(8), 1103-1117, 1999.

1417 Wigmosta, M.S., Vail, L.W., and Lettenmaier, D.P.: A distributed hydrology-vegetation model
1418 for complex terrain, *Water Resources Research*, 30(6), 1665-1679, 1994.

1419 Wilheit, T. T., Chang, A. T. C., King, J. L., Rodgers, E. B., Nieman, R. A., Krupp, B. M.,
1420 Milman, A. S., Stratigos, J. S., and Siddalingaiah, H.: Microwave radiometric observation
1421 near 19.35, 92 and 183 GHz of precipitation in tropical storm Cora, *Journal of Applied*
1422 *Meteorology*, 21, 1137-1145, 10.1175/1520-0450(1982)021<1137:mronag>2.0.co;2, 1982.

1423 Wood, A. W., Leung, L. R., Sridhar, V., and Lettenmaier, D.: Hydrologic implications of
1424 dynamical and statistical approaches to downscaling climate model outputs, *Climatic*
1425 *change*, 62, 189-216, 2004.

1426 Wood, N., L'Ecuyer, T. S., Vane, D., Stephens, G., and Partain, P.: Level 2C snow profile
1427 process description and interface control document, 2013.

1428 Yamazaki, T.: A One-dimensional Land Surface Model Adaptable to Intensely Cold Regions and
1429 its Applications in Eastern Siberia, 79, 1107-1118, 2001.

1430 Yang Z.L., Dickinson, R.E., Robock, A. and Vinniko, K.Y.: Validation of the Snow Submodel of
1431 the Biosphere–Atmosphere Transfer Scheme with Russian Snow Cover and Meteorological
1432 Observational Data, *J. Climate*, 10, 353–373, doi: 10.1175/1520-
1433 0442(1997)010<0353:VOTSSO>2.0.CO;2, 1997.

1434 Yarnell, S. M., Viers, J. H., and Mount, J. F.: Ecology and Management of the Spring Snowmelt
 1435 Recession, *Bioscience*, 60, 114-127, 10.1525/bio.2010.60.2.6, 2010.
 1436 Ye, H., Cohen, J., and Rawlins, M.: Discrimination of Solid from Liquid Precipitation over
 1437 Northern Eurasia Using Surface Atmospheric Conditions, *Journal of Hydrometeorology*, 14,
 1438 1345-1355, 10.1175/jhm-d-12-0164.1, 2013.
 1439 Yucel, I., Onen, A., Yilmaz, K. K., and Gochis, D. J.: Calibration and evaluation of a flood
 1440 forecasting sytem: Utility of numerical weather prediction model, data assimilate, and
 1441 satellite-based rainfall, *Journal of Hydrology*, 523, 49-66, 10.1016/j.hydrol.2015.01.042,
 1442 2015.
 1443 Zängl, G.: Interaction between dynamics and cloud microphysics in orographic precipitation
 1444 enhancement: A high-resolution modeling study of two North Alpine heavy-precipitation
 1445 events, *Monthly weather review*, 135, 2817-2840, 2007.
 1446 Zanotti, F., Endrizzi, S., Bertoldi, G. and Rigon, R.: The GEOTOP snow module, *Hydrolgical*
 1447 Processes, 18, 3667–3679. doi:10.1002/hyp.5794, 2004.
 1448
 1449
 1450
 1451



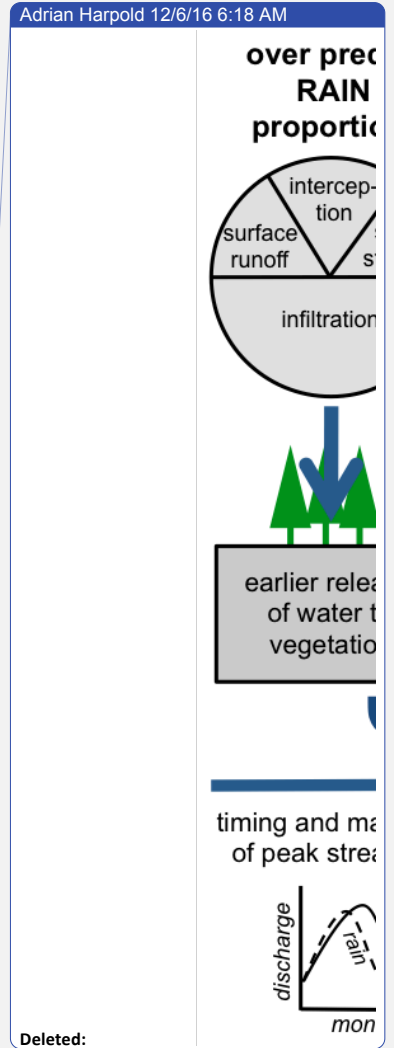


Figure 1: Precipitation phase has numerous implications for modeling the magnitude, storage, partitioning, and timing of water inputs and outputs. Potentially affecting important ecohydrological and streamflow quantities important for prediction.

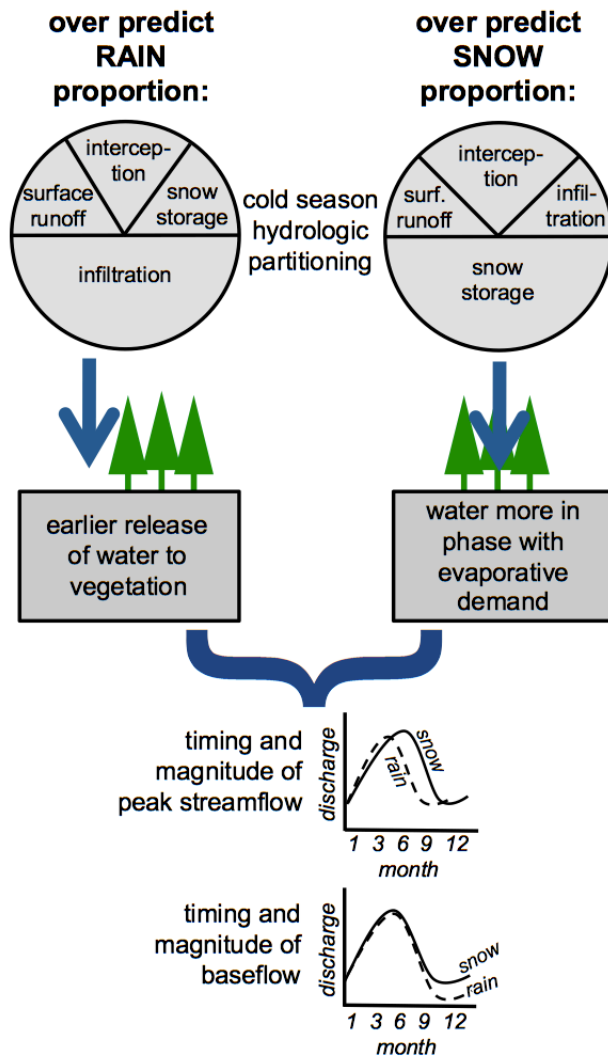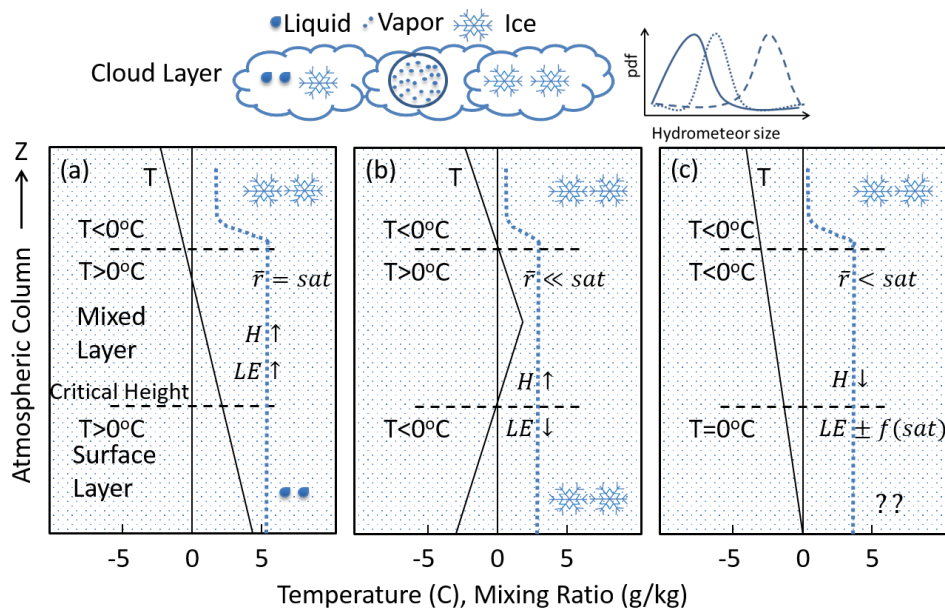


1458

1459 Figure 2: The phase of precipitation at the ground surface is strongly controlled by atmospheric
 1460 profiles of temperature and humidity. While conditions exist that are relatively easy to predict
 1461 rain (a) and snow (b), many conditions lead to complex heat exchanges that are difficult to
 1462 predict with ground based observations alone (c). The blue dotted line represents the mixing
 1463 ratio. H, LE, $f(sat)$, and r are abbreviations for sensible heat, latent heat of evaporation, function
 1464 of saturation and mixing ratio respectively. The arrows after H or LE indicate the energy of the
 1465 hydrometeor either increasing (up) or decreasing (down) which is controlled by other
 1466 atmospheric conditions.

1467

1468

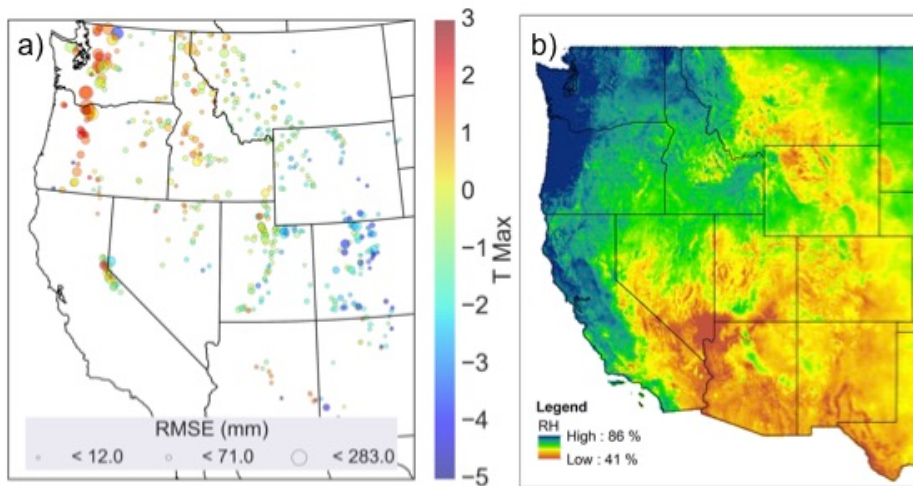

1469

1470 Figure 3: The optimized critical maximum daily temperature threshold that produced the lowest
 1471 Root Mean Square Error (RMSE) in the prediction of snowfall at Snow Telemetry (SNOTEL)
 1472 stations across the western US (adapted from Rajagopal and Harpold, 2016). b) Precipitation day
 1473 relative humidity averaged over 1981-2015 based on the Gridmet dataset (Abatzoglou, 2013).

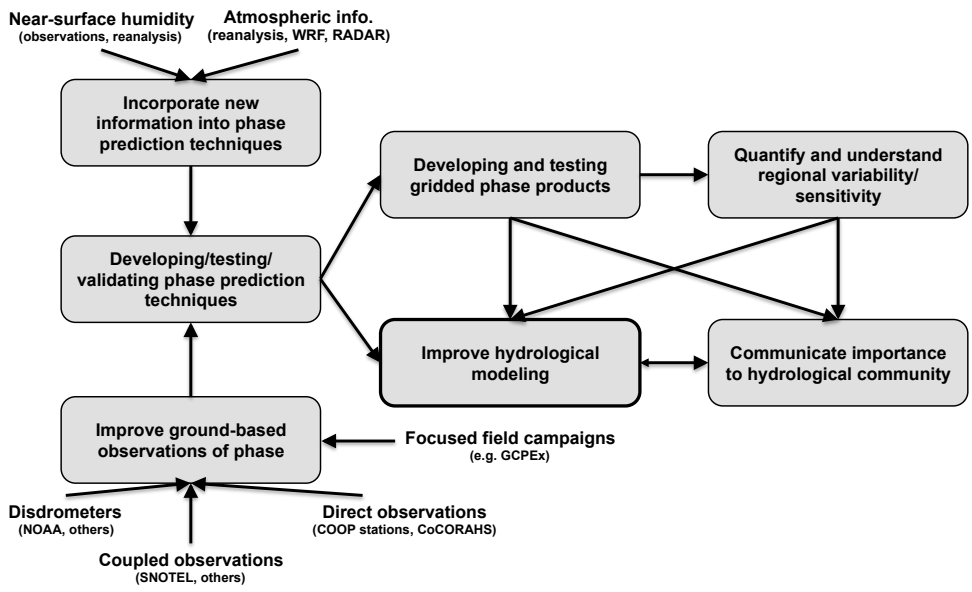


Figure 4: Conceptual representation of the research gaps and workflows needed to advance PPM and improve hydrological modeling.

1480 Table 1. [Mathematical expression for the four common temperature-based PPM to estimate snow](#)
1481 [fraction \(S\) or snow frequency \(F\) using the mean air temperature \(\$T_a\$ \), max daily air](#)
1482 [temperature \(\$T_{a-max}\$ \), and/or minimum daily air temperature \(\$T_{a-min}\$ \). The variable \$T_{snow}\$ is air](#)
1483 [temperature when all precipitation \(P\) is snow and \$T_{rain}\$ is the air temperature when all air](#)
1484 [precipitation is rain.](#)

1485

Type	Mathematical expression for snow fraction (S) or snow frequency (F)	Reference(s)
Static threshold	$S = \begin{cases} P & \text{for } T_a \leq T_{snow} \\ 0 & \text{for } T_a \geq T_{snow} \end{cases}$	Motoyama, 1990
Linear transition	$S = \begin{cases} P & \text{for } T_a \leq T_{snow} \\ P \left(\frac{T_{rain} - T_a}{T_{rain} - T_{snow}} \right) & \text{for } T_{snow} < T_a < T_{rain} \\ 0 & \text{for } T_a \geq T_{rain} \end{cases}$	McCabe and Wolock, 1998b
Minimum and maximum temperature	$S = \begin{cases} P & \text{for } T_{a-max} \leq T_{snow} \\ 1 - P \left[\frac{(T_{a-max} - T_{snow})}{(T_{a-max} - T_{a-min})} \right] & \text{for } T_{snow} < T_{a-max} < T_{rain} \\ 0 & \text{for } T_{a-max} \geq T_{rain} \end{cases}$	Leavesley, 1996
Sigmoidal curve	$S = P * a [\tanh(b(T_a - c)) - d]$ $F = a [\tanh(b(T_a - c)) - d]$	Dai, 2008

1486

1487

1488

1489
1490
1491

1492
1493
1494
1495
1496
1497
1498
1499
1500

Table 2. Common hydrological models and the precipitation phase prediction (PPM) technique employed. The citation referring to the original publication of the model is given.

Model	PPM technique	Citations
<u>Discrete Models (not coupled)</u>		
HBV	Static Threshold	Bergström, 1995
Snowmelt Runoff Model	Static Threshold	Martinec et al., 2008
SLURP	Static Threshold	Kite, 1995
UBC Watershed Model	Linear Transition	Pipes and Quick, 1977
PRMS model	Minimum & Maximum Temperature	Leavesley et al., 1996
USGS water budget	Linear transition between two mean temps	McCabe and Wolock, 1999a
SAC-SMA (SNOW-17)	Static Threshold	Anderson, 2006
DHSVM	Linear transition (double check)	Wigmosta et al., 1994
SWAT	Threshold Model	Arnold et al., 2012
RHESSys	Linear transition or input phase	Tague and Band, 2004
HSPF	Air and dew point temperature thresholds	Bicknell et al., 1997
THE ARNO MODEL	Static Threshold	Todini, 1996
HEC-1	Static Threshold	HEC-1, 1998
MIKE SHE	Static Threshold	MIKE-SHE User Manual
SWAP	Static Threshold	Gusev and Nasonova, 1998
BATS	Static Threshold	Yang et al., 1997
Utah Energy Balance	Linear Transition	Tarboton and Luce, 1996
SNOBAL/ISNOBAL	Linear Transition*	Marks et al., 2013
CRHM	Static Threshold	Fang et al., 2013
GEOTOP	Linear Transition	Zanotti et al. 2004
SNTHERM	Linear Transition	SNTHERM Online Documentation
<u>Offline LS models</u>		
Noah	Static Threshold	Mitchell et al., 2005
VIC	Static Threshold	VIC Documentation
CLASS	Multiple Methods*	Verseghy, 2009

* by default. Temperature-phase-density relationship explicitly specified by user.
+ A flag is specified which switches between, static threshold, linear transition.

1501

1502 | Table 3: Remote sensing technologies useful to precipitation phase discrimination organized into
 1503 ground-based, spaceborne with passive microwave, and passive with active microwave. The
 1504 table describes the variables of interest, their temporal and spatial coverage, and associated
 1505 references.

Adrian Harpold 12/6/16 6:18 AM
 Deleted: 2

Technology	Variables	Spatial resolution; coverage	Temporal resolution, period of record	References
Ground-based systems				
Vertically pointing, single polarized 915- MHz Doppler wind profilers	Reflectivity, brightband height, Doppler vertical velocity	100 m vertical resolution; deployed locally in Sierra Nevada basins	Hourly, Winters 1998, 2001 - 2005	White et al., 2002; Lundquist et al., 2008
NEXRAD Dual polarized radar	Reflectivity ¹ , hydrometeor classification ¹ , melting layer ¹ , hybrid hydrometeor classification ¹	0.5° azimuthal by 250 m; range 460 km; Nationwide ²	5 - 10 minutes; 2011 ³ - present	Giangrande et al., 2008; Park et al., 2009; Elmore, 2011; Grazioli et al., 2015
Spaceborne systems: Passive microwave				
NOAA-15, NOAA-16, NOAA-17 Advanced Microwave Sounding Unit-A, B	Brightness temperature	48 km (AMSU-A), 16 km (AMSU-B); global coverage, with 22000 km swath	For two platforms, 6 hours revisit time; three platforms, 4 hours revisit time ⁴ ; 1998 - present	Kongoli et al., 2003
SUOMI-NPP Advanced Technology Microwave Sounder	Brightness temperature	15 - 50 km; global coverage, with 2200 km swath	Daily; 2011 - present	Kongoli et al., 2015
GPM Core Observatory Microwave Imager	Brightness temperature	4.4 km by 7.3 km; global coverage, 904 km swath	2014 to present	Skofronick-Jackson et al., 2015
Spaceborne systems: Active microwave				
Cloud Profiling Radar (CPR)	Radar reflectivity, 2C-SNOW-PROFILE	1.4 by 1.7 km; swath 1.4 km	16 days; 2006 to present	Wood et al., 2013; Cao et al., 2014; Kulie et al., 2016;
GPM Core Observatory Dual- frequency Precipitation Radar	Radar reflectivity	5 km; global coverage, 120 - 245 km swath	2 - 4 hours; 2014 to present	Skofronick-Jackson et al., 2015

1506 Notes:

1507 1. Operational products available from NOAA (2016). The operational products are not ground validated, except
 1508 where analyzed for specific studies.

1509 2. The dates given here represent the first deployments. Data temporal coverage will vary by station.

1510 3. Gaps in coverage exist, particularly in Western States.

1512 4. Similar instruments mounted on the NASA Aqua satellite and the European EUMETSAT MetOp series. Taking
1513 into account the similar instrumentation on multiple platforms increases the temporal spatial resolution