



1 GOVERNING EQUATIONS OF TRANSIENT SOIL WATER FLOW AND SOIL WATER
2 FLUX IN MULTI-DIMENSIONAL FRACTIONAL ANISOTROPIC MEDIA AND
3 FRACTIONAL TIME

4

5 M.L. Kavvas, A. Ercan, J. Polsinelli

6 Hydrologic Research Laboratory, Department of Civil & Envr. Engineering, University of

7 California, Davis, CA 95616, USA

8

9 ABSTRACT

10

11

12 In this study dimensionally-consistent governing equations of continuity and motion for
13 transient soil water flow and soil water flux in fractional time and in fractional multiple space
14 dimensions in anisotropic media are developed. Due to the anisotropy in the hydraulic
15 conductivities of natural soils, the soil medium within which the soil water flow occurs is
16 essentially anisotropic. Accordingly, in this study the fractional dimensions in two horizontal and
17 one vertical directions are considered to be different, resulting in multi-fractional multi-
18 dimensional soil space within which the flow takes place. Toward the development of the
19 fractional governing equations, first a dimensionally-consistent continuity equation for soil water
20 flow in multi-dimensional fractional soil space and fractional time is developed. It is shown that
21 the fractional soil water flow continuity equation approaches the conventional integer form of the
22 continuity equation as the fractional derivative powers approach integer values. For the motion
23 equation of soil water flow, or the equation of water flux within the soil matrix in multi-
24 dimensional fractional soil space and fractional time, a dimensionally consistent equation is also
25 developed. Again, it is shown that this fractional water flux equation approaches the
26 conventional Darcy's equation as the fractional derivative powers approach integer values. From
27 the combination of the fractional continuity and motion equations, the governing equation of
28 transient soil water flow in multi-dimensional fractional soil space and fractional time is
obtained. It is shown that this equation approaches the conventional Richards equation as the



29 fractional derivative powers approach integer values. Then by the introduction of the Brooks-
30 Corey constitutive relationships for soil water into the fractional transient soil water flow
31 equation, an explicit form of the equation is obtained in multi-dimensional fractional soil space
32 and fractional time. The governing fractional equation is then specialized to the case of only
33 vertical soil water flow and of only horizontal soil water flow in fractional time-space. It is
34 shown that the developed governing equations, in their fractional time but integer space forms,
35 show behavior consistent with the previous experimental observations concerning the diffusive
36 behavior of soil water flow.

37

38 INTRODUCTION

39

40 Various laboratory (Silliman and Simpson, 1987; Levy and Berkowitz, 2003) and field
41 studies (Peaudecerf and Sauty, 1978; Sudicky et al., 1983; Sidle et al., 1998) of transport in
42 subsurface porous media have shown significant deviations from Fickian behavior. As one
43 approach to the modeling of the generally non-Fickian behavior of transport, Meerschaert,
44 Benson, Baumer, Schumer, Zhang and their co-workers (Meerschaert et al. 1999, 2002, 2006;
45 Benson et al. 2000a,b; Baumer et al. 2005, 2007; Schumer et al. 2001, 2009; Zhang et al. 2007,
46 2008 and 2009) have introduced the fractional advection-dispersion equation (fADE) as a model
47 for transport in heterogeneous subsurface media. By theoretical and numerical studies the above
48 authors have shown that fADE has a nonlocal structure that can model well the heavy tailed non-
49 Fickian dispersion in subsurface media, mainly by means of a fractional spatial derivative in the
50 dispersion term of the equation. Meanwhile, they have also shown that fADE, with a fractional
51 time derivative, can also model well the long particle waiting times in transport in both surface
52 and subsurface environments. However, while the above-mentioned studies provided extensive
53 treatment of the fractional differential equation modeling of transport in fractional time-space by



54 subsurface flows, few studies have addressed the detailed modeling of the actual subsurface
55 flows in porous media in fractional time-space.

56 He (1998) seems to be the first scholar who proposed a fractional form of Darcy's equation
57 for water flux in porous media. Based on this fractional water flux equation, in his pioneering
58 work He (1998) then proposed a fractional governing equation of flow through saturated porous
59 media. The left-hand-side (LHS) and the right-hand-side (RHS) of He's fractional Darcy flux
60 formulation have different units. As saturated flow equations, He's proposed governing equations
61 address the groundwater flow instead of the unsaturated soil water flow. Since the focus of our
62 study is soil water flow in fractional time-space, below we shall discuss the literature that
63 specifically addresses the fractional soil water flow equations.

64 As early as in 1960's Gardner and his co-workers (Ferguson and Gardner, 1963; Rawlins and
65 Gardner, 1963) questioned the classical diffusivity expression in the diffusion form of the
66 conventional Richards equation for soil water flow being only dependent on the soil water
67 content. Based on their experimental observations, they reported that diffusivity was also
68 dependent explicitly on time besides being dependent on the soil water content. Following on
69 these experimental observations, Guerrini and Swartzendruber (1992) hypothesized a new form
70 for Richards equation for horizontal unsaturated soil water flow in semi-rigid soils. Unlike the
71 assumption that the soil hydraulic conductivity K and soil water pressure head ψ are only
72 dependent on the soil water content, they hypothesized that K and ψ are also dependent
73 explicitly on time. This hypothesis led them to the formulation of the diffusivity coefficient D
74 within the diffusion form of the Richards equation as function of not only the soil water content
75 but also explicitly on time, that is $D = D(\theta, t) = E(\theta) t^m$ where E is a function of water content θ
76 while m is a power value. The application of their theory to the field data of Rawlins and



77 Gardner (1963) proved successful, yielding fractional values of m less than unity in t^m . In a field
78 experimental study of horizontal water absorption into porous construction materials (fired-clay
79 and siliceous brick), El-Abd and Milczarek (2004) arrived at a formulation of diffusivity
80 coefficient again in the form $D(\theta,t) = E(\theta) t^m$. The application of this form to their experimental
81 data produced satisfactory results.

82 The study by Pachepsky et al. (2003) appears to be the first to propose a fractional model of
83 horizontal, unsaturated soil water flow in field soils. Motivated by the observations of Nielsen et
84 al. (1962) on the jerky movements of the infiltration front in field soils, that can be explained by
85 long recurrence time intervals in-between motions, Pachepsky et al. (2003) proposed a time-
86 fractional model of horizontal soil water flow in field soils. While the space component of their
87 model has integer derivatives, they proposed a fractional form for the diffusivity, and expressed
88 the Darcy water flux formulation in diffusive form with their proposed fractional diffusivity.
89 Pachepsky et al. (2003) showed that the cause for fractional diffusivity is the scaling of time in
90 the Boltzmann relationship not with the power of 0.5 (which corresponds to Brownian motion)
91 but with a power less than 0.5, an experimental observation that was already made by Guerrini
92 and Swartzendruber (1992). Pachepsky et al. (2003) supported their claim by various previous
93 experimental studies' results, and showed that their proposed time-fractional form of the
94 Richards equation with fractional diffusivity can explain experimental data. Meanwhile,
95 Gerolymatou et al. (2006) proposed a fractional integral form for the Richards equation in fractional
96 time but in integer horizontal space for unsaturated soil water flow in one horizontal dimension.
97 Comparing their model simulations against the field experimental data of El-Abd and Milczarek
98 (2004), they showed that their fractional Richards equation describes the evolution of soil water
99 content in time and space better than the corresponding integer Richards equation. Again



100 considering horizontal unsaturated soil water flow in fractional time but integer space, Sun et al.
101 (2013) utilized the concept of fractal ruler in time, due to Cushman et al. (2009), to define a
102 fractional derivative in time which they used to modify the integer time derivative in the
103 conventional Richards equation. By means of this fractional derivative definition they were able
104 to model the anomalous Boltzmann scaling in the wetting front movement and were able to
105 obtain good fits to water content experimental data. Sun et al. (2013) conjectured that the time-
106 dependent diffusivity $D(\theta, t) = E(\theta) t^m$ (for a fractional value of m) due to Guerrini and
107 Swartzendruber (1992) and El Abd and Milczarek (2004), in the conventional Richards equation
108 can be expressed essentially by representing the conventional integer derivative of the soil water
109 content with respect to time by a product of the fractional time derivative of the soil water
110 content and a fractional power of time.

111 The above-cited studies on the governing equations of soil water flow only treat time with
112 fractional dimension, while keeping space with integer dimension. Furthermore, these studies
113 address only one spatial dimension. Accordingly, our study in the following will attempt to
114 develop a fractional continuity equation and a fractional water flux (motion) equation for
115 unsaturated soil water flow in both fractional time and in multi-dimensional fractional space,
116 starting from the conventional mass conservation and Darcy's law. Due to the anisotropy in the
117 hydraulic conductivities of natural soils, the soil medium within which the soil water flow occurs
118 is essentially anisotropic. Accordingly, in this study the fractional dimensions in two horizontal
119 and one vertical directions will be considered different, resulting in multi-fractional space within
120 which the flow takes place. Toward the development of the fractional governing equations, first a
121 dimensionally-consistent continuity equation for soil water flow in multi-fractional, multi-
122 dimensional space and fractional time will be developed. For the motion equation of soil water



123 flow, or the equation of water flux within the soil matrix in multi-fractional multi-dimensional
 124 space and fractional time, a dimensionally consistent equation will also be developed. From the
 125 combination of the fractional continuity and motion equations, the governing equation of
 126 transient soil water flow in multi-fractional, multi-dimensional space and fractional time will be
 127 obtained. It will be shown that this equation approaches the conventional Richards equation as
 128 the fractional derivative powers approach integer values. Then by the introduction of the Brooks-
 129 Corey constitutive relationships for soil water (Brooks and Corey, 1964) into the fractional
 130 transient soil water flow equation, an explicit form of the equation will be obtained in multi-
 131 dimensional, multi-fractional space and fractional time. The governing fractional equation is then
 132 specialized to the case of only vertical soil water flow and of only horizontal soil water flow in
 133 fractional time-space.

134

135 DERIVATION OF THE CONTINUITY EQUATION FOR TRANSIENT SOIL WATER
 136 FLOW IN MULTI-DIMENSIONAL FRACTIONAL SPACE AND FRACTIONAL TIME
 137

138 The fractional Taylor series approximation of a function $f(x)$ around x may be defined
 139 according to the generalized Taylor series formula (Odibat and Shawagfeh, 2007; Momani and
 140 Odibat, 2008) as:

$$141 \quad f(x + \Delta x) \cong \sum_{k=0}^n \frac{(x+\Delta x-x)^{k\beta}}{\Gamma(k\beta+1)} D_0^{k\beta} f(x), \quad 0 < \beta \leq 1 \quad (1)$$

142 where $\Gamma(\cdot)$ is the gamma function, and $D_x^{k\beta} f(y)$, is a left-sided Caputo fractional derivative of
 143 the function $f(y)$, defined as (Odibat and Shawagfeh, 2007; Podlubny, 1999),

$$144 \quad D_x^{k\beta} f(y) = \frac{1}{\Gamma(m-k\beta)} \int_x^y \frac{f^m(\xi)}{(y-\xi)^{k\beta+1-m}} d\xi, \quad m-1 < \beta < m, \quad m \in \mathbb{N}, \quad y \geq x \quad (2)$$



145 Specializing the integer $m = 1$ reduces equation (2) to

$$146 \quad D_x^{k\beta} f(y) = \frac{1}{\Gamma(1-k\beta)} \int_x^y \frac{f(\xi)}{(y-\xi)^{k\beta}} d\xi, \quad 0 < \beta < 1, \quad y \geq x \quad . \quad (3)$$

147 Then to β -order

$$148 \quad D_x^\beta f(y) = \frac{1}{\Gamma(1-\beta)} \int_x^y \frac{f(\xi)}{(y-\xi)^\beta} d\xi \quad 0 < \beta < 1, \quad y \geq x \quad . \quad (4)$$

149 Specializing the fractional Taylor series expansion to β -order ($k = 0, 1$ in equation (1)), one

150 obtains from the generalized Taylor series formula:

$$151 \quad f(x + \Delta x) = f(x) + \frac{(\Delta x)^\beta}{\Gamma(\beta+1)} D_0^\beta f(x), \quad 0 < \beta \leq 1 \quad (5)$$

152 to β -order.

153 Within the above framework one can express the net mass outflow rate from the control

154 volume in Figure 1 as

$$155 \quad [\rho q_{x_1}(x_1 + \Delta x_1, x_2, x_3; t) - \rho q_{x_1}(x_1, x_2, x_3; t)] \Delta x_2 \Delta x_3 + [\rho q_{x_2}(x_1, x_2 + \Delta x_2, x_3; t) -$$

$$156 \quad \rho q_{x_2}(x_1, x_2, x_3; t)] \Delta x_1 \Delta x_3 + [\rho q_{x_3}(x_1, x_2, x_3 + \Delta x_3; t) - \rho q_{x_3}(x_1, x_2, x_3; t)] \Delta x_1 \Delta x_2 \quad (6)$$

157 Then by introducing equation (5) into equation (6), and expressing the Caputo derivative

158 $D_0^\beta f(x)$ by $\frac{\partial^\beta f(x)}{(\partial x)^\beta}$ for convenience, the net mass flux from the soil control volume in Figure 1

159 may be expressed to β -order in fractional space as,

$$160 \quad = \frac{(\Delta x_1)^{\beta_1}}{\Gamma(\beta_1+1)} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} \left(\rho q_{x_1}(x_1, x_2, x_3; t) \right) \Delta x_2 \Delta x_3 + \frac{(\Delta x_2)^{\beta_2}}{\Gamma(\beta_2+1)} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} \left(\rho q_{x_2}(x_1, x_2, x_3; t) \right) \Delta x_1 \Delta x_3$$



$$161 \quad + \frac{(\Delta x_3)^{\beta_3}}{\Gamma(\beta_3+1)} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(\rho q_{x_3}(x_1, x_2, x_3; t) \right) \Delta x_1 \Delta x_2 \quad (7)$$

162 where different fractional powers are considered in the three Cartesian directions in space due to
 163 the general anisotropy in the soil permeabilities and in the resulting flows in the soil media. It

164 also follows from equation (5) with $f(x_i) = x_i$ that to β -order,

$$165 \quad \Delta x_i = \frac{(\Delta x_i)^{\beta_i}}{\Gamma(\beta_i+1)} \frac{\partial^{\beta_i} x_i}{(\partial x_i)^{\beta_i}} \quad i=1,2,3 \quad (8)$$

167 With respect to the Caputo derivative;
 168

$$169 \quad \frac{\partial^{\beta_i} x_i}{(\partial x_i)^{\beta_i}} = \frac{x_i^{1-\beta_i}}{\Gamma(2-\beta_i)} \quad , \quad i=1,2,3 \quad (9)$$

170 Hence, combining equations (8) and (9) yields,
 171

$$172 \quad (\Delta x_i)^{\beta_i} = \frac{\Gamma(\beta_i+1)\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} (\Delta x_i), \quad i=1,2,3 \quad (10)$$

174 with respect to β_i -order fractional space in the i -th direction, $i=1,2,3$.

175 Introducing equation (10) into equation (7) yields for the net mass outflow rate

$$176 \quad = \frac{\Gamma(2-\beta_1)}{x_1^{1-\beta_1}} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} \left(\rho q_{x_1}(\bar{x}; t) \right) \Delta x_1 \Delta x_2 \Delta x_3 + \frac{\Gamma(2-\beta_2)}{x_2^{1-\beta_2}} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} \left(\rho q_{x_2}(\bar{x}; t) \right) \Delta x_1 \Delta x_2 \Delta x_3$$

$$177 \quad + \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(\rho q_{x_3}(\bar{x}; t) \right) \Delta x_1 \Delta x_2 \Delta x_3 \quad , \quad \bar{x} = (x_1, x_2, x_3) \quad (11)$$

180 to β -order, reflecting multi-fractional scaling in the anisotropic soil medium.

181 Denoting the volumetric water content by $\theta(\bar{x}, t)$, the water volume V_w within the control

183 volume in Figure 1 may be expressed as

$$184 \quad V_w = \theta \Delta x_1 \Delta x_2 \Delta x_3 \quad . \quad (12)$$

185 Hence, the time rate of change of mass within the control volume in Figure 1 is



$$186 \quad \lim_{\Delta t \rightarrow 0} \frac{\rho(\bar{x}, t + \Delta t) \theta(\bar{x}, t + \Delta t) - \rho(\bar{x}, t) \theta(\bar{x}, t)}{\Delta t} \Delta x_1 \Delta x_2 \Delta x_3 \quad . \quad (13)$$

187 Introducing equation (5) with x replaced by t, into equation (13) yields the time rate of change of
 188 mass within the control volume with respect α -fractional time increments:

$$189 \quad \lim_{\Delta t \rightarrow 0} \frac{(\Delta t)^\alpha}{\Delta t \Gamma(\alpha+1)} \left(\frac{\partial}{\partial t} \right)^\alpha \rho(\bar{x}, t) \theta(\bar{x}, t) \quad . \quad (14)$$

190 to α -order. With respect to the Caputo derivative:

$$191 \quad \frac{\partial^\alpha t}{(\partial t)^\alpha} = \frac{t^{1-\alpha}}{\Gamma(2-\alpha)} \quad (15)$$

192 which when combined with equation (5) (with x replaced by t) yields

$$193 \quad (\Delta t)^\alpha = \frac{\Gamma(\alpha+1) \Gamma(2-\alpha)}{t^{1-\alpha}} (\Delta t) \quad . \quad (16)$$

194 to α -order. Introducing equation (16) into equation (14) yields for the time rate of change of
 195 mass within the control volume in Figure 1 with respect to α -order fractional time increments:

$$196 \quad \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) \theta(\bar{x}, t)}{(\partial t)^\alpha} \Delta x_1 \Delta x_2 \Delta x_3 \quad . \quad (17)$$

197 Since the time rate of change of mass within the control volume of Figure 1 is inversely
 198 related to the net flux through the control volume, equations (11) and (17) can be combined to
 199 yield

$$200 \quad \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) \theta(\bar{x}, t)}{(\partial t)^\alpha} = - \left[\frac{\Gamma(2-\beta_1)}{x_1^{1-\beta_1}} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\rho q_{x_1}(\bar{x}; t)) + \frac{\Gamma(2-\beta_2)}{x_2^{1-\beta_2}} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\rho q_{x_2}(\bar{x}; t)) + \right.$$

$$201 \quad \left. \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\rho q_{x_3}(\bar{x}; t)) \right] \quad ,$$

$$202 \quad \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) \theta(\bar{x}, t)}{(\partial t)^\alpha} = - \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (\rho(\bar{x}; t) q_{x_i}(\bar{x}; t)) \quad (18)$$

203 as the fractional continuity equation of transient soil water flow in multi-fractional space of a
 204 generally anisotropic soil medium in fractional time.



205 If one further assumes an incompressible soil medium with constant density, then the

206 fractional soil water flow continuity equation (18) simplifies further to

$$207 \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = - \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (q_{x_i}(\bar{x}; t)), \quad 0 < \alpha, \beta_1, \beta_2, \beta_3 < 1; \bar{x} = (x_1, x_2, x_3). \quad (19)$$

208 In the following, Equation (19) will be used as the fractional continuity equation for soil water

209 flow for further study.

210 Performing a dimensional analysis of Equation (19), one obtains

$$211 \frac{1}{T^{1-\alpha}} \cdot \frac{1}{T^\alpha} = \frac{1}{L^{1-\beta_i}} \frac{1}{L^{\beta_i}} \frac{L}{T} = \frac{1}{T} \quad (20)$$

212 where L denotes length and T denotes time. Hence, Equation (20) shows the dimensional

213 consistency of the left hand and right hand sides of the continuity Equation (19) for transient soil

214 water flow in multi-fractional space and fractional time.

215 Podlubny (1999) has shown that for $n-1 < \alpha, \beta_i < n$ where n is any positive integer, as

216 α and $\beta_i \rightarrow n$, the Caputo fractional derivative of a function $f(y)$ to order α or β_i ($i = 1, 2, 3$)

217 becomes the conventional n-th derivative of the function $f(y)$. Therefore, specializing Podlubny's

218 (1999) result to $n = 1$, for α and $\beta_i \rightarrow 1$ ($i = 1, 2, 3$), the continuity equation (19) reduces to

$$219 \frac{\partial \theta(\bar{x}, t)}{\partial t} = - \sum_{i=1}^3 \frac{\partial}{\partial x_i} (q_{x_i}(\bar{x}; t)) \quad (21)$$

220 which is the conventional continuity equation for soil water flow.

221

222

223 AN EQUATION FOR SOIL WATER FLUX (SPECIFIC DISCHARGE) IN FRACTIONAL

224 TIME-SPACE

225

226 The experiments of Darcy (1856) showed that the specific discharge q_i is directly

227 proportional to the change in hydraulic head, $\Delta h = h(x_i + \Delta x) - h(x_i)$, $i=1,2,3$, and is inversely

228 proportional to the spatial displacement in any direction i , $\Delta x_i = (x_i + \Delta x_i) - x_i$, $i= 1,2,3$ (Freeze

229 and Cherry, 1979). Hence, one can express the Darcy law in integer time-space as



$$230 \quad q_{x_i} \Delta x_i = -K_i \Delta h_i \quad , \quad i = 1, 2, 3 . \quad (22)$$

231 where $K_i = K_i(\bar{x})$ denotes the hydraulic conductivity in the i -th spatial direction ($i=1,2,3$), and the
 232 negative sign on the right-hand-side (RHS) of equation (22) is due to soil water flow being in the
 233 direction of decreasing hydraulic head.

234 In equation (22), using the fractional Taylor series expansion (5) to β_i -order ($i= 1,2,3$) yields:

$$235 \quad \Delta h_i = \frac{(\Delta x_i)^{\beta_i}}{\Gamma(\beta_i+1)} \frac{\partial^{\beta_i} h}{(\partial x_i)^{\beta_i}} \quad , \quad i = 1, 2, 3 \quad (23)$$

236 where the notation is the same as above. Combining equations (8), (10) and (23) with equation
 237 (22) yields,

$$238 \quad q_i \left[\frac{x_i^{1-\beta_i}}{\Gamma(2-\beta_i)} + \frac{o((\Delta x_i)^{\beta_i})}{(\Delta x_i)^{\beta_i}} \Gamma(\beta_i + 1) \right] = -K_i \left[\frac{\partial^{\beta_i} h}{(\partial x_i)^{\beta_i}} + \frac{o((\Delta x_i)^{\beta_i})}{(\Delta x_i)^{\beta_i}} \Gamma(\beta_i + 1) \right] \quad , \quad i=1,2,3 . \quad (24)$$

239

240

241 Taking the limit as Δx_i goes to zero ($i= 1,2,3$), one obtains from equation (24),

$$242 \quad q_i(\bar{x}, t) = -K_i(\bar{x}) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} h}{(\partial x_i)^{\beta_i}} \quad i = 1, 2, 3 \quad (25)$$

243 as the equation of water flux through anisotropic soil media in multi-fractional multi-dimensional
 244 space.

245 Performing a dimensional analysis on equation (25), one obtains:

246

$$247 \quad [q_i(\bar{x}, t)] = L/T \quad \text{and} \quad \left[K_i(\bar{x}) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} h}{(\partial x_i)^{\beta_i}} \right] = \frac{L}{T} \frac{L}{L^{1-\beta_i} L^{\beta_i}} = \frac{L}{T} \quad (26)$$

248

249 which establishes the dimensional consistency of equation (25) as the fractional equation for soil

250 water flux. Furthermore, it is well-known that for unsaturated soil water flow, the hydraulic

251 conductivity is function of the volumetric soil water content θ and of spatial location (Freeze and

252 Cherry, 1979). In fact, K_i may be expressed in terms of the saturated hydraulic conductivity K_s

253 and the relative hydraulic conductivity $K_r(\theta)$ as



$$254 \quad K_i(\bar{x}, \theta) = K_{s,i}(\bar{x})K_r(\theta) \quad . \quad (27)$$

255 Hence, the equation of soil water flux (specific discharge) in multi-dimensional, multi-fractional
 256 anisotropic soil space may be expressed as

$$257 \quad q_i(\bar{x}, t) = -K_i(\bar{x}, \theta) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} h(\bar{x}, t)}{(\partial x_i)^{\beta_i}} \quad , \quad i=1,2,3 \quad . \quad (28)$$

258

259 Equation (28) is dimensionally consistent in that both the LHS and RHS of the equation have the
 260 unit L/T.

261 As noted above, Podlubny (1999) has shown that for $n-1 < \beta_i < n$ ($i = 1, 2, 3$) where n is any

262 positive integer, as $\beta_i \rightarrow n$, the Caputo fractional derivative of a function $f(y)$ to order β_i ($i = 1, 2,$

263 3) becomes the conventional n -th derivative of the function $f(y)$. Therefore, specializing

264 Podlubny's (1999) result to $n = 1$, for $\beta_i \rightarrow 1$ ($i = 1, 2, 3$), the fractional soil water flux equation

265 (28) becomes

$$266 \quad q_i(\bar{x}, t) = -K_i(\bar{x}, \theta) \frac{\partial h(\bar{x}, t)}{\partial x_i} \quad , \quad i=1,2,3 \quad . \quad (29)$$

267 which is the conventional Darcy's equation for soil water flux. As such the derived fractional soil

268 water flux Equation (28) is consistent with the conventional Darcy's equation for the integer

269 power case.

270

271 GOVERNING EQUATION OF TRANSIENT SOIL WATER FLOW IN MULTI-

272 DIMENSIONAL FRACTIONAL SOIL SPACE AND FRACTIONAL TIME

273

274

275 Combining the fractional continuity equation (19) with the fractional soil water flux equation

276 (28) yields,

$$277 \quad \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_i(\bar{x}, \theta) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} h(\bar{x}, t)}{(\partial x_i)^{\beta_i}} \right) \quad \text{for } 0 < \alpha, \beta_1, \beta_2, \beta_3 < 1 ;$$

$$278 \quad \bar{x} = (x_1, x_2, x_3). \quad (30)$$



279 Since $K_i(\bar{x}, \theta) = K_{s,i}(\bar{x})K_r(\theta)$, one obtains

$$280 \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x})K_r(\theta) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} h(\bar{x}, t)}{(\partial x_i)^{\beta_i}} \right) \text{ for } 0 < \alpha, \beta_1, \beta_2, \beta_3 < 1;$$

$$281 \bar{x} = (x_1, x_2, x_3) \quad (31)$$

282 as the governing equation of transient soil water flow in anisotropic multi-dimensional fractional
 283 soil media and fractional time.

284 Meanwhile, the soil hydraulic head h is related to the elevation head x_3 and soil capillary
 285 pressure head ψ by

$$286 h = \psi(\theta) + x_3 \quad (32)$$

287 Substituting Equation (32) into Equation (31) results in

$$288 \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x})K_r(\theta) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} (\psi(\theta) + x_3)}{(\partial x_i)^{\beta_i}} \right) . \quad (33)$$

289

290 With respect to the Caputo derivative:

$$291 \frac{\partial^{\beta_3} x_3}{(\partial x_3)^{\beta_3}} = \frac{x_3^{1-\beta_3}}{\Gamma(2-\beta_3)} . \quad (34)$$

292 Opening equation (33) further and introducing equation (34) yields

$$293 \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x})K_r(\theta) \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} \psi(\theta)}{(\partial x_i)^{\beta_i}} \right) \\ 294 + \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(K_{s,3}(\bar{x})K_r(\theta) \right); 0 < \alpha, \beta_1, \beta_2, \beta_3 < 1; \bar{x} = (x_1, x_2, x_3) \quad (35)$$

295 as the governing equation of transient soil water flow in anisotropic multi-dimensional fractional
 296 media and fractional time. This governing equation may also be written as

$$297 \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{1}{\Gamma(2-\alpha)} \frac{\Gamma(2-\beta_i)^2}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x})K_r(\theta) \frac{t^{1-\alpha}}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} \psi(\theta)}{(\partial x_i)^{\beta_i}} \right) \\ 298 + \frac{1}{\Gamma(2-\alpha)} \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(t^{1-\alpha} K_{s,3}(\bar{x})K_r(\theta) \right); 0 < \alpha, \beta_1, \beta_2, \beta_3 < 1; \bar{x} = (x_1, x_2, x_3) . (36)$$



299 As noted above, Podlubny (1999) has shown that for $n-1 < \alpha, \beta_i < n$ ($i=1,2,3$) where n is any
300 positive integer, as α and $\beta_i \rightarrow n$, the Caputo fractional derivative of a function $f(y)$ to order α or
301 β_i ($i = 1, 2, 3$) becomes the conventional n -th derivative of the function $f(y)$. Therefore,
302 specializing Podlubny's (1999) result to $n = 1$, for α and $\beta_i \rightarrow 1$ ($i = 1, 2, 3$), the fractional
303 governing equation (33) of soil water flow becomes

$$304 \quad \frac{\partial \theta(\bar{x}, t)}{\partial t} = \sum_{i=1}^3 \frac{\partial}{\partial x_i} \left(K_{s,i}(\bar{x}) K_r(\theta) \frac{\partial}{\partial x_i} (\psi(\theta) + x_3) \right) \quad (37)$$

305 which is the conventional Richards equation for transient soil water flow.

306 With respect to dimensional consistency, one may note that both sides of the fractional
307 governing equation (33) or equation (35) for transient soil water flow have the unit $1/T$.
308 Meanwhile, both sides of equation (36) have the unit $1/T^\alpha$. Hence, these fractional equations are
309 dimensionally consistent.

310

311 FRACTIONAL GOVERNING EQUATION OF TRANSIENT SOIL WATER FLOW IN THE 312 VERTICAL DIRECTION 313

314 In the case of vertical transient unsaturated flow for the infiltration process in soils in
315 fractional time-space, Equation (35) reduces further to

$$316 \quad \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(K_{s,3}(\bar{x}) K_r(\theta) \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \frac{\partial^{\beta_3} \psi(\theta)}{(\partial x_3)^{\beta_3}} \right) +$$

$$317 \quad + \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(K_{s,3}(\bar{x}) K_r(\theta) \right) \quad ; 0 < \alpha, \beta_3 < 1 ; \bar{x} = (x_1, x_2, x_3) \quad (38)$$

318 as the governing equation. This governing equation for vertical transient soil water flow in
319 fractional time-space can also be expressed as;

$$320 \quad \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(K_{s,3}(\bar{x}) K_r(\theta) \frac{\Gamma(2-\beta_3)}{\Gamma(2-\alpha)} \frac{t^{1-\alpha}}{x_3^{1-\beta_3}} \frac{\partial^{\beta_3} \psi(\theta)}{(\partial x_3)^{\beta_3}} \right) +$$



$$321 \quad + \frac{1}{\Gamma(2-\alpha)} \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(t^{1-\alpha} K_{s,3}(\bar{x}) K_r(\theta) \right) ; 0 < \alpha, \beta_3 < 1 ; \bar{x} = (x_1, x_2, x_3). \quad (39)$$

322

323 As in the integer case of Richards equation (37), equations (35), (36), (38) and (39) have both
 324 the hydraulic conductivity K and the capillary pressure head ψ as functions of the soil
 325 volumetric water content θ . As such, characteristic soil water relationships, such as those given
 326 by Brooks and Corey (1964), may be utilized to obtain an explicit form of the governing
 327 equation of transient, unsaturated soil water flow in fractional time-space, as explained in the
 328 following.

329

330 SOIL WATER CONTENT-BASED EXPLICIT FORM OF THE GOVERNING EQUATION 331 OF TRANSIENT SOIL WATER FLOW IN FRACTIONAL TIME-SPACE

332 One can utilize the Brooks-Corey (1964) formula for the soil characteristic relationship
 333 between the capillary soil water pressure head ψ and the soil water content θ as follows:

$$334 \quad \psi(\theta) = \psi_b \theta_e^{1/\lambda} (\theta - \theta_r)^{-1/\lambda} \quad (40)$$

335 where ψ_b is the air entry pressure head (bubbling pressure), $\theta_e = (\theta_s - \theta_r)$ is the effective porosity,
 336 θ_s is the saturation volumetric soil water content, θ_r is the residual water content, and λ is the
 337 pore size distribution index. Therefore, the β_i -order Caputo fractional derivative of the capillary
 338 pressure head ψ with respect to x_i in the interval $(0, x_i)$ may be expressed in terms of the Brooks-
 339 Corey relationship (40) as (Podlubny, 1999; Odibat and Shawagfeh, 2007)

$$340 \quad \frac{\partial^{\beta_i} \psi(\theta)}{(\partial x_i)^{\beta_i}} = \frac{\psi_b \theta_e^{1/\lambda}}{\Gamma(1-\beta_i)} \int_0^{x_i} \left(\frac{\partial}{\partial \xi_i} (\theta - \theta_r)^{-1/\lambda} \right) (x_i - \xi_i)^{-\beta_i} d\xi_i = \psi_b \theta_e^{1/\lambda} \frac{\partial^{\beta_i} (\theta - \theta_r)^{-1/\lambda}}{(\partial x_i)^{\beta_i}}. \quad (41)$$

341 Under the Brooks-Corey (1964) relationship between the hydraulic conductivity and the
 342 volumetric soil water content, the relative hydraulic conductivity $K_r(\theta)$ is expressed as



343 $K_r(\theta) = \theta_e^{-3-2\lambda}(\theta - \theta_r)^{3+2\lambda}$, (42)

344 and using expression (42) within $K_i(\bar{x}, \theta) = K_{s,i}(\bar{x})K_r(\theta)$, the β_i -order fractional Caputo

345 derivative of $K_i(\bar{x}, \theta)$ with respect to x_i in the interval $(0, x_i)$ may be expressed as

346 $\frac{\partial^{\beta_i} K_{s,i}(\bar{x})K_r(\theta)}{(\partial x_i)^{\beta_i}} = \theta_e^{-3-2\lambda} \frac{\partial^{\beta_i} (K_{s,i}(\bar{x})(\theta - \theta_r)^{3+2\lambda})}{(\partial x_i)^{\beta_i}}$, $i = 1, 2, 3$. (43)

347 Substituting equations (41) and (43) into equation (35) results in an explicit form of the

348 governing equation of transient soil water flow in anisotropic multi-dimensional fractional soil

349 space and fractional time in terms of the volumetric water content θ as

350 $\frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{\Gamma(2-\beta_i)^2}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x}) \frac{(\theta - \theta_r)^{3+2\lambda}}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} (\theta - \theta_r)^{-1/\lambda}}{(\partial x_i)^{\beta_i}} \right)$
 351 $+ \theta_e^{-3-2\lambda} \frac{\Gamma(2-\beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (K_{s,3}(\bar{x})(\theta - \theta_r)^{3+2\lambda})$; $0 < \alpha, \beta_1, \beta_2, \beta_3 < 1$ (44)

352 in terms of the Brooks-Corey soil water characteristics relationships. This governing equation can

353 also be expressed as

354 $\frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{\Gamma(2-\beta_i)^2}{\Gamma(2-\alpha)x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} \left(K_{s,i}(\bar{x})(\theta - \theta_r)^{3+2\lambda} \frac{t^{1-\alpha}}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} (\theta - \theta_r)^{-1/\lambda}}{(\partial x_i)^{\beta_i}} \right)$
 355 $+ \theta_e^{-3-2\lambda} \frac{\Gamma(2-\beta_3)}{\Gamma(2-\alpha)x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (t^{1-\alpha} K_{s,3}(\bar{x})(\theta - \theta_r)^{3+2\lambda})$; $0 < \alpha, \beta_1, \beta_2, \beta_3 < 1$. (45)

356

357 Upon dimensional analysis of equation (44) one can see that it is dimensionally consistent since

358 both of its sides have the unit of $1/T$ where T denotes time. Meanwhile, equation (45) is also

359 dimensionally consistent with both sides of the equation having the unit $1/T^\alpha$.

360 Specializing equation (45) to only the vertical direction, the governing equation of

361 transient soil water flow in the vertical direction in fractional space-time may be expressed as,

362 $\frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{\Gamma(2-\beta_3)^2}{\Gamma(2-\alpha)x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} \left(K_{s,3}(\bar{x})(\theta - \theta_r)^{3+2\lambda} \frac{t^{1-\alpha}}{x_3^{1-\beta_3}} \frac{\partial^{\beta_3} (\theta - \theta_r)^{-1/\lambda}}{(\partial x_3)^{\beta_3}} \right) +$



$$363 \quad + \theta_e^{-3-2\lambda} \frac{\Gamma(2-\beta_3)}{\Gamma(2-\alpha)x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3}\right)^{\beta_3} (t^{1-\alpha} K_{s,3}(\bar{x})(\theta - \theta_r)^{3+2\lambda}) \quad ; 0 < \alpha, \beta_3 < 1 \quad . \quad (46)$$

364 Upon dimensional analysis of equation (46) one can find that both sides of this equation have
365 the unit of $1/T^\alpha$ where T denotes time. Hence, the fractional equation of vertical transient soil
366 water flow, in its explicit form, is dimensionally consistent.

367 Finally, specializing equation (45) to only the horizontal directions, the governing equation
368 of transient soil water flow in the horizontal directions in fractional space-time may be expressed
369 as,

$$370 \quad \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^2 \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{\Gamma(2-\beta_i)^2}{\Gamma(2-\alpha)x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i}\right)^{\beta_i} \left(K_{s,i}(\bar{x})(\theta - \theta_r)^{3+2\lambda} \frac{t^{1-\alpha}}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} (\theta - \theta_r)^{-1/\lambda}}{(\partial x_i)^{\beta_i}} \right)$$

$$371 \quad ; 0 < \alpha, \beta_1, \beta_2 < 1 \quad . \quad (47)$$

372 Upon dimensional analysis of equation (47) one can find that both sides of this equation have the
373 unit of $1/T^\alpha$ where T denotes time. Hence, the fractional equation of horizontal transient soil
374 water flow, in its explicit form, is dimensionally consistent.

375

376 DISCUSSION AND CONCLUSION

377 The governing equations that were developed in this study are for the fractional time
378 dimension and for multi-dimensional fractional space that represents the fractal spatial structure
379 of a soil field. If one were to simplify the developed theory above to only fractional time but
380 integer-space soil fields, then the developed equations would simplify substantially. The
381 governing equation (36) of transient soil water flow in anisotropic multi-dimensional fractional
382 soil media in fractional time would simplify to (with $\beta_i = 1, i = 1, 2, 3$):

$$383 \quad \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 \frac{1}{\Gamma(2-\alpha)} \frac{\partial}{\partial x_i} \left(K_{s,i}(\bar{x}) K_r(\theta) t^{1-\alpha} \frac{\partial \psi(\theta)}{\partial x_i} \right)$$



$$384 \quad + \frac{1}{\Gamma(2-\alpha)} \frac{\partial}{\partial x_3} \left(t^{1-\alpha} K_{s,3}(\bar{x}) K_r(\theta) \right) ; 0 < \alpha < 1; \bar{x} = (x_1, x_2, x_3) \quad (48)$$

385 for the governing equation of transient soil water flow in integer multi-dimensional soil media
386 and in fractional time. In terms of the Brooks-Corey soil characteristic relationships, the explicit
387 governing equation of transient soil water flow in integer multi-dimensional soil space and in
388 fractional time is obtained from the simplification of equation (45) as (with $\beta_i = 1, i = 1, 2, 3$):

$$389 \quad \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 -1/\lambda \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{1}{\Gamma(2-\alpha)} \frac{\partial}{\partial x_i} \left(t^{1-\alpha} K_{s,i}(\bar{x}) (\theta - \theta_r)^{2-1/\lambda+2\lambda} \frac{\partial \theta}{\partial x_i} \right) \\ 390 \quad + \theta_e^{-3-2\lambda} \frac{1}{\Gamma(2-\alpha)} \frac{\partial}{\partial x_3} \left(t^{1-\alpha} K_{s,3}(\bar{x}) (\theta - \theta_r)^{3+2\lambda} \right) ; 0 < \alpha < 1; \bar{x} = (x_1, x_2, x_3) . \quad (49)$$

391

392 As mentioned before, Guerrini and Swartzendruber (1992) and El Abd and Milczarek (2004),
393 in their explanation of the anomalous behavior of the diffusivity coefficient in their experiments,
394 have proposed that the diffusivity coefficient in the diffusion-based formulation of the Richards
395 equation of soil water flow must depend not only on the water content but also on time. Hence,
396 they formulated this diffusivity coefficient D as $D = D(\theta, t) = E(\theta) t^m$ where E is a function of
397 water content θ while m is a power value. This formulation proved to be successful in modeling
398 various experimental data on horizontal soil water flow. If one were to formulate the diffusivity
399 $D_i(\theta, t)$ in the explicit governing equation (49) of transient soil water flow in fractional time and
400 in anisotropic multi-dimensional integer soil space as

$$401 \quad D_i(\theta, t) = K_{s,i}(\bar{x}) (\theta - \theta_r)^{2-1/\lambda+2\lambda} t^{1-\alpha} \quad , \quad i = 1, 2, 3, \quad (50)$$

402 this diffusivity coefficient is in the same form as the diffusivity coefficient $D(\theta, t) = E(\theta) t^m$ that
403 was formulated by Guerrini and Swartzendruber (1992) and El Abd and Milczarek (2004) based
404 on experimental observations. As such, within the framework of Brooks-Corey soil water
405 relationships, the explicit governing equations that were developed in this study for the transient



406 soil water flow in multi-dimensional fractional soil media and fractional time, when simplified to
 407 integer soil space, are consistent with the experimental observations of Guerrini and
 408 Swartzendruber (1992) and El Abd and Milczarek (2004) when their power value $m = 1 - \alpha$.
 409 Sun et al. (2013) conjectured that the time-dependent diffusivity $D(\theta, t) = E(\theta) t^m$ (for a
 410 fractional value of m) due to Guerrini and Swartzendruber (1992) and El Abd and Milczarek
 411 (2004), in the conventional Richards equation can be expressed essentially by representing the
 412 conventional integer derivative of the soil water content with respect to time by a product of the
 413 fractional time derivative of the soil water content and a fractional power of time (Sun et al.
 414 2013, Eqn. (12)), that is, $\frac{\partial \theta(\bar{x}, t)}{\partial t} = \frac{C}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha}$ where C denotes a constant. In order to examine
 415 the conjecture of Sun et al. (2013), one can re-write the explicit governing equation (49) for soil
 416 water flow in integer space but fractional time in equivalent form as

$$417 \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \theta(\bar{x}, t)}{(\partial t)^\alpha} = \sum_{i=1}^3 -1/\lambda \psi_b \theta_e^{-3-2\lambda+1/\lambda} \frac{\partial}{\partial x_i} \left(K_{s,i}(\bar{x}) (\theta - \theta_r)^{2-1/\lambda+2\lambda} \frac{\partial \theta}{\partial x_i} \right)$$

$$418 + \theta_e^{-3-2\lambda} \frac{\partial}{\partial x_3} \left(K_{s,3}(\bar{x}) (\theta - \theta_r)^{3+2\lambda} \right); 0 < \alpha < 1; \bar{x} = (x_1, x_2, x_3) \quad (51)$$

419 Equation (51) shows that the fractional soil water flow equation (49) which accounts for the
 420 time-dependent diffusivity expression of Guerrini and Swartzendruber (1992) and El Abd and
 421 Milczarek (2004), does have an equivalent form where the integer time derivative of the soil
 422 water content in the conventional Richards equation is replaced by a product of the fractional
 423 time derivative of the soil water content and a fractional power of time, thereby supporting Sun
 424 et al.'s (2013) conjecture, although in this study the fractional derivative is defined in the Caputo
 425 sense while in Sun et al. (2013) the fractional derivative is defined with respect to a fractal ruler
 426 in time.



427 In conclusion, in this study first a dimensionally-consistent continuity equation for soil water
428 flow in multi-fractional, multi-dimensional space and fractional time was developed. For the
429 motion equation of soil water flow, or the equation of water flux within the soil matrix in multi-
430 fractional multi-dimensional space and fractional time, a dimensionally consistent equation was
431 also developed. From the combination of the fractional continuity and motion equations, the
432 governing equation of transient soil water flow in multi-fractional, multi-dimensional space and
433 fractional time was then obtained. It is shown that this equation approaches the conventional
434 Richards equation as the fractional derivative powers approach integer values. Then by the
435 introduction of the Brooks-Corey constitutive relationships for soil water (Brooks and Corey,
436 1964) into the fractional transient soil water flow equation, an explicit form of the equation was
437 obtained in multi-dimensional, multi-fractional space and fractional time. Finally, the governing
438 fractional equation was specialized to the cases of vertical soil water flow and horizontal soil
439 water flow in fractional time-space. It is shown that the developed governing equations, in their
440 fractional time but integer space forms, show behavior consistent with the previous experimental
441 observations concerning the diffusive behavior of soil water flow.

442

443 REFERENCES

444

445 Baumer, B., Benson, D. and Meerschaert, M.M.: Advection and dispersion in time and space,

446 Physica A, 350, pp. 245-262, 2005.

447 Baumer, B. and Meerschaert, M.M.: Fractional diffusion with two time scales, Physica A, 373,

448 pp. 237-251, 2007.

449 Benson, D.A., Wheatcraft, S.W., Meerschaert, M.M.: Application of a fractional advection-

450 dispersion equation, Water Resour. Res., 36(6), pp. 1403-1412, 2000a.




- 451 Benson, D.A., Wheatcraft, S.W., Meerschaert, M.M.: The fractional-order governing equation of
452 Levy motion, *Water Resour. Res.*, 36(6), pp. 1413-1423, 2000b.
- 453 Brooks, R.H., and Corey, A.T.: Hydraulic properties of porous media, *Hydrol. Pap. no. 3.*
454 Colorado State Univ., Fort Collins, CO, 1964.
- 455 Cushman, J.H., O'Malley D., Park, M.: Anomalous diffusion as modeled by a nonstationary
456 extension of Brownian motion, *Phys Rev E.*, 79:032101, 2009.
- 457 Darcy, H.: *Les Fontaines Publiques de la Ville de Dijon*, Dalmont, Paris, 1856.
- 458 El-Abd, A.E.-G., and Milczarek, JJ.: Neutron radiography study of water absorption in porous building
459 materials: anomalous diffusion analysis, *J Phys D: Appl Phys.*, 37:2305-13, 2004.
- 460 Ferguson, H., and Gardner, W.H.: Diffusion theory applied to water flow data obtained using
461 gamma ray absorption, *Soil Sci. Soc. Amer. Proc.* 27: 243-246, 1963.
- 462 Freeze, R.A., and Cherry, J.A.: *Groundwater*, Prentice-Hall, N.J, 1979.
- 463 Gerolymatou, E., Vardoulakis, I., and Hilfer, R.: Modelling infiltration by means of a nonlinear
464 fractional diffusion model, *J. Phys. D: Appl. Phys.* **39**. 4104–4110, 2006.
- 465 Guerrini, I.A., and Swartzendruber, D.: Soil water diffusivity as explicitly dependent on both
466 time and water content, *Soil Sci Soc Am J.*; 56:335-40, 1992.
- 467 He, J-H.: Approximate analytical solution for seepage flow with fractional derivatives in porous
468 media, *Comput. Methods Appl. Mech. Engrg.* 167: 57-68, 1998.
- 469 Levy, M., and Berkowitz, B.: Measurement and analysis of non-Fickian dispersion in
470 heterogeneous porous media, *J. Contam. Hydrol.*, 64, pp. 203-226, 2003.
- 471 Meerschaert, M.M., Benson, D.A., Baumer, B.: Multidimensional advection and fractional
472 dispersion, *Phys. Rev. E*, 59(5), pp.5026-5028, 1999.



- 473 Meerschaert, M.M., Benson, D.A., Scheffler, H.P., and Baumer, B.: Stochastic solution of
474 space-time fractional diffusion equations, *Phys. Rev. E*, 65, pp.041103-1 – 04113-4,
475 2002.
- 476 Meerschaert, M.M., Mortensen, J., and Wheatcraft, S.W.: Fractional vector calculus for
477 fractional advection-dispersion, *Physica A*, 367, pp.167-181, 2006.
- 478 Momani, S. and Odibat, Z.: A novel method for nonlinear fractional partial differential
479 equations: Combination of DTM and generalized Taylor's formula, *J. of Computational
480 and Applied Mathematics*, 220, pp.85-95, 2008.
- 481 Nielsen, D.R., Biggar, J.W., Davidson, J.M.: Experimental consideration of diffusion analysis in
482 unsaturated flow problem, *Soil Sci. Soc. Am. Proc.* 26, 107-111, 1962.
- 483 Odibat, Z.M., and Shawagfeh, N.T.: Generalized Taylor formula, *Appl. Math. Comput.*, 186(1),
484 286–293, 2007.
- 485 Pachepsky, Y., Timlin, D., Rawls, W.: Generalized Richards' equation to simulate water
486 transport in unsaturated soils, *Journal of Hydrology* 272, 3-13, 2003.
- 487 Peaudecerf, G., and Sauty, J-P.: Application of a mathematical model to the characterization of
488 dispersion effects on groundwater quality, *Prog. Water Tech.*, 10, pp. 443-454, 1978.
- 489 Podlubny, I.: *Fractional Differential Equations*, Academic Press, San Diego, 340pp, 1999.
- 490 Rawlins, S.L., and Gardner, W.H.: A test of the validity of the diffusion equation for unsaturated
491 flow of soil water, *Soil Sci. Soc. Amer. Proc.* 27: 507-511, 1963.
- 492 Schumer, R., Benson, D.A., Meerschaert, M.M., and Wheatcraft, S.W.: Eulerian derivation for
493 the fractional advection-dispersion equation, *J. Contam. Hydrol*, 48, pp.69-88, 2001.



- 494 Schumer, R., Meerschaert, M.M., and Baumer, B.: Fractional advection-dispersion equations for
495 modeling transport at the earth surface, *J. Geophys. Res.*, 114, F00A07,
496 doi:10.1029/2008JF001246, 2009.
- 497 Sidle, C., Nilson, B., Hansen, M., and Fredericia, J.: Spatially varying hydraulic and solute
498 transport characteristics of a fractured till determined by field tracer tests, Funen,
499 Denmark, *Water Resour. Res.*, 34(10), pp.2515-2527, 1998.
- 500 Silliman, S.E., and Simpson, E.S.: Laboratory evidence of the scale effect in dispersion of
501 solutes in porous media, *Water Resour. Res.*, 23(8), pp. 1667-1673, 1987.
- 502 Sudicky, E.A., Cherry, J.A., Frind, E.O. Migration of contaminants in groundwater at a landfill:
503 a case study. 4. A natural-gradient dispersion test, *J. Hydrol.* 63, pp. 81-108, 1983 .
- 504 Sun, H., Meerschaert, M., Zhang, Y., Zhu, J., Chen, W.: A fractal Richards' equation to capture
505 the non-Boltzmann scaling of water transport in unsaturated media, *Adv. Water Resour.*
506 52: 292-295, 2013.
- 507 Zhang, Y., Benson, D.A., Meerschaert, M.M. and Labolle, E.M.: Space-fractional advection-
508 dispersion equations with variable parameters: diverse formulas, numerical solutions, and
509 application to the macrodispersion experiment site data, *Water Resour. Res.*, 43:W05439.
510 2007.
- 511 Zhang, Y., and Benson, D.A.: Lagrangian simulation of multidimensional anomalous transport at
512 the MADE site, *Geophys. Res. Lett.*, 35:L07403, 2008.
- 513 Zhang, Y., Benson, D.A., and Reeves, D.M.: Time and space nonlocalities underlying fractional-
514 derivative models: distinction and literature review of field applications, *Adv. Water*
515 *Resour.*, 32, pp. 561-581, 2009.
- 516
517

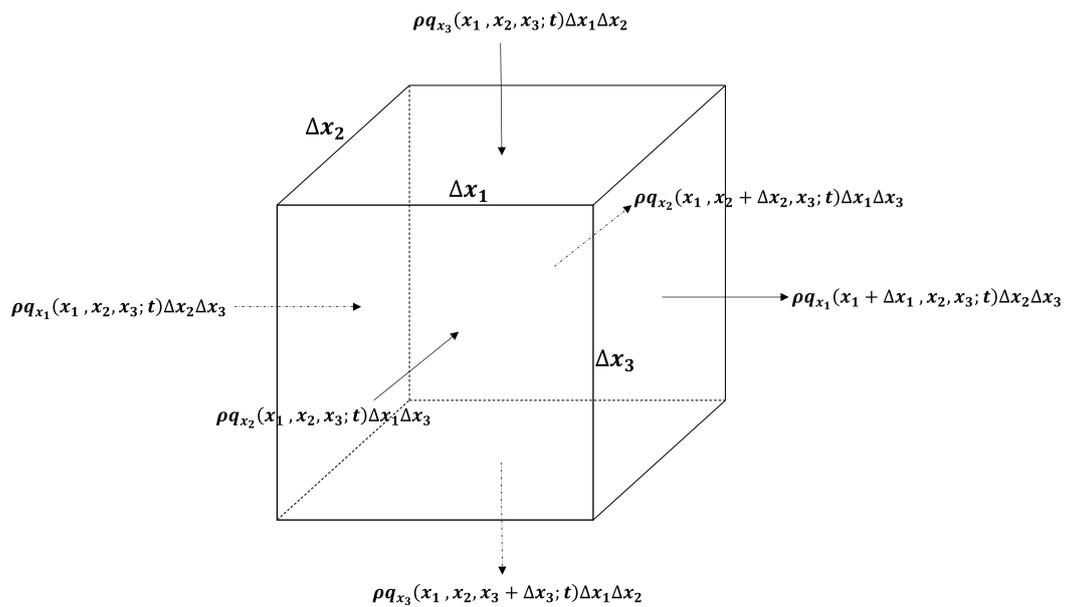

518
 519
 520

Figure 1. The control volume for the three-dimensional soil water flow