

Delineating wetland catchments and modeling hydrologic connectivity using LiDAR data and aerial imagery

Qiusheng Wu¹, Charles R. Lane²

¹Department of Geography, Binghamton University, State University of New York, Binghamton, NY 13902, USA

²U.S. Environmental Protection Agency, Office of Research and Development, National Exposure Research Laboratory, 26 W. Martin Luther King Dr., Cincinnati, OH 45268, USA

Correspondence to: Qiusheng Wu (wqs@binghamton.edu)

Abstract: In traditional watershed delineation and topographic modeling, surface depressions are generally treated as spurious features and simply removed from a digital elevation model (DEM) to enforce flow continuity of water across the topographic surface to the watershed outlets. In reality, however, many depressions in the DEM are actual wetland landscape features with seasonal to permanent inundation patterning characterized by nested hierarchical structures and dynamic filling-spilling-merging surface-water hydrological processes. Differentiating and appropriately processing such ecohydrologically meaningful features remains a major technical terrain-processing challenge, particularly as high-resolution spatial data are increasingly used to support modeling and geographic analysis needs. The objectives of this study were to delineate hierarchical wetland catchments and model their hydrologic connectivity using high-resolution LiDAR data and aerial imagery. The graph theory-based contour tree method was used to delineate the hierarchical wetland catchments and characterize their geometric and topological properties. Potential hydrologic connectivity between wetlands and streams were simulated using the least-cost path algorithm. The resulting flow network delineated potential flow paths connecting wetland depressions to each other or to the river network at scales finer than available through the National Hydrography Dataset. The results demonstrated that our proposed framework is promising for improving overland flow simulation and hydrologic connectivity analysis.

Keywords: flow path, geographically isolated wetlands, hydrologic connectivity, LiDAR, prairie pothole, wetland depressions

1 Introduction

The Prairie Pothole Region (PPR) of North America extends from the north-central United States (U.S.) to south-central Canada, encompassing a vast area of approximately 720,000 km². The landscape of the PPR is dotted with millions of wetland depressions formed by the glacial retreat that happened during the Pleistocene Epoch (Winter, 1989). The PPR is considered as one of the largest and most productive wetland areas in the world, which serves as a primary breeding habitat for much of North America's waterfowl population (Keddy, 2010; Steen et al., 2014; Rover and Mushet, 2015). The wetland depressions, commonly known as potholes, possess important hydrological and ecological functions, such as providing critical habitat for many migrating and breeding waterbirds (Minke,

33 2009), acting as nutrient sinks (Oslund et al., 2010), and storing surface water that can attenuate peak runoff during a
34 flood event (Huang et al., 2011b). The potholes range in size from a relatively small area of less than 100 m² to as
35 large as 30,000 m², with an estimated median size of 1600 m² (Zhang et al., 2009; Huang et al., 2011a). Most
36 potholes have a water depth of less than 1 m with varying water permanency, ranging from temporary to permanent
37 (Sloan, 1972). Due to their small size and shallow depth, these wetlands are highly sensitive to climate variability
38 and are vulnerable to ecological, hydrological, and anthropogenic changes. Wetland depressions have been
39 extensively drained and filled due to agricultural expansion, which is considered the greatest source of wetland loss
40 in the PPR (Johnston, 2013). In a report to the U.S. Congress on the status of wetland resources, Dahl (1990)
41 estimated that the conterminous U.S. lost more than 50 percent of its original wetland acreage over a period of 200
42 years between the 1780s and the 1980s. More recently, Dahl (2014) reported that the total wetland area in the PPR
43 declined by approximately 300 km² between 1997 and 2009. This represents an average annual net loss of 25 km².
44 Regarding the number of depressions, it was estimated that the wetland depressions declined by over 107,000 or
45 four percent between 1997 and 2009 (Dahl, 2014).

46 The extensive wetland drainage and removal have increased precipitation runoff into regional river basins,
47 which is partially responsible for the increasing frequency and intensity of flooding events in the PPR (Miller and
48 Nudds, 1996; Bengtson and Padmanabhan, 1999; Todhunter and Rundquist, 2004). Concerns over flooding along
49 rivers in the PPR have stimulated the development of hydrologic models to simulate the effects of depression
50 storage on peak river flows (Hubbard and Linder, 1986; Gleason et al., 2007; Gleason et al., 2008; Huang et al.,
51 2011b). Since most of these prairie wetlands do not have surface outlets or well-defined surface water connections,
52 they are generally considered as geographically isolated wetlands (GIWs) or upland-embedded wetlands (Tiner,
53 2003; Mushet et al., 2015; Cohen et al., 2016; Lane and D'Amico, 2016). Recently, the U.S. Environmental
54 Protection Agency conducted a comprehensive review of over 1350 peer-reviewed papers with the aim to synthesize
55 existing scientific understanding of how wetlands and streams affect the physical, chemical, and biological integrity
56 of downstream waters (U.S. EPA, 2015). The report concludes that additional research focused on the frequency,
57 magnitude, timing, duration, and rate of fluxes from GIWs to downstream waters is needed to better identify
58 wetlands with hydrological connections or functions that substantially affect other waters and maintain the long-
59 term sustainability and resiliency of valued water resources.

60 In addition to the comprehensive review by the U.S. EPA (2015), a number of recent studies focusing on the
61 hydrologic connectivity of prairie wetlands have been reported in the literature. For example, Chu (2015) proposed a
62 modeling framework to delineate prairie wetlands and characterize their dynamic hydro-topographic properties in a
63 small North Dakota research area (2.55 km²) using a 10-m resolution digital elevation model (DEM). Vanderhoof et
64 al. (2016) examined the effects of wetland expansion and contraction on surface water connectivity in the PPR using
65 time series Landsat imagery. Ameli and Creed (2017) developed a physically-based hydrologic model to
66 characterize surface and groundwater hydrologic connectivity of prairie wetlands. These reported studies represent
67 some of the latest research developments on hydrologic connectivity in the PPR. To our knowledge, little work has
68 been done to delineate potential flow paths between wetlands and stream networks and use flow paths to
69 characterize hydrologic connectivity in the PPR. In addition, previous remote sensing-based work on the hydrology

70 of prairie wetlands mainly focused on mapping wetland inundation areas (e.g., Huang et al., 2014; Vanderhoof et al.,
71 2017) or wetland depressions (e.g., McCauley and Anteau, 2014; Wu and Lane, 2016), few studies have treated
72 wetlands and catchments as integrated hydrological units. Therefore, there is a call for treating prairie wetlands and
73 catchments as highly integrated hydrological units because the existence of prairie wetlands depends on lateral
74 inputs of runoff water from their catchments in addition to direct precipitation (Hayashi et al., 2016). Furthermore,
75 hydrologic models for the PPR were commonly developed using coarse-resolution DEMs, such as the 30-m
76 National Elevation Dataset (see Chu, 2015; Evenson et al., 2015; Evenson et al., 2016). High-resolution light
77 detection and ranging (LiDAR) data have rarely been used in broad-scale (e.g., basin- or subbasin-scale) studies to
78 delineate wetland catchments and model wetland connectivity in the PPR.

79 In this paper, we present a semi-automated framework for delineating nested hierarchical wetland
80 depressions and their corresponding catchments as well as simulating wetland connectivity using high-resolution
81 LiDAR data. Our goal was to demonstrate a method to characterize fill-spill wetland hydrology and map potential
82 hydrological connections between wetlands and stream networks. The hierarchical structure of wetland depressions
83 and catchments was identified and quantified using a localized contour tree method (Wu et al., 2015). The potential
84 hydrologic connectivity between wetlands and streams was characterized using the least-cost path algorithm. We
85 also utilized high-resolution LiDAR intensity data to delineate wetland inundation areas, which were compared
86 against the National Wetlands Inventory (NWI) to demonstrate the hydrological dynamics of prairie wetlands. Our
87 ultimate goal is to build on our proposed framework to improve overland flow simulation and hydrologic
88 connectivity analysis, which subsequently may improve the understanding of wetland hydrological dynamics at
89 watershed scales.

90 **2 Study area and datasets**

91 **2.1 Study area**

92 The work focused on the Pipestem River subbasin in the Prairie Pothole Region of North Dakota (Fig. 1). The
93 subbasin is an 8-digit Hydrologic Unit Code (#10160002) with a total area of approximately 2,770 km², covering
94 four counties in North Dakota (see Fig. 1). The climate of the subbasin is characterized by long, cold, dry winters
95 and short, mild, variably wet summers (Winter and Rosenberry, 1995). Average annual precipitation is
96 approximately 440 mm with substantial seasonal and annual variations (Huang et al., 2011a). The land cover of the
97 Pipestem subbasin is dominated by cultivated crops (44.1%), herbaceous vegetation (25.9%), and hay/pasture
98 (13.1%), with a substantial amount of open water (7.1%) and emergent herbaceous wetlands (5.6%) (Jin et al.,
99 2013). The Cottonwood Lake area (see the blue rectangle in Fig. 1), a long-term field research site established by the
100 U.S. Geological Survey (USGS) and the U.S. Fish and Wildlife Service (USFWS) in 1977 for wetland ecosystem
101 monitoring, has been a very active area of research for several decades (e.g., Sloan, 1972; Winter and Rosenberry,
102 1995; Huang et al., 2011a; Mushet and Euliss, 2012; Hayashi et al., 2016).

103 **2.2 LiDAR data**

104 The LiDAR elevation data for the Pipestem subbasin were collected in late October 2011 and distributed through the
105 North Dakota GIS Hub Data Portal (<https://gis.nd.gov/>, accessed December 30, 2016). The bare-earth digital
106 elevation models (DEMs) derived from LiDAR point clouds are freely available as 1-m resolution image tiles (2 km
107 × 2 km). The vertical accuracy of the LiDAR DEM is 15.0 cm. We created a seamless LiDAR DEM (see Fig. 1) for
108 the Pipestem subbasin by mosaicking 786 DEM tiles and used it for all subsequent data analyses (approximately
109 22.66 GB). The elevation of the subbasin ranges from 422 m to 666 m, with relatively high-elevation areas in the
110 west and low-elevation areas in the east.

111 The LiDAR intensity data for the Pipestem subbasin were also collected at 1-m resolution coincident with
112 the LiDAR elevation data collection. In general, the return signal intensities of water areas are relatively weak due to
113 water absorption of the near-infrared spectrum (Lang and McCarty, 2009; McCauley and Anteau, 2014). As a result,
114 waterbodies typically appear as dark features whereas non-water areas appear as relatively bright features in the
115 LiDAR intensity image. Thresholding techniques have been commonly used to distinguish water pixels from non-
116 water pixels (Huang et al., 2011b; Huang et al., 2014; Wu and Lane, 2016). In this study, the LiDAR intensity data
117 were primarily used to extract standing-water areas (i.e., inundation areas) while the LiDAR DEMs were used to
118 derive nested wetland depressions and their corresponding catchments above the standing-water surface. It is worth
119 noting that October 2011 was an extremely wet period with a Palmer Hydrological Drought Index (PHDI) of 7.84.
120 The PHDI typically falls within the range between -4 (extreme drought) and +4 (extremely wet) (Huang et al.,
121 2011a). Consequently, small individual wetland depressions nested within larger inundated wetland complexes
122 might not be detectable from the resulting LiDAR DEM.

123 **2.3 Ancillary data**

124 In addition to the LiDAR datasets, we used three ancillary datasets, including the 1-m resolution aerial imagery from
125 the National Agriculture Imagery Program (NAIP) of the U.S. Department of Agriculture (USDA), the National
126 Wetlands Inventory (NWI) from the USFWS, and the National Hydrography Dataset (NHD) from the USGS.

127 The NAIP imagery products were also acquired from the North Dakota GIS Hub Data Portal. The default
128 spectral resolution of the NAIP imagery in North Dakota is natural color (Red, Green, and Blue, or RGB).
129 Beginning in 2007, however, the state data have been delivered with four bands of data: RGB and Near Infrared. We
130 downloaded and processed six years of NAIP imagery for the Pipestem subbasin, including 2003, 2004, 2006, 2009,
131 2012, and 2014. A small portion of the study area with the NAIP imagery is shown in Fig. 2. These time-series
132 NAIP imagery clearly demonstrate the dynamic nature of prairie pothole wetlands under various dry and wet
133 conditions. In particular, the extremely wet year of 2014 resulted in many individual wetlands to coalesce and form
134 larger wetland complexes (see the yellow arrows in Fig. 2). It should be noted that all the NAIP imagery were
135 collected during the summer growing season of agricultural crops. Since no coincident aerial photographs were
136 collected during the LiDAR data acquisition campaign in 2011, these NAIP imagery can serve as valuable data
137 sources for validating the LiDAR-derived wetlands catchments and hydrological pathways in this study.

138 The NWI data for our study area were downloaded from <https://www.fws.gov/wetlands/> (accessed
139 December 30, 2016). The wetland inventory data in this region were created by manually interpreting aerial

140 photographs acquired in the 1980s with additional support from soil surveys and field checking (Cowardin et al.,
141 1979; Huang et al., 2011b; Wu and Lane, 2016). Tiner (1997) reported that the target mapping unit, the size class of
142 the smallest group of NWI wetlands that can be consistently mapped, was between 1000 m² and 4000 m² in the
143 Prairie Pothole Region. It should be noted that the target mapping unit is not the minimum wetland size of the NWI.
144 In fact, there are a considerable amount of NWI wetland polygons smaller than the target mapping unit (1000 m²). In
145 this study, we focused on the prairie wetlands that are greater than 500 m². Therefore, 5644 small NWI wetland
146 polygons (< 500 m²) were eliminated from further analysis. In total, there were 32,016 NWI wetland polygons (≥
147 500 m²) across the Pipestem subbasin (Table 1). The total size of these NWI wetlands was approximately 279.5 km²,
148 covering 10.1% of the Pipestem subbasin. The areal composition of NWI wetlands were freshwater emergent
149 wetlands (86.5%), lakes (7.5%), freshwater ponds (5.3%), freshwater forested/shrub wetland (0.4%), and riverine
150 systems (0.3%). The median size of wetlands (≥ 500 m²) in our study area was 1.8×10^3 m². Although the NWI data
151 is the only spatially comprehensive wetland inventory for our study area, it is now considerably out-of-date, as it
152 was developed 30 years ago and it does not reflect the wetland temporal change (Johnston, 2013). The wetland
153 extent and type for many wetland patches have changed since its original delineation (e.g., Fig. 2). Nevertheless,
154 NWI does provide valuable information about wetland locations (Tiner, 1997; Huang et al., 2011b). Furthermore,
155 the NWI definition of wetlands requires only one of three wetland indicators (soils, hydrology, or plants) whereas
156 regulatory delineation requires all three [33 Code of Federal Regulations 328.3(b)]. In our study, the NWI polygons
157 were primarily used to compare with the wetland depressions delineated from the LiDAR DEM.

158 The high-resolution NHD data were downloaded from <http://nhd.usgs.gov> (accessed December 30, 2016).
159 There were 1840 polyline features in the NHD flowline layer for the Pipestem subbasin, with a total length of $1.4 \times$
160 10^3 km and an average length of 762 m. The NHD flowlines overlaid on top of the LiDAR DEM are shown in Fig.
161 1. It is worth noting that the majority of the NHD flowline features were found in the low-elevation areas in the east.
162 The high-elevation areas in the west where most NWI wetland polygons are located have very few NHD flowlines,
163 except for the Little Pipestem Creek. This suggests that a large number of temporary and seasonal flow paths were
164 not captured in the NHD dataset, perhaps due to the fact that the NHD does not try to systematically measure stream
165 lines <1.6 km (Stanislawski, 2009; Lane and D'Amico, 2016). In this study, the NHD flowlines were used to
166 compare the LiDAR-derived potential flow paths using our proposed methodology.

167 **3 Methodology**

168 **3.1 Outline**

169 Our methodology for delineating nested wetland catchments and flow paths is a semi-automated approach consisting
170 of several key steps: (a) extraction of hierarchical wetland depressions using the localized contour tree method (Wu
171 et al., 2015); (b) delineation of nested wetland catchments; (c) calculation of potential water storage; and (d)
172 derivation of potential flow paths using the least-cost path search algorithm. The LiDAR DEM was used to delineate
173 hierarchical wetland depressions and nested wetland catchments. The LiDAR intensity imagery was used to extract
174 wetland inundation areas. The potential water storage of each individual wetland depression was calculated as the

175 volume between the standing water surface and the maximum water boundary where water might overspill into
176 downstream wetlands or waters. The potential flow paths representing surface water connectivity were derived
177 according to the potential water storage and simulated rainfall intensity. The flowchart in Fig. 3 shows the detailed
178 procedures of the methodology for delineating wetland catchments and potential flow paths.

179 **3.2 Extraction of hierarchical wetland depressions**

180 The fill-and-spill hydrology of prairie wetland depressions have received considerable attention in recent years
181 (Shaw et al., 2012; Shaw et al., 2013; Golden et al., 2014; Chu, 2015; Hayashi et al., 2016; Wu and Lane, 2016). It
182 is generally acknowledged that the fill-and-spill mechanism of wetland depressions results in intermittent hydrologic
183 connectivity between wetlands in the PPR. In this study, wetland depressions were categorized into two groups
184 based on their hierarchical structure: simple depressions and composite depressions. A simple depression is a
185 depression that does not have any other depressions embedded in it, whereas a composite depression is composed of
186 two or more simple depressions (Wu and Lane, 2016). As shown in Fig. 4(a), for example, depressions A, B, C, D
187 and E are all simple depressions. As water level gradually increases in these simple depressions, they will eventually
188 begin to spill and merge to form composite depressions. For instance, the two adjoining simple depressions A and B
189 can form a composite depression F (see Fig. 4(b)). Continuously, composite depression F and simple depression C
190 can further coalesce to form an even larger composite depression G. Similarly, the two adjoining simple depressions
191 D and E can coalesce to form a composite depression H.

192 It is worth noting that the flow direction of surface waters resulting from the fill-and-spill mechanism
193 between adjoining wetland depressions can be bidirectional, depending on the antecedent water level and potential
194 water storage capability of the depressions. Most previous studies simply assumed that water always flows
195 unidirectionally from an upper waterbody to a lower one. This assumption, however, does not apply when two
196 adjoining depressions share the same spilling elevation or when there is a groundwater hydraulic head preventing
197 the flow from one to another. For example, in Fig. 4(a), the water flow direction resulting from fill-and-spill
198 between depressions A and B can be bidirectional. If depression B fills up more quickly than depression A, then
199 water will flow from depression B to depression A through the spilling point, and vice versa. Depression with a high
200 elevation of antecedent water level does not necessarily spill to an adjoining depression with a lower elevation of
201 antecedent water level. The key factors affecting the initialization of spilling process leading to flow direction are
202 the depression ponding time and catchment precipitation conditions. If the rain or runoff comes from the east and
203 that is where depression B is, then it might fill more quickly than if the runoff comes from the west where
204 depression A is. The wetland depression whichever takes less time to fill up will spill to the adjoining depression
205 and eventually coalesce to form a larger composite depression. If no adjoining depression with the same spilling
206 elevation is available, the upstream wetland depression will directly spill to downstream wetlands or streams. For
207 example, the largest fully-filled composite depression G will spill to the simple depression D or the composite
208 depression H, if available.

209 To identify and delineate the nested hierarchical structure of potential wetland depressions, we utilized the
210 localized contour tree method proposed by Wu et al. (2015). The concept of contour tree was initially proposed to

211 extract key topographic features (e.g., peaks, pits, ravines, and ridges) from contour maps (Kweon and Kanade,
212 1994). The contour tree is a tree data structure that can represent the nesting of contour lines on a continuous
213 topographic surface. Wu et al. (2015) improved and implemented the contour tree algorithm, making it a locally
214 adaptive version. In other words, the localized contour tree algorithm builds a series of trees rather than a single
215 global contour tree for the entire area. Each localized contour tree represents one disjointed depression (simple or
216 composite), and the number of trees represents the total number of disjointed depressions for the entire area. When a
217 disjointed depression is fully flooded, the water in it will spill to the downstream wetlands or waters through
218 overland flow. For example, Fig. 4(c) and (d) show the corresponding contour tree graphs for the composite
219 depressions in Fig. 4(b). Once the composition G is fully filled, water will spill into simple depression D or
220 composite depression H.

221 3.3 Delineation of nested wetland catchments

222 After the identification and extraction of hierarchical wetland depressions from the contour maps, various
223 hydrologically relevant terrain attributes can be derived based on the DEM, including flow direction, flow
224 accumulation, catchment boundary, flow path, flow length, etc. The calculation of flow direction is essential in
225 hydrological analysis because it frequently serves as the first step to derive other hydrologically important terrain
226 attributes. On a topographic surface represented in a DEM, flow direction is the direction of flow from each grid cell
227 to its steepest downslope neighbor. One of the widely used flow direction algorithms is the eight-direction flow
228 model known as the D8 algorithm (O'Callaghan and Mark, 1984), which is available in most GIS software packages.
229 Flow accumulation is computed based on flow direction. Each cell value in the flow accumulation raster represents
230 the number of upslope cells that flow into it. In general, cells with high flow accumulation values correspond to
231 areas of concentrated flow (e.g. stream channels), while cells with a flow accumulation value of zero correspond to
232 the pattern of ridges (Zhu, 2016). Therefore, flow accumulation provides a basis for identifying ridgelines and
233 delineating catchment boundaries.

234 A catchment is the upslope area that drains water to a common outlet. It is also known as the watershed,
235 drainage basin, or contributing area. Catchment boundaries can be delineated from a DEM by identifying ridgelines
236 between catchments based on a specific set of catchment outlets (i.e., spilling points). In traditional hydrological
237 modeling, topographic depressions are commonly treated as spurious features and simply removed to create a
238 hydrologically correct DEM, which enforces water to flow continuously across the landscape to the catchment
239 outlets (e.g., stream gauges, dams). In the PPR, however, most topographic depressions in the DEM are real features
240 that represent wetland depressions, which are rarely under fully-filled condition (see Hayashi et al., 2016; Lane and
241 D'Amico, 2016; Vanderhoof et al., 2016). As illustrated above, we used the localized contour tree algorithm to
242 delineate the hierarchical wetland depressions, which were used as the source locations for delineating wetland
243 catchments. Each wetland depression (simple or composite) has a corresponding wetland catchment. As shown in
244 Fig. 4(b), the corresponding wetland catchment of each wetland depression is bounded by the vertical lines
245 surrounding that depression. For example, the wetland catchment of simple depression A is $Catchment_{lm}$, and the
246 wetland catchment of simple depression B is $Catchment_{mn}$. Similarly, the wetland catchment of composite

247 depression F is $Catchment_{in}$, which is an aggregated area of $Catchment_{im}$ and $Catchment_{mn}$, resulting from the
248 coalesce of simple depressions A and B.

249 3.4 Calculation of potential water storage and ponding time

250 The potential water storage capacity (V [m^3]) of each wetland depression was computed through statistical analysis
251 of the grid cells that fall within the depression (Wu and Lane, 2016):

$$252 \quad V = \sum_{i=1}^n (C - Z_i) \cdot R^2 \quad (1)$$

253 where C is the spilling elevation (m), i.e., the elevation of the grid cell where water spills out of the depression; Z_i
254 is the elevation of the grid cell i (m); R is the spatial resolution (m); and n is the total number of grid cells that fall
255 within the depression.

256 The ponding time of a depression was calculated as follows:

$$257 \quad T = V / (A_c \cdot I) \cdot 1000 \quad (2)$$

258 where V is the potential water storage capacity of the depression (m^3); A_c is the catchment area of the
259 corresponding depression (m^2); and I is the rainfall intensity (mm/h). For the sake of simplicity, we made two
260 assumptions. First, we assumed that the rainfall was temporally and spatially consistent and uniformly distributed
261 throughout the landscape (e.g., 50 mm/h) and all surfaces were impervious. Second, we assumed no soil infiltration.
262 Note that assuming no infiltration is a reasonable assumption for the prairie pothole landscape (Shaw et al., 2013;
263 Hayashi et al., 2016). However, this assumption might be problematic in other landscapes with more heterogeneity
264 in infiltration capacity.

265 The proportion of wetland depression area (A_w) to catchment area (A_c) was calculated by:

$$266 \quad P_{wc} = A_w / A_c \quad (3)$$

267 The wetland depression area (A_w) refers to the maximum ponding extent of the depression. The proportion (P_{wc})
268 can serve as a good indicator for percent inundation of the study area under extremely wet conditions (e.g.,
269 Vanderhoof et al., 2016).

270 3.5 Derivation of surface-water flow paths

271 Based on the computed ponding time of each depression under a specific rainfall intensity, the most probable
272 sequence of the overland flow path were constructed. The depression with the least ponding time will first fill and
273 start to overflow down-gradient. In hydrology, the path which water takes to travel from the spilling point to the
274 downstream surface outlet or channel is commonly known as flow path. The distance it takes for water to travel is
275 known as flow length. In this study, we adopted and adapted the least-cost path search algorithm (Wang and Liu,
276 2006; Metz et al., 2011; Stein et al., 2011) to derive the potential flow paths. The least cost path algorithm requires

277 two input datasets: the DEM and the depression polygons. Given the fact that topographic depressions in high-
278 resolution LiDAR DEM are frequently a combination of artifacts and actual landscape features (Lindsay and Creed,
279 2006), the user can set a minimum size threshold for depressions to be treated as actual landscape features. In other
280 words, depressions with a size smaller than the threshold will be treated as artifacts, and thus removed from the
281 DEM. This results in a partially-filled DEM in which depressions smaller than the chosen threshold are filled to
282 enforce hydrologic flow while larger depressions are kept for further analysis. Based on the partially-filled DEM,
283 flow direction for each grid cell can be calculated using the D8 flow direction algorithm (O'Callaghan and Mark,
284 1984). The least cost path minimizes the cumulative cost (i.e., elevation) along its length. Flow paths are computed
285 by tracing down gradient, from higher to lower cells, following assigned flow directions. With the simulated
286 overland flow path, flow length can be calculated, which is defined as the distance between the spilling point of an
287 upslope wetland and the inlet of a downslope wetland or stream. In our study, hydrologic connectivity refers to the
288 water movement between wetland-wetland and wetland-stream via hydrologic pathways of surface water.

289 **3.6 Wetland Hydrology Analyst**

290 To facilitate automated delineation of wetland catchments and flow paths, we implemented the proposed framework
291 as an ArcGIS toolbox – Wetland Hydrology Analyst, which is freely available for download at
292 <https://GISTools.github.io/> (accessed December 30, 2016). The core algorithms of the toolbox were implemented
293 using the Python programming language. The toolbox consists of three tools: Wetland Depression Tool, Wetland
294 Catchment Tool, and Flow Path Tool. The Wetland Depression Tool asks the user to select a DEM grid, and then
295 executes the localized contour tree algorithm with user-defined parameters (e.g., base contour elevation, contour
296 interval, min. depression size, min. ponding depth) automatically to delineate hierarchical wetland depressions. The
297 depressional wetland polygons can be stored as ESRI Shapefiles or a Feature Dataset in a Geodatabase. Various
298 morphometric properties (e.g., width, length, size, perimeter, max. depth, mean depth, volume, elongatedness,
299 compactness) are computed and included in the attribute table of the wetland polygon layers. The Wetland
300 Catchment Tool uses the DEM grid and the wetland polygon layers resulted from the Wetland Depression Tool as
301 input, and exports wetland catchment layers in both vector and raster format. The Flow Path Tool can be used to
302 derive potential overland flow paths of surface water based on the DEM grid and the wetland polygon layers.

303 **3.7 Wetland inundation mapping**

304 The LiDAR intensity image was primarily used to map inundation areas. Before inundation mapping, we applied a
305 median filter to smooth the LiDAR intensity image. The median filter is considered as an edge-preserving filter that
306 can effectively remove data noise while preserving boundaries between image objects (Wu et al., 2014).
307 Subsequently, a simple thresholding method was used to separate inundated and non-inundated classes. Similar
308 thresholding techniques have been used in previous studies to extract water areas from LiDAR intensity imagery
309 (Lang and McCarty, 2009; Huang et al., 2011b). By examining typical inundation areas and the histogram of the
310 LiDAR intensity imagery used in our study, we chose an intensity threshold value of 20. Grid cells with an intensity
311 value between 0 and 20 were classified as an inundated class while grid cells with an intensity value greater than 20

312 as a non-inundated class, which resulted in a binary image. In the binary image, each region composed of inundated
313 pixels that were spatially connected (8-neighbor) was referred to as a potential inundation object. The “boundary
314 clean” and “region group” functions in ArcGIS Spatial Analyst were then used to clean ragged edges of the potential
315 inundation objects and assign a unique number to each object. It should be noted that water and live trees might both
316 appear as dark features in the LiDAR intensity imagery and have similar intensity values, although trees are not
317 particularly common in this region. As a result, some trees were misclassified as inundation objects. To correct the
318 misclassifications and obtain reliable inundation objects, we further refined the potential inundation objects using
319 additional criteria with the aid of the LiDAR DEM. First, we assumed that each inundation object must occur within
320 a topographic depression in order to retain water. In other words, all inundation objects must intersect with
321 depression objects derived using the “sink” function in ArcGIS Spatial Analyst. Secondly, given the relatively flat
322 and level surface of inundated regions, the standard deviation of pixel elevations within the same inundation object
323 should be very small. By examining the standard deviation of pixel elevations of some typical inundation objects
324 and tree objects, we chose a threshold of 0.25 m, which is slightly larger than the vertical accuracy of the LiDAR
325 data (0.15 m). This step can be achieved using the “zonal statistics as table” in ArcGIS Spatial Analyst. Thirdly, we
326 only focused on wetlands greater than 500 m². Therefore, inundation objects with areas smaller than 500 m² were
327 eliminated from further analysis.

328 **4 Results**

329 **4.1 Inundation mapping results**

330 Using the above procedures, we identified 15,784 inundation objects (i.e., depressions ≥ 500 m² with water as
331 determined through LiDAR-based analyses), which were then compared against the NWI wetland polygons in our
332 study area. We have made the inundation map publicly available at <https://GISTools.github.io/> (accessed December
333 30, 2016). The identified inundation objects encompassed an area of approximately 278.5 km², accounting for 10.1 %
334 of the Pipestem subbasin. Using the empirical area-to-volume equation developed for this region of the PPR (see
335 Gleason et al., 2007; Wu and Lane, 2016), we estimated that the 15,784 inundated depressions stored approximately
336 448.5 million m³ of water. The histogram of inundation polygons is shown in Fig. 5(a). The median size of the
337 inundation polygons identified using the LiDAR intensity data was 1.8×10^3 m², which was slightly larger than the
338 reported median size of NWI polygons (Table 2). Contrary to expectations, 18,957 out of 32,016 NWI wetland
339 polygons did not intersect with the inundation objects. In other words, 59.2% of the NWI wetland polygons mapped
340 in the 1980s did not contain visible waterbodies during the LiDAR collection period. The total area of these ‘dried’
341 NWI wetlands were 43.6 km², accounting for 15.6% of the original NWI wetland areas (279.5 km²). The histogram
342 of the ‘dried’ NWI wetlands is shown in Fig. 5(b). It is worth noting that most of these ‘dried’ NWI wetlands were
343 relatively small with a median size of 1.2×10^3 m² (Table 2). The LiDAR intensity data were acquired in late
344 October 2011, an extremely wet month according to the Palmer Hydrological Drought Index (Fig. 6). During this
345 wet season, most wetlands would be expected to have abundant standing water. If no standing water could be
346 detected in a wetland patch during this extremely wet period, it is possible that some of these small wetlands might

347 have dried out during the past weeks to months. It is possible that land use change surrounding the 'dried' wetlands
348 (e.g., row-cropping replacing pasture lands) may have affected their hydrology (Wright and Wimberly, 2013); water
349 diversion via drainage or ditches could also be responsible for the lack of inundation, though we did not explore
350 either of these potential drivers of change in this study. However, it is also likely that some of the 'dried' wetland
351 might become wet again in the spring following snowmelt. The 'dried' NWI wetlands could also be attributed to the
352 source of error in the original NWI data, which has a minimum mapping unit (i.e., the minimum sized wetland that
353 can be consistently mapped) of 0.1 ha for the PPR (Tiner, 1997). Figure 5(b) shows that 37% of the 'dried' NWI
354 polygons are smaller than the minimum mapping unit (1000 m²). This implies that these small 'dried' NWI
355 polygons could be due to the NWI mapping error. Figure 7 illustrates the difference in shape and extent between the
356 LiDAR-derived wetland inundation maps and the NWI wetland polygons. The areas of disagreement (discrepancy)
357 can be partly explained by the different image acquisition dates. As mentioned earlier, the NWI maps for Pipestem
358 subbasin of the PPR were created in the early 1980s while the LiDAR data were acquired in 2011. Clearly, most
359 small NWI wetlands (see yellow-outline polygons in Fig. 7) appeared to not have visible standing water. Conversely,
360 large NWI wetlands exhibited expansion and coalesced to form even large wetland complexes (see blue-outline
361 polygons in Fig. 7).

362 **4.2 Nested wetland depressions and catchments**

363 We applied the localized contour method on the LiDAR-derived DEM and identified 33,241 wetland depressions. It
364 should be noted that the 'wetland depression' refers to the maximum potential ponding extent of the depression. The
365 inundated wetland depressions identified in the prior section can be seen as a subset of these depressions with water
366 in them. The total area of the identified wetland depressions was approximately 0.55×10^9 m² (Table 3), accounting
367 for 20% of the entire study area. This histogram of the wetland depressions is shown in Fig. 8(a). The median size of
368 wetland depressions was 2.6×10^3 m², which is larger than that of the NWI wetland polygons as well as the
369 inundation polygons (see Table 2). Using Eq. (1), we estimated that the potential water storage capacity of the
370 Pipestem subbasin resulting from these wetland depressions is 782.8 million m³, which is 1.75 times as large as the
371 estimated existing water storage (448.5 million m³) for the 15,784 inundated wetlands mentioned above. As noted
372 by Hayashi et al. (2016), wetlands and catchments are highly correlated and should be considered as integrated
373 hydrological units. The water input of each wetland largely depends on runoff from the upland areas within the
374 catchment. Using the method described in Section 3.3, we delineated the associated wetland catchments for each of
375 the 33,241 wetland depressions. The histogram of the delineated wetland catchments is shown in Fig. 8(b). The
376 median size of wetland catchments was 26×10^3 m², which is approximately ten times larger than that of the
377 wetland depressions (Table 3).

378 Using Eq. (3), we calculated the proportion of depression area to catchment area (A_w / A_c) for each wetland
379 depression. It was found that the proportion ranged from 0.04% to 83.72%, with a median of 14.31% (Table 3). Our
380 findings are in general agreement with previous studies (Hayashi et al., 2016). For instance, Hayashi et al. (1998)
381 reported an average proportion (A_w / A_c) of 9% for 12 prairie wetlands in the Canadian portion of the PPR.

382 Similarly, Watmough and Schmoll (2007) analyzed 13 wetlands in the Cottonwood Lake Area during the high-stage
383 period and reported an average proportion (A_w/A_c) of 18%. It should be noted that the average proportion of
384 wetland area to catchment area (A_w/A_c) reported in the above studies were calculated on the basis of a limited
385 number of wetlands. On the contrary, our results were computed from more than 30,000 wetland depressions and
386 catchments, which provides a statistically reliable result for the study area due to a much larger sample size.

387 **4.3 Potential flow paths and connectivity lengths**

388 Based on the LiDAR DEM and wetland depression polygon layer, we derived the potential flow path network for
389 our study area using the least-cost path algorithm. We have made the interactive map of modeled hydrologic
390 connectivity in the Pipestem subbasin publicly available at <https://GISTools.github.io/wetland-connectivity>
391 (accessed December 30, 2016). A number of data layers derived from our study are available on the map, such as the
392 inundation polygons, wetland depressions, wetland catchments, and potential flow paths. NWI polygons, NHD
393 flowlines, LiDAR intensity image, LiDAR shaded relief, and time-series aerial photographs are also available for
394 results comparison and visualization. A small proportion of the map is shown in Fig. 9. Clearly, the derived potential
395 flow paths not only captured the permanent surface water flow paths (see the thick blue NHD flowline in Fig. 9), but
396 also the potential intermittent and infrequent flow paths that have not been mapped previously. By examining the
397 potential flow paths overlaid on the color infrared aerial photograph (Fig. 9(b)), we can see that the majority of
398 potential flow paths appeared to be collocated with vegetated areas. This indicates that flow paths are likely located
399 in high soil moisture areas that are directly or indirectly related to surface water or groundwater connectivity. It
400 should be reiterated that the derived flow paths are only potential flow paths. Water may not have flowed along a
401 fraction of them to date.

402 In total, there are 1840 NHD flowlines in the Pipestem subbasin. The mean and median length of NHD
403 flowlines are 762 m and 316 m, respectively (Table 4). However, the potential flow lengths derived from our study,
404 which connected not only stream segments but also wetlands to wetlands, revealed much shorter flow paths than the
405 NHD flowlines. This finding is within our expectation. The histogram of the derived potential flow lengths is shown
406 in Fig. 10. The median potential flow length is 83 m, which is approximately 1/4 of the median NHD flowlines. The
407 median elevation difference between an upstream wetland and a downstream wetland connected through the
408 potential flow path is 0.89 m.

409 **5 Discussion**

410 The LiDAR data we used in this study were collected in late October 2011, which was an extremely wet period
411 according to the Palmer Hydrological Drought Index (see Fig. 6). Most wetlands exhibited high water levels and
412 large water extents, which can be evidenced from the LiDAR intensity image in Fig. 7 and the aerial photograph in
413 Fig. 9. It can be clearly seen that most wetlands, particularly those larger ones, appeared to have larger water extents
414 compared to the NWI polygons. A substantial number of inundated NWI wetlands were found to coalesce with
415 adjoining LiDAR-based wetland depressions and form larger wetland complexes. LiDAR data acquired during high

416 water levels is desirable for studying maximum water extents of prairie wetlands. However, the use of wet-period
417 LiDAR data alone is not ideal for studying the fill-and-spill hydrology of prairie wetlands. Since LiDAR sensors
418 working in the near-infrared spectrum typically could not penetrate water, it is impractical to derive bathymetry of
419 the wetland depressions. As a result, the delineation and characterization of individual wetland depressions nested
420 within larger inundated wetland complexes were not possible. Bathymetric LiDAR systems with a green laser
421 onboard offer a promising solution for acquiring wetland basin morphometry due to the higher penetration capability
422 of the green laser (Wang and Philpot, 2007). In addition, the derivation of antecedent water depth and volume of
423 wetland depressions is difficult, which can only be estimated using empirical equations based on the statistical
424 relationship between depression area and depression volume (Hayashi and Van der Kamp, 2000; Gleason et al.,
425 2007). As noted earlier, the volume of water in the 15,784 inundated wetlands was estimated to be 448.5 million m³.
426 Ideally, using multiple LiDAR datasets acquired in both dry and deluge conditions in conjunction with time-series
427 aerial photographs would be essential for studying the fill-and-spill mechanism of prairie wetlands. In this case, we
428 could use the dry-period LiDAR data to delineate and characterize the morphology of individual wetland
429 depressions before the fill-and-spill processes occur. Furthermore, we can derive the potential flow paths and project
430 the coalescing of wetland depressions after the fill-and-spill processes initiate. The wet-period LiDAR data and
431 time-series aerial photographs can serve as validation datasets to evaluate the fill-and-spill patterns.

432 It is also worth noting that the proposed methodology in this study was designed to reflect the topography
433 and hydrologic connectivity between wetlands in the Prairie Pothole Region. We have made assumptions to simplify
434 the complex prairie hydrology. Physically-based hydrological models (e.g., Brunner and Simmons, 2012; Ameli and
435 Creed, 2017) have not yet been integrated into our framework. However, fill-and-spill is a complex and spatially
436 distributed hydrological process highly affected by many factors, such as surface topography, surface roughness, soil
437 infiltration, soil properties, depression storage, precipitation, evapotranspiration, snowmelt runoff, and groundwater
438 exchange (Tromp-van Meerveld and McDonnell, 2006b, a; Evenson et al., 2015; Zhao and Wu, 2015; Evenson et
439 al., 2016; Hayashi et al., 2016). Nevertheless, our study presents the first attempt to use LiDAR data for deriving
440 nested wetland catchments and simulating flow paths in the broad-scale Pipestem subbasin in the PPR. Previous
441 studies utilizing high-resolution digital elevation data (e.g., LiDAR, Interferometric Synthetic Aperture Radar
442 [IfSAR]) for studying prairie wetlands were mostly confined in small-scale areas (e.g., plot scale, small watershed
443 scale) with a limited number of wetlands, whereas broad-scale studies using physically-based hydrological models
444 have rarely used LiDAR data to delineate and characterize individual wetland depressions or catchments. Coupled
445 surface-subsurface flow models with hydrologic, biogeochemical, ecologic, and geographic perspectives have yet to
446 be developed for broad-scale studies in the PPR (Golden et al., 2014; Amado et al., 2016). Further efforts are still
447 needed to improve the understanding of the integrated surface-water and groundwater processes of prairie wetlands.

448 **6 Conclusions**

449 Accurate delineation and characterization of wetland depressions and catchments are essential to understand and
450 correctly analyze the hydrology of many landscapes, including the Prairie Pothole Region. In this study, we
451 delineated the inundation areas while reducing the confounding factor of live trees by using the LiDAR-derived

452 DEM in conjunction with the coincident LiDAR intensity imagery. In addition, we developed a semi-automated
453 framework for identifying nested hierarchical wetland depressions and delineating their corresponding catchments
454 using the localized contour tree method. Furthermore, we quantified the potential hydrologic connectivity between
455 wetlands and streams based on the overland flow networks derived using the least-cost path algorithm on LiDAR
456 data. Although the results presented in this study are specific to the Pipestem subbasin, the proposed framework can
457 be easily adopted and adapted to other wetland regions where LiDAR data are available. The new tools that we
458 developed and have made freely available to the scientific community for identifying potential hydrologic
459 connectivity between wetlands and stream networks can better inform regulatory decisions and enhance the ability
460 to better manage wetlands under various planning scenarios. The resulting flow network delineated potential flow
461 paths connecting wetland depressions to each other or to the river network at scales finer than available through the
462 National Hydrography Dataset. The results demonstrated that our proposed framework is promising for improving
463 overland flow modeling and hydrologic connectivity analysis (Golden et al., 2016).

464 Broad-scale prairie wetland hydrology has been difficult to study with traditional remote sensing methods
465 using multi-spectral satellite data due to the limited spatial resolution and the interference of tree canopy (Klemas,
466 2011; Gallant, 2015). LiDAR-derived DEMs can be used to map potential hydrologic flow pathways, which regulate
467 the ability of wetlands to provide ecosystem services (Lang and McCarty, 2009). This study is an initial step towards
468 the development of a spatially distributed hydrologic model to fully describe the hydrologic processes in broad-scale
469 prairie wetlands. Additional field work and the integration of physically-based models of surface and subsurface
470 processes would benefit the study. Importantly, the results capture temporary and ephemeral hydrologic connections
471 and provide essential information for wetland scientists and decision-makers to more effectively plan for current and
472 future management of prairie wetlands.

473 **Data and code availability**

474 The data and ArcGIS toolbox developed for this paper are available for download at <https://GISTools.github.io/>.

475 **Competing interests**

476 The authors declare that they have no conflict of interest.

477 **Acknowledgements**

478 The authors would like to thank Rose Kwok, Daniel Auerbach, and two anonymous journal reviewers for providing
479 insightful comments which improved the quality of the manuscript. This paper has been reviewed in accordance
480 with the U.S. Environmental Protection Agency's peer and administrative review policies and approved for
481 publication. Mention of trade names or commercial products does not constitute endorsement or recommendation
482 for use. Statements in this publication reflect the authors' professional views and opinions and should not be
483 construed to represent any determination or policy of the U.S. Environmental Protection Agency.

484 **References**

- 485 Amado, A. A., Politano, M., Schilling, K., and Weber, L.: Investigating Hydrologic Connectivity of a Drained
 486 Prairie Pothole Region Wetland Complex using a Fully Integrated, Physically-Based Model, *Wetlands*, 1-13,
 487 10.1007/s13157-016-0800-5, 2016.
- 488 Ameli, A. A., and Creed, I. F.: Quantifying hydrologic connectivity of wetlands to surface water systems, *Hydrol.*
 489 *Earth Syst. Sci.*, 21, 1791-1808, 10.5194/hess-21-1791-2017, 2017.
- 490 Bengtson, M. L., and Padmanabhan, G.: A hydrologic model for assessing the influence of wetlands on flood
 491 hydrographs in the Red River Basin: Development and application, Citeseer, 1999.
- 492 Brunner, P., and Simmons, C. T.: HydroGeoSphere: A Fully Integrated, Physically Based Hydrological Model,
 493 *Ground Water*, 50, 170-176, 10.1111/j.1745-6584.2011.00882.x, 2012.
- 494 Chu, X.: Delineation of Pothole-Dominated Wetlands and Modeling of Their Threshold Behaviors, *Journal of*
 495 *Hydrologic Engineering*, D5015003, 2015.
- 496 Cohen, M. J., Creed, I. F., Alexander, L., Basu, N. B., Calhoun, A. J., Craft, C., D'Amico, E., DeKeyser, E., Fowler,
 497 L., and Golden, H. E.: Do geographically isolated wetlands influence landscape functions?, *Proceedings of*
 498 *the National Academy of Sciences*, 113, 1978-1986, 2016.
- 499 Cowardin, L. M., Carter, V., Golet, F. C., and LaRoe, E. T.: Classification of wetlands and deepwater habitats of the
 500 United States, U.S. Department of the Interior, Fish and Wildlife Service, Washington, D.C., 131, 1979.
- 501 Dahl, T. E.: Wetlands losses in the United States, 1780's to 1980's. Report to the Congress, U.S. Department of the
 502 Interior, Fish and Wildlife Service, Washington, D.C, 13, 1990.
- 503 Dahl, T. E.: Status and trends of prairie wetlands in the United States 1997 to 2009, U.S. Department of the Interior,
 504 Fish and Wildlife Service, Ecological Services, Washington, D.C., 67, 2014.
- 505 Evenson, G. R., Golden, H. E., Lane, C. R., and D'Amico, E.: Geographically isolated wetlands and watershed
 506 hydrology: A modified model analysis, *Journal of Hydrology*, 529, Part 1, 240-256,
 507 <http://dx.doi.org/10.1016/j.jhydrol.2015.07.039>, 2015.
- 508 Evenson, G. R., Golden, H. E., Lane, C. R., and D'Amico, E.: An improved representation of geographically isolated
 509 wetlands in a watershed-scale hydrologic model, *Hydrological Processes*, 30, 4168-4184,
 510 10.1002/hyp.10930, 2016.
- 511 Gallant, A.: The Challenges of Remote Monitoring of Wetlands, *Remote Sensing*, 7, 10938, 2015.
- 512 Gleason, R. A., Tangen, B. A., Laubhan, M. K., Kermes, K. E., and Euliss Jr, N. H.: Estimating water storage
 513 capacity of existing and potentially restorable wetland depressions in a subbasin of the Red River of the
 514 North, U.S. Geological Survey Open-File Report 2007-1159., 36, 2007.
- 515 Gleason, R. A., Laubhan, M. K., Tangen, B. A., and Kermes, K. E.: Ecosystem services derived from wetland
 516 conservation practices in the United States Prairie Pothole Region with an emphasis on the US Department
 517 of Agriculture Conservation Reserve and Wetlands Reserve Programs, 2008.
- 518 Golden, H. E., Lane, C. R., Amatya, D. M., Bandilla, K. W., Kiperwas, H. R., Knightes, C. D., and Ssegane, H.:
 519 Hydrologic connectivity between geographically isolated wetlands and surface water systems: A review of
 520 select modeling methods, *Environ. Modell. Softw.*, 53, 190-206, 10.1016/j.envsoft.2013.12.004, 2014.
- 521 Golden, H. E., Creed, I., Ali, G., Basu, N., Neff, B., Rains, M., McLaughlin, D., Alexander, L., Ameli, A.,
 522 Christensen, J., Evenson, G., Jones, C., Lane, C., and Lang, M.: Scientific tools for integrating
 523 geographically isolated wetlands into land management decisions, *Frontiers in Ecology and the Environment*
 524 (in review), 2016.
- 525 Hayashi, M., van der Kamp, G., and Rudolph, D. L.: Water and solute transfer between a prairie wetland and
 526 adjacent uplands. 1. Water balance, *Journal of Hydrology*, 207, 42-55, [http://dx.doi.org/10.1016/S0022-1694\(98\)00098-5](http://dx.doi.org/10.1016/S0022-1694(98)00098-5), 1998.
- 527
 528 Hayashi, M., and Van der Kamp, G.: Simple equations to represent the volume–area–depth relations of shallow
 529 wetlands in small topographic depressions, *Journal of Hydrology*, 237, 74-85, 2000.
- 530 Hayashi, M., van der Kamp, G., and Rosenberry, D. O.: Hydrology of Prairie Wetlands: Understanding the
 531 Integrated Surface-Water and Groundwater Processes, *Wetlands*, 1-18, 10.1007/s13157-016-0797-9, 2016.
- 532 Huang, C., Peng, Y., Lang, M., Yeo, I. Y., and McCarty, G.: Wetland inundation mapping and change monitoring
 533 using Landsat and airborne LiDAR data, *Remote Sensing of Environment*, 141, 231-242, 2014.

534 Huang, S., Dahal, D., Young, C., Chander, G., and Liu, S.: Integration of Palmer Drought Severity Index and remote
535 sensing data to simulate wetland water surface from 1910 to 2009 in Cottonwood Lake area, North Dakota,
536 Remote Sensing of Environment, 115, 3377-3389, 2011a.

537 Huang, S., Young, C., Feng, M., Heidemann, K., Cushing, M., Mushet, D. M., and Liu, S.: Demonstration of a
538 conceptual model for using LiDAR to improve the estimation of floodwater mitigation potential of Prairie
539 Pothole Region wetlands, Journal of Hydrology, 405, 417-426, 2011b.

540 Hubbard, D. E., and Linder, R. L.: Spring runoff retention in prairie pothole wetlands, Journal of Soil & Water
541 Conservation, 41, 122-125, 1986.

542 Jin, S., Yang, L., Danielson, P., Homer, C., Fry, J., and Xian, G.: A comprehensive change detection method for
543 updating the national land cover database to circa 2011, Remote Sensing of Environment, 132, 159-175,
544 2013.

545 Johnston, C. A.: Wetland losses due to row crop expansion in the dakota prairie pothole region, Wetlands, 33, 175-
546 182, 10.1007/s13157-012-0365-x, 2013.

547 Keddy, P. A.: Wetland ecology: principles and conservation, Cambridge University Press, 2010.

548 Klemas, V.: Remote sensing of wetlands: case studies comparing practical techniques, Journal of Coastal Research,
549 27, 418-427, 2011.

550 Kweon, I. S., and Kanade, T.: Extracting topographic terrain features from elevation maps, CVGIP: Image
551 Understanding, 59, 171-182, 10.1006/ciun.1994.1011, 1994.

552 Lane, C. R., and D'Amico, E.: Identification of Putative Geographically Isolated Wetlands of the Conterminous
553 United States, JAWRA Journal of the American Water Resources Association, n/a-n/a, 10.1111/1752-
554 1688.12421, 2016.

555 Lang, M., and McCarty, G.: Lidar intensity for improved detection of inundation below the forest canopy, Wetlands,
556 29, 1166-1178, 10.1672/08-197.1, 2009.

557 Lindsay, J. B., and Creed, I. F.: Distinguishing actual and artefact depressions in digital elevation data, Computers
558 and Geosciences, 32, 1192-1204, 10.1016/j.cageo.2005.11.002, 2006.

559 McCauley, L., and Anteau, M.: Generating Nested Wetland Catchments with Readily-Available Digital Elevation
560 Data May Improve Evaluations of Land-Use Change on Wetlands, Wetlands, 1-10, 10.1007/s13157-014-
561 0571-9, 2014.

562 Metz, M., Mitasova, H., and Harmon, R.: Efficient extraction of drainage networks from massive, radar-based
563 elevation models with least cost path search, Hydrology and Earth System Sciences, 15, 667-678, 2011.

564 Miller, M. W., and Nudds, T. D.: Prairie landscape change and flooding in the Mississippi River Valley,
565 Conservation Biology, 10, 847-853, 1996.

566 Minke, A. G. N.: Estimating water storage of prairie pothole wetlands, University of Saskatchewan, 2009.

567 Mushet, D. M., and Euliss, N. H.: The Cottonwood Lake study area, a long-term wetland ecosystem monitoring site,
568 US Geological Survey2327-6932, 2012.

569 Mushet, D. M., Calhoun, A. J., Alexander, L. C., Cohen, M. J., DeKeyser, E. S., Fowler, L., Lane, C. R., Lang, M.
570 W., Rains, M. C., and Walls, S. C.: Geographically isolated wetlands: rethinking a misnomer, Wetlands, 35,
571 423-431, 2015.

572 O'Callaghan, J. F., and Mark, D. M.: The extraction of drainage networks from digital elevation data, Computer
573 vision, graphics, and image processing, 28, 323-344, 1984.

574 Oslund, F. T., Johnson, R. R., and Hertel, D. R.: Assessing Wetland Changes in the Prairie Pothole Region of
575 Minnesota From 1980 to 2007, Journal of Fish and Wildlife Management, 1, 131-135, 10.3996/122009-
576 JFWM-027, 2010.

577 Rover, J., and Mushet, D. M.: 16 Mapping Wetlands and Surface Water in the Prairie Pothole Region of North
578 America, Remote Sensing of Wetlands: Applications and Advances, 347, 2015.

579 Shaw, D. A., Vanderkamp, G., Conly, F. M., Pietroniro, A., and Martz, L.: The fill-spill hydrology of Prairie
580 wetland complexes during drought and deluge, Hydrological Processes, 26, 3147-3156, 2012.

581 Shaw, D. A., Pietroniro, A., and Martz, L.: Topographic analysis for the prairie pothole region of Western Canada,
582 Hydrological Processes, 27, 3105-3114, 2013.

583 Sloan, C. E.: Ground-water hydrology of prairie potholes in North Dakota, Professional Paper 585-C, U.S.
584 Government Printing Office Washington, D.C., USA, 1972.

585 Stanislawski, L. V.: Feature pruning by upstream drainage area to support automated generalization of the United
586 States National Hydrography Dataset, Computers, Environment and Urban Systems, 33, 325-333,
587 <http://dx.doi.org/10.1016/j.compenvurbsys.2009.07.004>, 2009.

588 Steen, V., Skagen, S. K., and Noon, B. R.: Vulnerability of Breeding Waterbirds to Climate Change in the Prairie
589 Pothole Region, U.S.A, PLoS ONE, 9, e96747, 10.1371/journal.pone.0096747, 2014.

590 Stein, A., Pebesma, E., Heuvelink, G., Melles, S. J., Jones, N. E., Schmidt, B., and Rayfield, B.: Spatial Statistics
591 2011: Mapping Global Change A least-cost path approach to stream delineation using lakes as patches and a
592 digital elevation model as the cost surface, *Procedia Environmental Sciences*, 7, 240-245,
593 <http://dx.doi.org/10.1016/j.proenv.2011.07.042>, 2011.

594 Tiner, R.: Geographically isolated wetlands of the United States, *Wetlands*, 23, 494-516, 10.1672/0277-
595 5212(2003)023[0494:GIWOTU]2.0.CO;2, 2003.

596 Tiner, R. W.: NWI maps: what they tell us, *National Wetlands Newsletter*, 19, 7-12, 1997.

597 Todhunter, P. E., and Rundquist, B. C.: Terminal lake flooding and wetland expansion in Nelson County, North
598 Dakota, *Phys. Geogr.*, 25, 68-85, 2004.

599 Tromp-van Meerveld, H. J., and McDonnell, J. J.: Threshold relations in subsurface stormflow: 1. A 147-storm
600 analysis of the Panola hillslope, *Water Resources Research*, 42, n/a-n/a, 10.1029/2004WR003778, 2006a.

601 Tromp-van Meerveld, H. J., and McDonnell, J. J.: Threshold relations in subsurface stormflow: 2. The fill and spill
602 hypothesis, *Water Resources Research*, 42, n/a-n/a, 10.1029/2004WR003800, 2006b.

603 U.S. EPA: Connectivity and effects of streams and wetlands on downstream waters: A review and synthesis of the
604 scientific evidence, U.S. Environmental Protection Agency, Washington, D.C., 2015.

605 Vanderhoof, M., Alexander, L., and Todd, M. J.: Temporal and spatial patterns of wetland extent influence
606 variability of surface water connectivity in the Prairie Pothole Region, United States, *Landscape Ecology*,
607 31, 805–824, 10.1007/s10980-015-0290-5, 2016.

608 Vanderhoof, M., Distler, H., Mendiola, D., and Lang, M.: Integrating Radarsat-2, Lidar, and Worldview-3 Imagery
609 to Maximize Detection of Forested Inundation Extent in the Delmarva Peninsula, USA, *Remote Sensing*, 9,
610 105, 2017.

611 Wang, C.-K., and Philpot, W. D.: Using airborne bathymetric lidar to detect bottom type variation in shallow waters,
612 *Remote Sensing of Environment*, 106, 123-135, 2007.

613 Wang, L., and Liu, H.: An efficient method for identifying and filling surface depressions in digital elevation models
614 for hydrologic analysis and modelling, *International Journal of Geographical Information Science*, 20, 193-
615 213, 2006.

616 Watmough, M. D., and Schmoll, M. J.: Environment Canada's Prairie & Northern Region Habitat Monitoring
617 Program, Phase II: Recent Habitat Trends in the Prairie Habitat Joint Venture, Canadian Wildlife Service,
618 2007.

619 Winter, T.: Hydrologic studies of wetlands in the northern prairie, in: *Northern Prairie Wetlands*, edited by: Van Der
620 Valk, A. G., Iowa-State University Press, Ames, IA, 1989.

621 Winter, T. C., and Rosenberry, D. O.: The interaction of ground water with prairie pothole wetlands in the
622 Cottonwood Lake area, east-central North Dakota, 1979-1990, *Wetlands*, 15, 193-211, 1995.

623 Wright, C. K., and Wimberly, M. C.: Recent land use change in the Western Corn Belt threatens grasslands and
624 wetlands, *Proceedings of the National Academy of Sciences*, 110, 4134-4139, 2013.

625 Wu, Q., Lane, C., and Liu, H.: An Effective Method for Detecting Potential Woodland Vernal Pools Using High-
626 Resolution LiDAR Data and Aerial Imagery, *Remote Sensing*, 6, 11444-11467, 10.3390/rs61111444, 2014.

627 Wu, Q., Liu, H., Wang, S., Yu, B., Beck, R., and Hinkel, K.: A localized contour tree method for deriving geometric
628 and topological properties of complex surface depressions based on high-resolution topographical data,
629 *International Journal of Geographical Information Science*, 29, 2041-2060,
630 10.1080/13658816.2015.1038719, 2015.

631 Wu, Q., and Lane, C. R.: Delineation and Quantification of Wetland Depressions in the Prairie Pothole Region of
632 North Dakota, *Wetlands*, 36, 215-227, 10.1007/s13157-015-0731-6, 2016.

633 Zhang, B., Schwartz, F. W., and Liu, G.: Systematics in the size structure of prairie pothole lakes through drought
634 and deluge, *Water Resources Research*, 45, 2009.

635 Zhao, L., and Wu, F.: Simulation of Runoff Hydrograph on Soil Surfaces with Different Microtopography Using a
636 Travel Time Method at the Plot Scale, *PloS one*, 10, e0130794, 2015.

637 Zhu, X.: *GIS for Environmental Applications: A Practical Approach*, Routledge, 2016.

638

639 **Table 1.** Summary statistics of the National Wetlands Inventory (NWI) for the Pipestem subbasin, North Dakota.

640

Wetland type	Count	Min (10³ m²)	Max (10⁶ m²)	Median (10³ m²)	Sum (10⁶ m²)	Percentage (%)
Freshwater Emergent Wetland	31,046	0.50	3.1	1.8	241.7	86.5
Freshwater Forested/ Shrub Wetland	108	0.55	0.34	2.6	1.18	0.4
Freshwater Pond	760	0.53	0.72	1.8	14.7	5.3
Lake	50	3.7	9.4	188.6	21.1	7.5
Riverine	52	0.63	0.43	4.0	0.81	0.3
Total (all polygons)	32,016	0.50	9.4	1.8	279.5	100.0

641

642

643 **Table 2.** Summary statistics of NWI wetland polygons and inundation polygons derived from LiDAR intensity data.

644

Type	Count	Min (10³ m²)	Max (10⁶ m²)	Mean (10³ m²)	Median (10³ m²)	Sum (10⁶ m²)
NWI polygons	32,016	0.50	9.4	8.7	1.8	279.5
Inundation polygons	15,784	0.50	7.3	17.7	1.8	278.5
Dried NWI polygons	18,957	0.50	0.11	2.3	1.2	43.6

645

646 **Table 3.** Summary statistics of 33,241 wetland depressions and catchments derived from LiDAR DEM.

647

Type	Min	Max	Mean	Median	Sum
Depression area (m ²)	1.0×10^3	20.0×10^6	16.6×10^3	2.6×10^3	0.55×10^9
Catchment area (m ²)	1.8×10^3	57.9×10^6	82.7×10^3	26×10^3	2.77×10^9
Depression volume (m ³)	1	153×10^6	23.4×10^3	0.42×10^3	0.78×10^9
Proportion of depression area to catchment area (%)	0.04	83.72	16.59	14.31	20.06


648

649 **Table 4.** Summary statistics of wetland depression ponding depth, NHD flowlines, flow path length, and elevation
650 difference.

651


Type	Count	Min (m)	Max (m)	Mean (m)	Median (m)	Sum (m)
Ponding depth	33,241	0.01	7.6	0.23	0.16	NA
NHD flowlines	1840	3.9	15.5×10^3	762	317	1.4×10^6
Flow path length	41,449	1.5	4.7×10^3	138	83	5.0×10^6
Elevation difference	41,449	0.01	70.9	2.1	0.89	NA

652

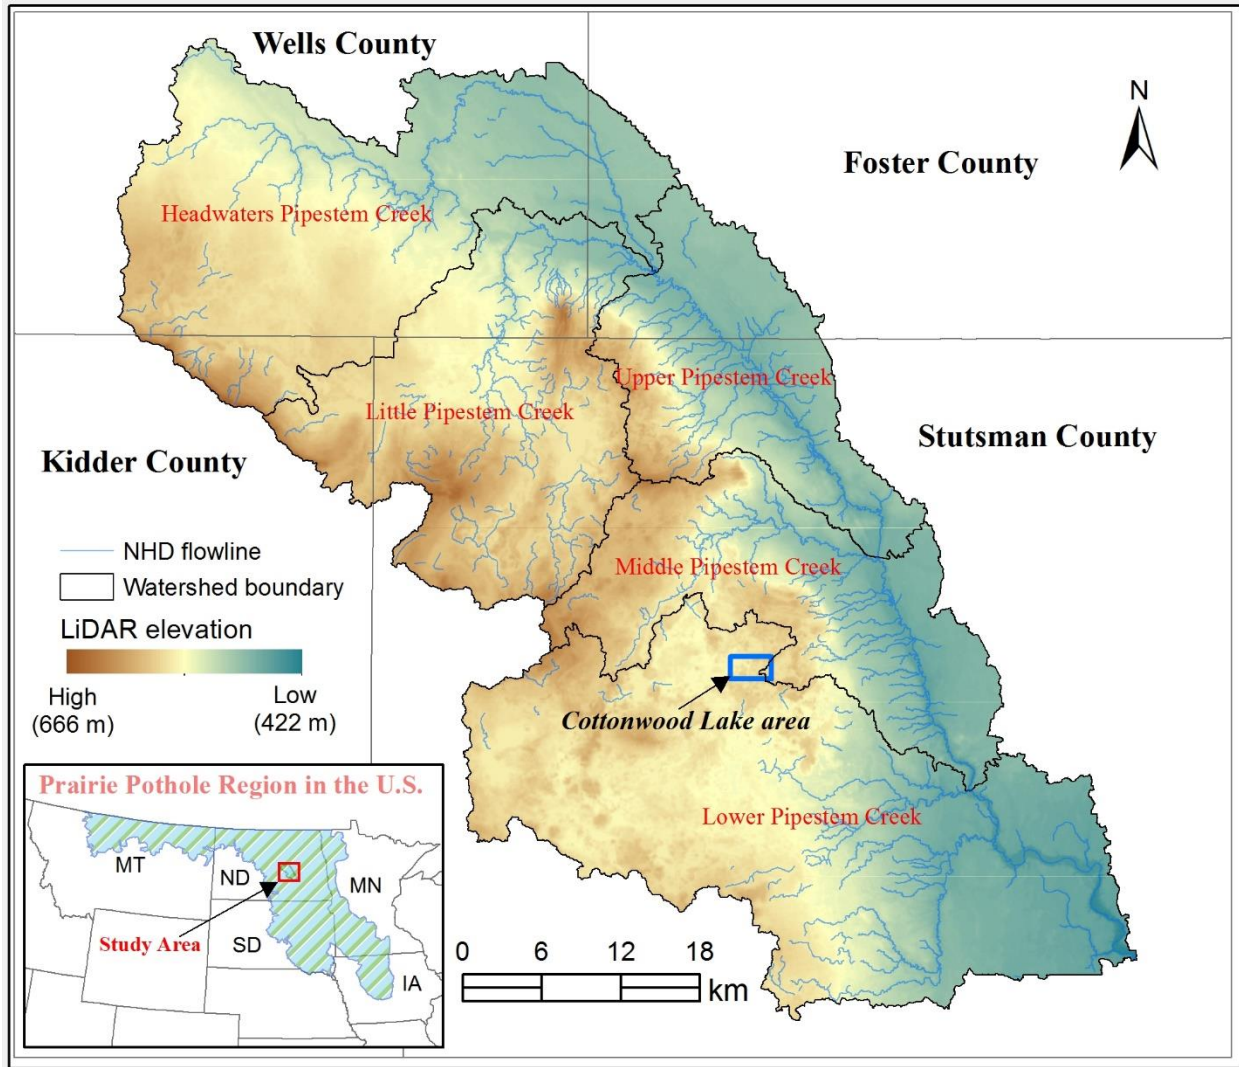

653

654 **Figure 1.** Location of the Pipestem subbasin within the Prairie Pothole Region of North Dakota.

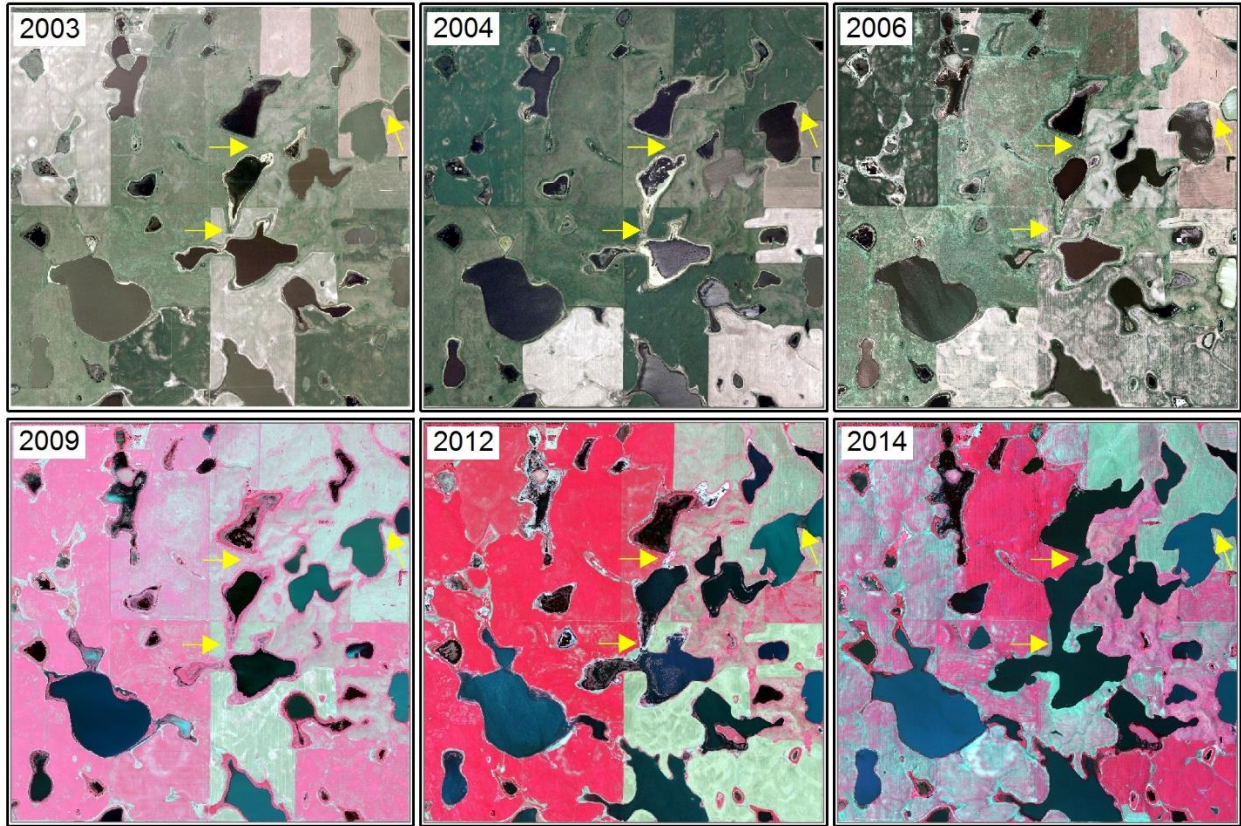

655

656 **Figure 2.** Examples of the National Agriculture Imagery Program (NAIP) aerial imagery in the Prairie Pothole
 657 Region of North Dakota illustrate the dynamic nature of prairie pothole wetlands under various dry and wet
 658 conditions. The yellow arrows highlight locations where filling-spilling-merging dynamics occurred (imagery
 659 location: 99°8'34.454" W, 47°1'23.519" N).




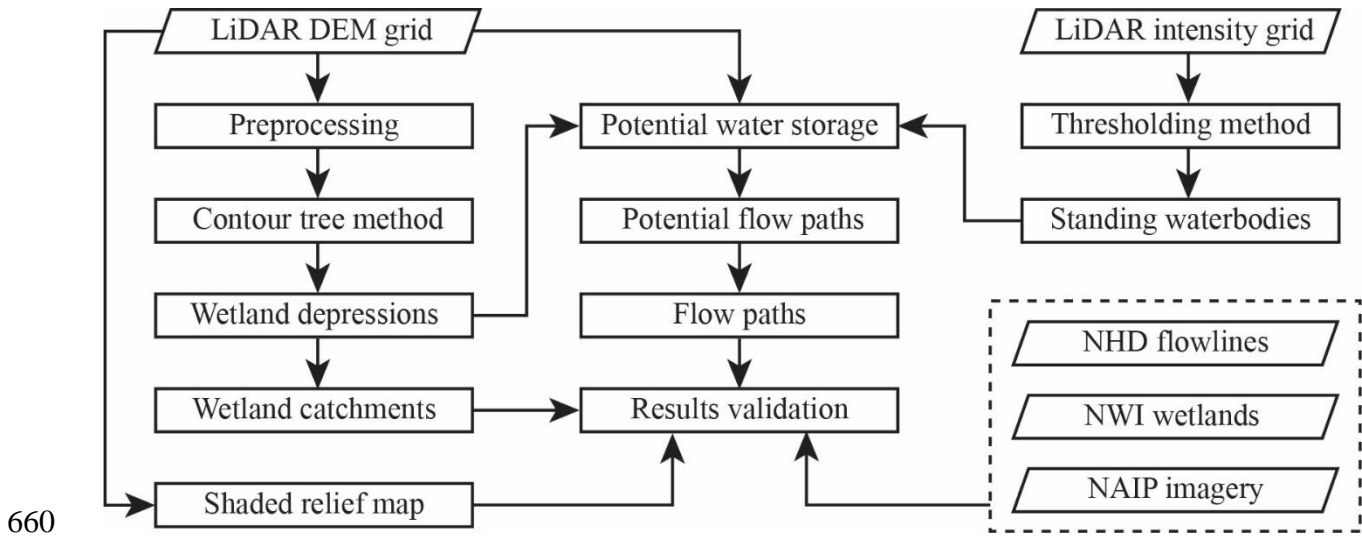


Figure 3. Flowchart of the methodology for delineating wetland catchments and flow paths.

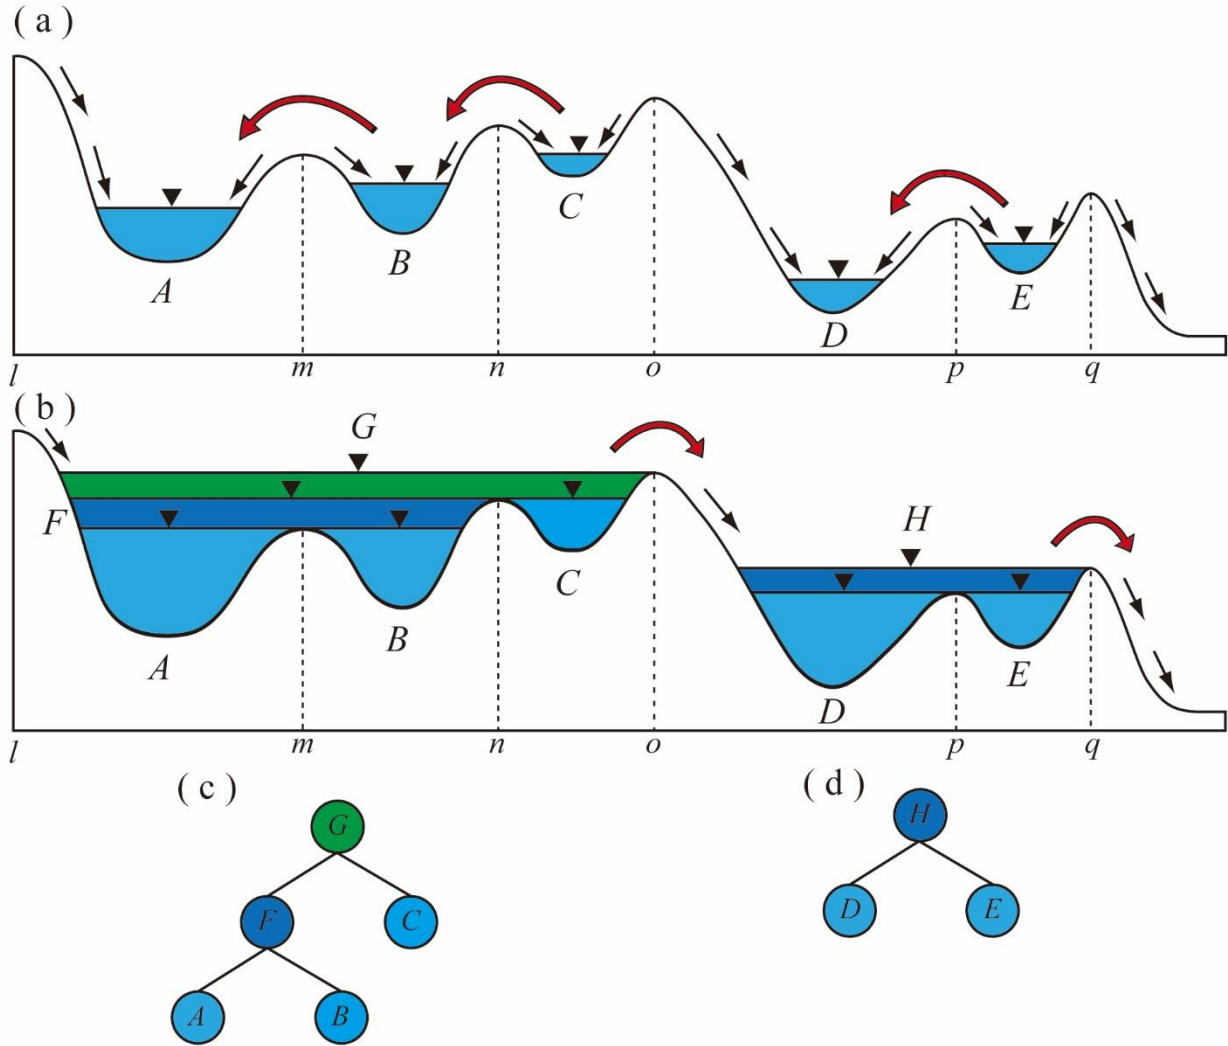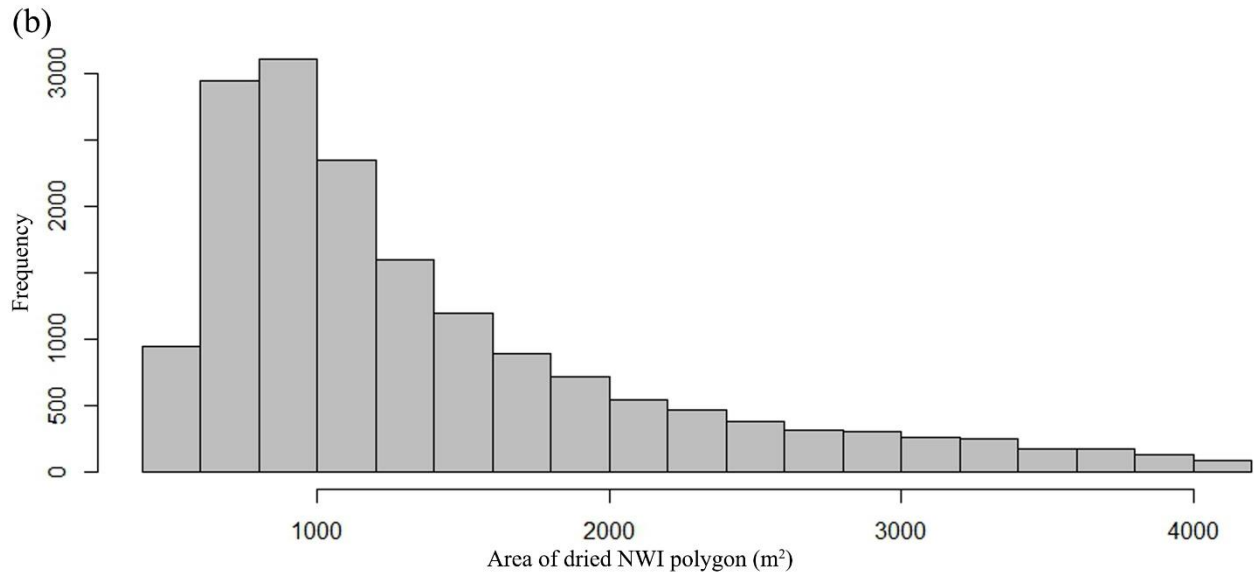


662

663 **Figure 4.** Illustration of the filling-merging-spilling dynamics of wetland depressions: (a) first-level depressions; (b)
 664 nested hierarchical structure of depressions under fully-filled condition; (c) corresponding contour tree
 665 representation of the composite wetland depression (left) in (a); and (d) corresponding contour tree representation of
 666 the composite wetland depression (right) in (a). Different color of nodes in the tree represents different portions of
 667 the composite depression in (a): light blue (first-level), dark blue (second-level), and green (third-level).

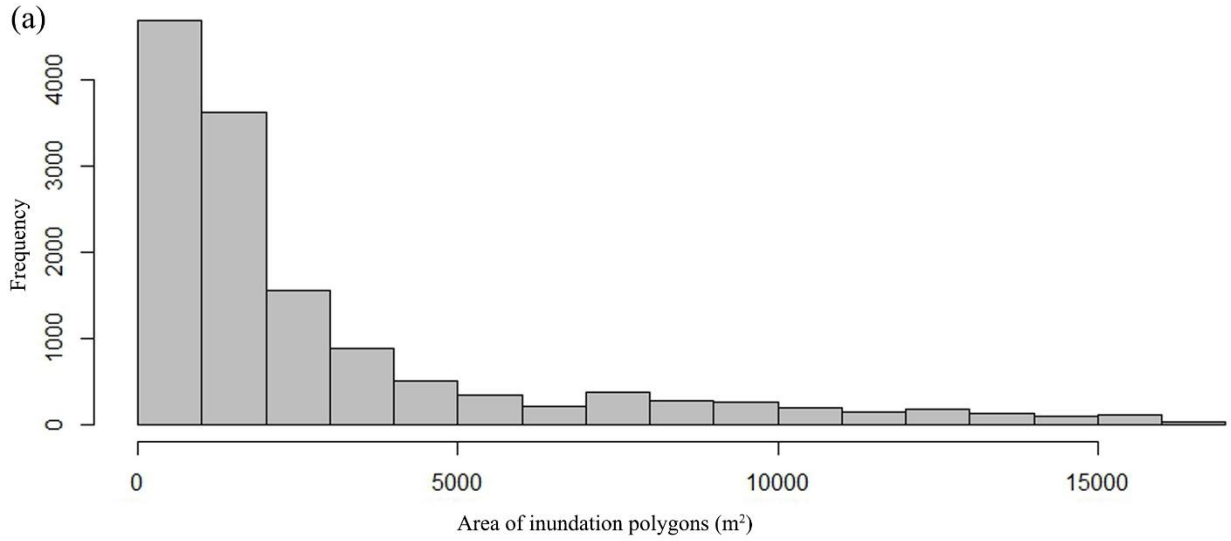

670 **Figure 5.** Histograms of inundation and NWI wetland polygons. (a) Inundation objects derived from LiDAR
 671 intensity data; (b) dried NWI wetland polygons not intersecting inundation objects.

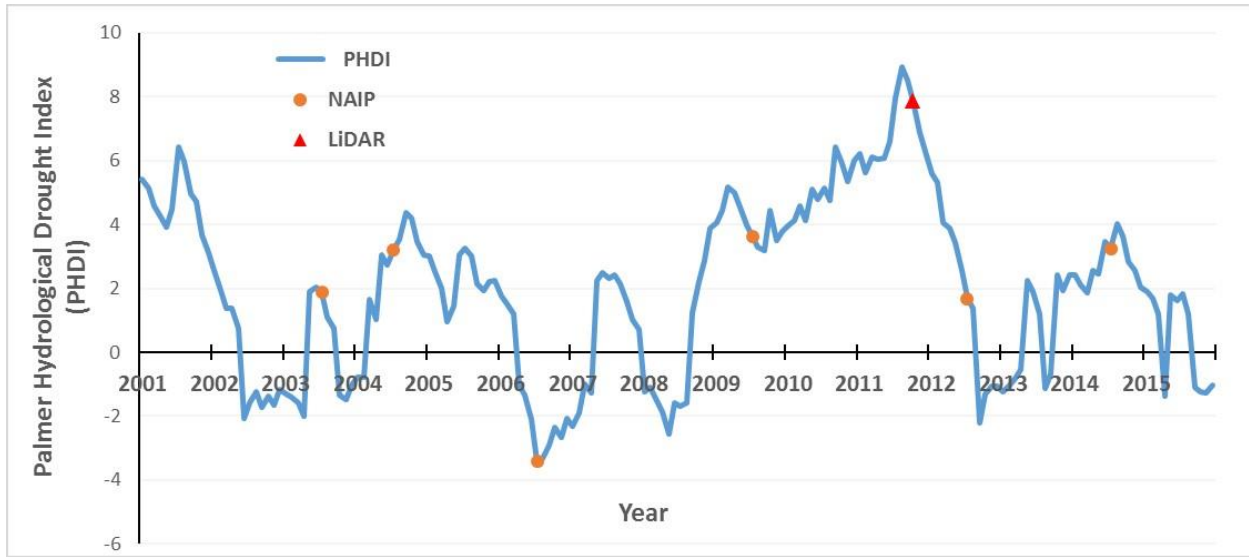


672


673

Figure 6. Palmer Hydrological Drought Index (PHDI) of the Pipestem subbasin (2001-2015).


674

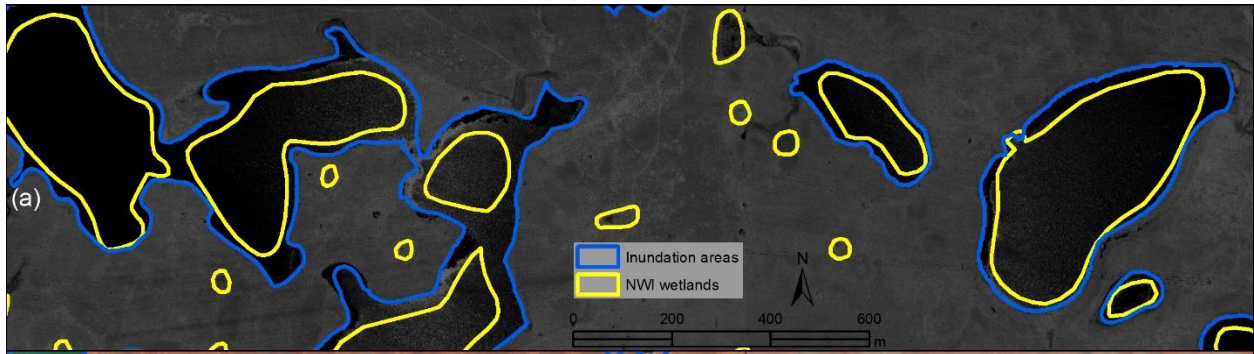


675

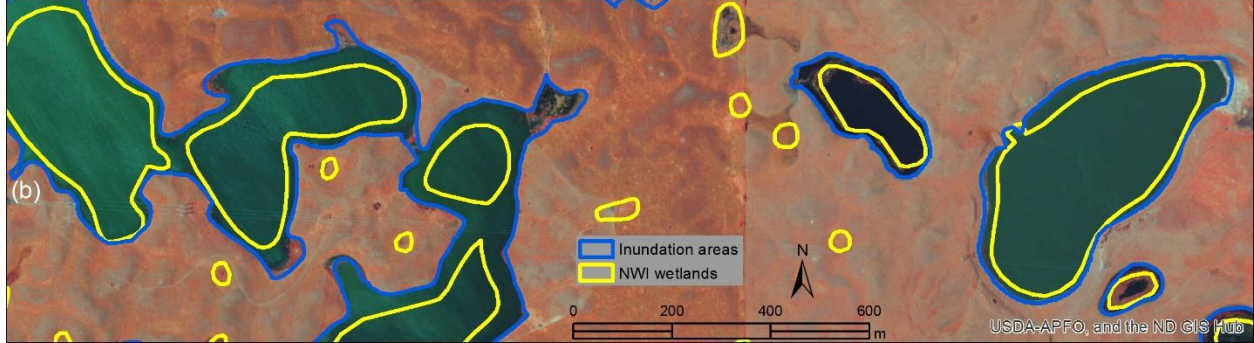


676 **Figure 7.** Comparison between inundation areas (derived from LiDAR intensity data) and NWI wetland polygons
677 (image location: 99°9'53.9" W, 47°3'34.474" N). (a) Inundation areas and NWI wetlands overlaid on LiDAR
678 intensity image; and (b) inundation areas and NWI wetlands overlaid on color infrared aerial photograph (2009).

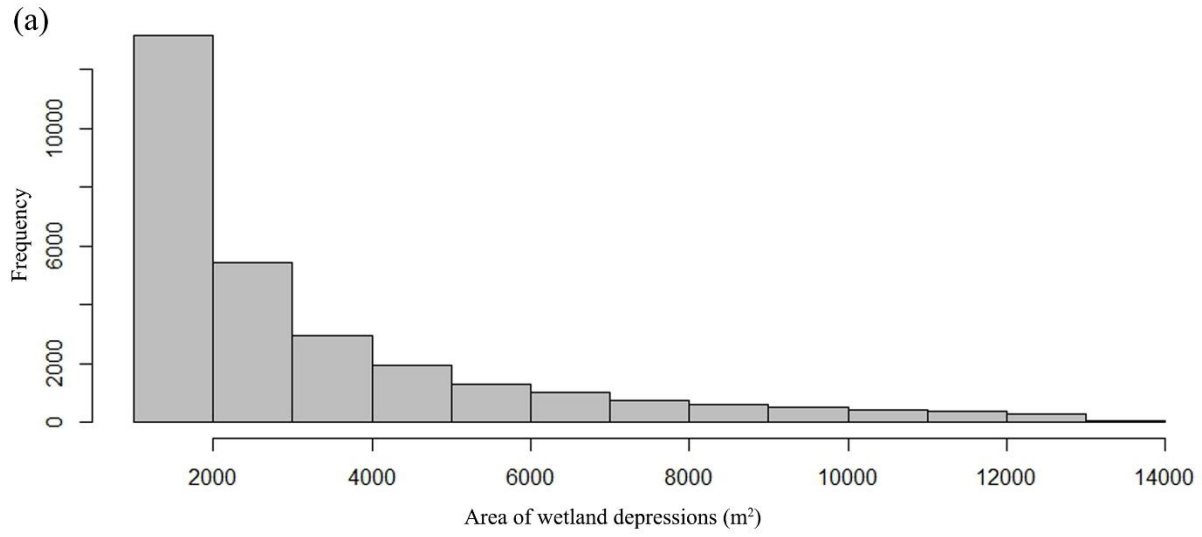


679

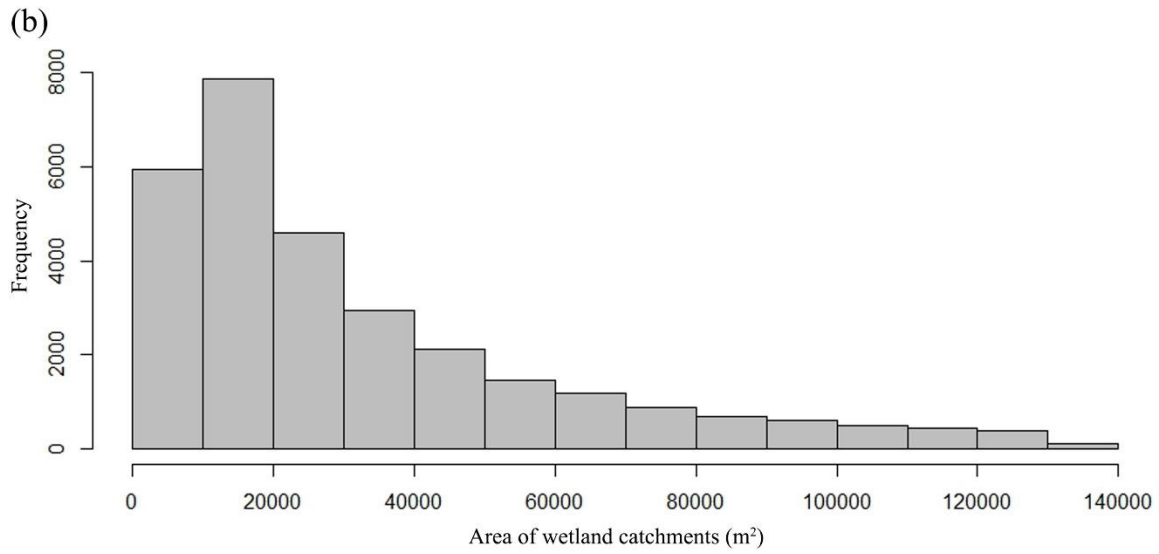


680

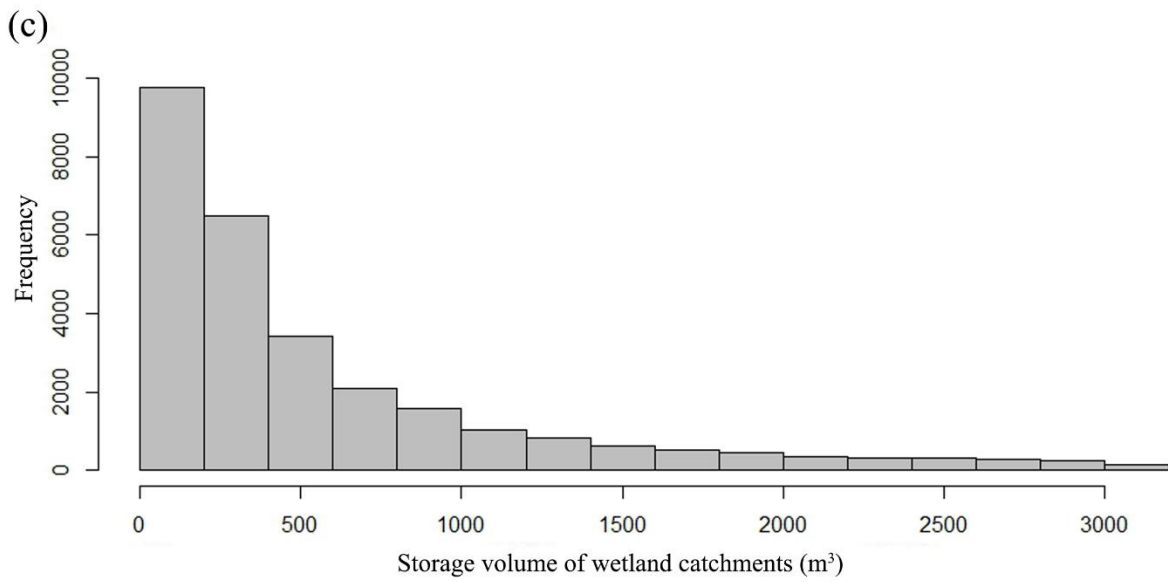

681

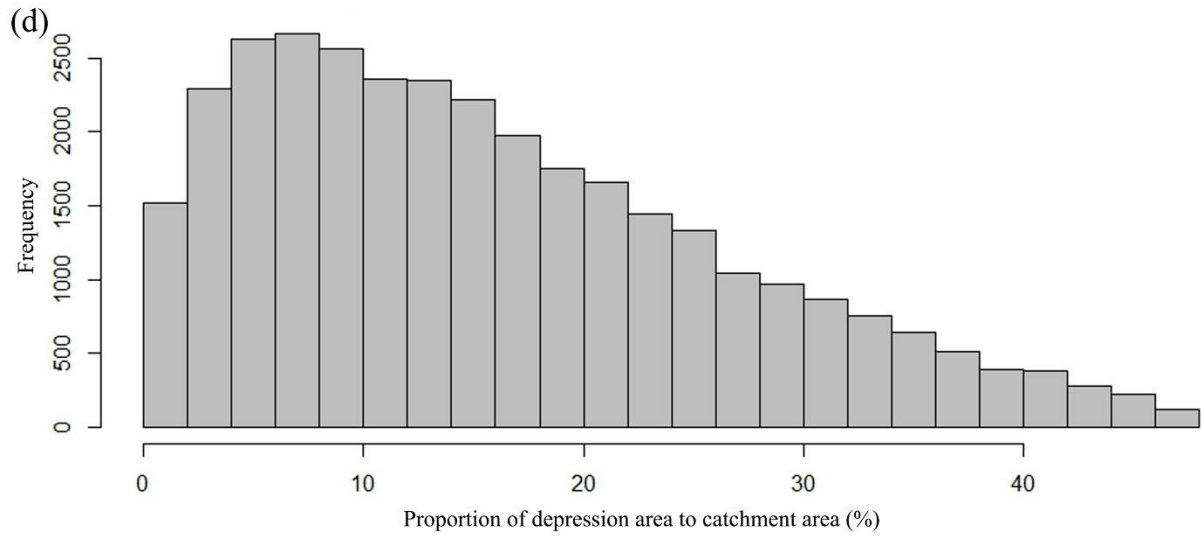


682
683 **Figure 8.** Histogram of wetland depressions and catchments. (a) Wetland depressions; (b) wetland catchments; (c)
684 potential storage capacity; and (d) proportion of depression area to catchment area.

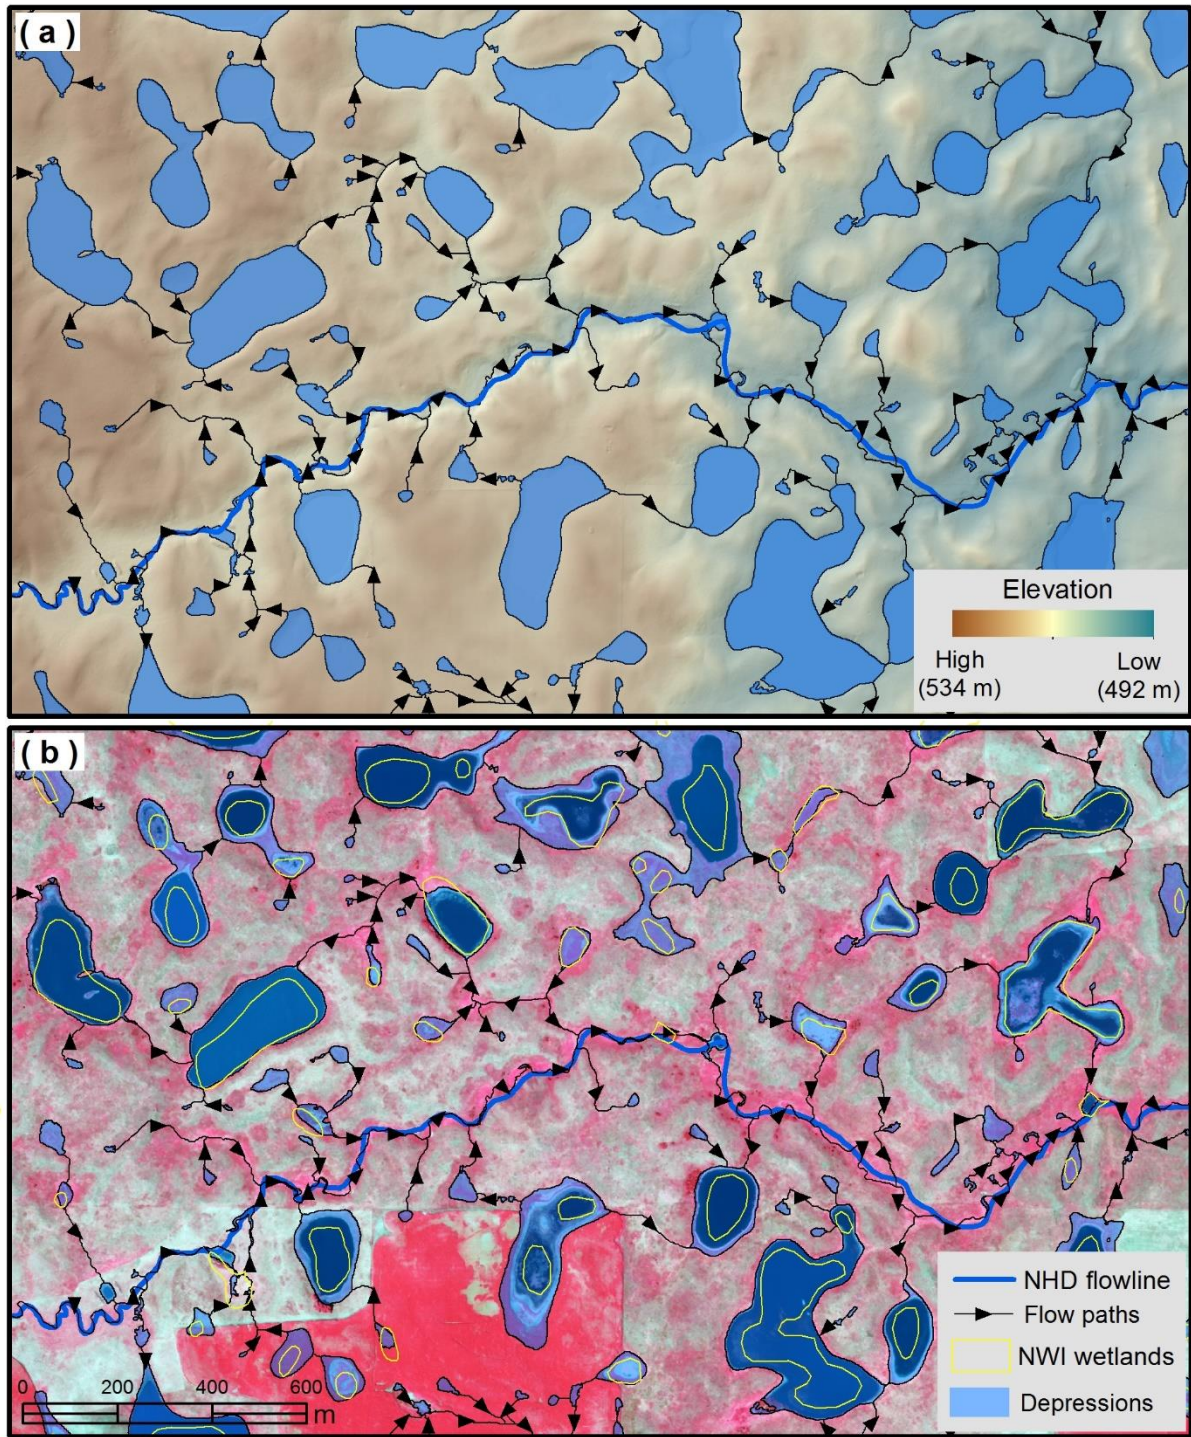


685

686 **Figure 9.** Examples of LiDAR-derived wetland depressions and flow paths in the Pipestem subbasin (image
 687 location: 98°59'48.82" W, 47°1'32.679" N). (a) Wetland depressions and flow paths overlaid on LiDAR shaded
 688 relief map; and (b) NWI polygons, wetland depressions and flow paths overlaid on color infrared aerial photograph
 689 (2012).

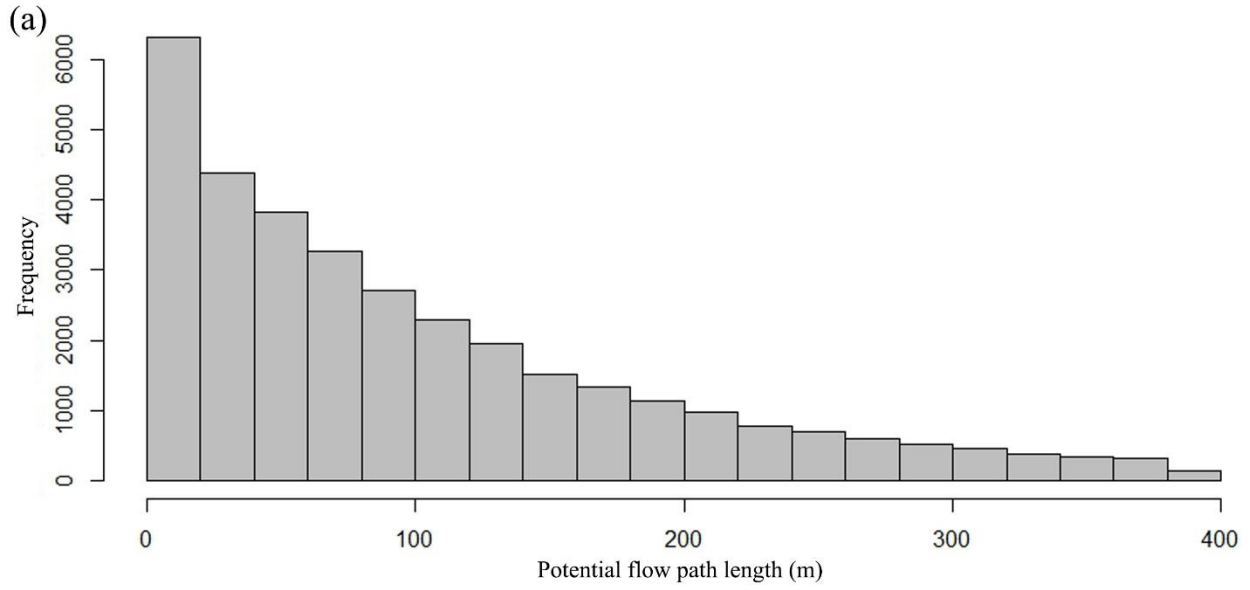

690

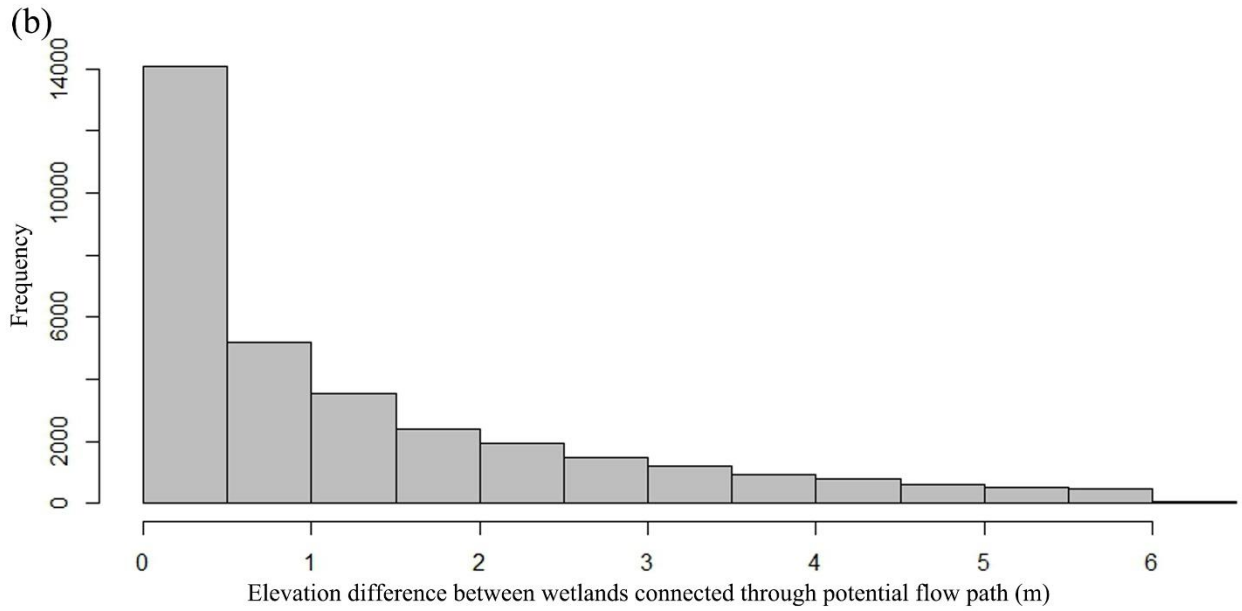

691

692 **Figure 10.** Histogram of potential wetland connectivity. (a) Potential flow path lengths; and (b) elevation
 693 differences between wetlands connected through potential flow paths.