

1 **Minimum forest cover required for sustainable water flow regulation of a watershed: a**
2 **case study in Jambi Province, Indonesia.”**

3 Suria Tarigan¹, Kerstin Wiegand², Sunarti³, Bejo Slamet⁴

4 ¹Department of Soil Sciences and Natural Resource Management, Bogor Agricultural
5 University, Indonesia

6 ²Department of Ecosystem Modeling, University of Göttingen, Büsgenweg 4, 37077
7 Göttingen, Germany

8 ³Faculty of Agriculture, University of Jambi, Jambi, Indonesia

9 ⁴Faculty of Agriculture, North Sumatra University, Medan, Indonesia

10 Correspondence to: Suria Tarigan (E-mail: sdtarigan@apps.ipb.ac.id)

11 **Abstract**

12 In many tropical regions, the rapid expansion of monoculture plantations has led to a sharp
13 decline in forest cover, potentially degrading the ability of watersheds to regulate water flow.
14 Therefore, regional planners need to determine the minimum proportion of forest cover that is
15 required to support adequate ecosystem services in these watersheds. However, to date, there
16 has been little research on this issue, particularly in tropical areas where monoculture
17 plantations are expanding at an alarming rate. Therefore, in this study, we investigated the
18 influence of forest cover and oil palm (*Elaeis guineensis*) and rubber (*Hevea brasiliensis*)
19 plantations on the partitioning of rainfall into direct runoff and subsurface flow in a humid,
20 tropical watershed in Jambi Province, Indonesia. To do this, we simulated ~~a~~-streamflow with
21 a calibrated Soil and Water Assessment Tool (SWAT) model and observed several
22 watersheds to derive the direct runoff coefficient (C) and baseflow index (BFI). The model
23 had a satisfactory performance, with Nash–Sutcliffe efficiency values of 0.80–0.88
24 (calibration) and 0.80–0.85 (validation), and percent bias values of –2.9 to 1.2 (calibration)
25 and 7.0–11.9 (validation). We found that the percentage of forest cover in a watershed was
26 significantly negatively correlated with C and significantly positively correlated with BFI,
27 whereas the rubber and oil palm plantation cover showed the opposite pattern. Our findings
28 also suggested that at least 30 % of the forest cover was required in the study area for
29 sustainable ecosystem services. This study provides new adjusted crop parameter values for

30 monoculture plantations, particularly those that control surface runoff and baseflow
31 processes, and also describes the quantitative association between forest cover and flow
32 indicators in a watershed, which will help regional planners in determining the minimum
33 proportion of forest and the maximum proportion of plantation to ensure that a watershed can
34 provide adequate ecosystem services.

35 **1 Introduction**

36 In recent years, monoculture plantations has rapidly expanded in Southeast Asia, and the
37 areas under oil palm (*Elaeis guineensis*) and rubber (*Hevea brasiliensis*) plantations are
38 expected to further increase (Fox et al., 2012; Van der Laan et al., 2016). In Indonesia, which
39 is currently the largest palm oil producer worldwide, the oil palm plantation area increased
40 from 0.7 million ha in 1990 to 11 million ha in 2015 (Ditjenbun, 2015; Tarigan et al., 2016),
41 and a further 1–28 million ha are projected to be required for palm oil production in 2020–
42 2050 (Wicke et al., 2011; Afriyanti et al., 2016). This rapid expansion of oil palm plantations
43 has been partly triggered by an increased demand for biofuel production (Mukherjee and
44 Sovacoo, 2014). In addition, rubber plantations, which are also prevalent in Southeast Asia
45 (Ziegler et al., 2009), currently cover 3.5 million ha of land in Indonesia (Ditjenbun, 2015).

46 Although oil palm is of economic value to farmers and the local regions in which it is
47 grown, it has received environmental and social criticism, often being held responsible for
48 deforestation (Wicke et al., 2011; Vijay et al., 2016; Gatto et al., 2017), biodiversity loss

49 (Fitzherbert et al., 2008; Koh and Wilcove, 2008; Wilcove and Koh, 2010; Carlson et al.,
50 2012; Krashevskaya et al., 2015), decreased soil carbon stocks (Guillaume et al., 2015, 2016;
51 Pransiska et al., 2016), and increased greenhouse gas emissions (Allen et al., 2015; Hassler et
52 al., 2017). Similarly, rubber plantations have environmental impacts such as reducing the soil
53 infiltration capacity, accelerating soil erosion, increasing stream sediment loads (Ziegler et
54 al., 2009; Tarigan et al., 2016), and decreasing soil carbon stocks (Ziegler et al., 2011).
55 Furthermore, the conversion of tropical rainforest into oil palm and rubber plantations affects
56 the local hydrological cycle by increasing transpiration (Ziegler et al., 2009; Sterling et al.,
57 2012; Röhl et al., 2015; Hardanto et al., 2017), increasing evapotranspiration (ET) (Meijide et
58 al., 2017), decreasing infiltration (Banabas et al., 2008; Tarigan et al., 2016), increasing the
59 flooding frequency (Tarigan, 2016), and decreasing low flow levels (Yusop et al., 2007;
60 Adnan and Atkinson, 2011; Comte et al., 2012; Merten et al., 2016). These climatic impacts
61 that occur owing to land use change are expected to be stronger under maritime conditions,
62 such as those in Indonesia, than under continental conditions because 40 % of the global
63 tropical latent heating of the upper troposphere occurs over the maritime continent (Van der
64 Molen et al., 2006).

65 The forests in Jambi Province, Indonesia have been largely transformed into plantations
66 (Drescher et al., 2016), resulting in inhabitants experiencing water shortages during the dry
67 season and a dramatic increase in flooding frequency during the wet season (Merten et al.,

68 2016; Tarigan, 2016) because plantations promote higher levels of direct runoff than forested
69 lands (Bruijnzeel, 1989, 2004; Tarigan et al., 2016; Dislich et al., 2017). However, this
70 negative impact of plantation expansion could be minimized by maintaining an adequate
71 proportion of forested land as a watershed, which raises the question, what is the minimum
72 proportion of forest cover that is required in a watershed to support adequate water flow
73 regulation?

74 The water flow regulation function of watersheds represents their ability to retain rain
75 water and is one of the most important soil hydrological processes in tropical regions where
76 rainfall is highly seasonal (Lele, 2009). Functional water flow regulation by a watershed
77 reduces flood peaks by moderating direct runoff~~s~~ (Le Maitre et al., 2014; Ellison et. al, 2017)
78 via soil water infiltration through the soil surface and percolation through the soil profile.
79 This vertical movement of water through the soil determines how much water flows as direct
80 runoff~~s~~ and how much reaches the water table where it sustains~~s~~ as baseflow or groundwater
81 (Hewlett and Hibbert, 1967; Bruijnzeel, 1990; Le Maitre et al., 2014; Tarigan et al., 2016).
82 Forest vegetation provides organic matter and habitat for soil organisms, thereby facilitating
83 higher levels of infiltration than other land uses (Hewlett and Hibbert, 1967).

84 A number of empirically based and process-based approaches can be used for assessing
85 the impacts of expanding rubber and oil palm plantations on hydrological characteristics in
86 the Southeast Asia region. Empirically based approaches use long-term historical data to

87 correlate land use changes with corresponding streamflow data (Adnan and Atkinson, 2011;
88 Rientjes et al., 2011; Mwangi et al., 2016) or paired catchment studies (Bosch and Hewlett,
89 1982; Brown et al., 2005), whereas process-based approaches use physically based
90 hydrological models in which the impact of land use changes is determined by varying the
91 land use/cover settings (Khoi and Suetsugi, 2014; Guo et al., 2016; Zhang et al., 2016;
92 Marhaento et al., 2017; Wangpimool et al., 2017). Process-based approaches have the
93 drawback of requiring more data to be input and having high uncertainty in parameter
94 estimation (Xu et al., 2014; Zhang et al., 2016). However, there is currently an absence of
95 long-term historical data for Jambi Province, precluding the use of an empirically based
96 approach.

97 Distributed hydrological models are useful for understanding the effects of land use
98 changes on watershed flow regulation. One such model is the Soil and Water Assessment
99 Tool (SWAT) ecohydrological model (2012), which quantifies the water balance of a
100 watershed on a daily basis (Neitsch et al., 2011) and has been recommended for evaluating
101 the hydrological ecosystem services of a watershed (Vigerstol and Aukema, 2011). The
102 SWAT model approach is one of the most widely used and scientifically accepted tools for
103 assessing water management in a watershed (Gassman et al., 2007). Consequently, its
104 popularity has also increased in Southeast Asia; Marhaento et al. (2017) recently used the
105 SWAT model to analyze the impact of forest cover and agriculture land use on the runoff

106 coefficient (C) and baseflow index (BFI) on Java Island, Indonesia and found that a decrease
107 in forest cover from 48.7 % to 16.9 % and an increase in agriculture area from 39.2 % to 45.4
108 % increased C from 35.7 % to 44.6 % and decreased BFI from 40 % to 31.1 %. Meanwhile,
109 Wangpimool et al. (2017) found that the expansion of rubber plantations in Thailand between
110 2002 and 2009 led to an annual reduction of approximately 3 % in the average water yield of
111 the basin, whereas Babel et al. (2011) found that the expansion of oil palm plantations in
112 Thailand increased nitrate loading (1.3 %–51.7 %) in the surface water based on SWAT
113 simulations. Tarigan et al. (2016) also used the SWAT model to simulate the impact of soil
114 and water conservation practices on low flow levels in oil palm-dominated watersheds in
115 Jambi Province, Indonesia. This study aimed to quantify the minimum proportion of forest
116 cover that is required to allow a watershed to provide adequate ecosystem services. We
117 selected Jambi Province as our study area because of the rapid expansion of oil palm and
118 rubber plantations in that area. The study findings provide new adjusted values for crop
119 parameters of monoculture plantations, particularly those that control surface runoff and
120 baseflow processes, and describe the quantitative association between forest cover and flow
121 indicators in a watershed, which will help regional planners in determining the minimum
122 proportion of forest that needs to be conserved to ensure that a watershed can provide
123 adequate ecosystem services.

124


125 2 Methods

126 2.1 Study area

127 The study area ~~was~~ located in Jambi Province, Sumatra (1° 54' 31.4" S, 103° 16' 7.9" E, Fig.
128 1). There has been a rapid expansion of plantations in this area, particularly oil palm and
129 rubber (Drescher et al., 2016). The area has a tropical humid climate, with an average
130 temperature of 27 °C and an average rainfall of 2700 mm year⁻¹. The rainy season occurs
131 from October to March. The area under oil palm plantation in the study area (Jambi Province)
132 increased from 150 000 ha in 1996 to 600 000 ha in 2011, representing an almost 400 %
133 increase (Setiadi et al., 2011), whereas the area under rubber plantation increased from 500
134 000 to 650 000 ha over the same period (Ditjenbun, 2015). In 2013, only 30 % of Jambi
135 Province was covered with rainforest (mainly located in mountainous regions), with 55 % of
136 the land having been converted into agricultural land, of which 10 % was degraded/fallow
137 and will potentially be converted into monoculture plantations (Drescher et al., 2016).

138 The study area consists of two macro watersheds for the simulation of the C and BFI
139 values with the SWAT model, namely Batanghari Hulu (BH; Fig. 1a) and Merangin Tembesi
140 (MT; Fig. 1b) watersheds, which cover areas of 18 415 km² and 13 452 km², respectively.
141 The dominant land uses in both watersheds are forest (BH, 50 %; MT, 30 %) and plantation
142 (BH, 18 %; MT, 48 %). ~~Tropodult and Dystrypept dominate soils in the study area with~~
143 ~~medium to heavy texture.~~

144 To ensure that the C and BFI values obtained from the macro watershed simulations
145 (particularly those sub-watersheds that were dominated by oil palm or rubber) reflected the
146 real observed values in the field, we carried out the direct C measurements in two small
147 watersheds in the study area (Fig. 1c). These small watersheds were covered with 90 % oil
148 palm and 80 % rubber plantations, respectively.

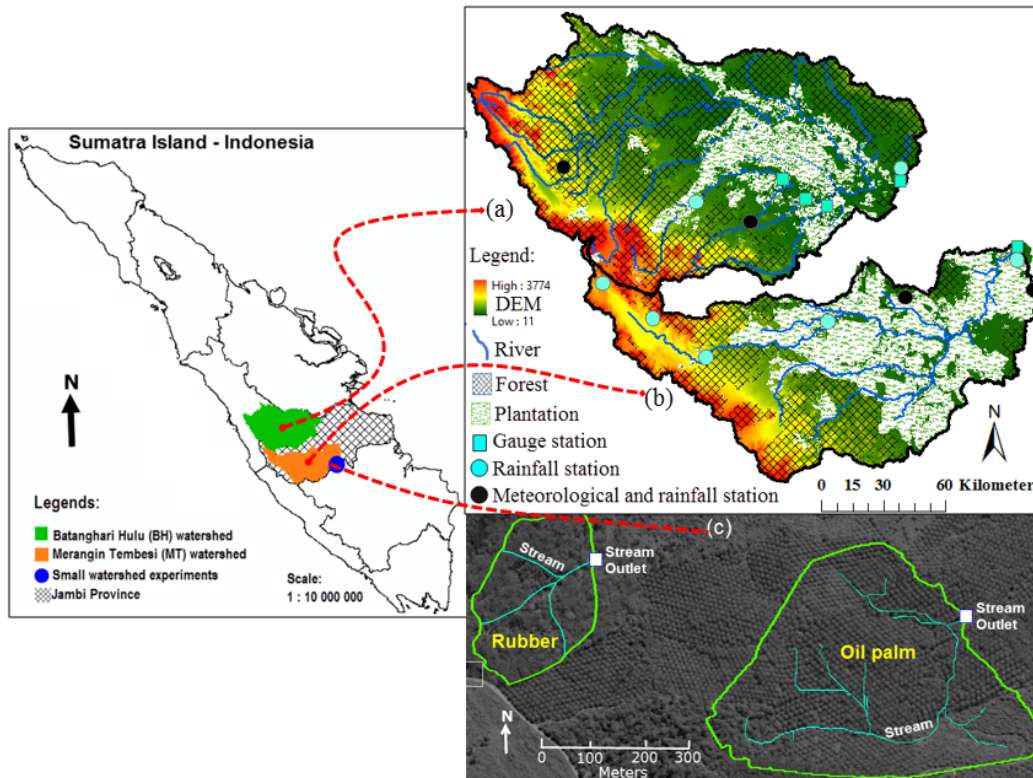

149
150 Figure 1. Locations of the (a, b) macro and (c) small watershed experiments in Jambi
151 Province, Sumatra, Indonesia.

152 Oil palm and rubber are perennial crops that have a life cycle of 25 years. Both crops are
153 planted in rows at planting distances of 8 and 4 m, respectively. In oil palm plantations, there
154 are two types of paths between the planting rows: the harvest path, which is used to transport
155 freshly harvested fruit bunches, and the so-called death path, which is used for piling pruned
156 leaf fronds, which occupy approximately 2 m or one-quarter of this path. Both oil palm and
157 rubber require very intensive harvesting activities, which occur twice per month for oil palm
158 and almost daily for rubber; thus, soils along the harvest path and part of the death path are
159 very compacted. The soils under oil palm and rubber plantations remain unploughed for the
160 entire growing period. Weeds in the oil palm plantations are regularly eradicated using
161 herbicides or mechanical equipment. Intensive inorganic fertilization ($1000 \text{ kg ha}^{-1} \text{ year}^{-1}$)
162 also occurs, contributing to the degradation of the soil structure and fauna

163 **2.2 SWAT model**

164 The SWAT model is a continuous long-term yield model that was developed to simulate the
165 impact of different land cover/management practices on streamflow in complex watersheds
166 with varying soil, land use, and management conditions over long time periods. The major
167 model components include weather, hydrology, soil temperature, soil properties, plant
168 growth, nutrients, and land management (Neitsch et al., 2011; Arnold et al., 2012).

169 During the modeling process, the watershed is subdivided into several sub-watersheds,
170 which are themselves further partitioned into hydrological response units (HRUs) that are

171 defined by their topography, soil, and land use characteristics. The hydrological outputs of
172 HRUs are calculated using the water balance equation and include total streamflow, surface
173 flow and baseflow. These output components can then be used to calculate indicators of the
174 water flow regulation functions of a watershed, namely C, which is the ratio of direct runoff
175 to rainfall, and BFI, which is the proportion of baseflow in the streamflow.

176 Because the SWAT model was designed for temperate regions, adapting crop parameter
177 inputs for use in tropical regions is necessary (Van Griensven et al., 2014). To avoid incorrect
178 parameterization of sensitive values, we carried out field measurements for interception,
179 infiltration, and surface runoff to adapt the parameter values, particularly those that control
180 surface runoff and baseflow processes. We then performed SWAT model simulation in two
181 study watersheds and conducted small watershed experiments to compare the observed C
182 values with those obtained from simulations.

183 **2.2.1 Model setup**

184 Delineation of watersheds and their sub-watersheds in our study area was automatically
185 performed by the SWAT model and was based on a digital elevation model (DEM) with a 30
186 m resolution. During this automatic delineation, we pre-defined 50 000 ha as a threshold for
187 the minimum sub-watershed area, based on which the BH and MT watersheds were
188 ~~subdivided~~ into 25 and 23 sub-watersheds, respectively.

189 **Crop parameters**

190 Oil palm plantations exhibit specific characteristics, particularly with respect to rainfall
191 partitioning. These characteristics include high interception, high ET, low soil infiltration,
192 high proportion of surface runoff, and absence of leaf litter, of which the first four can
193 potentially reduce baseflow. Therefore, to consider these specific characteristics, we
194 conducted field measurements and adjusted several crop parameters that are related to flow
195 components, including canopy storage (CANMX), plant uptake compensation factor (EPCO),
196 hydrologic soil group (HSG) and Soil Conservation Service (SCS) curve number (CN).


197 **a) Interception**

198 CANMX is the maximum amount of water that can be stored in the canopy and trunks of
199 fully developed trees. Thus, an increase in this parameter reflects a reduction in the amount of
200 rainfall that reaches the ground. In oil palms, rainfall is intercepted not only by leaves and
201 branches but also by water reservoirs in leaf axils along the trunk. Therefore, we measured
202 the water storage capacity of leaf axils along the trunks of four 10–12 years old oil palm trees
203 with 10 replications per tree. We found that the leaf axils along the trunk can store up to 20 L
204 or 8.4 mm of water (Table 1), which matches previous reports that the leaf axils along oil
205 palm trunks have a high water storage capacity (Merten et al., 2016; Mejjide et al., 2017).

206 Table 1. Water storage capacity of the leaf axils along the trunks of oil palm trees

Replicate	Water storage (mm)			
	Tree 1	Tree 2	Tree 3	Tree 4
1	14.2	10.8	4.4	6.2
2	10.6	10.2	4.2	5.9
3	9.4	10.5	5.9	7.9
4	8.1	10.4	5.4	7.4
5	8.8	11.5	3.8	9.8
6	9.4	10.9	6.0	8.0
7	9.3	10.6	5.9	7.5
8	10.1	11.0	5.2	7.3
9	8.9	11.2	4.7	10.5
10	9.5	11.3	4.9	7.2
Average = 8.4 mm				

207 We also measured the canopy interception by oil palm, rubber, agroforest, and forest
 208 canopies between November 2012 and February 2013. Rainfall interception was assessed by
 209 measuring throughfall and stemflow and subtracting these from the incident rainfall. In total,
 210 there were 30 rainfall events during this time, representing light-to-heavy rain. We found that
 211 oil palm plantations tended to exhibit higher levels of canopy interception (Fig. 2), with our
 212 estimates falling within the range of values that were previously reported for tropical forests
 213 in Southeast Asia (commonly 10 %–30 %; Kumagai et al., 2005; Dietz et al., 2006). These
 214 interception assessments were used to adjust the CANMX parameter of the SWAT model
 215 (Table 2).

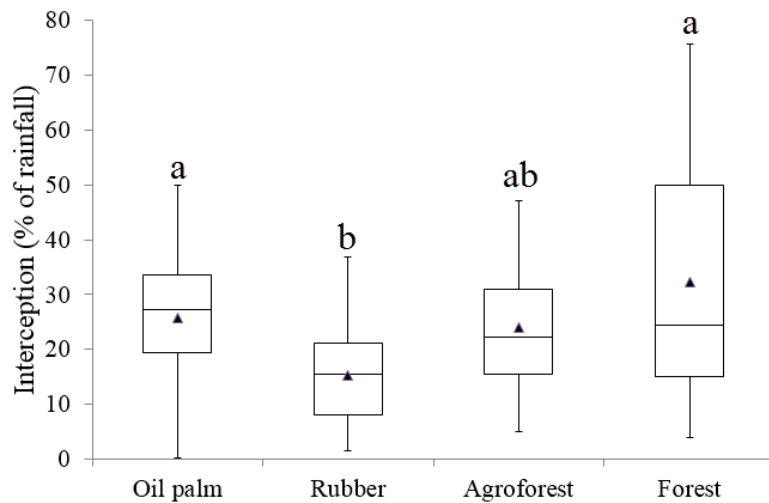

216

217 Figure 2. Canopy interception of rainfall under different land uses. Different letters indicate
 218 significant differences between the means (Bonferroni-corrected post hoc t-test based on
 219 ANOVA; $p < 0.05$).

220 **b) ET**

221 Actual ET was determined by measuring the daily depletion of soil moisture content at a
 222 distance of 2 m from the trunks of oil palm trees. Soil moisture measurements were made on
 223 consecutive no rain days over the 16-day period from 25 July, 2012 to 10 August, 2012. On
 224 an average, soil moisture decreased by 6 % (vol) over this period, which is equivalent to 72
 225 mm or 4.5 mm day^{-1} and is relatively high compared with the average land use in the study
 226 area. Similarly, Mejjide et al. (2017) also reported a yearly oil palm ET of 1216 mm (4.7 mm
 227 day^{-1}) using Edy covariance measurements in the study area. This ET rate is similar to or

228 even higher than ET rates for forests in Southeast Asia (Kumagai et al., 2005), despite oil
229 palm having a much lower stand density and biomass per hectare. Therefore, we accordingly
230 adjusted EPCO, which is related to ET (Table 2).

231 **c) Infiltration and surface runoff**

232 One important parameter of the SWAT model that is related to surface runoff is CN (Arnold
233 et al., 2012), which determines the proportion of rainfall that becomes surface runoff (range,
234 0–100, with a higher value reflecting a higher level of surface runoff). The CN value is
235 grouped into four HSGs (i.e., A, B, C, and D) according to the soil infiltration capacity. To
236 adjust the CN value, we measured soil infiltration and surface runoff in each land use type
237 (i.e., oil palm, rubber, agroforest, and forest) using a double-ring infiltrometer and
238 multidivisor runoff collectors mounted at the lower end of each plot, respectively. The
239 infiltration rate in different land-use types increases in the following order: oil palm harvest
240 path (3 cm h^{-1}) < oil palm circle (3 cm h^{-1}) < rubber harvest path (7 cm h^{-1}) < between rubber
241 trees (7.8 cm h^{-1}) < forest (47 cm h^{-1}). The infiltration in the oil palm, rubber plantations were
242 markedly lower than those at the forest. Low infiltration rate in the oil palm is associated with
243 the soil compaction due to the intensive harvest activities.

244 For all HRUs with oil palm and rubber land uses, we selected HSG category D (Table 2)
245 owing to its high surface runoff and low infiltration rate. We assumed that CN values of the

246 forest and agroforest were similar to those of the evergreen and mixed forest, respectively, in
 247 the SWAT crop database.

248 **d) Litter fall**

249 In the oil palm plantations, ~~we hardly found any litter~~ outside the frond piles. Litter fall in oil
 250 palm plantations does not naturally occur, but leaves are cut during fruit harvest and piled up
 251 in a frond pile, which occupies only 12 % of the entire oil palm plantation area.
 252 Consequently, the ground surface of oil palm plantations is ~~mostly clean~~ without litter,
 253 leading to higher surface runoffs. There was also ~~hardly any~~ understory vegetation (grasses)
 254 because herbicides were routinely sprayed. The absence of the litter fall affected Manning's
 255 "n" value for overland flow (OV_N).

256 Table 2. Adapted crop parameter inputs for the study area

SWAT parameter	Definition	Oil palm	Rubber	Agroforest	Forest
CANMX (mm)	Maximum trunk storage	8.4	0	0	0
	Maximum canopy storage	4.7	2.7	4.3	5.8
HYDGRP	Hydrologic soil group	D	D	B	C
CN2	Curve number	83	83	65	45
SOL_BD (g cm ⁻³)	Soil bulk density	1.2–1.3	1.2–1.3	1	0.9
EPCO	Plant uptake compensation factor	1	1	1	1
OV_N	Manning's "n" value for overland flow	0.07	0.14	0.4	0.5
SOL_K (mm h ⁻¹)	Saturated hydraulic conductivity	30	78	400	470
SOL_AWC (mm mm ⁻¹)	Available water capacity	0.1	0.1	0.2	0.2
BLAI (m ² m ⁻²)	Maximum potential leaf area index	3.6 ^a	2.6	5	5

CHTMX (m)	Maximum canopy height	12	13	14	20
T_BASE	Base temperature	20	20	20	20
T_OPT	Optimal temperature	28	28	30	30

257 ^aFan et al., 2015

258 **e) Baseflow**

259 The baseflow recession constant (ALPHA_BF) was calculated by plotting the daily
 260 streamflow hydrograph on semi-log paper and determining the average values from several
 261 individual rainfall events. Several previous studies have shown that ALPHA-BF ranges from
 262 0.9 to 0.95 in Indonesia.

263 **General input data**

264 The SWAT model ~~required additional input data~~ to the crop parameters described above,
 265 such as the climate, topography, soil type, and land use for each sub-watershed (Table 3).

266 Table 3. Model input data sources

Data type	Resolution	Description	Source ^a
Topography	30 m	DEM with a resolution of 30 m per pixel	LAPAN
Soil	1:250 000	Soil hydraulic conductivity, bulk density, available water content, and texture were resampled in the field	Soil Research Institute, Ministry of Agriculture
Land use	1:100 000	Land use map with intensive ground check	Regional Planning office (BAPPEDA)
Rainfall and climate	Daily	Rainfall and meteorological stations at Rantau Pandan, Siulak Deras, Muara Hemat, Padang Aro, Depati Parbo,	BMG office and CRC990

		Bangko Bungo, Pematang Kabau, and Bungku	
Streamflow	Daily discharge data	Stations at Muara Tembesi, Air Gemuruh, Batang Tabir, Batang Pelepat, and Muara Kilis	Ministry of Public Works (BBWS)

267
268 ^aLAPAN, National Aeronautics and Space Agency (*Lembaga Antarikasa dan Penerbangan*
269 *Nasional*); BAPPEDA, Regional Planning Agency (*Badan Perencanaan Daerah*); BMG,
270 Meteorology and Geophysics Agency (*Badan Meteorologi dan Geofisika*); CRC990,
271 Collaborative Research Centre 990; BBWS, Catchment Regional Agency (*Balai Besar*
272 *Wilayah Sungai*).

273 DEM with a resolution of 30 m per pixel was obtained from the National Aeronautics and
274 Space Agency, rainfall and climate data were sourced from the Meteorology and Geophysics
275 Agency, and streamflow data were provided by the Ministry of Public Works. All these data
276 are freely available for research purposes on official request to the corresponding institutions.
277 The streamflow time series and rainfall records for the small catchments and the resampled
278 soil hydraulic conductivity, bulk density, available water content, and texture data have been
279 deposited by the first author at Bogor Agricultural University and in the EFForTS Database
280 (<https://efforts-is.uni-goettingen.de>). The land use and soil map for the study area was
281 obtained from Jambi Province Regional Planning and Agricultural Plantation offices
282 (Ditjenbun, 2015).

283 2.2.2 Model validation and calibration


284 Prior to model calibration and validation, we performed a sensitivity analysis, particularly for
285 the parameters that control surface runoff and baseflow using a previously reported procedure
286 (Moriasi et al. 2012; Van Griensven et al., 2006; Arnold et al., 2012). The sensitivity analysis
287 was performed using the SWAT Calibration and Uncertainty Procedure (SWAT-CUP)
288 package, which is an interface for auto-calibration that was specifically developed for SWAT
289 and which links any calibration/uncertainty or sensitivity program to SWAT (Abbaspour,
290 2015).

291 Following the sensitivity analysis, we calibrated the SWAT model using the Latin
292 hypercube sampling approach of the SWAT-CUP software. We first determined parameter
293 ranges based on the minimum and maximum values allowed in SWAT. We then performed
294 calibration and validation of the SWAT model by comparing the simulated monthly
295 streamflows with observed data at the Muara Kilis and Muara Tembesi gauging stations from
296 2007 to 2009 for calibration and 2012 to 2014 for validation. Moriasi et al. (2012)
297 recommended the use of three quantitative statistics for model evaluation: the Nash–Sutcliffe
298 efficiency (NSE), percent bias (PBIAS), and ratio of the root mean square error to the
299 standard deviation of measured data. In this study, we used NSE and PBIAS to evaluate the
300 model performance. NSE is a normalized statistic that determines the relative magnitude of
301 the residual variance (“noise”) compared with the measured data variance (“information”)

302 (Nash and Sutcliffe, 1970). PBIAS measures the average tendency of simulated data to be
303 larger or smaller than that of observational data (Gupta et al., 1999), with an optimum value
304 of zero and lower values that indicate better simulations. Positive values of PBIAS indicate
305 model underestimation, whereas negative values indicate model overestimation.

306 **2.3 Simulated C and BFI values and the proportion of land use types in a watershed**

307 The output of the validated SWAT model consisting of flow components for each sub-
308 watershed was used to calculate indicators of the water flow regulation functions of a
309 watershed, namely C, which is the ratio of direct runoff to rainfall, and BFI, which is the
310 proportion of baseflow in the streamflow. To analyze the association between the C and BFI
311 values and the proportion of each land-use type in a watershed, we derived data vectors from
312 the BH and MT watersheds. Each of these vectors corresponded to the percentage of land use
313 types, C and BFI in each of the 25 sub-watersheds from the BH watershed and 23 sub-
314 watersheds from the MT watershed (Fig. 3a and b; Table 4).

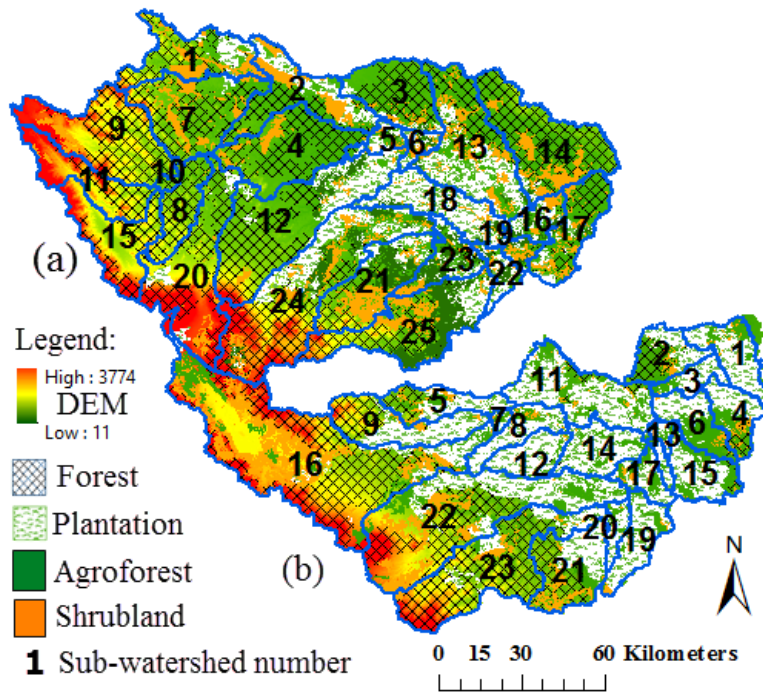

315

316 Figure 3. Land use types and sub-watershed number of the (a) BH and (b) MT watersheds.

317 Table 4. The percentage of land use types, C and BFI in each sub-watershed within the BH
 318 and MT watersheds

Sub-wat. nr.	Percentage of land use types					C	BFI	Sub-wat. nr.	Percentage of land use types					C	BFI
	F	AF	RP	OP	S				F	AF	RP	OP	S		
BH watershed															
1	56	0	17	0	26	0.21	0.71	24	66	5	25	5	0	0.14	0.76
2	46	0	26	0	26	0.27	0.63	25	44	32	0	7	17	0.04	0.93
3	90	0	0	0	0	0.00	0.99	MT watershed							
4	76	0	0	0	0	0.18	0.75	1	0	13	0	85	0	0.59	0.11
5	16	0	67	0	17	0.40	0.32	2	56	0	0	44	0	0.36	0.45
6	0	0	67	0	34	0.41	0.23	3	0	16	0	82	0	0.58	0.13
7	68	0	0	0	19	0.17	0.76	4	21	20	12	48	0	0.45	0.32
8	100	0	0	0	0	0.01	0.98	5	32	0	19	38	12	0.40	0.29
9	80	0	0	0	0	0.15	0.79	6	0	46	0	52	0	0.43	0.37
11	55	0	0	0	0	0.31	0.57	8	0	0	15	86	0	0.54	0.01
12	61	0	23	0	0	0.23	0.62	9	48	0	0	53	0	0.59	0.11
13	30	0	41	0	18	0.32	0.42	10	0	0	0	96	0	0.34	0.37
14	84	0	0	0	16	0.04	0.91	11	0	0	19	69	0	0.67	0.00
15	49	0	0	0	0	0.31	0.58	12	0	0	13	88	0	0.66	0.01
								14	0	0	20	80	0	0.54	0.01

16	0	20	39	0	24	0.36	0.35	15	0	27	14	57	0	0.65	0.01
17	59	0	0	0	24	0.16	0.71	16	70	0	0	0	31	0.53	0.22
18	0	0	82	19	0	0.48	0.03	17	0	28	11	57	0	0.28	0.65
19	19	30	0	0	52	0.13	0.75	19	0	12	31	57	0	0.53	0.23
20	69	0	0	0	0	0.22	0.69	20	0	0	63	37	0	0.60	0.10
21	45	24	0	0	32	0.08	0.87	21	48	0	0	36	16	0.65	0.01
22	0	26	16	58	0	0.35	0.28	22	36	0	17	17	16	0.32	0.42
23	0	48	33	0	20	0.23	0.61	23	100	0	0	0	0	0.40	0.32

319 Sub-wat. nr, sub-watershed number (see Fig. 3a and b); F, forest; AF, agroforest; RP, rubber
320 plantation; OP, oil palm; S, shrubland.

321 **2.4 Measured C values**

322 We carried out the direct C measurements from two small watersheds (Fig. 1c) between 2013
323 and 2015 using rectangular weirs and water recorders for comparison with simulated C
324 values. The land uses in the small watersheds are similar to the proportions found in several
325 of the sub-watersheds shown in Table 4 (e.g., BH 18, MT 1, MT 8, MT 10, MT 11, MT 12,
326 MT 14, and MT 20). The direct runoff components of the hydrographs were separated using
327 the straight-line method described by Blume et al. (2007), following which C was calculated.
328 We did not calculate BFI values along with C values in the small watershed experiments
329 because BFI calculation requires hydrograph records over a longer period.

330 **3 Results and Discussion**

331 **3.1 Measured C values**

332 The average C value was based on nine individual rainfall events during the field experiment.
333 The observed C values that were measured during two small watershed experiments was 0.59

334 (Table 5). This value was comparable with the averaged simulated values of 0.60 for sub-
 335 watersheds with comparable proportions of land use type with those of the small watershed
 336 experiment (Table 6).

337 Table 5. Observed C values obtained from field experiments in two small watersheds that
 338 were dominated by plantation cover

Event Nr.	Rainfall (cm h ⁻¹)	Rainfall volume (m ³)		Runoff (m ³)		C	
		Small wat. 1	Small wat. 2	Small wat. 1	Small wat. 2	Small wat. 1	Small wat. 2
1	6.0	8960	3136	4500	1320	0.50	0.42
2	3.0	5180	1813	2625	840	0.51	0.46
3	1.4	4095	1433	3000	810	0.73	0.57
4	0.6	1456	509.6	1080	255	0.74	0.50
5	10.7	14923	5223	11250	3900	0.75	0.75
6	3.1	6006	2102	4050	1020	0.67	0.49
7	2.3	8188	2885	6150	1584	0.75	0.55
8	2.2	4416	1465	2400	780	0.54	0.53
9	9.6	8916	3121	5400	1650	0.61	0.53
Average						0.65	0.53
Total						0.59	

339 Table 6. Simulated C values for the sub-watersheds used in the SWAT simulation (Table 4)
 340 that had similar percentages of plantation cover to the two small watersheds used in the field
 341 experiments

Sub-watershed code (see Table 4) ^a	Percentage of plantation cover		C
	Oil palm	Rubber	
BH-18	82	19	0.49
MT-1	85	0	0.59
MT-8	86	15	0.54
MT-10	96	0	0.67
MT-11	69	19	0.67
MT-12	88	13	0.54
MT-14	80	20	0.65
MT-20	37	63	0.65
Average			0.60

342 ^aSub-watersheds were selected that had >80 % plantation (oil palm and rubber) cover,
 343 allowing a comparison to be made with the small watersheds used in the field experiment

344 **3.2 SWAT model performance**

345 The sensitive parameters that were included in the calibration of the SWAT model are ranked
 346 in Table 7. Some of these parameters play an important role in controlling the initial
 347 abstraction of rainfall (e.g., CANMX), rainfall partitioning into surface runoff (e.g., CN2 and
 348 OV_N), and vertical movement of water through the soil (e.g., SOL_BD, SOL_K, and
 349 SOL_AWC).


350 Table 7. Sensitivity rank, initial and final values of the calibration parameters that were used
 351 in the study for the BH and MT watersheds

Parameter	Description	Sensitivity rank	Initial value	Best-fit values	
			range	BH	MT
ALPHA_BF	Baseflow recession constant	1	BH and MT 0.0 to 1.0	0.94	0.91
CN2	SCS runoff curve number for moisture condition II	2	-0.2 to 0.2 (V) ^a	0.14	0.12
GW_DELAY	Groundwater delay time (days)	3	30 to 450	62.5	57.2
CANMX	Maximum canopy storage (mm)	4	-0.2 to 1.0 (V) ^a	0.95	0.76
SOL_BD	Soil bulk density	5	-0.5 to 0.6 (V) ^a	0.46	0.47
GWQMN	Water depth in a shallow aquifer for a return flow (mm H ₂ O)	6	0.0 to 2.0	0.99	0.95
SOL_K	Saturated hydraulic conductivity (mm h ⁻¹)	7	-0.8 to 0.8 (V) ^a	0.71	0.62
CH_N2	Manning's "n" value for the main channel	8	0.0 to 0.3	0.05	0.15
SOL_AWC	Available water capacity of the soil (mm H ₂ O/mm soil)	9	-0.2 to 0.4 (V) ^a	0.09	0.04
OV_N	Manning's "n" value for overland	10	-0.2 to 1.0 (V) ^a	0.51	0.3


flow

352 ^a(V) = Variable depends on land use and soil, and so changes in calibration were
353 expressed as a fraction. A visual comparison of best-fit simulations and observed data is
354 shown in Fig. 4. Overall, the model performance was satisfactory, with NSE values of 0.80–
355 0.88 (calibration) and 0.84–0.85 (validation) and PBIAS values of –2.9 to 1.2 (calibration)
356 and 7.0–11.9 (validation) for BH and MT watersheds, respectively.

357

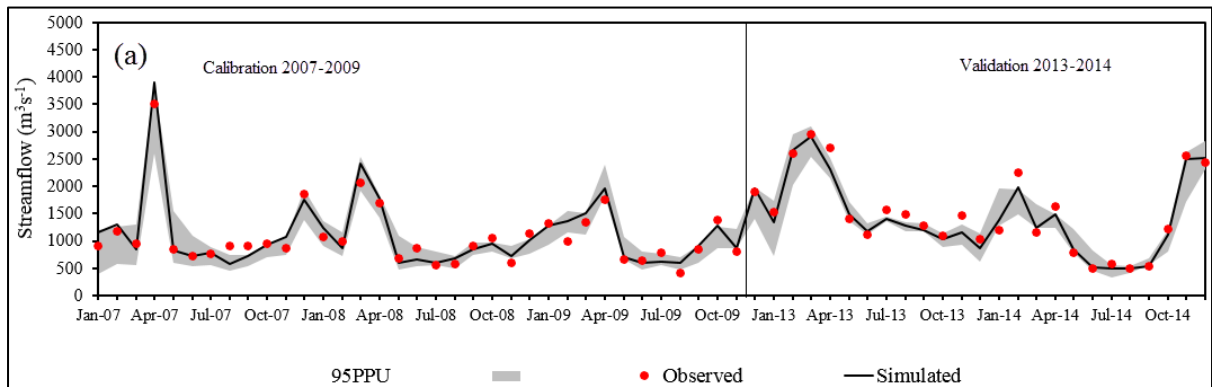


358

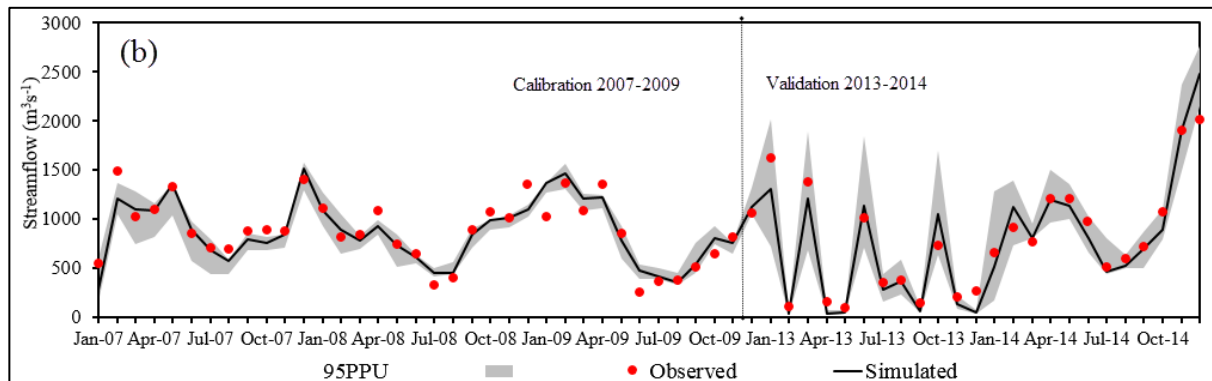

359 Figure 4. Observed vs. simulated streamflow and 95 % uncertainty interval (95PPU; see
360 Abbaspour, 2015) with P factors of 0.83 and 0.76 and R factors of 0.65 and 0.69 for the (a)
361 BH and (b) MT watersheds, respectively (defined as simulations with NSE > 0.5).

362 3.3 Simulated C and BFI values and the proportion of land use types in a watershed


363 The proportion of a particular land use type in a sub-watershed was significantly correlated
364 with C and BFI values obtained from 48 data vectors (Table 4). C values significantly
365 decreased as the percentage of forest cover increased ($R^2 = 0.73$; $p < 0.05$; Fig. 5a) and
366 significantly increased as the percentage of plantation cover increased ($R^2 = 0.74$; $p < 0.05$;
367 Fig. 5b). Low infiltration capacity in oil palm and rubber plantations was the reason for
368 higher C values in the sub-watersheds with high proportions of the plantation land use. There
369 were no significant associations between C values and any of the other land use types such as
370 shrubland (Fig. 5c), agroforest (Fig. 5d), and dryland farming (data not shown). Some sub-
371 watersheds had low C values despite having low levels of forest cover (e.g., BH 19). This can
372 be explained by the fact that BH 19 had no oil palm or rubber plantations ~~and had 52 % of~~
373 shrubland, which will have helped in reducing the C value. Furthermore, some watersheds
374 had 100 % forest cover but a low BFI value (e.g., MT 23). This is the only sub-watershed in
375 the MT watershed to have a high proportion of steeper slopes (76 % of the sub-watershed),
376 which will increase C and decrease BFI. Among the 48 sub-watersheds we considered, only
377 two had these slope characteristics.

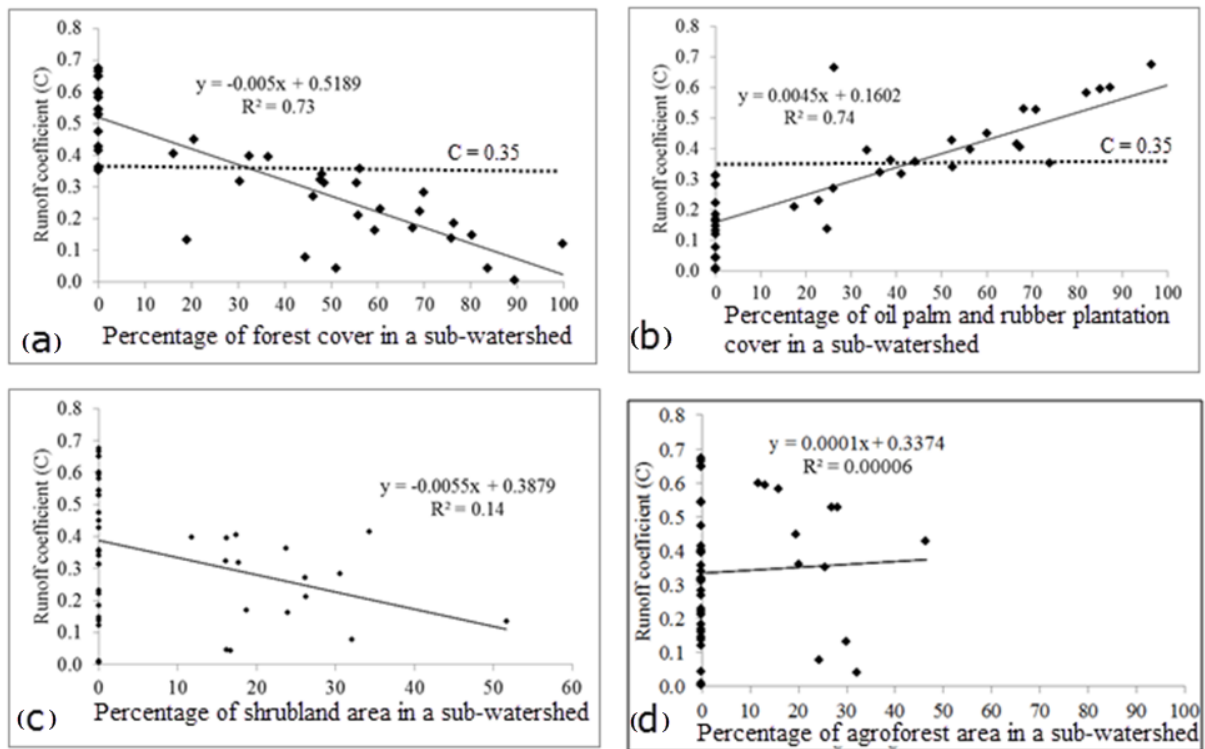

379

380 Figure 5. Association between simulated C values and the percentage of each land use type in
 381 a particular sub-watershed. Dotted lines indicate the maximum acceptable C value according
 382 to the Ministry of Forestry Decree (2013).

383 The Ministry of Forestry of Indonesia considers C values of <0.35 to be adequate for
 384 supporting the required ecosystem services of Indonesian watersheds (Ministry of Forestry
 385 Decree, 2013). Based on our findings, at least 30 % of the forest covers (Fig. 5a) and no more
 386 than 40 % of the plantation cover (Fig. 5b) are required in the sub-watershed to achieve the
 387 required C value.

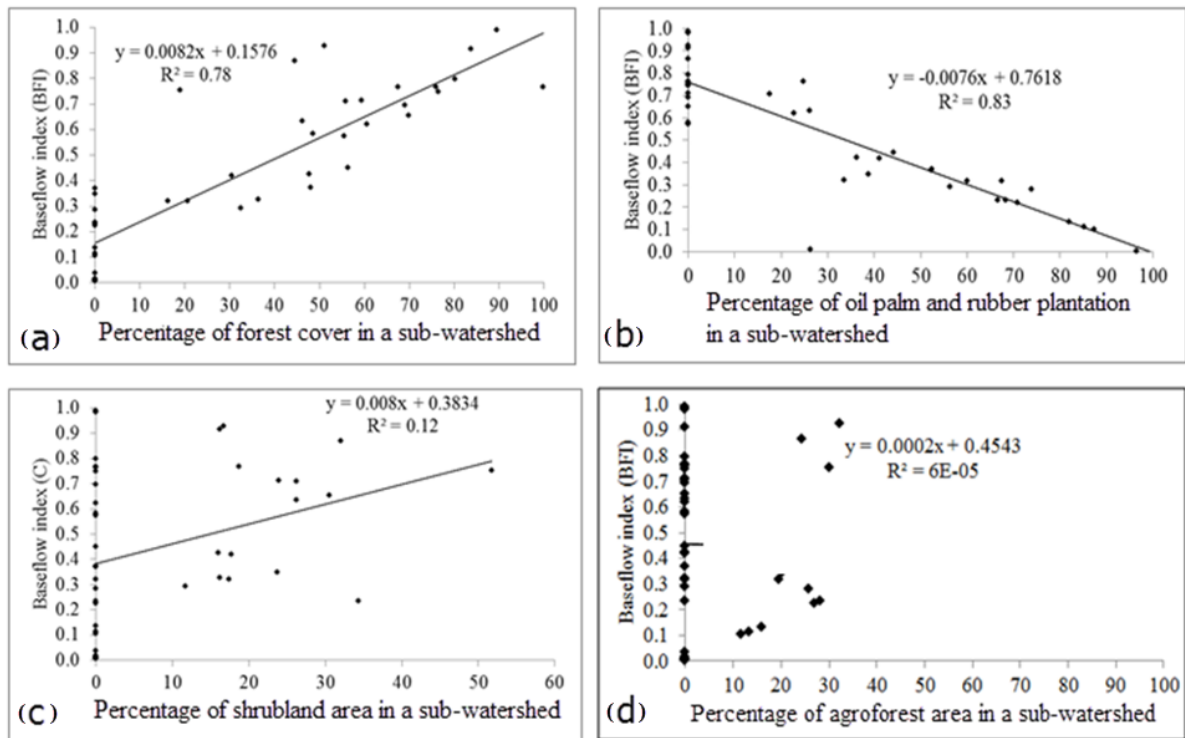

388

389 Figure 6. Association between simulated BFI values and the percentage of each land use type
 390 in a particular sub-watershed.

391 BFI values significantly increased as the percentage of forest cover increased ($R^2 = 0.78$; p
 392 < 0.05 ; Fig. 6a) and significantly decreased as the percentage of plantation cover increased
 393 ($R^2 = 0.83$; $p < 0.05$; Fig. 6b). BFI was not significantly related to any other land use types
 394 such as shrubland (Fig. 6c), agroforest (Fig. 6d), and dryland farming (data not shown).

395 According to Neitsch et al. (2009), the SWAT model considered only shallow
 396 groundwater in the stream flow simulation. Therefore, we expected that the SWAT model
 397 underestimated the simulated BFI value in our study area. To improve the performance of the

398 SWAT model for deep groundwater flow (low flow) simulation, Pfannerstill et al. (2014)
399 modified groundwater module by splitting the active groundwater storage into a fast and a
400 slow contributing aquifer. ~~The result of this modification leads to better prediction of low~~
401 ~~flow.~~

402 **3.4 Application of the research findings**

403 The conversion of tropical rainforest into oil palm and rubber plantations affects the local
404 hydrological cycle by increasing ET, decreasing infiltration, decreasing low flow levels, and
405 increasing flooding frequency. In Jambi Province, Indonesia, forested areas have been largely
406 transformed into plantations, resulting in inhabitants experiencing water shortages during the
407 dry season and dramatic increases in flooding frequency during the wet season. One way in
408 which this problem could be mitigated is by maintaining an adequate proportion of forested
409 and plantation areas in a particular watershed, but this raises the question about what is the
410 minimum percentage of forest area and the maximum proportion of plantation area in a
411 watershed that will allow the maintenance of adequate water flow regulation. This study is
412 the first to describe the quantitative association between forest and plantation areas and the
413 flow indicators C and BFI; this understanding is required by spatial planners if they are to
414 balance the ecology and socioeconomic functions of a landscape with the rapid expansion of
415 plantation crops. In addition, our study provides data regarding how SWAT input parameters
416 related to tropical plantations such as oil palm and rubber should be adjusted, particularly

417 those that play an important role in controlling rainfall initial abstraction (e.g., CANMX),
418 rainfall partitioning into surface runoffs (e.g., CN2, OV_N), and vertical movement of water
419 through (e.g., SOL_BD, SOL_K, and SOL_AWC).

420 **4 Summary**

421 We found that ALPHA_BF, CN2, GW_DELAY, CANMX, SOL_BD, GWQMN, SOL_K,
422 CH_N2, SOL_AWC, and OV_N were sensitive parameters in our model, some of which play
423 an important role in controlling the initial abstraction of rainfall (e.g., CANMX), rainfall
424 partitioning into surface runoff (e.g., CN2, OV_N), and vertical movement of water through
425 the soil (e.g., SOL_BD, SOL_K, and SOL_AWC).

426 Overall, the SWAT model performance was ~~satisfactory~~, with NSE values of 0.80–0.88
427 (calibration) and 0.80–0.85 (validation) and PBIAS values of –2.9 to 1.2 (calibration) and
428 7.0–11.9 (validation). We found that the percentage of forest cover in a watershed was
429 significantly negatively correlated with C and positively correlated with BFI, whereas the
430 percentage of rubber and oil palm plantation cover showed the opposite pattern. Finally, our
431 findings suggest that a watershed should contain at least 30 % forest cover and a maximum of
432 40 % plantation cover for maintaining sustainable water flow regulation ecosystem services.

433 The quantitative association between forest cover and flow indicators, which was derived
434 in this study, will help regional planners in determining the minimum proportion of forest
435 cover that needs to be maintained to ensure effective water flow regulation in a watershed.

436 **5. Data availability**

437 The land use data are freely available for research purposes upon official request to the
438 corresponding institutions: the Digital Elevation Model with a resolution of 30 m per pixel
439 can be obtained from the National Aeronautics and Space Agency; the rainfall and climate
440 data can be obtained from the Meteorology and Geophysics Agency; the streamflow data of
441 the six macro watersheds can be obtained from the Ministry of Public Works; and the land
442 use data can be obtained from the Regional Planning office. The streamflow time series and
443 rainfall records for the small catchments and data for the resampled soil hydraulic
444 conductivity, bulk density, available water content and texture have been deposited by the
445 first author at Bogor Agricultural University and in the EFForTS Database ([https://efforts-](https://efforts-is.uni-goettingen.de)
446 [is.uni-goettingen.de](https://efforts-is.uni-goettingen.de)).

447 **Acknowledgments**

448 This study was performed in the framework of the joint Indonesian-German research project
449 EFForTS-CRC 990 (<http://www.uni-goettingen.de/crc990>) and was funded by the Directorate
450 General of Higher Education (DIKTI), Indonesia.

451 **References**

- 452 Abbaspour, K. C.: SWAT-CUP 2012: *SWAT Calibration and Uncertainty Programs - A User*
453 *Manual*, 2012, Eawag–Swiss Federal Institute of Aquatic Science and Technology, 2015.
- 454 Adnan, N. A. and Atkinson, P. M.: Exploring the impact of climate and land use changes on
455 streamflow trends in a monsoon catchment, *Int. J. Climatol.*, 31, 815–831, 2011.
- 456 Afriyanti, D., Kroeze, C., and Saad, A.: Indonesia palm oil production without deforestation
457 and peat conversion by 2050, *Sci. Total. Environ.*, 557-558, 562–570, 2016.
- 458 Allen, K., Corre, M., Tjoa, A., and Veldkamp, E.: Soil nitrogen-cycling response to
459 conversion of lowland forests to oil palm and rubber plantations in Sumatra, Indonesia,
460 *PLoS One*, 10, e0133325, 2015.
- 461 Arnold, J. G., Moriasi, D. N., Gassman, P. W., Abbaspour, K. C., White, M. J., Srinivasan,
462 R., Santhi, R. C., Harmel, R. D., van Griensven, A., Van Liew, M. W., Kannan, N., and
463 Jha, M. K.: SWAT: Model use, calibration, and validation, *Trans. ASABE.*, 55, 1491–
464 1508, 2012.
- 465 Babel, M. S., Shrestha, B., and Perret, S. R.: Hydrological impact of biofuel production: a
466 case study of the Khlong Phlo Watershed in Thailand, *Agric. Water. Manag.*, 101, 8–26,
467 doi:10.1016/j.agwat.2011.08.019, 2011.

468 Banabas, M., Turner, M. A., Scotter, D. R., and Nelson, P. N.: Losses of nitrogen fertilizer
469 under oil palm in Papua New Guinea: 1. Water balance, and nitrogen in soil solution and
470 runoff, *Aust. J. Soil Res.*, 46, 332–339, 2008.

471 Blume, T., Zehe, E., and Bronstert, A.: Rainfall–runoff response, event-based runoff
472 coefficients and hydrograph separation, *Hydrol. Sci. J.*, 52, 5, 2007.

473 Bosch, J. M. and Hewlett, J. D., A review of catchment experiments to determine the effect
474 of vegetation changes on water yield and evapotranspiration, *J. Hydrol.*, 55, 3–23, 1982.

475 Brown, A. E., Zhang, L., McMahon, T. A., Western, A. W., and Vertessy, R. A., A review of
476 paired catchment studies for determining changes in water yield resulting from alterations
477 in vegetation, *J. Hydrol.*, 310, 28–61, 2005.

478 Bruijnzeel, L. A.: (De)forestation and dry season flow in the tropics: a closer look, *J. Trop.*
479 *For. Sci.*, 1, 229–243, 1989.

480 Bruijnzeel, L. A.: Hydrology of moist tropical forests and effects of conversion: a state of
481 knowledge review, UNESCO International Hydrological Programme, A publication of the
482 Humid Tropics Programme, UNESCO, Paris, 1990.

483 Bruijnzeel, L. A.: Hydrological functions of tropical forests: not seeing the soil for the trees?
484 *Agric. Ecosyst. Environ.*, 104, 185–228, 2004.

485 Carlson, K. M., Curran, L. M., Ratnasari, D., Pittman, A. M., Soares-Filho, B. S., and Asner,
486 G.P.: Committed carbon emissions, deforestation, and community land conversion from

487 oil palm plantation expansion in West Kalimantan, Indonesia, *Proc. Nat. Acad. Sci.*, 109,
488 7559–7564, 2012.

489 Comte, I., Colin, F., Whalen, J. K., Gruenberger, O., and Caliman, J. P.: Agricultural
490 practices in oil palm plantations and their impact on hydrological changes, nutrient fluxes
491 and water quality in Indonesia: a review, *Adv. Agron.*, 116, 71–124, 2012.

492 Dietz, J., Hölscher, D., and Leuschner, C.: Rainfall partitioning in relation to forest structure
493 in differently managed montane forest stands in Central Sulawesi, Indonesia. *For. Ecol.
494 Manage.*, 237, 170–178, 2006.

495 Ditjenbun: Indonesian plantation statistics. Directorate General for Plantations, Ministry of
496 Agriculture Indonesia, 2015.

497 Dislich, C., Faust, H., Kisel, Y., Knohl, A., Otten, F., Meyer, K., Pe'er, G., Salecker, J.,
498 Steinebach, S., Tarigan, S., Tölle, M., and Wiegand, K.: A review of the ecosystem
499 functions in oil palm plantations, using forests as a reference system, *Biol. Rev.*, 92, 1539–
500 1569, doi:10.1111/brv.12295, 2017.

501 Drescher, J., Rembold, K., Allen, K., Beckschäfer, P., Buchori, D., Clough, Y., Faust, H.,
502 Fauzi, A. M., Gunawan, D., Hertel, D., Irawan, B., Jaya, I. N. S., Klarner, B., Kleinn, C.,
503 Knohl, A., Kotowska, M. M., Krashevskaya, V., Krishna, V., Leuschner, C., Lorenz, W.,
504 Meijide, A., Melati, D., Nomura, M., Pérez-Cruzado, C., Qaim, M., Siregar, I. Z.,
505 Steinebach, S., Tjoa, A., Tschardt, T., Wick, B., Wiegand, K., Kreft, H., and Scheu, S.:

506 Ecological and socioeconomic functions across tropical land-use systems after rainforest
507 conversion, *Phil. Trans. R. Soc., B* 371, 20150275, 2016.

508 Ellison, D., Morris, C.E., Locatelli, B., Sheil, D., et. al.,: Trees, forests and water: Cool
509 insights for a hot world. *Global Environmental Change*, 43, 51–61, 2017.

510 Fan, Y., Roupsard, O., Bernoux, M., Le Maire, G., Panferov, O., Kotowska, M. M., and
511 Knohl, A.: A sub-canopy structure for simulating oil palm in the Community Land Model
512 (CLM-Palm): phenology, allocation and yield, *Geosci. Model. Dev.*, 8, 3785–3800, 2015.

513 Fitzherbert, E. B., Struebig, M. J., Morel, A., Danielsen, F., Brühl, C. A., Donald, P. F., and
514 Phalan, B.: How will oil palm expansion affect biodiversity? *Trends. Ecol. Evol.*, 23, 538–
515 545, 2008.

516 Fox, J., Vogler, J. B., Sen, O. L., Giambelluca, T. W., and Ziegler, A. D.: Simulating land-
517 cover change in Montane mainland Southeast Asia, *Environ. Manage.*, 49, 968–979,
518 doi:10.1007/s00267-012-9828-3, 2012.

519 Gassman, P. W., Reyes, M. R., Green, C. H., and Arnold, J. G.: The soil and water
520 assessment tool: historical development, applications, and future research direction, *Amer.*
521 *Soc. Agric. Bio. Eng.*, 50, 1211–1250, 2007.

522 Gatto, M., Wollni, M., Asnawi, R., and Qaim, M.: Oil palm boom, contract farming, and rural
523 economic development: village-level evidence from Indonesia, *World Development*, 95,
524 127–140, 2017.

525 Guillaume, T., Damris, M., and Kuzyakov, Y.: Losses of soil carbon by converting tropical
526 forest to plantations: erosion and decomposition estimated by $\delta^{13}\text{C}$. *Glob. Chang. Biol.*,
527 21, 3548–3560, 2015.

528 Guillaume, T., Holtkamp, A.M., Damris, M., Brümmer, B., and Kuzyakov, Y.: Soil
529 degradation in oil palm and rubber plantations under land resource scarcity. *Agric.*
530 *Ecosyst. Environ.*, 232, 110–118, 2016.

531 Guo, J., Su, X., Singh, V.P., and Jin, J.: Impacts of climate and land use/cover change on
532 streamflow using SWAT and a separation method for the Xiyang River basin in
533 Northwestern China, *Water*, 8, 192, doi:10.3390/w8050192, 2016.

534 Gupta, H. V., S. Sorooshian, and P. O. Yapo.: Status of automatic calibration for hydrologic
535 models: Comparison with multilevel expert calibration. *J. Hydrologic Eng.*, 4,2, 135-143,
536 1999.

537 Hardanto, A., Röhl, A., Niu, F., and Meijide, A.: Oil palm and rubber tree water use patterns -
538 effects of topography and flooding, *Front. Plant. Sci.*, 8, 452, 2017.

539 Hassler, E., Röhl, A., Corre, M. D., Kurniawan, S., and Veldkamp, E.: Soil nitrogen oxide
540 fluxes from lowland forests converted smallholder rubber and oil palm plantations in
541 Sumatra, Indonesia, *Biogeosci. Discuss.*, 14, 2781, 2017.

542 Hewlett, J. D. and Hibbert, A. R.: Factors affecting response of small watersheds to
543 precipitation in humid areas, in: *Forest Hydrology*, Sopper, W. E. and Lull, H.W. (Eds.),
544 Pergamon Press, New York, 1967

545 Khoi, D.N. and Suetsugi, T.: Impact of climate and land-use changes on hydrological
546 processes and sediment yield—a case study of the Be River catchment, Vietnam, *Hydrol.*
547 *Sci. J.*, 59, 5, 2014.

548 Koh, L. P. and Wilcove, D. S.: Is oil palm agriculture really destroying tropical biodiversity?
549 *Conserv. Lett.*, 1, 2, 60–64, 2008.

550 Krashevskaya, V., Klärner, B., Widyastuti, R., Maraun, M., and Scheu, S.: Impact of tropical
551 lowland rainforest conversion into rubber and oil palm plantations on soil microbial
552 communities, *Biol. Fertil. Soils.*, 51, 697–705, 2015.

553 Kumagai, T., Saitoh, T. M., Sato, Y., Takahashi, H., Manfroi, O. J., Morooka, T., Kuraji, K.,
554 Suzuki, M., Yasunari, T., and Komatsu, H.: Annual water balance and seasonality of
555 evapotranspiration in a Bornean tropical rainforest, *Agric. For. Meteorol.* 128, 81–92,
556 2005.

557 Lele, S.: Watershed services of tropical forests: from hydrology to economic valuation to
558 integrated analysis, *Curr. Opin. Environ. Sustain.*, 1, 148–155, 2009.

559 Le Maitre, D. C., Kotzee, I. M., and O'Farrell, P. J.: Impacts of land-cover change on the
560 water flow regulation ecosystem service: Invasive alien plants, fire and their policy
561 implications, *Land. Use. Policy.*, 36, 171–181, 2014.

562 Marhaento, H., Booij, M. J., Rientjes, T. H. M., and Hoekstra, A. Y.: Attribution of changes
563 in the water balance of a tropical catchment to land use change using the SWAT model,
564 *Hydrol. Process.*, 31, 11, 2029–2040. doi:10.1002/hyp.11167, 2017.

565 Meijide, A., Röhl, A., Fan, Y., Herbst, M., Niu, F., Tiedemann, F., June, T., Rauf, A.,
566 Hölscher, D., and Knohl, A.: Controls of water and energy fluxes in oil palm plantations:
567 environmental variables and oil palm age, *Agric. For. Meteorol.*, 239, 71–85, 2017.

568 Merten, J., Röhl, A., Guillaume, T., Meijide, A., Tarigan, S., Agusta, H., Dislich, C., Dittrich,
569 C., Faust, H., Gunawan, D., and Hein, J.: Water scarcity and oil palm expansion: social
570 views and environmental processes. *Ecol. Soc.*, 21, 5–16, 2016.

571 Ministry of Forestry Decree - Permenhut/Menhut-V/2013.: Criteria for watershed
572 classification (*Kriteria Penetapan Klassifikasi Daerah Aliran Sungai*), Ministry of
573 Forestry, Republic of Indonesia, 2013.

574 Moriasi, D.N., Wilson, B.N., Douglas-Mankin, K.G., Arnold, J.G., Gowda, P.H.: Hydrologic
575 and water quality models: use, calibration, and validation. *Trans. ASABE*, 55,4, 1241-
576 1247, 2012.

577 Mukherjee, I. and Sovacool, B. K.: Palm oil-based biofuels and sustainability in southeast
578 Asia: a review of Indonesia, Malaysia, and Thailand, *Renew. Sustainable. Energy. Rev.*,
579 37, 1–12, doi:10.1016/j.rser.2014.05.001, 2014.

580 Mwangi, H. M., Julich, S., Pati, S. D., McDonald, M. A., and Feger, K. H.: Relative
581 contribution of land use change and climate variability on discharge of upper Mara River,
582 Kenya, *J. Hydrol.*, 5, 244–260, 2016.

583 Nash, J. and Sutcliffe, J. V.: River flow forecasting through conceptual models, 1, A
584 discussion of principles, *J. Hydrol.*, 10, 282–290, 1970.

585 Neitsch, S. L., Arnold, S. G., Kiniry, J. R., and Williams, J. R.: Soil and water assessment
586 tool theoretical documentation, Version 2009. *Texas Water Resources Institute Technical*
587 *Report No. 406*. Texas A&M University System, College Station, Texas, 77843-2118,
588 2011.

589 Pfannerstill, M., Guse, B., Fohrer, N.: A multi-storage groundwater concept for the swat
590 model to emphasize non- linear groundwater dynamics in lowland catchments. *Hydro-*
591 *logical Processes*, 28, 5599-5612, DOI: 10.1002/hyp.10062, 2014.

592 Pransiska, Y., Triadiati, T., Tjitrosoedirjo, S., Hertel, D., and Kotowska, M. M.: Forest
593 conversion impacts on the fine and coarse root system, and soil organic matter in tropical
594 lowlands of Sumatera (Indonesia). *For. Ecol. Manage.*, 379, 288–298, 2016.

595 Rientjes, T. H. M., Haile, A. T., Kebede, E., Mannaerts, C. M., Habib, E., and Steenhuis, T.
596 S.: Changes in land cover, rainfall and stream flow in Upper Gilgel Abbay catchment,
597 Blue Nile basin–Ethiopia, *Hydrol. Earth. Syst. Sci.*, 15, 1979–1989, 2011.

598 Röhl, A., Niu, FR., Meijide, A., Hardanto, A., Hendrayanto, Knohl, A., and Hölscher, D.:
599 Transpiration in an oil palm landscape: effects of palm age. *Biogeosciences*, 12, 9209–
600 9242, 2015.

601 Setiadi, B., Diwyanto, K., Puastuti, W., Mahendri, I.G.A.P., Tiesnamurti, B.: Peta Potensi dan
602 Sebaran Areal Perkebunan Kelapa Sawit di Indonesia. Pusat Penelitian dan
603 Pengembangan Peternakan, Badan Litbang Pertanian, Kementerian Pertanian (*Area*
604 *distribution of oil palm plantation in Indonesia, Center for Research and Development,*
605 *Ministry of Agriculture Indonesia*). ISBN 978-602-8475-45-7, 2011.

606 Sterling, S. M., Ducharme, A., and Polcher, J.: The impact of global land cover change on the
607 terrestrial water cycle, *Nat. Clim. Change*. 3, 385–390. doi:10.1038/nclimate1690, 2012.

608 Tarigan, S. D.: Land cover change and its impact on flooding frequency of Batanghari
609 Watershed, Jambi Province, Indonesia, *Procedia. Environ. Sci.*, 33, 386–392, 2016.

610 Tarigan, S. D., Wiegand, K., Dislich, C., Slamet, B., Heinonen, J., and Meyer K.: Mitigation
611 options for improving the ecosystem function of water flow regulation in a watershed with
612 rapid expansion of oil palm plantations, *Sustainability of Water Quality and Ecology*, 8,
613 4–13, 2016.

614 Van der Laan, C., Wicke, B., Verweij, P. A., and Faaij, A. P. C.: Mitigation of unwanted
615 direct and indirect land-use change-an integrated approach illustrated for palm oil,
616 pulpwood, rubber and rice production in North and East Kalimantan, Indonesia. *Glob.*
617 *Change. Biol. Bioenergy.*, 9, 429–444, doi:10.1111/gcbb.12353, 2016.

618 Van der Molen, M. K., Dolman, A. J., Waterloo, M. J., and Bruijnzeel, L. A.: Climate is
619 affected more by maritime than by continental land use change: a multiple scale analysis.
620 *Glob. Planet. Change.*, 54, 128–149, 2006.

621 Van Griensven, A., Meixner, T., Grunwald, S., Bishop, T., Diluzio, M., and Srinivasan, R.
622 A.: Global sensitivity analysis tool for the parameters of multi-variable catchment models,
623 *J. Hydrol.*, 324, 10–23, 2006.

624 Van Griensven, A., Maharjan, S., and Alemayehu, T.: Improved simulation of
625 evapotranspiration for land use and climate change impact analysis at catchment scale,
626 International Environmental Modelling and Software Society (iEMSs) 7th International
627 Congress on Environmental Modelling and Software, 2014.

628 Vigerstol, K. L., Aukema, J. E.: A comparison of tools for modeling freshwater ecosystem
629 services, *J. Environ. Manage.*, 92, 2403–2409, 2011.

630 Vijay, V., Pimm, S.L., Jenkins, C.N., and Smith, S.J.: The impacts of oil palm on recent
631 deforestation and biodiversity loss, *PLoS One*, 11, e0159668,
632 doi:10.1371/journal.pone.0159668, 2016.

633 Wangpimool, W., Pongput, K., Tangtham, N., Prachansri, S., and Gassman, P. W.: The
634 impact of para rubber expansion on streamflow and other water balance components of the
635 Nam Loei River Basin, Thailand, *Water*, 9, 1, doi:10.3390/w9010001, 2017.

636 Wicke, B., Sikkema, R., Dornburg, V., and Faaij, A.: Exploring land use changes and the role
637 of palm oil production in Indonesia and Malaysia, *Land. Use. Policy.*, 28, 193–206, 2011.

638 Wilcove, D. S. and Koh, L. P.: Addressing the threats to biodiversity from oil-palm
639 agriculture, *Biodivers. Conserv.*, 19, 999–1007, 2010.

640 Xu, X., Yang D., Yang, H., and Lei, H., Attribution analysis based on the Budyko hypothesis
641 for detecting the dominant cause of runoff decline in Haihe basin, *J. Hydrol.*, 510, 530–
642 540, 2014.

643 Yusop, Z., Chan, C. H., and Katimon, A.: Runoff characteristics and application of HEC-
644 HMS for modelling stormflow hydrograph in an oil palm catchment, *Water. Sci. Technol.*,
645 56, 41–48, 2007.

646 Zhang, L., Nan, Z., Xu, Y., and Li, S., Hydrological impacts of land use change and climate
647 variability in the headwater region of the Heihe river basin, Northwest China, *PLoS One.*,
648 11, e0158394. doi:10.1371/journal.pone.0158394, 2016.

649 Ziegler, A. D., Fox, J. M., and Xu, J., The rubber juggernaut, *Science.*, 324, 1024–1025. doi:
650 10.1126/science.1173833, 2009.

651 Ziegler , A. D., Fox, J. M., Webb, E. L., Padoch, C., Leisz, S. J., Cramb, R. A., Mertz, O.,
652 Bruun, T. B., and Vien, T. D., Recognizing contemporary roles of swidden agriculture in
653 transforming landscapes of Southeast Asia, *Conserv. Biol.*, 25, 846–848, 2011.