



## 1 Long-term projections of global water use for electricity generation under the 2 Shared Socioeconomic Pathways and climate mitigation scenarios

3  
4 Nozomi Ando<sup>1</sup>, Sayaka Yoshikawa<sup>1</sup>, Shinichiro Fujimori<sup>2</sup>, and Shinjiro Kanae<sup>1</sup>

5  
6 <sup>1</sup>Department of Civil and Environmental Engineering, Tokyo Institute of Technology, 2-12-1 O-okayama, Meguro-  
7 ku, Tokyo, Japan

8 <sup>2</sup>Center for Social and Environmental Systems Research, National Institute for Environmental Studies, 16-2  
9 Onogawa, Tsukuba, Ibaraki 305-8506, Japan.

10  
11 *Correspondence to:* S. Yoshikawa (yoshikawa.s.ad@m.titech.ac.jp) and N. Ando (ando.n.titech@gmail.com)

12  
13 **Abstract.** Electricity generation may become a key factor that accelerates water scarcity. In this study, we estimated  
14 the future global water use for electricity generation from 2005 to 2100 in 17 global sub-regions. Twenty-two future  
15 global change scenarios were examined, consisting of feasible combinations of five socioeconomic scenarios of the  
16 Shared Socioeconomic Pathways (SSPs) and six climate mitigation scenarios based on four forcing levels of  
17 representative concentration pathways (RCPs) and two additional forcing levels, to assess the impacts of  
18 socioeconomic and climate mitigation changes on water withdrawal and consumption for electricity generation.  
19 Climate policies such as targets of greenhouse gas (GHG) emissions are determined by climate mitigation scenarios.  
20 Both water withdrawal and consumption were calculated by multiplying the electricity generation of each energy  
21 source (e.g., coal, nuclear, biomass, and solar power) and the energy source-specific water use intensity. The future  
22 electricity generation dataset was derived from the Asia-Pacific Integrated/Computable General Equilibrium  
23 (AIM/CGE) model. Estimated water withdrawal and consumption varied significantly among the SSPs. In contrast,  
24 water withdrawal and consumption differed little among the climate mitigation scenarios even though GHG  
25 emissions depend on them. There are two explanations for these outcomes. First, electricity generation for energy  
26 sources requiring considerable amounts of water varied widely among the SSPs, while it did not differ substantially  
27 among the climate mitigation scenarios. Second, the introduction of more carbon capture and storage strategies  
28 increased water withdrawal and consumption under stronger mitigation scenarios, while the introduction of more  
29 renewable energy decreased water withdrawal and consumption. Therefore, the socioeconomic changes represented  
30 by the SSPs had a larger impact on water withdrawal and consumption for electricity generation, compared with the  
31 climate mitigation changes represented by the climate mitigation scenarios. The same trends were observed on a  
32 regional scale, even though the composition of energy sources differed completely from that on a global scale.

### 33 34 1. Introduction

35  
36 With economic and population growth, energy demand is likely to continue increasing in the coming decades,  
37 and the energy sector is becoming a large water consumer. For example, the global water withdrawal for electricity  
38 generation in 2010 amounted to about 540 km<sup>3</sup> yr<sup>-1</sup>, or 14% of the global total water withdrawal (IEA, 2012), while



39 electricity generation accounted for about 70% of industrial water withdrawal in 2010. There is concern that water  
40 use for electricity generation could increase competition with other major water users, including agriculture,  
41 manufacturing, and domestic users. Furthermore, water shortages could impair energy security. Electricity shortages  
42 have recently been caused by water shortages in the southeastern United States, the Pacific Northwest, and continental  
43 Europe (Bartos et al., 2015). Therefore, it is important to estimate how much water will be required for electricity  
44 generation in the future.

45 Water use for electricity generation falls under industrial water use. Global industrial water use projections have  
46 been presented by Alcamo et al. (2007), Shen et al. (2008), and Hanasaki et al. (2013). However, these studies did  
47 not differentiate water use for electricity generation from water use for other industrial processes. Vassolo and Döll  
48 (2005) and Flörke et al. (2013) estimated global industrial water use by distinguishing water use for electricity  
49 generation and manufacturing water. However, they used global hydrological models on a grid scale, which are not  
50 designed to readily assess the global impact of demand drivers, such as energy source composition, cooling system  
51 shares, and technological improvements, in the distant future.

52 There is another approach. Socioeconomic changes and climate mitigation are among the most significant  
53 demand drivers in future projections; the global impact of these demand drivers and others on water use for electricity  
54 generation can be assessed using a global economic model on a regional scale. Most studies using this approach have  
55 focused on only one of these drivers (Kyle et al., 2013; Hejazi et al. 2014; Bijl et al. 2016; Fricko et al. 2016); to our  
56 knowledge, only Fujimori et al. (2016a) has examined both socioeconomic changes and climate mitigation changes.  
57 Fujimori et al. (2016a) estimated the future industrial water withdrawal under the Shared Socioeconomic Pathways  
58 (SSPs; see Sect. 2.1.1) and climate mitigation scenarios based on representative concentration pathways (RCPs; see  
59 Sect. 2.1.1); however, they neither incorporated energy-related factors (e.g., cooling system shares or seawater use  
60 by power plants) nor distinguished water use and withdrawal, which have been taken into account in other studies  
61 using a global economic model on a regional scale.

62 In this study, we had two objectives: 1) to estimate water withdrawal and consumption for electricity generation  
63 under the SSPs and climate mitigation scenarios based on RCPs for the period from 2005 to 2100 in 17 global sub-  
64 regions while considering energy-related factors, and 2) to compare the impact of the socioeconomic changes and  
65 climate mitigation changes on water withdrawal and consumption for electricity generation, in addition to assessing  
66 each impact. We achieved these objectives by taking advantage of the SSPs and climate mitigation scenarios, which  
67 allowed us to assess the effects of socioeconomic changes and climate mitigation changes separately. In addition to  
68 the SSPs and climate mitigation scenarios, we included assumptions on shifts in the proportion of cooling system  
69 types to assess their potential impacts.

70 In this study, key drivers of water withdrawal and consumption for electricity generation and scenario settings  
71 are discussed in Sect. 2. The results from the scenario analysis are presented in Sect. 3 and discussed in Sect. 4.  
72 Conclusions are presented in Sect. 5.

73

## 74 2. Methodology and data

75

76 Water withdrawal and consumption for electricity generation were calculated by multiplying the electricity



77 generation (MWh) and water use intensity ( $\text{m}^3 \text{MWh}^{-1}$ ) of each energy source. The water use intensity was defined  
78 as water use ( $\text{m}^3$ ) per unit electricity generated (MWh). These factors are discussed in Sect. 2.1 and 2.2. We followed  
79 the definitions of water-related terms set by the United States Geological Survey. Water use is defined as the water  
80 used for a specific purpose and includes elements such as water withdrawal and consumption. Water withdrawal is  
81 defined as the water extracted from surface water or groundwater. Water consumption is defined as the proportion of  
82 water withdrawn that is evaporated, transpired, incorporated into products or crops, or consumed by humans or  
83 livestock.

84 We used future electricity generation data estimated by the Asia-Pacific Integrated Model/Computable General  
85 Equilibrium (AIM/CGE) model, an integrated assessment model developed by National Institute for Environmental  
86 Studies, Japan (Fujimori et al. 2016b). The AIM/CGE model can quantify entire economic goods and service, and  
87 production factors' market exchange with a special focus on energy, agriculture, emissions (GHG and air pollutants)  
88 and land use sectors based on socioeconomic assumptions and climate mitigation targets (e.g., population, gross  
89 domestic product (GDP), and radiative forcing). The impacts of socioeconomic and climate mitigation changes were  
90 assessed using the output of the AIM/CGE model for a target period of 2005–2100; this model covered all regions of  
91 the world, divided into 17 sub-regions (See Table S1 and Fig. S1 in Supplementary Information).

92

93

## 94 **2.1. Electricity generation**

95

96 We used future electricity generation data estimated by the Asia-Pacific Integrated Model/Computable General  
97 Equilibrium (AIM/CGE) model, an integrated assessment model developed by National Institute for Environmental  
98 Studies, Japan (Fujimori et al. 2016b). The AIM/CGE model can quantify entire economic goods and service, and  
99 production factors' market exchange with a special focus on energy, agriculture, emissions (GHG and air pollutants)  
100 and land use sectors based on socioeconomic assumptions and climate mitigation targets (e.g., population, gross  
101 domestic product (GDP), and radiative forcing). The impacts of socioeconomic and climate mitigation changes were  
102 assessed using the output of the AIM/CGE model for a target period of 2005–2100; this model covered all regions of  
103 the world, divided into 17 sub-regions (See Table S1 and Fig. S1 in Supplementary Information).

104

### 105 **2.1.1. Scenario framework**

106

107 Future electricity generation was calculated under two sets of scenarios: socioeconomic scenarios and climate  
108 mitigation scenarios. We adopted SSPs to represent the socioeconomic scenarios. The SSPs describe five plausible  
109 future worlds that are defined by narrative storylines and quantitative information and can be characterized by two  
110 indices, socioeconomic challenges for adaptation and for mitigation. In SSP1 (sustainability), both adaptation and  
111 mitigation challenges are low. In contrast, both adaptation and mitigation challenges are high in SSP3 (regional  
112 rivalry). In SSP4 (inequality), adaptation challenge is high but mitigation challenge is low. In SSP5 (fossil-fuel  
113 development), adaptation challenge is low but mitigation challenge is high. SSP2 (middle of the road) falls in an  
114 intermediate position among other four scenarios. The SSPs are described in detail by O'Neill et al. (2014).



115 The climate mitigation scenarios were represented by six climate mitigation targets and a baseline case. The baseline  
116 case has no constraints on GHG emissions. Meanwhile, the climate mitigation targets consist of four forcing levels  
117 (2.6, 4.5, 6.0, and 8.5 W/m<sup>2</sup>) of RCPs (van Vuuren et al., 2011), as well as two additional forcing levels (3.4 and 7.0  
118 W/m<sup>2</sup>). The forcing levels are defined by the cumulative amount of radiative forcing (W/m<sup>2</sup>) around the year 2100.  
119 Each climate mitigation target is expressed as, for example, the 6.0W case and 2.6W case.

120 The scenario framework of the socioeconomic scenarios and climate mitigation scenarios is described by  
121 Fujimori et al. (2016b). The baseline cases of SSP1–5 are assumed to correspond to 6.0, 7.0, 7.0, 6.0, and 8.5 W/m<sup>2</sup>,  
122 respectively. Each combination of SSP and climate mitigation scenario is expressed as, for example, SSP2-6.0W and  
123 SSP3-3.4W.

124 Figure 1 shows the global electricity generation under the baseline cases for SSP1–5. In all scenarios, global  
125 total electricity generation increased between 2005 and 2100. In particular, the total electricity generation of 2100  
126 was about 7.5 times larger than that of 2005 in SSP5-8.5W. Among the baseline scenarios, renewable energies were  
127 introduced as major energy sources for climate change mitigation in SSP1-6.0W and SSP4-6.0W. Conversely, fossil  
128 fuels were the dominant energy source in SSP3-7.0W and SSP5-8.5W. Meanwhile, nuclear energy grew substantially  
129 over a target period in SSP2-7.0W, SSP4-6.0W, and SSP5-8.5W.

130 Figure 2 compares the global electricity generation for SSPs and climate mitigation scenarios. Only the baseline  
131 case had a significantly different composition of energy sources from other climate mitigation scenarios in SSP2,  
132 SSP3, and SSP5. In stronger mitigation scenarios, total electricity generation was greater, and more renewable energy  
133 and carbon capture and storage (CCS) were used. The total electricity generation and composition of energy sources  
134 differed greatly between the SSPs within the same climate mitigation scenario. The energy trends and scenario  
135 assumptions are described in detail by Fujimori et al. (2016b).

136

### 137 **2.1.2. Estimation of electricity generation using freshwater for cooling**

138

139 Both freshwater and seawater can be used for electricity generation. However, we focused on freshwater use,  
140 and excluded seawater. We calculated the electricity generation ratio of freshwater- and seawater-based power plants  
141 in the AIM/CGE regions, from which we estimated freshwater-based electricity generation. To calculate the  
142 electricity generation ratio, the electricity generation and water source (freshwater or seawater) for each power plant  
143 around the world are needed. However, we did not have such data. Therefore, we substituted the electricity generation  
144 capacity data of each power plant worldwide for the electricity generation data of each power plant, and assumed that  
145 the electricity generation ratio and electricity generation capacity ratio were nearly the same. The water source of  
146 each power plant was determined based on its distance from a shore.

147 We created a spatial distribution dataset of the power plant generation capacity allocated to a 5' × 5' grid by  
148 combining World Electric Power Plants Database (WEPP) and Carbon Monitoring for Action (CARMA) data to  
149 calculate the electricity generation capacity ratio in each AIM/CGE region. The WEPP (UDI, 2014) provides power  
150 plant name, installed electricity generation capacity, energy source, cooling system type and other information of  
151 power plants around the world. The WEPP includes over 90,000 power plants; however, it does not cover geographic  
152 location of power plants. To determine the geographic coordinates of the power plants, we used the CARMA database



153 (Center for Global Development, 2014), which contains information on power plant names, carbon emissions, and  
154 geographic coordinates and includes over 60,000 power plants.

155 Power plants that use seawater for electricity generation must be located adjacent to saline water bodies. Initially,  
156 we assumed that seawater was used for electricity generation if the power plant was located within one grid cell from  
157 a shore. However, the resulting seawater-based generation capacity ratios were too small. For example, almost all  
158 power plants in Japan use seawater; however, under our assumption, only 44% of the generation capacity of coal  
159 power plants was assumed to use seawater. Therefore, we altered this assumption to include power plants located  
160 within two grid cells from a shore. Table 1 shows the electricity generation capacity ratio of seawater-based power  
161 plants to the total electricity generation capacity by AIM/CGE region. The generation capacity ratio was assumed to  
162 be constant over the target period.

163 The generation capacity ratio has uncertainty, because we only identified locations for half of the power plants  
164 listed in the WEPP. In addition, in developing countries, there are few power plants. For instance, there is only one  
165 nuclear power plant on the African continent, Koeberg Nuclear Power Station. Because this plant was recognized as  
166 a seawater-based power plant under our assumption, all nuclear power plants in Africa were assumed to be seawater-  
167 based over time.

168

## 169 **2.2. Water use intensity**

170

171 We used the water use intensity of each energy source (Table 2) according to Kyle et al. (2013), which essentially  
172 followed that of Macknick et al. (2011). Macknick et al. (2011) presented the minimum, median, and maximum water  
173 use intensity, while Kyle et al. (2013) used median water use intensity derived from Macknick et al. (2011), with  
174 adjustments to previous estimations of electricity sector water use.

175 The water use intensity of CCS has a high uncertainty, because CCS is a new technology that is not widespread.  
176 Kyle et al. (2013) determined that the water use intensities of coal, integrated coal gasification combined cycle, and  
177 natural gas combined cycle power plants with CCS were about 20–100% higher than those without CCS. However,  
178 they did not include the water use intensities of oil, natural gas, and biomass power plants with CCS. Therefore, we  
179 assumed that the intensities of oil, natural gas, and biomass power plants were 30% higher than those without CCS.  
180 For example, the water withdrawal intensity of oil and natural gas with CCS would be  $198 \text{ m}^3 \text{ MWh}^{-1}$ , or 30% higher  
181 than that without CCS,  $152 \text{ m}^3 \text{ MWh}^{-1}$ . We calculated water use by assuming that the water use intensities of plants  
182 with CCS were 100% higher than those without CCS. The impacts of the water use intensities of CCS are discussed  
183 further in Sect. 4.4.

184 The water consumption intensity of hydropower is controversial. It is difficult to estimate the proportion of water  
185 that evaporates from dams due to hydropower electricity generation, so the water consumption intensity of  
186 hydropower includes the total evaporation from dams. Therefore, we discussed water consumption excluding  
187 hydropower; however, we compared water consumption with and without hydropower in Sect. 4.5.

188 In thermal power plants, water is primarily used for cooling. Power plants with cooling systems have the greatest  
189 impact on water use for a given type of thermal energy source (IEA, 2012), and the proportions of cooling system  
190 types in use are important when estimating water use for electricity generation. Section 2.2.1 presents the



191 characteristics of the types of power plant cooling systems, while Sect. 2.2.2 describes the assumptions on proportions  
192 of cooling system types in use.

193

### 194 **2.2.1. Open-loop and closed-loop cooling systems**

195

196 We focused on two cooling systems, open-loop cooling systems (i.e., once-through cooling systems) and closed-  
197 loop cooling systems (i.e., evaporative cooling systems), because most power plants around the world use one of  
198 these two systems. Open-loop cooling systems withdraw water, pass it through a stream condenser, and directly  
199 discharge the heated water into water body (IEA, 2012). They require considerably more water for withdrawal, but  
200 have lower overall water consumption compared with closed-loop cooling systems. Meanwhile, closed-loop cooling  
201 systems withdraw water and pass it through a stream condenser in the same manner as open-loop cooling systems.  
202 However, the heated water is cooled in a wet tower or pond, and the water not evaporated is reused. (IEA, 2012). In  
203 these systems, water withdrawal is much lower, while water consumption is higher compared with the open-loop  
204 configuration.

205 In terms of environmental impact, in open-loop cooling systems, the subsequent downstream water discharge is  
206 released at temperatures higher than the ambient water, which can be detrimental to aquatic ecosystems. Conversely,  
207 closed-loop cooling systems reduce the potential risks and environmental impacts. Concerns over water shortages  
208 and environmental impacts have motivated a shift from open-loop cooling systems towards closed-loop cooling  
209 systems.

210 Dry cooling systems represent another important cooling system, although dry cooling systems comprise a very  
211 small proportion of cooling systems. They use air flow instead of water for cooling, so the water use intensity is  
212 negligible. Dry cooling systems are especially useful in water-stressed regions. However, the cost is much higher and  
213 power plant efficiency is lower than both open-loop and closed-loop cooling systems. In this study, we did not  
214 consider dry cooling systems on the assumption that they are not widespread and their overall impact is small.

215

### 216 **2.2.2. Assumptions on the proportions of cooling system types in use**

217

218 The proportion of open-loop and closed-loop cooling systems in use in the base year (2005) was calculated by  
219 estimating water withdrawal for electricity generation in 2005 from Davies et al. (2013).

220 Because shifts in future cooling system type proportions have a high uncertainty, we had to make several assumptions  
221 to estimate this parameter. Fricko et al. (2016) assumed that open-loop cooling systems would shift towards seawater-  
222 based cooling and dry cooling systems. However, many other studies assumed that open-loop cooling systems would  
223 shift towards closed-loop cooling systems, reflecting recent trends (see Sect. 2.2.1) (Davies et al., 2013; Kyle et al.,  
224 2013; Hejazi et al., 2014; Bijl et al. 2016).

225 To address this assumption, we created two cases, the ‘recent-trend cooling case’ and ‘status-quo cooling case’,  
226 since we were only interested in examining the likely range of cooling system shift impacts. In the recent-trend  
227 cooling case, we applied an assumption reflecting recent trends, in particular, that open-loop cooling system usage  
228 decreases by 0.4% per year until the share of open-loop cooling system usage decreases to 10%, while closed-loop



229 cooling system usage increases by 0.4% per year until the share of closed-loop cooling system usage increases to  
230 90%. Meanwhile, in the status-quo cooling system case, we assumed that the cooling system type share was fixed to  
231 that of the base year (2005) for comparison with the recent-trend cooling case. In both cases, the proportions of each  
232 cooling system type were the same, regardless of CCS use.

233 Table 3 lists the proportions of both cooling system types in the recent-trend cooling case for thermal energy  
234 sources from 2005 to 2100, where the proportions of open-loop cooling systems that decreased to 10% and closed-  
235 loop cooling systems that increased to 90% are shaded. Although the change of 0.4% per year was defined arbitrarily,  
236 we used it to represent shifts completed for all thermal energy sources by 2080. Previous studies have also assumed  
237 that cooling system shifts would be completed by the late 21<sup>st</sup> century (Davies et al., 2013; Fricko et al., 2016). As  
238 the proportion of open-loop cooling systems is unlikely to decrease to 0%, we arbitrarily set the lower limit to 10%,  
239 with a corresponding upper limit for closed-loop cooling systems of 90%.

240

### 241 3. Results

242

#### 243 3.1. Comparison of water use for electricity generation under the two cooling system type cases

244

245 Figure 3 shows the global water withdrawal and consumption for electricity generation under the recent-trend  
246 cooling case and status-quo cooling case for the SSPs and climate mitigation scenarios. Figure 3 includes all of the  
247 cooling system type cases and all of the electricity generation scenarios. This section focuses on the impact of cooling  
248 system type on water use for electricity generation.

249 Water withdrawal and consumption within a given cooling system case had similar values until 2030, regardless  
250 of the SSPs and climate mitigation scenarios. Although they followed different trends after 2030, water withdrawal  
251 and consumption increased from 2005 to 2100 under all cooling system type cases and electricity generation scenarios,  
252 except water withdrawal under SSP1 in the recent-trend cooling case.

253 In the recent-trend cooling case, water withdrawal in 2100 under SSP1 was 384–514 km<sup>3</sup> yr<sup>-1</sup>, which was 0.7–  
254 0.9 times that in 2005 (555 km<sup>3</sup> yr<sup>-1</sup>). Water withdrawal in 2100 under SSP2–5 was 785–1070, 580–906, 856–919,  
255 and 1563–2008 km<sup>3</sup> yr<sup>-1</sup>, equivalent to 1.4–1.9, 1–1.6, 1.5–1.7, and 2.8–3.6 times that in 2005, respectively. In the  
256 status-quo cooling case, water withdrawal in 2100 under SSP1–5 was 846–1125, 1713–2658, 1005–2226, 2137–  
257 2335, and 3120–5023 km<sup>3</sup> yr<sup>-1</sup>, equivalent to 1.5–2, 3.1–4.8, 1.8–4, 3.8–4.2, and 5.6–9 times that in 2005, respectively.  
258 The increase in water withdrawal was suppressed in the recent-trend cooling case compared with the status-quo  
259 cooling case, and water withdrawal in 2100 in the recent-trend cooling case was 0.4–0.6 times that of the status-quo  
260 cooling case.

261 In the recent-trend cooling case, water consumption in 2100 under SSP1–5 was 48–67, 94–137, 68–117, 100–  
262 107, and 185–255 km<sup>3</sup> yr<sup>-1</sup>, equivalent to 1.9–2.6, 3.7–5.4, 2.6–4.6, 3.9–4.2, and 7.3–10 times that in 2005 (26 km<sup>3</sup>  
263 yr<sup>-1</sup>), respectively. In the status-quo cooling case, water consumption in 2100 under SSP1–5 was 44–61, 85–121, 64–  
264 103, 88–94, and 170–224 km<sup>3</sup> yr<sup>-1</sup>, equivalent to 1.7–2.4, 3.3–4.7, 2.5–4.0, 3.4–3.7, and 6.7–8.8 times that in 2005,  
265 respectively. In contrast to water withdrawal, water consumption differed little between the recent-trend cooling case  
266 and status-quo cooling case, and water consumption in 2100 in the recent-trend cooling case was only 1.1 times



267 higher than that in the status-quo cooling case.

268

### 269 **3.2. Comparison of water use for electricity generation under different climate mitigation scenarios and** 270 **different socioeconomic scenarios**

271

272 We only examined the impacts of climate mitigation and socioeconomic changes on water withdrawal and  
273 consumption under the recent-trend cooling case, because it was not dependent on the cooling system type case.

274 Water withdrawal and consumption did not differ much among the climate mitigation scenarios within a given SSP  
275 scenario (Fig. 3). Comparing water withdrawal among the climate mitigation scenarios, the maximum water  
276 withdrawal in 2100 under SSP1–5 was only 1.3, 1.4, 1.6, 1.1, and 1.3 times higher than the minimum water  
277 withdrawal, respectively. The maximum water consumption in 2100 among the climate mitigation scenarios under  
278 SSP1–5 was only 1.4, 1.5, 1.7, 1.1, and 1.4 times higher than the minimum water consumption, respectively.

279 In contrast, water withdrawal and consumption differed significantly among the SSPs for a given climate  
280 mitigation scenario (Fig. 3). Comparing water withdrawal among the SSPs, the maximum water withdrawal in 2100  
281 under the baseline, 6.0W, 4.5W, 3.4W, and 2.6W cases was 3.9, 2.8, 4.2, 3.8, and 4.1 times higher than the minimum  
282 water withdrawal, respectively. The maximum water consumption in 2100 among the SSPs under the baseline, 6.0W,  
283 4.5W, 3.4W, and 2.6W cases was 3.8, 2.8, 3.9, 3.6, and 3.8 times higher than the minimum water consumption,  
284 respectively.

285 To compare the water withdrawal and consumption of each SSP, we calculated the average water withdrawal  
286 and consumption of the climate mitigation scenarios under each SSP in 2100. The average water withdrawal in 2100  
287 for the climate mitigation scenarios was about 444, 868, 687, 875, and 1774 km<sup>3</sup> yr<sup>-1</sup> for SSP1–5, respectively. The  
288 average water consumption in 2100 for the climate mitigation scenarios was about 57, 106, 84, 103, and 213 km<sup>3</sup> yr<sup>-1</sup>  
289 for SSP1–5, respectively. SSP5 had the largest average water withdrawal and consumption, which was twice that  
290 of the second largest value. The average water withdrawal and consumption of SSP2 and SSP4 were similar and  
291 represented the second largest values. SSP3 has the fourth largest average water withdrawal and consumption. Finally,  
292 SSP1 has the smallest average water withdrawal and consumption.

293

## 294 **4. Discussion**

295

### 296 **4.1. Impact of cooling system type**

297

298 We compared the recent-trend cooling case with the status-quo cooling case to assess the impact of cooling  
299 system shifts discussed in Sect. 3.1. Water withdrawal was much lower in the recent-trend cooling case, while water  
300 consumption was slightly larger than that in the status-quo cooling case (Fig. 3).

301 The difference between water withdrawal and consumption in the recent-trend cooling case can be explained by  
302 the water use intensity (Table 2). The water withdrawal intensity of the closed-loop cooling system was much smaller  
303 than that of the open-loop cooling system. Therefore, water withdrawal in the recent-trend cooling case, which  
304 represented the shift from open-loop to closed-loop cooling systems, was much smaller than that in the status-quo





305 cooling case. Conversely, the difference in water consumption intensity between the open-loop and closed-loop  
306 cooling systems was much smaller compared with that of water withdrawal intensity, although the water consumption  
307 intensity of the closed-loop cooling system was larger than that of the open-loop cooling system. Therefore, water  
308 consumption in the recent-trend cooling case was slightly larger than that in the status-quo cooling case.

309 Recent shifts in the type of cooling system in use suppressed water withdrawal increases compared the status-  
310 quo case. In contrast, water consumption increased overall, regardless of cooling system type. Previous studies have  
311 also predicted an overall increase in water consumption (Davies et al., 2013; Kyle et al., 2013; Hejazi et al., 2014).

312

#### 313 **4.2. Impact of the climate mitigation and socioeconomic scenarios**

314

315 We compared the water withdrawal and consumption of each SSP and climate mitigation scenario to assess the  
316 impact of climate mitigation changes and socioeconomic changes described in Sect. 3.2. Water withdrawal and  
317 consumption did not differ substantially among climate mitigation scenarios within a given SSP scenario. In contrast,  
318 water withdrawal and consumption differed significantly among SSPs within a given climate mitigation scenario (Fig.  
319 3).

320 This can be explained by the composition of energy sources. Figure 4 shows global water withdrawal and  
321 consumption under the recent-trend cooling case by energy source in 2100 for the SSPs and climate mitigation  
322 scenarios. Water withdrawal and consumption consisted mostly of coal, natural gas, nuclear, and biomass power,  
323 because these energy sources had considerable demands on water withdrawal and consumption intensity. Similarly,  
324 oil power had a considerable demand on water withdrawal and consumption intensity; however, it did not have a  
325 large effect on water withdrawal and consumption due to the minimal electricity generated by oil power in all  
326 scenarios. For the same reason, geothermal power did not have a large effect on water consumption, although it  
327 showed considerable water consumption intensity. The water withdrawal and consumption intensities of other energy  
328 sources (i.e., solar and wind power) were negligible. Therefore, water withdrawal and consumption relied heavily on  
329 electricity generation from coal, natural gas, nuclear, and biomass power.

330 Within a given SSP scenario, the electricity generation from these energy sources did not differ substantially  
331 when the difference between power plants with or without CCS was not taken into account in the climate mitigation  
332 scenarios, except the baseline case (Fig. 2). Under stronger mitigation scenarios, water withdrawal and consumption  
333 increased with electricity generation from power plants with CCS. At the same time, water withdrawal and  
334 consumption decreased with increases in electricity generation from renewable energy. The increased water demand  
335 due to the increase in CCS was negated by the decreased water demand due to the increase in renewable energy.  
336 Therefore, water withdrawal and consumption did not differ greatly among the climate mitigation scenarios (Fig. 4).  
337 Comparing the baseline case with other climate mitigation scenarios, the composition of energy sources was almost  
338 the same in SSP1 and SSP4. However, it differed significantly from the other scenarios, as more fossil fuels were  
339 used in SSP2, SSP3, and SSP5. Therefore, SSP1 and SSP4 had nearly the same water withdrawal and consumption  
340 under all climate mitigation scenarios. However, in SSP2, SSP3, and SSP5, only water withdrawal and consumption  
341 in the baseline case was larger than those under the other climate mitigation scenarios.

342 Within a given climate mitigation scenario, electricity generation from coal, natural gas, nuclear, and biomass



343 power plants varied widely among the SSPs (Fig. 2), and water withdrawal and consumption differed significantly  
344 among the SSPs (Fig. 4). The composition of energy sources was influenced greatly by socioeconomic changes. Each  
345 SSP is characterized by multiple assumptions related to energy, including energy cost, energy preference, and social  
346 acceptance (Fujimori et al., 2016b). Even though the climate mitigation targets differed, the assumptions of each SSP  
347 did not change. Therefore, the energy sources applied to each SSP essentially did not change, and only low-carbon  
348 energy, such as renewable energy and CCS, changed according to the climate mitigation target. Thus, climate  
349 mitigation changes had little impact on water withdrawal and consumption for electricity generation. This was  
350 because the electricity generation from energy sources requiring a considerable amount of water was similar among  
351 the climate mitigation scenarios compared with the SSPs, and the water increase driven by CCS was compensated  
352 for by the water decrease driven by renewable energy. In contrast, socioeconomic changes had a large impact on  
353 water withdrawal and consumption for electricity generation because the electricity generation of the energy sources  
354 differed widely among the SSPs. The applicability of these results on a regional scale is discussed in Sect. 4.3.

355

#### 356 **4.3. Impact of the climate mitigation and socioeconomic scenarios by region**

357

358 Figure 5 shows the regional water withdrawal differences under the recent-trend cooling case in 2100 among  
359 the SSPs and climate mitigation scenarios. In all regions, the differences among the SSPs under a given climate  
360 mitigation scenario were much larger than those among the climate mitigation scenarios under a given SSP scenario.  
361 The regional water consumption in the recent-trend cooling case exhibited the same trend (Fig. S2). This indicated  
362 that the impact of socioeconomic changes was larger than the impact of climate mitigation changes on a regional  
363 scale, as was the case on a global scale. This trend was observed even though the composition of energy sources  
364 differs drastically between the regional and global scales. As an example, we examined the impacts of climate  
365 mitigation and socioeconomic changes in the Middle East.

366 The composition of energy sources in the Middle East differed completely from that on a global scale. Under  
367 the baseline case, oil and natural gas accounted for about 90% of electricity generation over the target period in SSP2,  
368 SSP3, and SSP5 (Fig. S3). In contrast, renewable energy grew substantially after 2030, accounting for about 50% of  
369 electricity generation in SSP1 and SSP4. In the other climate mitigation scenarios, renewable energy also grew, and  
370 became the major energy source in SSP2, SSP3, and SSP5 (Fig. S4).

371 Figure 6 shows the water withdrawal and consumption under the SSPs and climate mitigation scenarios for the  
372 recent-trend cooling case. Among the climate mitigation scenarios, the maximum water withdrawal in 2100 was 1.3–  
373 2.2 times higher than the minimum water withdrawal, while the maximum water consumption in 2100 was 1.3–2.2  
374 times higher than the minimum water consumption. In contrast, among the SSPs, the maximum water withdrawal in  
375 2100 was 2.7–4.2 times higher than the minimum water withdrawal, and the maximum water consumption in 2100  
376 was 2.7–4.3 times higher than minimum water consumption. Although the composition of energy sources differed  
377 from that on a global scale, the water increase driven by CCS was negated by the water decrease driven by renewable  
378 energy within a given SSP scenario, and the composition of energy sources varied widely among the SSPs within a  
379 given climate mitigation scenario, as was the case on a global scale. Therefore, the impact of socioeconomic changes  
380 was larger than that of climate mitigation changes in the Middle East.



381

382

#### 4.4. Comparison of water use for electricity generation under different CCS water use intensities

383

384 As described in Sect. 2.2, we assumed that the water use intensities of CCS were 30% higher than those without  
385 CCS. However, this assumption had a high uncertainty. We compared the water withdrawal and consumption  
386 calculated from different water use intensities of CCS (Fig. 7), where CCS-Low represents water withdrawal and  
387 consumption calculated using the 30% assumption, while CCS-High represents water withdrawal and consumption  
388 calculated using the assumption that the water use intensities of power plants with CSS were 100% higher those  
389 without CCS. The water withdrawal and consumption of CCS-Low and CCS-High in SSP1-4.5W, SSP2-6.0W, SSP4-  
390 4.5W and all baseline cases were the same or nearly the same, because CCS was not introduced or only minimally  
391 introduced. The water withdrawal and consumption of CCS-High in the other scenarios was 1.2–1.4 times larger than  
392 that of CCS-Low. In the stronger mitigation scenarios, water withdrawal and consumption were generally larger  
393 because CCS was more widespread.

394 Comparing CCS-High water use among the climate mitigation scenarios, the maximum water withdrawal in  
395 2100 was 1.1–1.4 times higher than the minimum water withdrawal, while the maximum water consumption in 2100  
396 was 1.1–1.4 times higher than minimum water consumption. In contrast, comparing CCS-High water use among the  
397 SSPs, the maximum water withdrawal in 2100 was 2.8–5.5 times higher than minimum water withdrawal, and the  
398 maximum water consumption in 2100 among the SSPs was 2.8–5.2 times higher than minimum water consumption.  
399 Therefore, the water withdrawal and consumption of CCS-High did not differ greatly among the climate mitigation  
400 scenarios, but differed significantly among the SSPs. If the water use intensity of power plants with CCS was 100%  
401 higher than those without CCS, the impact of socioeconomic changes would be larger than that of climate mitigation  
402 changes.

403

404

#### 4.5. Comparison of water consumption for electricity generation with/without hydropower

405

406 As described in Sect. 2.2, we excluded water consumption from hydropower in this study. To support this  
407 decision, we compared water consumption with and without hydropower (Fig. 8). Water consumption with  
408 hydropower was more than two times greater than that without hydropower under all scenarios, except SSP5,  
409 although the impact of hydropower on water consumption differed among the SSPs. For example, the water  
410 consumption of SSP1 and SSP3 was about three times larger with hydropower, because these scenarios had larger  
411 electricity generation shares from hydropower. In contrast, the water consumption of SSP5 was only about 1.5 times  
412 larger with hydropower, because SSP5 had a small electricity generation share from hydropower. The impact of  
413 socioeconomic changes on water consumption for electricity generation was larger than that of climate mitigation  
414 changes, regardless of whether hydropower was included.

415

416

## 5. Conclusions

417

418

This study projected the global water use for electricity generation from 2005 to 2100 for 17 global sub-regions



419 using the latest scenarios on global change, SSPs which determine socioeconomic conditions and climate mitigation  
420 scenarios which determine climate policies such as targets of GHG emissions. We assessed the impact of shifts in  
421 the proportions of cooling system types in use, as well as the impacts of socioeconomic and climate mitigation  
422 changes.

423 The results showed that a shift in cooling system types in use resulted in the suppression of water withdrawal  
424 increases in the future compared with the status-quo case. However, water consumption increased regardless of a  
425 shift in cooling system type.

426 Second, we found that water use differed significantly among the SSPs, because the electricity generation from  
427 energy sources requiring a considerable amount of water varied widely among the SSPs. In contrast, water use did  
428 not differ substantially among the climate mitigation scenarios although they are determinants of GHG emissions,  
429 because the electricity generation from the various energy sources differed less among the climate mitigation  
430 scenarios compared with the SSPs. At the same time, water use increases driven by an increase in the proportion of  
431 power plants with CCS were negated by water use decreases driven by the increased use of renewable energy.  
432 Therefore, socioeconomic changes were predicted to have a much larger impact on water use for electricity generation  
433 compared with climate mitigation changes. Even though the composition of energy sources differed among regions,  
434 this trend was applicable on a regional scale.

435 We focused on the impact of energy generation on water use. However, water condition (e.g., water scarcity and  
436 increases in water temperature) can also impact electricity generation. For example, water scarcity could constrain  
437 electricity generation from energy sources that require large amounts of water, and increases in water temperature  
438 could reduce power plant efficiency (van Vliet et al., 2016). Such feedback between energy and water should be  
439 taken into account in future predictions. Moreover, tradeoffs between other water users, such as agriculture,  
440 manufacturing, and domestic users, should be considered. To address these challenges, additional studies based on  
441 global hydrological models are necessary to compliment the results of this study.

442

#### 443 **Acknowledgments**

444 This study was supported by JSPS KAKENHI Grant Numbers JP16H06291, JP15H04047; SOUSEI Program  
445 from the Ministry of Education, Culture, Sports, Science and Technology (MEXT); and the Environment Research  
446 and Technology Development Fund (S-10) of the Ministry of the Environment, Japan.

447

#### 448 **References**

- 449 Alcamo, J., Flörke, M., and Märker, M.: Future long-term changes in global water resources driven by socio-  
450 economic and climatic changes. *Hydrolog. Sci. J.*, 52(2), 247-275, doi:10.1623/hysj.52.2.247, 2007.
- 451 Bartos, M. D. and Chester, M. V.: Impacts of climate change on electric power supply in the Western United States.  
452 *Nat. Clim. Change*, 5, 748–752, doi:10.1038/nclimate2648, 2015.
- 453 Bijl, D. L., Bogaart, P. W., Kram, T., de Vries, B. J., and van Vuuren, D. P.: Long-term water demand for electricity,  
454 industry and households. *Environ. Sci. Policy*, 55(1), 75–86, doi:10.1016/j.envsci.2015.09.005, 2016.
- 455 Davies, E. G., Kyle, P., and Edmonds, J. A.: An integrated assessment of global and regional water demands for  
456 electricity generation to 2095. *Adv. Water Resour.*, 52, 296–313, doi:10.1016/j.advwatres.2012.11.020, 2013.



- 457 Flörke, M., Kynast, E., Bärlund, I., Eisner, S., Wimmer, F., and Alcamo, J.: Domestic and industrial water uses of the  
 458 past 60 years as a mirror of socio-economic development: A global simulation study. *Glob. Environ. Change*,  
 459 23(1), 144–156, doi:10.1016/j.gloenvcha.2012.10.018, 2013.
- 460 Fricko, O., Parkinson, S. C., Johnson, N., Strubegger, M., van Vliet, M. T., and Riahi, K.: Energy sector water use  
 461 implications of a 2°C climate policy. *Environ. Res. Lett.*, 11(3), 034011, doi:10.1088/1748-9326/11/3/034011,  
 462 2016.
- 463 Fujimori, S., Hanasaki, N., and Masui, T.: Projections of industrial water withdrawal under shared socioeconomic  
 464 pathways and climate mitigation scenarios. *Sustain. Sci.*, 1–18, doi:10.1007/s11625-016-0392-2, 2016a.
- 465 Fujimori, S., Hasegawa, T., Masui, T., Takahashi, K., Herran, D. S., Dai, H., Hijioka, Y., and Kainuma, M.: SSP3:  
 466 AIM implementation of Shared Socioeconomic Pathways. *Glob. Environ. Change*, doi:  
 467 10.1016/j.gloenvcha.2016.06.009, 2016b.
- 468 Hanasaki, N., Fujimori, S., Yamamoto, T., Yoshikawa, S., Masaki, Y., Hijioka, Y., Kainuma, M., Kanamori, Y., Masui,  
 469 T., Takahashi, K., and Kanae, S.: A global water scarcity assessment under Shared Socio-economic pathways—  
 470 Part 1: water use. *Hydrol. Earth Syst. Sci.*, 17, 2375–2391, doi:10.5194/hess-17-2375-2013, 2013.
- 471 Hejazi, M., Edmonds, J., Clarke, L., Kyle, P., Davies, E., Chaturvedi, V., Wise, M., Patel, P., Eom, J., Calvin, K.,  
 472 Moss, R., and Kim, S.: Long-term global water projections using six socioeconomic scenarios in an integrated  
 473 assessment modeling framework. *Technol. Forecast. Soc.*, 81(1), 205–226, doi:10.1016/j.techfore.2013.05.006,  
 474 2014.
- 475 International Energy Agency (IEA): *World Energy Outlook 2012*. OECD/IEA, Paris, France, pp. 690, 2012.
- 476 Kyle, P., Davies, E. G., Dooley, J. J., Smith, S. J., Clarke, L. E., Edmonds, J. A., and Hejazi, M.: Influence of  
 477 climate change mitigation technology on global demands of water for electricity generation. *Int. J. Greenhouse*  
 478 *Gas Control*, 13, 112–123, doi:10.1016/j.ijggc.2012.12.006, 2013.
- 479 Macknick, J., Newmark, R., Heath, G., and Hallett, K. C.: *A review of operational water consumption and*  
 480 *withdrawal factors for electricity generating technologies*. NREL/TP-6A20-50900. National Renewable  
 481 Energy Laboratory, Golden, Colorado, 2011.
- 482 O'Neill, B. C., Kriegler, E., Riahi, K., Ebi, K. L., Hallegatte, S., Carter, T. R., Mathur, R., and van Vuuren, D. P.: A  
 483 new scenario framework for climate change research: the concept of shared socioeconomic pathways. *Climatic*  
 484 *Change*, 122(3), 387–400, doi:10.1007/s10584-013-0905-2, 2014.
- 485 Shen, Y., Oki, T., Utsumi, N., Kanae, S., and Hanasaki, N.: Projection of future world water resources under SRES  
 486 scenarios: water withdrawal. *Hydrolog. Sci. J.*, 53(1), 11–33, doi:10.1623/hysj.53.1.11, 2008.
- 487 The Center for Global Development.: *Carbon Monitoring for Action*. <http://carma.org/plant>, last accesse: 24 Dec  
 488 2016, 2014.
- 489 Utility Data Institute (UDI): *World Electric Power Plants Database*. <http://www.platts.com>, last accesse: 24 Dec 2016,  
 490 2014.
- 491 Van Vliet, M. T., Wiberg, D., Leduc, S., and Riahi, K.: Power-generation system vulnerability and adaptation to  
 492 changes in climate and water resources. *Nat. Clim. Change*, 6, 375–380, doi:10.1038/nclimate2903, 2016.
- 493 Van Vuuren, D. P., Edmonds, J., Kainuma, M., Riahi, K., Thomson, A., Hibbard, K., Hurtt, G. C., Kram, T., Krey, V.,  
 494 Lamarque, J. F., Masui, T., Meinshausen, M., Nakicenovic, N., Smith, S. J., and Rose, S. K.: The representative



- 495 concentration pathways: an overview. *Climatic Change*, 109, 5–31, doi:10.1007/s10584-011-0148-z, 2011.
- 496 Vassolo, S. and Döll, P.: Global-scale gridded estimates of thermal power and manufacturing water use. *Water Resour.*
- 497 *Res.*, 41(4), W04010, doi:10.1029/2004WR003360, 2005.

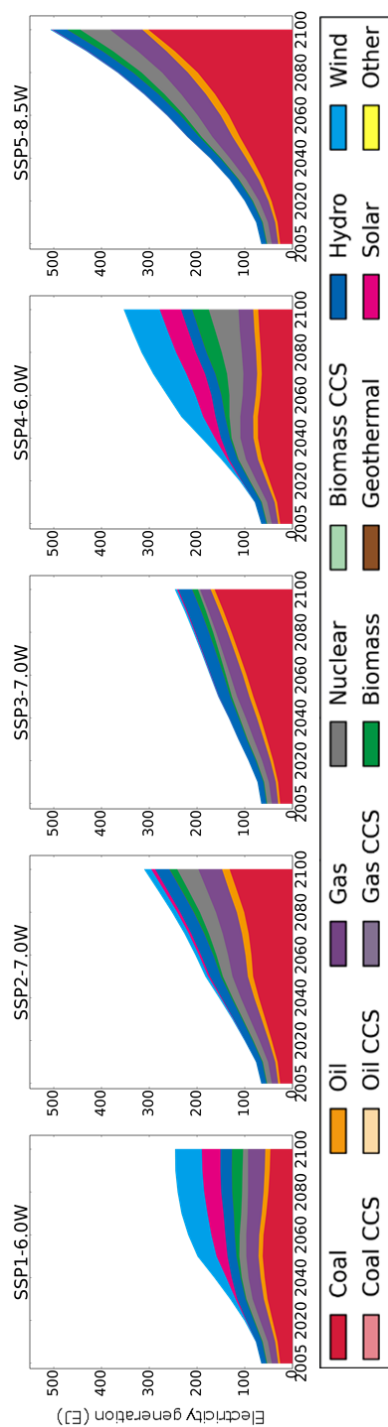


Figure 1 Global electricity generation (EJ) by energy source under the baseline case for the Shared Socioeconomic Pathways (SSPs).

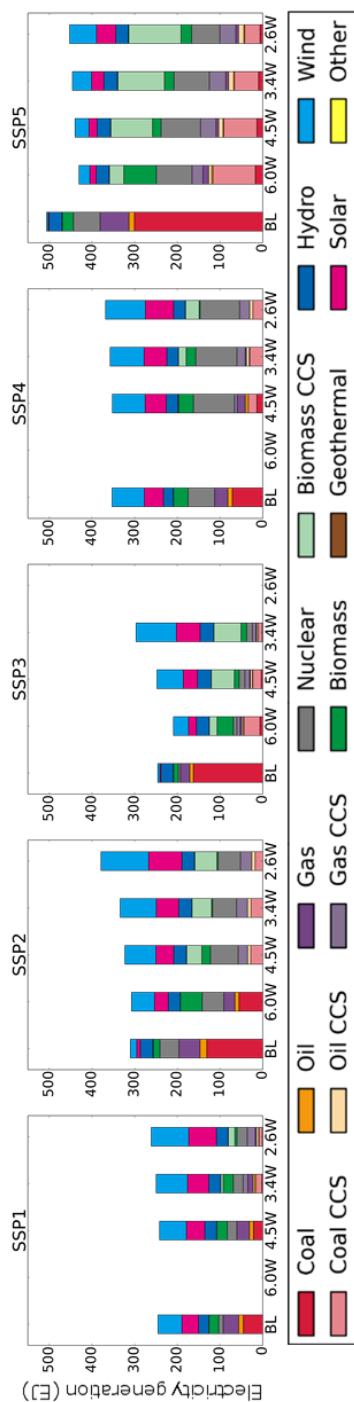


Figure 2 Global electricity generation (EJ) by energy source in 2100 for the SSPs and climate mitigation scenarios. BL, baseline case.



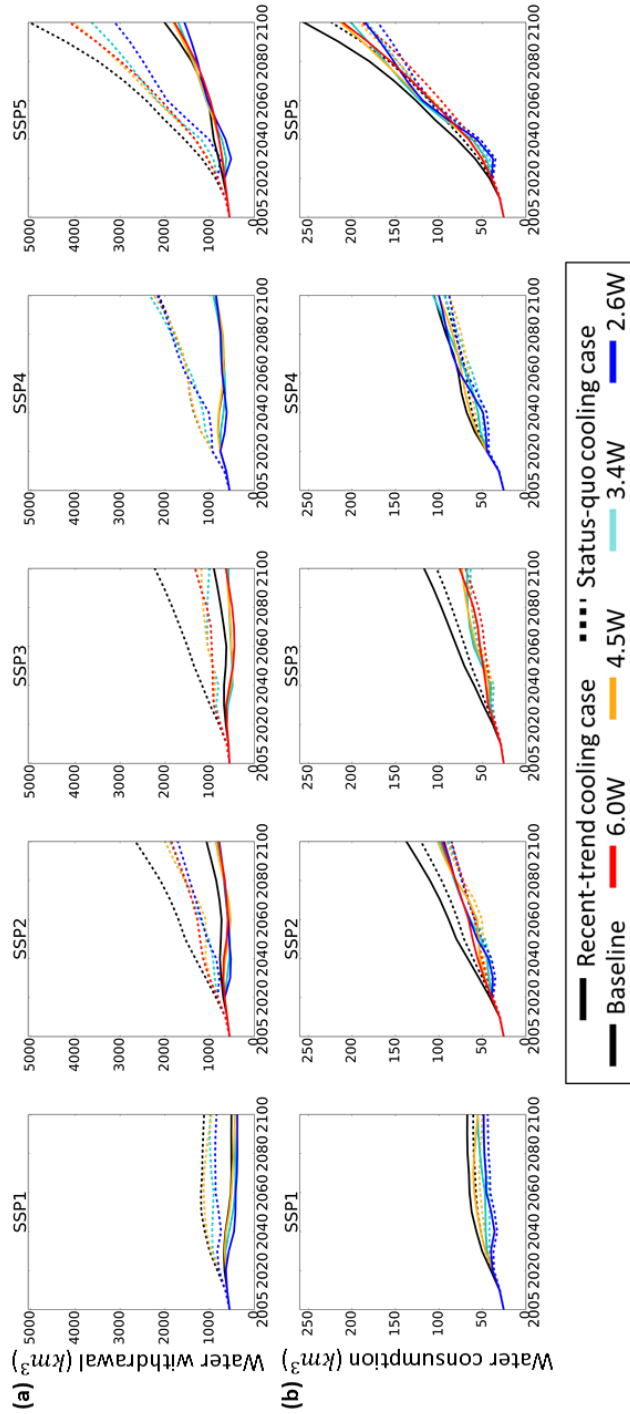


Figure 3 Global (a) water withdrawal ( $\text{km}^3 \text{ yr}^{-1}$ ) and (b) consumption ( $\text{km}^3 \text{ yr}^{-1}$ ) under the recent-trend cooling case and status-quo cooling case for the SSPs and climate mitigation scenarios. The baseline case represents a climate mitigation scenario with no constraints on greenhouse gas (GHG) emissions.

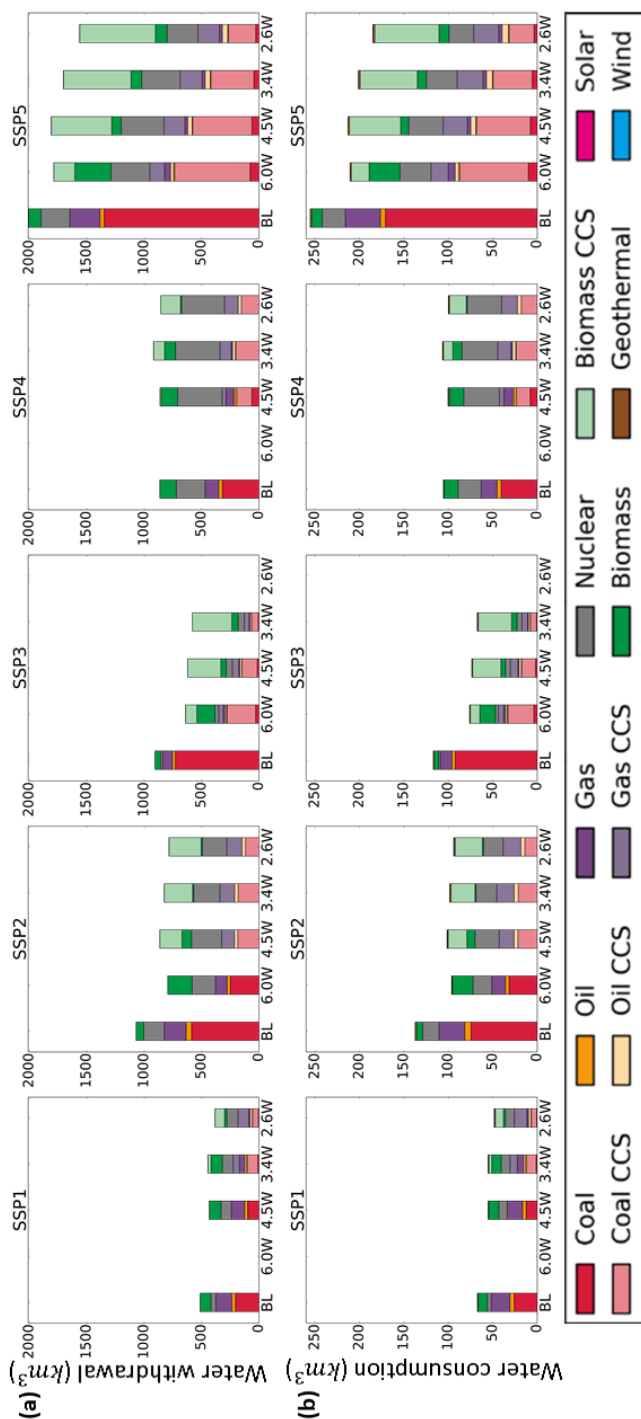


Figure 4 Global (a) water withdrawal ( $km^3 yr^{-1}$ ) and (b) consumption ( $km^3 yr^{-1}$ ) by energy source under the recent-trend cooling case in 2100 for the SSPs and climate mitigation scenarios. BL, baseline case.

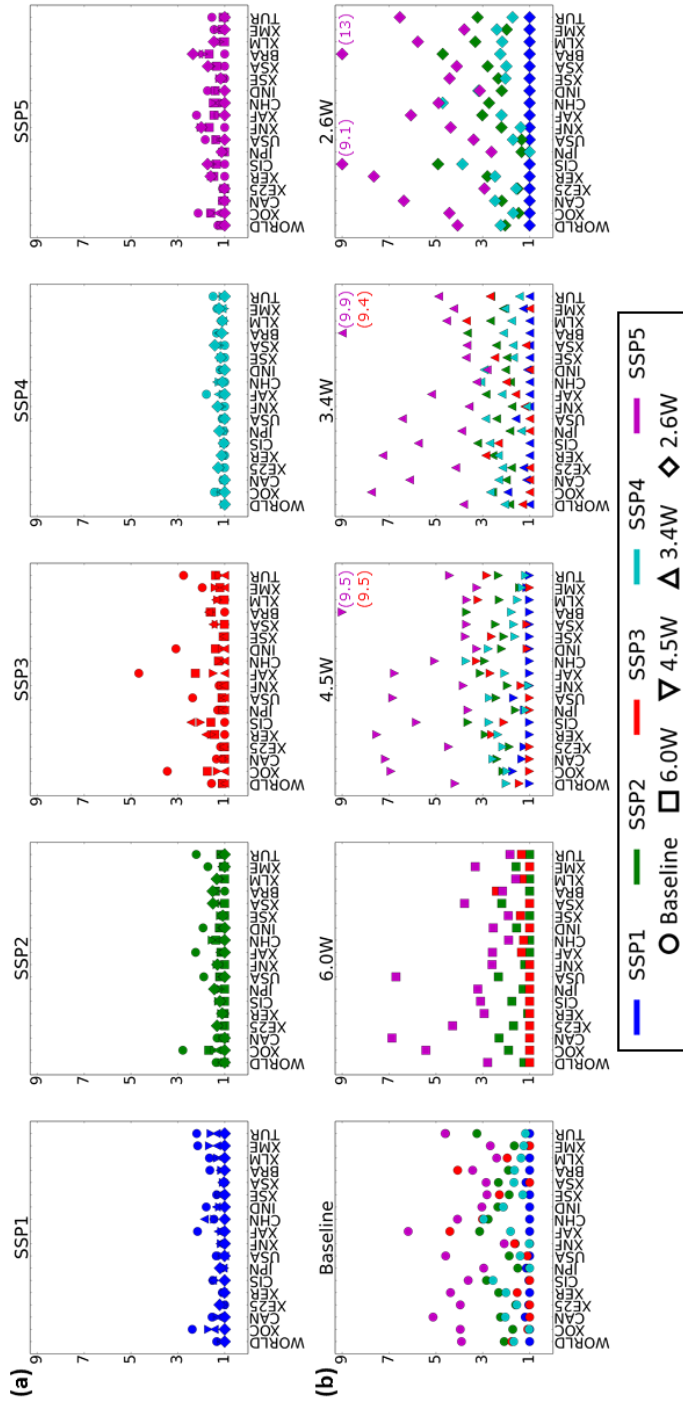


Figure 5 Regional water withdrawal differences under the recent-trend cooling case when (a) the SSP is fixed and (b) the climate mitigation scenario is fixed in 2100. These values were calculated from the water withdrawal of each scenario divided by the minimum water withdrawal among the scenarios. “1” represents the minimum water consumption among the climate mitigation scenarios in (a) and among the SSPs in (b). Values > 9 are plotted at 9 and noted in parentheses.

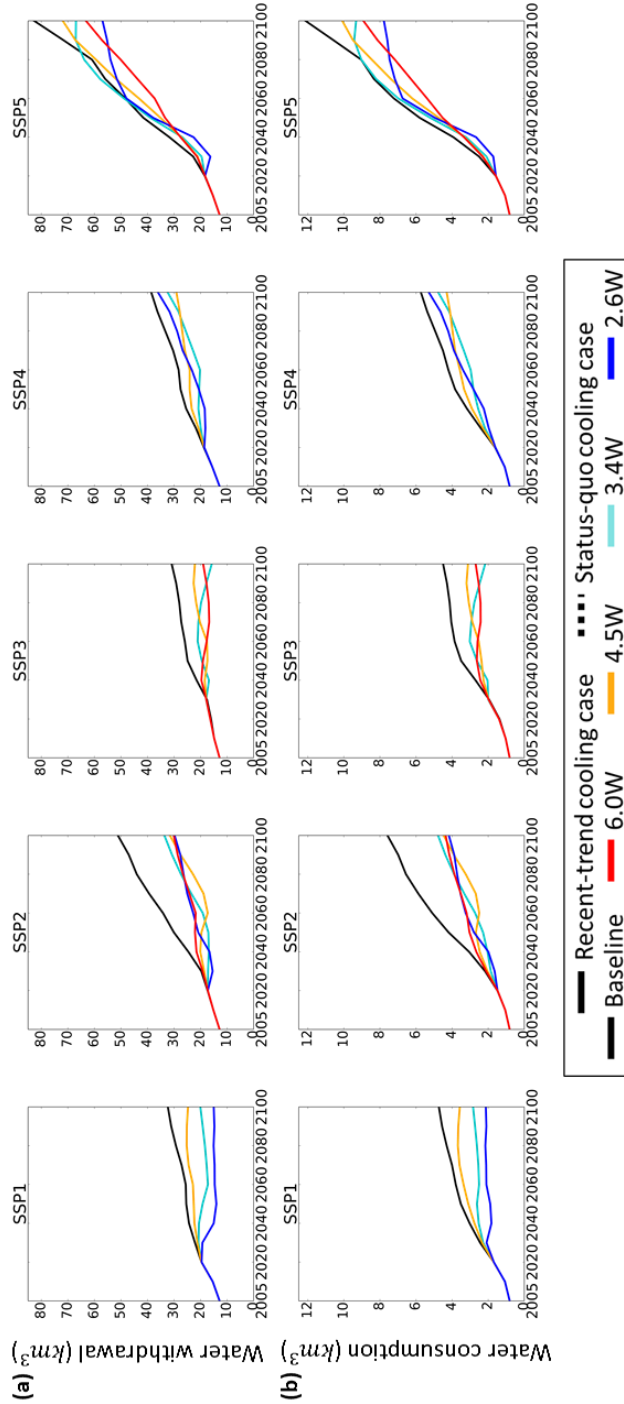


Figure 6 (a) Water withdrawal ( $\text{km}^3 \text{ yr}^{-1}$ ) and (b) consumption ( $\text{km}^3 \text{ yr}^{-1}$ ) under the recent-trend cooling case for the SSPs and climate mitigation scenarios in the Middle East.

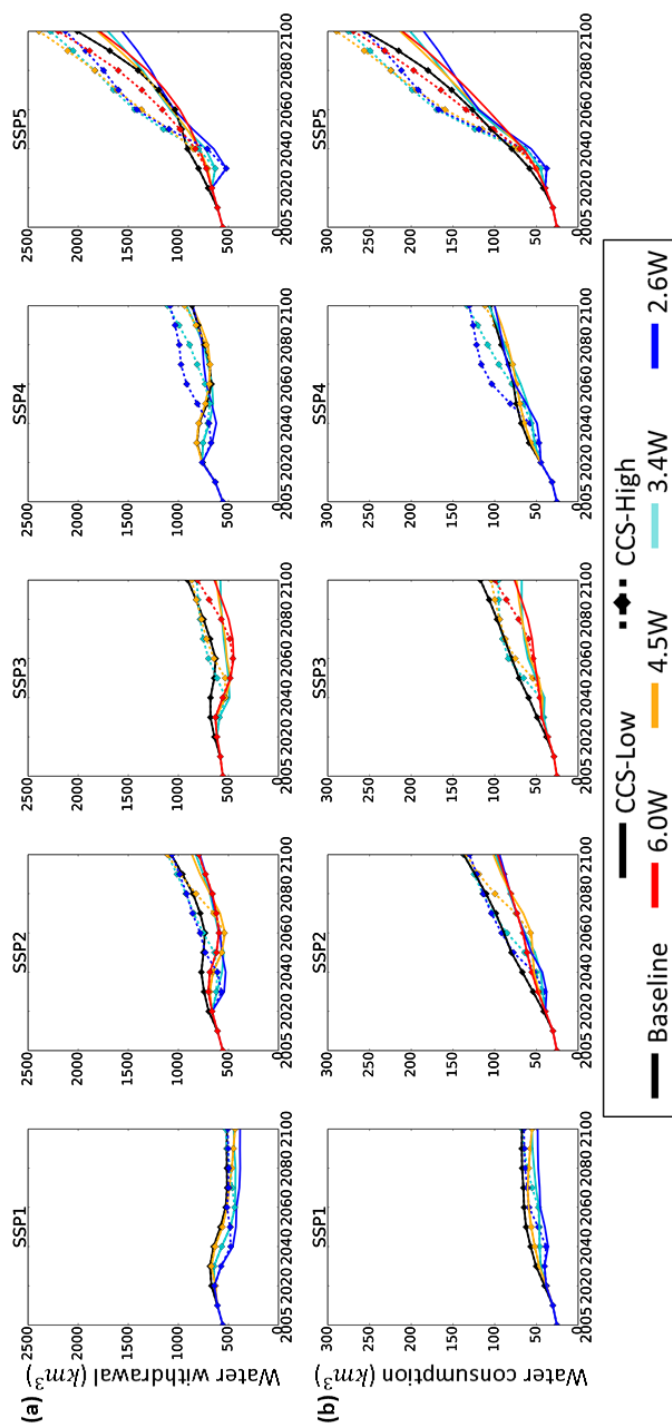


Figure 7 (a) Water withdrawal ( $\text{km}^3 \text{ yr}^{-1}$ ) and (b) water consumption ( $\text{km}^3 \text{ yr}^{-1}$ ) under the recent-trend cooling case for the SSPs and climate mitigation scenarios. CCS-Low and CCS-High represent cases in which water withdrawal and consumption were calculated using assumptions that power plants with CCS had 30% and 100% higher water use intensities, respectively, than without CCS.

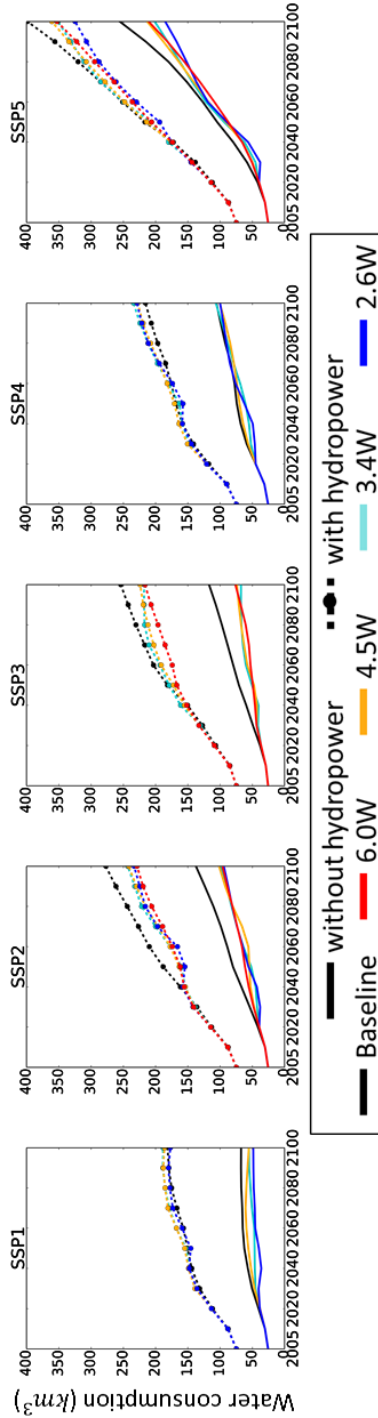


Figure 8 Global water consumption with and without hydropower ( $\text{km}^3 \text{ yr}^{-1}$ ) under the recent-trend cooling case ( $\text{km}^3 \text{ yr}^{-1}$ ) for the SSPs and climate mitigation scenarios.



Table 1 Electricity generation ratio of seawater-based power plants to total electricity generation (%) by AIM/CGE region.

No.	Region	Region code	Coal	Oil	Natural gas	Nuclear	Biomass
1	Oceania	XOC	14	37	34	0	48
2	Canada	CAN	12	54	5	8	10
3	EU25	XE25	16	46	29	34	22
4	Rest of Europe	XER	6	16	8	0	1
5	Former Soviet Union	CIS	2	1	6	0	1
6	Japan	JPN	75	71	58	100	32
7	United States	USA	2	22	16	15	11
8	North Africa	XNF	92	76	51	0	0
9	Rest of Africa	XAF	3	45	36	100	33
10	China	CHN	12	15	16	30	8
11	India	IND	12	33	15	29	5
12	Southeast Asia	XSE	65	58	40	75	27
13	Rest of Asia	XSA	43	19	21	5	23
14	Brazil	BRA	17	34	27	100	7
15	Rest of South America	XLM	42	55	37	63	30
16	Middle East	XME	63	47	41	34	42
17	Turkey	TUR	27	50	53	100	69



Table 2 Water use intensity ( $\text{m}^3 \text{MWh}^{-1}$ ) by energy source and cooling system type, with (w) and without (w/o) carbon capture and storage (CCS).

Energy source	Cooling system	CCS	Water withdrawal ( $\text{m}^3 \text{MWh}^{-1}$ )	Water consumption ( $\text{m}^3 \text{MWh}^{-1}$ )
Coal	Open-loop	w/o	158	0.95
		w	241	1.25
	Closed-loop	w/o	3.8	2.60
		w	4.83	3.57
Oil/Natural gas	Open-loop	w/o	152	0.91
		w	198	1.18
	Closed-loop	w/o	4.55	3.13
		w	5.92	4.07
Nuclear	Open-loop		193	1.02
	Closed-loop		4.17	2.54
Biomass	Open-loop	w/o	152	1.14
		w	198	1.48
	Closed-loop	w/o	3.32	2.09
		w	4.32	2.72
Geothermal	Closed-loop		6.82	6.82
Hydro			0	17
Solar			0	0
Wind			0.02	0.02





Table 3 Proportion of cooling system type in use (%) by thermal energy source under the recent-trend cooling case from 2005 to 2100.

Energy source	Cooling system	2005	2010	2020	2030	2040	2050	2060	2070	2080	2090	2100
Coal	Open-loop	30	28	24	20	16	12	10	10	10	10	10
	Closed-loop	70	72	76	80	84	88	90	90	90	90	90
Oil	Open-loop	31	29	25	21	17	13	10	10	10	10	10
	Closed-loop	69	71	75	79	83	87	90	90	90	90	90
Natural gas	Open-loop	20	18	14	10	10	10	10	10	10	10	10
	Closed-loop	80	82	86	90	90	90	90	90	90	90	90
Nuclear	Open-loop	38	36	32	28	24	20	16	12	10	10	10
	Closed-loop	62	64	68	72	76	80	84	88	90	90	90
Biomass	Open-loop	14	12	10	10	10	10	10	10	10	10	10
	Closed-loop	86	88	90	90	90	90	90	90	90	90	90