

1 Sao Carlos, SP, Brazil, 16 March 2018.

2
3 **Dr. Zhenyao Shen,**

4 **Dear Editor**

5
6 Please find below the responses to the reviewer comments on the manuscript **hess-**
7 **2017-474**, entitled “**Modelling freshwater quality scenarios with ecosystem-based**
8 **adaptation in the headwaters of the Cantareira System, Brazil**” and submitted to the
9 Hydrology and Earth System Sciences (HESS) Journal for possible publication.

10 On behalf of my co-authors, I would like to express my thanks for the reviewers
11 comments and corrections, which have considerably contributed to improve the manuscript.
12 We have included all the modifications requested in the Second Review. These changes and a
13 point-by-point response to the reviewers are described below. Also, we have highlighted the
14 modified passages in the text.

15 In this new version, we better explained several parts of the text to become it easier to
16 understand. Moreover, the final text was revised by a professional service of English language
17 editing, the Native English Speaker **Jane Godwin Coury**.

18 We hope that the manuscript – which aims to compare freshwater quality scenarios
19 under different land-use/land-cover (LULC) change, one of them related to best management
20 practices in subtropical headwaters, using the spatially semi-distributed SWAT model in
21 Brazilian subtropical catchments ranging from 7.2 to 1037 km²- can help public-and-private
22 partnerships empowering river basin committees for better decision-making and will be of
23 interest to the HESS journal’s broad readership.

24
25 Looking forward to a positive reply,

26
27 Sincerely,

28
29 **Dr. Denise Taffarello.**

30 Post-doctoral researcher at University of Sao Paulo

32 Reviewer Comments 1 (RC1)

33 **“The abstract section could be concise”.** **Answer: Modified abstract.** We agree with this
34 commentary and corrected the abstract accordingly (see new text)

35 **[General comment], RC1 - “One of the main reasons for the discrepancies between**
36 **monitoring data/existing literatures and model simulations might be the weakness of SWAT**
37 **model to capture extreme flows or water yields.”** **Answer:** The authors deeply thank and
38 welcome the comments of Reviewer #1. We agree with this general comment. Other detailed
39 responses are described below, as follows.

40 **Original text, Line 55, RC1 – “Colombia (2015, 2014, 2010)”** **Answer:** Corrected in the
41 updated version of the manuscript. Thank you.

42 **Original text, “Lines 58 to 66, RC1 - “Hoekstra et al., 2011” is over cited. Could be**
43 **rephrased.”** **Answer:** This entire paragraph was rephrased, dropping out the overcitation of
44 Hoekstra et al (2001)’s work.

45 **Line 141, RC1 –“... run from 2009 to 2014”.** **Answer:** Thank you. The new statement is:
46 “The Water Producer/PCJ Project was developed in the period 2009-2014 in the Cantareira
47 System region (Guimarães, 2013), using EbA scenarios and through local actions through the
48 concept of Payment for Ecosystem Services-Water [Pagiola et al, 2013; quoted] ”

49 **Line 153, RC1 - “three data collection platforms ”their geographic locations could be**
50 **indicated on the study area map.”** **Answer:** The three DCPs are indicated on the study’s area
51 (in Table 1, Table 4 and Figure 8, new version of the paper).

52 **Line 156, RC1: “the type of secondary data could be clearly indicated.”** **Answer:** We
53 appreciate this comment. The explanation to be updated in the new version of the paper
54 appears as follows (because of the extension of these new statements, we suggest worth
55 appending them in a Supplementary Material section, according to HESS Editor final
56 decision): “To reduce uncertainty about hydrological scaling effects of EbA through LULC
57 scenarios, in the period 2011-2014 we also collected supplementary, secondary data through
58 three strategies. First, we scheduled surveillance and interviews with local owners and
59 farmers who explained their past, present and future(planned) best management practices
60 related to Payment for Ecosystem Services-Water, derived from EbA initiatives, of PCJ-
61 Produtor de Agua Project of Cantareira System’s headwaters [Pagiola et al, 2013, Brazil’s
62 Experience with Payments for Environmental Services. Payments for Environmental Services
63 (PES) learning paper;no. 2013-1. World Bank, Washington, DC, World Bank.
64 <https://openknowledge.worldbank.org/handle/10986/17854> License: CC BY 3.0 IGO]. These
65 secondary information helped on linking LULC derived from EbA/PES-Water with some
66 parameters of selected hydrologic response units (i.e. SWAT-HRUs). These surveillance on
67 local knowledge brought a better understanding on physically-based parameters calibrated
68 regionally, but with unsatisfactory coefficients in some catchments, i.e. Poses Catchment (13-
69 km² drainage area). Second, we also gathered secondary information about the scenarios’
70 vision storylines from the multi-agent, multi-level governance of PCJ-Produtor de Agua

71 Project (municipality, state and national). Because of the states' border in between Minas
72 Gerais (MG) and São Paulo (SP) with different reference standards, these multi-
73 agent vision have strongly influenced PES-Water/EbA practices across the transboundary
74 (inter-state) nature of most Cantareira System's catchments. Thus, we performed extra field
75 visits to select sites, with higher uncertainty in modelling EbA and LULC scenarios, to
76 receive new flow gauging stations selected in companion with decision-makers representative
77 of neighbor municipalities (Extrema-MG, Joanópolis-SP, Piracaia-SP and Nazaré Paulista-
78 SP), states (IGAM-MG, SMA-SP and DAEE-SP), federal agencies (ANA-The Brazilian
79 Water Agency, CPRM- Brazilian Geologic Survey, and the National Center for Monitoring &
80 Alerts of Disasters, CEMADEN-MCTIC) and non-government organizations (WWF-Brazil,
81 TNC-Brazil and local initiatives) (see Taffarello et al (2016-b),
82 <http://dx.doi.org/10.4236/jep.2016.712152>). Third, the fore-mentioned strategies aided on the
83 identification, selection and prioritization of qualitative and quantitative variables to reduce the
84 uncertainties in the generation of pollutant loads under LULC, as proposed by other authors
85 (see i.e. Zaffani et al, 2015; doi:10.4172/2161-0398.1000173, quoted in the references). These
86 secondary data revealed most viable conditions for nested catchment experiments to monitor
87 experiments and test hypotheses through a scenario-intercomparison modelling of upstream
88 areas of the Jaguari-Jacaré, Cachoeira and Atibainha reservoirs, being updated regularly by
89 official agencies with open access repositior of hydrological database, like ANA
90 (<http://hydroweb.ana.gov.br>) and CEMADEN ([http://www.cemaden.gov.br/pluviometros-
91 automatico/](http://www.cemaden.gov.br/pluviometros-automatico/))”.

92 **Lines 252-255, RC1:** “Besides adopting from the existing literatures, implementing
93 sensitivity analysis could be recommended in order to select model parameters.” **Answer:** We
94 appreciate this comment. The explanation to be updated in the new version of the paper
95 appears as follows (because of the extension of these new statements, we suggest worth
96 appending them in a Supplementary Material section, according to HESS Editor final
97 decision): “The selection of modelling parameters for water yield calibration was developed
98 not only through consulting on SWAT literature [i.e. Arnold et al, 2012; Bressiani et al, 2015;
99 Fukunaga et al, 2015; Gassman et al, 2007; see more explanations for other review comments
100 below] but also performing supervised analysis and comparison of parameters, from recente
101 literature [i.e. Francesconi, W., R. Srinivasan, E. Pérez-Miñana, S.P. Willcock, M. Quintero.
102 2016. Using the Soil and Water Assessment Tool (SWAT) to model ecosystem services: A
103 systematic review. *Journal of Hydrology* 535 (2016) 625–636.
104 DOI:10.1016/j.jhydrol.2016.01.034, and Monteiro, J. A. F., Kamali, B., Srinivasan, R.,
105 Abbaspour, K., and Gücker, B. (2016) Modelling the effect of riparian vegetation restoration
106 on sediment transport in a human-impacted Brazilian catchment. *Ecohydrol.*, doi:
107 10.1002/eco.1726, now quoted]] and even from consultation of USP open access repository
108 [see i.e. works of Rodrigues, 2014, [www.teses.usp.br/teses/disponiveis/18/18138/tde-
109 18122014-094354/pt-br.php](http://www.teses.usp.br/teses/disponiveis/18/18138/tde-18122014-094354/pt-br.php); Bressiani, 2016,
110 www.teses.usp.br/teses/disponiveis/18/18138/tde-04042017-155701/pt-br.php, and Mohor,
111 2016, www.teses.usp.br/teses/disponiveis/18/18138/tde-23032017-102949/pt-br.php]. Firstly,
112 in spite of a much larger list of suggested parameters for modelling goals proposed by

113 Bressiani (2016; quoted), our regional sensitivity analysis followed the recommendations of
114 theory and practice of mapping ecosystem services using Tier 1 and Tier 2 models [see
115 Mendoza et al, 2012, Ch. 3, in Kareiva et al(eds), 2012; ISBN 978-0-19-958899-2]
116 constrained by the short time series monitored for all sites, with unequal quantitative
117 assessment, seasonality and scale effects. Secondly, from the works of Rodrigues et al [2014,
118 doi:10.1002/2013WR014274, 2015, doi: [10.1002/2014WR016691](https://doi.org/10.1002/2014WR016691)], Bressiani et al [2015, doi:
119 10.3965/j.ijabe.20150803.1765] and Mohor & Mendiondo [2017, doi:
120 10.1016/j.ecolecon.2017.04.014] we selected 18 SWAT parameters and their initial range of
121 combinations, as follows: Available water capacity, Moist bulk density, Saturated hydraulic
122 conductivity, Baseflow alpha factor, Threshold depth of shallow aquifer to occur return flow,
123 GW-Revap Coefficient, Groundwater delay time, Deep aquifer percolation fraction,
124 Threshold depth of shallow aquifer to revap or percolation to the deep aquifer, Soil
125 evaporation compensation factor, Plant uptake compensation factor, Manning roughness for the
126 main channel, Effective hydraulic conductivity in main channel, Maximum canopy storage,
127 Manning for overland flow, Average slope steepness, Inicial SCS CN (for antecedente
128 moisture condition 2), and Surface runoff lag coeff. Thirdly, in-situ field validation tests were
129 developed through experimental campaigns to test the limits of variation of streamflow and
130 water quality (see explanations below)

131 **Lines 276 to 279, RC1 - “It is known that SWAT model is not for extreme flows and hence**
132 **water quality parameters.” Answer:** We agree with this comment. For EbA scenarios
133 purposes, we planned set up field investigations and SWAT calibrations [see Figure 5, this
134 HESSD paper] using the extreme conditions of 2013–14 drought through quali-quantitative
135 freshwater monitoring at the headwaters of the Cantareira System, quoted in this paper [see
136 i.e. Taffarello et al, 2016; doi: [10.1080/02508060.2016.1188352](https://doi.org/10.1080/02508060.2016.1188352)]. Those evidences outlined
137 water quality results from 17 catchments, showing regional behaviour for water quality loads
138 in drainage areas (ranging 0.66–925 km²) for future modelling parameterization through
139 SWAT for EbA scenarios purposes. We experimentally sampled water quality parameters of
140 pH, water temperature, electrical conductivity, turbidity, biological oxygen demand (BOD),
141 chemical oxygen demand (COD), total solids (TS), NO₃, NO₂, PO₄, thermotolerant
142 coliforms and Escherichia coli, in several catchments, varying the drainage area, the land use
143 and land cover, helped us to face about uncertainty and complexity of factors affecting SWAT
144 parameter selection. Also, a summary of these results are detailed in Table 4 (this HESSD
145 paper).

146 **Line 299 (RC1) could be moved to line 298. Answer:** It was corrected in the updated version
147 of the manuscript. Thank you.

148 **Lines 310 (RC1) could be moved to line 309. Answer:** It was corrected in the updated
149 version of the manuscript.

150 **Lines 322 (RC1) could be moved to line 321 Answer:**It was corrected in the updated version
151 of the manuscript.

152 **Lines 455 to 456 (RC1)** should be written with appropriate multiplication sign **Answer:**
153 Rewritten as: "... The 52% decrease of water yield between S1 (1990) and S2 (2010)
154 scenarios, as $(14.9 - 31.3)/31.3 \times 100$ might be related to a marginal increase of Eucalyptus
155 cover..."

156 **Line 514, RC1:** "It would be useful to relate spatially the sub-basins in which the differences
157 in land-use/land-cover are the greatest and the water yield, nitrate, total phosphorus and
158 sediments yield differences are evident. For instance providing maps which indicate temporal
159 changes in LULC and corresponding changes in water quality parameters considered."

160 **Answer:** We appreciate this comment. The explanation to be updated in the new version of
161 the paper appears as follows (because of the extension of these new statements, we suggest
162 worth appending them in a Supplementary Material section, according to HESS Editor final
163 decision): "Because of the significant variabilities among selected basins where in-situ
164 monitoring were developed for EbA/PES' scenarios purposes, and because we have not
165 performed field validation in all distributed HRU (hydrologic response units), we decided not
166 showing regional results through maps. Whichever interpolation techniques would not be able
167 of catch the inherent ground-context heterogeneity, and physically-based characteristics, of
168 high-variability functionality of these subtropical catchments. Instead, we do perform initial
169 analysis of clustering similar responses from catchments with most plausible explanations as
170 follows. On the one hand, evidences of SWAT modelled scenarios showed two groups of
171 river basins under EbA scenarios, with distinct land use change of native forest
172 fractions(NF%). Our results show Group 1, with 11 of studied basins, with native forest
173 recovery using EbA (S2+EbA), with an intermediate land use fraction as follows: $NF\%(S2) <$
174 $NF\%(S2+EbA) < NF\%(S1)$. In turn, Group 2, of 9 river basins, showed a progressive growing
175 fraction of native forests across scenarios, with best EbA land use impacts, as follows:
176 $NF\%(S1) < NF\%(S2) < NF\%(S2+EbA)$. Basins of Group 1, are mainly located close to both
177 urban settlements and Eucalipto plantation in Northwestern headwaters, where conservation
178 projects have small adherence of landowners to EbA/PES-Water actions in LULC and, doing
179 so, in SWAT outputs (see Figure 3). Moreover, catchments of Group 1 are mainly located in
180 Eastern and Southeastern areas (Figure 3), where EbA projects of *PCJ-Produtor de Agua* are
181 more expressive. On the other hand, the greatest impacts in water yield are inversely
182 correlated with land-uses and water pollutant quality, but with high non-linear relationships
183 and without explicit regional factors (see Figure 11). For an integrated assessment of hydro-
184 services, it is worth noting phosphorus, nitrate and sediment yields have spatio-temporal
185 changes of load production across scenarios S1, S2 and S2+EbA, which would be better
186 understood in selected catchments, namely Alto Jaguari and Domithildes".

187 **Line 533, RC1:** "Reason for selecting the two sub-basins among the 20 sub-catchments?"

188 **Answer:** We appreciate this comment. The explanation to be updated in the new version of
189 the paper appears as follows (because of the extension of these new statements, we suggest
190 worth appending them in a Supplementary Material section, according to HESS Editor final
191 decision): "These two catchments were selected regarding the distinct groups identified in this
192 study, contrasting the outputs from 20 sites: Upper Jaguari is selected from Group 1 and

193 Domithildes is selected from Group 2 [see comment 12]. Moreover, we studied the following
194 variables in the two selected catchment. First, we analysed the fraction of water yield
195 compromised by the grey water footprint for nitrate (ca. 0.08 to 3.9 mg/L), total phosphorous
196 (from 0.02 to 1.2 mg/L) and sediments (approx. 0.03 to 250 mg/L). These concentrations
197 represented dilution demands in between 0.1 % to close 1000 % of simulated water yield for a
198 wide range, in between 10 to 500 km² [see Figure 12, this HESSD paper]. Second, these
199 demands depended on: the native forest cover [i.e. in Figure 9, with S1 for year 1990, S2 for
200 year 2010 and S2+EbA for year 2035], the flow duration curves under three LULC scenarios
201 at 20 headwaters [Fig. 10], and the scaling effects of EbA actions on drainage areas [ranging
202 from small catchment of 9.9 km² of Domithildes to medium-size catchment of 302 km² of
203 Alto Jaguari]. These factors clearly affected (a) the fraction of water yield compromised by
204 the GWF-NO₃, GWF-TP and GWF-Sed, and (b) the reference flows in duration curves, both
205 in streamflow and in pollutant loads, especially for low-flows (higher duration probabilities
206 [see Fig. 13 and 14]. As well, the annual regime of water yield of these two selected
207 catchments revealed local constraints in the size of catchments ranging from 10 to 300 km².
208 Thus, we pointed what limits for SWAT modeling when using the EbA assessment and PES-
209 Water projects, by using grey water footprint, ranging from GWF-NO₃ below 0.2 m³/s to
210 GWF-TP up to 20 m³/s. These results did converge to the general discussion with blue and
211 green water accounting showed in former studies of Rodrigues et al [2014; A blue/green
212 water-based accounting framework for assessment of water security, Water Resour. Res., 50,
213 7187–7205, doi:10.1002/2013WR014274], now quoted in the references of this manuscript”

214 **Line 535, RC1:** “Any statistical relationship between the changes in LULC classes and grey
215 water footprints. For instance multivariate statistical analysis.”. **Answer:** For instance, the
216 evidences we modelled with SWAT about GWF and LULC were presented in between lines
217 514 and 534 (first version manuscript). These results are regarded to average values
218 regionally (20 catchments), the same test period (8-yr time series tested) and with fixed time-
219 step modelled (SWAT monthly-basis). On the one hand, native forest land use
220 fractions(NF%) have ranges of 41±14, 39±15% and 44±16 %, and were related to GWF-
221 NO₃ of 0.68±0.6, 0.28±0.1, and 0.44±0.1, for S1(1990), S2(2010) and S2+EbA(2035)
222 scenarios, respectively. On the other hand, high-stand vegetation land use fraction (native,
223 eucalpto and orchad) ranged in between 46%, 53% and 62%, for the same scenarios,
224 respectively, not showing a trend. For GWF-TP and GWF-Sed values differ in absolute terms,
225 and the averaged ratios of GWF/Water Yield also changed. In spite of the high variability of
226 responses, and small period of testing, we recommend future field campaigns and further
227 multivariate statistical analysis, but they are out of the scope of the present manuscript.

228 **Lines 544 to 555, RC1:** “As one-third of the SWAT simulation are low-flow or drought
229 years. It is known that SWAT model is weak in capturing extreme flows. One of the reasons
230 for the discrepancy between monitoring data and model simulation might not the weakness of
231 the SWAT model to represent low-flows?”. **Answer:** We agree with these comments. On the
232 one hand, recent papers addressing a review of SWAT applications in Brazil outlined the
233 challenges and prospects for reducing the discrepancies between monitoring data and existing
234 (regional) literatures and model simulations [i.e. Bressiani et al, 2015; doi:

235 [10.3965/j.ijabe.20150803.1765](https://doi.org/10.3965/j.ijabe.20150803.1765)], quoted in the references. These general review is useful to
236 address model discrepancies in a multilevel approach: quantitative water yield, water quality
237 loads and rainfall-streamflow behaviours at a range of scales during the same period of
238 monitoring and the inherent streamflow variability at these subtropical catchments. For that
239 reason, our strategy selected sites through a nested catchment experiment to study these
240 discrepancies according to the natural hydrological cycle, when possible. On the other hand,
241 we addressed those discrepancies by quantitative calibration with a consecutive freshwater
242 quality calibration. Our evidences showed [see i.e. Fig. 5] that at some drainage areas, in
243 between 12 km² to 508 km², SWAT model might underestimate observed streamflows. Even
244 in three of four campaigns, both streamflow quantitative validation and quality (NO₃)
245 simulanon did perform close to SWAT model runs. Only the May,2014 campaign denoted a
246 higher departure between field validation with SWAT modelling, probably because of SWAT
247 limitation of updating water quality parameters with the extension of duration time of drought
248 period as pointed in quoted papers of Taffarello et al [2016-a; doi:
249 [10.1080/02508060.2016.1188352](https://doi.org/10.1080/02508060.2016.1188352)] and Mohor & Mendiondo (2017; doi:
250 [10.1016/j.ecolecon.2017.04.014](https://doi.org/10.1016/j.ecolecon.2017.04.014), quoted].

251 **Table 1, RC1: “It might be better to replace sub-basin coordinates with key modelling results**
252 **and/or field observations.”** Answer: In the new, updated manuscript, we included new
253 columns, pointing modelling results and field observations.

254 **Table 2, RC1: “Possible reason for model underperformance for some sub-basins?”** Answer:
255 As mentioned in the paper, both Posses catchment and Cachoeira catchment have been
256 constrained by limitations in SWAT modeling set-ups because of: anthropic and ilegal
257 domestic water withdrawals across riversides and margins, with small dams affecting the
258 streamflow regime and with, some cases, Eucalipto sp planted close to river channel during
259 low-flows. Taffarello [2016, quoted] showed in the open-access repository pictures which
260 described antropic impacts on water yield and water withdrawal [see
261 www.teses.usp.br/teses/disponiveis/18/18138/tde-05042017-091421/pt-br.php]. Those
262 human-made impacts strongly affected the SWAT underperformance in calibration and
263 validation steps, not only on NASH, NASH-log but also on the PBIAS, especially after long
264 period of droughts or rainfall anomalies [see Figure 5, this HESSD paper]. Because these
265 human-made interference come from real situations at catchments studied, without special
266 SWAT parameterisation and scaling from HRU to the whole catchments, we decided not
267 reducing both complexity and heterogeneity through a complete, exhaustive sensitivity
268 analysis of SWAT parameters. Instead, we recommend further works in this direction if new,
269 more field evidences in other catchments would be available.

270 **Table 3, RC1: “The selected SWAT parameters are not exhaustive unless sensitivity analysis**
271 **is conducted.”** Answer: As explained before, the main objective of this paper submitted to
272 HESS is not addressing sensitivity analysis among SWAT parameters. Instead, we aimed to
273 perform hypotheses’ tests of scenarios intercomparison, including EbA policies and PES-
274 Water actions, aided by SWAT pre-calibrated parameters, linked with previous field

275 evidences collected during sampling periods and previous modelling experiences in these
276 basins [i.e. Rodrigues et al, 2014, doi: [10.1002/2013WR014274](https://doi.org/10.1002/2013WR014274); Rodrigues et al, 2015;
277 Bressiani et al, 2015, DOI: [10.1002/2014WR016691](https://doi.org/10.1002/2014WR016691); Taffarello et al, 2016-a,
278 DOI:[10.1080/02508060.2016.1188352](https://doi.org/10.1080/02508060.2016.1188352); Mohor & Mendiondo, 2017, DOI:
279 [10.1016/j.ecolecon.2017.04.014](https://doi.org/10.1016/j.ecolecon.2017.04.014)]. It is worth noting this paper submitted to HESS is one of
280 the first Brazilian contributions of coupling EbA directives into hydrological modelling using
281 nested catchment experiments and monitoring in Brazilian Atlantic Forest [see i.e. Taffarello
282 et al, 2016-b, DOI: [10.1016/j.cliser.2017.10.005](https://doi.org/10.1016/j.cliser.2017.10.005), quoted], promoting other research groups
283 which might develop further modelling hypotheses. Regarding the sensitivity analysis, as
284 questioned, we proceeded in the calibration process, although not exhaustive. On the other
285 hand, and given that SWAT has a very large number of parameters and our experiment
286 involved nested catchments, rather than a single experimental basin, testing all parameters in
287 our study case with EbA would be rather laborious. As mentioned earlier, we have then
288 consulted previous applications of SWAT in the literature, preferably those in Brazilian
289 basins, to find most indicated parameters to work on. From Fukunaga et al. [2015, DOI:
290 [10.1016/j.catena.2014.10.032](https://doi.org/10.1016/j.catena.2014.10.032)], Gassman et al. [2007, DOI: [10.13031/2013.23637](https://doi.org/10.13031/2013.23637)], Arnold et
291 al. [2012, DOI: [10.13031/2013.42256](https://doi.org/10.13031/2013.42256)], and the good review from Bressiani et al. [2015,
292 quoted], we firstly selected 18 SWAT parameters and with their initial ranges by Rodrigues et
293 al [2014, 2015 quoted]. Then, we ran analysis of these 18 parameters in our sub-basins. After
294 analyzing these preview results, we have chosen to re-calibrate some parameters in some
295 basins. Thus, SWAT-CUP was performed in our tests, with each cycle consisted of 300 runs.
296 In each cycle we reached new limits for each parameter or even stopped tuning a parameter.
297 The number of cycles varied among sub-basins, from one to 5 cycles. From the all 20 nested
298 catchments here studied in Cantareira System and using initial 18 SWAT parameters, some
299 sites ended up the calibration with 7 parameters calibrated, while others had a total of 17 - out
300 of those initial 18 parameters. From upstream to downstream, after the automatic step, a
301 manual calibration refinement also took place. One example of the range of the final values is
302 shown below in Table A.1(new).

303
304
305
306
307
308
309
310
311

312 Table A.1: Range of coefficients adopted for calibration in SWAT-CUP and final values found after
 313 manual stage calibration

Parameter*	Initial (mín)	Median ¹ mín	Chosen mín	Chosen máx	Median ¹ máx	Initial máx
a__CANMX.hru	0	0	0	100	60	100
a__Ch_N2.rte	-0.0005	0	0	0.28	0.3	0.3
a__CN2.mgt	-15	-12	-8.67	10.31	10	15
a__GW_DELAY.gw	-15	-3	-4.161	42.69	30	50
a__GWQMN.gw	-550	-300	-415.02	360.00	350	450
r__OV_N.hru	-0.5	dismissed	-		dismissed	1
r__SHALLST.gw	-0.5	-0.3	-0.08	0.39	0.4	0.6
r__SOL_AWC().sol	-0.5	-0.25	-0.42	0.29	0.33	0.5
r__SOL_BD(1).sol	-0.2	-0.15	-0.19	0.18	0.2	0.4
r__SOL_K().sol	-0.4	-0.27	-0.32	0.35	0.37	0.5
v__Alpha_BF.gw	0.01	0.02	0.001	0.049	0.05	0.1
v__Ch_K2.rte	0	0	0	36.74	30	130
v__EPCO.hru	0.4	0.4	0.85	- ²	1	1
v__ESCO.hru	0.4	0.7	0.69	0.95	0.95	0.95
v__GW_REVAP.gw	0.02	0.02	0.01	0.18	0.2	0.2
v__RCHRG_DP.gw	0.01	0.01	0.05	0.68	0.5	1
v__REVAPMN.gw	0	500	539.28	959.28	1000	1000
v__SURLAG.hru	0.01	1.5	0.97	5.53	4	5
IPET			(0) Priestley-Taylor			

314 Legends: “1”: “median” of the limits adopted in following runs in SWAT-CUP. Manual
 315 calibration could overcome these limits; “2”: only one sub-basin had EPCO modified. * a_
 316 stands for “added” value, i.e. the final value in each feature (e.g. each HRU) is the original
 317 value plus the calibrated coefficient; r_ stands for ratio, i.e. the final value in each feature is
 318 the original value times 1+ the calibrated coefficient; v_ stands for value, i.e. the final value
 319 of the feature is the calibrated coefficient.

320 References cited:

321 Arnold, J. G.; Moriasi, D. N.; Gassman, P. W.; Abbaspour, K. C.; White, M. J.; Srinivasan, R.
 322 et al. (2012): SWAT. Model Use, Calibration, and Validation. Em: *Transactions of the*
 323 *ASABE* 55 (4), pág. 1491–1508. DOI: 10.13031/2013.42256.

324 Bressiani D A, Gassman P W, Fernandes J G, Garbossa L H P, Srinivasan R, Bonumá N B, et
 325 al. (2015): Review of Soil and Water Assessment Tool (SWAT) applications in Brazil:
 326 Challenges and prospects. Em: *Int J Agric & Biol Eng*, 8(3), pág. 9–35. DOI:
 327 10.3965/j.ijabe.20150803.1765.

328 Fukunaga, Danilo Costa; Cecílio, Roberto Avelino; Zanetti, Sidney Sára; Oliveira, Laís
329 Thomazini; Caiado, Marco Aurélio Costa (2015): Application of the SWAT hydrologic model
330 to a tropical watershed at Brazil. Em: *CATENA* 125, pág. 206–213. DOI:
331 10.1016/j.catena.2014.10.032.

332 Gassman, P. W.; Reyes, M. R.; Green, C. H.; Arnold, J. G. (2007): The Soil and Water
333 Assessment Tool. Historical Development, Applications, and Future Research Directions.
334 Em: *Transactions of the ASABE* 50 (4), pág. 1211–1250. DOI: 10.13031/2013.23637.

335 **Table 5, RC1: “I would like to see additional column indicating the Hydrologic Services**
336 **Index. The symbol used for the sub-basins 10, 15, 17 and 19 is not defined.” Answer:** We
337 attended this comment, appending this HSI value as a new column. The symbol used for sub-
338 basins 10, 15, 17 and 19 was a digiting error. We appreciate your review, thank you.

339 **Figure 2, RC1: “Sensitivity analysis is missing after SWAT-CUP” Answer:** In this
340 manuscript, as mentioned, we followed a step-by-step, but not exhaustive, calibration
341 procedure using collection and assessment of data, with understanding of watersheds,
342 identification and selection of sites and periods to calibrate and validate, definition of
343 calibration methods, objective functions and evaluation metrics, main water balance
344 components, with volumes and processes’ representations, definition of parameters and
345 ranges of variability, sensitivity analysis, calibration, validation, cross validation and
346 uncertainty analysis (Bressiani, 2016, quoted; Mohor, 2016, quoted). As previously
347 mentioned, we also consulted former SWAT modelling strategies used in these basins,
348 available in open repository of Mohor [2016;
349 www.teses.usp.br/teses/disponiveis/18/18138/tde-23032017-102949/pt-br.php], Bressiani
350 [2016; www.teses.usp.br/teses/disponiveis/18/18138/tde-04042017-155701/pt-br.php] and
351 Rodrigues [2014; [http://www.teses.usp.br/teses/disponiveis/18/18138/tde-18122014-](http://www.teses.usp.br/teses/disponiveis/18/18138/tde-18122014-094354/pt-br.php)
352 [094354/pt-br.php](http://www.teses.usp.br/teses/disponiveis/18/18138/tde-18122014-094354/pt-br.php)]. In our paper, we addressed an stage of calibration of SWAT-CUP
353 (Calibration and Uncertainty Programs) software and SUFI-2 (Sequential Uncertainty Fitting)
354 method. SUFI-2 is based in Latin Hypercube sampling [Abbaspour et al, 2015; quoted in the
355 references). After this automatic stage, a finer adjustment with manual calibration was
356 accomplished, following the recommendations of Mohor (2016) and Mohor & Mendiondo
357 (2017; DOI: [10.1016/j.ecolecon.2017.04.014](https://doi.org/10.1016/j.ecolecon.2017.04.014)), quoted in the references. For deeper
358 sensitivity analysis of SWAT parameters we recommend Bressiani (2016) who proposed not
359 only a new systematic procedure for calibrating SWAT model in complex basins, but also a
360 searching for a better SWAT performance and reduced optimization time, using different
361 calibration methods on different watershed locations. Also, Rodrigues [2014, Table 2.3, page
362 56] adjusted some parameters for nested catchments in Cantareira System (CN2, Canmx,
363 OV_N, SOL_K, SOL_AWC), according to land use classes.

364 **Figure 4, RC1: “Why the upper and lower bound of coef. of PBIAS is only ± 0.15 , though the**
365 **model performance for some sub-basins are more than ± 0.15 .” Answer:** We appreciate your
366 comment. We corrected this figure.

367 **Figure 6, RC1: “How representative is the sampling of only 8 months for turbidity?”**
368 **Answer:** During the 2013/2014 field campaigns across all the nested catchments here
369 presented, turbidity ranged between extremes of 1 and 300 NTU, with median value close to
370 11 NTU. These high variability captured ranges of in-situ monitored instantaneous mean cross-
371 section velocities below 1 m/s and specific streamflows ca. 0.001 to 0.025 m³/s/km². These
372 values captured approximately flow discharges in the range of 5% and 96% of probability of
373 regional flow duration curves, and also affected the variability of the turbidity of water
374 quality. Moreover, these ranges were observed during the 2013/2014 anomalous rainy season,
375 with alternance of heavy rains and dry periods, in both reference catchments with EbA
376 initiatives and impacted catchments with land-use changes. For those reasons, we understand,
377 spite of having sampled only 8 months of monitoring, observed turbidity is not biased and
378 could represent the conditions for using EbA hypothesis for the scenarios we tested. More
379 details of experimental sampling and observational schemes are explained in Taffarello et al
380 [2016-a; quoted]

381 **Figure 12-a , RC1: “Legend for y-axis has typo error.” Answer:** We appreciate your
382 comment. It was corrected, in the updated version of Figure 12-a

383 **Figures 13, 14 and 17, RC1: “The legends and axis values are not readable.” Answer:** The
384 legends of Figures 13, 14 and 17 were augmented in size and readability. We appreciated your
385 feedback for its correction.

386

387

388 **Reviewer Comments # 2 (RC2)**

389 **RC2 – “The hypothesis of the research is not clear, and is it “the conversation practices**
390 **impact hydrological services?”** **Answer:** The authors deeply thank and welcome the
391 comments of Reviewer 2. The working hypothesis of the paper is related to, on the one hand,
392 how conservation practices addressed by EbA impact hydrology and the ecosystem services,
393 like maintaining, restoring or improving both the water yield and the freshwater quality, using
394 hydrological modeling in different catchment scales. On the other hand, we hypothesized
395 incentives of EbA policies can affect water yield and water quality through non-linear
396 tradeoffs, with high spatiotemporal complexity, capable of being assessed by modeling, but
397 previously supported by in-situ monitoring variables for setup boundary conditions of
398 simulation runs. We enhanced these statements in the updated version of the manuscript,
399 refining the statement written previously in between lines 87 to 91.

400 **RC2 - What is the EbA, and the authors should give the readers more detailed definition.**
401 **Answer:** The concept of Ecosystem-based Adaptation (EbA) is addressed as ‘using
402 biodiversity and ecosystem services to help people adapt to the adverse effects of climate
403 change’ was defined by the Convention on Biological Diversity – 10th Conference of the
404 Parties (CoP) (CBD, 2010, quoted). Detailed definitions of EbA applied to the Cantareira’s
405 Headwaters (this paper) can be found in Taffarello et al [2017, Climate Services (2017),
406 <http://dx.doi.org/10.1016/j.cliser.2017.10.005>]

407 **RC2 - In addition, the paper is so long, and the authors should condense the whole text, as**
408 **well as the figures and tables.** **Answer:** Attending this specific comment, a new, updated
409 version was prepared, translating some tables and figures to Supplement Material. With these
410 actions, the new manuscript has decreased the number of words and graphical elements, but
411 maintained only essential statements and new answers for specific revisions.

412 **RC2 - The authors considered the land use scenarios only, but not the climate hydrological**
413 **factors.** **Answer:** Because the high complexity of the interaction and coupling drivers of the
414 climate-soil-water-human nexus, the main goal of the paper aims to only test hypothesis of
415 changes in land uses, with adaptation measures PES-Water from EbA options policies.
416 Climate change scenarios are being incorporated in a sequential paper, but is out the scope of
417 this presente manuscript. Some evidences of climate change onto hydrological factors,
418 including sensitivity analysis of water withdrawal scenarios, and economic indicators in
419 Cantareira System’s catchments throughout 2000-2100 scenarios can be found in Mohor &
420 Mendiondo (2017; [10.1016/j.ecolecon.2017.04.014](https://doi.org/10.1016/j.ecolecon.2017.04.014), quoted)

421 **RC2 - The authors should explain the reason why nitrate, TP, and sediments have been select**
422 **to assess greyWF.** **Answer:** SWAT model outputs perform different water quality variables
423 (see Arnold et al, 2005; Bressiani, 2016; quoted). Here we selected for greyWF through
424 modeling some freshwater quality variables we have previously sampled in experiments, and
425 being usable for a proper SWAT parameterization (see Taffarello et al, 2016-a; quoted). By

426 using a higher number of freshwater variables, however, might the modelling evidences (on
427 hypothesis testing with EbA) be either over-parameterised for analytical purposes, or even
428 excessively-detailed for the running Brazilian standards of freshwater classification—i.e. with
429 some outputs of freshwater quality variable 1 being above the standards, with variable 2 being
430 below the standards, making it harder for decision-making and planning). Also, the high
431 uncertainty in hydrological responses of pollutant loads observed in nested catchment
432 experiments under land change in Brazilian biomes (see Zaffani, A G, Cruz N, Taffarello, D,
433 Mendiondo, E M (2015) Uncertainties in the Generation of Pollutant Loads using Brazilian
434 Nested Catchment Experiments under Change of Land Use & Land Cover. *J. Phys Chem
435 Biophys*, doi: [2015.10.4172/2161-0398.1000e123](https://doi.org/10.4172/2161-0398.1000e123); now quoted in the references of updated
436 version) recommend more parcimonious monitoring and modeling tests to study potential
437 tradeoffs with conservation practices and economic incentives like EbA

438 **Page 11, Lines 295-297: RC2 - “WPL[x,t] exceeds 100%, environmental standards are**
439 **violated...”, it is so subjective. What’s your basis?. Answer:** We appreciate this comment.
440 Following several authors (see Hoekstra et al, 2011; quoted), there is not an upper limit for
441 GWF; it depends on the level of polluted loads being transported in the streamflow. These
442 loads are originated from coupling the natural and antropoc hydrosedimentological cycles,
443 from the headwaters to the outlet of the basin. Alloctonous and autoctonous loads transported
444 in the main flow, either during floods or even during low-flows, as during the annual flow
445 regime, represent the pollution demand (the numerator of the equation 1, line 298). Otherwise,
446 the dillution capacity of the river flow is represented by the annual flow regime, i.e. related to
447 the mean water yield (the denominator of the equation 1). For that reason, demand can
448 potentially grow beyond the capacity, “violating” the real dillution capacity or autodepuration
449 of a rivercourse. Other water security index relating these river demand-and-capacity can be
450 readed in the works of Rodrigues et al [2014; 2015; also quoted]. Because the pollution load
451 thresholds are being monitored not for an unique, isolated quality variable, but for many of
452 them, also with different thresholds of Brazilian standards, equation 1 needs a further
453 development to represent a weighted-threshold, or composite-threshold, to discuss EbA
454 policies through hydrological modeling and scenarios.

455 **Lines 321, RC2- in equation (3), maybe, it is a mistake about the “WPL[x,t]”, is it**
456 **“WPLreference”.** **Answer:** We appreciate the reviewer’s comment. According to the
457 equation 3, using a regional basis of intercatchment comparion with a proper non-
458 dimensionality, WPL[x,t] represents the composite threshold of a whichever catchment
459 studied, and regionally compared with the reference catchment ($WPL_{composite,ref}$, in
460 relative terms as in percentage). Doing so, equation 3 can express how HSI (hydrologic
461 system index), alternatively and regionally, would point more healthy catchments ($HSI <$
462 100% , where where EbA outputs through hydrological modeling are more evident), and other
463 catchments where insufficient EbA effects arise. This approach could help decision-making
464 process of Brazilian freshwater standards [see i.e. <http://www.mma.gov.br/port/conama/>],
465 where multi-parameterization or variables are combined for testing scenarios of land-uses and
466 planning. These standards are also compared with state standards and local agencies, like

467 CETESB [www.cetesb.sp.gov.br] and DAEE [<http://www.daee.sp.gov.br/>] in São Paulo
468 and IGAM [<http://igam.mg.gov.br/>] in Minas Gerais, the two neighbor states sharing these
469 Cantareira System's catchments. Furthermore, and because all these agencies use indices for
470 freshwater health, HSI might help on identifying regional intercomparison, both from
471 monitoring and from modelling scenarios, about WPLreference and EbA policies.

472 **RC2 - The authors should separate the results and discussion. Some sentences, for example**
473 **lines 343-345;349-354;357-360; and so on, should be put into Discussion. The independent**
474 **discussion could further clearly tell the readers your finding. Answer:** We appreciate
475 very much this comment. The adapted these new lines in order to help the reader about our
476 findings, but also not exceeding the limits of total words of the manuscript.

477 **RC2 - in Section 3.6, the authors do not depict the results from Figure 17. Answer:** We
478 appreciate very much this review. In Section 3.6. We appended extra statements about the
479 comparative results of Figure 17 in the new version of the paper as follows [because of the
480 extension of these new statements, we suggest worth appending them in a Supplementary
481 Material section, according to Editor final decision). "Figure 17 depicts a summary of
482 monitored and modelled water yield observations and scenarios compared with EbA and
483 GWF outputs in the catchments studied at the Cantareira System. The main bold, vertical,
484 dotted line represents the regional mean water yield, compared with water yields from
485 simulated scenarios, also including their respective GWFs. This figure clearly points six
486 different conditions, labelled by letters (A, B, C, D, E and F), which configurate potential
487 scenarios of water security according to land-use change and insecurity thresholds, also
488 showing tradoffs between water yield and grey water footprint outputs, explained in the text"

489 **RC2 - delete the references from the conclusions. Answer:** We corrected the conclusions,
490 without citing any references.

491 **RC2 - Table 1 should be moved to Supplemental information, or part of Table 1 should be**
492 **merged in to Table 2. Answer:** We appreciate this comment. We corrected and attended these
493 suggestions, merging and reallocating the tables.

494 **RC2 - Table 8 should be moved in to Supplemental information. Answer:** There is not a
495 Table 8. Maybe Table 4(?). We have just moved it to Supplemental Material. Thank you.

496 **RC2 - Fig.4, explain the meaning of the lines in the figure. Answer:** Dotted lines represent
497 trend lines for some selected basins here illustrated. Our interest in this figure was to question
498 whether there would be both regional trend or scaling in the calibration coefficients, but not
499 found in this first paper. Regional trends of the calibration can show both limits and
500 uncertainty of modelling of complex catchments. Because of space, we decided to drop this
501 figure out of the updated version.

502 **Fig.5, RC2** - he sentence “Time (horizontal axis) is represented by month/year” is
503 meaningless; further, to provide the meaning of the uncertaintybars andsample numbers.
504 **Answer:** We appreciate this comment. We corrected the quotation. The uncertainty bars
505 represent the minimum and maximum values of measured streamflow and pollutant loads in a
506 cross section of the river during a field campaign of headwaters’ catchments. The high
507 variance in observations of field evidences explain the greater variability of these headwaters
508 at the Cantareira System

509 **Fig.6, RC2** – what are the meaning of the“size of circles” and the numbers? **Answer:** It is
510 only a representation of a 3-D graph, substituting the 3rd axis with the diameter of the circle
511 proportional to the magnitude of the 3rd variable (in this case, the 3rd variable is the
512 turbidity). The number showed the value of turbidity. The figure 6 showed that, although a
513 coherent and proportional relation existed in between observed mean river velocity and
514 observed specific flow, experimental evidences still depicted outliers, from not only reference
515 catchments with EbA/PES-Water options, but also intervention catchments with no EbA/PES-
516 Water options, reflecting an illustrative example of how complex LULC options from EbA
517 would be exhaustively sensed into hydrological parameters and simulation scenarios. For those
518 reasons, we adapted our conclusion and recommendations for further studies about new
519 hypothesis’ testing, according to fore-mentioned answers to reviewers.

520

521

522

523

524

525

526

527

528

529

530

531 **Modelling freshwater quality scenarios with ecosystem-based**
532 **adaptation in the headwaters of the Cantareira system, Brazil**

533 Denise Taffarello¹, Raghavan Srinivasan ², Guilherme Samprogna Mohor¹, João Luis B.
534 Guimarães ³, Maria do Carmo Calijuri ¹, Eduardo Mario Mendiondo¹

535 ¹Sao Carlos School of Engineering, University of Sao Paulo, Sao Carlos, SP, 13566-590, Brazil

536 ²Spatial Science Laboratory, Ecosystem Science and Management Department, Texas A&M University, College
537 Station, TX 77801, USA

538 ³Aquaflora Meio Ambiente, Curitiba, PR, 82100-310, Brazil

539 *Correspondence to:* Denise Taffarello (taffarellod@gmail.com; dt@sc.usp.br)

540 **Abstract.** Although hydrologic models provide hypothesis testing of complex dynamics occurring at
541 catchments, freshwater quality modelling is still incipient at many subtropical headwaters. In Brazil, a
542 few modelling studies assess freshwater nutrients, limiting policies on hydrologic ecosystem services.
543 This paper aims to compare freshwater quality scenarios under different land-use/land-cover (LULC)
544 change, one of them related to Ecosystem-based Adaptation (EbA) in Brazilian headwaters. Using the
545 spatially semi-distributed Soil and Water Assessment Tool (SWAT) model, nitrate, total phosphorous
546 and sediment were modeled in catchments ranging from 7.2 to 1037 km². These headwaters were
547 elected for the Brazilian Payment for Ecosystem Services (PES) program in the Cantareira System,
548 which has supplied water to 9 million people in Sao Paulo. We considered SWAT modelling of three
549 LULC scenarios: (i) recent past scenario ("S1"), with historical LULC in 1990, (ii) current land use
550 scenario ("S2"), with LULC for the period 2010-2015 with field validation, and (iii) future land use
551 scenario with PES ("S2+EbA"). This latter scenario proposed forest cover restoration through EbA
552 following the River Basin Plan by 2035. These three LULC scenarios were tested with a selected
553 record of rainfall and evapotranspiration observed in 2006-2014, with the occurrence of extreme
554 droughts. To assess hydrologic services, we proposed the Hydrologic Services Index (HSI), as a new
555 composite metric comparing water pollution levels (WPL) for reference catchments, and related to
556 the grey water footprint (greyWF) and water yield. On the one hand, water quality simulations
557 allowed for the regionalization of greyWF at spatial scales under LULC scenarios. According to the
558 critical threshold, HSI identified areas as less or more sustainable catchments. On the other hand,
559 conservation practices simulated through the S2+EbA scenario envisaged not only additional and
560 viable best management practices, but also preventive decision making at the headwaters of water
561 supply systems.

562 **Key words:** water quality modelling; ecosystem-based adaptation; SWAT; grey water footprint; land-
563 use/land-cover change; Brazil.

564

565 **1 Introduction**

566 Basin Plans comprise the main management tool and they plan sustainable use of water resources in
567 both spatial and temporal scales. For sustainable water allocation, river plans are based on accurate
568 data on actual water availability per basin, taking into account water needs for humans,
569 environmental water requirements and the basin's ability to assimilate pollution (Mekonnen et al.,

Comentado [UdW1]: Old version with 388 words; new version
297 words (attending RC1).

570 2015). However, adaptive management options such as ecosystem-based adaptation (EbA; see CBD,
571 2010; BFN/GIZ, 2013) and the water footprint (WF) (Hoekstra & Chapagain, 2008) have rarely been
572 incorporated into Brazilian Basin Plans. Moreover, integrated quali-quantitative simulations and
573 indicators of human appropriation of freshwater resources are seldom used in river plans. The
574 concept of Ecosystem-based Adaptation (EbA) is addressed as 'using biodiversity and ecosystem services to
575 help people adapt to the adverse effects of climate change', which was defined by the Convention on Biological
576 Diversity – 10th Conference of the Parties (CoP) (CBD, 2010). Detailed definitions of EbA applied to the
577 Cantareira's Headwaters can be found in Taffarello et al (2017). The WF still is an environmental indicator
578 used in watershed plans. For example, Spain uses WF as indicator in Basin Plans (Hoekstra et al.,
579 2017; Velázquez et al., 2011; Aldaya et al., 2010). The clean water plan of Vancouver (June/2011)
580 established as sustainable action the reduction of the WF on its water resources
581 management (MetroVancouver, 2011; Zubrycki et al., 2011). The Colombian government was the
582 first to publish a complete and multi sectorial evaluation of WF in its territory. Although, this study,
583 titled *Estudio Nacional del Agua* (Colombia, *Instituto de Hidrología, Meteorología y Estudios*
584 *Ambientales*, 2014), had not been included in the national water management plan, the strategic
585 plan of Magdalena Cauca basin incorporates the greyWF to assess agriculture pollution (Colombia,
586 2014). In Brazil, a glossary of terms released by the Brazilian National Water Agency (ANA, 2015)
587 includes the concept of WF to support water resources management.

Comentado [UdW2]: Attending Reviewer 2 Comments: RC2 -
What is the EbA, and the authors should give the readers more
detailed definition.

588 The WF (Mekonnen & Hoekstra, 2015; Hoekstra et al., 2011) measures both the direct and indirect
589 water use within a river basin. The term water use refers to *water withdrawal*, as the consumptive
590 use of rainwater (the green water footprint) and of surface/groundwater (the blue water footprint),
591 and *water pollution*, i.e., the flow of water used to assimilate the pollutant loads (the grey water
592 footprint (greyWF) (see Chapagain et al. 2006;). Given that water pollution can be considered a non-
593 consumptive water use, the greyWF is advantageous by quantifying the effects of pollution by flow,
594 instead of by concentration, making water demand and availability comparable.

595 Water footprint assessment, comprises four phases: (1) Setting goals, (2) Accounting, (3)
596 Sustainability assessment, and (4) Response formulation. At the WF response formulation phase, the
597 EbA options, represented by Best Management Practices (BMP) at the catchment scale, could
598 represent a trade-off on greyWF (Zaffani et al., 2011). That is, BMP adopted in the catchment scale
599 could contribute indirectly to decreasing the level of water pollution. Thus, the EbA would
600 compensate the greyWF of a certain river basin (Taffarello, 2016).

601 In the context of water security associated with land-use/land-cover (LULC) change, many existing
602 conflicts over water use could be prevented (Winemiller et al., 2016; Aldaya et al., 2010; Oki &
603 Kanae, 2006). For example, LULC influences water quality, which affects the supporting¹ and
604 regulating² ecosystem services (Mulder et al., 2015; MEA, 2005) and needs to be monitored for
605 adaptive and equitable management on the river basin scale (Taffarello et al., 2016a). In spite of
606 discussions regarding the lack of representativeness of data used in early studies with greyWF

¹Examples of supporting services: nutrient cycling, primary production and soil formation.

² Examples of regulating services: self-depuration of pollutants, climate regulation, erosion control, flood attenuation and water borne diseases.

607 (Wichelns, 2015; Zhang et al., 2010; Aldaya et al., 2010; Aldaya & Llamas, 2008), we argue that the
608 greyWF method may account for hydrologic services and provide a multidisciplinary, qualitative-
609 quantitative integrated and transparent framework for better water policy decisions. Understanding
610 these catchment-scale ecohydrologic processes requires not only low-frequency sampling, but also
611 automated, *in situ*, high-frequency monitoring (Bieroza et al., 2014; Halliday et al., 2012), but also the
612 use of ecohydrologic models to protect water quality and quantity. However, freshwater quality
613 modelling associated with EbA, greyWF and LULC is still incipient in many river catchments. In Brazil,
614 approximately only 5% of modelling studies evaluate nutrients in freshwater (Bressiani et al., 2015),
615 which limits the policies on regulating ecosystem services.

616 In this research, we propose the regulating ecosystem services be addressed by the greyWF because
617 it considers the water volume for self-purification of receiving water bodies affected by pollutants
618 (Zhang et al., 2010). ~~The~~ working hypothesis of the paper is related to, ~~on the one hand~~, how conservation
619 practices addressed by EbA impact hydrology and the ecosystem services, like maintaining, restoring or
620 improving both the water yield and the freshwater quality, using ~~eco~~hydrological modeling in different
621 catchment scales. On the other hand, we hypothesized ~~that~~ incentives of EbA policies can affect water yield
622 and water quality through non-linear tradeoffs, with high spatiotemporal complexity, ~~which can be~~ assessed by
623 modeling, but previously supported by in-situ monitoring variables for setup boundary conditions of simulation
624 runs. In these scales, the greyWF can evaluate the changes in the regulating hydrologic services.
625 Among the three water footprint components, in this study we assessed greyWF for nitrate, total
626 phosphorous and sediments in 20 sub-basins in the headwaters of the Cantareira Water Supply
627 System. The aim of this study is to compare freshwater quality scenarios, one of them related to EbA
628 options through BMP and to assess greyWF under different LULC changes: (S1) historic LULC of 1990;
629 (S2) current LULC for the period 2010-2015; and (S2+EbA) future LULC based on EbA with S2 as a
630 baseline. This method is addressed using Nested Catchment Experiments (NCE), (see Taffarello et al.,
631 2016a and 2016b) at a range of scales, from small catchments of 7.7 km² to medium-size basins of
632 1200 km² at subtropical headwaters responsible for the water supply of Sao Paulo Metropolitan
633 Region (SPMR). This paper consists of four sections. The first section provides a brief description of
634 the context, gap, hypothesis and our research goals. The second section describes the simulation
635 methods used in the watershed scale and development of three LULC scenarios. We then propose
636 some ecosystem-based adaptation (EbA) approaches related to water pollution. Finally, in the fourth
637 section, we discuss *how* the grey water footprint for nitrate or total phosphorous could be an EbA
638 option for improving decision-making and water security in subtropical catchments under change.

639 2. Material and Methods

640 2.1. The case-study area

641 Two of the most vulnerable areas in the Brazilian South-East are the Upper Tietê (drainage area
642 7,390 km²) and Piracicaba-Capivari-Jundiá - PCJ (drainage area 14,178 km²) watersheds, particularly
643 due to their high population: 18 Mi inhabitants in Upper Tietê River basin, and 5 Mi in PCJ (Sao Paulo,
644 2017; IBGE, 2010).

645 In an attempt to ensure public water supply, the government built the Cantareira System, an inter-
646 basin transfer, in two stages: a) between 1968 and 1974, at the end of a 35-year period that

Comentado [UdW3]: Attending Reviewer Comments # 2 (RC2)
RC2 – “The hypothesis of the research is not clear, and is it “the
conversation practices impact hydrological services?”

647 underwent a severe drought in the Piracicaba watershed, and **b)** in 1982, with the inclusion of two
648 additional reservoirs that regularized the increasing rainfall from the mid-1970s until 2005 (Zuffo,
649 2015).

650 The study area comprises the part of the Cantareira System that drains into the Piracicaba
651 river and which is the headwater of the Piracicaba basin (**Figure 1**). This basin is located on the
652 borderline of the state of Minas Gerais and Sao Paulo. This part of the water supply system, in the
653 Piracicaba watershed, consists of three main reservoirs, named after the rivers, damming the Jaguari-
654 Jacareí, Atibainha and Cachoeira watersheds (drainage areas are 1230 km², 392 km² and 312 km²,
655 respectively). These rivers are main tributaries of the Piracicaba river, which is a tributary of the Tiete
656 River system, on the left bank of the Parana Basin. The Cantareira System consists of two more
657 reservoirs out of the Piracicaba river basin, Paiva Castro and Águas Claras, which are not part of our
658 study area.

659 With respect to the water quality, the headwaters of the Cantareira System are classified as
660 “class 1” for Jacareí, Cachoeira and Atibainha watersheds, and “class 2” for the Jaguari watershed,
661 according to the CONAMA Resolution Nº 357/2005 (Brazil, 2005) and Sao Paulo Decree Nº
662 8468/1976 (Sao Paulo, 1976), which means that, with the exception of the Jaguari watershed, the
663 others can be used with only a simple treatment. Regarding the water volume, this region has been
664 intensely impacted by a severe and recent drought (Taffarello et al., 2016a; Escobar, 2015; Whately
665 & Lerer, 2015; ANA, 2015; Porto & Porto, 2014). As a result of this serious water crisis, a new water
666 policylaw on the average flow of the transfer limits of the Piracicaba watershed to the Upper Tiete
667 watershed was postponed from 2014 to May, 2017 (ANA, 2015). The Cantareira System is located in
668 the Atlantic Forest biome, considered a conservation hotspot because of its rich biodiversity. In spite
669 of that, 78% of the original forest cover of the Cantareira watershed has been deforested over the
670 past 30 years (Zuffo, 2015). In 2014, the native forest cover was 10% in Extrema, 12% in Joanópolis
671 and 21% in Nazaré Paulista (SOS Mata Atlântica/INPE, 2015). To counteract deforestation, some
672 environmental/financial trade-offs have been developed in the Cantareira headwaters to protect
673 downstream water quality and the regulation of water flows. These are Ecosystem-based Adaptation
674 (EbA) initiatives, in which rural landowners receive economic incentives to conserve and/or restore
675 riparian forests and implement soil conservation practices (see Chapter 3 of this thesis). The first
676 Brazilian EbA approach was the *Water Conservator Project*, created in 2005 and implemented in
677 Extrema, Minas Gerais (Richards et al., 2015; Pereira, 2013). [The Water Producer/PCJ Project was](#)
678 [developed from 2009 to 2014 in the Cantareira System region \(Guimarães, 2013\), using EbA scenarios and local](#)
679 [actions adopting the concept of Payment for Ecosystem Services-Water \(Pagiola et al, 2013;Padovezi et al.,](#)
680 [2013through public-private partnerships, strengthening EbA in Brazil.](#)

681

682 2.2. Databases and model adopted

683 **Figure 2** shows the method developed and applied to assess the regulating hydrologic services
684 through grey WF, along with the spatial data used in this study. The simulations were enhanced by
685 model parameterization with qualitative and quantitative primary data (Mohor et al., 2015a; Mohor
686 et al., 2015b; Taffarello et al. 2016b) from six field campaigns between 2012 and 2014, in partnership
687 with ANA, CPRM, TNC-Brazil, WWF, USP/EESC and municipalities. This can reduce uncertainties of

688 the model, facilitate data interpretation and provide consistent information. We installed three data
689 collection platforms (DCP) in catchments at Posses, Cancã and Moinho, and level and pressure
690 sensors (see Table 1, and Figure 8) in paired sub-basins (i) with high original vegetation cover, and (ii)
691 in basins that receive payment for ecosystem services due to participating in the *Water Producer/PCJ*
692 project.

693 We obtained and organized secondary data from the region upstream of the Jaguari-Jacareí,
694 Cachoeira and Atibainha reservoirs. We then set up a database originating from several sources:
695 Hidroweb (ANA, 2014); Basic Sanitation Company of the State of Sao Paulo (SABESP); Integrated
696 Center for Agrometeorology Information (CIIAGRO, 2014); Department of Water and Power (DAEE);
697 National Institute of Meteorology (INMET) from the Center for Weather Forecasts and Climate
698 Studies (CPTEC/INPE).

699 **Supplement Table S1** summarizes all hydrologic, pedological, meteorological and land-use data used
700 as input for the delineation and characterization of the watersheds. The topographical data used was
701 the Digital Elevation Model “ASTER Global DEM”, 2nd version, 30-m (Tachikawa, et al., 2011), available
702 free of charge at: <http://gdex.cr.usgs.gov/gdex/>. The changes in hydrologic services can be evaluated
703 by a wide number of models (Carvalho-Santos et al, 2016; Duku et al, 2015; Quilbé & Rousseau,
704 2007), especially those more user-friendly for stakeholders and policy makers. Simulations in this
705 watershed-scale ecohydrologic model (Williams et al, 2008; and Borah & Bera, 2003) allow for the
706 quantification of important variables for ecosystem services analysis and decision-making. Some
707 examples of ecohydrologic models with progressive applications in Brazilian basins are SWAT
708 (Bremer et al., 2016; Francesconi et al., 2016; Bressiani et al., 2015), the models reviewed by de
709 Mello et al. (2016), Integrated Valuation of Ecosystem Services and Tradeoffs (InVEST) (Sharp, 2016;
710 Tallis et al., 2011) and Resource Investment Optimization System (RIOS) (Vogl et al., 2016).

711 The Soil and Water Assessment Tool - SWAT-TAMU (Arnold et al., 1998; Arnold and Fohrer, 2005) is a
712 public domain conceptual spatially semi-distributed model, widely used in ecohydrologic and/or
713 agricultural studies at river basin scale (Krysanova & Whyte, 2015; Krysanova & Arnold, 2008). It
714 divides the basin into sub-basins based on an elevation map and the sub-basins are further
715 subdivided into *Hydrologic Response Units* (HRU). Each HRU represents a specific combination of land
716 use, soil type and slope class within the sub-basin. The model includes climatic, hydrologic, soil,
717 sediments and vegetation components, transport of nutrients, pesticides, bacteria, pathogens, BMP
718 and climate change in a river basin scale (Srinivasan et al., 2014; GASSMAN et al., 2014; Arnold et al.,
719 2012).

720 There have been at least 2,600 published SWAT studies (SWAT Literature Database, mid-2016). In the
721 *SWAT Purdue Conference*, held in 2015, 118 studies were presented, of which, only 8% assessed the
722 transport of nutrients in watersheds (SWAT Purdue, Book of Abstracts, 2015). Research using SWAT,
723 not only for quantity but also for water quality and ecosystem service assessments (Francesconi et
724 al., 2016; Abbaspour et al., 2015; Duku et al., 2015; Dagupatti & Srinivasan, 2015; Gassman et al.,
725 2014) and also as an educational tool for comparing hydrologic processes (Rajib et al., 2016) have
726 increased in recent years.

727

728 **2.3. Model Set-up**

729 The initial model set-up used the ArcSWAT interface, integrated to ArcGIS 10.0 (Environmental
730 Systems Research Institute - ESRI, 2010, ArcSWAT 2012.10.15 in ArcGIS 10).

731 Discretization in sub-basins was carried out, where possible, at the same NCE sites of field
732 investigations.

733 The delimitation of the basin using ArcSWAT requires a drainage area threshold, determined to
734 7.1km², dividing the geographical space to represent the 17 sampling sites in the research field as
735 sub-basins, plus the limits of the three reservoirs' drainage areas, which resulted in 20 sub-basins
736 (Table 1 and Figure 1b). We highlight that the basin was designed up to the confluence of the Jaguari
737 and Atibaia Rivers, forming the Piracicaba river, to integrate all areas of interest in the same SWAT
738 project.

739 The definition of the HRU was carried out using soil maps of the state of São Paulo. (Oliveira, 1999)
740 and land use maps were developed by Molin (2014; et al. 2015) from LANDSAT 5 TM imagery for
741 2010, using a 1:60,000 scale. The procedure defined 49 HRUs inside the 20 sub-basins, i.e. 49
742 different combinations of soil type, soil cover and slope classes in our study area.

743 Next, we adapted the land use map developed by Guimarães (2013), which represents a 2010 land
744 use scenario for the Cantareira System restoring the most fragile degraded parcels (greatest
745 potential for sediment production), to agree with the land use classes of Molin (2014). Additionally,
746 we assumed that the Second Scenario of Guimarães (2013), who used the INVEST model to provide
747 the ecological restoration benefits in the Cantareira System, could be achieved in 2035, considering
748 the investments provided in the PCJ River Plan (Cobrape, 2011) to recover riparian forests in the
749 Cantareira System. In that region the restoration of riparian forests is mostly due to Water-PES
750 projects, which was recognized as an Ecosystem-based Adaptation (EbA) (CBD, 2010; BFN/GIZ, 2013;
751 Taffarello et al., 2017), we identify the third scenario as S2+EbA. Thus, Figure 3 shows the land-use
752 changes over time. In the "Trend Scenario" (PCJ-COBRAPE, 2011), the municipalities covered by the
753 Cantareira System could reach a 98% collection rate, collected sewage treatment rate of 100% and
754 BOD_{5,20} removal efficiency of 95% (PCJ-COBRAPE, 2011). Some studies have suggested including other
755 parameters such as dissolved oxygen, nitrate and phosphate polluting loads, as well as sediments to
756 assess the water quality (Cruz, 2015; Cunha et al., 2014). Regarding the treatment costs for drinking
757 water supply, ecosystem-based adaptation options, such as watershed restoration, seem to be more
758 cost-effective than many technologies for water treatment (Cunha; Sabogal-Paz & Dodds, 2016).

759

760 **2.4. Calibration & validation**

761 We used the SWAT CUP 5.1.6.2 interfaces and Sequential Uncertainty Fitting (SUFI-2) algorithm for
762 calibrating the quantity and quality parameters and also for validating the simulations in the sub-
763 basins. Quantitative calibration was performed in stations that had more than two full years of
764 observed data, i.e., 8 stations, namely: Posses outlet, F23, F24, F25B, F28, Atibainha reservoir,
765 Cachoeira reservoir, Jaguari and Jacarei reservoirs (Table 2). A common test period for all LULC

766 scenarios was selected, in our case, the test period ranges from 01 Jan, 2006 to 30 June, 2014. This
767 period has the rain-anomaly of drought conditions from 2013 to 2014.

768 The calibration period was from October, 2007 to September, 2009, the only period with observed
769 data in all of the above 8 stations. Validation took place from January, 2006 to September, 2007 and
770 from October, 2009 to June, 2014. Calibration and validation of SWAT at the stations with over 2
771 years of data were rated as “good”, according to the classification by Moriasi et al. (2007), since the
772 Nash-Sutcliffe Efficiency (NSE) criterion (Nash & Sutcliffe, 1970) was greater than 0.65, except for the
773 Posses outlet, which presented the logarithmic Nash-Sutcliffe (NSElog) (using the logarithm of
774 streamflow, a criterion that gives greater weight to smaller flow rates) of less than 0.5, rated as
775 “unsatisfactory”. The Percent Bias (Pbias) statistics indicates the bias percentage of simulated flows
776 relative to the observed flows (Gupta et al., 1999). Thus, when the Pbias value is closer to zero, it
777 results in a better representation of the basin, and in lower estimate tendencies (Moriasi et al.,
778 2007). As a general rule, if $|Pbias| < 10\%$, it means a very good fit; $10\% < |Pbias| < 15\%$, good; 15%
779 $< |Pbias| < 25\%$, satisfactory and $|Pbias| > 25\%$, the model is inappropriate. On the other hand,
780 the NSE coefficient translates the application efficiency of the model into more accurate predictions
781 of flood flows, using the classification: $NSE > 0.65$ the model is rated as very good; $0.54 < NSE < 0.65$
782 the model is rated as good and between 0.5 and 0.54, it is rated as satisfactory.

783 In the results obtained for different basin scales (**Figure 4**), the Pbias and NSE coefficients (including
784 NSE of logarithms) indicate adequate quantitative adjustments. As the SWAT simulations include
785 more than 200 parameters, based on research from the literature (Duku et al., 2015; Bressiani et al.,
786 2015; Arnold et al., 2012; Garbossa et al., 2011), we selected approximately 10 parameters (see
787 **Table 3**) to complete the calibration to simulate streamflow processes and nutrient dynamics. These
788 parameters refer to key processes which represent soil water storage, infiltration,
789 evapotranspiration, flow channel, boundary conditions (see Mohor et al., 2015b) and main water
790 quality processes at hillslopes. Although our calibration is mainly focused on water yield as total
791 runoff, freshwater quality features through pollutant loads were performed in the scenarios. Further
792 comments related to existing literature for selected model parameters are depicted in Section 5.3
793 with **comments on sensitivity analysis to select model parameters used in this paper**
794 **(Supplementary Material)**

795 Moreover, to reduce the uncertainty of our predictions, we used approximately 2500 primary data
796 derived from an earlier stage of this research (Taffarello et al., 2016a). As a parameterization result
797 of field investigations and ecohydrologic modelling, **Figure 5** shows parts of the calibrated model
798 performance (lines) against field observations (dots with experimental uncertainty) for flow
799 discharges, nitrate and total phosphorus loads for catchment areas ranging from 7.1 to 508 km².
800 Finally, other water quality variables were studied based on data from field sampling.

801 We highlight some SWAT model limitations when we compare the simulated to observed water
802 flows, especially in the dry season. For example, when the model was discretized on a daily
803 resolution, the adherence level between the observed and simulated flows was considered good.
804 However, the model did not fit well to observed values during the drought period (Feb/2014-
805 May/2014). These differences were more significant for water quality parameters, such as nitrate
806 and total phosphorous. We point out that the macronutrient loads found in May, 2014 were clearly
807 higher than the loads we found in previous sampling, which occurred in wetter periods (Taffarello et

Comentado [UdW4]: Attending Lines 252-255, RC1: “Besides adopting from the existing literatures, implementing sensitivity analysis could be recommended in order to select model parameters.”

808 al. 2016). For the sample collected in May, the model significantly underestimated the pollutant
 809 loads of nitrate. This behaviour, arising from the recent and most severe drought faced by the
 810 Cantareira System (Nobre et al., 2016; Marengo et al., 2016; Taffarello et al. 2016; Escobar, 2015;
 811 The Economist, 2015; Porto & Porto, 2014), , especially to capture nonlinearities having impacts on
 812 regulating ecosystem services during extreme flows. For EbA scenarios, we planned to set up field
 813 investigations and SWAT calibrations (see Figure 5, this paper) using the extreme conditions of the 2013–14
 814 drought through freshwater quality monitoring at the headwaters of the Cantareira System (see i.e. Taffarello
 815 et al, 2016-a).

816 2.5. The scenarios and a new index for hydrologic service assessment

817 Differences in flow rates and water quality (for the variables nitrate, phosphate, BOD_{5,20}, turbidity
 818 and faecal coliforms) for the 20 sub-basins were evaluated using flow and load duration curves for
 819 the three scenarios proposed in this study: (i) *recent past scenario* (S1), including the recorded past
 820 events for land use in 1990, (ii) *current land use scenario* (S2), which considered land uses for the
 821 2010-2015 period as the baseline, and (iii) *future land use scenario* (S2+EbA), supposing a forest
 822 cover conversion in the protected areas, through EbA options, according to the PCJ River Basin Plan
 823 by 2035. Using these curves, from the methodology shown by Hoekstra et al. (2011), and based on
 824 Duku et al. (2015) and Cunha et al. (2012), we estimated the grey water footprint (greyWF). Next, we
 825 developed a new ecohydrologic index to assess the regulating hydrologic services in relation to the
 826 greyWF. This new indicator encompasses the former theory related to environmental sustainability of
 827 the greyWF, according to Hoekstra et al. (2011). In this study, as a relevant local impact indicator,
 828 Hoekstra et al. (2011) proposed to calculate the ‘water pollution level’ (WPL) within the catchment,
 829 which measures the degree of pollution. WPL is defined as a fraction of the waste assimilation
 830 capacity consumed and calculated by taking the ratio of the total of greyWF in a catchment ($\sum WF_{grey}$)
 831 to the actual runoff from that catchment (R_{act}), or, in a proxy manner, the water yield or mean water
 832 yield or long-term period (Q_{lp}). This assumption is that a water pollution level of 100 per cent means
 833 that the waste assimilation capacity has been fully consumed. Furthermore, this approach assumes
 834 that when WPL exceeds 100 %, environmental standards are violated, such as:

$$835 \quad WPL [x, t] = \frac{\sum WF_{grey}[x,t]}{R_{act}[x,t]}, \quad (1)$$

836 It is worth mentioning that for some experts, the aforementioned equation can overestimate the
 837 flow necessary to dilute pollutants. For that reason, new insights of composite indicators or
 838 thresholds are recommended, as follows.

839 The above assumption could overestimate WPL because it would fail considering the combined
 840 capacity of water to assimilate multiple pollutants (Hoekstra et al., 2012; Smakhtin et al., 2005).
 841 Conversely, in this study, we define an alternative indicator related to the three following
 842 fundamentals. First, the WPL should be extended to a composite index, thereby representing weights
 843 of each pollutant related to the actual runoff, here as a proxy of long-term runoff, i.e.:

$$845 \quad WPL_{composite}[x, t] = \frac{\sum \{w[x,t] * WF_{grey}[x,t]\}}{R_{act}[x,t] \cong Q_{lp}[x,t]}, \quad (2)$$

846 $\sum w[x, t] = 1$

847 $0 \leq w[x, t] \leq 1$

848

849 For this new equation, weights should be assessed, either from field experiments or even from
850 simulation outputs. Second, we define a threshold value of WPL composite regarding the reference
851 catchments in non-developed conditions which suggest more conservation conditions among other
852 catchments of the same region, as $WPL_{reference}$. For this study, we selected *Domithildes* catchment as
853 the reference catchment with conservancy measures. From this reference catchment, we define the
854 composite reference index for the water pollution level as $WPL_{composite,ref}$ and, derived from it, the
855 Hydrologic Service Index, as a non-dimensional factor of comparison between WPL for reference and
856 non-reference catchments, as follows:

857
$$HSI[x, t]_{greyWF} = \frac{WPL[x, t] - WPL_{composite,ref}}{WPL_{composite,ref}}, \quad (3)$$

858 3. Results

859 In the following section, we present the results from field observations, useful not only for
860 ecohydrologic parameterization, but also to elucidate features regarding greyWF and hydrologic
861 services. Next, we compare the water yield and greyWF outputs from simulations under LULC
862 scenarios, including EbA options, to finally propose a new hydrologic services indicator.

863 3.1. Data from field sampling

864 Some of the water quality and quantity variables from our freshwater monitoring are useful to assess
865 the hydrologic services, thus they are presented in **Table 4**. These variables were selected due to
866 their relationship with anthropic impacts on the water bodies and because of their importance for
867 sanitation

868 Among the water quality variables sampled in the field step of the research (see Taffarello et al.,
869 2016a; Taffarello et al., 2016b), we highlight turbidity because it indicates a proxy estimation about
870 the total suspended solids in lotic environments (UNEP, 2008), related to the LULC conversion and
871 reflects the changes in the hydrologic services. **Figure 6** shows the direct correlation between
872 turbidity and size of the sub-basins. Turbidity can indirectly indicate anthropic impacts in streams and
873 rivers (Martinelli et al., 1999). The lower turbidity mean values were observed in two more
874 conserved sub-basins (which presented higher amounts of forest remnants): 2 NTU in the *reference*
875 *Cancã catchment*(Domithildes)and 5 NTU in *Upper Posses*.

876 Otherwise, we found a positive relationship between nitrate concentrations and both discharge and
877 mean water level (**Figure 7**). It can be inferred that higher concentrations of macronutrients would
878 be found in downstream areas. This trend can be associated to the nutrient migration (Cunha et al.,
879 2013) and land-use change (Zaffani et al., 2015), as well as point source pollution. In addition, the
880 absence of the riparian forest in 70% of protected area (36.844 ha) of the Cantareira System

Comentado [UdW5]: Attending comments of reviewer 2, we here split discussion into a separated section from results.

Comentado [UdW6]: Relocated to Discussion section, attending reviewer 2's comments

881 (Guimarães, 2013) can increase the sediment transport from riparian areas to rivers and make
882 pollutant filtration more difficult, leading to higher nitrate concentrations downstream.

883

884 3.2. LULC change scenarios

885 The variations in LULC affect freshwater quality which, in turn, affect the dynamics of aquatic
886 ecosystems (Zaffani et al., 2015; Botelho et al., 2013; Hamel et al., 2013; Bach & Ostrowski, 2013;
887 Kaiser et al., 2013). These changes impact the hydrologic services, especially regulating and
888 supporting ecosystem services (Mulder et al., 2015; Molin et al., 2017).

889 The LULC of each sub-basin, according to a past-condition scenario (S1, in 1990), a present-condition
890 (S2, in 2010) and a future (S2+Eba, in 2035) LULC scenario, using the same weather input datafiles, is
891 shown in **Table 5**.

892 We evaluated the effects of LULC change scenarios in 20 catchments in the Jaguari, Cachoeira and
893 Moinho sub-basins, South-East Brazil. Concerning the land-use change, the main soil use 25 years ago
894 was: pasture (in 50% of the sub-basins) and native vegetation (in 45% of the sub-basins). According
895 to ISA (2012) and Molin (2014), the 5% of the remaining area were divided into vegetables,
896 eucalyptus, sparse human settlements, bare soil and mining. The main activity in the past (1990) was
897 extensive cattle raising for milk production by small producers in the region (ANA, 2012; Veiga Neto,
898 2008).

899 By assessing the temporal trends of increment or reduction of native remnants, we examined the
900 periods 1990-2010 versus 2010-2035. From 1990 to 2010, the percentage of forest increased by 50%
901 in the Domithildes sub-basin, which was the reference catchment of the Water Producer/PCJ project,
902 (see Taffarello et al., 2016a), Moinho, Cachoeira dos Pretos, F34, B. Jacarei, B. Atibainha, B.
903 Cachoeira, Pq Eventos, F25B and B. Jaguari (Figure 9). Concerning the period from 2010-2035, the
904 model was set up considering an increase in native vegetation in all sub-basins from forest remnants
905 in 2010, and from the new BMP practices of reforestation with native species in 20 sub-basins by
906 2035 (Figure 9). The hydro-services in the Posses and Salto catchments and in the Cachoeira sub-
907 basin will be increased by 2035 as a function of the efforts on EbA which currently exist in the region
908 (Richards et al., 2017; Richards et al., 2015; Santos, 2014).

Comentado [UdW7]: Attending Reviewer 2, we relocate this paragraph into discussions

909 3.3. Water yield as a function of soil cover

910 In this research, we chose to use quali-quantitative duration curves for integrated assessment of
911 availability and quality of water. The flow-and-load duration curve, comparable to histograms of
912 relative cumulative frequencies of flows and loads of a waterbody, is a simple and important analysis
913 in hydrology (Collischonn & Dornelles, 2013). In quantitative terms, the flow duration curve shows
914 the probabilistic temporal distribution of water availability (Cruz & Silveira, 2007), relating the flow in
915 the river cross section to the percentage of time in which it is equalled or exceeded (Cruz & Tucci,
916 2008).

917 The three scenarios S1, S2 and S2+Eba resulted in different flow values for the 20 sub-basins (**Figure**
918 **10**). Based on the arithmetic mean of time series of monthly water yields, related to catchment

Comentado [UdW8]: Attending reviewer 2 comments, this section was relocated to discussion

919 areas, and assessed for all modelled sub-basins (N=20), the results show average values of water
920 yield: 31.4 ± 25.2 L/s/km² for S1 (1990), 14.9 ± 11.5 L/s/km² for S2 (2010) and 21.4 ± 15.3 L/s/km² for
921 S2+EbA (2035), respectively. This very high variation can be due to the complexity of river basin
922 systems and the various sources of uncertainty in the representation of ecohydrologic processes.

923 The three scenarios analysed and the ecohydrologic monitoring provide different types of
924 information for the same catchments..

925 **The 52% decrease of water yield between S1 (1990) and S2 (2010) scenarios, as $(14.9 - 31.3)/31.3 \times 100$ might**
926 **be related to a marginal increase in the Eucalyptus cover..** In fact, from 1990 to 2010, eucalyptus cover
927 increased +6.8 % in total land cover, but +181% in relative terms. Another possible explanation is the
928 decrease in native vegetation from 1990 to 2010, with -1.8 % in total land cover, but -4.3%, in
929 relative terms.

930 In parallel, we evaluated the water yield. Thus, the flow-and-load duration curves summarize the
931 flow and pollutant load variability, thereby showing potential links and impacts for aquatic
932 ecosystem sustainability (Cunha et al., 2012; Cruz & Tucci, 2008). From these curves, we obtained
933 two different behaviours for the studied sub-basins (**Figure 10**):

934 **Behaviour I:**the water yield in 2010 reduced in relation to 1990 and the water yield in 2035 might
935 exceed the 1990 levels. The examples are: *Upper Jaguari, Cachoeira* sub-basin (including the
936 *Cachoeira dos Pretos, Chalé Ponto Verde, Ponte Cachoeira, F24 outlet*) and *Moinho* catchments;

937 **Behaviour II:**the water yield after 2010 was reduced until 2035 and this water yield recuperation was
938 not possible for the values in 1990. Examples, in decreasing size of drainage areas, are: *Atibainha, B.*
939 *Jaguari, F25B, Parque de Eventos, F23, B.Atibainha, F34, F30, Salto, Posses Outlet, Domithildes, Portal*
940 *das Estrelas (Middle Posses).*

941 On the one hand, according to **Figure 11**, the water yield of S1 is inversely proportional to the land
942 use of mixed forest cover. The water yield in S2 indicates a constant value of approximately 17
943 L/s/km². Moreover, for the S2+EbA scenario, which incorporates the EbA approach through BMP, the
944 water yield is approximately 17 L/s/km², but with a slight increase in the water yield when the
945 percentage of forest cover is higher than 50%. Presumably, this slight increase in the water yield
946 would be related to the type of best management practices (BMP) of the recovery forests, which still
947 did not achieve evapotranspiration rates of the climax stage. In the riparian forest recovery,
948 evapotranspiration rates are lower and, thus, a greater amount of precipitation reaches the soil and
949 rivers through the canopy. This process could benefit other hydrologic components, such as runoff,
950 increasing water flows into the rivers. This effect can possibly explain the **behaviour I** catchments (see
951 **Fig. 10**).

952
953 **3.4. Relationships between land-use/land-cover change and grey water footprint**

954 For an integrated assessment of hydro-services, we analysed the spatio-temporal conditions of load
955 production at the sub-basin scale (see more information on Section S.4 **“Comments on differences in**
956 **land-use/land-cover in sub-basins studied”**, in **Supplementary Material**). As we studied rural sub-

Comentado [UdW9]: Attending reviewer 2, we carry this section to discussion

957 basins, water pollution is mainly produced by diffuse sources, such as fertilizers and agrochemicals.
958 In this context, we evaluated the evolution of greyWF to show nitrate (N-NO₃), total phosphorus (TP)
959 and sediment (Sed) yields (indicated by turbidity) of scenarios S1, S2 and S2+EbA. First, we calculated
960 the nitrate loads generated from the 20 sub-basins in the three scenarios. Second, we did the same
961 for total phosphorous loads and sediment yields. Third, considering the river regime, we calculated
962 the greyWF for nitrate, total phosphorous and sediments in each sub-basin to develop a new
963 composite index that assesses the sustainability of hydrologic services.

964 Concerning nitrate, the sampled concentrations were low. In addition, SWAT simulations also
965 brought very low outputs, and the greyWF-NO₃ varied from 0.11 L/s/km² (in *Atibainha* subbasin in S2
966 (2010) scenario) to 2.83 L/s/km² (in *Middle Posses* catchment, *Portal das Estrelas*, under S2+EbA
967 (2035) scenario). Considering Brazilian water quality standards for nitrate, the maximum allowed
968 concentration is 10 mg/L (Brasil, 2005). These low amounts of nitrate loads make the greyWF-NO₃ fall
969 to low values in the three scenarios analysed (between 1 and 10%; **Figure 12a**).

970 In relation to total phosphorous (TP), the load duration curves from S1, S2 and S2+EbA scenarios
971 showed disparities. For example, the greyWF-TP decreased in all sub-basins between 1990, 2010 and
972 2035. From 2010 to 2035, the model predicts a new behaviour for the greyWF-TP.

973 Results of the greyWF for TP, NO₃ and sediments enabled us to infer hydrological regionalization for
974 nutrient loads. Among the 20 sub-basins studied, we selected 2 sub-basins as study cases to illustrate
975 the links between LULC and greyWF: (1) the *Upper Jaguari* and (2) *Domithildes*. The reasons for
976 selecting the two sub-basins among the 20 sub-catchments are detailed in Section S.5 of Supplementary
977 Material

978 3.4.1 Case study I: Upper Jaguari sub-basin

979 The Upper Jaguari (**Figure 13**) has 302 km² and is the second most upstream sub-basin within the
980 Cantareira System (downstream of only *F28* sub-basin, with 277 km²). Comparing scenario 1990 (S1)
981 and 2010 (S2), the results showed evidence that the native forest decayed approx. 10 %. Indeed,
982 scenario 2035 (S2+EbA) still assumes a very small decrease in the native forest. This decrease may be
983 due to the increase in secondary forests by BMP, which could stabilise the native forest LULC by 70%
984 until 2035. The mean annual simulated water yields, in spite of high variability of simulated
985 scenarios, pointed out values of 18 L.s⁻¹.km² (1990, S1), 13 L/s/km² (2010, S2) and 21 L/s/km² (for
986 2035, S2+EbA).

987 3.4.2 Case study II: Domithildes headwater

988 The *Domithildes* catchment (9.9 km²) is located in the *Cancã* catchment. Similar to *Upper Jaguari*,
989 *Domithildes* is one of the most conserved sub-basins, mainly with native forests. The native forest
990 fraction remained constant (see **Figure 14**) from S1 (51% in 1990) to S2 (52% in 2010). However,
991 unlike the *Upper Jaguari* sub-basin (see **Figure 13**), native vegetation could increase by 56% in
992 S2+EbA (2035). Due to the fact that *Domithildes* was adopted as a reference basin for Water
993 Producer/PCJ, the augmented fraction of native forest by 2035 could show an increase of secondary
994 forest.

Comentado [UdW10]: Attending reviewer 2's comments

995 Regarding water yield, the *Domithildes* catchment was classified as a second type of 'subbasin
996 behaviour' (Section 3.3). There is a positive increment of water yield between 2010 (~18 L/s/km²)
997 and 2035 (~23 L/s/km²), although this situation may not achieve values obtained for S1 conditions in
998 1990 (~ 29 L/s/km²).

999 **3.5. Results of a new index for hydrologic service assessment**

Comentado [UdW11]: Attending reviewer 2's comments

1000 A new index for hydrologic service assessment was developed as a simple relation between greyWF
1001 and water yield, using a fraction between water demand (numerator) and availability (denominator).
1002 Some authors commonly use this fraction as a direct approach to water scarcity (i.e. Smakhtin, et al.,
1003 2005; Hoekstra et al., 2013; McNulty et al., 2010; among others). Therefore, we first assessed
1004 greyWF by respective drainage basins (**Figure 15**). Then, we calculated the water pollution levels.

1005 Results in **Figure 16** show the composite water pollution level (WPLcomposite) versus drainage areas
1006 and compared with the HSI. The baseline *WPLcomposite,ref* is related to the *Domithildes* catchment
1007 (horizontal, dotted line in **Figure 16**). This line divides the graph into two regions: less sustainable
1008 basins (*HSI*>0) and more sustainable basins (*HSI*≤0). More sustainable basins (*HSI*<0) are *Salto*,
1009 *Cachoeira* nested catchments (*Cachoeira dos Pretos*, *Chalé Ponto Verde* and *Ponte Cachoeira*), as well
1010 as *F28*, *F24* and the *Upper Jaguari* basin.

1011 **3.6. Comparison of field investigation and modelled scenarios**

1012 Field, experimental data (Taffarello et al., 2016a) with modelled scenarios of land-use and land-cover
1013 change, including the EbA hypothesis were integrated into a summary figure in the Supplementary
1014 Material (see Supplementary Figure S.1).

1015

1016 **4. Discussion**

1017 This section discusses field data, LULC change scenarios, GWF and water yield, not only in general
1018 aspects, but also in selected catchments fore-mentioned in Section 3.

1019

1020 **4.1 On field data**

1021 Other conserved subbasins also presented low mean values of turbidity (< 6.5 NTU): *intervention*
1022 *Cancã* catchment (5 NTU), and *Cachoeira dos Pretos* (6 NTU). We found the highest turbidity, above
1023 40 NTU which is considered the maximum established water quality standard for Brazilian Class 1
1024 (BRASIL, 2005): at *Parque de Eventos* (283 NTU), at *F23* (180 NTU) and at *Salto outlet* (160 NTU).
1025 However, these three sampling sites are located at water bodies of Class 2, where the maximum
1026 turbidity allowed is up to 100 NTU (BRASIL, 2005). Due to these areas have the highest urbanization
1027 among the sampled sites, they are in non-compliance with Brazilian environmental standards. Arroio
1028 Júnior (2013) found a decreasing relation between turbidity and drainage areas in another catchment
1029 located in Sao Paulo state. Temporal turbidity patterns show that on the one hand in 11 out of 17
1030 monitored sites, the higher values of turbidity occurred in December, 2013, the only field campaign
1031 with significant precipitation (35.3 mm) and with a higher antecedent precipitation index (API =

1032 123.7mm). This can be due to carrying allochthone particles, which are drained into rivers by
1033 precipitation. Similarly, Arroio Júnior (2013) also observed higher turbidity in the rainy season
1034 (December, 2012) which can lead to erosive processes. On the other hand, Zaffani et al. (2015)
1035 showed that turbidity did not vary over the hydrologic year in medium-size, rural and peri-urban
1036 watersheds ranging from 1 to 242 km². In this case, other factors may have had an influence, such as
1037 deforestation, seasonal variability, soil use type, sewage and mining (CETESB, 2015; Tundisi, 2014).

1038

1039 **4.2 On LULC change scenarios**

1040 In the S2 Scenario (2010), the main soil use is pasture in 58% of the sub-basins and forest in 40% of
1041 them. From 1990 to 2010, there was a significant conversion of soil cover, with a slow reduction of
1042 pasture areas (-2%) and native remnants (-5%) and with a progressive increase of eucalyptus
1043 (*Eucalyptus* sp.), an exotic forest in Brazil. Eucalypt soil use varied from +1%, within *Posses* up to
1044 +31% in the *Chalé Ponto Verde* sub-basin in 2010. Eucalyptus cover, however, did not achieve 10% of
1045 the soil uses in any of the simulated sub-basins in 1990. In the third scenario (S2 + EbA), we
1046 hypothesized incentives of public policies for forest conservation and restoration, due to the
1047 strengthening of EbA in the Cantareira System. This could lead to an increase in native vegetation
1048 reaching percentages of 15% in the *Posses outlet* and 69% in the *F28 sub-basin*. In this scenario, the
1049 higher percentages of native vegetation would occur in the sub-basins *F28, Upper Jaguari and*
1050 *Cachoeira dos Pretos*.

1051 Despite this general increase in native forest cover, we highlight the deforestation which occurred in
1052 the *F23* sub-basin in the Camanducaia river. Currently, although the basin has 34% of native forest
1053 cover, this rate has tended to decrease since 1990. The *F23 outlet* (sub-basin 2) had 37% of native
1054 forest cover in 1990, which then became 34 % in 2010 and the S2+EbA Scenario predicts that F23
1055 could reach 36.2% of native forest by 2035, returning to the percentages found in 1990. Another
1056 critical situation is the *Posses outlet* (SWAT sub-basin 6): despite the conservation efforts which have
1057 been made in the region through the *Water Conservation* project (see Richards et al., 2015; Santos,
1058 2014; Pereira, 2013), the current percentage of native remnants is 13%, which can become 16% in
1059 2035, however not achieving the rate in 1990 (22%). This can potentially disrupt the regulating and
1060 provision hydrologic services provided by *Posses* sub-basin and needs to be evaluated in depth.

1061 Spatio-temporal patterns of the main soil uses which compete with forest cover are analysed:
1062 pasture and eucalyptus. First, related to pasture, it can be observed that it was the main use in the
1063 past in 60% of the sub-basins (in 1990) and, currently, it has become the majority LULC,
1064 approximately 40%. Our scenarios indicate that due to EbA strengthening, encouraging the links
1065 between environmental conservation and forest restoration, 20% of the sub-basins could be mainly
1066 occupied by pasture (sub-basins 2, 4, 6 and 7). This rate is reasonable, considering rural sub-basins.
1067 Moreover, the reduction in pasture in the Cantareira System was more evident in the 1990-2010
1068 period than in the 2010-2035 scenario. This can be explained by, at least, three factors: i) rural
1069 landowners awareness of the relevance of converting pasture to native forest to generate and
1070 maintain ecosystem services in the Cantareira System (Saad, 2016; Extrema, 2015; Mota da Silva,
1071 2014; Padovezi et al., 2013; Gonçalves, 2013; Veiga-Neto, 2008); ii) seasonal changes in the

1072 ecosystem structure which can increase the ecosystem resilience (Mulder et al., 2015) and an
1073 observed significant increase, mainly in the 1990-2010 period, of non-native species plantations.

1074 Second, regarding the eucalyptus cover, the future scenario shows an increasing threat to the
1075 regulating and supporting services as a result of the exotic forest in expansion. In 2035, eucalyptus
1076 cover may include, on average, 12% of the total area of the 20 catchments studied here. This is
1077 significant in comparison with 10% in 2010 and only 2% in 1990 for the same catchments. The
1078 scenario for 2035 shows that the maintenance of hydrologic services deserves attention, because
1079 eucalyptus monoculture can potentially impact not only the headwaters, but entire landscapes,
1080 threatening the ecosystem dynamics. Moreover, these plantations, with an average wood yield of 50
1081 to 60 m³ of *Urograndis* per hectare, need high quantities of agrochemicals, due to the low diversity of
1082 the population and low adaptation to climate change (Kageyama & dos Santos, 2015). In short, here
1083 we highlight the threat to biodiversity that has been brought by alien species in headwaters and the
1084 changes that it can promote on native species (Hulme & Le Roux, 2016) which, in turn, impact the
1085 ecosystem services.

1086

1087 4.3 On water yield and LULC

1088 On the other hand, we observed in *Posses, Salto, Jaguari, Cancã* and *Atibainha* catchments an
1089 inverse situation (**behaviour II**). This effect can be related to the hydrologic response produced by:
1090 (a) type of catchment; (b) size of catchment; (c) the low soil moisture in the red-yellow latosol
1091 (Embrapa, 2016), which did not favour high evapotranspiration rates; (d) the riparian forest,
1092 originating from the EbA or Water-PES actions, that should still be at the initial stages, not achieving
1093 a climax in 20 years (this explanation therefore assumes that the baseline of PES actions was in 2015,
1094 although there are examples of restored forests in Extrema-MG with high evapotranspiration rates,
1095 as can usually be found in climax forests); and (e) unpredictability, non-linearity and uncertainty
1096 (Ferraz et al., 2013; Lima & Zakia, 2006).

1097 The role of the forest in the hydrologic cycle in river basin scales has been debated for centuries.
1098 Riparian native forests, eucalyptus and riparian forests in recuperation (shown here as orchard) have
1099 different hydrologic responses. There is still a lack of knowledge regarding the influence of different
1100 types and phases of vegetation on the hydrologic processes. Bayer (2014) found that the vegetation
1101 height and leaf area index are inversely proportional to the water flows, which corroborate previous
1102 studies (Hibbert, 1967). Riparian forest restoration increases the mean evapotranspiration, reducing
1103 the water yield (Molin, 2014; Salemi et al., 2012; Lima & Zakia, 2006; Andreassian, 2004). Restoration
1104 increases the water storage capability into the catchment throughout the riparian zone, contributing
1105 to the higher water flow in the dry season (Lima & Zakia, 2000). This can lead to unexpected results
1106 regarding water yield. Furthermore, at small catchments of temperate climate, researchers
1107 estimated that deforestation in 40% of the catchments would increase the runoff of 130 ± 89
1108 mm.year⁻¹ considering the entire water cycle in the catchment scale (Collischonn & Dornelles, 2013).
1109 In addition, there is high dispersion in the results based monitoring (usually, in paired catchments or
1110 Nested Catchment Experiment - NCE), which makes it more difficult to predict the flow as a result of
1111 soil use conversion. Similarly, we found high dispersion in the comparison between water yields
1112 *versus* different land cover in 20 sub-basins of the subtropical climate (**Figure 11**).

1113 BMP have been in progress since 2005 in the *Posses Outlet* (sub-basin 6, **Table 5**) and *Middle Posses*
1114 (*Portal das Estrelas*, Nº 7), and since 2009 in *Domithildes*, *F30* and *Moinho* catchments (Subbasins 9,
1115 11 and 20, respectively). These BMP originated from the *Water Conservator* and *Water Producer/PCJ*
1116 projects. In these cases, we recommend that public agencies take care when defending PES as
1117 inductors of more water availability (ANA, 2013). Parts of these results and previous investigations,
1118 which were made through NCE (Taffarello et al., 2016a), point out the opposite, i.e., in the more
1119 conserved catchments, we found lower water yields. Despite the fact that there are many Water-PES
1120 programs in Brazil (Pagiola, von Glehn & Taffarello, 2013; Guedes & Seehusen, 2011), measurements
1121 of the effect on water yield under forest restoration are still lacking in tropical and subtropical
1122 conditions (Taffarello et al., 2016a; Salemi et al., 2012). However, the benefits of riparian forests on
1123 water quality, margin stability, reduction of water erosion and silting are clear in the scientific
1124 literature (Santos, 2014; dos Santos et al., 2014; Studinski et al., 2012; Udawatta et al., 2010).

1125

1126 **4.4 On GWF, LULC and water yield in selected catchments: Upper Jaguari and Domithildes**

1127 The discussion of the variability in GWF and water yield is based in the hydrologic conditions simulated
1128 in the test period from 2006 to 2014. In turn, this test period was selected due to high availability of
1129 rainfall stations under operation, which would potentially better perform distributed modelling at
1130 several sub-basins using SWAT. For the three scenarios simulated, the relationships between the
1131 native forest cover and mean water yield are different from each other.

1132 On the one hand, in Upper Jaguari (“Alto Jaguari”), for scenario S1 (1990), the higher the native forest
1133 cover, the lower the water yield. This scenario behaviour is extended at experimental sites, and even
1134 strongly documented in the literature (Salemi et al, 2012; Smarthust et al., 2012, Collischon &
1135 Dornelles, 2013). For scenario S2 (2010) the water yield seems not fully related to native forest LULC,
1136 oscillating around an average value of 18 L/s/km². In scenario S2+EbA (2035), however, there is a
1137 slight increase in water yield when native forest cover is higher than 50%. This proportional relation
1138 between water yield and forest cover in the S2+EbA is both controversial and contrary to results
1139 published by some authors (e.g. Collischonn & Dornelles, 2013; Salemi et al., 2012). For example,
1140 monitoring data shows a reduction in the water yield with higher native forest land cover (Taffarello
1141 et al., 2016a). Salemi and co-authors, in a review on the effect of riparian forest on water yield, found
1142 that riparian vegetation cover decreases water yield on a daily to annual basis.

1143 Furthermore, the greyWF-NO₃ of the *Upper Jaguari* basin showed 0.14 L/s/km² for scenario S1 (1990),
1144 increased to 0.23 L/s/km² for scenario S2 (2010) and could grow to ca. 0.54 L/s/km² in S2+EbA
1145 scenario (in 2035). However, this result is different from the one expected in the hypothesis testing
1146 through modelling. The null hypothesis states that increasing native forest cover is correlated to
1147 decreasing nutrient loads flowing to streams. The results, modelled by SWAT, predicted an increase
1148 in the greyWF by 2035. The simulated increase in the native forest (approx. +5%) appears to be
1149 insufficient for buffering nitrogen loads from animal excrements such as mammals or zooplankton.
1150 For a more in-depth analysis, other factors that influence the greyWF should be evaluated
1151 thoroughly.

1152 On the other hand, in “Domithildes” catchment (reference catchment), other factors, such as native
1153 vegetation, could influence the hydrologic cycle decreasing water yields in the 2010 scenario (S2).

1154 One explanation of this water yield decrease could be the positive LULC of *Eucalyptus sp.* to +5% in
1155 2010 (S2). Regardless of other factors, +1% of eucalyptus land-use fraction in *Domithildes* will
1156 represent -2 L/s/km² of water yield, or -63 mm per year, in the same range of results reported by
1157 Salemi (2012) and close to Semthurst et al (2015).

1158 Comparing seasonal water yields, the results showed higher variability around monthly flow averages
1159 for the S2+EbA (2035) scenario. These deviations in monthly flows by the S2+Eba (2035) scenario
1160 were higher in wetter months between November and March. The regulation of water yield, in both
1161 rainy and dry conditions, is more effective when quantified through variance (Molin, 2014). In spite
1162 of these uncertainties, scenarios modelled by SWAT estimated the highest mean monthly water yield
1163 in February (38 L/s/km²) and the lowest mean monthly water yield in September and October (8
1164 L/s/km²). On the one hand, the results showed that a growing rate of native vegetation LULC since
1165 2010 would serve to attenuate both e-flows peaks, especially in the rainy season (see flow duration
1166 curves), and pollutant filtration (see duration curves of N-NO₃ loads). On the other hand, the more
1167 native forest cover, the lower the water yield (Bayer, 2014; Molin, 2014; Burt & Swank, 1992). Thus,
1168 the progressive increase of water yield from 2010 to 2035, compared to a higher total forest cover,
1169 could indicate other factors, such as forest connectivity, forest climax and secondary factors such as
1170 BMP, that could produce non-linear conditions of water yield from the local scale to the catchment
1171 scale.

1172

1173 5. Conclusions and Recommendations

1174 Although the water-forest system interaction is a classic issue in Hydrology, the impacts of vegetation
1175 on quali-quantitative aspects of water resources need to be better understood.

1176 Supported by field experiments and quali-quantitative simulations under different scenarios
1177 including EbA options with BMP, our results showed evidence of nonlinear relationships among LULC,
1178 water yield, greyWF of nitrate, total phosphorus and sediments, which irreversibly affect the
1179 composite of water pollution level (WPL), the definition of WPL of reference (here established at
1180 Domithildes catchment) and the hydrologic service index (HSI) although there was a coherent and
1181 proportional relation between the observed mean river velocity and observed specific flow, experimental
1182 evidence still depicted outliers, not only in reference catchments with EbA/PES-Water options, but also in
1183 intervention catchments with no EbA/PES-Water options. These evidences point illustrative examples of how
1184 complex LULC options from EbA would be exhaustively sensed into hydrological parameters and simulation
1185 scenarios using SWAT or other distributed models. Despite using a semi-distributed model for
1186 assessing non-point sources of pollution mainly tested under different LULC scenarios, our results
1187 showed that the intrinsic nature of flow-load duration curves, LULC and greyWF are constrained to
1188 high uncertainties and nonlinearities both from *in-situ* sampling and from processes interactions of
1189 modelling. Our results show the need to evaluate many uncertainty sources, such as: model
1190 sensitivity analysis, observed streamflow data, ecohydrologic model performance, residual analysis,
1191 etc. To attain goals of EbA, using HSI through greyWF assessment and composite of WPL, some
1192 conditions are needed to better fit models to field observations, as follows: (i) monitoring and, if
1193 possible, constraining illegal inputs of high-concentrated pollutants, especially from growing urban

1194 settlements, (ii) restoring riparian vegetation, especially at HRUs where EbA scenarios introduce
1195 more sensitivity of water yields and GWF and (iii) modelling EbA effects at HRUs where trapping and
1196 removing inflowing sediments are more evident. For the health of river ecosystems, we used HSI,
1197 flow regimes and WPL composite, as composing alternative environmental flows. Although the role of
1198 vegetation on streamflow has been widely studied, very few investigations have been reported in
1199 Brazilian with control nutrient sources, transportation and delivery. Moreover, further field and
1200 modelling research is needed when integrating LULC, EbA and grey WF through hydrologically-
1201 distributed models. Thus, future research could clarify the influence of vegetation on water quality
1202 and the role of anthropogenic and natural drivers in ecohydrologic processes on a catchment-scale.

1203 5. Acknowledgments

1204 A Supplementary Material of this paper is available at HESS link. This paper was supported by the Sao
1205 Paulo Research Foundation (FAPESP) [grants #2012/22013-4; #2014/15080-2; and #2008/58161-1
1206 "Assessment of Impacts and Vulnerability to Climate Change in Brazil and Strategies for Adaptation
1207 Options"], CAPES 88887.091743/2014-01 (ProAlertas CEPED/USP), CNPq 465501/2014-1 & FAPESP
1208 2014/50848-9 INCT-II (Climate Change, Water Security), CNPq PQ 312056/2016-8 (EESC-
1209 USPCEMADEN/MCTIC) & CAPES PROEX (PPGSHS, EESC/USP). We thank two graduates in
1210 environmental engineering at USP-Lorena, Cauê Fontão and Rodolfo Cursino, for providing updated
1211 information on water footprint for the introduction of the manuscript, Two anonymous reviewers
1212 carefully motivate us to: correct errors, detail useful information and perform a better final version of
1213 this paper. Co-authors declare no conflict of interest, also with checking for originality and with equal
1214 contribution to this paper.

1215 References

- 1216 ALDAYA, M.M., MARTÍNEZ-SANTOS, P. LLAMAS, M.R. Incorporating the Water Footprint and Virtual
1217 Water into Policy: Reflections from the Mancha Occidental Region, Spain. *Water Resour Manage*, 24,
1218 941–958, 2010. DOI 10.1007/s11269-009-9480-8.
- 1219 ARNOLD, J. G., MORIASI, D. N., GASSMAN, P. W., ABBASPOUR, K. C., WHITE, M. J., SRINIVASAN, R., ...
1220 & KANNAN, N. SWAT: Model use, calibration, and validation. *Transactions of the ASABE*, 55(4), 1491-
1221 1508, 2012.
- 1222 BFN/GIS FEDERAL AGENCY FOR NATURE CONSERVATION / DEUTSCHE GESELLSCHAFT FÜR
1223 INTERNATIONALE ZUSAMMENARBEIT (GIZ) GMBH. *Natural solutions to climate change: The ABC of
1224 Ecosystem-based Adaptation. Summary and Conclusions from an International Expert Workshop held
1225 4-9 August 2013 on the Isle of Vilm, Germany, 2013.*
- 1226 BIEROZA, M. Z., HEATHWAITE, A. L., MULLINGER, N. J., & KEENAN, P. O. Understanding nutrient
1227 biogeochemistry in agricultural catchments: the challenge of appropriate monitoring frequencies.
1228 *Environmental Science: Processes & Impacts*, 16(7), 1676-1691, 2014.

- 1229 BOITHIAS, L., SAUVAGE, S., LARNIER, K., ROUX, H., RICHARD, E., SANCHEZ-PÉREZ, J. M., &
1230 ESTOURNEL, C. Modelling river discharge and sediments fluxes at sub-daily time-step: Insight into the
1231 CRUE-SIM project devoted to Mediterranean coastal flash floods, 2015.
- 1232 BORAH, D. K., & M. BERA. Watershed-scale hydrologic and nonpoint-source pollution models: Review
1233 of applications. *Trans. ASABE* 47(3), 789-803, 2004.
- 1234 BRAZIL (2005). Resolução CONAMA nº 357/2005, March, 17th 2005. Dispõe sobre a classificação dos
1235 corpos de água e diretrizes ambientais para o seu enquadramento, bem como estabelece as
1236 condições e padrões de lançamento de efluentes, e dá outras providências [Establishing the
1237 classification of water bodies and environmental guidelines for frameworks, as well as establishing
1238 conditions and standards for wastewater release]. *Diário Oficial da União*, 18 de março de 2005,
1239 p.58-63.
- 1240 BRAZILIAN INSTITUTE OF GEOGRAPHY AND STATISTICS – IBGE (2010). Demographic Census 2010.
1241 Available at: <http://loja.ibge.gov.br/atlas-do-censo-demografico-2010.html>, Accessed on July, 2017.
- 1242 BREMER, L. L., AUERBACH, D. A., GOLDSTEIN, J. H., VOGL, A. L., SHEMIE, D., KROEGER, T., ... &
1243 HERRON, C. One size does not fit all: Natural infrastructure investments within the Latin American
1244 Water Funds Partnership. *Ecosystem Services*, 17, 217-236, 2016.
- 1245 BRESSIANI D A, GASSMAN P W, FERNANDES J G, GARBOSSA L H P, SRINIVASAN R, BONUMÁ N B. ...
1246 MENDIONDO, E.M. Review of Soil and Water Assessment Tool (SWAT) applications in Brazil:
1247 Challenges and prospects. *Int J Agric & Biol Eng*, 2015; 8(3), 9–35, 2015. DOI:
1248 10.3965/j.ijabe.20150803.1765.
- 1249 BURT, T. P., & SWANK, W. T. Flow frequency responses to hardwood-to-grass conversion and
1250 subsequent succession. *Hydrological Processes*, 6(2), 179-188, 1992.
- 1251 CARVALHO-SANTOS, C., NUNES, J. P., MONTEIRO, A. T., HEIN, L., & HONRADO, J. P. Assessing the
1252 effects of land cover and future climate conditions on the provision of hydrological services in a
1253 medium-sized watershed of Portugal. *Hydrological Processes*, 30:720-738, 2016.
- 1254 CBD (2010). Convention on Biological Diversity: X/33 Biodiversity and climate change, Decision
1255 Adopted by the Conference of the Parties to the Convention on Biological Diversity at its Tenth
1256 Meeting; UNEP/CBD/COP/DEC/x/33; 29 October 2010. Nagoya, Japan: Secretariat of Convention on
1257 Biological Diversity, 2010.
- 1258 CETESB – Companhia Ambiental do Estado de Sao Paulo. Portal de Licenciamento Ambiental, 2016.
1259 [<https://portalambiental.cetesb.sp.gov.br/pla/welcome.do>]
- 1260 CHAPAGAIN AK, HOEKSTRA AY, SAVENIJE HHG. Water saving through international trade of
1261 agricultural products. *Hydrology and Earth System Sciences* 10, 455–468, 2006.
- 1262 COLLISCHONN, W. & DORNELLES, F. Hidrologia para engenharia e ciências ambientais. Porto Alegre:
1263 Associação Brasileira de Recursos Hídricos (ABRH), 2013.

- 1264 COLLISCHONN, W., HAAS, R., ANDREOLLI, I., & TUCCI, C. E. M. Forecasting River Uruguay flow using
1265 rainfall forecasts from a regional weather-prediction model. *Journal of Hydrology*, 305(1), 87-98,
1266 2005.
- 1267 COLOMBIA. Ministerio de Ambiente y Desarrollo Sostenible, Plan estrategico macrocuenca
1268 Magdalena Cauca, 2015.
- 1269 COLOMBIA. Ministerio de Ambiente y Desarrollo Sostenible, Planes de ordenación y manejo de
1270 cuencas hidrográficas (POMCA), 2014.
- 1271 COLOMBIA. Ministerio de Ambiente y Desarrollo Sostenible, Política nacional para a gestión integral
1272 del recurso hídrico, 2010.
- 1273 CRUZ, J.C. & TUCCI, C.E.M. Estimativa da Disponibilidade Hídrica Através da Curva de Permanência
1274 (Water availability estimation through flow duration curves). *Revista Brasileira de Recursos Hídricos*,
1275 13 (1), 111-124, 2008.
- 1276 CRUZ, J.C., & SILVEIRA, G. D. Disponibilidade Hídrica para outorga (i): Avaliação por seção hidrológica
1277 de referência (Water availability for legal water withdrawals (i): Evaluation by reference river cross
1278 section) . *Revista Rega–Gestão de Água da América Latina*, 4(2), 51-64, 2007.
- 1279 CUNHA, D. G. F., SABOGAL-PAZ, L. P., & DODDS, W. K. Land use influence on raw surface water
1280 quality and treatment costs for drinking supply in São Paulo State (Brazil). *Ecological Engineering*, 94,
1281 516-524, 2016.
- 1282 CUNHA, D.G.F.; CALIJURI, M.C.; MENDIONDO, E.M. Integração entre curvas de permanência de
1283 quantidade e qualidade da água como uma ferramenta para a gestão eficiente dos recursos hídricos
1284 Integration between flow and load duration curves as a tool for efficient water resources
1285 management) .*Rev. Eng. Sanit. Ambient. Vol. (17)*, 369-376, 2012.
- 1286 DAEE-SP (Departamento de Água e Energia Elétrica do Estado de São Paulo). Estudo de
1287 Regionalização de Vazões do Estado de São Paulo, FCTH-USP-DAEE, São Paulo (Study of natural flow
1288 regionalisation in the State of São Paulo, FCTH-USP-DAEE, São Paulo), *Águas e Energia Elétrica journal*
1289 – DAEE, year 5, 14, 1988.
- 1290 DOS SANTOS, A. C. A., SURITA, C. A., & ALLEONI, B. S. C. Qualidade das águas do rio Tietê e os
1291 serviços ecossistêmicos - Exemplo para a UGRHI 10, CBH-SMT. *Anais do XII Simpósio de Recursos*
1292 *Hídricos do Nordeste. 4-7 November, Natal, RN, Brasil (Water quality of Tietê river and ecosystem*
1293 *services – example for the UGRHI 10, CBH-SMT)*, 2014.
- 1294 DUKU, C., RATHJENS, H., ZWART, S. J. AND HEIN, L. Towards ecosystem accounting: a comprehensive
1295 approach to modelling multiple hydrological ecosystem services. *Hydrol. Earth Syst. Sci.*, 19, 4377–
1296 4396, 2015.
- 1297 ELLISON, D., N FUTTER, M., & BISHOP, K. On the forest cover–water yield debate: from demand-to
1298 supply-side thinking. *Global Change Biology*, 18(3), 806-820, 2012.
- 1299 ESCOBAR, H. Drought triggers alarms in Brazil’s biggest metropolis. *Science*, 347(6224), 812–812,
1300 2015. <http://doi.org/10.1126/science.347.6224.812>.

- 1301 FRANCESCONI, W., SRINIVASAN, R., PÉREZ-MIÑANA, E., WILLCOCK, S. P., & QUINTERO, M. Using the
 1302 Soil and Water Assessment Tool (SWAT) to model ecosystem services: A systematic review. *Journal of*
 1303 *Hydrology*, 535, 625-636, 2016.
- 1304 Fukunaga, D C; Cecílio, R A; Zanetti, S S; Oliveira, L T; Caiado, M A C (2015): Application of the SWAT
 1305 hydrologic model to a tropical watershed at Brazil. *CATENA* 125: 206–213. DOI: 10.1016/j.catena.2014.10.032.
 1306
- 1307 GARBOSSA, L. H. P., VASCONCELOS, L. R. C., LAPA, K. R., BLAINSKI, É., & PINHEIRO, A. The use and
 1308 results of the Soil and Water Assessment Tool in Brazil: A review from 1999 until 2010. In: 2011
 1309 International SWAT Conference, 2011.
- 1310 Gassman, P. W.; Reyes, M. R.; Green, C. H.; Arnold, J. G. (2007): The Soil and Water Assessment Tool.
 1311 Historical Development, Applications, and Future Research Directions. *Transactions of the ASABE* 50 (4):
 1312 1211–1250. DOI: 10.13031/2013.23637.
- 1313
- 1314 GASSMAN, P. W. SADEGHI, A.M. AND SRINIVASAN, R. Applications of the SWAT Model Special
 1315 Section: Overview and Insights. *Journal of Environmental Quality*, 43:1–8, 2014.
 1316 doi:10.2134/jeq2013.11.0466.
- 1317 GUEDES, F. B. & SEEHUSEN, S. E. Pagamentos por serviços ambientais na Mata Atlântica: lições
 1318 aprendidas e desafios (Payments for environmental services in the Atlantic Forest: lessons learnt and
 1319 challenges). Brasília: MMA, 2011.
- 1320 GUPTA, H. V., BASTIDAS, L., SOROOSHIAN, S., SHUTTLEWORTH, W. J., AND YANG, Z. L. Parameter
 1321 estimation of a land surface scheme using multi-criteria methods, *J. Geophys. Res.-Atmos.*, 104,
 1322 19491– 19503, 1999.
- 1323 HALLIDAY, S. J., WADE, A. J., SKEFFINGTON, R. A., NEAL, C., REYNOLDS, B., ROWLAND, P., ... &
 1324 NORRIS, D. An analysis of long-term trends, seasonality and short-term dynamics in water quality
 1325 data from Plynlimon, Wales. *Science of the Total Environment*, 434, 186-200, 2012.
- 1326 HAMEL, P.; DALY, E.; FLETCHER, T.D. Source-control stormwater management for mitigating the
 1327 impacts of urbanization on baseflow: A review. *Journal of Hydrology*, 485. 201-211, 2013.
- 1328 HIBBERT, ALDEN R. Forest treatment effects on water yield, in *International Symposium on Forest*
 1329 *Hydrology*, pp. 527-543, Pergamon, New York, 1967.
- 1330 HOEKSTRA, A. Y. & CHAPAGAIN, A. K. *Globalization of Water: Sharing the Planet's Freshwater*
 1331 *Resources*, Blackwell Publishing, Oxford, 2008.
- 1332 HOEKSTRA, A.Y. & MEKONNEN, M.M. The water footprint of humanity, *Proc. PNAS* 109(9), 3232-
 1333 3237, 2012.
- 1334 HOEKSTRA, A. Y., M. M. MEKONNEN, A. K. CHAPAGAIN, R. E. MATHEWS, and B. D. RICHTER. Global
 1335 monthly water scarcity: Blue water footprints versus blue water availability, *PLoS ONE*, 7(2), 2012.
 1336 doi:10.1371/journal.pone.0032688.
- 1337 HULME, P. E., & LE ROUX, J. J. Invasive species shape evolution. *Science*, 352(6284), 422-422, 2016.

- 1338 KAGEYAMA, P.Y. & dos SANTOS, J.D. Biotecnologia Florestal: onde estamos e para onde vamos?
1339 [Forest Biotechnology: where are we and where are we going?] *Opiniões journal*, 40, Set-Nov., 2015.
- 1340 KAPUSTKA, L.A. & LANDIS, W.G. Introduction, in *Environmental Risk Assessment and Management*
1341 *from a Landscape Perspective* (eds L. A. Kapustka and W. G. Landis), John Wiley & Sons, Inc.,
1342 Hoboken, NJ, USA., 2010. doi: 10.1002/9780470593028.ch1.
- 1343 KRYSAKOVA, V. & ARNOLD, J. Advances in ecohydrological modelling with SWAT—a review,
1344 *Hydrological Sciences Journal*, 53:5, 939-947, 2008. DOI: 10.1623/hysj.53.5.939.
- 1345 KRYSAKOVA, V., WHITE, M. Advances in water resources assessment with SWAT—an overview,
1346 *Hydrological Sciences Journal*, 60:5, 771-783, 2015. DOI: 10.1080/02626667.2015.1029482.
- 1347 LIMA, W. P., & BRITO ZAKIA, M. J. Hidrologia de matas ciliares. Matas ciliares: conservação e
1348 recuperação [Hydrology of riparian forests]. Edusp, São Paulo, 33-44, 2000.
- 1349 LIMA, W. P., & ZAKIA, M. J. D. B. As florestas plantadas e a água [Planted forests and water]. Rio
1350 Claro: Editora Rima, 2006.
- 1351 MARTINELLI, L. A., PICCOLO, M. C., TOWNSEND, A. R., VITOUSEK, P. M., CUEVAS, E., MCDOWELL, W.,
1352 ... & TRESEDER, K. Nitrogen stable isotopic composition of leaves and soil: tropical versus temperate
1353 forests. In *New Perspectives on Nitrogen Cycling in the Temperate and Tropical Americas* (pp. 45-65).
1354 Springer Netherlands, 1999.
- 1355 MEA, MILLENIUM ECOSYSTEM ASSESSMENT. *Ecosystems and human well-being, synthesis* (Island,
1356 Washington, DC), 2005.
- 1357 MEKONNEN, M.M. & HOEKSTRA, A.Y. Global Gray Water Footprint and Water Pollution Levels
1358 Related to Anthropogenic Nitrogen Loads to Fresh Water. *Environ. Sci. Technol.*, 49, 12860–12868.
1359 Doi:10.1021/acs.est.5b03191, 2015.
- 1360 METROVANCOUVER. *Drinking Water Management Plan*. 18p., 2011. Available at:
1361 <http://www.metrovancouver.org/>, accessed on July, 2017.
- 1362 Mohor, G. S., Mendiondo, E M (2017) Economic indicators of Hydrologic Drought Insurance Under
1363 Water Demand & Climate Change Scenarios in a Brazilian Context, *Ecological Economics*, DOI:
1364 10.1016/j.ecolecon.2017.04.014 MOHOR S.G., TAFFARELLO, D., & MENDIONDO, E.M. Análise
1365 multidimensional e modelagem com dados experimentais do monitoramento hidrológico do projeto
1366 “Produtor de Água/PCJ”. [Multidimensional analysis and hydrologic modelling with experimental
1367 data from Water Producer/PCJ hydrologic monitoring]. *Anais do XXI Simpósio Brasileiro de Recursos*
1368 *Hídricos*, 2015a.
- 1369 MOHOR S.G., TAFFARELLO, D., MENDIONDO, E.M. Simulações em modelo semi-distribuído
1370 aprimoradas com dados experimentais de monitoramento hidrológico nas bacias hidrográficas dos
1371 rios PCJ [Simulations in a semi-distributed model with experimental data from Water Producer/PCL
1372 hydrologic monitoring]. *Anais do XXI Simpósio Brasileiro de Recursos Hídricos*, 2015b.

1373 MOLIN, P. G. Dynamic modelling of native vegetation in the Piracicaba River basin and its effects on
1374 ecosystem services. Piracicaba. Paulo Guilherme Molin. University of São Paulo “Luiz de Queiroz”,
1375 2014.

1376 MOLIN, P. G., SOUZA E MIRANDA JÉSSICA VILLELA, F. T. DE S., FRANSOZI, A. A., & FERRAZ, S. F. B.
1377 Mapeamento de uso e cobertura do solo da bacia do rio Piracicaba, SP: Anos 1990, 2000 e 2010.
1378 [Mapping of land use in the Piracicaba river basin, SP: 1990, 2000 and 2010]. Circular Técnica do IPEF,
1379 207, 1–11, 2015. Accessed from <http://www.ipef.br/publicacoes/ctecnica/>

1380 MOLIN, P.G.; GERGEL, S.E.; SOARES-FILHO, B.S.; FERRAZ, S.F.B. Spatial determinants of Atlantic Forest
1381 loss and recovery in Brazil. *Landscape Ecol.* 32:857–870, 2017. DOI 10.1007/s10980-017-0490-2.

1382 MORIASI, D.N., J. G. ARNOLD, M. W. VAN LIEW, R. L. BINGNER, R. D. HARMEL, T. L. VEITH. Model
1383 evaluation guidelines for systematic quantification of accuracy in watershed simulations. *Transactions*
1384 *of the ASABE*, 50(3): 885–900, 2007.

1385 MULDER, C., BENNETT, E.M., BOHAN, D.A., BONKOWSKI, M. CARPENTER, S.R., CHALMERS, R.,
1386 CRAMER, W. 10 Years Later: Revisiting Priorities for Science and Society a Decade After the
1387 Millennium Ecosystem Assessment. In: Guy Woodward and David A. Bohan, editors, *Advances in*
1388 *Ecological Research*, 53, Oxford: Academic Press, pp. 1-53, 2015.

1389 NASH, J. E., & SUTCLIFFE, J. V. River flow forecasting through conceptual models part I—A discussion
1390 of principles. *Journal of Hydrology*, 10(3), 282-290, 1970.

1391 NATIONAL WATER AGENCY [ANA]. Portaria n. 149, de 26 de março, 2015. Recomenda o uso da Lista
1392 de Termos para o “Thesaurus de Recursos Hídricos”. (Environmental law no 149, March 26th, 2015.
1393 Recommend using the list of terms for the “Water Resources Thesaurus”, 2015.

1394 NELSON, E., MENDOZA, G., REGETZ, J., POLASKY, S., TALLIS, H., CAMERON, D., ...& LONSDORF, E.
1395 Modeling multiple ecosystem services, biodiversity conservation, commodity production, and
1396 tradeoffs at landscape scales. *Frontiers in Ecology and the Environment*, 7(1), 4-11, 2009.

1397 OKI, T., AND S. KANAE, Global hydrological cycles and world water resources, *Science*, 313(5790),
1398 1068–1072, 2006. doi:10.1126/ science.1128845

1399 OLDEN J.D.; KENNARD, M.J.; BRADLEY J. P. A framework for hydrologic classification with a review of
1400 methodologies and applications in Ecohydrology. *Ecohydrology*, 2011. DOI: 10.1002/eco.251.
1401 Acessado em Dezembro, 2011.

1402 OLIVEIRA, J. B. Soils from São Paulo State: description of the soil classes registered in the pedologic
1403 map. Campinas, 1999.

1404 PADOVEZI, A., VIANI, R. A. G., KUBOTA, U., TAFFARELLO, D., FARIA, M., BRACALE, H., FERRARI, V., &
1405 CARVALHO, F. H. Produtor de Água na bacia hidrográfica Piracicaba/Capivari/Jundiá [Water Producer
1406 in the Piracicaba/Capivari/Jundiá River Basin]. In: *Experiências de pagamentos por serviços*
1407 *ambientais no Brasil*. Org. Pagiola, S., Von Glehn, H. C. & Taffarello, D., São Paulo: Secretaria de
1408 Estado do Meio Ambiente / Banco Mundial. p. 99-113, 2013.

1409 PAGOLOLA, S., VON GLEHN, H. C., & TAFFARELLO, D. (Org.). *Experiências de Pagamentos por Serviços*
1410 *Ambientais no Brasil [Payment for Environmental Services experiences in Brazil]*. São Paulo:
1411 Secretaria de Estado do Meio Ambiente / Banco Mundial. 336p., 2013.

1412 PEREIRA, D.R., MARTINEZ, M.A., SILVA, D.D., AND PRUSKI, F.F. Hydrological simulation in a basin of
1413 typical tropical climate and soil using the SWAT Model Part II: Simulation of hydrological variables
1414 and soil use scenarios. *Journal of Hydrology: Regional Studies*, 5, 149-163, 2016.

1415 POFF, N LEROY & JOHN H MATTHEWS. Environmental flows in the Anthropocene: past progress and
1416 future prospects. *Current Opinion in Environmental Sustainability*, 5: 667–675, 2013. Available in
1417 www.sciencedirect.com. Accessed on December, 2013.

1418 POFF, N. L., & ZIMMERMAN, J. K. Ecological responses to altered flow regimes: a literature review to
1419 inform the science and management of environmental flows. *Freshwater Biology*, 55(1), 194-205,
1420 2010.

1421 PORTO, M. F. A. & PORTO, R. L.L. Em busca da Gestão de Recursos Hídricos para a Cidade Resiliente
1422 [In pursuit of Water Resources Management for a Resilient City]. *Revista DAE*, 1, 6-11, 2014. doi:
1423 <http://dx.doi.org/10.4322/dae.2014.124>. Retrieved from
1424 <http://doi.editoracubo.com.br/10.4322/dae.2014.124>.

1425 POSNER, S., VERUTES, G., KOH, I., DENU, D., & RICKETTS, T. Global use of ecosystem service models.
1426 *Ecosystem Services*, 17, 131-141, 2016.

1427 PRUDHOMME, C., IGNAZIO GIUNTOLI, EMMA L. ROBINSON, DOUGLAS B. CLARK, NIGEL W. ARNELL,
1428 RUTGER DANKERS, BALÁZS M. FEKETE, WIETSE FRANSSSEN, DIETER GERTEN, SIMON N. GOSLING,
1429 STEFAN HAGEMANN, HANNAH, D.M. ...WISSER, D. Hydrological droughts in the 21st century,
1430 hotspots and uncertainties from a global multimodel ensemble experiment. *PNAS*: 3262–3267, 2014.

1431 QUILBÉ, R., & ROUSSEAU, A. N. GIBSI: an integrated modelling system for watershed management?
1432 sample applications and current developments. *Hydrology and Earth System Sciences Discussions*,
1433 4(3), 1301-1335, 2007.

1434 RAJIB, M. A., MERWADE, V., KIM, I. L., ZHAO, L., SONG, C., & ZHE, S. SWATShare—a web platform for
1435 collaborative research and education through online sharing, simulation and visualization of SWAT
1436 models. *Environmental Modelling & Software*, 75, 498-512, 2016.

1437

1438 RICHARDS, R.C.; CHRIS J. KENNEDY, THOMAS E. LOVEJOY, PEDRO H.S. BRANCALION. Considering
1439 farmer land use decisions in efforts to ‘scale up’ Payments for Watershed Services, *Ecosystem*
1440 *Services*, 23, 238-247, 2017. <http://dx.doi.org/10.1016/j.ecoser.2016.12.016>.

1441 RICHARDS, R.C.; REROLLE, J.; ARONSON, J.; PEREIRA, P.H.; GONÇALVES, H.; BRANCALION, P.H.S.
1442 Governing a pioneer program on payment for watershed services: Stakeholder involvement, legal
1443 frameworks and early lessons from the Atlantic forest of Brazil. *Ecosystem Services: Science, Policy*
1444 *and Practice*, 16: 23-32, 2015.

- 1445 Rodrigues, D. B, Gupta, H V, Mendiondo, E M (2014) A blue/green water-based accounting
1446 framework for assessment of water security, *Water Resour. Res.*, 50, 7187–7205,
1447 doi:[10.1002/2013WR014274](https://doi.org/10.1002/2013WR014274)
- 1448 Rodrigues, D, Gupta, H, Mendiondo, E M, Oliveira, P T (2015) Assessing uncertainties in surface water
1449 security: An empirical multimodel, *Water Res. Research*, DOI: [10.1002/2014WR016691](https://doi.org/10.1002/2014WR016691)
- 1450 SALEMI, L. F., GROPPPO, J. D., TREVISAN, R., SEGHESE, G. B., DE MORAES, J. M., DE BARROS FERRAZ, S.
1451 F., & MARTINELLI, L. A. Hydrological consequences of land-use change from forest to pasture in the
1452 Atlantic rain forest region. *Revista Ambiente & Água*, 7(3), 127, 2012.
- 1453 SANTOS, C. P. Indicadores de qualidade de água em sistemas de pagamentos por serviços
1454 ambientais. Estudo de caso: Extrema – MG. [Water quality indicators in payment for ecosystem
1455 service schemes]. Dissertação de Mestrado, ESALQ, Universidade de São Paulo, 2014.
- 1456 SANTOS, L.L. Modelos hidráulicos-hidrológicos: conceitos e aplicações. (Hydraulic-hydrologic models:
1457 concepts and applications) *Revista Brasileira de Geografia Física*, 2(3): 01-19, 2009.
- 1458 SAO PAULO STATE. Water Resources Situation Report of the Sao Paulo state [Relatório de Situação
1459 dos Recursos Hídricos do estado de São Paulo], 2017. Available at:
1460 http://www.sigrh.sp.gov.br/public/uploads/ckfinder/files/RSE_2016_Final_Recursos_Hidricos.pdf,
1461 Accessed on July, 2017.
- 1462 SAO PAULO STATE. Decree nº 8486, from September 08, 1976. Approving the regulations of the law
1463 nº 997/76, related to the prevention and control of the environmental pollution. (Available at
1464 <http://www.cetesb.sp.gov.br/userfiles/file/institucional/legislacao/dec-8468.pdf>, accessed on Nov.
1465 14, 2014).
- 1466 SCHYNS JF, HOEKSTRA AY. The Added Value of Water Footprint Assessment for National Water
1467 Policy: A Case Study for Morocco. *PLoS ONE* 9(6) e99705, 2014. doi:[10.1371/journal.pone.0099705](https://doi.org/10.1371/journal.pone.0099705).
- 1468 SHARP, R., TALLIS, H.T., RICKETTS, T., GUERRY, A.D., WOOD, S.A., CHAPLIN-KRAMER, R., NELSON, E.,
1469 ENNAANAY, D., WOLNY, S., OLWERO, N., VIGERSTOL, K., PENNINGTON, D., MENDOZA, G., AUKEMA,
1470 J., FOSTER, J., FORREST, J., CAMERON, D., ARKEMA, K., LONSDORF, E., KENNEDY, C., VERUTES, G.,
1471 KIM, C.K., GUANNEL, G., PAPPENFUS, M., TOFT, J., MARSIK, M., BERNHARDT, J., GRIFFIN, R.,
1472 GLOWINSKI, K., CHAUMONT, N., PERELMAN, A., LACAYO, M. MANDLE, L., HAMEL, P., VOGL, A.L.,
1473 ROGERS, L., AND BIERBOWER, W. InVEST +VERSION+ User's Guide. The Natural Capital Project,
1474 Stanford University, University of Minnesota, The Nature Conservancy, and World Wildlife Fund,
1475 2016.
- 1476 STUDINSKI, J. M., HARTMAN, K. J., NILES, J. M., & KEYSER, P. The effects of riparian forest disturbance
1477 on stream temperature, sedimentation, and morphology. *Hydrobiologia*, 686(1), 107-117, 2012.
- 1478 SWAT 2015 Conference Book of Abstracts, Purde, USA. 2015.
1479 <http://swat.tamu.edu/media/114933/swat-purdue-2015-book-of-abstracts.pdf>. Accessed on [2015-
1480 12-07].

1481 TACHIKAWA, T., HATO, M., KAKU, M., & IWASAKI, A. Characteristics of ASTER GDEM Version. In
1482 Geoscience and Remote Sensing Symposium (IGARSS) (pp. 3657–3660). Vancouver, Canada: IEEE
1483 International, 2011.

1484 TAFFARELLO, D., SAMPROGNA MOHOR, G., CALIJURI, M.C., & MENDIONDO, E. M. Field Investigations
1485 Of The 2013–14 Drought Through Quali-Quantitative Freshwater Monitoring At The Headwaters Of
1486 The Cantareira System, Brazil. *Water International*, 41(5), 776-800, 2016a., doi:
1487 [10.1080/02508060.2016.1188352](https://doi.org/10.1080/02508060.2016.1188352)

1488 TAFFARELLO, D., GUIMARÃES, J., LOMBARDI, R.K.S., CALIJURI, M.C., AND MENDIONDO, E.M.
1489 Hydrologic monitoring Plan of the Brazilian Water Producer/PCJ project, *Journal of Environmental
1490 Protection*, 7, 1956-1970, 2016b. Doi: 10.4236/jep.2016.712152.

1491 Taffarello, D, Calijuri, M C, Viani, R A G, Marengo, J A, Mendiondo, E M (2017) Hydrological
1492 services in the Atlantic Forest, Brazil: An ecosystem-based adaptation using ecohydrological
1493 monitoring, *Climate Services* 8:1-16, doi: [10.1016/j.cliser.2017.10.005](https://doi.org/10.1016/j.cliser.2017.10.005)

1494 THALER, S., ZEISSNER, M., DE LIS, F. B., KREUZINGER, N., & FEHRINGER, R. Considerations on
1495 methodological challenges for water footprint calculations. *Water Science and Technology*, 65(7),
1496 1258-1264, 2012.

1497 THARME, R.E. A global perspective on environmental flow assessment: emerging trends in the
1498 development and application of environmental flow methodologies for rivers. *River Research and
1499 Applications*, v.19, p.397-442, 2003.

1500 THE ECONOMIST. Drought in São Paulo. March 9th 2015. (Retrieved from
1501 <http://www.economist.com/blogs/graphicdetail/2015/03/sao-paulo-drought#comments>, accessed
1502 on March 9th, 2015.

1503 TUCCI, C. E., & CLARKE, R. T. Environmental issues in the la Plata basin. *International Journal of Water
1504 Resources Development*, 14(2), 157-173, 1998.

1505 UDAWATTA, R. P., GARRETT, H. E., & KALLENBACH, R. L. Agroforestry and grass buffer effects on
1506 water quality in grazed pastures. *Agroforestry Systems*, 79(1), 81-87, 2010.

1507 VEIGA NETO, F. C. A Construção dos Mercados de Serviços Ambientais e suas Implicações para o
1508 Desenvolvimento Sustentável no Brasil. (Constructing Environmental Service Markets and their
1509 implications for Sustainable Development in Brazil). Tese de Doutorado. CPDA – UFRRJ, 2008.

1510 VELÁZQUEZ, E.; MADRID, C.; BELTRÁN, M. Rethinking the Concepts of Virtual Water and Water
1511 Footprint in Relation to the Production–Consumption Binomial and the Water–Energy Nexus. *Water
1512 Resources Management*, v. 25, n. 2, p. 743-761, 2011.

1513 VOGL, A.; TALLIS, H.; DOUGLASS, J.; SHARP, R.; WOLNY, S.; VEIGA, F.; BENITEZ, S.; LEÓN, J.; GAME, E.;
1514 PETRY, P.; GUIMERÃES, J.; LOZANO, J.S. Resource Investment Optimization System: Introduction &
1515 Theoretical Documentation. May, 2016. 20p. Available at:
1516 <http://www.naturalcapitalproject.org/software/#rios>. Accessed on 2016-22-06.

1517 WADE, A. J., NEAL, C., BUTTERFIELD, D., & FUTTER, M. N. Assessing nitrogen dynamics in European
1518 ecosystems, integrating measurement and modelling conclusions. *Hydrol. Earth Syst. Sci. Discuss.*,
1519 8(4), 846-857, 2004.

1520 WHATELY, M., & LERER, R. Brazil drought: water rationing alone won't save Sao Paulo. *The Guardian*,
1521 2015. [http://www.theguardian.com/global-development-professionals-](http://www.theguardian.com/global-development-professionals-network/2015/feb/11/brazil-drought-ngo-alliance-50-ngos-saving-water-collapse)
1522 [network/2015/feb/11/brazil-drought-ngo-alliance-50-ngos-saving-water-collapse](http://www.theguardian.com/global-development-professionals-network/2015/feb/11/brazil-drought-ngo-alliance-50-ngos-saving-water-collapse).

1523 WICHELNS, D. Virtual water and water footprints do not provide helpful insight regarding
1524 international trade or water scarcity. *Ecological Indicators*, 52, 277-283, 2015.

1525 WINEMILLER, K. O., MCINTYRE, P. B., CASTELLO, L., FLUET-CHOUINARD, E., GIARRIZZO, T., NAM, S., ...
1526 & STIASSNY, M. L. J. Balancing hydropower and biodiversity in the Amazon, Congo, and Mekong.
1527 *Science*, 351(6269), 128-129, 2016.

1528 ZAFFANI, A. G., CRUZ, N. R., TAFFARELLO, D., & MENDIONDO, E. M. Uncertainties in the Generation
1529 of Pollutant Loads in the Context of Disaster Risk Management using Brazilian Nested Catchment
1530 Experiments under Progressive Change of Land Use and Land Cover. *J Phys Chem Biophys*, 5(173),
1531 2161-0398, 2015.

1532 ZHANG, Y.; SINGH, S.; BAKSHI, B.R. Accounting for ecosystem services in life cycle assessment, Part I:
1533 a critical review. *Environmental Science & Technology*, 44 (7), 2232-2242, 2010.

1534 ZUBRYCKI, K., DIMPLE ROY, D., VENEMA, H. & BROOKS, D. Water Security in Canada: Responsibilities
1535 of the federal government. International Institute for Sustainable Development, 2011.

1536 ZUFFO, A.C. Aprendizados das crises da água: O que faremos com eles? [Lessons learnt from water
1537 crises: What can we do about them?] Apresentação em Mesa Redonda no XXI Simposio Brasileiro de
1538 Recursos Hídricos. Brasília: 22-27 Nov., 2015.

1539

1540

1541

1542

1543

TABLES

Table 1: Sub-basins delimited in SWAT with drainage areas and geographic locations.

SWAT sub-basin	Gauge station	Field observations (2013-2014)	Modelling LULC/EbA scenarios	Drainage area (km ²)	Coordinates	
					Lat.	Long.
1	AltoJaguari	Yes	Yes	302.2	-22.820	-46.154
2	F23Basin	Yes	Yes	508.1	-22.827	-46.314
3	F28Basin	Yes	Yes	276.8	-22.806	-45.989
4	Salto Basin	Yes	Yes	15.0	-22.838	-46.218
5	Parquede Eventos	Yes	Yes	926.5	-22.853	-46.325
6	Posses Exut [*]	Yes	Yes	11.9	-22.833	-46.231
7	Portal das Estrelas	Yes	Yes	7.1	-22.820	-46.244
8	F25Basin	Yes	Yes	971.9	-22.850	-46.346
9	Domithildes[**]	Yes	Yes	9.9	-22.886	-46.222
10	Jaguari Basin	No	Yes	1037.0	-22.896	-46.385
11	F30 [*]	Yes	Yes	15.1	-22.935	-46.212
12	Ponte Cachoeira.	Yes	Yes	121.0	-22.967	-46.171
13	Chale Ponte Verde	Yes	Yes	107.9	-22.964	-46.181
14	Cachoeira dos Pretos	Yes	Yes	101.2	-22.968	-46.171

15	Jacarei Basin	No	Yes	200.5	- 22.959	-46.341
16	F24	Yes	Yes	293.5	- 22.983	-46.244
17	Cachoeira Basin	Yes	Yes	391.7	- 46.209	-46.276
18	F34 Basin	Yes	Yes	129.2	- 23.073	-46.209
19	Atibainha Basin	No	Yes	313.8	- 23.182	-46.342
20	Moinho [*]	Yes	Yes	16.9	- 23.209	-46.357

Legend: * indicates new data collection stations installed for experimental monitoring according to ANA/CPRM standards; ** indicates experimental stations for research purposes. Source: Taffarello et al (2016-a)

Table 2: Characteristics of quantitative calibration and validation of SWAT in studied catchments (Moriassi et al., 2007). Area delimited by Digital Terrain Model (adapted from Mohor, 2016):

Gauge station	Area (km ²)	Pbias(%)	NSE(-)	NSELog(-)	Validation		NSE Log(-)	Performance level of calibration and validation (Moriassi et al., 2007)
					Pbias(%)	NSE(-)		
Posses	13.3	-22.0	0.68	0.52	15.4	0.78	0.38	Unsatisfactory/very good
F28	281.5	5.3	0.80	0.68	14.2	0.72	0.31	Very good/good
F24	294.5	-13.3	0.69	0.71	-1.7	0.65	0.34	Satisfactory/satisfactory
Atibainha	331.7	-14.5	0.60	0.55	1.7	0.71	0.54	Satisfactory/good
Cachoeira	397.3	-26.6	0.49	0.31	-46.7	0.27	0.05	Unsatisfactory/unsatisfactory
F23	511.2	-1.8	0.88	0.90	12.0	0.84	0.77	Very good/ very good
F25B	981.4	3.6	0.91	0.89	11.4	0.77	0.72	Very good/ very good
Jag+Jac	1276.9	-12.0	0.83	0.87	-8.4	0.82	0.73	Very good/ very good

Table 3: Calibrated SWAT parameters in the headwaters of the Cantareira Water Supply System.

	Description	Parameter	Fitted values
Water Quantit y	Initial SCS curve number (moisture condition II) for runoff potential.	CN2	<0.25
	Soil evaporation compensation factor.	ESCO	<0.2
	Plant uptake compensation factor.	EPCO	<1.0
	Maximum canopy storage (mm).	CANMX	Varies by vegetal cover
	Manning's coefficient "n" value for the main channel.	CH_N2	0.025
Water Quality	Nitrate percolation coefficient	NPERCO	0.2
	Minimum value of the USLE C coefficient for water erosion related to the land cover	USLE_C	Varies by land use (< 0.4)

Comentado [UdW12]: Attending reviewer's comments, we moved this table to supplementary material of the paper, as Supplementary Table S.4

Comentado [UdW13]: Attending to comments of reviewer 1 and reviewer 2, table 5 was moved to Supplementary Material, as Supplement Table S.3

FIGURES

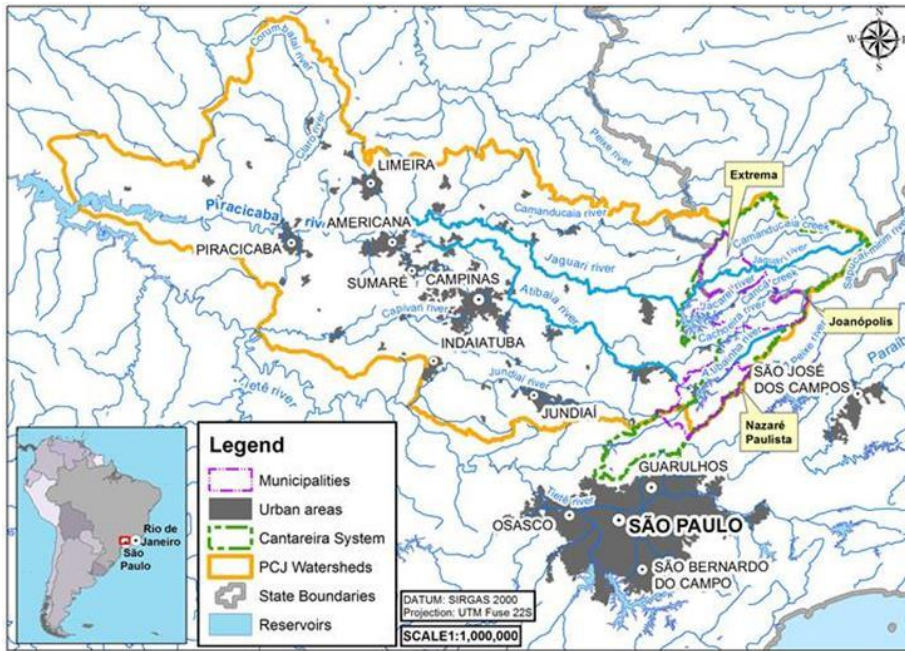


Figure 1: Location of Cantareira Water Supply System in the Piracicaba and Upper Tietê watersheds.

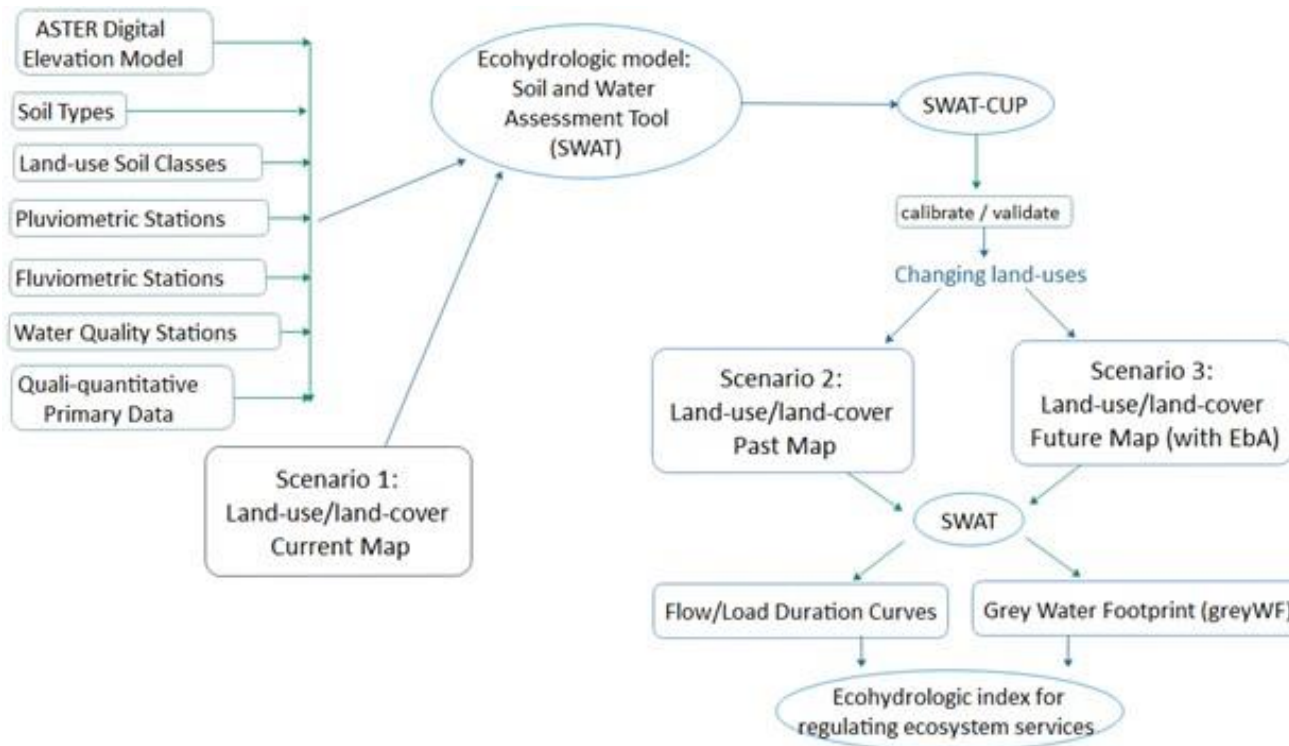


Figure 2: Methodological scheme for assessing hydrologic services based on greyWF.

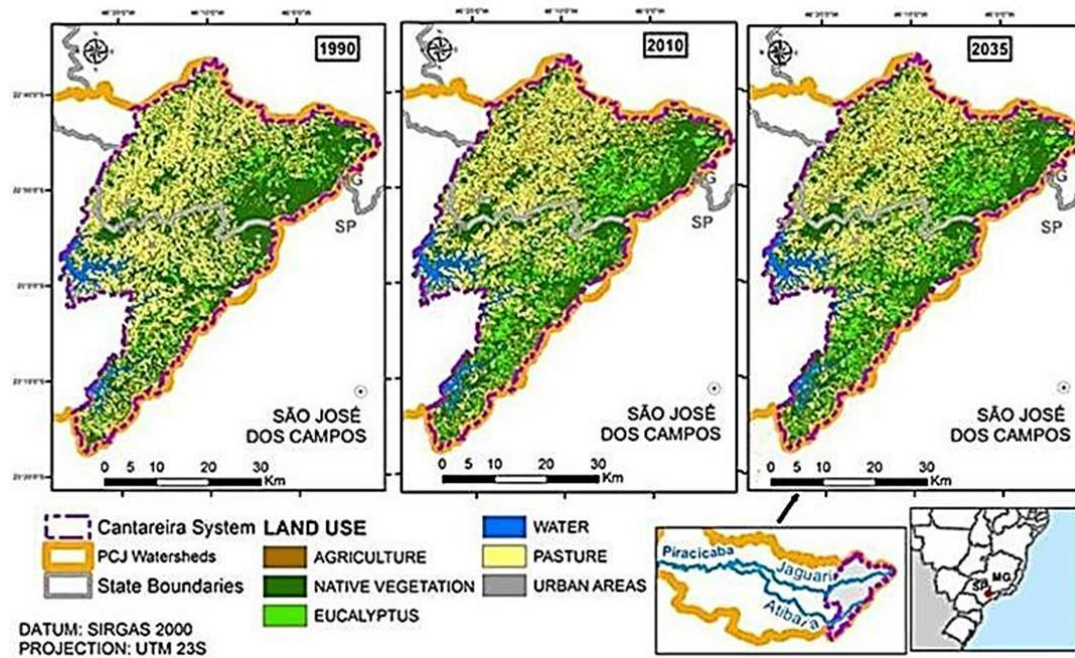


Figure 3: Land-use change during 1990 (Scenario S1), 2010 (Scenario S2) and 2035 (Scenario S2+EbA) in the headwaters of the Cantareira Water Supply System:

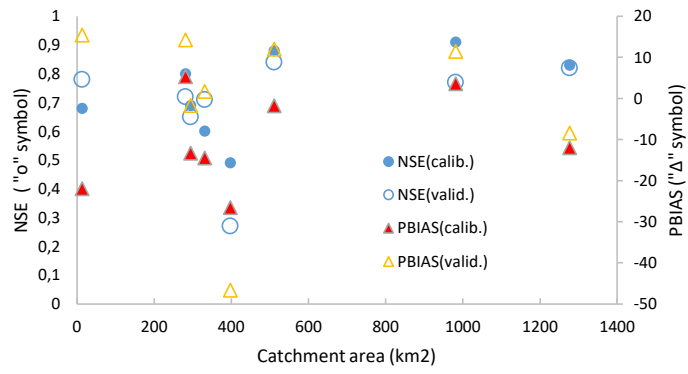


Figure 4: Model calibration related to drainage areas of catchments in the Cantareira System.

Comentado [UdW14]: Attending reviewer 1 comments, the previous figure was changed, retiring the trend lines and depicting PBIAS and NSE, during calibration and validation, for some of the 20 catchments simulated with SWAT.

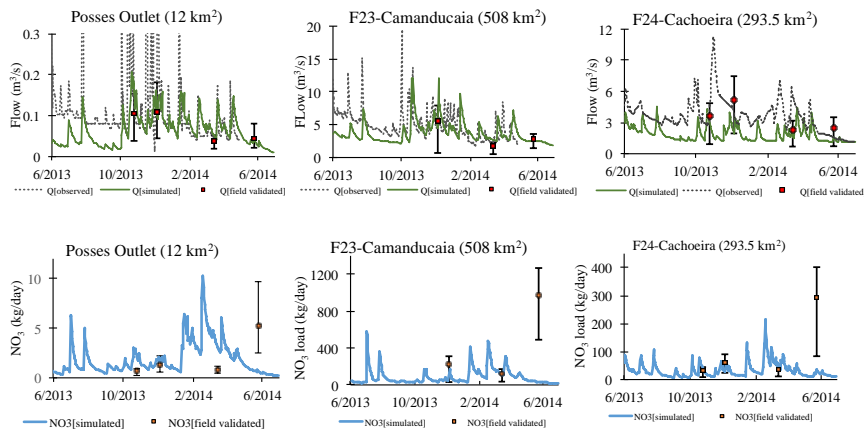


Figure 5: Comparison between flow discharges (upper part) and nitrate loads (lower part), through observed (dotted lines), simulated by SWAT (solid lines) and field validation through instantaneous experimental samples (marked points with uncertainty intervals) at monitored stations of *PosSES Outlet* (left part), *F23Camanducaia* (center part) and *F24-Cachoeira* (right part). The uncertainty bars were determined using instantaneous velocities measured in the river cross-sections during 2013/14 field campaigns (see Taffarelli et al, 2016-a). The uncertainty bars represent the minimum and maximum values of measured streamflow and pollutant loads in a cross section of the river during a field campaign of *headwater* catchments.

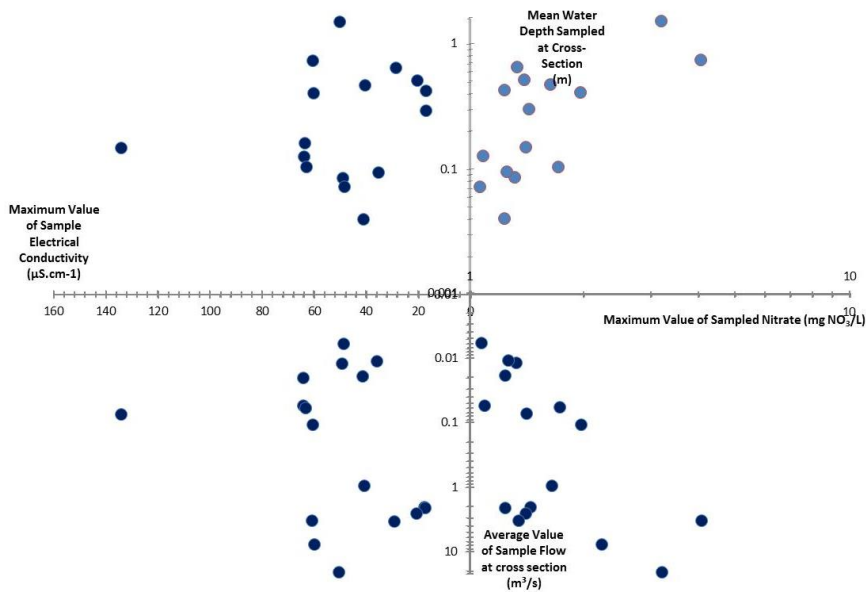


Figure 7: Multidimensional chart of hydraulic and water quality variables sampled in field campaigns in the headwaters of the Cantareira Water Supply System between Oct, 2013 - May, 2014.

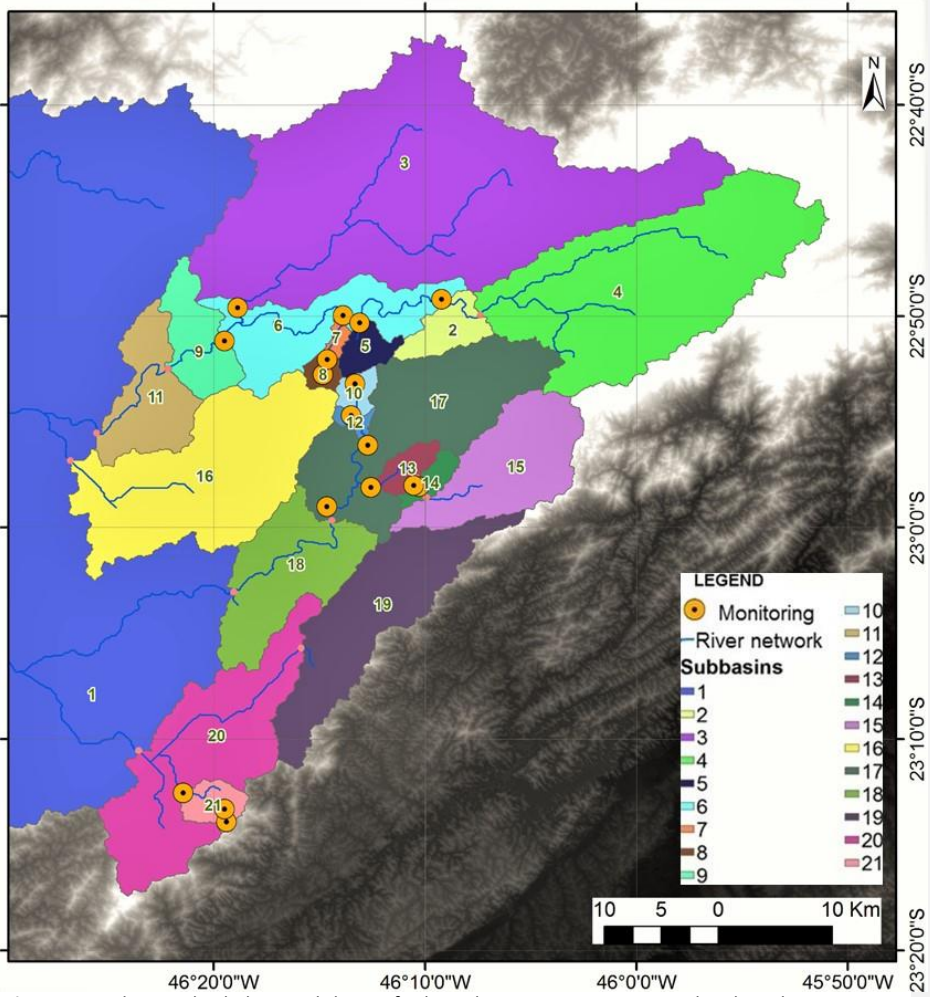


Figure 8: Study area divided into sub-basins for hypothesis testing using semi-distributed SWAT model.

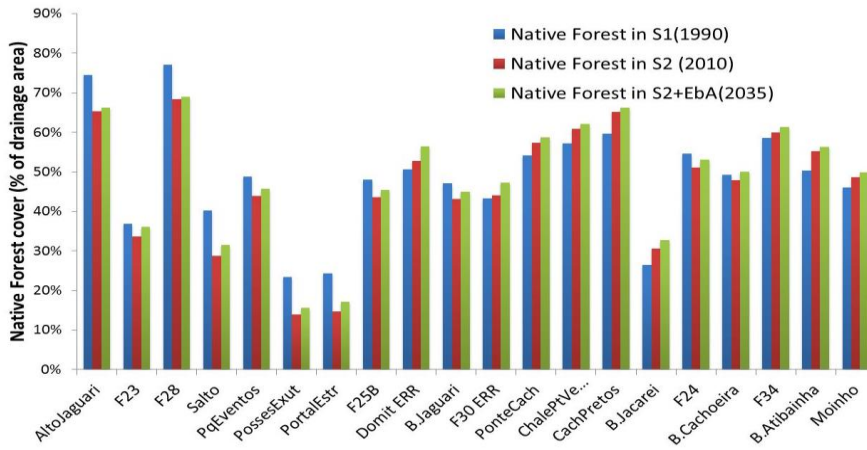


Figure 9: Native forest cover in S1 (1990), S2 (2010) and S2+EbA (2035).

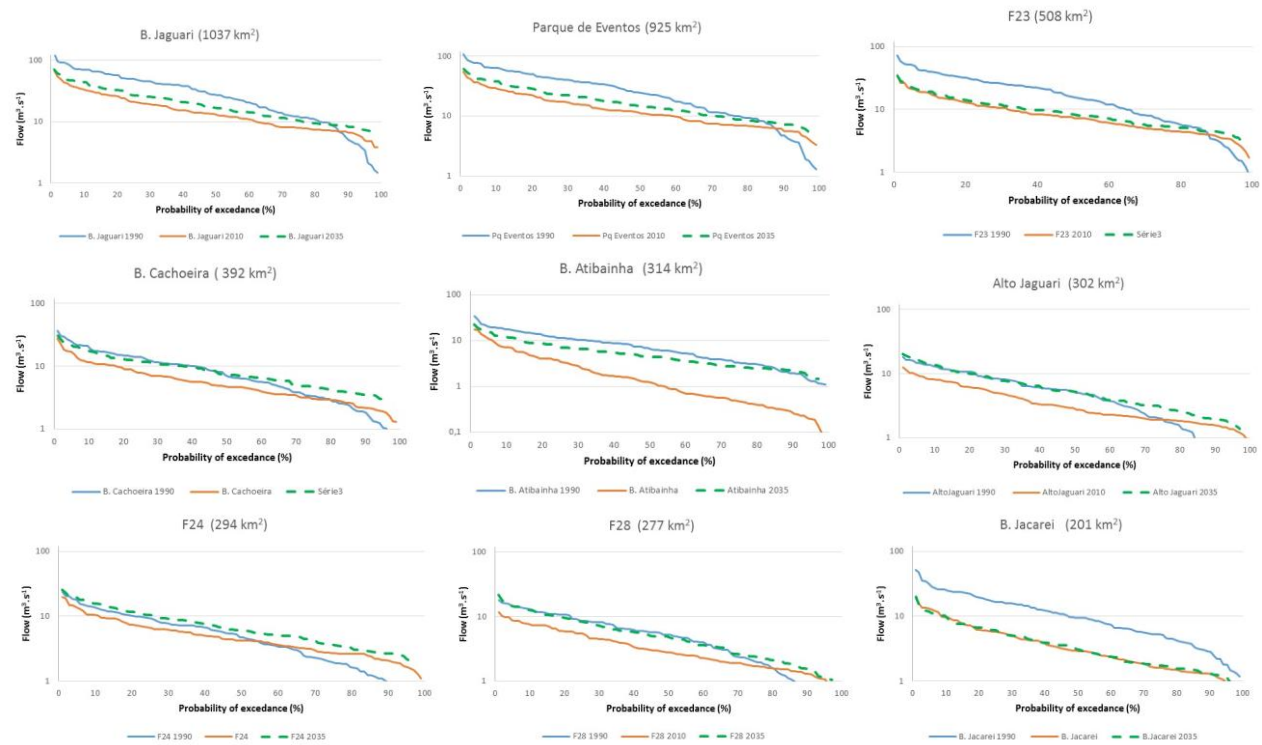


Figure 10: Flow duration curves under three LULC scenarios: S1(1990), S2(2010) and S2+EbA(2035) at headwaters of the Cantareira Water Supply System.

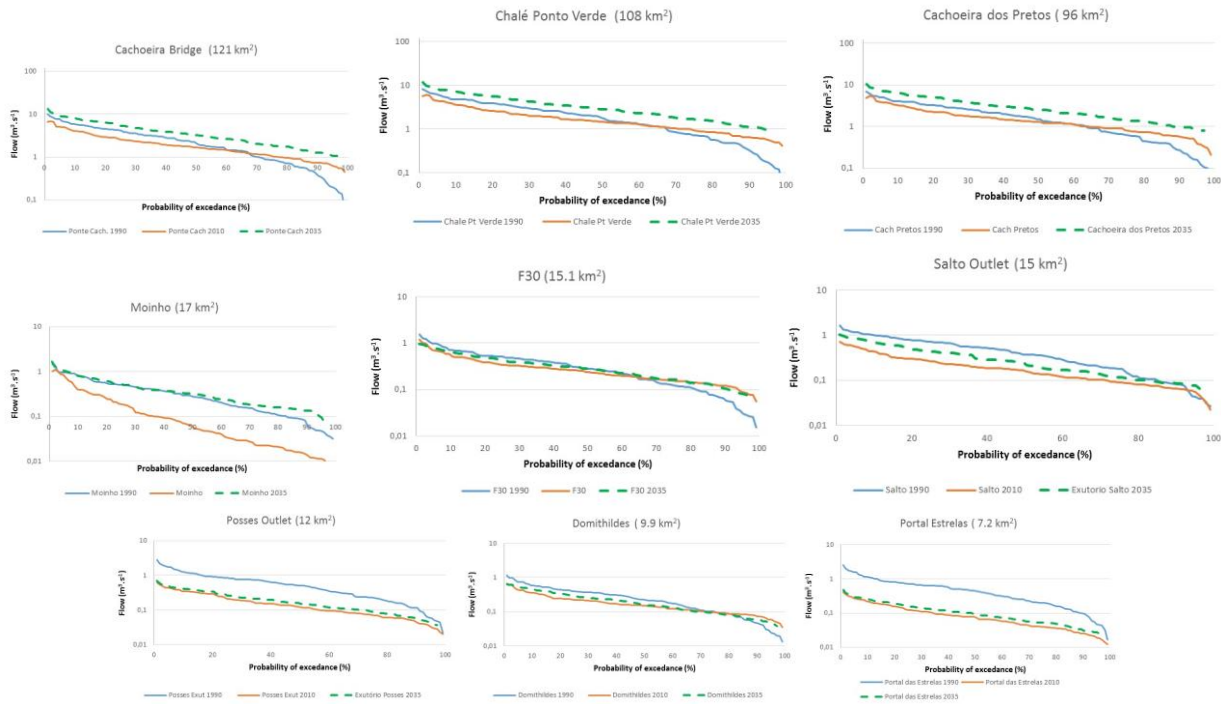


Figure 10: Flow duration curves under three LULC scenarios: S1(1990), S2(2010) and S2+EbA(2035) at headwaters of the Cantareira Water Supply System(cont.).

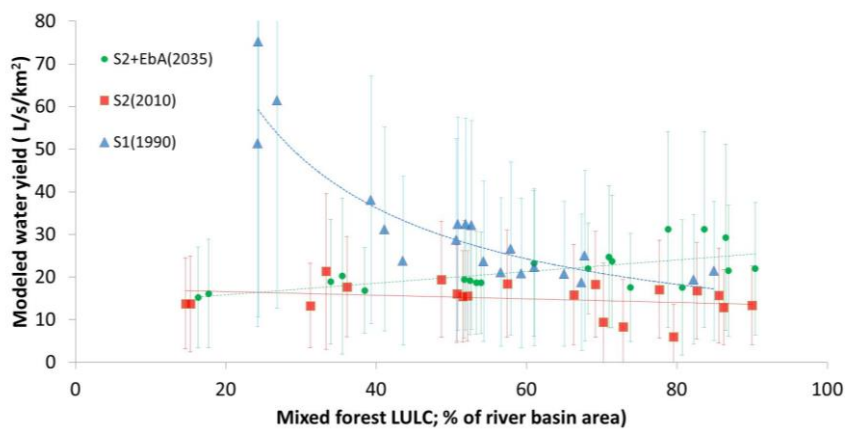
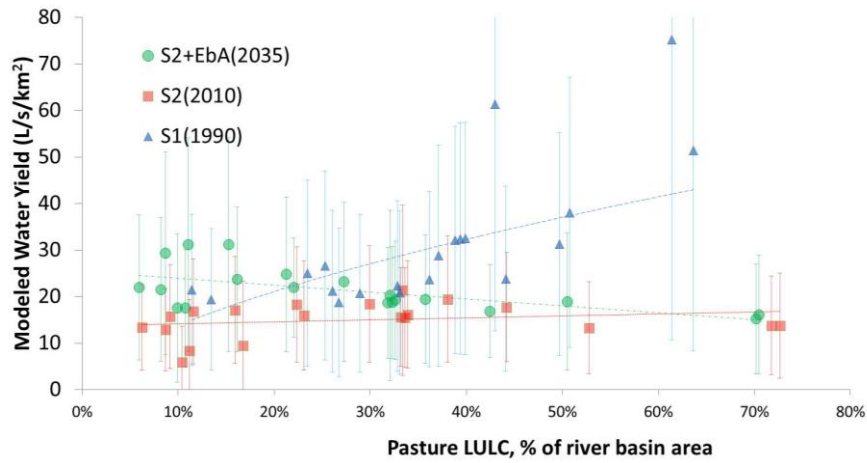


Figure 11: LULC scenarios for specific water yield for 20 drainage areas at Jaguari, Cachoeira and Atibainha watersheds, according to S1 (1990), S2 (2010) and S2+EbA (2035) scenarios.

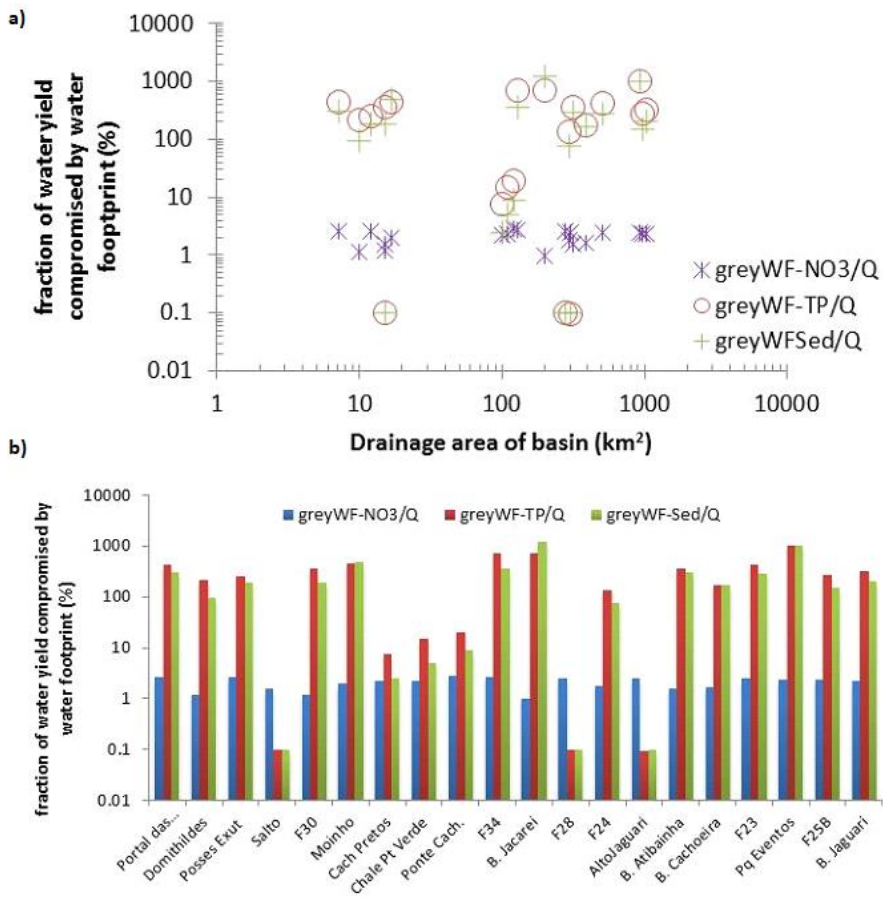


Figure 12: Fraction of water yield (mean Q) compromised by the grey water footprint of nitrate (GWF-NO3), total phosphorous (GWF-TP) and sediments(GWF-Sed) versus drainage area (a), and versus selected sub-basins (b).

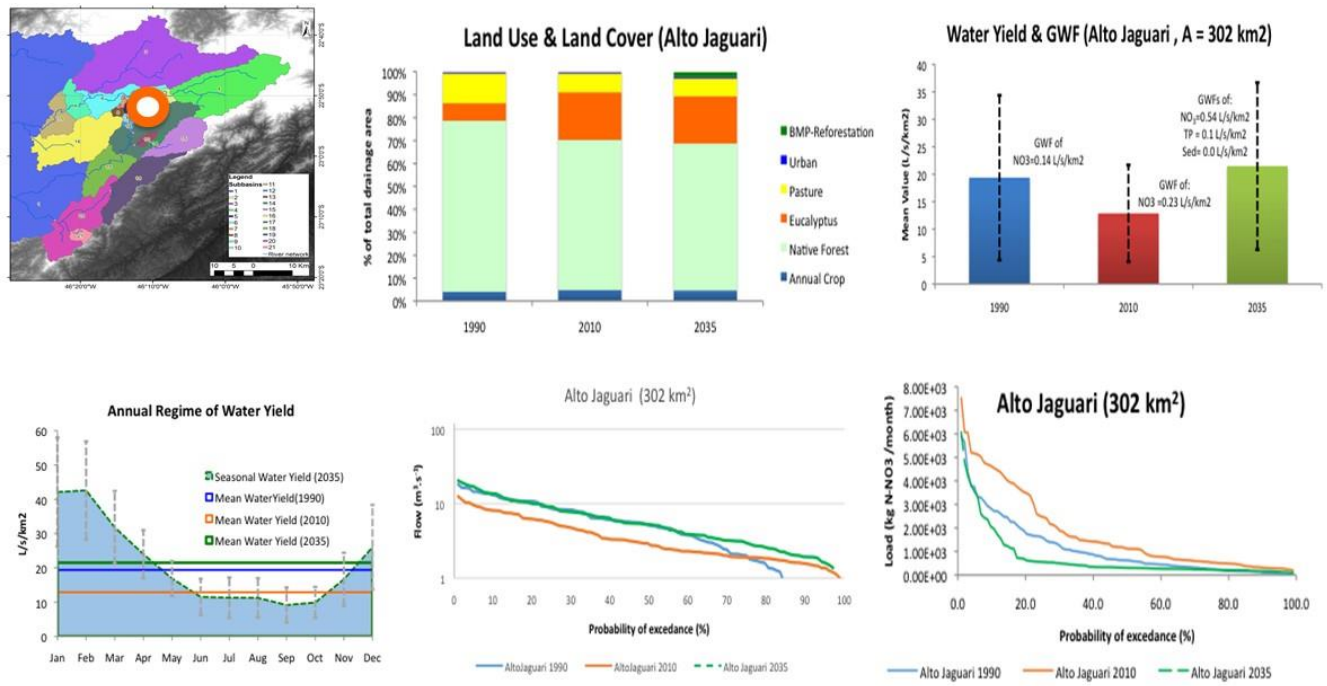


Figure 13: Synthesis chart of case study *Upper Jaguari* sub-basin (drainage area = 302 km²). Left, upper chart: localization at the drainage areas of Cantareira System; upper chart: LULC conditions for scenarios S1 (1990), S2 (2010) and S2+EbA (2035); Right, upper chart: comparison of water yields simulated for conditions of S1, S2 and S2+EbA; Left, lower chart: water yield scenarios compared with intra-annual regime of S2+EbA scenario; Center, lower chart: comparison of duration curves of flows for S1, S2 and S2+EbA conditions; Right, lower chart: duration curves of N-NO3 loads for S1, S2 and S2+EbA.

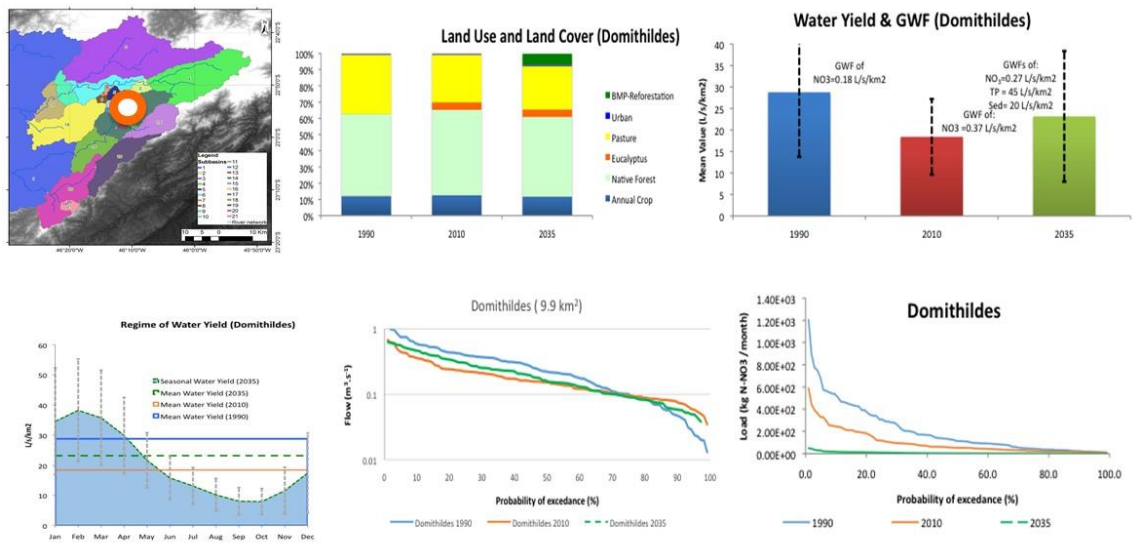


Figure 14: Synthesis chart of case study *Domithildes* catchment (drainage area = 9.9 km²). Left, upper chart: localization at the drainage areas of the Cantareira System: Center, upper chart: LULC conditions for scenarios S1 (1990), S2 (2010) and S2+EbA (2035): Right, upper chart: comparison of water yields simulated for conditions of S1, S2 and S2+EbA: Left, lower chart: water yield scenarios compared with intra-annual regime of S2+EbA scenario: Center, lower chart: comparison of duration curves of flows for S1, S2 and S2+EbA conditions: Right, lower chart: duration curves of N-NO3 loads for S1, S2 and S2+EbA.

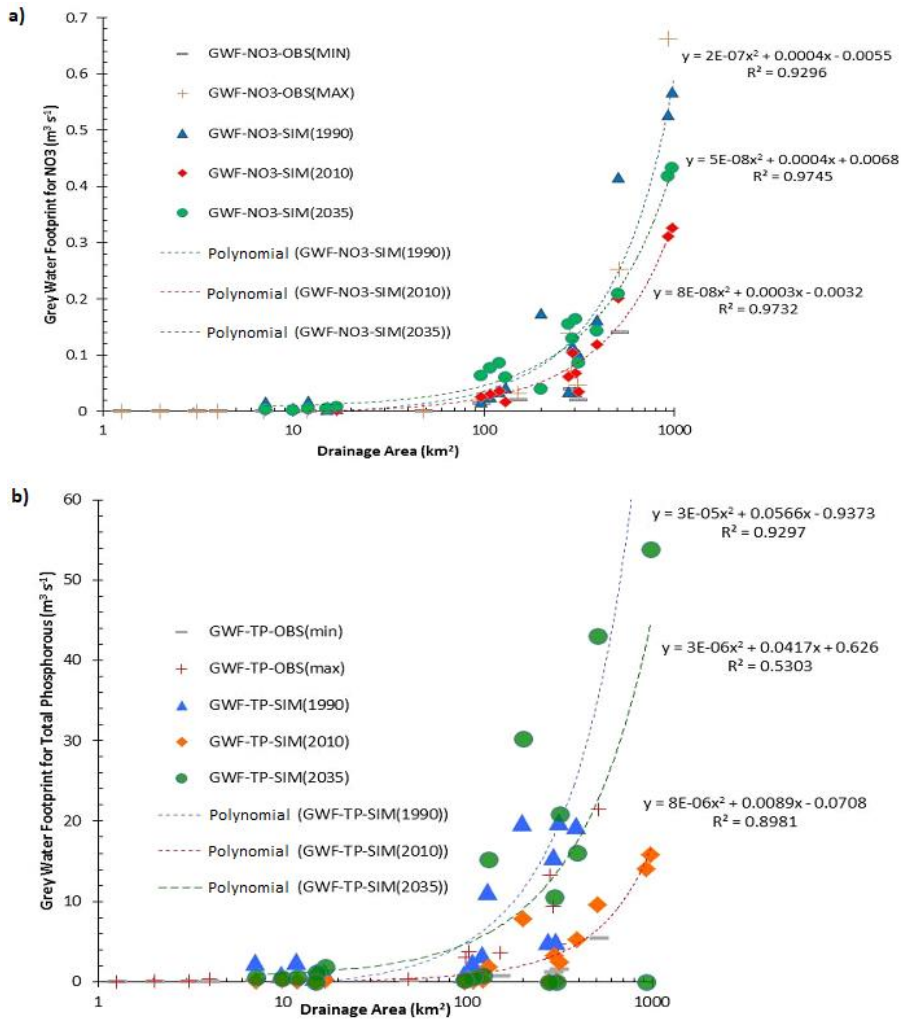


Figure 15: Relationships between Grey Water Footprint for Nitrate (a) and Total Phosphorous (b) according to three LULC scenarios (1990, 2010 and 2035) and size of the drainage areas of headwaters in the Cantareira Water Supply System.

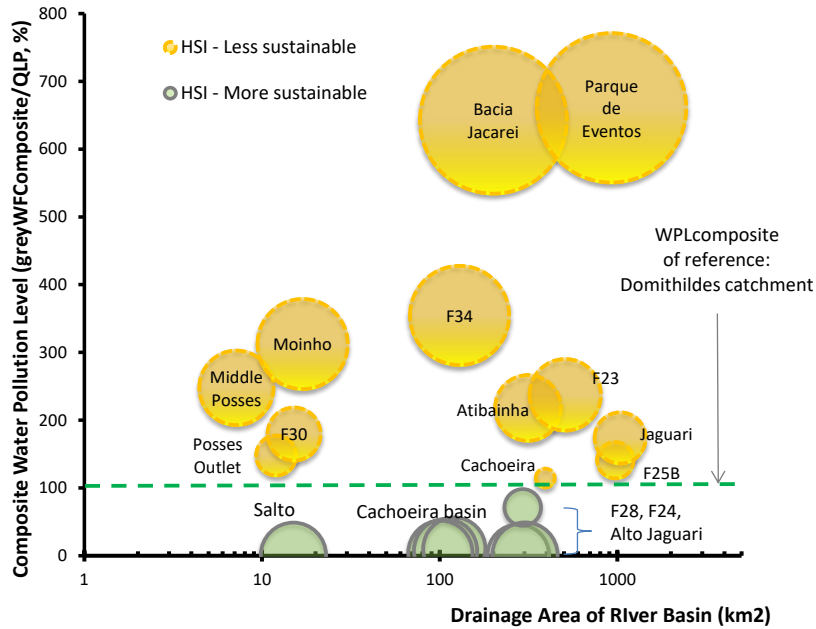


Figure 16: Hydrologic Service Index (circle ratio) related to drainage area of river basin (horizontal axis) and composite of water pollution index (vertical axis) for S2+EbA scenario: Equal weights of nitrate, total phosphorus and dissolved sediments are expressed in *WPLcomposite*.