

Authors' responds:

HESS-2017-85: Xu et al., Numerical modeling and sensitivity analysis of seawater intrusion in a dual-permeability coastal karst aquifer with conduit networks, Hydrol. Earth Syst. Sci. Discuss.,

5

Editor:

The paper has been revised, by including some information and comments, following the comments to the last version. Unfortunately, two basic scientific concerns remain.

10

1) About the use of a 2D model, I do not agree with the sentence at lines 280 to 281 ("The exchange fluxes... are ignored"). In particular, I cannot find a proof of this statement in the paper and I simply suggest to erase the sentence.

15

**Response: Erased. The paragraph of 2D model limitation has been rewritten.**

20

2) The weight appearing in equation (2) is "set as 1.0 equally for the 11 evaluated locations (column #25 to #75 with an interval of 5 cells) for salinity and head simulations in this study" (see lines 172 to 174). In other words the weight  $\omega_{i,i}$  for head simulations is  $1 \text{ m}^2$  and  $1 \text{ PSU}^2$ , respectively for head and salinity. I recall that head varies between 0 m and 1.52 m in the simulated domain, whereas salinity varies between 0 PSU and 35 PSU. Therefore the weight does not take into account the difference in measurement units and the variability of the two quantities. In other words, with this choice (same weight for head and salinity simulations) dss is not really "dimensionless", because it does not take into account the different measurement units and therefore the different numerical values of head and salinity. This choice must be physically-based and explained, otherwise the scientific merit of the paper will be significantly lowered.

25

30

**Response: We apologized for the unclear statement and any misunderstanding in the previous revision. We have carefully recalled our UCODE sensitivity analysis methodology and double-checked input files, since it has been done a while ago. Briefly speaking, the weights of head and salinity are not the same and computed by the error variances/standard deviations in this study.**

35

**In the previous revision, we would like to explain that the weights for the 11 evaluated locations from column #25 to #75 are equal, for head and salinity simulation, respectively. In fact, the weights of DSS for head and salinity simulations are computed by the inverse of error variances (square of error standard deviation) as  $\omega_{ii} = 1/\sigma^2$ . The values of error standard deviation used in this study are referenced from Shoemaker et al. (2004). The head measurement error was assumed to be normally distributed with a mean of zero and a standard deviation of  $\sim 0.003 \text{ m}$  (originally as 0.01 ft in the UCODE input files). The standard deviation was based on standard error estimates for water levels measured in wells by the USGS in southern Florida. The salinity measurement error was assumed to be normally distributed with a mean of zero and a standard deviation of  $\sim 0.1 \text{ PSU}$  ( $\text{kg/m}^3$ ). Salinity range from 3 to 35 PSU, and for this range using a 0.1 PSU**

40

45 standard deviation was thought to be appropriate based on discussion with USGS water  
quality personnel (Shoemaker et al., 2004).

50 We have revised the manuscript to clearly explain the weights calculations. The editor is  
right that different measurement units for head and salinity should be taken into account  
and have be addressed in the dimensionless scaled sensitivities computation.

A technical remark. I recall that SI measurement units should be used throughout the  
whole paper, whereas other units still appear somewhere in the text and in many figures.

55 Response: Thanks for pointing out this. We have changed the non-SI units in the figure  
captions and re-plot the figures.

60

**Deleted:** Reference: Shoemaker, W. B.: Important observations and parameters for a salt water intrusion model, *Ground Water*, 42, 829-840, 2004. .

**Numerical modeling and sensitivity analysis of seawater intrusion in a dual-permeability coastal karst aquifer with conduit networks**

65

Zexuan Xu<sup>1\*</sup>, Bill X. Hu<sup>2</sup> and Ming Ye<sup>3</sup>

<sup>1</sup>Climate and Ecosystem Sciences Division, Lawrence Berkeley National Laboratory,  
70 Berkeley, California, 94720, USA

<sup>2</sup>Institute of Groundwater and Earth Sciences, Jinan University, Guangzhou, Guangdong,  
China

<sup>3</sup>Department of Scientific Computing, Florida State University, Tallahassee, Florida,  
32306, USA

75 \*Corresponding author: email address: xuzexuan@gmail.com;

Submitted to Hydrology and Earth System Sciences

## Abstract

Long distance seawater intrusion has been widely observed through the subsurface conduit system in coastal karst aquifers as groundwater contaminant. In this study, seawater intrusion in dual-permeability karst aquifer with conduit networks is studied by a two-dimensional density-dependent flow and transport SEAWAT model. Local and global sensitivity analyses are used to evaluate the effects of boundary conditions and hydrological characteristics on modeling seawater intrusion in karst aquifer, including hydraulic conductivity, effective porosity, specific storage and dispersivity of the conduit network and of the porous medium. The local sensitivity evaluates the parameters sensitivities for modeling seawater intrusion specifically in the Woodville Karst Plain (WKP). The global sensitivity analysis provides a more comprehensive interpretation of parameter sensitivities, such as the non-linear relationship between simulations and parameters, and/or parameter interactions. The conduit parameters and boundary conditions are important to the simulations in the porous medium, because of the dynamical exchanges between the two systems. Therefore, salinity and head simulations in the karst features, such as the conduit system and submarine springs, are critical for understanding seawater intrusion in a coastal karst aquifer. In the continuum SEAWAT model, the sensitivity of hydraulic conductivity is not accurately evaluated, since the conduit flow velocity is not accurately calculated by Darcy's equation as a function of head difference and hydraulic conductivity. In addition, dispersivity is no longer an important parameter in advection-dominated karst aquifer with conduit system, compared to the sensitivity results in a porous medium aquifer. Finally, the extents of seawater intrusion are quantitatively evaluated and measured under

different scenarios by changing the important parameters identified from sensitivity results, including salinity at the submarine spring with rainfall recharge, sea level rise and longer simulation time under an extended low rainfall period.

110 Key Words: Seawater intrusion; Coastal karst aquifer; Variable-density numerical model;  
Dual-permeability karst system; Sensitivity analysis

## 1. Introduction

115 Many serious environmental issues have been caused by seawater intrusion in the coastal regions, such as soil salinization, marine and estuarine ecological changes, and groundwater contamination (Bear, 1999). Werner et al. (2013) pointed out that climate variations, groundwater pumping, and fluctuating sea levels are important factors to the mixing of seawater and freshwater in the aquifer. Custodio (1987) and Shoemaker (2004) summarized the control factors of seawater intrusion into a coastal aquifer, including the  
120 geologic and lithological heterogeneity, localized surface recharge, paleo-hydrogeological conditions and anthropogenic influences. Particularly, seawater intrusion in a coastal aquifer is significantly impacted by sea level rise, which has been recognized as a serious environmental threat in the 21st century (Voss and Souza, 1987; Bear, 1999; IPCC, 2007). In Ghyben-Herzberg relationship, a small rise of sea level would cause  
125 extended seawater intrusion, and significantly moves the mixing interface position further landward in a coastal aquifer (Werner and Simmons, 2009). For example, Essink et al. (2010) systematically studied the exacerbated seawater intrusion under sea level rise and global climate change. Likewise, high tides associated with hurricanes or tropical storms

have been found to temporarily affect the extent of seawater intrusion in a coastal aquifer  
130 (Moore and Wilson, 2005; Wilson et al., 2011).

Modeling seawater intrusion in a coastal aquifer requires a coupled density-  
dependent flow and salt transport groundwater model. The simulated salinity is computed  
by the groundwater velocity field from flow modeling, and salinity in turn determines  
water density and affects the simulation of flow field. Several variable-density numerical  
135 models have been developed and widely used to study seawater intrusion, including  
SUTRA (Voss and Provost, 1984) and FEFLOW (Diersch, 2002). SEAWAT is a widely  
used density-dependent model, which solves flow equations by finite difference method,  
and transport equations by three major classes of numerical techniques (Guo and  
Langevin, 2002; Langevin et al., 2003). Generally speaking, most variable-density  
140 models are numerically complicated and computational expensive, which require smaller  
timestep and implicit procedure for solving flow and transport equations iteratively many  
times in each timestep (Werner et al., 2013).

On the other hand, a karst aquifer is particularly vulnerable to groundwater  
contamination including seawater intrusion in a coastal region, since sinkholes and karst  
145 windows are usually connected by well-developed subsurface conduit networks. Some  
karst caves are found open to the sea and become submarine springs below the sea level,  
connected with the conduit network as natural pathways for seawater intrusion. Fleury et  
al. (2007) reviewed the studies of freshwater discharge and seawater intrusion through  
karst conduits and submarine springs in coastal karst aquifers, and summarized the  
150 important control factors, including hydraulic gradient of equivalent freshwater head,  
hydraulic conductivity, and seasonal precipitation variation. For example, seawater

intrudes through the conduit network as preferential flow and contaminates the fresh groundwater resources in a coastal karst aquifer (Calvache and Pulido-Bosch, 1997). As an indicator of rainfall and regional freshwater recharges, salinity at the outlet of conduit system is diluted by freshwater discharge during a rainfall season, but remains constant as saline water during a low rainfall period (Martin and Dean, 2001; Martin et al., 2012).

Modeling groundwater flow in a dual-permeability karst aquifer is a challenging issue since groundwater flow in a karst conduit system is often non-laminar (Davis, 1996; Shoemaker et al., 2008; Gallegos et al., 2013). Several discrete-continuum numerical models, such as MODFLOW-CFPM1 (Shoemaker et al., 2008) and CFPv2 (Reimann et al., 2014; Reimann et al., 2013; Xu et al., 2015a; Xu et al., 2015b), have been developed to simultaneously solve the non-laminar flow in the conduit, the Darcian flow in a porous medium and the exchanges between the two systems. However, these constant-density karst models have limitations in simulating the density-dependent seawater intrusion processes in a coastal aquifer. The VDFST-CFP, developed by Xu and Hu (2017), is based on a density-dependent discrete-continuum modeling approach to study seawater intrusion in a coastal karst aquifer with conduits. However, VDFST-CFP is not able to simulate the seawater intrusion processes addressed in this study due to the computational constraints and the numerical method limitations associated with the aquifer geometry and the domain scale. Therefore, the variable-density SEAWAT model is still applied in this study, in which Darcy's equation is used to compute flow not only in the porous medium, but also in the conduit with large values of hydraulic conductivity and effective porosity.

Since simulating seawater intrusion in karst aquifer is challenging, sensitivities  
175 analysis is important to provide guideline for understanding the hydrology model, data  
collection and groundwater resources management. Several sensitivity studies have  
evaluated the parameters in karst aquifers. Kaufmann and Braun (2000) reported that  
boundary conditions and sink recharges are important to the preferential flow path in a  
karst aquifer. Scanlon et al. (2003) also confirmed that recharge is important to karst  
180 spring discharge. Regional sensitivity analysis (RSA) has been widely used to show that  
relationship of karst spring discharge with different hydrological processes in a local  
karst catchment (Chang et al., 2017). Chen et al. (2017) and Hartmann et al. (2015)  
applied Sobol's global sensitivity method to evaluate parameters using different objective  
functions under different hydrodynamic conditions. However, very few studies have  
185 addressed the parameter sensitivities of seawater intrusion in a coastal karst aquifer.  
Shoemaker (2004) performed a sensitivity analysis of the SEAWAT model for seawater  
intrusion to a homogeneous porous aquifer, concluded that dispersivity is an important  
parameter to the head, salinity and groundwater flow simulations and observations in the  
transition zone. Shoemaker (2004) also concluded that salinity observations are more  
190 effective than head observations, and head and salinity simulations and observations are  
more sensitive to parameters at the "toe" of the transition zone. The sensitivity results in  
this study confirm some conclusions in Shoemaker (2004), and highlight the significance  
of conduit network on seawater intrusion in a coastal karst aquifer with interaction  
between a karst conduit and a porous medium.

195 The parameter sensitivities are evaluated to address the impacts of the two major  
challenges in this study, as the density-dependent flow and transport coupled seawater



intrusion processes, and the dual-permeability karst system. This study aims to strengthen the understanding of the roles of model parameters and boundary conditions in simulating seawater intrusion in the coastal karst region. To our knowledge, this is the first attempt  
200 to assess the parameter sensitivities for seawater intrusion to a vulnerable dual-permeability karst aquifer. The rest of the paper is arranged as follows: the details of local and global sensitivity analysis methods are introduced in Sect. 2. The model setup, hydrological conditions, model discretization, initial and boundary conditions are discussed in Sect. 3. The results of local and global sensitivity analysis are discussed in  
205 Sect. 4. The scenarios of seawater intrusion simulation with different boundary conditions and simulation time are presented in Sect. 5. The conclusions are made in Sect. 6.

## 2. Methods

210 The governing equations used in the SEAWAT model can be found in the Guo  
and Langevin (2002), including the variable-density flow equation with additional  
density terms, and the advection-dispersion solute transport equation. The local and  
global sensitivity methods used in this study are briefly introduced below. Note that the  
sensitivity analysis does not necessarily need field observations, but only evaluates the  
215 model simulations with respect to parameters instead. Field observational data, especially  
head and salinity measurements in the conduit, are seldom available considering the  
difficulties of sensor installation in the deep subsurface conduit network. Model  
calibration is beyond the scope of this study, due to the lack of observational data in the  
Woodville Karst Plain (WKP).

220

### 2.1 Local sensitivity analysis

In this study, UCODE\_2005 (Poeter and Hill, 1998) is used in the local sensitivity  
analysis to evaluate the derivatives of model simulations with respect to parameters at the  
specified values (Hill and Tiedeman, 2006). The forward difference approximation of  
225 sensitivity is calculated as the derivative of the  $i$ th simulation respect to the  $j$ th model  
parameters,

$$\left. \frac{\partial y'_i}{\partial x_j} \right|_b \approx \frac{y'_i(x + \Delta x) - y'_i(x)}{\Delta x_j} \quad 1)$$

where  $y'_i$  is the value of the  $i$ th simulation;  $x_j$  is the  $j$ th estimated parameter;  $x$  is a vector  
of the specified values of estimated parameter;  $\Delta x$  is a vector of zeros except that the  $j$ th  
parameter equals  $\Delta x_j$ .

230 Since parameters can have different units, scaled sensitivities are used to compare  
 the parameter sensitivities. In UCODE\_2005, a scaling method is used to calculate the  
 dimensionless scaled sensitivities (DSS) by the following equation,

$$dss_{ij} = \left( \frac{\partial y'_i}{\partial x_j} \right) \bigg|_x | \omega_{ii} |^{1/2} \quad 2)$$

235 where  $dss_{ij}$  is the dimensionless scaled sensitivity of the  $i$ th simulation with respect to  
 the  $j$ th parameter;  $\omega_{ii}$  is the weight of the  $i$ th simulation, are computed by the inverse of  
 error variances (square of error standard deviation) as  $\omega_{ii} = 1/\sigma^2$ . The values of error  
 standard deviation used in this study are referenced from Shoemaker et al. (2004). The  
 head measurement error was assumed to be normally distributed with a mean of zero and  
 a standard deviation of ~0.003 m. The standard deviation was based on standard error  
 estimates for water levels measured in wells by the USGS in Florida. The salinity  
 measurement error was assumed to be normally distributed with a mean of zero and a  
 standard deviation of ~0.1 PSU. Shoemaker et al. (2004) believed that a 0.1 PSU standard  
 deviation was thought to be appropriate for salinity range from 3 to 35 PSU. In this study,  
 the 11 evaluated locations (column #25 to #75 with an interval of 5 cells) have the same  
 weights for each simulation, as head and salinity in this study.

245 The DSS values of different simulations with respect to each parameter are  
 accumulated as the composite scaled sensitivities (CSS), which reflect the total amount of  
 information provided by simulation for the estimation of one parameter. The CSS of the  
 $j$ th parameter is evaluated via:

$$css_j = \sum_{i=1}^{ND} \left[ (dss_{ij})^2 |_{x/ND} \right]^{1/2} \quad 3)$$

Formatted Table

Formatted: Font:Not Bold

Formatted: Font:Not Bold

Formatted: Heading 2

Formatted: Font:Not Bold

Deleted: set as 1.0 equally for the 11 evaluated locations

Formatted: Font:Not Bold

Formatted: Font:Not Bold

Formatted: Font:Not Bold, Font color: Text 1

Formatted: Font:Not Bold

Formatted: Font:Not Bold

Formatted: Font:Not Bold, Font color: Text 1

Formatted: Font:Not Bold

Formatted: Font:Not Bold, Font color: Text 1

Deleted: (column #25 to #75 with an interval of 5 cells) for salinity and head simulations in this study.

Formatted: Font:Not Bold

where  $ND$  is the number of simulated quantities, as the head and salinity simulations in this study.

## 255 2.2 Morris method for global sensitivity analysis

The local sensitivity analysis is conceptually straightforward and easy to perform without expensive computational cost, however, only calculates the parameter sensitivities at one specified value for each parameter instead of the ranges. In addition, the local sensitivity indices are based on the first order derivative only, assuming a linear relationship of simulated quantities with respect to parameters.

The global sensitivity analysis evaluates the non-linear relationship of parameters with simulations, and/or involved in interaction with other factors. Morris method is applied in this study to evaluate the global parameter sensitivities (Morris, 1991). The design of Morris method is made by individually randomized “one-step-at-a-time” (OAT) experiment, which perturbs only one input parameter and computes a new simulated output in each run. The Morris method is composed of a number  $r$  of local changes at different points of the possible range values. In each parameter, a discrete number of values called levels are chosen within the parameter ranges.

In Morris method, the  $k$ -dimensional vector  $x$  of the model parameters has components  $x_i$  to be divided into  $p$  uniform intervals. The global parameter sensitivity is evaluated from the difference of simulation results by changing one parameter at a time, which is called an elementary effect ( $EE$ ),  $d_i$ , defined as,

$$d_i = \frac{1}{\tau_y} \frac{[y(x_1^*, \dots, x_{i-1}^*, x_i^* + \Delta, x_{i+1}^*, \dots, x_k^*) - y(x_1^*, \dots, x_k^*)]}{\Delta} \quad 4)$$

where  $\Delta$  is the relative distance in the parameter coordinate;  $\tau_y$  is the output scaling factor;  $\{x_i^*\}$  is the parameter set selected in a sampling method.

275 To compute the EE for the  $k$  parameters,  $(k+1)$  simulations will run with perturbation of each parameter, which is called one “path” (Saltelli et al., 2004). An ensemble of EEs is generated with multiple paths of parameter set. The total number of model run is  $r(k+1)$ , where  $r$  is the number of paths.

280 Two sensitivity measures are proposed by Morris method to approximate parameter sensitivities: the mean  $\mu$  estimates the overall influence of the factor on the output, and the standard deviation  $\sigma$  estimates the non-linear effect between input and output, and/or the parameter interactions (Saltelli et al., 2004). The mean  $\mu$  and standard deviation  $\sigma$  of the EEs are evaluated with the  $r$  independent paths in the Morris method,

$$\mu = \sum_{i=1}^r d_i / r \quad 5)$$

$$\sigma = \sqrt{\sum_{i=1}^r (d_i - \mu)^2 / r} \quad 6)$$

In this study, the EEs for the method of Morris are not generated by Monte Carlo  
285 random sampling, which usually needs extremely large numbers ( $>250$ ) of paths for the 11 parameters in this study and takes a very long time to complete sensitivity computation without parallelization. To save the running time and computational cost, the more efficient trajectory sampling is developed by Saltelli et al. (2004), which becomes a widely-used method to generate the ensemble of EEs for Morris method but  
290 ensure the confidence of global sensitivity results. In trajectory method, the choice of

parameter  $p$  is usually even, and  $\Delta$  equals to  $\pm p/[2(p-1)]$ , either positive or negative. The trajectory method starts by randomly selecting a “seed” value  $x^*$  for the vector  $x$ . Each component  $x_i$  of  $x^*$  is randomly sampled from the set  $(0, 1/(p-1), 2/(p-1), \dots, 1)$ . The randomly selected vector  $x^*$  is used to generate the other sampling points but not one  
 295 of them, which means that the model is never evaluated at vector  $x^*$ . The first sampling point,  $x^{(1)}$ , is obtained by changing one or more components of  $x^*$  by  $\Delta$ . The second sampling point,  $x^{(2)}$ , is generated from  $x^*$  but differs from  $x^{(1)}$  in its  $i$ th component that has been either increased or decreased by  $\Delta$ , but conditioned on the domain, and the index  $i$  is randomly selected in the set  $\{1, 2, \dots, k\}$ . In other word,  $x^{(2)} = (x_1^{(1)}, \dots, x_{i-1}^{(1)}, x_i^{(1)} \pm \Delta, x_{i+1}^{(1)}, \dots, x_k^{(1)})$ . The third sampling point,  $x^{(3)}$ , differs from  $x^{(2)}$  for only one component  
 300  $j$ , for any  $j \neq i$ , will be  $x_j^{(3)} = x_j^{(2)} \pm \Delta$ . A succession of  $(k+1)$  sampling points  $x^{(1)}, x^{(2)}, \dots, x^{(k+1)}$  is produced in the input parameters space called a trajectory, with the key characteristic that two consecutive points differ in only one component. Note that the choice of components  $x^*$  to be increased or decreased is conditioned on that  $x_i$  still being  
 305 within the domain. In the trajectory sampling, any component  $i$  of the “base” vector  $x^*$  has been selected at least once by  $\Delta$  in order to calculate one EE for each parameter.

Once a trajectory has been constructed and evaluated by Morris method, an EE for each parameter  $i$ ,  $i = 1, \dots, k$ , can be computed. If  $x^{(l)}$  and  $x^{(l+1)}$ , with  $l$  in the set in  $(1, \dots, k)$ , are two sampling points differing in their  $i$ th component, the EEs associated  
 310 with the parameter  $i$  is computed as,

$$d_i(x^{(l)}) = \frac{[y(x^{(l+1)}) - y(x^{(l)})]}{\Delta} \quad 7)$$

A random ensemble of  $r$  EEs is pre-selected at the beginning of sampling, but the starting point of each trajectory sampling is also randomly generated. In other words, the points belonging to the same trajectory are not independent, but the  $r$  points sampled from each distribution belonging to different trajectories are independent.

315

### **3. Model development**

#### **3.1 Study site**

The numerical model developed in this paper is based on the parameter values of porous medium and conduit measured in the aquifer at the Woodville Karst Plain (WKP).

320 The Spring Creek Springs (SCS) is a system consisting of 14 submarine springs located in the Gulf of Mexico (Fig. 1). SCS is an outlet of the subsurface conduit network and the entrance of seawater intrusion, exactly located at the shoreline beneath the sea level.

Davis and Verdi (2014) described a groundwater cycling conceptual model to explain the hydrogeological conditions in the WKP. In this conceptual model of seawater and

325 freshwater interaction, seawater intrudes through subsurface conduit networks during low precipitation periods, while rainfall recharge dilutes and pushes the intruded seawater out from the submarine spring during high rainfall periods, usually after a heavy storm event.

Later on, the conceptual model is quantitatively simulated by a constant-density CFPv2 numerical model in Xu et al. (2015b). Tracer test studies and cave diving investigations

330 indicate that the conduit system starts from the submarine spring and extends 18 km landward connecting with an inland spring called Wakulla Spring, although the exact locations of the subsurface conduits are unknown and difficult to explore (Kernagis et al., 2008; Kincaid and Werner, 2008). Evidence shows that seawater intrusion has been

observed through subsurface conduit system for more than 18 km in the WKP (Xu et al.,  
335 2016). In addition, Davis and Verdi (2014) also point out that sea level rise at the Gulf of  
Mexico in the 20th century could be a reason for increasing discharge at an inland karst  
spring (Wakulla Spring) and decreasing discharge at SCS, when the hydraulic gradient  
between the two springs is directed towards the Gulf.

(Insert Fig. 1 here)

340 In this study, a two-dimensional SEAWAT model is set up to simulate seawater  
intrusion via the SCS through the major subsurface conduit network in the WKP (Fig. 1).  
Figure 2 presents the cross section schematic figure in a coastal karst aquifer with a  
conduit network and a submarine spring opening to the sea. The model spatial domain is  
not a straight line from the SCS to Wakulla Spring, but the cross section along the major  
345 conduit pathway of seawater intrusion between the two springs. The conduit geometry in  
the model is set as 18-km long and 91-meter deep with the height of 10 meters in the  
horizontal part, and the width of 50 meters in the vertical part.

(Insert Fig. 2 here)

The 2D model has some limitations on simulating seawater intrusion in the entire  
350 aquifer, usually assuming that the quantities are constant parallel to the shoreline. The  
simulation of seawater intrusion in the direction that perpendicular to the cross section  
and 3D flow and transport in the porous matrix are ignored and beyond the scope of this  
study. However, most SEAWAT models are setup for two-dimensional cross section with  
finer-resolution vertical discretization. Note that this study only aims to evaluate the  
355 parameter sensitivities and simulate seawater intrusion within the vertical cross section of  
karst conduit in the aquifer, including flow and transport through the conduit network,

**Deleted:** The exchange fluxes between the two systems might be underestimated in this study, since the flow and transport in the horizontal direction are ignored.

**Deleted:** This

**Deleted:** on modeling seawater intrusion

**Deleted:** in the coastal karst aquifer



365 salinity plume in the porous medium and the exchanges between the two systems. In addition, the 2D assumption is reasonable in the study site since relatively large hydraulic conductivity layers are found at nearly the same depth as the conduit network (Werner, 2001). The permeable layers indicate the possibility of large extension of conduit network parallel to the shoreline, although no direct evidence has been found.

**Deleted:** are simulated within the vertical cross section

**Deleted:** , although the conduit network does not have a large extension

### 3.2 Hydrological parameters

370 Table 1 presents the hydrological parameter values of the Upper Floridan Aquifer (UFA) in the WKP and boundary conditions used in the model. These parameters have been calibrated in the regional-scale groundwater flow and solute transport models by Davis et al. (2010), and then been applied in many previous modeling studies (Gallegos et al., 2013; Xu et al., 2015a; Xu et al., 2015b). It should be pointed out that model  
375 calibration has not been conducted in this study, since the head and salinity observational field data are insufficient particularly in the conduit, considering the difficulties of monitoring devices installation in the subsurface conduit. The parameter values in Table 1 are evaluated in the following local sensitivity analysis and then applied in the seawater intrusion scenarios in Sect. 5.

380 (Insert Table 1 here)

The values of hydrological parameters (hydraulic conductivity, specific storage and effective porosity) in the conduit are generally greater than those of surrounding porous medium. Hydraulic conductivity of the porous medium is assigned as 2286 m/day, and as large as 610,000 m/day for the conduit system. Note that even the hydraulic  
385 conductivity of porous medium in the study region is larger than most alluvial aquifers,

due to numerous small fractures and relatively large pores existed in the karst aquifer  
390 associated with the dissolution of carbonate rocks. Specific storage and effective porosity  
in the porous medium are assumed as  $5 \times 10^{-7}$  and 0.003, respectively. Specific storage  
and effective porosity are 0.005 and 0.300 in the conduit layer, respectively. The  
longitudinal dispersivity is estimated as 10 m in the porous medium, but is assumed a  
very small value (0.3 m) in the conduit, because advection is dominating and dispersion  
395 is negligible in the solution of transport in the conduit.

### 3.3 Spatial and temporal discretization

The grid discretization and boundary conditions of the two-dimensional  
SEAWAT numerical model are shown in Fig. 3, with 140 columns and 37 layers in the  
400 cross section. Guo and Langevin (2002); Werner et al. (2013) pointed out that fine-  
resolution vertical grid is required for accurately modeling the density-dependent flow  
and solute transport. The vertical thickness of each grid cell is set uniformly as 3.048 m  
(10 ft) in this study, significantly smaller than the large thickness of 152 m in many  
previous constant-density modeling studies in the WKP, for example, Davis and Katz  
405 (2007); Davis et al. (2010); Xu et al. (2015a); Gallegos et al. (2013); Xu et al. (2015b).  
(Insert Fig. 3 here)

Based on the field scale, the horizontal discretization for each cell is set uniformly  
as 152 m, except columns #22 and #139, which are 15.2 m as the vertical conduit  
network connecting the submarine spring (SCS) and inland spring (Wakulla Spring),  
410 respectively. The sizes of spring outlets and the conduit network are based on the  
observational field data and the calibrated values from the previous modeling studies

(Gallegos et al., 2013). For model simplicity, the size of horizontal conduit network is assumed constant in this study. The outlet of vertical conduit system is the submarine spring (SCS) located at the shoreline at column #22. The conduit system starts from the submarine spring, descends downward to layer #29 (nearly 100 m below sea level), horizontally extends nearly 18 km from column #22 to column #139, and then rises upward to the top through column #139. Seawater intrudes at the SCS on the first layer of column #22, and then flows vertically downward into the conduit system. The inland spring is simulated by the DRAIN package as general head boundary condition in the SEAWAT model. All layers are simulated as confined aquifer since the conduit is fully saturated, which are consistent to the previous numerical models used in Davis et al. (2010); Xu et al. (2015a); Xu et al. (2015b) in the WKP.

A transient 7-day stress in the SEAWAT model is evaluated throughout this study, expect the scenarios of longer simulation time for evaluating seawater intrusion under an extended low rainfall period in Sect. 5.4. The timestep of flow model is set as 0.1 days, and the timestep of transport model is determined by SEAWAT automatically.

### **3.4 Initial and boundary conditions**

The initial condition of head is constant within each layer, set as 0.0 m as the present-day sea level for the cells from the boundary on the left (column #1) to the shoreline (column #22), and gradually rises to 1.52 m at inland boundary on the right, determined by the elevation of Wakulla Spring. Note that the head values are written in the input files of SEAWAT model instead of equivalent freshwater head. The initial conditions of salinity are assumed as a constant value of 35.0 PSU (Practical Salinity

435 Unit), assuming no freshwater dilution at the sea boundary and the leftmost 10 columns.  
The seawater/freshwater mixing zone is assumed from 35 PSU at column #11 to 0 PSU at  
column #45, with a gradient of 1.0 PSU per column. Salinity is set uniformly as 0.0 PSU  
from column #46 to the inland boundary on the right, as uncontaminated freshwater  
before seawater intrudes. Several testing cases have been made to confirm that the initial  
440 conditions do not significantly affect the modeling results.

The boundary conditions are also presented in Fig. 3. The less-permeable  
confining unit of the UFA base is simulated at the bottom of model domain as no-flow  
boundary condition. The constant head and concentration inland boundary condition on  
the right is 1.5 m as the elevation of inland spring, and 0.0 PSU as uncontaminated  
445 freshwater. The seawater boundary on the left is 3.38 km away from the shoreline, set as  
0.0 m constant head as the present-day sea level and 35.0 PSU constant concentration as  
seawater without mixing. The boundary conditions of head and salinity at the submarine  
spring (column #22, layer #1) are adjusted and evaluated in the scenarios of different sea  
level, salinity and rainfall conditions in Sect. 5.

450

#### **4. Sensitivity Analysis**

Sensitivity analysis evaluates the uncertainties of salinity and head simulations  
with respect to eleven parameters, helps to understand the effects of variations and  
interactions of aquifer parameters and boundary conditions on simulations. The symbols  
455 and definitions of the eleven parameters are listed in Table 1, as well as the values  
computed in the local sensitivity analysis, and the parameter ranges evaluated in the  
global sensitivity analysis (Table 1). There are six parameters in the groundwater flow

model, including hydraulic conductivity (HY\_P and HY\_C), specific storage (SS\_P and SS\_C) of the conduit and of the porous medium, recharge rate (RCH) and the sea level at the submarine spring (H\_SL). The other five parameters, including effective porosity (PO\_P and PO\_C), dispersivity (DISP\_P and DISP\_C) of the conduit and the porous medium, and the salinity at the submarine spring (SC), are in the solute transport model.

#### 4.1 Local sensitivity analysis

In the local sensitivity analysis, the CSSs of parameters with respect to head and salinity simulations are calculated at several locations along the conduit network and the porous medium, respectively. The CSSs are computed for the parameter values in the maximum seawater intrusion benchmark case in Sect. 5.1, which is developed to quantitatively evaluate the extent of seawater intrusion specifically in the WKP after a 7-day low precipitation period. The parameters to be adjusted and evaluated in the scenarios are also determined based on the local sensitivity result.

Parameter sensitivities are computed at several locations, from column #25 to column #75 with an interval of 5 cells along the horizontal conduit (layer #29), where column #25 is close to the shoreline as fully contaminated by seawater, and column #75 is assumed as the uncontaminated freshwater aquifer. The parameter sensitivities of simulations in a porous medium are evaluated at layer #24, 15.2 m or 5 layers above the conduit layer, from column #25 to column #75 with an interval of 5 cells along the horizontal direction.

Deleted: (50 ft)

#### 4.1.1 Local sensitivity analysis of simulations in the conduit

Figure 4 shows the arithmetic mean of CSSs computed in the evaluated locations along the conduit layer. The largest CSS value indicates that salinity at the submarine spring (SC) is the most important parameter to both salinity and head simulations.

485 Hydraulic conductivity, specific storage and effective porosity of the conduit (HY\_C, SS\_C and PO\_C), as well as the sea level at the submarine spring (H\_SL) are also important parameters. Simulations are not sensitive to hydraulic conductivity, specific storage and effective porosity of the porous medium (HY\_P, SS\_P and PO\_P), recharge rate (RCH) and dispersivity (DISP\_C and DISP\_P). Generally speaking, the parameter  
490 sensitivities with respect to head simulations are similar and consistent with salinity simulations.

(Insert Fig. 4 here)

The boundary conditions of the conduit system, including salinity and sea level at the submarine spring (SC and H\_SL), are important in modeling seawater intrusion in the  
495 WKP. Seawater enters the conduit system at the submarine spring, and intrudes landward through the subsurface conduit system. The most important parameter is identified as the salinity at the submarine spring (SC), which affects the equivalent freshwater head in terms of water density at the inlet of conduit system, and affects flow simulation within the conduit system. The salinity at the submarine spring (SC) is determined by freshwater  
500 mixing and dilution from the conduit network, in other words, is controlled by the rainfall recharges and freshwater discharge from the aquifer to the sea. In this study, rainfall recharge is represented by salinity at submarine spring with freshwater dilution instead of the recharge flux on the surface (RCH), which is not an important parameter and not

applicable to represent the total rainfall recharge in the two-dimensional SEAWAT  
505 model. On the other hand, the sea level at the submarine spring ( $H_{SL}$ ) has an  
intermediate CSS, indicating that it is also important in flow field and salinity transport  
simulations. However, sea level is not as important as the salinity at the submarine spring  
(SC). In other words, the extent of seawater intrusion in the conduit is more sensitive to  
rainfall recharge and freshwater discharge represented by the parameter SC, rather than  
510 the sea level and/or tide level variations.

Dispersivity is usually an important parameter in the sensitivity analysis of  
transport modeling in a porous medium aquifer (Shoemaker et al., 2004). However, the  
conduit and porous medium dispersivities (DISP\_C and DISP\_P) are not evaluated as  
important parameters in the dual-permeability model in this study. Advection is  
515 dominating in the transport of seawater in the high permeability conduit network, while  
dispersion is negligible in such high velocity flow condition. Moreover, the dispersion  
solution and dispersivity sensitivities in the conduit are inaccurately calculated when  
conduit flow becomes turbulent. On the other hand, the numerical dispersion is  
significantly greater than the physical dispersion in the conduit. The Peclet number can  
520 be as great as 2500, far beyond the theoretical criteria ( $<4$ ) for solving the advection  
dispersion transport equation by finite difference method (Zheng and Bennett, 2002).  
Dispersivity sensitivities have large uncertainty in this study, indicating that the  
continuum SEAWAT model is not applicable to accurately compute the salinity  
dispersion in the conduit. An experiment of deactivating the DSP (dispersion) package in  
525 SEAWAT confirms that dispersion is negligible within the conduit network in this study.

Instead of the dispersion computed by dispersivity, numerical dispersion is the major reason for the range of mixing interface shown in this study.

The parameters with the six largest CSS are presented in Fig. 5, with respect to the combination of head and salinity simulations in the evaluated locations along the conduit network, from column #25 to column #75. The largest CSS values are found at either column #50 or #55 within the conduit, matches with the position of seawater/freshwater mixing zone along the conduit network in the maximum seawater intrusion case (Sect. 5.1). The largest CSS values are found at the mixing zone than anywhere else for all parameters, because head and salinity simulations only change significantly near the mixing zone but remain constant in other locations.

(Insert Fig. 5 here)

#### 4.1.2 Local sensitivity analysis of simulations in the porous medium

Figure 6 shows the arithmetic mean of CSSs computed in the evaluated locations in the porous medium (layer #24). The largest CSS value indicates that salinity at the submarine spring (SC) is also the most important parameter with respect to simulations in the porous medium, although it is a boundary condition of the conduit system. However, some parameter sensitivities exhibits different pattern compared to from the results of simulations in the conduit. The hydraulic conductivity and effective porosity of both the conduit and porous medium (HY\_C, HY\_P, PO\_C & PO\_P), specific storage of the conduit (SS\_C) and dispersivity of the porous medium (DISP\_P), have intermediate CSS values. The CSS values at different evaluated locations along the layer of porous medium are plot in Fig. 7, except the three unimportant parameters. Similar to the sensitivity



analysis of simulations along the conduit, the largest CSSs are found at either column #35  
550 or #40, which is the mixing zone position in the porous medium in the maximum  
seawater intrusion case (Sect. 5.1).

(Insert Fig. 6 and 7 here)

The important rules of the boundary condition and hydrological parameters of the  
conduit system on simulations in the porous medium are highlighted in the local  
555 sensitivity analysis. Salinity at the submarine spring (SC) remains the most important  
parameter and determines the seawater intrusion plume in the porous medium. The  
conduit parameters, such as hydraulic conductivity, effective porosity and specific  
storage (HY\_C, PO\_C and SS\_C), are also important to the simulations in the porous  
medium. The CSSs of conduit parameters indicate that groundwater flow and seawater  
560 transport through the conduit system have significant impact on the simulations in the  
surrounding porous medium. In summary, simulations in the porous medium are sensitive  
to both the conduit and porous medium parameters, highlight the interaction between the  
two domains in simulating seawater intrusion in the dual-permeability WKP coastal karst  
aquifer. As a result, simulations and observations of salinity and head in the conduits and  
565 other karst features have significance on calibrating numerical models and values for  
understanding seawater intrusion.

#### **4.1.3 Parameter correlations**

The correlation coefficients and covariance matrix of all parameters are calculated  
and presented in Fig. 8. The white and black colors represent positive and negative  
570 parameter correlations, respectively. Generally speaking, hydrological parameters of  
porous medium are positively correlated with the other parameters of porous medium, but

negatively correlated with conduit parameters, and vice versa. On the other hand, hydraulic conductivity, specific storage and porosity have similar correlation pattern among all evaluated parameters, while the correlation of dispersion is different than others. For example, hydraulic conductivity (HY\_P) has strong positive correlation with specific storage (SS\_P) and porosity (PO\_P), however, has negatively correlated with dispersivity (DISP\_P). The correlations of conduit parameters exhibit similar relationship as well. The results can be explained as that larger hydraulic conductivity would result in higher seepage velocity in either conduit or porous medium by the Darcy's Law; therefore, salt transport comes from the submarine springs also results in higher salinity in both the conduit porous medium domains. However, larger dispersivity could decrease the peak values of salinity concentration but enlarge contaminant plumes due to stronger dispersion and diffusion.

#### 585 **4.2 Global sensitivity analysis**

The local sensitivity analysis analyzes the parameter sensitivities specifically for the seawater intrusion in the WKP, as the maximum seawater intrusion case in Sect. 5.1. However, local sensitivity result is lack of representative for the entire parameter ranges, and higher-order derivatives of simulations. The global sensitivity analysis is essential to provide a comprehensive understanding of the relationship between simulations and parameters for modeling seawater intrusion to a coastal karst aquifer.

The derivatives of simulations with respect to the selected parameters in Figure 9 clearly indicate local sensitivity results are not representative in the entire parameter range. For example, both head and salinity simulations in the conduit are nearly constant

595 to the variation of an unimportant parameter (DISP\_P) in the local sensitivity study.  
However, simulations are non-linear to salinity at the submarine spring (SC). Parameter  
SC is identified as the most important parameter in the local sensitivity analysis, partially  
because that the CSS value is computed at the largest derivative value where salinity is  
35 PSU.

600 (Insert Fig. 9 here)

The locations in the conduit and porous medium systems with the largest CSS  
values from the local sensitivity analysis are evaluated in the global sensitivity analysis.  
Parameter sensitivities are computed at the locations with largest CSS values in the  
previous local sensitivity analysis, specifically, column #50, layer #29 in the conduit and  
605 column #35, layer #24 in the porous medium, respectively. The Trajectory sampling  
method developed by Saltelli et al. (2004) is introduced in Sect. 2.2 and applied in the  
global sensitivity analysis, with the recommended choice of  $p = 4$  and  $r = 10$  by Saltelli et  
al. (2004).

#### 610 **4.2.1 Global sensitivity analysis of simulations in the conduit**

In the global sensitivity analysis, the mean and standard deviation of the EEs for  
salinity simulation in the conduit (column #50, layer #29) are presented in Fig. 10a.  
Consistent with the local sensitivity analysis, the largest mean value of EEs indicates that  
parameter SC is the most important parameter to salinity simulations. Parameter SC also  
615 has the largest standard deviation of the EEs due to the non-linear relationship between  
salinity simulation and parameter SC shown in Fig. 9, in which the derivatives vary with  
different parameter values. The hydraulic conductivity and effective porosity of the

conduit (HY\_C and PO\_C), as well as sea level (H\_SL), are all important to salinity simulation with relatively large mean and standard deviation values of EEs. Generally speaking, the local and global sensitivity study results for salinity simulation in the conduit are similar, however, the standard deviation of EEs provides additional information of parameter sensitivities in the global sensitivity study.

(Insert Fig. 10 here)

The global sensitivities for head simulations with respect to parameters are more complicated than salinity simulations (Fig. 9b). The mean and standard deviation of EEs for head simulations are smaller than those for salinity simulations, consistent with the conclusion of Shoemaker (2004) that salinity simulation is more effective than head. The two largest mean values of EEs show that the specific storage (SS\_C) and effective porosity (PO\_C) of the conduit are the two most important parameters. As mentioned in the local sensitivity analysis, parameters in transport model are also important to the head simulation in a coupled density-dependent flow and transport model. For example, effective porosity is important in head simulation since the solution of salinity transport in turn determines the density and impact flow calculation in the model, particularly in the study of density-dependent seawater intrusion. In addition, head simulations are also sensitive to the boundary conditions of salinity in the transport model, since equivalent freshwater head is a function of density in terms of salinity in the coupled variable-density flow and transport model for simulating seawater intrusion. Different from salinity simulation, salinity at the submarine spring (SC) no longer has the largest mean of EEs. However, the standard deviation of EEs for parameter SC is still the largest due to the non-linear relationship to head simulation shown in Fig. 9.

One of the major finding in the global sensitivity analysis is that the hydraulic conductivity of the conduit (HY\_C) has smaller means and standard deviations of EEs than the other two parameters (PO\_C and SS\_C), and no longer becomes the most important parameter as shown in the previous local sensitivity analysis. This is different from the common knowledge and empirical experience in hydrogeological modeling, but is actually reasonable in karst aquifer with the non-laminar conduit flow. In the SEAWAT model, Darcy equation is used to calculate the flow velocity in the whole model domain including the conduit system, however, is only accurate for laminar seepage flow in the porous medium. Groundwater flow is usually non-laminar even turbulent in the conduit system, when the conduit flow rate is non-linear to head gradient and hydraulic conductivity. The simulation of conduit flow is beyond the applicability of Darcy equation in SEAWAT model, with relatively large error and uncertainty in the relationship between hydraulic conductivity and head simulation. Then, the uncertainty of hydraulic conductivity sensitivities can be large and difficult to be accurately measured.

655

#### **4.2.2 Global sensitivity analysis of simulations in the porous medium**

The hydraulic conductivity of the porous medium (HY\_P) and salinity at the submarine spring (SC) are identified as the two most important parameters for salinity simulations in the porous medium (Fig. 11a). Compared to parameter HY\_P, parameter SC has much larger CSS value at 35.0 PSU with the largest derivative in the local sensitivity analysis (Fig. 6), and also larger standard deviation of EE in the global sensitivity analysis. Local sensitivity analysis overestimates the sensitivity of parameter SC within the range, and global sensitivity analysis provides a more comprehensive

660

understanding of the physical meaning of parameter SC, for example, variability of  
665 rainfall recharges and freshwater discharge. As the boundary condition of conduit system,  
salinity at the submarine spring (SC) determines the equivalent freshwater head at the  
inlet of seawater intrusion and affects simulations in the conduit, and also the surrounding  
porous medium via exchanges between the two systems. The global sensitivity results  
highlight the significance of conduit and porous medium interactions in a dual-  
670 permeability aquifer. Similar to salinity at the submarine spring (SC), dynamic  
interactions between the conduit and the porous medium in this study are clearly shown  
in the relatively large mean of EEs for sea level (H\_SL), effective porosity and specific  
storage of the conduit (PO\_C and SS\_C). Effective porosity is important for head  
simulations in this study, since the density-dependent flow and transport models are  
675 coupled for simulating seawater intrusion.

(Insert Fig. 11 here)

On the other hand, parameter sensitivities for simulations in the porous medium  
are different from the sensitivities for simulations in the conduit. The porous medium  
hydraulic conductivity (HY\_P) is an important term in the flow equation for solving head  
680 and advective velocity for the transport equation (Fig. 11b), similar to most sensitivity  
result of hydrological modeling for flow in a porous medium. For the simulations in the  
conduit, effective porosity and specific storage of the conduit (PO\_C and SS\_C) are more  
important than hydraulic conductivity (HY\_C), because of the large uncertainty in  
conduit flow computation by Darcy's equation in the continuum SEAWAT model.

685

## 5. Seawater Intrusions Scenarios

In this section, the extents of seawater intrusion are quantitatively measured and evaluated under different scenarios of boundary conditions, which are identified as the important parameters in the local sensitivity analysis. In each scenario, only one  
690 parameter is adjusted and others are constant as the maximum seawater intrusion benchmark case in Sect. 5.1.

### 5.1 The maximum seawater intrusion benchmark case

The local sensitivity analysis computes the sensitivities of parameter values in the  
695 maximum seawater intrusion benchmark case, which assumes the head and salinity boundary conditions are 0.0 m as the present-day sea level, and 35.0 PSU as seawater without dilution at the conduit system outlet, respectively. Salinity and sea level at the submarine spring (SC and H\_SL) are identified as two important parameters and then adjusted in the following two scenarios. In this case, the longest distance of seawater  
700 intrusion is simulated with the assumption that freshwater recharge is negligible, and the outlet of conduit system is filled with undiluted seawater. Figure 12 presents the simulated salinity and head profile in the cross section after a 7-day simulation.

(Insert Fig. 12 here)

According to the Ghyben-Herzberg relationship, landward seawater intrusion is  
705 on the bottom of the aquifer beneath the seaward freshwater on the top. The equivalent freshwater head at the submarine spring is calculated as 2.29 m when salinity is 35.0 PSU  
at the submarine spring, and undiluted seawater is filled within the 91 meters deep submarine cave and conduit network. The equivalent freshwater head at the submarine

Deleted: (7.5 ft)

Deleted: (5.0 ft)

710 spring is higher than the 1.52 m constant head at the inland spring, diverts the hydraulic  
gradient landward and causes seawater to intrude into the aquifer. Seawater intrudes  
further landward through the highly permeable conduit network, also contaminates the  
surrounding porous medium via exchange on the conduit wall. The seawater/freshwater  
mixing zone in the deep porous medium beneath the conduit is only slightly behind the  
715 seawater front in the conduit, because high-density saline water easily descends from the  
conduit and flows downward. The area with relatively smaller salinity to the left of the  
vertical conduit network near shore is due to the freshwater discharge dilution from the  
aquifer to the sea, since the equivalent freshwater head is only 2.29 m at the submarine  
spring but remains 0 m in other areas. The mixing zone position in the conduit, defined as  
720 the location with salinity of 5.0 PSU, is measured at nearly 5.80 km landward from the  
shoreline. The width of mixing interfaces, defined as the distance between the locations  
with salinity of 1.0 PSU and 25.0 PSU, are roughly the same as 7 grid cells or 1.13 km in  
both the conduit and porous medium.

## 725 **5.2 Salinity variation at the submarine spring (SC)**

Sensitivity analysis indicates that the salinity at the submarine spring (SC) is  
generally the most important parameter for simulations in both the conduit and the porous  
medium. Salinity at the submarine spring is diluted by large amount of rainfall recharge  
and freshwater discharge after a significant precipitation event, but remains highly saline  
730 after an extended low rainfall period, as shown in the maximum seawater intrusion  
benchmark case in Sect. 5.1. The equivalent freshwater head at the submarine spring is  
2.29 m when salinity is 35.0 PSU, proportionally decreases to 0.0 m, where salinity is 0.0



PSU and freshwater is filled within the conduit system. The impact of freshwater  
735 recharge on seawater intrusion is evaluated in four scenarios with salinity levels of 0.0  
PSU, 10.0 PSU, 20.0 PSU and 30.0 PSU at the submarine spring (Fig. 13). The mixing  
zone in both the conduit and porous medium are measured at 4.0 (4.5) km away from the  
shoreline in the cases of salinity of 10.0 (20.0) PSU at the submarine spring. Compared to  
the maximum seawater intrusion benchmark case, rainfall recharge and freshwater  
740 discharge dilute seawater intrusion and move the interface significantly seaward. The  
mixing zone is very close to the shoreline when salinity is 0.0 PSU at the submarine  
spring and seawater intrusion is blocked by large amount of freshwater dilution. The  
shape of mixing interface is similar to the maximum seawater intrusion benchmark, but  
the width of mixing interface is wider due to the slower advective flow with smaller or  
745 even reversed hydraulic gradient from the aquifer to the sea. In the scenarios of  
freshwater dilution, the solution of dispersion becomes more accurate and important in  
salinity transport with slower groundwater seepage flow. Generally speaking, a heavy  
rainfall event dilutes the intruded seawater and moves the mixing interface seaward.  
(Insert Fig. 13 here)

750

### **5.3 Sea level variation at the submarine spring (H\_SL)**

In addition to salinity, sensitivity analysis indicates that sea level at the submarine  
spring is also an important parameter. IPCC (2007) predicted an approximation of 1.0 m  
sea level rise by the end of 21st century, which has significant impacts on seawater  
755 intrusion in a coastal karst aquifer. The extents of seawater intrusion in the conduit and  
porous medium under 0.91 m and 1.82 m sea level rise conditions are quantitatively

evaluated in this study (Fig. 14). Salinity at the submarine spring remains 35.0 PSU, but the head at the submarine spring increases to simulate rising sea level. The simulated salinity profiles show that the width and shape of the mixing zone are similar to the results in the maximum seawater intrusion benchmark. However, the mixing zone is intruded landward along the conduit to almost 7.08 km from the shoreline with 0.91 m sea level rises, which is 1.28 km further inland than the simulation under present-day sea level. In the other extreme case of 1.82 m sea level rise, seawater intrudes additional 0.97 km further inland along the conduit than the simulated result with 0.91 m sea level rise, or 2.25 km further landward than the simulation under present-day sea level. Compared to the porous alluvial aquifer, seawater intrudes further landward through the conduit network in the a dual-permeability karst aquifer under sea level rise. This scenario confirms the concerns of severe seawater intrusion in the coastal karst aquifer under sea level rise, also highlights the values of conduit system as the major pathway for long-distance seawater intrusion. In addition, sea level rise might have great impacts on the regional flow field and hydrological conditions in a coastal aquifer. Davis and Verdi (2014) reported an increasing groundwater discharge at the inland Wakulla Spring in the WKP associated with the rising sea level in the past decades. The relationship between spring discharge and sea level was quantitatively simulated by a CFPv2 numerical model in Xu et al. (2015b), however, beyond the scope of this study.

(Insert Fig. 14 here)

#### 5.4 Extended low rainfall period

The elapsed time in simulations are set constant in the sensitivity analysis and the  
780 previous scenarios for consistent comparison purposes. However, extents of seawater  
intrusion under scenarios of extended low rainfall periods are presented in Fig. 15, with  
the extended simulated time of 14, 21 and 28 days. The boundary conditions of salinity  
and sea level at the submarine spring remain 35.0 PSU and 0.0 m, respectively, as the  
maximum seawater intrusion benchmark.

785 (Insert Fig. 15 here)

Seawater persistently intrudes through both the conduit and the porous medium  
domains during the extended low rainfall period, since the 2.29 m equivalent freshwater  
head at the submarine spring is higher than the inland freshwater boundary. Compared to  
the maximum seawater intrusion benchmark with a stress period of 7-day elapsed time in  
790 simulation, the mixing zone position moves additional 1.29 km landward in the conduit  
and the surrounding porous medium in the 14-day simulation. In the predictions of 21  
(28)-day extended low rainfall period, the mixing zone finally arrives at 7.56 (7.89) km  
from the shoreline. Above all, seawater intrudes further inland through conduit network  
during an extended low rainfall period, contaminates fresh groundwater resources in the  
795 aquifer and becomes an environmental issue in coastal regions.

#### 6. Conclusion

In this study, a two-dimensional SEAWAT model is developed to study seawater  
intrusion in a dual-permeability coastal karst aquifer with a conduit network. Local and  
800 global sensitivity analyses are used to evaluate the parameter sensitivities, and then help

understand the roles of karst features in seawater intrusion. Some major conclusions from sensitivity analysis are summarized here,

- 1) The global sensitivity analysis is important to accurately estimating the parameter sensitivities in wide ranges, due to the parameter interactions and non-linear relationship between simulations and parameters shown in Fig. 9, since local sensitivity analysis only evaluates at one specified parameter value. Different from other karst studies, head simulations are sensitive to boundary conditions and parameters of transport equation, since the solution of salinity in terms of density affects the equivalent freshwater head calculation in the coupled density-dependent flow and transport SEWAT model.
- 2) Overall, salinity at the submarine spring (SC) is the most important parameter. The boundary conditions and hydrological parameters of the conduit system are important to not only the simulations in the conduit, but also the porous medium via exchanges between the two systems. The submarine spring and conduit system are the major entrance and pathway, respectively, for seawater intrusion in the coastal karst aquifer. Sensitivity analysis indicates that the simulations in the conduit are particularly important for understanding the hydrogeological processes in the dual-permeability karst aquifer, and field observational data within the conduit system are necessary for the model calibration.
- 3) Different from the previous studies in Shoemaker (2004), dispersivity is no longer an important parameter for simulations in the conduit. Advection is dominant but dispersion is negligible in salinity transport under the conditions of turbulent flow in the conduit, and also the relatively fast seepage flow in the surrounding porous

medium. The interaction between conduit and porous medium significantly  
825 change the flow field and affect the applicability of transport model. In the  
simulated salinity profile, mixing process is mostly due to numerical dispersion  
instead of the solution of dispersion equation, since the Peclet number is  
extremely large in the domain and beyond the criteria of solving transport  
equation by finite difference method.

830 4) Hydraulic conductivity is no longer an important parameter for simulations in the  
conduit. Conduit flow is usually non-laminar and beyond the range of Darcy  
equation used in SEAWAT model, which assumes a linear relationship between  
specific discharge and head gradient. Therefore, the uncertainty and sensitivity of  
conduit permeability is difficult to be accurately evaluated by hydraulic  
835 conductivity in the continuum model.

The extents of seawater intrusion and width of mixing interface are quantitatively  
measured with different salinity and sea level at the submarine spring, which are  
identified as important parameters in the sensitivity study. In the maximum seawater  
intrusion benchmark case with salinity and head as 35.0 PSU and 0.0 m at the submarine  
840 spring, respectively, the mixing zone in the conduit moves to 5.80 km from the shoreline  
with 1.13 km wide after a 7-day low rainfall period. Rainfall and regional recharges  
dilute the salinity at the submarine spring (SC), and significantly shift the mixing zone  
position seaward to 4.0 (4.5) km away from the shoreline with salinity of 10.0 (20.0) PSU.  
Compared to the benchmark, seawater intrudes additional 1.29 (2.25) km further  
845 landward along the conduit under 0.91 (1.82) m sea level rise at the submarine spring  
(H\_SL). In addition, the impacts of extended low rainfall on seawater intrusion through

conduit network are also quantitatively assessed with longer elapsed time in simulation. The mixing zone moves to 7.56 (7.89) km from the shoreline, after a 21 (28)-day low precipitation period.

850 In summary, the modeling and field observations in the karst features, including the subsurface conduit network, the submarine spring and karst windows, are critical for understanding seawater intrusion in a coastal karst aquifer, and important for model calibration. The discrete-continuum density-dependent flow and transport model, for example, the VDFST-CFP in Xu and Hu (2017), is important to accurately simulate  
855 seawater intrusion and assess parameter sensitivities in the coastal karst aquifer with conduit networks. Advanced numerical methods and/or high-performance computing are expected to solve the issue of Peclet number limitation in this study, and reduce the uncertain of dispersion solution with higher resolution.

#### 860 **Competing interests**

The authors declare that they have no conflict of interest.

#### **References**

- 865 Bear, J.: Seawater intrusion in coastal aquifers, Springer Science & Business Media, 1999.
- Calvache, M., and Pulido-Bosch, A.: Effects of geology and human activity on the dynamics of salt-water intrusion in three coastal aquifers in southern Spain, *Environmental Geology*, 30, 215-223, 1997.
- 870 Chang, Y., Wu, J., Jiang, G., and Kang, Z.: Identification of the dominant hydrological process and appropriate model structure of a karst catchment through stepwise simplification of a complex conceptual model, *Journal of Hydrology*, 548, 75-87, 2017.

- Chen, Z., Hartmann, A., and Goldscheider, N.: A new approach to evaluate spatiotemporal dynamics of controlling parameters in distributed environmental models, *Environmental Modelling & Software*, 87, 1-16, 2017.
- 875 Custodio, E.: Salt-fresh water interrelationships under natural conditions, *Groundwater Problems in Coastal Areas*, UNESCO Studies and Reports in Hydrology, 45, 14-96, 1987.
- Davis, J. H.: Hydraulic investigation and simulation of ground-water flow in the Upper Floridan aquifer of north central Florida and southwestern Georgia and delineation of  
880 contributing areas for selected City of Tallahassee, Florida, *Water-Supply Wells*, U.S. Geological Survey, Tallahassee, Florida, 55, 1996.
- Davis, J. H., and Katz, B. G.: Hydrogeologic investigation, water chemistry analysis, and model delineation of contributing areas for City of Tallahassee public-supply wells, Tallahassee, Florida, Geological Survey (US)2328-0328, 2007.
- 885 Davis, J. H., Katz, B. G., and Griffin, D. W.: Nitrate-N movement in groundwater from the land application of treated municipal wastewater and other sources in the Wakulla Springs Springshed, Leon and Wakulla counties, Florida, 1966–2018, *US Geol Surv Sci Invest Rep*, 5099, 90, 2010.
- Davis, J. H., and Verdi, R.: Groundwater Flow Cycling Between a Submarine Spring and  
890 an Inland Fresh Water Spring, *Groundwater*, 52, 705-716, 2014.
- Diersch, H.: FEFLOW reference manual, Institute for Water Resources Planning and Systems Research Ltd, 278, 2002.
- Essink, G., Van Baaren, E., and De Louw, P.: Effects of climate change on coastal groundwater systems: a modeling study in the Netherlands, *Water Resources Research*,  
895 46, 2010.
- Fleury, P., Bakalowicz, M., and de Marsily, G.: Submarine springs and coastal karst aquifers: a review, *Journal of Hydrology*, 339, 79-92, 2007.
- Gallegos, J. J., Hu, B. X., and Davis, H.: Simulating flow in karst aquifers at laboratory and sub-regional scales using MODFLOW-CFP, *Hydrogeology Journal*, 21, 1749-1760,  
900 2013.

- Guo, W., and Langevin, C.: User's guide to SEWAT: a computer program for simulation of three-dimensional variable-density ground-water flow, Water Resources Investigations Report. United States Geological Survey, 2002.
- Hartmann, A., Gleeson, T., Rosolem, R., Pianosi, F., Wada, Y., and Wagener, T.: A  
905 large-scale simulation model to assess karstic groundwater recharge over Europe and the Mediterranean, *Geoscientific Model Development*, 8, 1729-1746, 2015.
- Hill, M. C., and Tiedeman, C. R.: Effective groundwater model calibration: with analysis of data, sensitivities, predictions, and uncertainty, John Wiley & Sons, 2006.
- IPCC: Contribution of Working Groups I, II and III to the Fourth Assessment Report of  
910 the Intergovernmental Panel on Climate Change, Geneva, Switzerland, 104 pp., 2007.
- Kaufmann, G., and Braun, J.: Karst aquifer evolution in fractured, porous rocks, *Water Resources Research*, 36, 1381-1391, 2000.
- Kernagis, D. N., McKinlay, C., and Kincaid, T. R.: Dive Logistics of the Turner to Wakulla Cave Traverse, 2008.
- 915 Kincaid, T. R., and Werner, C. L.: Conduit Flow Paths and Conduit/Matrix Interactions Defined by Quantitative Groundwater Tracing in the Floridan Aquifer, Sinkholes and the Engineering and Environmental Impacts of Karst: Proceedings of the Eleventh Multidisciplinary Conference, Am. Soc. of Civ. Eng. Geotech. Spec. Publ, 2008, 288-302,
- 920 Langevin, C. D., Shoemaker, W. B., and Guo, W.: MODFLOW-2000, the US Geological Survey Modular Ground-Water Model--Documentation of the SEAWAT-2000 Version with the Variable-Density Flow Process (VDF) and the Integrated MT3DMS Transport Process (IMT), US Department of the Interior, US Geological Survey, 2003.
- Martin, J. B., and Dean, R. W.: Exchange of water between conduits and matrix in the  
925 Floridan aquifer, *Chemical Geology*, 179, 145-165, 2001.
- Martin, J. B., Gulley, J., and Spellman, P.: Tidal pumping of water between Bahamian blue holes, aquifers, and the ocean, *Journal of Hydrology*, 416, 28-38, 2012.
- Moore, W. S., and Wilson, A. M.: Advective flow through the upper continental shelf driven by storms, buoyancy, and submarine groundwater discharge, *Earth and Planetary  
930 Science Letters*, 235, 564-576, 2005.



- Morris, M. D.: Factorial sampling plans for preliminary computational experiments, *Technometrics*, 33, 161-174, 1991.
- Poeter, E. P., and Hill, M. C.: Documentation of UCODE, a computer code for universal inverse modeling, DIANE Publishing, 1998.
- 935 Reimann, T., Liedl, R., Giese, M., Geyer, T., Maréchal, J.-C., Dörfli, N., Bauer, S., and Birk, S.: Addition and Enhancement of Flow and Transport processes to the MODFLOW-2005 Conduit Flow Process, 2013 NGWA Summit—The National and International Conference on Groundwater, 2013,
- Reimann, T., Giese, M., Geyer, T., Liedl, R., Maréchal, J.-C., and Shoemaker, W. B.:
- 940 Representation of water abstraction from a karst conduit with numerical discrete-continuum models, *Hydrology and Earth System Sciences*, 18, 227-241, 2014.
- Saltelli, A., Tarantola, S., Campolongo, F., and Ratto, M.: *Sensitivity analysis in practice: a guide to assessing scientific models*, John Wiley & Sons, 2004.
- Scanlon, B. R., Mace, R. E., Barrett, M. E., and Smith, B.: Can we simulate regional groundwater flow in a karst system using equivalent porous media models? Case study, Barton Springs Edwards aquifer, USA, *Journal of hydrology*, 276, 137-158, 2003.
- Shoemaker, W. B.: Important observations and parameters for a salt water intrusion model, *Ground Water*, 42, 829-840, 2004.
- Shoemaker, W. B., Kuniandy, E. L., Birk, S., Bauer, S., and Swain, E. D.:
- 950 Documentation of a conduit flow process (CFP) for MODFLOW-2005, 2008.
- Voss, C. I., and Provost, A. M.: SUTRA, US Geological Survey Water Resources Investigation Reports, 84-4369, 1984.
- Voss, C. I., and Souza, W. R.: Variable density flow and solute transport simulation of regional aquifers containing a narrow freshwater - saltwater transition zone, *Water Resources Research*, 23, 1851-1866, 1987.
- 955 Werner, A. D., and Simmons, C. T.: Impact of sea - level rise on sea water intrusion in coastal aquifers, *Groundwater*, 47, 197-204, 2009.
- Werner, A. D., Bakker, M., Post, V. E., Vandenbohede, A., Lu, C., Ataie-Ashtiani, B., Simmons, C. T., and Barry, D. A.: Seawater intrusion processes, investigation and

- 960 management: recent advances and future challenges, *Advances in Water Resources*, 51,  
3-26, 2013.
- Werner, C. L.: Preferential flow paths in soluble porous media and conduit system  
development in carbonates of the Woodville Karst Plain, Florida, Master of Science,  
Department of Earth, Ocean and Atmosphere Science, Florida State University,  
965 Tallahassee, FL, 2001.
- Wilson, A. M., Moore, W. S., Joye, S. B., Anderson, J. L., and Schutte, C. A.: Storm -  
driven groundwater flow in a salt marsh, *Water Resources Research*, 47, 2011.
- Xu, Z., Hu, B. X., Davis, H., and Cao, J.: Simulating long term nitrate-N contamination  
processes in the Woodville Karst Plain using CFPv2 with UMT3D, *Journal of*  
970 *Hydrology*, 524, 72-88, 2015a.
- Xu, Z., Hu, B. X., Davis, H., and Kish, S.: Numerical study of groundwater flow cycling  
controlled by seawater/freshwater interaction in a coastal karst aquifer through conduit  
network using CFPv2, *Journal of contaminant hydrology*, 182, 131-145, 2015b.
- Xu, Z., Bassett, S. W., Hu, B., and Dyer, S. B.: Long distance seawater intrusion through  
975 a karst conduit network in the Woodville Karst Plain, Florida, *Scientific Reports*, 6, 2016.
- Xu, Z., and Hu, B. X.: Development of a discrete - continuum VDFST - CFP numerical  
model for simulating seawater intrusion to a coastal karst aquifer with a conduit system,  
*Water Resources Research*, 53, 688-711, 10.1002/2016WR018758., 2017.
- Zheng, C., and Bennett, G. D.: *Applied contaminant transport modeling*, Wiley-  
980 Interscience New York, 2002.

Table 1. The symbols and definitions of parameters used in this study, the specified evaluated values in local sensitivity study and evaluation ranges (the lower and upper constraints) of each parameter in global sensitivity analysis.

Parameter	Definitions	Lower	Upper	Evaluated value	Unit
HY_P	Hydraulic conductivity (porous medium)	1.524	4.572	2.286	( $\times 10^3$ ) meters/day
HY_C	Hydraulic conductivity (conduit)	3.048	9.144	6.096	( $\times 10^5$ ) meters/day
SS_P	Specific storage (porous medium)	4.00	6.00	5.00	( $\times 10^{-7}$ ) dimensionless
SS_C	Specific storage (conduit)	0.03	0.07	0.05	dimensionless
RCH	Recharge rate on the surface	0.00	0.03	0.01	meters/day
H_SL	Sea level at the submarine spring	-0.305	0.914	0.305	meters
PO_P	Porosity (porous medium)	0.001	0.005	0.003	dimensionless
PO_C	Porosity (conduit)	0.200	0.400	0.300	dimensionless
SC	Salinity at the submarine spring	0.0	35.0	35.0	PSU
DISP_P	Longitudinal dispersivity (porous medium)	6.10	12.20	10.00	meters
DISP_C	Longitudinal dispersivity (conduit)	0.15	0.60	0.30	meters

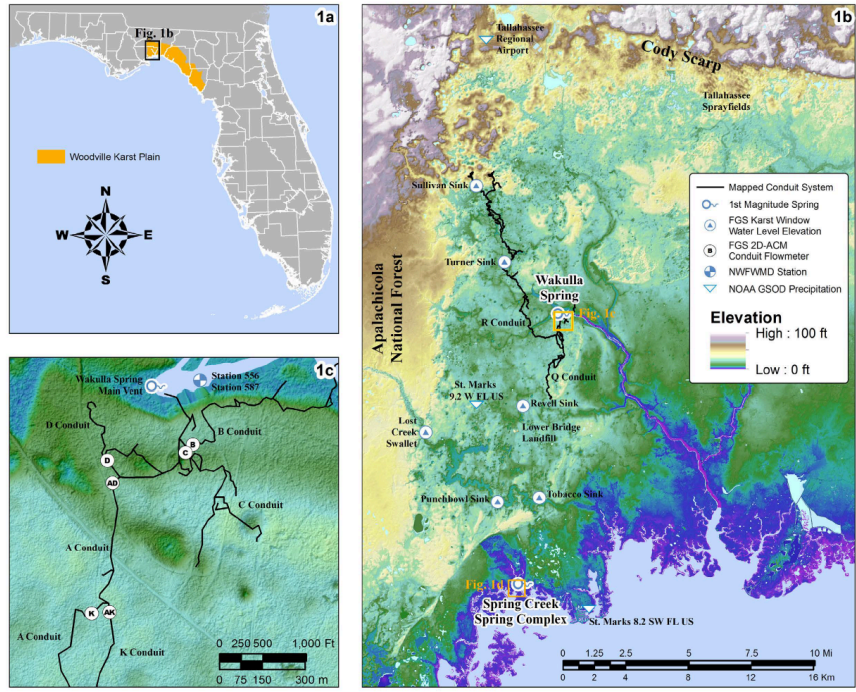


Figure 1. a) Locations of the Woodville Karst Plain (WKP) and the study site; b) The map of the Woodville Karst Plain showing the locations of features of note with the study; c) The detail of cave system near Wakulla Springs. Modified from Xu et al., (2016).


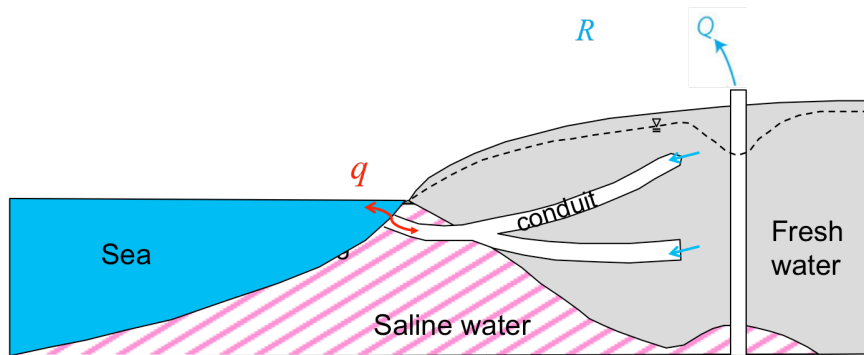


Figure 2. Schematic figure of a coastal karst aquifer with conduit networks and a submarine spring opening to the sea in a cross section. Flow direction  $q$  would be seaward when sea level drops, pumping rate  $Q$  is low and precipitation recharge  $R$  is large; however, reversal flow occurs when sea level rises, pumping rate  $Q$  is high or precipitation recharge  $R$  is small.

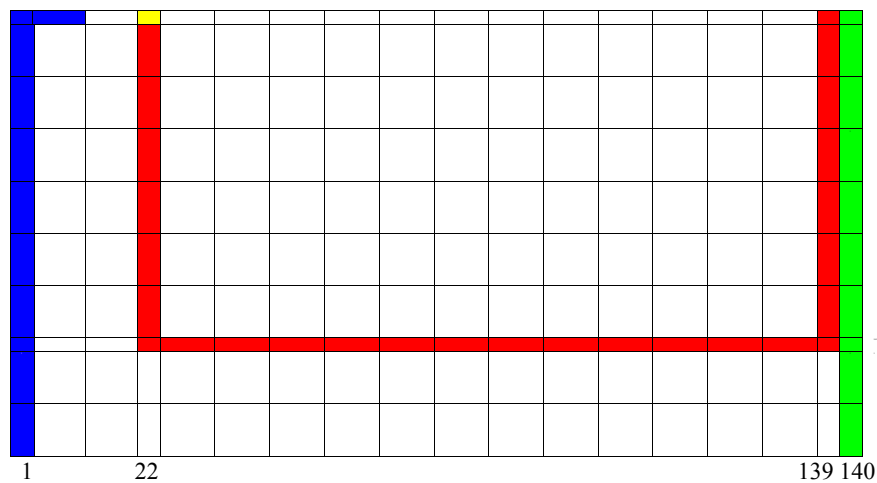

Explanations:

- Constant head and constant concentration of the submarine spring and outlet of karst conduit system, however, various in different cases of numerical models
- Sea-edge boundary: constant head (0.0 m in normal sea level case) and constant concentration (35 PSU)
- Inland boundary: constant head (1.52 m) and constant concentration (0 PSU)
- Conduit: high hydraulic conductivity, porosity and specific storage
- Porous medium: low hydraulic conductivity, porosity and specific storage

Deleted: ft

Deleted: 5.0

Deleted: ft

Figure 3. Schematic figure of finite difference grid discretization and boundary conditions applied in the SEAWAT model. Every cell represents 10 horizontal cells and 4 vertical cells, except the boundary and conduit layer in color with smaller width. The submarine spring is located at column #22, layer #1, and the inland spring is located at column #139, layer #1. The conduit system starts from the top of column #22, descends downward to layer #29, horizontally extends to column #139, and then rises upward to the top through column #139.

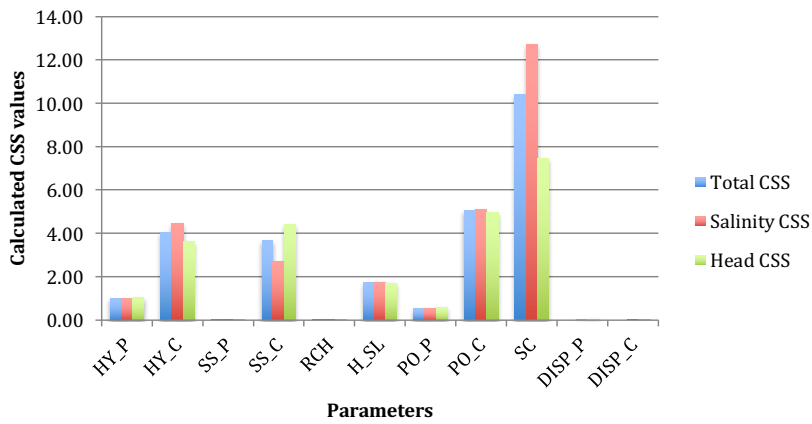


Figure 4. The CSSs (Composite Scaled Sensitivities) of all parameters with respect to simulations in the conduit (layer #29) in the local sensitivity analysis.

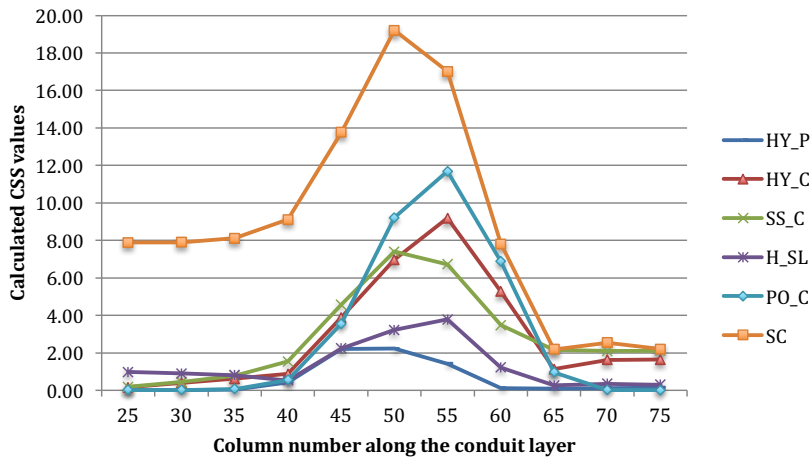


Figure 5. The CSSs (Composite Scaled Sensitivities) of selected parameters at different locations along the conduit layer (from column #25 to column #75) in the local sensitivity analysis.

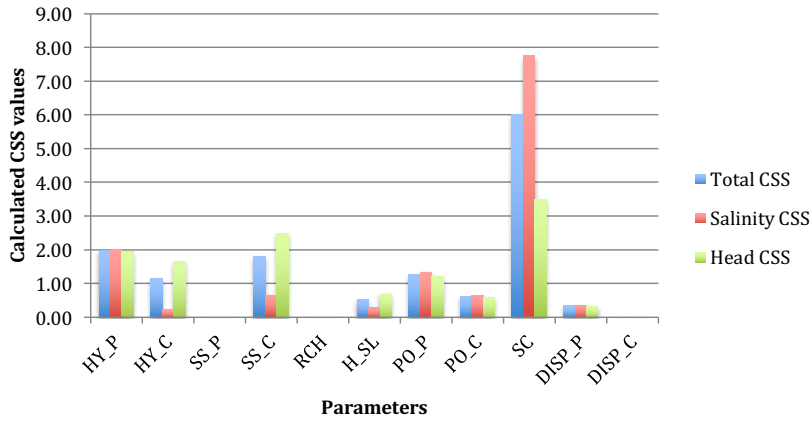


Figure 6. The CSSs (Composite Scaled Sensitivities) of all parameters with respect to simulations in the porous medium (layer #24) in the local sensitivity analysis.

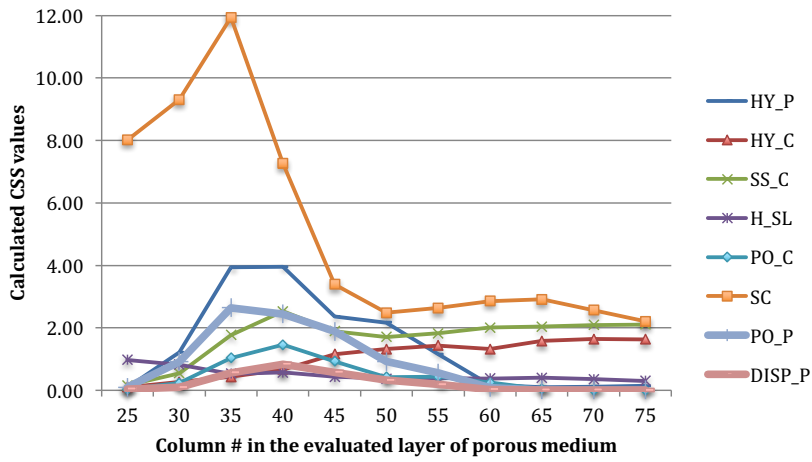


Figure 7. The CSSs (Composite Scaled Sensitivities) at different locations in the porous medium (from column #25 to column #75 at layer # 24) in the local sensitivity analysis.



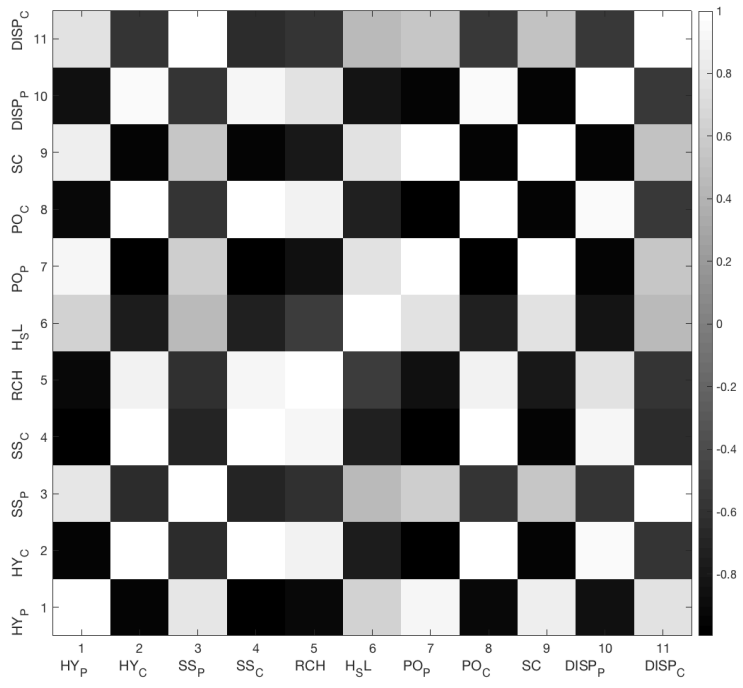


Figure 8. The Pearson-pattern correlation coefficient matrix for all eleven parameters.

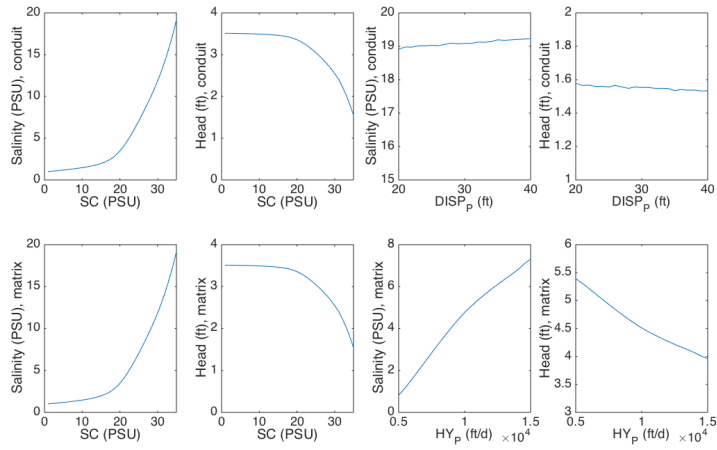


Figure 9. The non-linear relationship between head and salinity simulations with respect to parameters SC, DISP\_P and HY\_P. (Note that the scale for each plot is different).

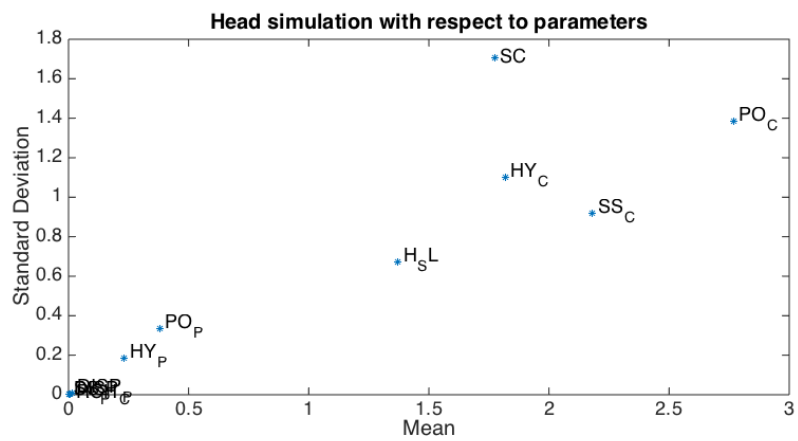
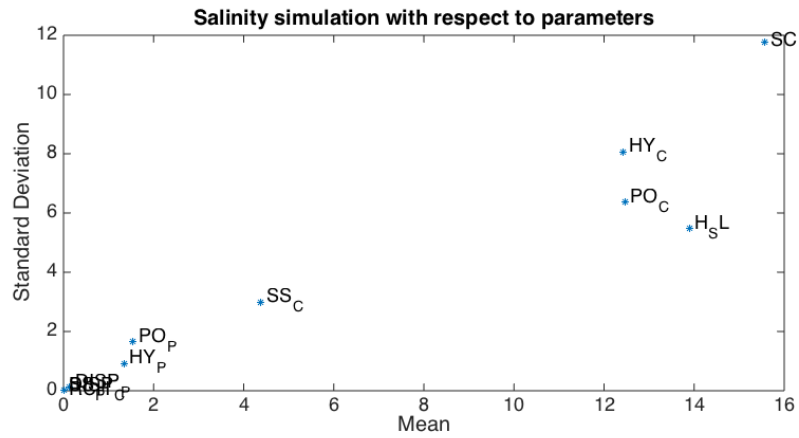


Figure 10. Mean and standard deviation of the EEs (elementary effects) of parameters with respect to simulations in the conduit (column #50, layer #29) in the global sensitivity analysis by Morris method: a) salinity simulation (top); b) head simulation (bottom).

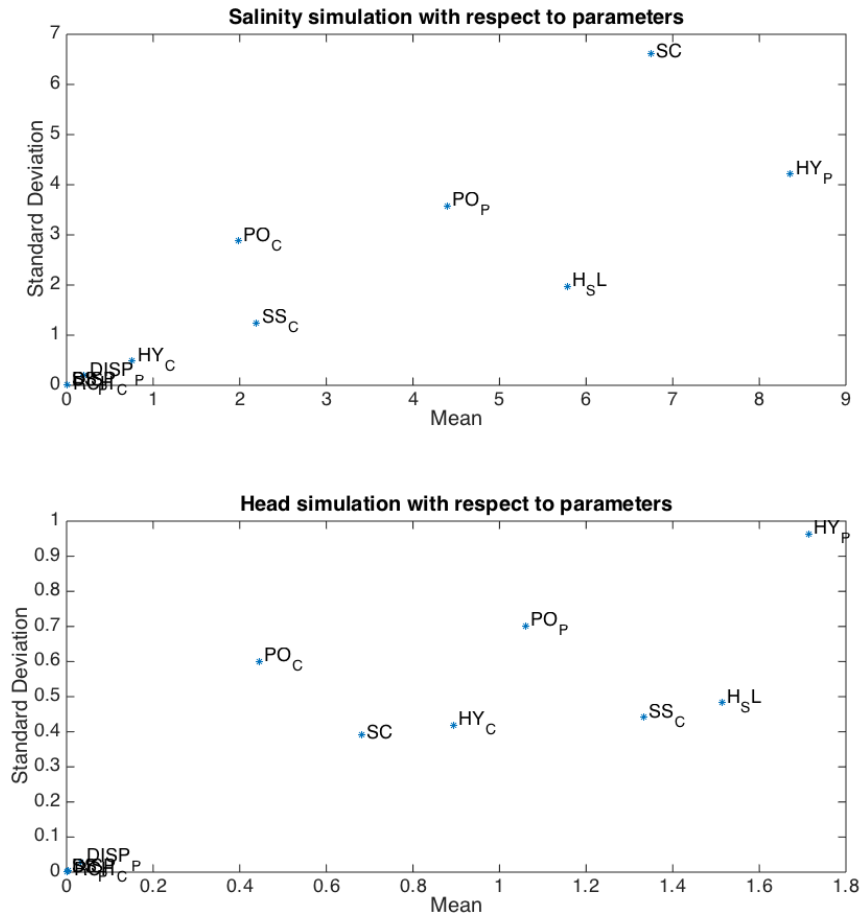


Figure 11. Mean and standard deviation of the EEs (elementary effects) of parameters with respect to simulations in the porous medium (column #35, layer #24) in the global sensitivity analysis by Morris method: a) salinity simulation (top); b) head simulation (bottom).



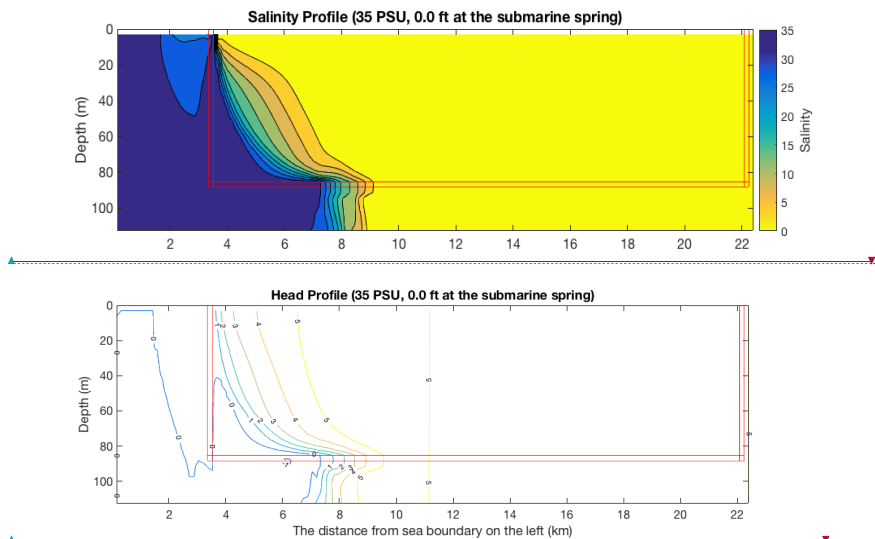


Figure 12. Salinity (top) and head (bottom) simulations of the maximum seawater intrusion benchmark case (35 PSU, 0.0 m at the submarine spring).

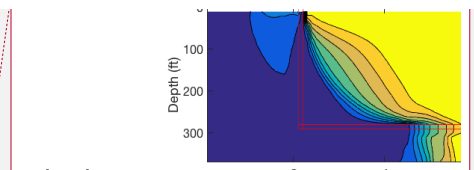


Deleted:  
Formatted: Font:Not Bold

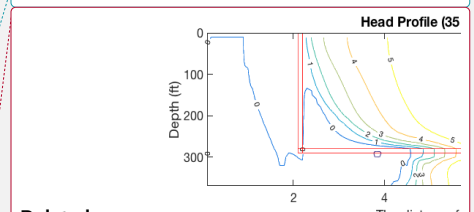


Deleted:  
Formatted: Font:Not Bold


Deleted: ft

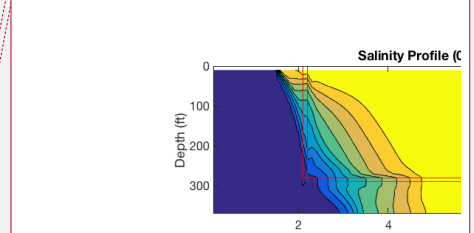


Deleted:

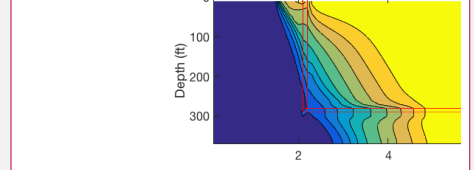

Deleted:

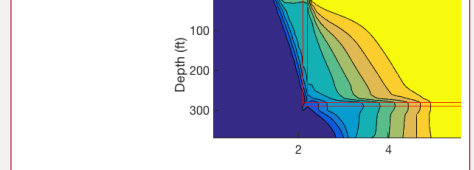

Deleted:

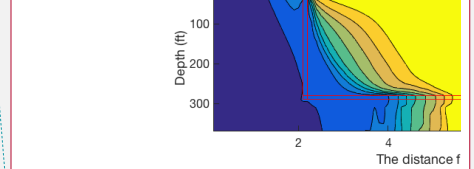

Deleted:

Formatted: Font:(Asian) SimSun

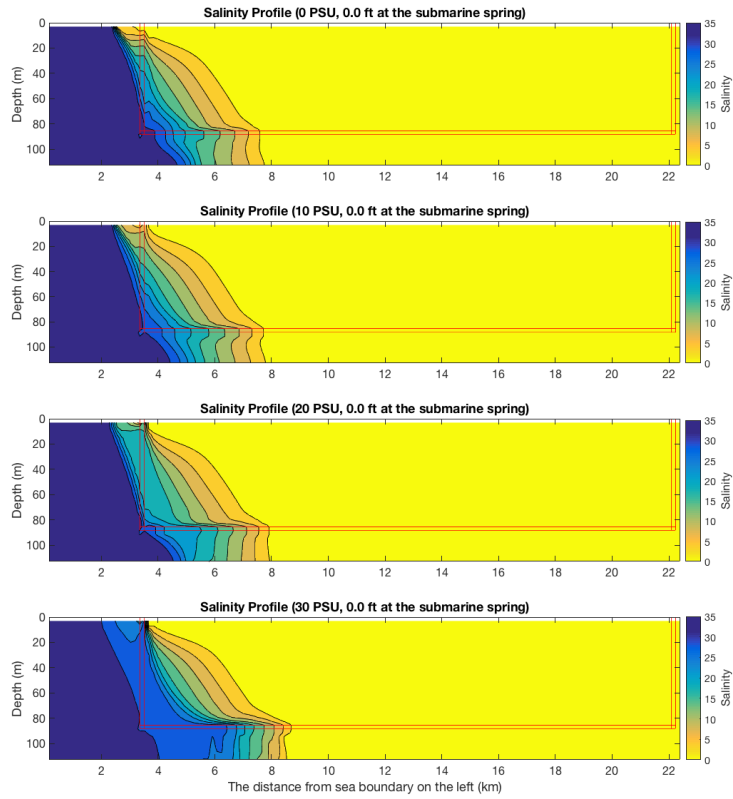


Figure 13. Salinity simulation of seawater intrusion with various salinity at the submarine spring, indicating different rainfall recharge and freshwater discharge conditions: A) 0.0 PSU, 0.0 m at the submarine spring; B) 10.0 PSU, 0.0 m at the submarine spring; C) 20.0 PSU, 0.0 m at the submarine spring; D) 30.0 PSU, 0.0 m at the submarine spring (from top to bottom).

Deleted: ft  
 Deleted: ft  
 Deleted: ft  
 Deleted: ft


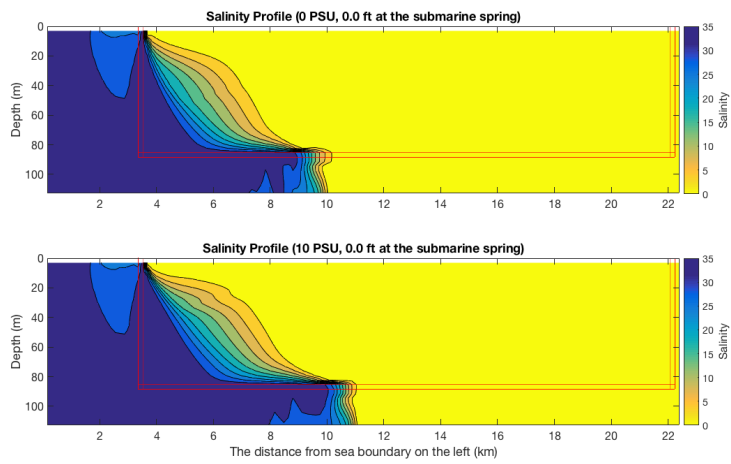


Figure 14. Salinity simulation of seawater intrusion with various sea level conditions: A) 35.0 PSU, 0.91 m at the submarine spring; B) 35.0 PSU, 1.82 m at the submarine spring (from top to bottom).

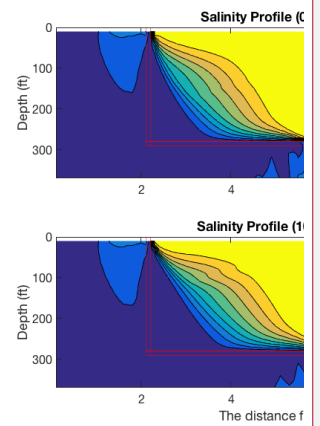

Formatted: Font:Not Bold, Not Italic

Deleted:  
 Formatted: Font:(Asian) SimSun  
 Deleted: 3.0 ft  
 Deleted: 6.0  
 Deleted: ft

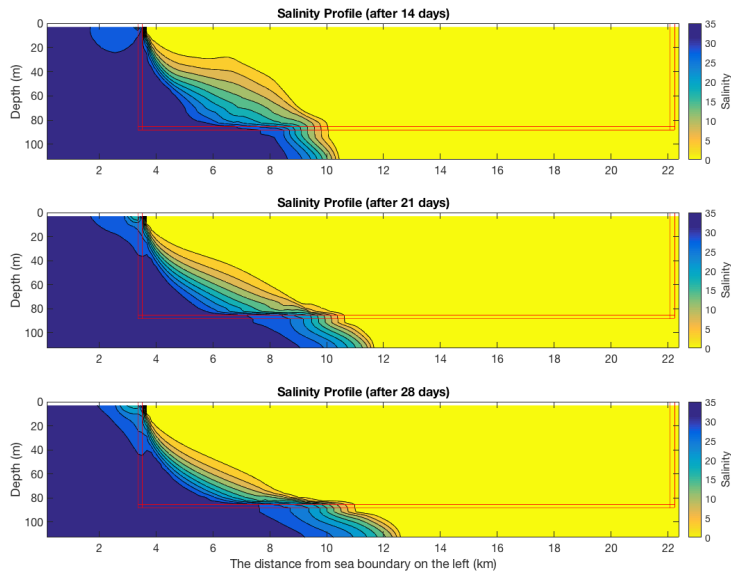


Figure 15. Salinity simulation of the maximum seawater intrusion benchmark case (35 PSU, 0.0 m at the submarine spring) with extend simulation time during a low rainfall period: A) 14-day simulation period; B) 21-day simulation period; C) 28-day simulation period (from top to bottom).

Formatted: Font:Not Bold

Deleted:  
Deleted: ft

This block contains three zoomed-in salinity profile plots, each labeled 'Salir'. The y-axis is 'Depth (ft)' from 0 to 300, and the x-axis is 'The distance from sea boundary on the left (km)' from 0 to 4. A red L-shaped line is present in each plot, starting at approximately 0.5 km on the x-axis and 200 ft on the y-axis. The plots show the progression of seawater intrusion over time, with the high-salinity region (yellow) moving further inland and deeper.