

Memorandum

To: Dr. Natascha Töpfer, Editor of Hydrology and Earth System Sciences

Subject: Revision of Paper hess-2018-181

Dear Editor:

Upon your recommendation, we have carefully revised Paper hess-2018-181 entitled “Reactive Transport with Wellbore Storages in a Single-Well Push-Pull Test” after considering all the comments made by the reviewers. The following is the point-point response to all the comments.

Response to Referee #1:

General Comments:

1. Based on Wang et al. (2017) and Phanikumar and McGuire (2010), this study proposes an extended model to interpret single-well push-pull (SWPP) tests in homogeneous reservoirs considering transient flow, well-bore storage and reactive transport. The improvements from Wang et al. (2017) concern the change in boundary conditions to better consider the effect of well-bore storage and the extension to reactive transport involving complex chemical reactions based on Phanikumar and McGuire (2010). To show the interest of this extended model, the authors revisited the interpretation of a published SWPP test data set by McGuire et al. (2002) and compared with the model of Phanikumar and McGuire (2010) (available on-line) used to interpret this data set. The authors highlighted that by neglecting the well-bore storage effects and the finite aquifer hydraulic diffusivity, it underestimates the dispersivity in this case, which is similar to Wang et al. (2017) conclusion. The influence of hydraulic diffusivity on reactive transport appears negligible except for low hydraulic diffusivity and nonlinear chemical reactions. In my opinion, the uniqueness of estimated parameters appears critical and should be addressed. In order to avoid some confusion, a sensitivity analysis should be also performed. Note that the code appears not available from the authors. Please find more details in the following.

Reply: Implemented. The sensitivity analysis of the flow field on BTCs in wellbore has been conducted (See Section 5.1), and the uniqueness of the BTCs has been investigated (See Section 5.2, and P18 Lines 6-9). The code of this study is free of charge upon request from the authors (See P8 Line 19).

2. The travel distance of the tracer from the tested well cannot be estimated from SWPP test without other information. Consequently, the dispersivity and the porosity cannot be estimated separately. The porosity must be fixed using other information in order to estimate the dispersivity from SWPP data set. It seems here that the porosity was assumed but without saying through which means. In addition, by considering the transient nature of the test, which results in two more parameters, it is not clear how

dispersivity and the hydraulic properties can be derived independently using the breakthrough curve (BTC) of SWPP test? This raises the question of the uniqueness of the solution and a sensitivity analysis would be helpful.

Reply: Implemented. We have discussed the method to determine the porosity (See P14 Lines 3 - 5). We have discussed how to determine the parameters of hydraulic properties (See P13 Lines 26 - 28). The sensitivity analysis of the flow field on BTCs in wellbore was conducted (See Section 5.1), and the uniqueness of the BTCs was investigated (See Section 5.2).

3. The discussion concerning the impact of the hydraulic diffusivity must be developed by providing an explanation of the mechanisms involved. Even though such discussion might require additional analysis, a simple discussion that only focus on the impact in the BTC appears relatively limited.

Reply: Implemented. We have analyzed the impact of the hydraulic diffusivity on solute transport in the SWPP test (See Sections 5.1 and 5.2, or P12 Line 8 to P14 Line 9).

4. The authors stated that by neglecting the effects of well-bore storage in the interpretation of the SWPP test, this could result in great errors. As mentioned by the authors, the BTC appears impacted at the early time (i.e., before the peak) and in terms of amplitude. In addition, as demonstrated by the authors, the first-order reaction rate can be interpreted through a simplified solution. Consequently, the effects of well-bore storage seem to impact only the early time of the BTC but not the late-time behavior, which is actually comparable to hydraulic tests. To evaluate properly the impact on the BTC with the assumptions considered in this work, a sensitivity analysis could be actually very useful. Indeed, even though the late-time behavior was not the subject of this work, mainly because the reservoir was assumed homogeneous, numerous studies have focused on the late-time behavior of BTC in heterogeneous media.

Reply: Implemented. The sensitivity analysis of the flow field on BTCs in wellbore was conducted (See Section 5.1, or P12 Line 8 to P13 Line 14).

5. As mentioned by the authors, the dispersivities obtained from the previous study and this study are 0.001 m and 0.015 m, respectively. In the user manual provided by Phanikumar, M.S., 2010, another acceptable simulation was performed with a dispersivity of 0.01 m (page 20), which is closed to the dispersivity obtained in this study. By looking at the values of the hydraulic conductivity and the specific storage in this manuscript, they are both perfectly rounded to 1.0 m/h and 1.0 E-5 1/m. Have these values been fixed? Because the authors stated that the hydraulic diffusivity influences the BTC in SWPP test, could the same match be obtained by fixing the dispersivity at 0.001 m and varying only the hydraulic diffusivity? The question of the uniqueness of the solution appears actually very critical. It is also not clear why the BTC was computed at $r = r_w + 0.15$ m and the impact on the result? The comparison with Phanikumar and McGuire (2010) must be completed by providing their interpretation.

Reply: Implemented. See the following discussion.

Response to the estimation of dispersivity: Although the dispersivities estimated by the previous study and this study are almost the same, the method used for the estimation of dispersivity in the previous study is questionable. This is because Phanikumar and McGuire (2010) employed the BTC in the aquifer

at $r = r_w + 0.15$ m to best fit the observed BTCs in the wellbore ($r = r_w$), as shown in Figure 11A of this study, or Figure 5 of Phanikumar and McGuire (2010), while the authors did not provide a convincing argument why to choose the BTCs in the aquifer to represent the BTCs in the wellbore. Furthermore, the use of “0.15 m” in their analysis appears to be an artifact (See P16 Lines 9-16).

Response to the estimation of hydraulic parameters: The influence of the hydraulic parameters could be ignored. This is because the estimated hydraulic diffusivity ($K_r / S_s = 1.0 \times 10^5$ m²/hour) is much greater than the hydraulic diffusivity of the medium sand of 4.17×10^2 m²/hour, and the BTC is insensitive to the flow field (See P17 Lines 7-8).

Response to the uniqueness of estimated parameters: When both dispersivity and porosity are unknown, the solutions are non-unique, as shown in Figure 8. However, when the porosity is given in advance, the estimation of dispersivity is unique (See P14 Lines 1-5). In this study, we mainly estimated the value of dispersivity, where the porosity is fixed and comes from the reference of Phanikumar and McGuire (2010). Therefore, the dispersivity is uniquely determined (See P17 Lines 8-10).

Response to the interpretation by Phanikumar and McGuire (2010): Phanikumar and McGuire (2010) did not explain why they choose the BTC at $r = r_w + 0.15$ m to conduct their analysis (See P16 Lines 9-16).

Specific Comments:

1. Page 3 – line 2: “Similarly, in the rest phase, the concentration is also not 0”: Even though some dead zones in some configurations can impact the concentration at the well-bore, note that this effect can be strongly reduced by pumping the water in the well-bore and injecting clean water at the same rate at the end of the injection.

Reply: Implemented. When the chaser phase is absent or the chaser concentration is not zero, the concentration might not be zero in the early stage of the rest phase. As for the chaser concentration, it is usually set as zero. However, under some circumstances, investigators may use a non-zero concentration for the chase phase. For example, Phanikumar and McGuire (2010) used 10 mg/L for Cl⁻ and 2 mg/L for SO₄²⁻ in their chase solutions. Therefore, the concentration at the well screen may not be zero at the early stage of the rest phase when the chase concentration was not zero (See P3 Lines 6-10).

2. Page 5 – line 20: Why not write the equation (7) and the others using the pore velocity?

Reply: Implemented (See Eq.(10) or P6 Line 14).

3. Page 5 – line 29: “The assumption works when the chase concentration is zero” This should be normally the case, isn’ t it?

Reply: Implemented. When the chaser phase is absent or the chaser concentration is not zero, the concentration might not be zero in the early stage of the rest phase. As for the chaser concentration, it is usually set as zero. However, under some circumstances, investigators may use a non-zero concentration for the chase phase. For example, Phanikumar and McGuire (2010) used 10 mg/L for Cl⁻ and 2 mg/L for

SO₄²⁻ in their chase solutions. Therefore, the concentration at the well screen may not be zero at the early stage of the rest phase when the chase concentration was not zero (See P3 Lines 6-10).

4. Page 8 – line 19: “. . . appears to be accurate and reliable” I would suggest estimating the difference between the two solutions, through for instance an indicator like the mean square residual. This require more points for the solution of Wang et al., 2017.

Reply: Implemented (See P9 Lines 23-24).

5. Page 18 – Figure 2: How do you explain the small oscillation in your solution?

Reply: Implemented. It shows a small oscillation in the numerical solutions, which might be caused by the numerical errors (See P9 Line 21).

6. Page 28 – Figure 10: Please add the interpretation of Phanikumar and McGuire (2010) for comparison. Technical corrections

Reply: Implemented. The observed and computed BTCs by Phanikumar and McGuire (2010) are added in Figures 12A and 12B for comparison (See Figures 12A and 12B).

7. Page 3 – line 17: remove “, so did Wang et al. (2017)”.

Reply: Removed.

8. Page 3 – line 24: remove “Such an effect is called storage effect of solute transport in this study “ as already stated line 2 at the same page.

Reply: Removed.

9. Page 3 – line 32: remove the extra “the”.

Reply: Removed.

10. Page 9 – line 5 to 10: Please use SI units like m/s for the hydraulic conductivity m²/s for the hydraulic diffusivity or g/l for the concentration.

Reply: Implemented. The unit of time is revised as hour, and the unit of concentration is revised as mg/l for the purpose of comparison. This is consistent with the time unit used in most cited references.

11. Page 12 – line 25: Correct “PPTSE” by “PPTST”.

Reply: Implemented (See P16 Line 20).

12. Page 13 – line 22: Remove “In this study” or “of this study”.

Reply: Removed (See P17 Line 2).

13. Page 18 – Figure 3a: Units need to be specified for the concentration. Same comments for the figures 3b, 4 and 10.

Reply: Implemented (See Figures 4a, 4b, 5, 8, 12A, 12B, and 14).

14. Page 23, 24 – Figures 6 and 7: Different units for the time are used while the axes are similar.

Reply: Revised (See Figure 11).

15. Page 27 – Figure 9: Flow velocity is written using q_r while it should be v_r .

Reply: Revised (See Figure 13).

Response to Referee #2:

General Comments:

1. The authors presented a study to extend the Phanikumar and McGuire (2010) model for the single-well push-pull (SWPP) tests in homogeneous, isotropic aquifers by replacing the oversimplified boundary conditions with more complex conditions to account for wellbore storage effect (the Model). The Phanikumar and McGuire (2010) model is a polar coordinate mathematical model used to interpret SWPP tests involving multi-species reactive transport problems with non-linear reactions. The aim of the study was to reduce the potential errors that may be introduced by ignoring the storage effect in the previous models. The authors verified the accuracy of the Model by comparing the breakthrough curves (BTCs) modeled by the proposed mode with those generated by the Wang et al. (2017) model. The Wang et al. (2017) model is a similar expansion the Phanikumar and McGuire (2010) model accounting for wellbore storage with respect to groundwater flow. The difference is that the Model accounts for wellbore effects with respect to solute concentration, in addition to flow. Lastly, the authors used the Model to interpret the breakthrough curves (BTCs) of a SWPP field test reported by McGuire et al. (2002) and compared with interpretation of the same BTCs by the Phanikumar and McGuire (2010) model. I have no issues with how the wellbore boundary conditions are formulated. However, I have concerns on the approach the authors taken to verify the Model, which may cast doubts on the practical usefulness of the Model,

Reply: Implemented. We have verified the model of this study using MODFLOW/MT3DMS (See Figure 3, and P10 Lines 3-13).

2. Figure 2 shows the comparison between the BTCs modeled by the Model versus those modeled by Wang et al. (2017). But models were used to model the BTCs of hypothetical SWPP tests in three different porous media of fine, medium and coarse sands with typical hydraulic parameters found in

textbooks. Figures 3 and 4 illustrate the differences in the BTCs attributable to the wellbore concentration effects. The authors argued the numerical solution of Wang et al. (2017) was chosen to verify the Model because benchmark analytical solutions of the SWPP test with a finite hydraulic diffusivity are not available up to date. An alternative approach is to verify the Model using a solution given by a widely used modeling software, such as MODFLOW-SURFACT or FEFLOW (The authors are incorrect to state that commercial numerical software packages are incapable of accurately incorporating the wellbore boundary efforts).

Reply: Implemented.

Response to verify the model of this study: We used MODFLOW/MT3DMS to test the model of this study (See Figure 3, and P10 Lines 3-13).

Response to errors in MODFLOW-SURFACT or FEFLOW: It is necessary to test the accuracy of the new models against the commercial numerical software packages, like MODFLOW/MT3DMS. Unfortunately, the current three-dimensional models in the MODFLOW/MT3DMS may create some errors in describe the solute transport in the wellbore-confined aquifer. The errors come from an assumption that the water volume in the wellbore is computed by a product of wellbore cross section and the aquifer thickness, which is incorrect. The actual water volume in the wellbore should be computed by a product of wellbore cross section and the water level in the wellbore (See Supplemental Materials for detailed explanation, and Wang et al. (2018, WRR)). The models of solute transport in MODFLOW/MT3DMS are the same with the models in MODFLOW-SURFACT or FEFLOW.

3. To demonstrate its applicability, the Model was used to interpret the BTCs reported in McGuire (2002) in comparison with the Phanikumar and McGuire (2010) model (Figures 6, 7, and 10). Because both models were able to replicate the BTCs, the authors included additional scenarios with varied parameters to demonstrate the differences between the two models. It would be much more compelling to use the field test whose BTCs could not be replicated by the Phanikumar and McGuire (2010) but can be reproduced by the Model. This would alleviate the concern about the necessity of introducing additional complexity into a groundwater model which is known to be subject to parameter uncertainties. In case that such a field test is not available, the authors may consider using a data set modeled using a modeling software such as MODFLOW-SURFACT or FEFLOW.

Reply: As mentioned in reply to comment #2 of this reviewer, because of the problem of MODFLOW/MT3DMS for computing the wellbore water volume, it is not advisable to using a synthetic data set generated using a modeling software such as MODFLOW-SURFACT or FEFLOW (See Supplementary Materials for detailed explanation of this issue).

4. Consider adding a list of acronyms defining the physical meanings of the different symbols.

Reply: Implemented (See Nomenclature).

Specific Comments:

1. Abstract. The abstract should be revised to eliminate the discussion of the details such as the Freundlich, Langmuir and linear sorption models, one-site kinetic sorption model, two-site sorption model, and Monod or Michaelis-Menten kinetics. These are not the core subject of this study.

Reply: Implemented (See Abstract).

2. Page 2, line 7. Change to: “the model which is expected to properly represent the physical...”

Reply: Implemented (See P2 Line 5).

3. Page 2, line 26-27, change to: “...however, such model only considered wellbore storage effects with respect to groundwater flow, but not solute concentrations.”

Reply: We have revised it (See P2 Lines 26-27).

4. Page 2, line 33, change to: “...concentration of the solute in the wellbore is smaller than that of the original solution...”

Reply: Implemented (See P2 Line 32).

5. Page 3, line 11. It is incorrect to state that none of the four software packages could deal with multispecies reactive transport problems with non-linear reactions. Both MODFLOW-SURFACT and FEFLOW can.

Reply: Such a statement has been deleted.

6. Page 3, line 29. Define hydraulic diffusivity at its first appearance. Hydraulic diffusivity is a term used mostly in soil physics, not groundwater hydrology.

Reply: Implemented (See P2 Lines 22-23).

7. Page 7, line 9. Change to: “...reactive processes considering wellbore effects not only for groundwater flow but also for solute contrations.”

Reply: Implemented (See P8 Lines 8-9).

8. Page 9, line 1. It is not clear what does it mean by “Subject to the discharge or recharge of the well,..” Please revise.

Reply: Implemented (See P10 Lines 21-22).

If you have any further questions about this revision, please contact me.

Sincerely Yours,

Hongbin Zhan, PhD, PG.

Professor and

Holder of Endowed Ray C. Fish Professorship

A handwritten signature in black ink that reads "Hongbin Zhan". The signature is written in a cursive style with a long, sweeping underline.

Reactive Transport with Wellbore Storages in a Single-Well Push-Pull Test

Quanrong Wang^{1,2,3} and Hongbin Zhan^{3*}

5

¹Laboratory of Basin Hydrology and Wetland Eco-restoration, China University of Geosciences, Wuhan, Hubei, 430074, P. R. China

²School of Environmental Studies, China University of Geosciences, Wuhan, Hubei, 430074, P. R. China

³Department of Geology and Geophysics, Texas A& M University, College Station, TX 77843-3115, USA

10

Correspondence to: Hongbin Zhan (zhan@geos.tamu.edu)

Abstract: Using the single-well push-pull (SWPP) test to determine the in situ biogeochemical reaction kinetics, a chase phase and a rest phase were recommended to increase the duration of reaction, besides the injection and extraction phases. In this study, we presented multi-species reactive models of the four-phase SWPP test considering the wellbore storages for both groundwater flow and solute transport and a finite aquifer hydraulic diffusivity, which were ignored in previous studies. The models of the wellbore storage for solute transport were proposed based on the mass balance, and the sensitivity analysis and uniqueness analysis were employed to investigate the assumptions used in previous studies on the parameter estimation. The results showed that ignoring it might produce great errors in the SWPP test. In the injection and chase phases, the influence of the wellbore storage increased with the decreasing aquifer hydraulic diffusivity. The peak values of the breakthrough curves (BTCs) increased with the increasing aquifer hydraulic diffusivity in the extraction phase, and the arrival time of the peak value became shorter with a greater aquifer hydraulic diffusivity. Meanwhile, the Robin condition performed well at the rest phase only when the chase concentration was zero and the solute in the injection phase was completely flushed out of the borehole into the aquifer. The Danckwerts condition was better than the Robin condition even when the chase concentration was not zero. The reaction parameters could be determined by directly best fitting the observed data when the non-linear reactions were described by piece-wise linear functions, while such an approach might not work if one attempted to use non-linear functions to describe such non-linear reactions. The field application demonstrated that the new model of this study performed well in interpreting BTCs of a SWPP test.

20

25

1. Introduction

Single-well push-pull (SWPP) test is a popular technique to characterize the in situ geological formations and to remedy the polluted aquifer by a series of biogeochemical reactions (Istok, 2012; Phanikumar and McGuire, 2010; Schroth and Istok, 2006). Therefore, the accuracy of the results is not only dependent on the experimental operation, but also on the conceptual model which is expected to properly represent the physical and biogeochemical processes. Unfortunately, most previous studies of the multi-species reactive transport models were based on some assumptions which may not be satisfied in actual applications, although those assumptions usually simplified the mathematical treatment of the problem (Istok, 2012; Wang et al., 2017).

As for the analytical solutions of the SWPP test, they have been widely used for applications, due to the high efficiency and great accuracy of the solutions, like the model of Gelhar and Collins (1971) for a fully penetrating well, the model of Schroth and Istok (2005) for a point source/sink well, and the model of Huang et al. (2010) for a partially penetrating well, assuming that the advection, the dispersion and the first-order reaction were involved in the transport processes. Haggerty et al. (1998) and Snodgrass and Kitanidis (1998) presented a simplified method based on a well-mixed reactor to estimate the first-order and zero-order reaction rate, without involving complex numerical modelling. Schroth and Istok (2006) provided two alternative models, one of them was a plug-flow model and the other was a variably mixed reactor model. Schroth et al. (2000) presented a simplified method for estimating retardation factors, based on the model of Gelhar and Collins (1971). Istok et al. (2001) extended the models of Haggerty et al. (1998) and Snodgrass and Kitanidis (1998) to estimate the Michaelis-Menten kinetic parameters which were used to describe the microbial respiration in the aquifer. Jung and Pruess (2012) presented a closed-form analytical solution for heat transport in a fracture aquifer involving a push-and-pull procedure. However, the mentioned-above analytical or semi-analytical solutions of the SWPP test were based on some over-simplified assumptions. For instance, the hydraulic diffusivity of the aquifer was assumed to be infinite, resulting in a time-independent flow velocity, where the hydraulic diffusivity is the ratio of the radial hydraulic conductivity over the specific storage. The wellbore storage effect on the flow field was assumed to be negligible as well. Therefore, how accurate could parameter estimation be needs to be tested? Recently, Wang et al. (2017) investigated the influences of a finite hydraulic diffusivity on the results and found that it might be significant, since both advective and dispersive transport were related to the flow velocity. One point to note is that the model of Wang et al. (2017) still contains an additional issue that has not been addressed: the wellbore storage influence on solute transport, which will be the focal point of this investigation.

The wellbore storage for solute transport refers to the variation of the solute injected in the wellbore during the processes of the test. A complete SWPP test contains four principle phases: injection of a prepared solution (tracer) into a targeted aquifer; injection of a chaser; rest period; extraction of the mixture solution. The second and third phases are optional but are recommended to extend the reaction time of the tracer in the aquifer. In the injection phase, the concentration of the solute in the wellbore is smaller than that of the original solution at the early stage, since the original solute could be diluted by the original water in the wellbore, due to the mixing effect. Therefore, excluding the wellbore

storage may overestimate the concentration in the wellbore at the early stage of the injection phase before the pre-test water inside the wellbore was completely flushed out of the borehole into the aquifer. In the chaser phase, the concentration of the solute in the wellbore may be greater than the concentration of the chaser, due to the mixing effect. The treatment of excluding the wellbore storage could underestimate the concentration in the wellbore at the early stage of the chase phase, due to the high concentration of solute in the wellbore at the end of the injection phase. When the chaser phase is absent or the chaser concentration is not zero, the concentration might not be zero in the early stage of the rest phase. As for the chaser concentration, it is usually set as zero. However, under some circumstances, investigators may use a non-zero concentration for the chase phase. For example, Phanikumar and McGuire (2010) used 10 mg/L for Cl⁻ and 2 mg/L for SO₄²⁻ in their chase solutions. Therefore, the concentration at the well screen may not be zero at the early stage of the rest phase when the chase concentration was not zero. All these mixing effects occurring in the wellbore is named wellbore storage of the solute transport. Obviously, the assumption of ignoring the wellbore storage is not reasonable for the solute transport.

Actually, the above-mentioned assumptions used in the analytical and semi-analytical solutions can be relaxed in the numerical models, such as MODFLOW/MT3DMS (Harbaugh et al., 2000; Zheng and Wang, 1999), FEFLOW (Diersch, 2014), SUTRA (Voss, 1984), STOMP (Nichols et al., 1997), and so on. Huang et al. (2010), Sun (2016), Haggerty et al. (1998), and Schroth and Istok (2006) respectively employed such four software packages to carry out numerical simulations of SWPP tests, mainly involving advection, dispersion and first-order reaction. Unfortunately, the current three-dimensional models in the Cartesian coordinate system may create some errors in describing the wellbore storage of solute transport in the wellbore-confined aquifer, which is explained in Supplemental Materials.

This study addresses multi-species reactive transport associated with SWPP tests with a better conceptual model that acknowledges the realistic circumstances that have been either overlooked or overly simplified in previous investigations. Firstly, we will employ a more realistic finite hydraulic diffusivity instead of an infinite hydraulic diffusivity to describe the flow field. Secondly, we will propose a better way to handle the boundary condition of transport at the wellbore by consider the wellbore storage effect for both groundwater and solute transport during the SWPP tests. Thirdly, the new model is tested using a field test dataset reported in McGuire et al. (2002). Fourthly, the sensitivity analysis and uniqueness analysis will be employed to investigate the assumptions used in previous studies on the parameter estimation.

2. Problem statement of the SWPP test

A cylindrical coordinate system is adopted with the r -axis horizontal and the z -axis vertically upward, as shown in Figure 1. The origin is at the centre of the well and located in the plane of symmetry of the aquifer. The well fully penetrates a confined aquifer with a constant thickness. The aquifer is homogeneous, and the influence of the regional flow could be ignored.

2.1 Revisit of the previous model

The general form of the governing equation for a multi-species reactive SWPP test is

$$\frac{\partial C_i}{\partial t} + \frac{\rho_b}{\theta} \frac{\partial S_i}{\partial t} = - \sum_{j=1}^{N-1} [\mathcal{H}(t - t_j^*) - \mathcal{H}(t - t_{j+1}^*)] \lambda_j C_i^{n_j} \pm F_j, t > 0, \quad (1)$$

where C_i is the aqueous phase concentration of the i^{th} reactive solute, S_i is the solid phase concentration of the i^{th} reactive solute, t is the time in the SWPP test, ρ_b is the bulk density, θ is the porosity, \mathcal{H} is the Heaviside step function, λ_j and n_j are the constant and orders, N is the number of the segment, t_j^* and t_{j+1}^* are the times at two ends of segment j , and F_j Monod/Michaelis-Menten kinetics. For the purpose of the simplicity, we only present the reactive processes of the chemicals as described by Eq. (1), while the expressions of the transport (e.g. dispersion, diffusion, and advection) could be seen in Phanikumar and McGuire (2010) which used it to describe biogeochemical reactive transport of an arbitrary number of species including Monod/Michaelis-Menten kinetics, and the sorption models could be isotherm (Freundlich, Langmuir and linear sorption), one-site kinetic and two-site kinetic. As for the studies of Gelhar and Collins (1971), Schroth and Istok (2005), Huang et al. (2010), Haggerty et al. (1998), Snodgrass and Kitanidis (1998), Schroth and Istok (2006), Schroth et al. (2000), Istok et al. (2001), Jung and Pruess (2012), Wang et al. (2017), and so on, the governing equation is a special case of Eq.(1).

As mentioned in Introduction, several assumptions may be debatable in previous studies and could be the source of errors for the actual applications. Firstly, the transport model is composed of a set of advection-dispersion equations (ADEs) built on the basis of flow velocity which is assumed to be time-independent (Chen et al., 2017; Gelhar and Collins, 1971; Huang et al., 2010; Phanikumar and McGuire, 2010):

$$v_r = \frac{Q}{2\pi r B \theta}, r \geq r_w, \quad (2)$$

where r_w is the well radius; r is the radius distance from the centre of the well; B is the aquifer thickness; Q is the flow rate of the well; $v_r = u_r/\theta$ is the average radial pore velocity and u_r is the radial Darcian velocities. Eq. (2) implies that the hydraulic diffusivity of the aquifer is infinite, thus the flow velocity is independent of time. Meanwhile, the wellbore storage is negligible or the well radius r_w is assumed to be infinitesimal in formulating Eq. (2).

The second assumption of the model is the boundary condition of the well screen in the rest phase of the SWPP test, in which a Robin condition (or a third-type condition) is employed to describe the aqueous solute transport (Chen et al., 2017; Phanikumar and McGuire, 2010; Wang et al., 2017):

$$\left(v_r C - D_r \frac{\partial C}{\partial r} \right) \Big|_{r=r_w} = 0, t_{inj} + t_{cha} < t \leq t_{inj} + t_{cha} + t_{res}, \quad (3)$$

where t_{inj} , t_{cha} , t_{res} , and t_{ext} , represent the durations of the injection, chase, rest, and extraction phases, respectively; C is resident concentration of the aqueous phase to represent C_i in Eq. (1); D_r is the dispersion coefficient, which is

$$D_r = \alpha_r v_r + D_0, \quad (4)$$

in which α_r is the radial dispersivity; D_0 is the effective diffusion coefficient in the aquifer.

Thirdly, a constant solute concentration in the wellbore is applied in the injection and chase phases without considering the solute diluted effect in the wellbore (Chen et al., 2017; Gelhar and Collins, 1971; Istok, 2012; Phanikumar and McGuire, 2010; Wang et al., 2017)

$$\left(v_r C - D_r \frac{\partial C}{\partial r} \right) \Big|_{r=r_w} = v_r C_0^{inj}, \quad 0 < t \leq t_{inj}, \quad (5a)$$

$$\text{or } C|_{r=r_w} = C_0^{inj}, \quad 0 < t \leq t_{inj}, \quad (5b)$$

$$\left(v_r C - D_r \frac{\partial C}{\partial r} \right) \Big|_{r=r_w} = v_r C_0^{cha}, \quad t_{inj} < t \leq t_{inj} + t_{cha}, \quad (6a)$$

$$\text{or } C|_{r=r_w} = C_0^{cha}, \quad t_{inj} < t \leq t_{inj} + t_{cha}, \quad (6b)$$

where C_0^{inj} and C_0^{cha} represent the solute concentrations injected into the wellbore during the injection and chase phases, respectively. A detailed discussion about mentioned-above assumptions can be seen in Phanikumar and McGuire (2010) or Wang et al. (2017).

Fourthly, the solute transport caused by dispersion and advection was assumed to be negligible in estimating the reaction rates. For instance, one of the simplest models of such reactions may be the first-order reaction

$$\frac{\partial C}{\partial t} = -\lambda C, \quad (7)$$

where λ is the first-order reaction rate constant. Beside the first-order reaction, Eq. (7) could be used to describe the first-order biodegradation and radioactive decay. Haggerty et al. (1998) presented a simplified method to estimate λ for the SWPP test:

$$\ln \left(\frac{C_{rec}(t^*)}{C_{tra}(t^*)} \right) = \ln \left(\frac{1 - \exp(-\lambda t_{inj})}{\lambda t_{inj}} \right), \quad (8)$$

where t^* is time since the end of injection; $C_{rec}(t^*)$ is the reactant concentration; $C_{tra}(t^*)$ is the concentration of a conservative tracer. To obtain the value of λ , the reactant and the conservative tracer should be fully mixed and injected into the aquifer simultaneously to conduct the SWPP test. After measuring the data of $C_{rec}(t^*)$ and $C_{tra}(t^*)$ in the extraction phase, one could fit the data of $\ln \left(\frac{C_{rec}(t^*)}{C_{tra}(t^*)} \right) \sim t^*$ using a linear function and the slope of t^* is the estimation of λ . Snodgrass and Kitanidis (1998) derived a similar model for estimating λ :

$$\ln \left(\frac{C_{rea}(t^*)}{C_{tra}(t^*)} \right) = \ln \left(\frac{C_{rec}^0}{C_{tra}^0} \right) - \lambda t^*. \quad (9)$$

Comparing Eq. (8) with Eq. (9), one could find that the difference is the first terms on the right sides of equations, while λ is the slope for both Eqs. (8) and (9). Although the accuracy of both models has been tested by a number of investigators, previous studies on reactive transport were based on an assumption that the aquifer hydraulic diffusivity was infinite (e.g. Eq. (1) of Reinhard et al. (1997) , and Eq. (2) of Haggerty et al. (1998)).

5 Actually, the assumptions of Eqs. (2) - (9) are debatable for the actual applications, and may cause errors in modelling the solute transport in the SWPP test. The second and third assumptions relate to the wellbore storage of the solute transport in the SWPP test. In the following section, the new models will be proposed to investigate the potential errors when these assumptions are involved.

2.2 A revised model with a finite hydraulic diffusivity

10 As for the first assumption in Section 2.1, Wang et al. (2017) demonstrated that it might result in non-negligible errors in parameter estimation, particularly for the estimation of dispersivity. A minor point to note is that the model of Wang et al. (2017) mainly focused on conservative solute transport, rather than reactive transport. Nevertheless, the pore velocity of transient flow is calculated by Darcy's law

$$v_r = \frac{K_r}{\theta} \frac{\partial s}{\partial r}, \quad (10)$$

15 where K_r is the radial hydraulic conductivity; s is drawdown which could be obtained by solving the following mass balance equation with the proper initial and boundary conditions

$$\frac{\partial v_r}{\partial r} + \frac{v_r}{r} = \frac{S_s}{\theta} \frac{\partial s(r,t)}{\partial r}, \quad r \geq r_w, \quad (11)$$

$$s(r, t)|_{t=0} = 0, \quad (12)$$

$$v_r|_{r \rightarrow \infty} = 0, \quad (13)$$

20 $(2\pi B v_r)|_{r=r_w} - \frac{\pi r_w^2}{\theta} \frac{ds_w(t)}{dt} = Q, \quad (14)$

where S_s is the specific storage of aquifer; s_w is the drawdown inside the wellbore.

As for the second assumption in the rest phase, as shown Eq. (3), it implies that the concentration of solute is zero in the wellbore. This assumption works when the chase concentration is zero and the prepared solution is completely pushed out of the borehole into the aquifer at the end of the chase phase. However, the chase concentration might be not zero, as demonstrated in Phanikumar and McGuire (2010) and McGuire et al. (2002). Consequently, the concentration in the early stage of the rest phase, which is close to the concentration at the end of the chase phase, is not zero. This is because the water level in the wellbore is greater than the hydraulic head in the surrounding aquifer due to the wellbore storage, resulting in a positive flux from the wellbore into the aquifer. Correspondingly, when the chase concentration is not zero or the prepared

solution in the injection phase is not completely pushed out of the wellbore, the concentration in the wellbore may not be zero in the early stage of the rest phase. In this study, we employed the Danckwerts condition for transport at the well screen in the rest period (Danckwerts, 1953)

$$\left. \frac{\partial C}{\partial r} \right|_{r \rightarrow r_w^-} = 0, \quad t_{inj} + t_{cha} < t \leq t_{inj} + t_{cha} + t_{res}. \quad (15)$$

5 Actually, Eq. (15) acknowledges the continuity of concentration and continuity of mass flux simultaneously across the well screen, namely, $C|_{r \rightarrow r_w^-} = C|_{r \rightarrow r_w^+}$ and $(v_r C)|_{r \rightarrow r_w^-} = \left(v_r C - D_r \frac{\partial C}{\partial r} \right) \Big|_{r \rightarrow r_w^+}$, where $-$ and $+$ signs in the subscript of r_w represent approaching the well screen from inside the well and outside the well, respectively.

The third assumption mentioned in Section 2.1 seems not reasonable at the early stage of the injection and chase phases, because the concentration of the injected solute will be affected by the finite volume of water in the wellbore. Take the chase phase as an example: it is impossible to immediately reduce the solute concentration inside the wellbore from a certain level during the tracer injection phase to zero when switching to the chase phase, even when the solute concentration in the chase phase is zero. This is because the wellbore with a finite radius contains a certain finite mass of solute at the moment of switching from injection of a tracer to injection of a chaser. Therefore, it will take some time to completely flush out the residual tracer inside the wellbore after the start of the chase phase, and a larger wellbore will take a longer time to flush out the residual tracer inside the wellbore. This means that the concentration at the wellbore/aquifer interface will not drop to zero immediately after the start of the chase phase. Instead, it will take a finite period of time to gradually approach zero during the chase phase. Similarly, the boundary condition of the well screen in the injection phase might not be appropriate in previous studies if the wellbore storage effect is of a concern. Therefore, the value of solute concentration inside the wellbore should be smaller or equal to C_0^{inj} in the injection phase and greater or equal to C_0^{cha} in the chase phase.

20 Here, we will develop a new approach to take care of the concentration in the wellbore in the injection and chase phases based on the mass balance principle, i.e.,

$$\Delta m = C_0^{inj} Q \Delta t = C_w^{t+\Delta t} (V^t + Q \Delta t) - C_w^t V^t, \quad 0 < t \leq t_{inj}, \quad (16)$$

$$\Delta m = C_0^{cha} Q \Delta t = C_w^{t+\Delta t} (V^t + Q \Delta t) - C_w^t V^t, \quad t_{inj} < t \leq t_{inj} + t_{cha}, \quad (17)$$

where Δm represents the mass entering into the well during time interval Δt ; C_w^t and $C_w^{t+\Delta t}$ represent the solute concentrations in the wellbore at the time t and $t + \Delta t$, respectively; V^t represents the volume of water in the wellbore at the time t . The initial values of C_w^t and V^t at the injection phase are

$$C_w^t|_{t=0} = 0, \quad (18)$$

$$V^t|_{t=0} = \pi r_w^2 (H_w|_{t=0}), \quad (19)$$

where H_w represents the water depth of the wellbore.

In the chase phase, one has

$$C_w^t|_{t=t_{inj}^-} = C_w^t|_{t=t_{inj}^+}, \quad (20)$$

$$V^t|_{t=t_{inj}^+} = \pi r_w^2 \left(H_w|_{t=t_{inj}^+} \right), \quad (21)$$

where the - and + signs in the subscripts of Eqs. (20) - (21) hereinafter represent approaching the limit from left and right sides of t_{inj} , respectively.

2.3 Capability of the new SWPP model of this study

Different from the model of Wang et al. (2017), the multi-species reactive transport models are used to describe the non-linear biogeochemical [reactive processes considering wellbore effects not only for groundwater flow but also for solute concentrations](#). The new model of this study is an extension of Phanikumar and McGuire (2010) that ignored the wellbore storage for both groundwater flow and solute transport, and assumed that the aquifer hydraulic diffusivity was infinite. The Danckwerts condition rather than the Robin condition is applied at the well screen in the rest phase of this study. Therefore, the new model is more powerful in describing an arbitrary number of species and user-defined reaction rate expressions, including Monod/Michaelis-Menten kinetics.

3. Numerical solution of the SWPP test

In this study, we will use a finite-difference method to solve the model of the SWPP test, where the finite-difference scheme of the groundwater flow is the same with Wang et al. (2017), and the scheme of the transport governing equation (ADE) is similar to the model of Phanikumar and McGuire (2010). However, the flow velocity used in the advective term of ADE is computed by solving the model of groundwater flow rather than directly using Eq. (2), which was employed by Phanikumar and McGuire (2010). [The code of this study is free of charge upon request from the authors.](#)

To minimize numerical errors and to increase computational efficiency, we employ a non-uniform grid system for simulations (Wang et al., 2014), which is:

$$r_i = \frac{r_{i-1/2} + r_{i+1/2}}{2}, \quad i = 1, 2, 3, \dots, N_r, \quad (22)$$

where N_r represents the number of nodes in discretization of the spatial domain $[r_w, r_e]$, r_w and r_e respectively represent the distances of inner and outer boundary nodes; r_i is the radial distance of node; $r_{i+1/2}$ is calculated as follows

$$\log_{10}(r_{i+1/2}) = \log_{10}(r_w) + i \left[\frac{\log_{10}(r_e) - \log_{10}(r_w)}{N} \right], \quad i = 0, 1, 2, \dots, N_r. \quad (23)$$

The value of $r_{i-1/2}$ can be calculated using the similar way. Eqs. (22) - (23) represent a space domain discretized

logarithmically, and the spatial steps are smaller near the wellbore and become progressively greater away from the wellbore.

Similarly, we logarithmically discretize the temporal domain:

$$t_i = \frac{t_{i-1/2} + t_{i+1/2}}{2}, i = 1, 2, 3, \dots, M, \quad (24)$$

where M represents the number of nodes in discretization of the temporal domain; t_i is the time of node i ; $t_{i+1/2}$ is calculated
5 as follows in the injection phase

$$\log_{10}(t_{i+1/2}) = \log_{10}(t_0) + i \left[\frac{\log_{10}(t_{inj}) - \log_{10}(t_0)}{M} \right], i = 1, 2, 3, \dots, M. \quad (25)$$

where t_0 is a very small positive value representing the first time step, such as $t_0 = 1.0 \times 10^{-7}$ hour.

As for the chase, one has

$$t_{i+1/2} = 10^{\log_{10}(t_0) + i \left[\frac{\log_{10}(t_{cha}) - \log_{10}(t_0)}{M} \right]} + t_{inj}, i = 1, 2, 3, \dots, M. \quad (26)$$

10 Similarly, in the rest phase, one has

$$t_{i+1/2} = 10^{\log_{10}(t_0) + i \left[\frac{\log_{10}(t_{res}) - \log_{10}(t_0)}{M} \right]} + t_{inj} + t_{cha}, i = 1, 2, 3, \dots, M. \quad (27)$$

In the extraction phase, one has

$$t_{i+1/2} = 10^{\log_{10}(t_0) + i \left[\frac{\log_{10}(t_{ext}) - \log_{10}(t_0)}{M} \right]} + t_{inj} + t_{cha} + t_{res}, i = 1, 2, 3, \dots, M. \quad (28)$$

Before using the new model of this study, it is necessary to evaluate the numerical errors (like artificial oscillation and
15 numerical dispersion) of the solution. Unfortunately, the benchmark analytical solutions of the SWPP test with a finite
hydraulic diffusivity are not available up to date. Alternatively, the accuracy of the finite-difference solution could be tested
by comparing with the numerical solution of Wang et al. (2017) which was proven to be accurate and robust. Figure 2 shows
the comparison of BTCs between the solution of Wang et al. (2017) and of this study, where the parameters used are similar
to Figure 3 of Phanikumar and McGuire (2010): $B=8$ m, $r_w=0.052$ m, $\alpha_r=1$ m, $\theta=0.38$ m, $D_0=0$ m²/hour, $t_{inj}=94.32$ hour,
20 $t_{cha}=0$ hour, $t_{res}=0$ hour, $t_{ext}=405.6$ hour, injection flow rate $Q_{inj}=0.1$ m³/hour, and extraction flow rate $Q_{ext}=-0.11$
m³/hour. **It shows a small oscillation in the numerical solutions, which might be caused by the numerical errors.**

By comparing the solution of this study with Wang et al. (2017), one may conclude that the solution of this study
appears to be accurate and reliable **since the mean square error between two solutions is smaller than 0.05 for all cases in**
Figure 2. In the wellbore ($r = r_w$), the concentration is equal to C_0^{inj} , as shown in Figure 2. This is due to the boundary
25 condition of the wellbore, e.g.,

$$C|_{r \rightarrow r_w} = C_0^{inj}, 0 < t \leq t_{inj}. \quad (29)$$

In the aquifer, the values of BTCs increase with the decreasing distance from the wellbore.

It is also very necessary to test the accuracy of the new models against the commercial numerical software packages, like MODFLOW/MT3DMS. Unfortunately, the current three-dimensional models in MODFLOW/MT3DMS may create some errors in describe the solute transport in the wellbore-confined aquifer. The errors come from an assumption that the water volume in the wellbore is computed by a product of wellbore cross section and the aquifer thickness, which is incorrect. The actual water volume in the wellbore should be computed by a product of wellbore cross section and the water level in the wellbore (See Supplemental Materials for detailed explanation). Figure 3 shows the comparisons of BTCs between the MODFLOW/MT3DMS model and new model of this study. The water level of the wellbore is assumed to be equal to the aquifer thickness in the new models for the purpose of comparison although it may be not true, and the other parameters used are the same with ones in Figure 2. Therefore, the agreement between two models demonstrates the accuracy of the new model. Figure 3 show that the concentration in the wellbore is not unit in the injection phase, and this is because the new model considers the wellbore storage for both groundwater flow and solute transport.

4. Discussions: Effect of wellbore storage on the SWPP test under transient flow field

Revisiting the assumptions used in previous studies as mentioned in Sections 2.1 and 2.2, one may find that the flow field and the wellbore storage are key factors for the SWPP test. This is not surprising, since the flow velocity is not only included in the advective term, but also in the dispersive term. The wellbore storage which is dependent on the volume of pre-test water in the wellbore may influence the concentration of the solute injected into the wellbore. As the influence of the hydraulic diffusivity solute transport in the SWPP test has been investigated in Wang et al. (2017), in this section, we mainly investigate the influence the wellbore storage on the reactive transport in the SWPP test in the transient flow field.

The variation of the transient flow field is mainly controlled by the hydraulic diffusivity of the aquifer and the wellbore storage. In the following discussion, we choose three representative types of porous media to test the influence of the hydraulic diffusivity on the results of the SWPP test, including fine sand, medium sand, and coarse sand. According to Domenico and Schwartz (1990) and Batu (1998), one could obtain the values of the hydraulic diffusivity for above mentioned three types of media: $4.17 \times 10^2 \text{ m}^2/\text{hour}$ (with $K_r = 4.17 \times 10^{-3} \text{ m}/\text{hour}$ and $S_s = 1.0 \times 10^{-4} \text{ m}^{-1}$) for the fine sand, $4.17 \times 10^2 \text{ m}^2/\text{hour}$ (with $K_r = 4.17 \times 10^{-2} \text{ m}/\text{hour}$ and $S_s = 1.0 \times 10^{-4} \text{ m}^{-1}$) for the medium sand, and $4.17 \times 10^4 \text{ m}^2/\text{hour}$ (with $K_r = 4.17 \times 10^{-1} \text{ m}/\text{hour}$ and $S_s = 1.0 \times 10^{-5} \text{ m}^{-1}$) for the coarse sand. Generally, the hydraulic diffusivity of the aquifer correlates to the grain size of the media, and the value is smaller for the smaller grain size, e.g., fine sand.

The parameters related to the solute transport mainly come from the studies of Phanikumar and McGuire (2010), who interpreted the field experimental data of the SWPP test conducted by McGuire et al. (2002). Except for parameters

specifically mentioned otherwise, the default values used in the following section are $C_0^{inj}=100$ mg/L, $C_0^{cha}=10$ mg/L, $B=0.1$ m, $r_w=0.0125$ m, $\alpha_r=0.01$ m, $\theta=0.33$, $D_0=0$ m²/hour, $t_{inj}=0.6$ hour, $t_{cha}=0.067$ hour, $t_{res}=0.0333$ hour, $t_{ext}=3.6$ hour, $Q_{inj}=0.0333$ m³/hour, $Q_{cha}=0.0255$ m³/hour, and $Q_{ext}=0.0333$ m³/hour, which can be found in Figure 5 of Phanikumar and McGuire (2010).

5 4.1 The rest phase

Figures 4A and 4B show the comparison of BTCs between the Robin and Danckwerts conditions at the wellbore for different porous media, where $C_0^{cha}=10$ mg/L in Figure 4A and $C_0^{cha}=0.0$ mg/L in Figure 4B. For the purpose of comparison, the boundary conditions at the wellbore in the injection and chase phases are still described by Eqs. (5) - (6).

Figure 4A shows that the difference of BTCs between two boundary conditions is significant at the early stage of the extraction phase when $C_0^{cha}=10$ mg /L, and BTCs of the Danckwerts condition are above BTCs of the Robin condition. With time going, such a difference becomes negligible. As for the curves of the Robin condition, the solute concentration in the wellbore is 0 in the chase phase, correspondingly, the concentration starts from 0 at the early stage of the extraction phase. Actually, the solute concentration in the wellbore may be not 0 in the rest phase due to the wellbore storage and finite hydraulic diffusivity when $C_0^{cha}=10$ mg /L. Another interesting observation is that the properties of the porous media could also influence the difference of BTCs between two boundary conditions. Obviously, a smaller hydraulic diffusivity would result in a larger difference between them, e.g., such a difference is greater for the fine sand aquifer.

Figure 4B shows the comparison of BTCs for different boundary conditions in the wellbore when $C_0^{cha}=0.0$, and one could find that the difference of BTCs between the Robin and Danckwerts conditions is negligible, which implies that the Robin condition performs well when $C_0^{cha}=0.0$, while not for the case $C_0^{cha} \neq 0.0$.

20 4.2 The injection and chase phases

Figure 5 shows the comparison of BTCs in the wellbore for different boundary conditions and different porous media. The parameters used in this case are the same as ones in Section 4.1. The initial head is 1 m. The boundary condition of the wellbore in the rest phase is described by the Danckwerts condition.

Two interesting observations can be seen from this figure. Firstly, the difference of BTCs between the two boundary conditions at the wellbore is obvious, and such a difference is larger for the medium sand than for the coarse sand, implying that it increases with the decreasing hydraulic diffusivity. Secondly, the values of BTCs obtained from Eqs. (16) - (17) are greater at the early stage of the extraction phase, while the peak values of BTC are smaller. In another word, the model of Eqs. (5) - (6) may underestimate the concentration in the early stage of the extraction phase, while overestimate the peak values of BTCs.

These observations can be explained as follows. The model of Eqs. (5) - (6) assumes that the volume of water in the wellbore is negligible, and the concentration in the wellbore is close to 10.0 mg/L in the rest phase, due to $C_0^{cha}=10.0$ mg/L. As for the model of Eqs. (16) - (17), the volume of water in the wellbore is non-negligible and could dilute the concentration in the injection phase; namely, the solute concentration in the wellbore could not immediately rises to C_0^{inj} at the early stage of the injection phase, thus resulting in smaller peak values of BTCs. Similarly, the concentration in the wellbore could not immediately reduce to C_0^{cha} at the early stage of the chase phase, which makes the concentration larger at the early stage of the extraction phase based on the model of Eqs. (16) - (17).

5. Uniqueness of estimated parameters

Physical and chemical parameters are important in predicting the contaminate transport in the aquifer, and the values of these parameters are generally estimated by best fitting the observed BTCs in the SWPP test using a simplified model, ignoring a number of relevant factors such as the influences of the flow field and the wellbore storage. The discussions in Section 4 demonstrate that the negligence of such factors on reactive transport might cause errors and invalidate the whole parameter estimation exercises. Beside porosity, dispersivity, and reaction rates, the new model of this study appears to be useful for estimating the values of hydraulic conductivity and specific storage by best fitting the observed BTCs in the SWPP test. For instance, the values could be determined by minimizing the sum of absolute differences between the observed and calculated BTCs in the wellbore

$$\mathcal{F} = \sum_{i=1}^o \left| C_{CAL}(K_r, S_s, \alpha_r, \theta, \lambda_j, t, r_w) \Big|_{t=t_i} - C_{OBS}(t, r_w) \Big|_{t=t_i} \right|, \quad (30)$$

where $C_{CAL}(K_r, S_s, \alpha_r, \lambda_j, t, r_w) \Big|_{t=t_i}$ and $C_{OBS}(t, r_w) \Big|_{t=t_i}$ represent the concentrations calculated by the new model of the SWPP test and the observed concentrations at $t = t_i$, respectively; o is the number of observed data.

Although the number of observation points is usually much greater than the number of parameters needed to be estimated, one may still wonder if Eq. (30) is practically reliable for estimation of multiple parameters simultaneously. To answer this question, two approaches are employed in the following: Sensitivity analysis and uniqueness analysis. The sensitivity analysis is used to check whether the solution is sensitive to the parameters or not, while the uniqueness analysis is to check if the multiple input parameter values could map to the same output results.

5.1 Sensitivity analysis

McCuen (1985) proposed a sensitivity model of a dependent variable, which was normalized as (Kabala, 2001; Yang and Yeh, 2009):

$$SC_{i,j} = I_j \frac{\partial C_i}{\partial I_j}, \quad (31)$$

where $SC_{i,j}$ is the sensitivity coefficient of the j^{th} parameter I_j at the i^{th} time; C_i is the concentration at the i^{th} time. In this study, the differentiation of Eq. (31) will be approximated by a finite-difference scheme:

$$SC_{i,j} = I_j \frac{C_i(I_j+\Delta I_j) - C_i(I_j)}{\Delta I_j} \quad (32)$$

where ΔI_j is a small increment.

From the mathematic models of the groundwater flow, one may find both hydraulic conductivity and specific storage could affect the flow field. Since greater hydraulic conductivity or smaller specific storage could shorten the time approaching the steady state, we will employ the hydraulic diffusivity for the sensitivity analysis, which is the ratio of the two parameters. Figure 6 shows the sensitivity of the hydraulic diffusivity on BTCs, and one may find that it is not sensitive to the hydraulic diffusivity when the values of hydraulic diffusivity are sufficiently large. This might be because the time approaching the steady state is very short when the hydraulic diffusivity values are sufficiently large (for instance, greater than $4.17 \times 10^2 \text{ m}^2/\text{hour}$), and the influence of the transient flow could be ignored. Therefore, the steady-state assumption could be used to approximate the flow field in the SWPP test when the hydraulic diffusivity is greater than $4.17 \times 10^2 \text{ m}^2/\text{hour}$. Otherwise, the steady-state assumption is not recommended. Figure 7 shows that the BTCs in the wellbore are sensitive to both dispersivity and porosity.

5.2 Uniqueness analysis of physical parameters

Beside the sensitivity analysis, the uniqueness analysis is also important for the parameter estimation, which is used to check if there exist two or more sets of parameters for the same BTCs. Similar to the treatment in previous studies, we firstly use the transient model of this study to reproduce BTCs based on a set of given input parameters, and then estimate the values of parameters by best fitting such BTCs. If the values of the input parameters are different from the estimated parameter when the fitness is very good, one could conclude that the solution is not unique and the parameters estimated from Eq. (30) may not be reliable.

There are four physical parameters in the new model of this study, including hydraulic conductivity, specific storage, dispersivity, and porosity, and one chemical parameter (reaction rate). Wang et al. (2017) investigated the uniqueness of solutions for the flow field, and the results showed that BTCs of the SWPP test were not unique for the flow-related parameters. For instance, BTCs with a steady state flow field were almost the same with BTCs with a transient flow field, as shown in Figures 10 and 11 of Wang et al. (2017). It implies that one may not inversely determine the hydraulic parameters of flow field only by best fitting observed BTCs in the wellbore, and additional aquifer tests are required to supplement the SWPP test to determine the flow-related parameters. However, Wang et al. (2017) did not investigate the uniqueness of porosity and dispersion when the hydraulic parameters were given, which will be discussed in this study.

Figure 8 shows comparison of BTCs for different dispersivities and porosities but for the same hydraulic parameters, and one could see that the curves of $\alpha_r = 0.01\text{m}$ and $\theta = 0.33$ are almost the same with the curves of $\alpha_r = 0.006\text{ m}$ and $\theta = 0.9$. Therefore, Eq. (30) may not be used to determine α_r and θ simultaneously. Fortunately, the porosity could be measured in the laboratory from core samples or determined by the SWPP test with drift flow (Hall et al., 1991; Paradis et al., 2018). When the values of K_r , S_s , and θ are given, the dispersivity could be determined uniquely by Eq. (30).

In summary, it seems impossible to determine all parameters (K_r , S_s , α_r , and θ) simultaneously by only best fitting the observed BTCs in the wellbore of the SWPP test using Eq. (30). The hydraulic parameters (K_r and S_s) needed to be estimated by supplementary aquifer tests before determining the parameters related to the solute transport (α_r and θ). The value of α_r could be determined by Eq. (30) when the porosity is given.

5.3 Chemical parameter estimation

The models estimating the reaction rate are based on several assumptions in previous studies, e.g. Eqs. (8) - (9) as demonstrated in Section 2.1. To test the applicability of those equations, we will use the model of this study to reproduce the data of $\ln(C_{rec}/C_{tra}) \sim t^*$ based on a set of given parameters, and then using Eqs. (8) - (9) (which is based on an infinite hydraulic diffusivity presumption) to estimate λ (denoted as $\tilde{\lambda}$) by best fitting $\ln(C_{rec}/C_{tra}) \sim t^*$. Two species involved in this case are Cl^{-1} and SO_4^{-2} , in which C_{tra} and C_{rec} represent the concentrations of Cl^{-1} and SO_4^{-2} , respectively. Figure 9 shows the fitness of the simulated $\ln(C_{rec}/C_{tra}) \sim t^*$ in the wellbore using a linear function, with the detailed information is shown in Table 1. Two sets of λ are employed in the discussions for the reactant, e.g. $\lambda = 0.1\text{ hour}^{-1}$ and 0.2 hour^{-1} . One may conclude that the simplified models of Eqs. (8) - (9) with an infinite hydraulic diffusivity perform well in the estimation of λ for reactive transport under the finite hydraulic diffusivity condition.

This simplified model of Eq. (9) has been widely used to estimate λ , due to the advantages that λ could be determined directly by best fitting the observed $\ln(C_{rec}/C_{tra}) \sim t^*$, without the knowledge of the aquifer properties, such as porosity, dispersivity, hydraulic diffusivity. However, this model is proposed based on the first-order reaction assumption, which is a linear function as shown in Eq. (7). Whether this model works for non-linear reactions or not is still unknown, and will be investigated in the following section.

Assuming that the extraction time since the rest phase ended could be divided into $N-1$ segments, Phanikumar and McGuire (2010) employed the Heaviside unit step function to describe a type of non-linear biogeochemical reaction:

$$\frac{\partial c}{\partial t} = - \sum_{j=1}^{N-1} [\mathcal{H}(t - t_j^*) - \mathcal{H}(t - t_{j+1}^*)] \lambda_j C_i^{n_j} \quad (33)$$

where λ_j is the reaction constant in the temporal segment j , and the Heaviside step function $\mathcal{H}(\cdot)$ is:

$$\mathcal{H}(t - t_j^*) - \mathcal{H}(t - t_{j+1}^*) = \begin{cases} 0 & \text{if } t < t_j^* \\ 1 & \text{if } t_j^* < t < t_{j+1}^* \\ 0 & \text{if } t_{j+1}^* < t \end{cases} \quad (34)$$

Eq. (33) is a series of piece-wise linear ($n_j=1$) or non-linear ($n_j \neq 1$) functions, which are an extension of Eq. (7).

To test the influence of the hydraulic diffusivity on the accuracy of this model in estimating λ_j for the non-linear reactions, the model of this study is used to reproduce the data of $\ln(C_{rec}/C_{tra}) \sim t^*$ with a set of specific λ_j , n_j and t_j^* for three types of porous media. Figures 10 and 11 represent the computed $\ln(C_{rec}/C_{tra}) \sim t^*$ based on the model of the chemical reactions described by the piece-wise linear and the non-linear functions, respectively. The values of λ_j and t_j^* of Figure 10 are obtained by best fitting the observation data using a piecewise linear function (e.g., $n_j=1$) proposed by Phanikumar and McGuire (2010). The circle represents the experiments data observed by McGuire et al. (2002). The parameters related to the chemical reactions in Figure 11 are from Phanikumar and McGuire (2010) by best fitting the observation data using a nonlinear function: $\lambda_j=0.25$, $n_j=0.25$, $N=j=1$. Comparing Figures 10 and 11, one may find that the influence of the hydraulic diffusivity on the computed $\ln(C_{rec}/C_{tra}) \sim t^*$ is negligible for the chemical reaction described by the piecewise linear function, which is similar to the first-order reaction as shown in Figure 9. However, the influence of the hydraulic diffusivity on the relationship of $\ln(C_{rec}/C_{tra}) \sim t^*$ cannot be ignored if one attempts to use nonlinear functions to describe such a chemical reaction. The difference between the curves of different porous media is obvious in Figure 11. The agreement between the observed and computed data is satisfactory for the medium and coarse sands, but not for the fine sand in Figure 11. This is because the hydraulic diffusivity values of the medium and coarse sands are larger than that of the fine sand, thus are close to the assumption of an infinite hydraulic diffusivity used in Phanikumar and McGuire (2010).

Therefore, one may conclude that λ_j , n_j and t_j^* could be determined by directly best fitting the observed $\ln(C_{rec}/C_{tra}) \sim t^*$ when the non-linear reactions are described by the piece-wise linear functions, in a similar way to estimate the linear reaction rate by Eq. (7). However, such an approach may not work if one attempts to use non-linear functions to describe such reactions.

6. Field applications

To test the model of this study, the field data of a SWPP test conducted in a single well by McGuire et al. (2002) will be employed. In this test, the prepared solution contains Na_2SO_4 (as a reactant) and NaCl (as a conservative tracer). The reactant and the tracer were well mixed and then injected into a targeted aquifer.

6.1 Revisit of previous model

Phanikumar and McGuire (2010) interpreted such data using a model containing several assumptions mentioned in Section 2.1. The parameters used in their model were $B=0.1$ m, $r_w=0.0125$ m, $\alpha_r=0.001$ m, $\theta=0.33$ m, $D_0=0$ m²/hour,

$t_{inj}=0.6$ hour, $t_{cha}=0.067$ hour, $t_{res}=0.0333$ hour, $t_{ext}=3.6$ hour, $Q_{inj}=0.0333$ m³/hour, $Q_{cha}=0.0255$ m³/hour, and $Q_{ext}=0.011$ m³/hour. The concentrations of NaCl were $C_0^{inj}=100$ mg/L in the injection phase and $C_0^{cha}=10$ mg/L in the chase phase. As for the reactant of Na₂SO₄, the concentrations were $C_0^{inj}=20$ mg/L and $C_0^{cha}=2$ mg/L.

To demonstrate the importance of the wellbore storage of the solute transport, which was ignored in Wang et al. (2017), the observed and computed BTCs are compared based on the estimated parameters in Phanikumar and McGuire (2010), as shown in Figures 12A and 12B. The computed BTCs in Figures 12A and 12B are located $r= r_w+0.15$ m and $r= r_w$, respectively. The legend of “PPTTEST” represents the solution of Phanikumar and McGuire (2010), and the others are produced by the new model ignoring the wellbore storage effect on the solute transport.

The results showed that the fitness between the observed BTCs in the wellbore and computed BTCs by “PPTTEST” was very well, as shown in Figure 12A of this study, or Figure 5 of Phanikumar and McGuire (2010). However, by carefully checking the report of Phanikumar (2010), we found that the computed BTCs were at a radial distance of 0.15 m from the wellbore, rather than at the wellbore itself in Phanikumar (2010). They did not provide a convincing argument why to choose BTCs in the aquifer to represent BTCs in the wellbore, and thus the use of “0.15 m” in their analysis appears to be an artefact, rather than being physically based. Figure 12B shows the comparison of the computed and observed BTCs in the wellbore for different hydraulic diffusivities. Obviously, the new model ignoring the wellbore storage of the solute transport could not be used to interpret experimental data, since the computed BTCs are zero at the early stage of the extraction phase.

From Figures 12A and 12B, several interesting observations could be made. Firstly, the difference of BTCs among different porous media is obvious. BTCs of the coarse sand aquifer are close to the solution of “PPTTEST”, as shown in Figure 12A. This is because the hydraulic diffusivity of the coarse sand aquifer is the largest, which is close to the assumption used in the “PPTTEST” that hydraulic diffusivity is infinity. Secondly, the wellbore concentration is 10 mg/L at the early stage of the extraction phase for Cl. This is mainly due to the chosen boundary condition at the well screen, which has been discussed in details in Section 4.1. Thirdly, the peak values of BTCs increase with the decreasing hydraulic diffusivity, and the arrival times of peak values increase with the decreasing hydraulic diffusivity. Such an observation is also found in Figures 4A and 4B. Fourthly, the configuration of BTCs in the aquifer (at $r= r_w+0.15$ m) computed by the model of this study shows that the concentration firstly decreases with time, then increases with time, as shown in Figure 12A. This observation could be explained by the corresponding flow field, as shown in Figure 13. Looking at the flow velocity in the aquifer at $r= r_w+0.15$ m, one may find that the flow direction is still outward from the wellbore in the early stage of the extraction phase, due to the finite hydraulic diffusivity. The outward flow will persist for a finite period of time, depending on the value of the hydraulic diffusivity, and then reverse its direction to flow towards the wellbore for the rest of the extraction phase. This feature is very different from the results with an infinite hydraulic diffusivity assumption, in which the flow direction is always towards the wellbore for the entire extraction phase.

6.2 Fitness of this study

We try to use the new model to interpret BTCs of the SWPP test, considering a finite hydraulic diffusivity, a finite wellbore storage, and new boundary conditions of the wellbore at the injection, chase and rest phases. Assuming the initial head of the flow field is 1 m. In a trial and error process of best fitting the observed BTC data, we only estimate parameters of K_r , S_s and α_r , while the other parameters are the same with those used for producing Figure 5 of Phanikumar and McGuire (2010). Figure 14 demonstrates the fitness of the observed BTC data in the wellbore when $K_r = 1.0$ m/hour, $S_s = 1.0 \times 10^{-5} \text{ m}^{-1}$ and $\alpha_r = 0.015$ m. Since the hydraulic diffusivity of this case greater than the hydraulic diffusivity of medium sand ($4.17 \times 10^2 \text{ m}^2/\text{hour}$), the influence of the flow field could be negligible. In this study, we mainly estimated the value of dispersivity, where the porosity is fixed and comes from the reference of Phanikumar and McGuire (2010). Therefore, the dispersivity is uniquely determined.

6 Summary and conclusions

A complete SWPP test includes injection, chase, rest and extraction phases, where the second and third phases are not necessary but are recommended to increase the duration of reaction. Due to the complex mechanics of biogeochemical reactions, aquifer properties, and so on, previous mathematic or numerical models contain some assumptions which may over simplify the actual physics, for instance, the hydraulic diffusivity of the aquifer is infinite. The Robin or the third-type boundary condition was often used in previous studies at the well screen in the injection, chase and rest phases by ignoring the mixing effect of the volume of water in the wellbore (namely, wellbore storage). In this study, we presented a multi-species reactive SWPP model considering the wellbore storage for both groundwater flow and solute transport, and a finite aquifer hydraulic diffusivity. The models of wellbore storage for both solute transports are derived based on the mass balance. The Danckwerts boundary condition instead of the Robin condition is employed for solute transport across the well screen in the rest phase. The robustness of the new model is tested by the field data. Meanwhile, the sensitivity analysis and uniqueness analysis of BTCs in wellbore are conducted. The following conclusion can be made from this study:

(1) The influence of wellbore storage for the solute transport increases with the decreasing hydraulic diffusivity in the injection and chase phases, and the model of Eqs. (16) - (17) underestimates the concentration in the early stage of the injection phase, while overestimates the peak values of BTCs.

(2) The values of λ_j , n_j and t_j^* could be determined by directly best fitting the observed $\ln(C_{rec}/C_{tra}) \sim t^*$ when the non-linear reactions are described by the piece-wise linear functions, while such an approach may not work if one attempts to use non-linear functions to describe such non-linear reactions.

(3) The Robin condition used to describe the wellbore flux in the rest phase works well only when the chase concentration is zero and the prepared solution in the injection phase is completely pushed out of the borehole into the aquifer, while the Danckwerts boundary condition performs better even when the chase concentration is not zero.

(4) In the extraction phase, the peak values of BTCs increase with the decreasing hydraulic diffusivity, and the arrival time of the peak value becomes shorter when the hydraulic diffusivity is smaller.

(5) It seems impossible to determine all parameters simultaneously by only best fitting the observed BTCs in the wellbore of the SWPP test using Eq. (30). The hydraulic parameters needed to be estimated by supplementary aquifer tests before determining the parameters related to the solute transport. The value of α_r could be determined by Eq. (30) when the porosity is given.

10

Acknowledgments

This research was partially supported by Program of the Postdoctoral Science Foundation (Nos. 2014M560635 and 2015T80853), Natural Science Foundation of China (No.41502229), Innovative Research Groups of the National Nature Science Foundation of China (No. 41521001), and the National Basic Research Program of China Science Research of Central Colleges, China University of Geosciences (Wuhan) (No. CUGL160407).

15

References

Batu, V., 1998. Aquifer Hydraulics: A ~~Comprehensive-comprehensive~~ Guide to ~~Hydrogeologic-hydrogeologic~~ ~~Data-data~~ ~~Analysisanalysis~~. John Wiley & Sons, New York, 1998.

Chen, K., Zhan, H., and Yang, Q., 2017. Fractional models simulating non-fickian behavior in four-stage single-well push-pull tests. Water Resources Research, 53(11): 9528-9545. <https://doi.org/10.1002/2017WR021411>, 2017.

Danckwerts, P.V., 1953. Continuous flow systems. Chemical Engineering Science, 2(1): 1-13. [https://doi.org/10.1016/0009-2509\(53\)80001-1](https://doi.org/10.1016/0009-2509(53)80001-1), 1953.

Diersch, H.G., 2014. FEFLOW - Finite Element Modeling of Flow, Mass and Heat Transport in Porous and Fractured Media. Springer, Berlin Heidelberg, 2014.

Domenico, P.A., and Schwartz, F.W., 1990. Physical and Chemical Hydrogeology. John Wiley & Sons, New York, 1990.

Gelhar, L.W., and Collins, M.A., 1971. General Analysis of Longitudinal Dispersion in Nonuniform Flow. Water Resources Research, 7(6): 1511-1521. <https://doi.org/10.1029/WR007i006p01511>, 1971.

25

Haggerty, R., Schroth, M.H., ~~and Istok, J.D.,-1998-;~~ Simplified method of "push-pull" test data analysis for determining in situ reaction rate coefficients. Ground Water, 36(2): 314-324, <https://doi.org/10.1111/j.1745-6584.1998.tb01097.x>, 1998.

Hall, S.H., Luttrell, S.P., ~~and Cronin, W.E.,-1991-;~~ A method for estimating effective porosity and ground-water velocity. Groundwater, 29(2): 171-174, <https://doi.org/10.1111/j.1745-6584.1991.tb00506.x>, 1991.

Harbaugh, A.W., Banta, E.R., Hill, M.C., ~~and McDonald, M.G.,-2000-;~~ MODFLOW-2000, The U. S. Geological Survey Modular Ground-Water Model-User Guide to Modularization Concepts and the Ground-Water Flow Process. Open-file Report. U. S. Geological Survey (92): 134, 2000.

Huang, J.Q., Christ, J.A., ~~and Goltz, M.N.,-2010-;~~ Analytical solutions for efficient interpretation of single-well push-pull tracer tests. Water Resources Research, 46, <https://doi.org/10.1029/2008WR007647>, 2010.

Istok, J., ~~-2012-;~~ Push-pull tests for site characterization, 144. Springer Science & Business Media, 2012.

Istok, J., Field, J., ~~and Schroth, M.,-2001-;~~ In situ determination of subsurface microbial enzyme kinetics. Groundwater, 39(3): 348-355, <https://doi.org/10.1111/j.1745-6584.2001.tb02317.x>, 2001.

Jung, Y., ~~and Pruess, K.,-2012-;~~ A closed-form analytical solution for thermal single-well injection-withdrawal tests. Water Resources Research, 48(3), <https://doi.org/10.1029/2011WR010979>, 2012;-n/a n/a.

Kabala, Z.J., ~~-2001-;~~ Sensitivity analysis of a pumping test on a well with wellbore storage and skin. Advances in Water Resources, 24(5): 483-504, [https://doi.org/10.1016/S0309-1708\(01\)00016-1](https://doi.org/10.1016/S0309-1708(01)00016-1), 2001.

McCuen, R.H., ~~-1985-;~~ Statistical Methods for Engineers. Prentice Hall, Englewood Cliffs, New Jersey, 1985.

McGuire, J.T., Long, D.T., Klug, M.J., Haack, S.K., ~~and Hyndman, D.W.,-2002-;~~ Evaluating Behavior of Oxygen, Nitrate, and Sulfate during Recharge and Quantifying Reduction Rates in a Contaminated Aquifer. Environmental Science & Technology, 36(12): 2693-2700, <https://doi.org/10.1021/es015615q>, 2002.

Nichols, W., Aimo, N., Oostrom, M., ~~and White, M.,-1997-;~~ STOMP subsurface transport over multiple phases: Application guide, Pacific Northwest Lab., Richland, WA (United States), 1997.

- Wang, Q.R., Zhan, H.B., and Tang, Z.H., ~~2014~~: Forchheimer flow to a well-considering time-dependent critical radius. Hydrology and Earth System Sciences, 18(6): 2437-2448, <https://doi.org/10.5194/hess-18-2437-2014>, 2014.
- Wang, Q.R., Zhan, H.B., and Wang, Y.X., ~~2017~~: Single-well push-pull test in transient Forchheimer flow field. Journal of Hydrology, 549: 125-132, <https://doi.org/10.1016/j.jhydrol.2017.03.066>, 2017.
- 5 Yang, S.-Y., and Yeh, H.-D., ~~2009~~: Radial groundwater flow to a finite diameter well in a leaky confined aquifer with a finite-thickness skin. Hydrological Processes, 23(23): 3382-3390, <https://doi.org/10.1002/hyp.7449>, 2009.
- Zheng, C., and Wang, P.P., ~~1999~~: MT3DMS: a modular three-dimensional multispecies transport model for simulation of advection, dispersion, and chemical reactions of contaminants in groundwater systems; documentation and user's guide, Alabama Univ University, 1999.

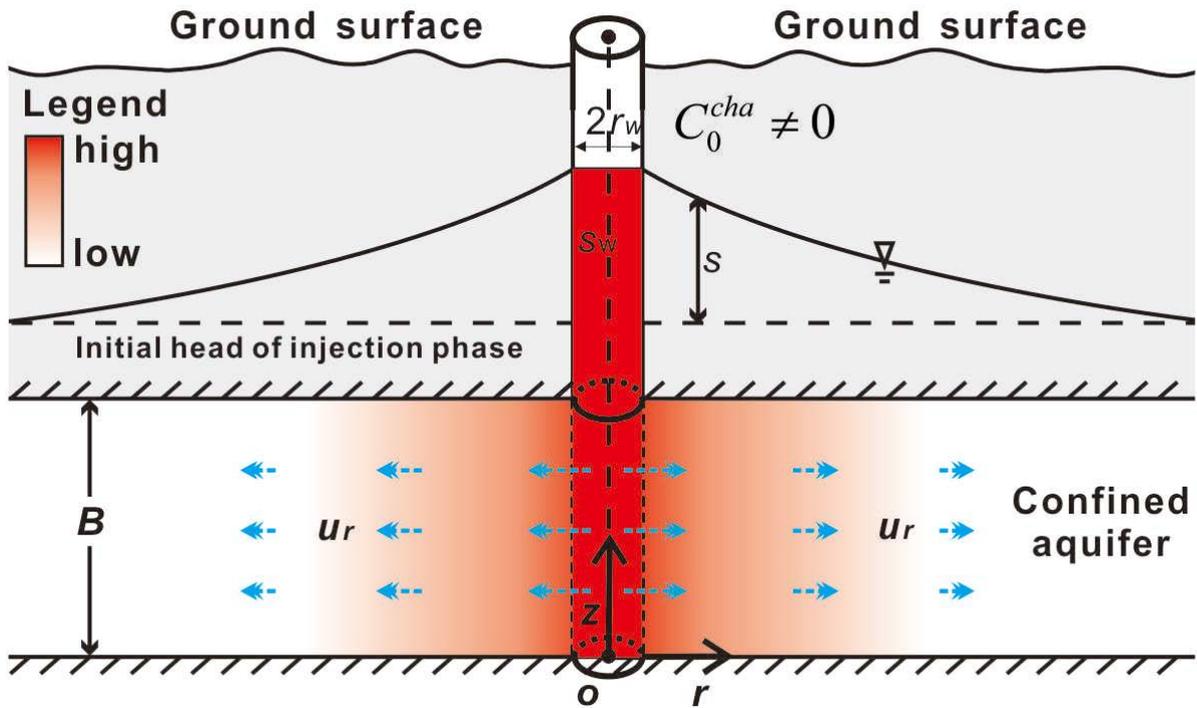


Figure 1. The schematic diagram of the SWPP test at the beginning of the rest phase when the chase concentration is not 0.

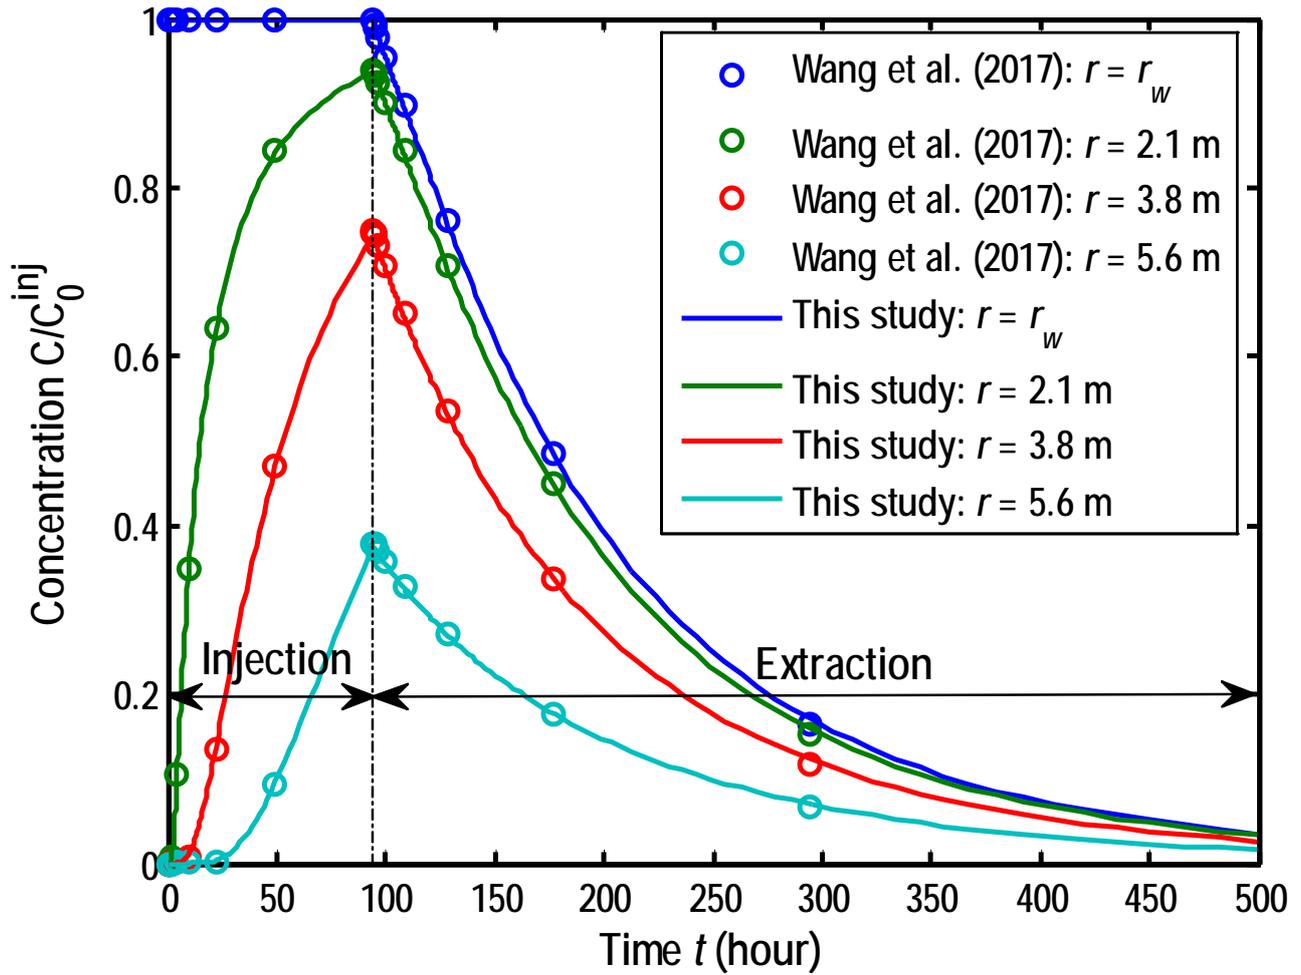


Figure 2. Comparison of BTCs between the solutions of Wang et al. (2017) and of this study, where C_0^{inj} represents the concentration of the prepared solute in the injection phase.



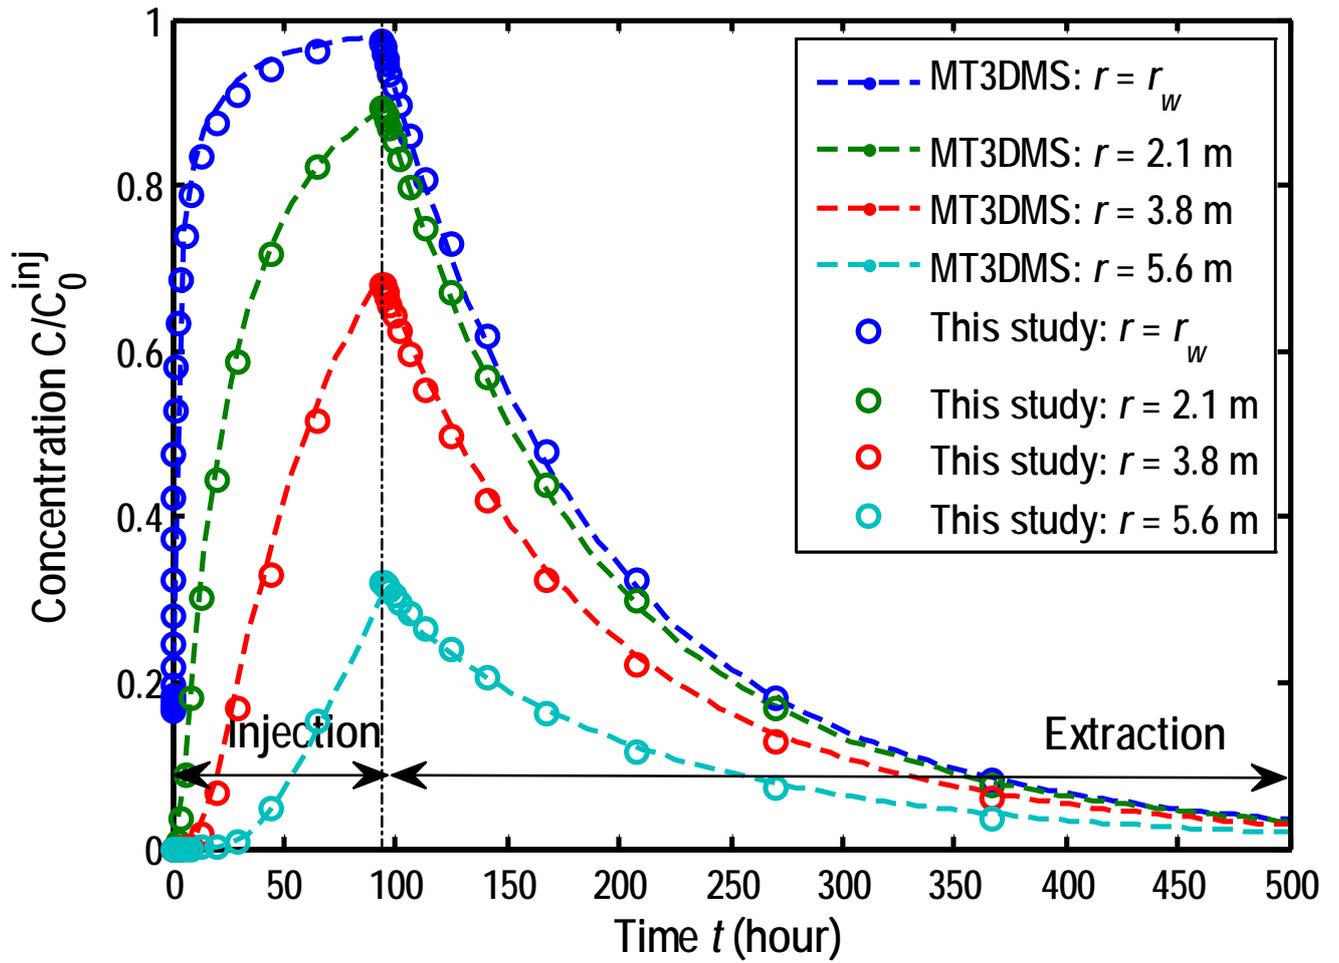


Figure 3. Comparison of BTCs between the solutions of MODFLOW/MT3DMS and of this study.

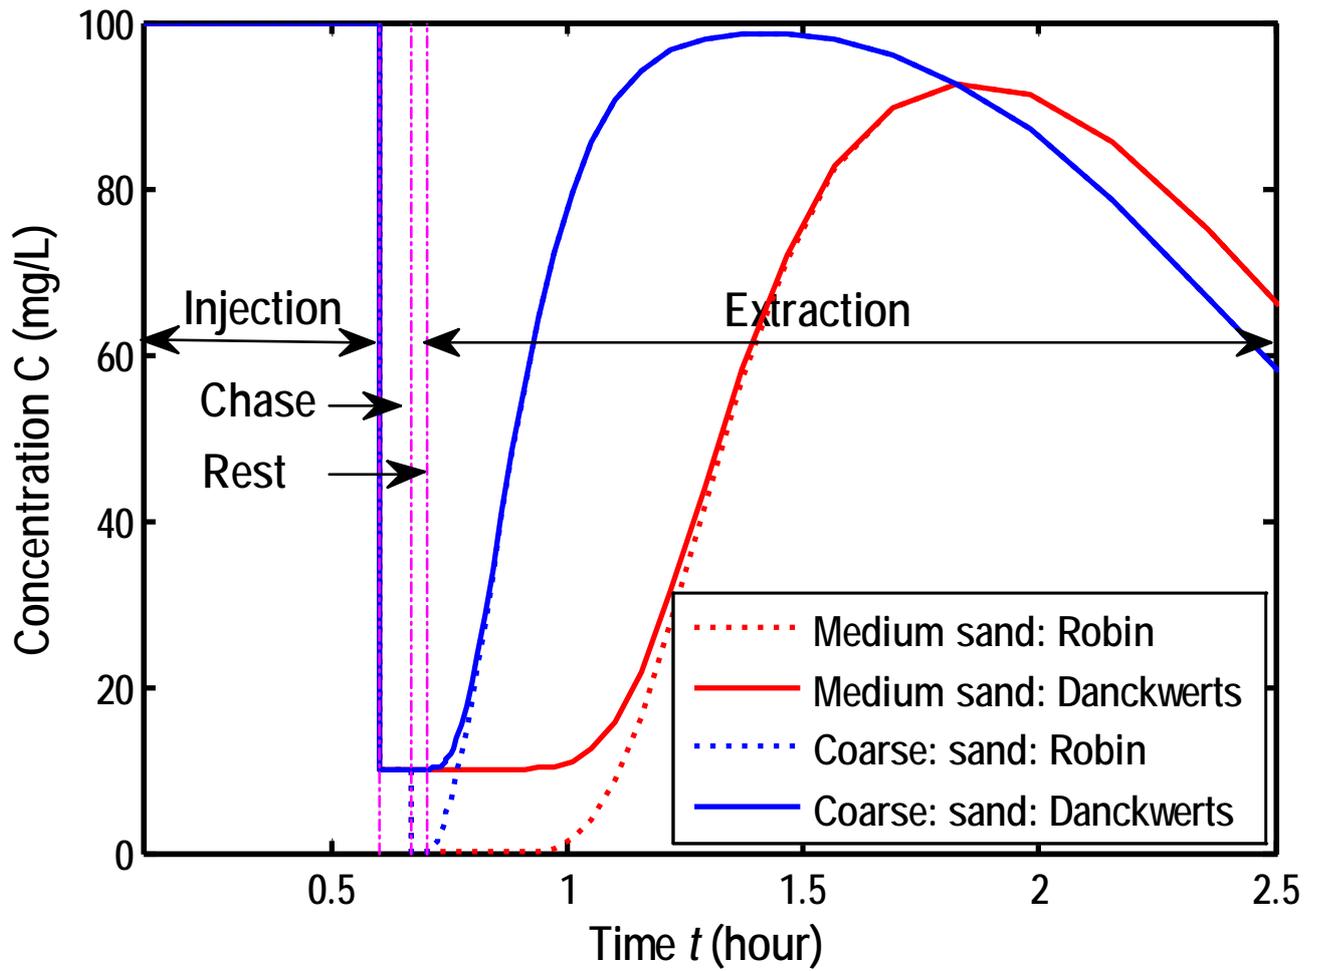

A
Figure 4. Comparison of BTCs in the wellbore between the Robin and Danckwerts conditions: A. $C_0^{cha} = 10.0$ mg/L, B.

$$C_0^{cha} = 0.$$

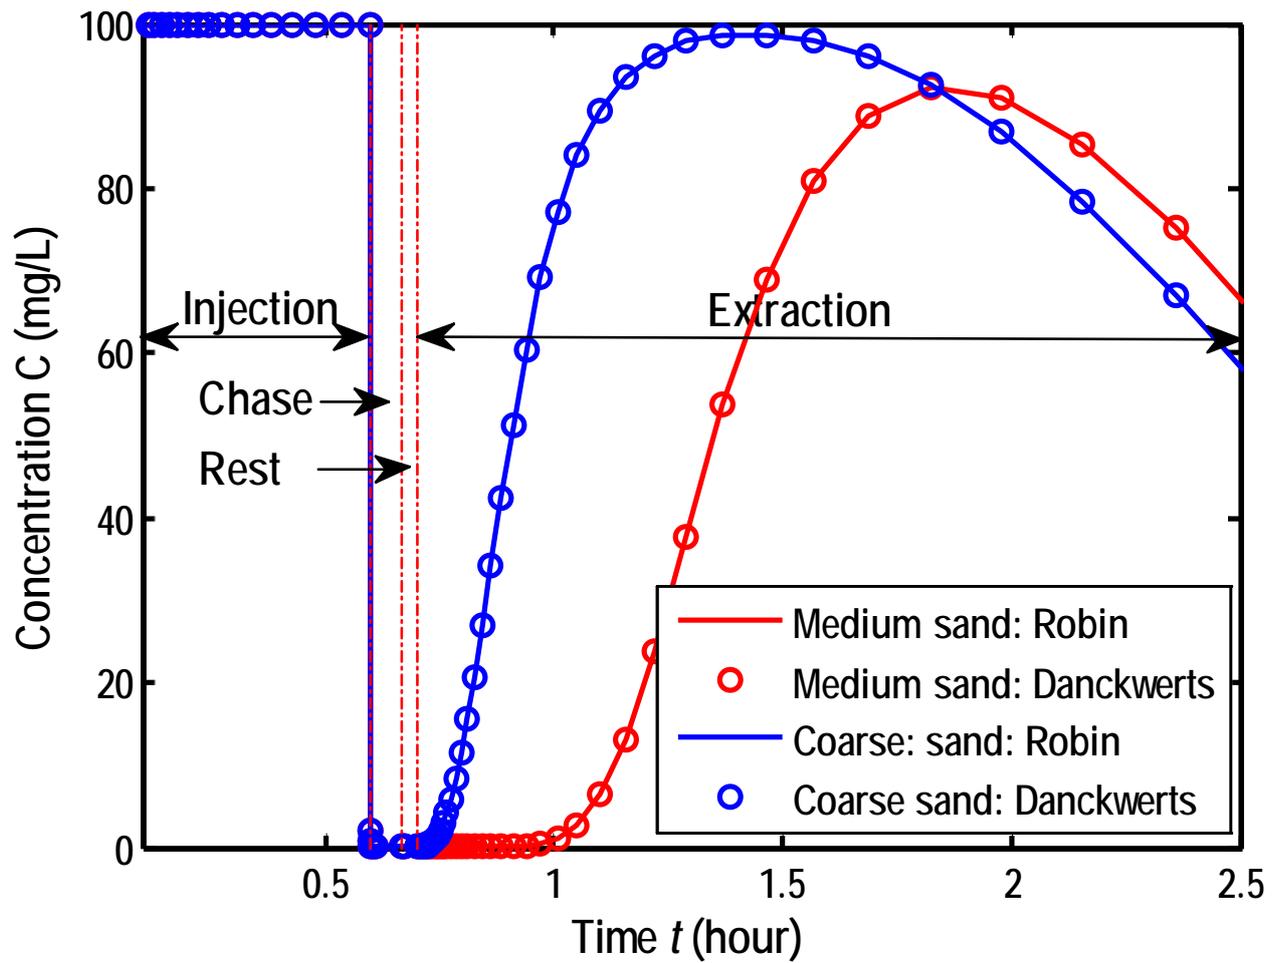

B
Figure 4. Comparison of BTCs in the wellbore between the Robin and Danckwerts conditions: A. $C_0^{cha} = 10.0$ mg/L, B.

$$C_0^{cha} = 0.$$

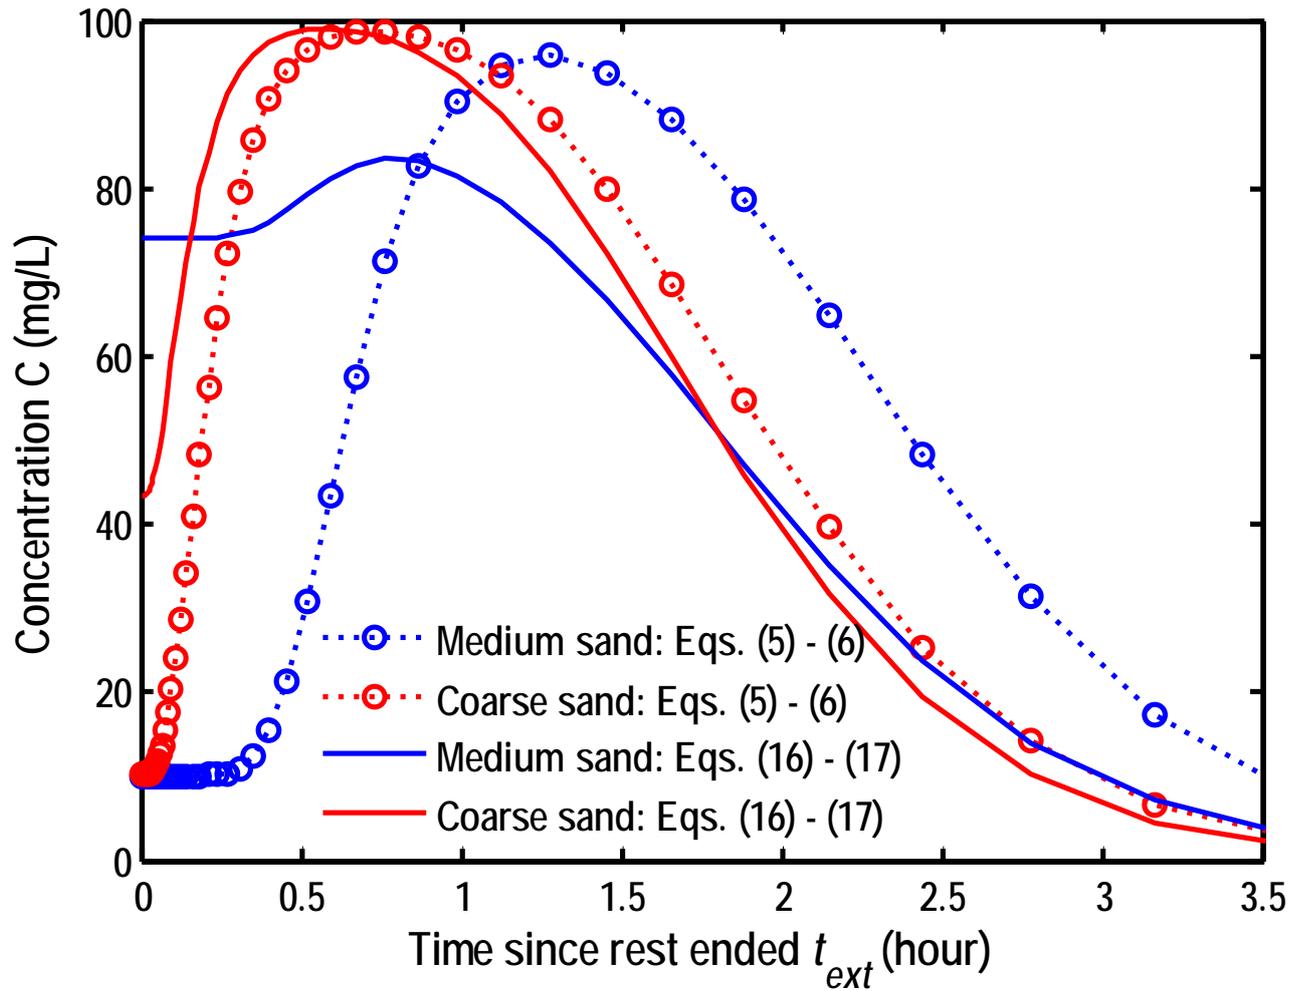


Figure 5. The BTCs in the wellbore for the different boundary conditions at the wellbore in the injection and chase phases.

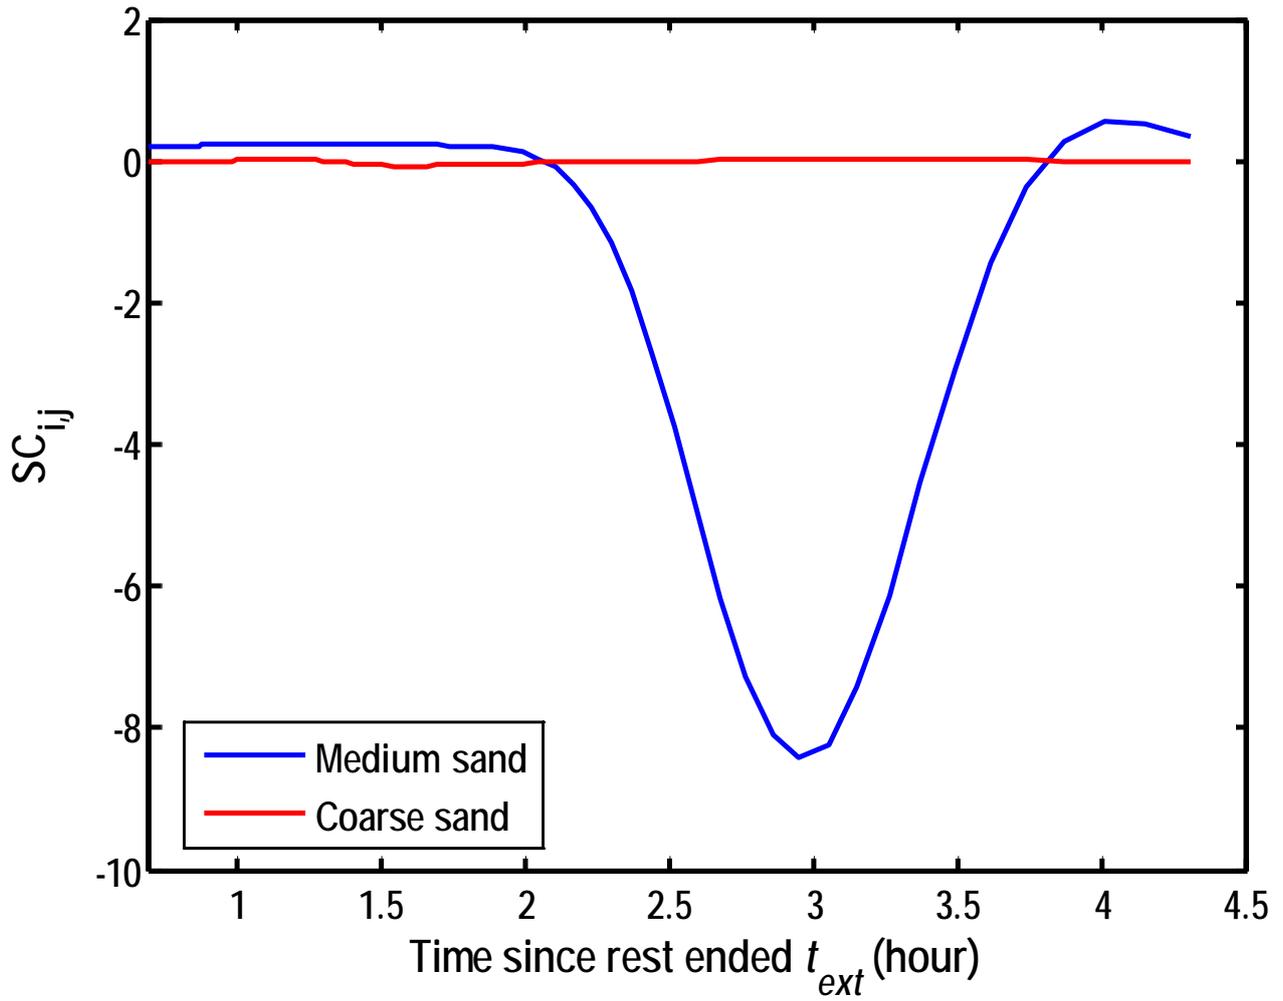


Figure 6. Sensitivity analysis of the hydraulic diffusivity on BTCs in the extraction phase

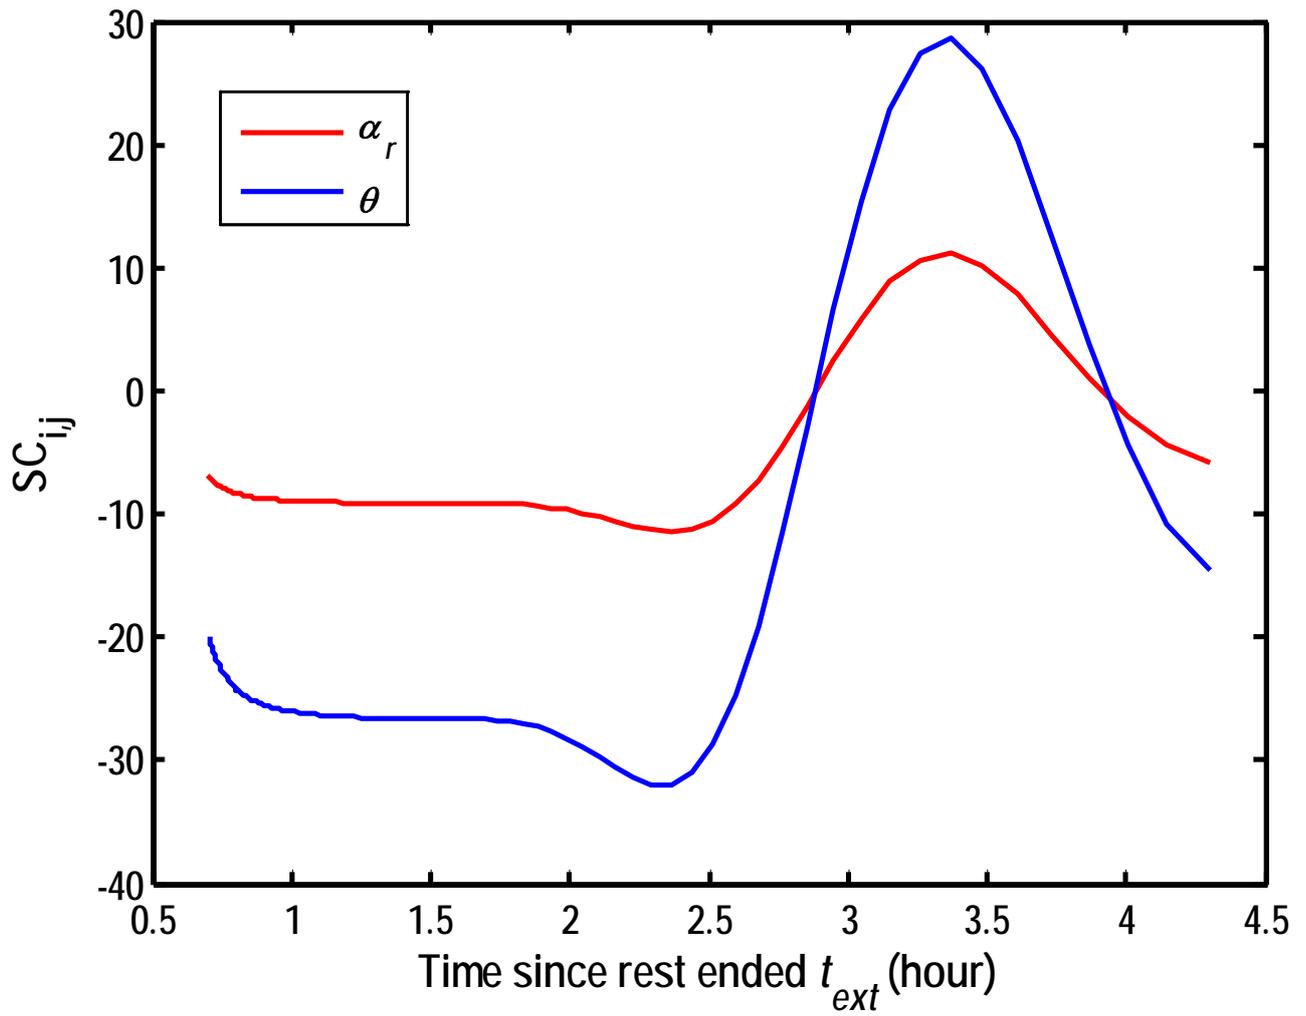


Figure 7. Sensitivity analysis of dispersivity and porosity on BTCs in the extraction phase

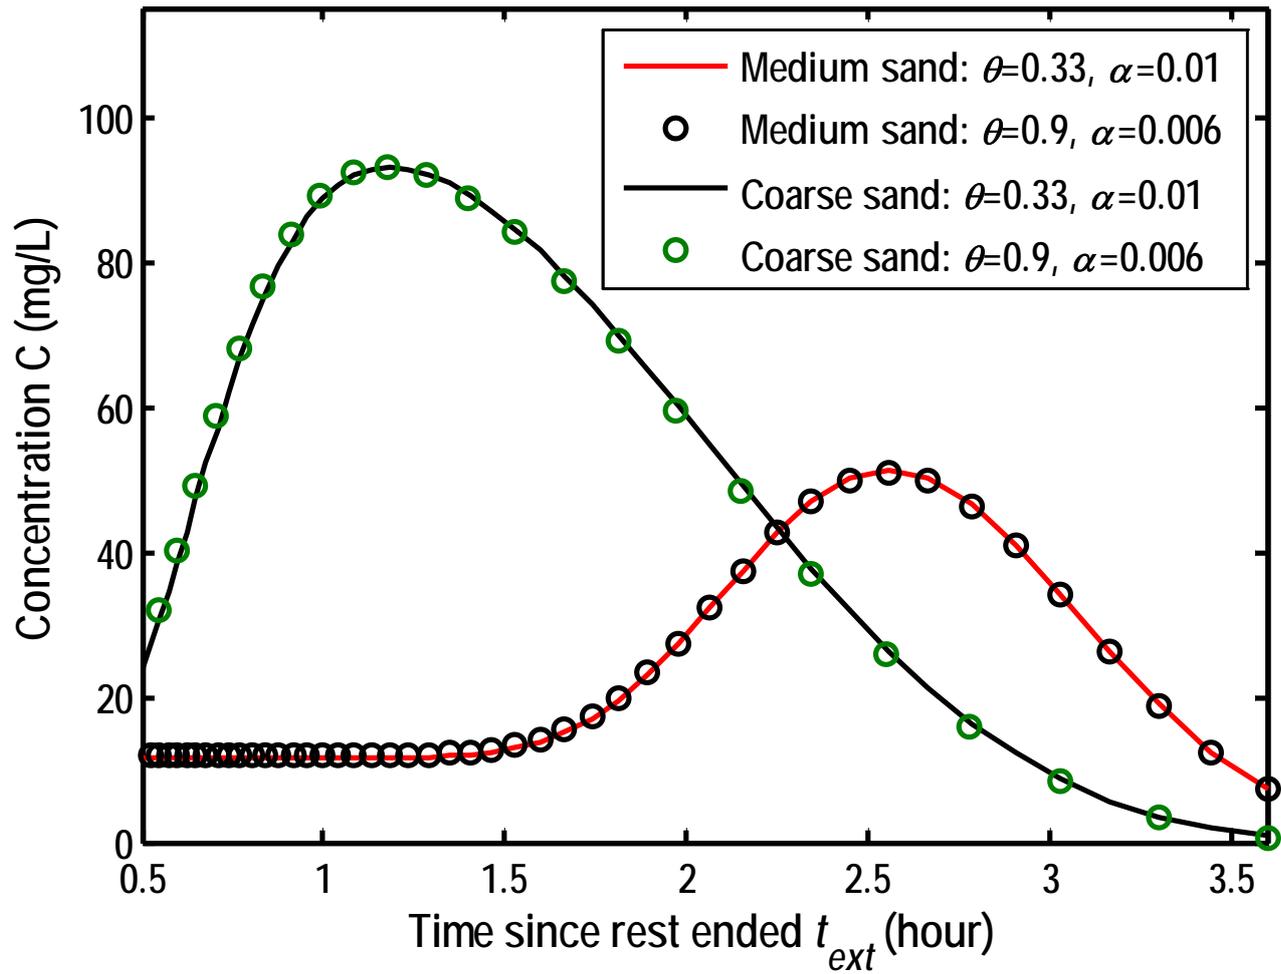


Figure 8. Comparison of BTCs for different dispersivities and porosities but for the same hydraulic parameters.

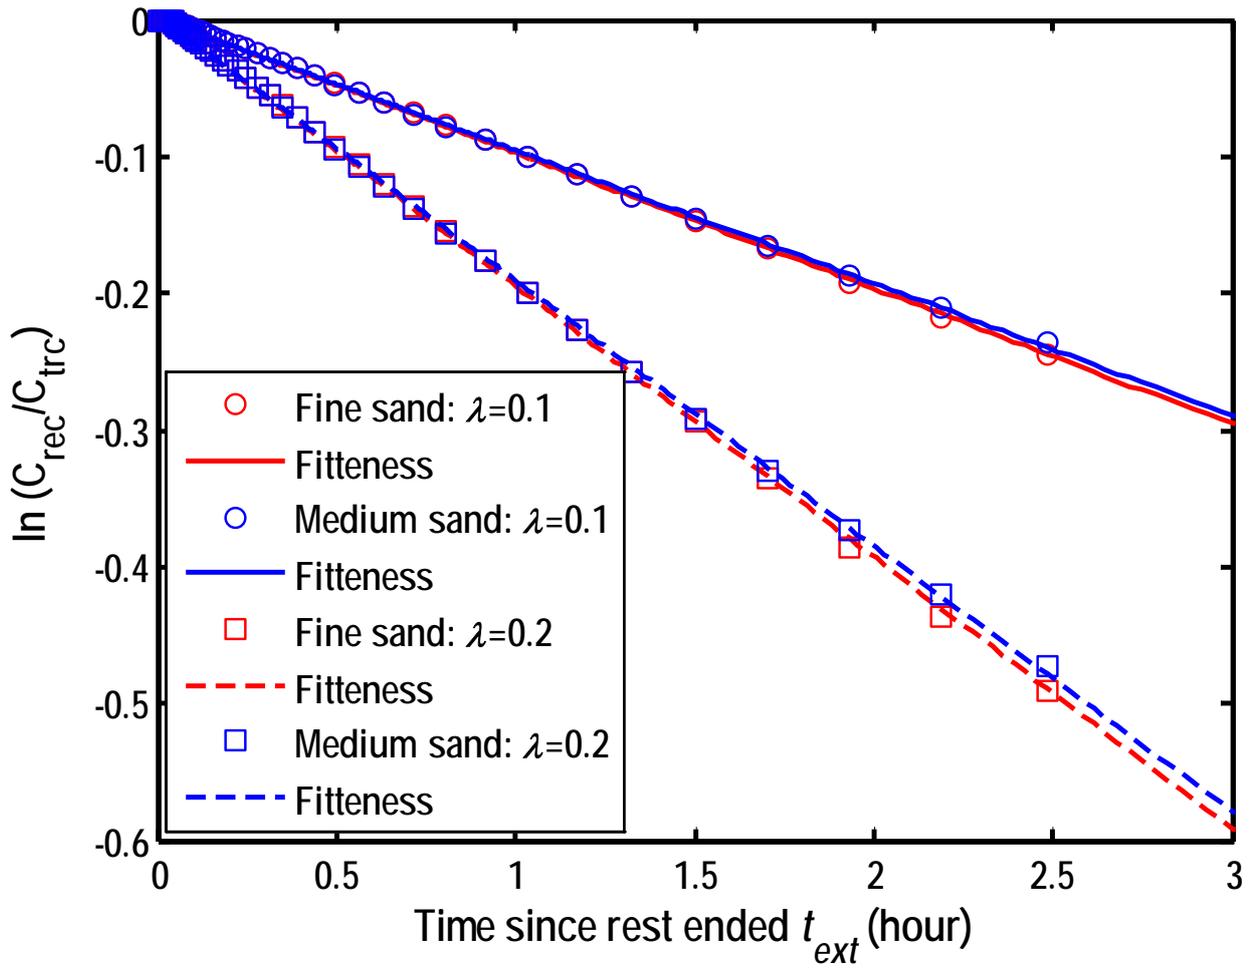


Figure 9. Fitness of $\ln[C_{rec}/C_{tra}] \sim t^*$ produced by the numerical solution of this study with the first order reaction in the different porous media.

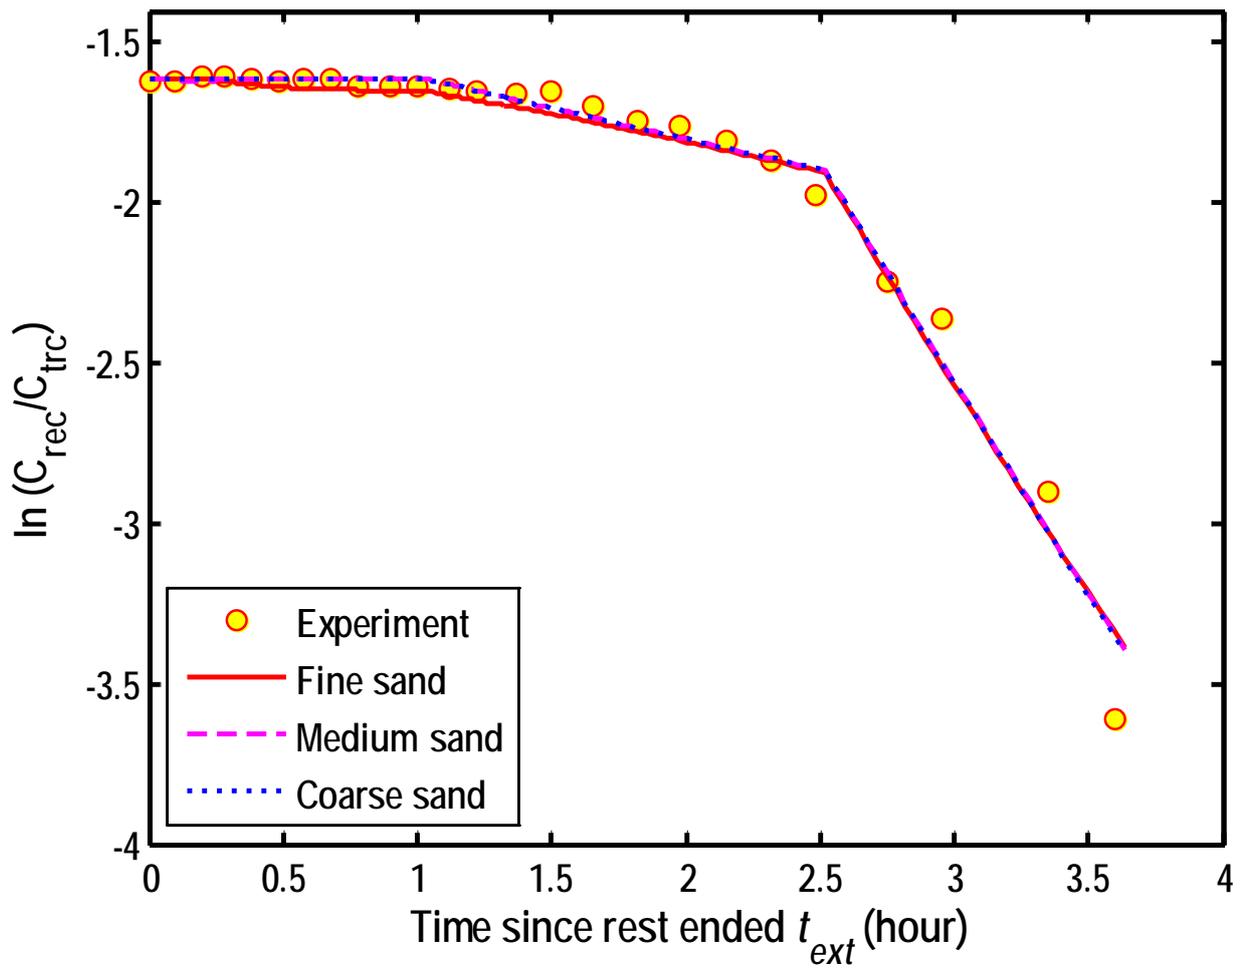


Figure 10. Computed $\ln[C_{rec}/C_{tra}] \sim t^*$ by the model of this study using a piecewise linear function to describe the nonlinear chemical reactions.



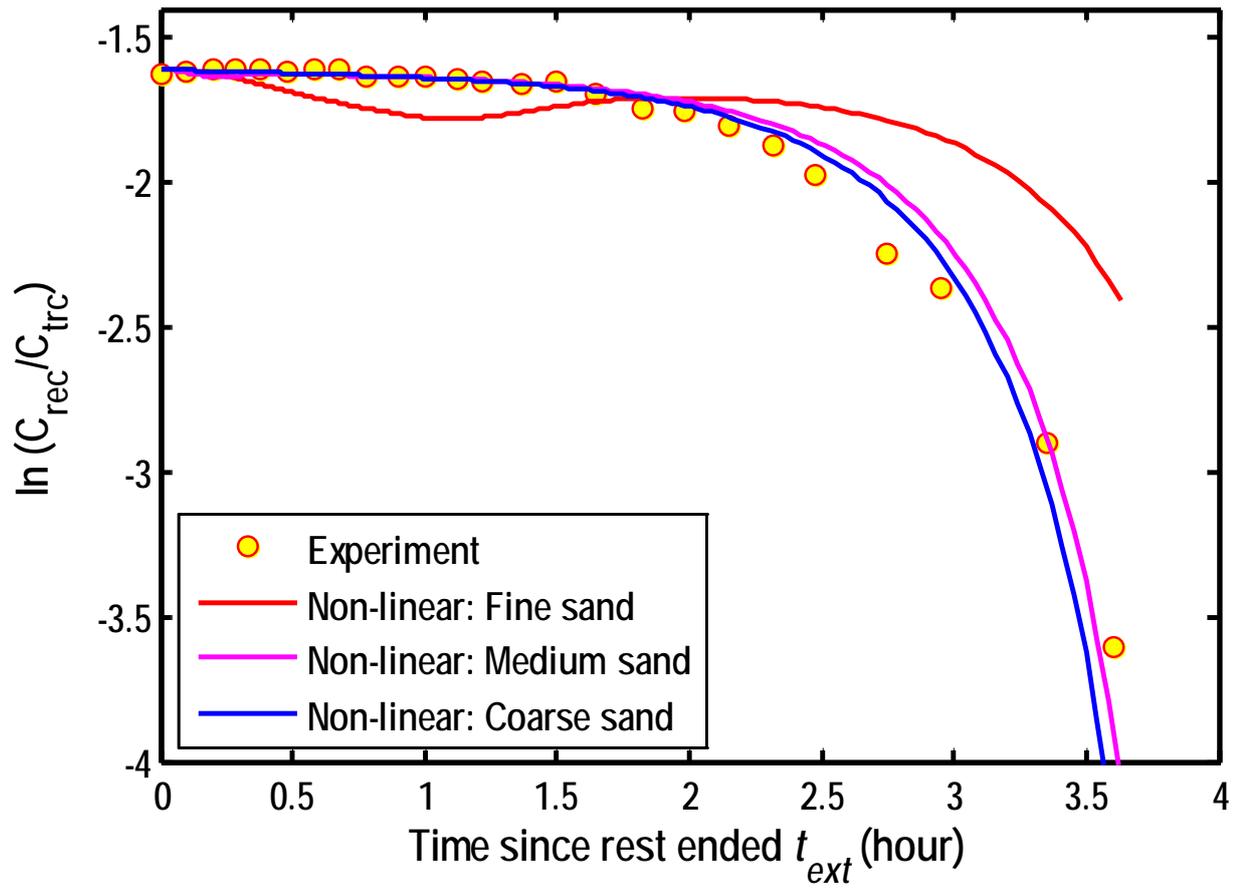


Figure 11. Computed $\ln[C_{rec}/C_{tra}] \sim t^*$ by the model of this study using a nonlinear function to describe the nonlinear chemical reactions.

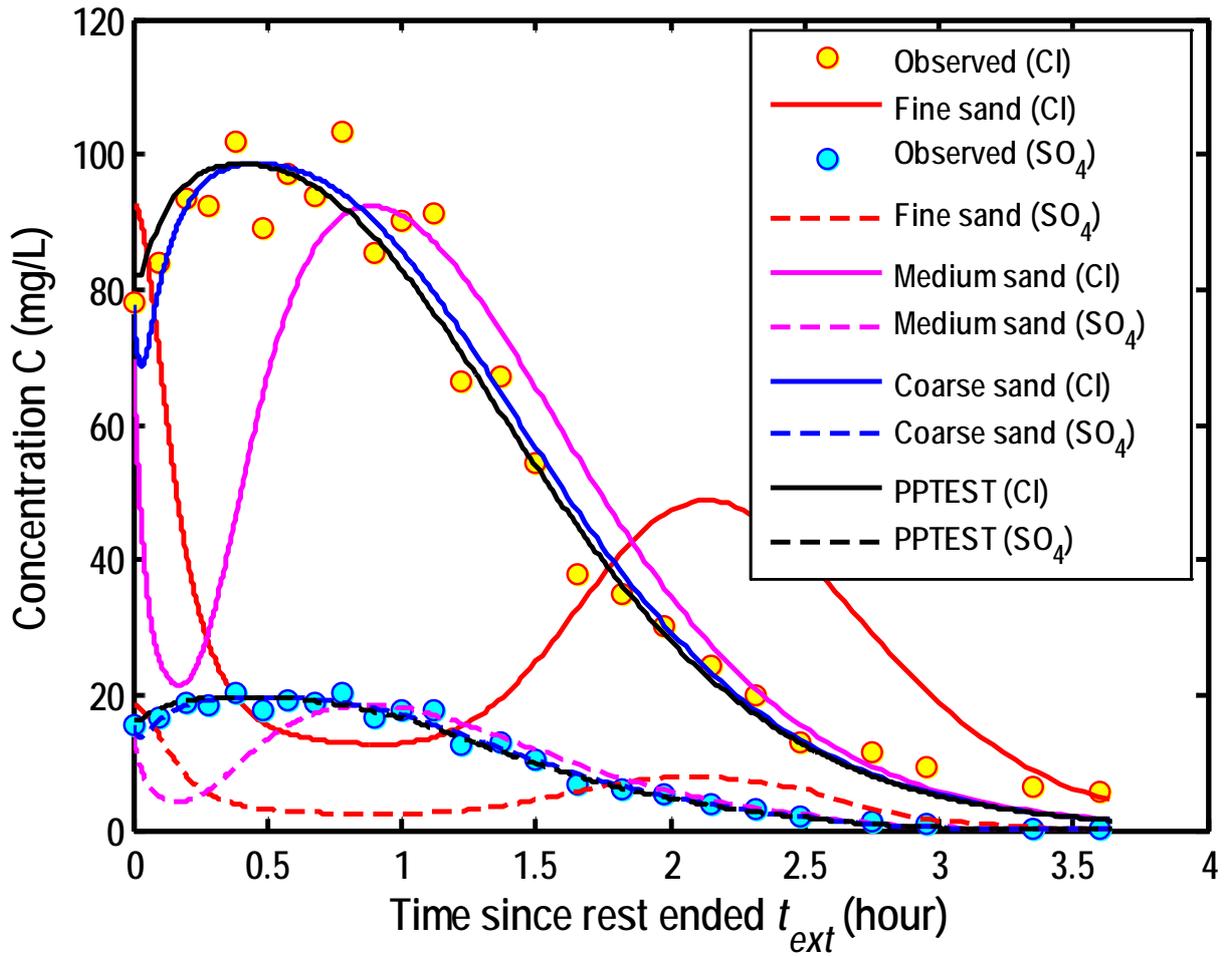

A
Figure 12. BTCs for the different porous media with a piecewise linear function to describe chemical reactions: A. Cl^- and SO_4^{2-} in the aquifer at $r = r_w + 0.15$ m, B. Cl^- in the wellbore.

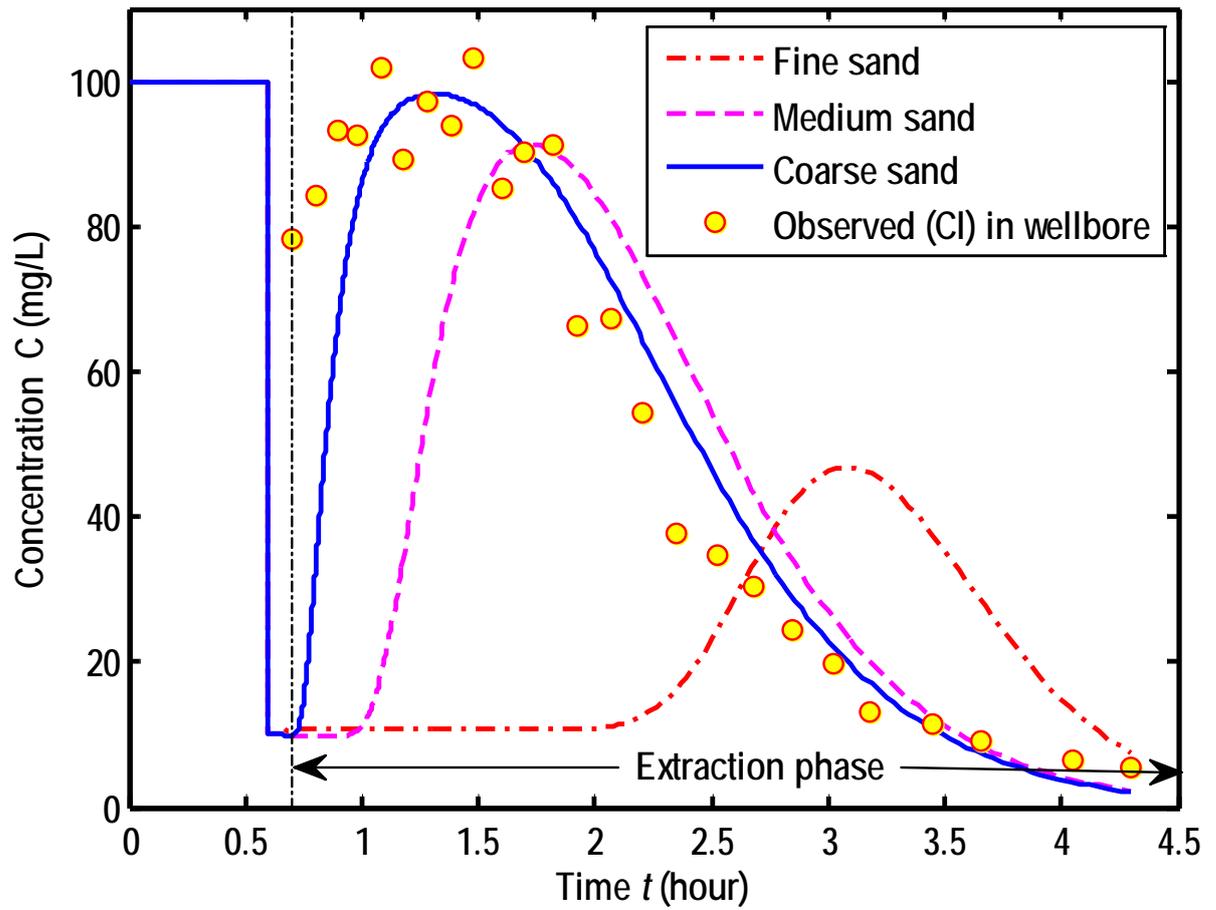

B
Figure 12. BTCs for the different porous media with a piecewise linear function to describe chemical reactions: A. Cl^- and SO_4^{2-} in the aquifer at $r = r_w + 0.15$ m, B. Cl^- in the wellbore.

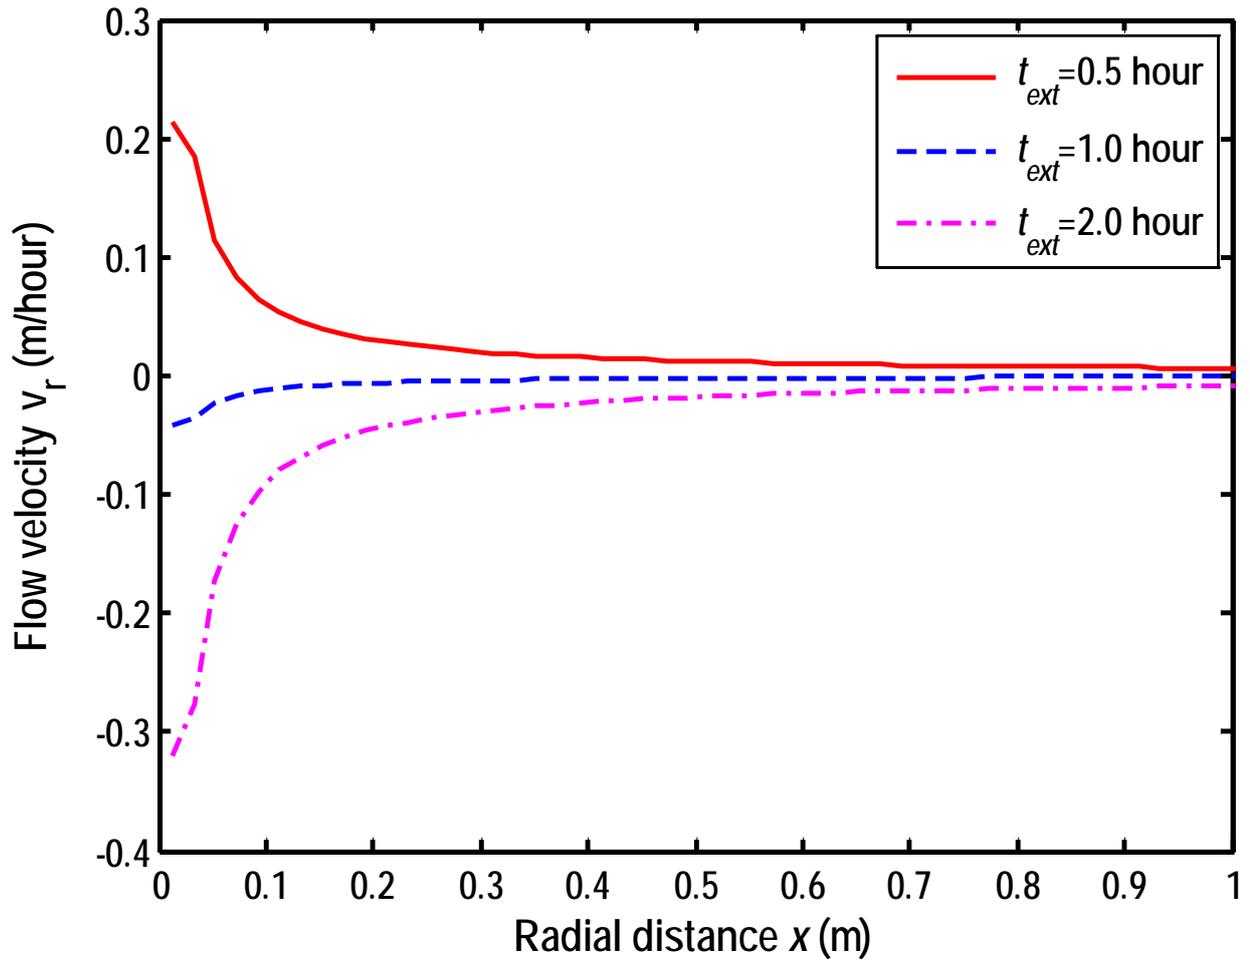


Figure 13. Spatial distribution of the flow velocity in the extraction phase.

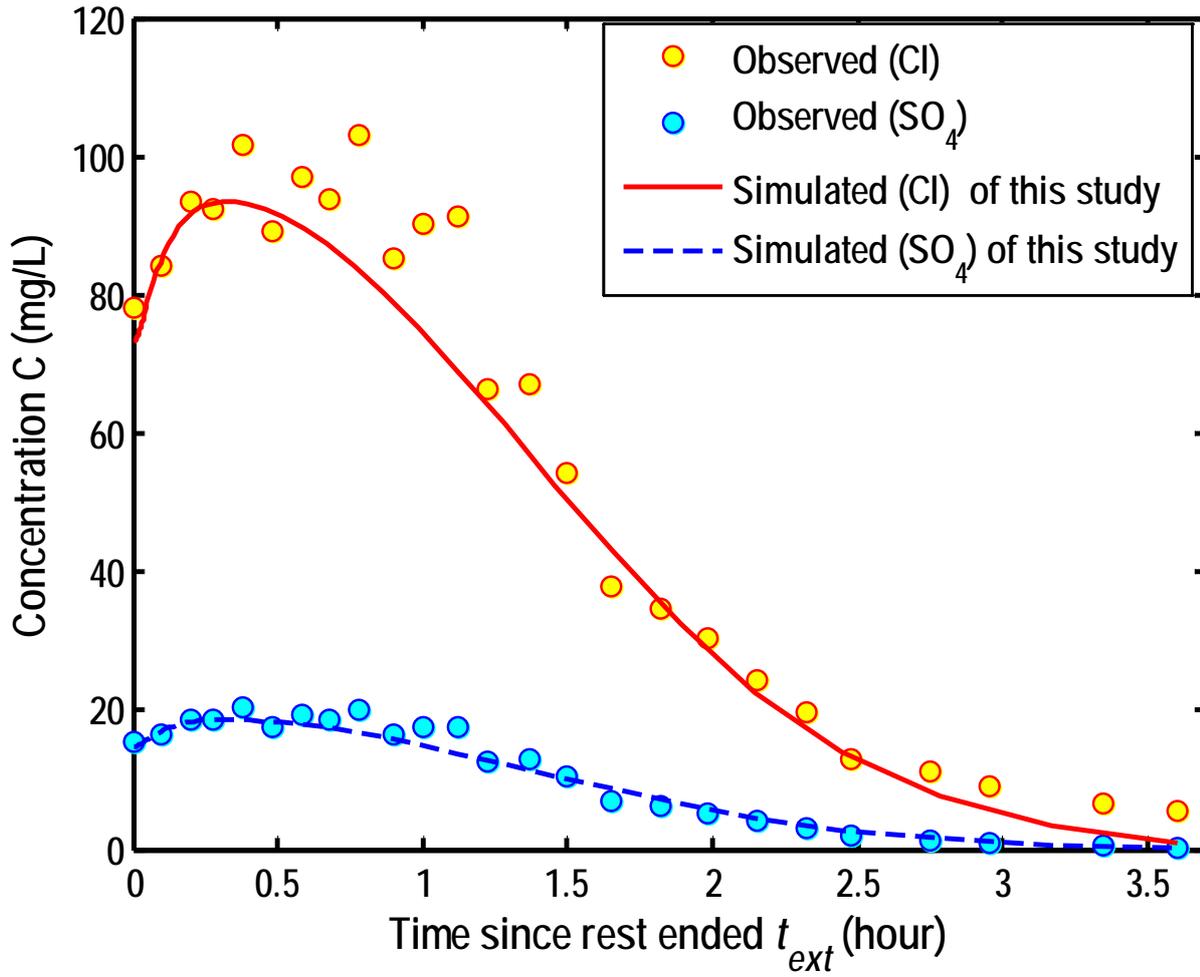


Figure 14. Fitness of the field SWPP test data by the new model of this study.

Table 1. Reaction parameters estimated by linear functions.

K (m/day)	S_s (m ⁻¹)	λ (hour)	$\tilde{\lambda}$ (hour)	Intercept of linear function	$\ln\left(\frac{1 - \exp(-\lambda t_{inj})}{\lambda t_{inj}}\right)$	$\ln\left[\frac{C_{rec}^0}{C_{trc}^0}\right]$
0.1	0.0001	0.1	0.0991	0.0017	-0.0299	0
1	0.0001	0.1	0.0970	0.0016	-0.0299	0
0.1	0.0001	0.2	0.1981	0.0034	-0.0594	0
1	0.0001	0.2	0.1939	0.0031	-0.0594	0

Nomenclature

B	Aquifer thickness [L]
C_i	Aqueous phase concentration of the i^{th} reactive solute [ML^{-3}]
C	Resident concentration of the aqueous phase to represent C_i in Eq. (1) [ML^{-3}]
C_0^{inj}, C_0^{cha}	Solute concentrations injected into the wellbore during the injection and chase phases [ML^{-3}], respectively
$C_w^t, C_w^{t+\Delta t}$	Solute concentrations in the wellbore at the time t and $t + \Delta t$ [ML^{-3}], respectively
$C_{rec}(t^*), C_{tra}(t^*)$	Reactant concentration and the concentration of a conservative tracer [ML^{-3}], respectively
D_r	Dispersion coefficient [L^2T^{-1}]
et^*	Time since the end of injection [T]
F_j	Monod/Michaelis-Menten kinetics function [dimensionless]
K_r	Radial hydraulic conductivity [LT^{-1}]
M	Number of nodes in discretization of the temporal domain [dimensionless]
Δm	Mass entering into the well during time interval Δt [M]
N	Number of the segment for chemical reactions [dimensionless]
N_r	Number of nodes in discretization of the spatial domain [dimensionless]
Q	Flow rate of the well [L^3T^{-1}]
r	Radius distance from the center of the well [L]
r_i	Radial distance of node[L]
r_w	Well radius [L]
r_e	Distance of outer boundary of the aquifer [L]
s	Drawdown [L]
s_w	Drawdown inside the wellbore [L]
S_i	Solid phase concentration of the i^{th} reactive solute [ML^{-3}]
S_s	Specific storage of aquifer [L^{-1}]
t	Time in the SWPP test [T]

t_i	Time of node i [T]
$t_{inj}, t_{cha}, t_{res}, t_{ext}$	Durations [T] of the injection, chase, rest, and extraction phases, respectively
t^*	Time since the end of injection [T]
t_j^*	Times at two ends of segment j [T]
u_r	Radial Darcian velocities [LT^{-1}]
$v_r = u_r/\theta$	Average radial pore velocity [LT^{-1}]
V^t	Volume of water in the wellbore at the time t [L^3]
ρ_b	Bulk density of the aquifer material [ML^{-3}]
θ	Porosity [dimensionless]
\mathcal{H}	Heaviside step function [dimensionless]
n_j, λ_j	Orders [dimensionless] and constant [dimensionless] in the temporal segment j , respectively
α_r	Radial dispersivity [L]
λ	First-order reaction rate constant [dimensionless]
ADE	Advection dispersion equation
BTC	Breakthrough curve
PPTTEST	Solution of Phanikumar and McGuire (2010)
SWPP	Single well push pull
