

A global lake and reservoir volume analysis using a surface water dataset and satellite altimetry

Tim Busker^{1,2}, Ad de Roo¹, Emiliano Gelati¹, Christian Schwatke³, Marko Adamovic¹, Berny Bisselink¹, Jean-Francois Pekel¹, Andrew Cottam¹

5 ¹ European Commission Joint Research Centre, Ispra (VA), I – 21027, Italy

² Department of Physical Geography, Utrecht University, Utrecht, 3584 CS, the Netherlands

³ Deutsches Geodätisches Forschungsinstitut der Technischen Universität München (DGFI-TUM), Munich, 80333, Germany

Correspondence to: Tim Busker (tbusker@live.nl) or Ad de Roo (Ad.DE-ROO@ec.europa.eu)

Abstract. Lakes and reservoirs are crucial elements of the hydrological and biochemical cycle and are a valuable resource
10 for hydropower, domestic and industrial water use and irrigation. Although their monitoring is crucial in times of increased
pressure on water resources by both climate change and human interventions, publically available datasets of lakes and
reservoir levels and volumes are scarce. Within this study, a time series of variation in lake and reservoir volume between
1984 and 2015 were analysed for 137 lakes over all continents by combining the JRC Global Surface Water (GSW) dataset
15 and the satellite altimetry database DAHITI. The GSW dataset is a highly accurate surface water dataset at 30 m resolution
compromising the whole LIT Landsat 5, 7 and 8 archive, which allowed for detailed lake area calculations globally over a
very long time period using Google Earth Engine. Therefore, the estimates in water volume fluctuations using the GSW
dataset are expected to improve compared to current techniques as they are not constrained by complex and computationally
intensive classification procedures. Lake areas and water levels were combined in a regression to derive the hypsometry
relationship (dh/dA) for all lakes. Nearly all lakes showed a linear regression, and 42 % of the lakes showed a strong linear
20 relationship with an $R^2 > 0.8$, an average R^2 of 0.91 and a standard deviation of 0.05. For these lakes and for lakes with a
nearly constant lake area (coefficient of variation < 0.008), volume variations were calculated. Lakes with a poor linear
relationship were not considered. Reasons for low R^2 values were found to be (1) a nearly constant lake area, (2) winter ice
coverage and (3) a predominance of no data within the GSW dataset for those lakes. Lake volume estimates were validated
for 18 lakes in the U.S., Spain, Australia and Africa using in situ volume time series, and gave an excellent Pearson
25 correlation coefficient of on average 0.97 with a standard deviation of 0.041, and a normalized RMSE of 7.42 %. These
results show a high potential for measuring lake volume dynamics using a pre-classified GSW dataset, which easily allows
the method to be scaled up to an extensive global volumetric dataset. This dataset will not only provide a historical lake and
reservoir volume variation record, but will also help to improve our understanding of the behaviour of lakes and reservoirs
and their representation in (large scale) hydrological models.

30

1 Introduction

Reservoirs and lakes cover a small part of the Earth's land surface (~3.7%, Verpoorter et al, 2014), but are crucial elements in the hydrological and biochemical water cycles. Reservoirs have been constructed at a rapid pace between the 1950s and 1980s, and the construction of new reservoirs will continue over the coming century (Chao et al., 2008; Duan and Bastiaanssen, 2013). Reservoirs therefore have an increasing impact on river discharges, as they are able to alter the hydrograph by storing, retaining and releasing water. They are a valuable resource for hydropower, domestic and industrial water use, wetlands and are the primary water resource for nearly half of the irrigation-based agricultural sector by supplying approximately 460 km³ of water per year (Biemans et al., 2011; Hanasaki et al., 2006). Moreover, they play a crucial role in biogeochemical activity by emitting vast amounts of CO₂, triggered by CO₂ saturation in lakes and wetlands worldwide (Balmer and Downing, 2011; Cole et al., 2007; Frey and Smith, 2005; Richey et al., 2002).

The amount of water in a reservoir results from the balance of inflow - i.e. direct precipitation, inflowing river discharge, discharge from riparian communities and industries, and subsurface inflow - and outflow - i.e. direct evaporation, withdrawals, reservoir outflow and groundwater percolation - (Duan and Bastiaanssen, 2013). A long-term imbalance can result in considerable reductions in water storage, as frequently observed around the globe in for example Lake Mead, Lake Powell, Lake Poopo and the Aral Sea (Barnett and Pierce, 2008; Micklin, 2016). Reduced water availability in the reservoirs may then result in reductions in hydropower energy production and/or irrigation water availability and lead to economic and societal damage. Many studies have already pointed out that population and economic growth, together with climate change and increasing energy and food requirements will put increasing pressure on water resources (Haddeland et al., 2014; Liu, 2016). A proper understanding of the historical dynamics of reservoirs as a source of water for irrigation, drinking water and energy production, as well as a buffer for flood protection is essential to also improve the quality of future projections on global water resources.

While for individual river basin studies information on reservoirs may be available, especially for larger scale water resource studies at national, continental and global scale, almost no historical records on reservoirs are readily available to run, calibrate and validate hydrological models (Hanasaki et al., 2006). Moreover, in situ lake level and volume measurements are sparse – especially in developing countries – and have even decreased around the globe during last years (Duan and Bastiaanssen, 2013). Even if water levels or volumes are monitored, the information is rarely freely available due to strategic political, commercial or national legislation reasons. Therefore, only a few comprehensive global lake and reservoir data sets exist (e.g. Downing et al., 2006; Lehner and Döll, 2004; Meybeck, 1995; Verpoorter et al., 2014) and if they provide a water storage estimation, these estimates are not dynamic or do not provide data over a longer time series. Therefore, remotely sensed data may be a valuable alternative to monitor water volumes in lakes and reservoirs over the last few decades.

Monitoring lakes and reservoirs using remote sensing has gained much attention over the last few years (e.g. Avisse et al., 2017; Crétaux et al., 2016; Duan and Bastiaanssen, 2013; Frappart et al., 2006b; Gao et al., 2012; Smith and Pavelsky,

2009). Most of these publications focussed on volume variations by combining altimetry water level with lake area from a multispectral sensor. Landsat or MODIS imagery is commonly used to estimate water surface areas, by classifying the satellite images capturing the water body. The classification procedure is demanding and computationally intensive if large areas or many images are classified, and misclassifications may occur because of the diversity of spectral signatures emitted by water surfaces. Therefore, calculating lake areas is often a constraining factor in lake volume calculations. They are predominantly used for the lake hypsometry relationship (dh/dA), but they normally don't provide any temporal details and therefore cannot be used to calculate volume variations on their own (e.g. Duan and Bastiaanssen, 2013; Ran and Lu, 2012; Zhang et al., 2006). Where lakes areas have been calculated to any great extent, this has only been done for a couple of lakes or at a lower resolution (e.g. Smith and Pavelsky, 2009; Tong et al., 2016). Thus, measuring lake volume variations from space is commonly a trade-off between the number of lakes analysed, the resolution of the lake area calculation and the number of historical lake areas that can be calculated. In this study however, by using the pre-processed recently available Joint Research Centre (JRC) Global Surface Water (GSW) dataset with a high temporal and spatial resolution and extensive validation, this trade-off is no longer an issue. Here we perform volume variation estimations globally with a 30 m resolution from 1984 onwards, using all Landsat images available after the launch of Landsat 5. Thereby this study aims to improve on current monitoring techniques and to develop an automatic methodology that is relatively easy to implement at a large scale.

The paper is organized as follows. Section 2 presents the data used in this research, providing a description of the DAHITI altimetry database and an overview of the GSW dataset. Section 3 contains a description of the methods applied, while Sect. 4 gives a description of the results. Section 5 presents a discussion, and finally the conclusions and recommendations are presented in Sect. 6.

20 **2. Data**

2.1 Satellite altimetry

Satellite altimetry was initially designed for observing the ocean's surface. But for more than 10 years now, satellite altimetry has proven to be a suitable tool for measuring water heights of lakes and rivers. Numerous studies have already shown the potential of estimating water level time series over inland waters using different altimeter missions such as Topex/Poseidon (Birkett, 1995), Envisat (Frappart et al., 2006a), Saral (Schwatke et al., 2015b), Cryosat-2 (Villadsen et al., 2015) or ICESat (Zhang et al., 2011). Water levels from satellite altimetry have also been used for hydrological applications such as the estimation of river discharge (Kouraev et al., 2004; Tourian et al., 2017; Zakharova et al., 2006) and lake volumes (Duan and Bastiaanssen, 2013; Tong et al., 2016; Zhou et al., 2016).

Satellite altimetry has the potential to provide reliable water level time series of globally distributed inland water bodies over the last 20 years. Topex/Poseidon and Jason-1/-2/-3 have an identical orbit configuration with a 9.9156 days repeat cycle and a track separation of about 300 km at the Equator. ERS-1/-2, Envisat and SARAL flew on an orbit with a 35 days repeat cycle and a track separation of about 80 km at the Equator. The combination of different altimeter missions is

essential to increase the temporal resolution, spatial resolution and length of the water level time series. In order to combine altimeter data from different missions, a mission-dependent range bias resulting from a multi-mission crossover analysis has to be taken into account to achieve long homogenous water level time series (Bosch et al., 2014).

The estimation of water level time series for small lakes, reservoirs or rivers is very challenging. Due to coarse mission-dependent ground tracks with a cross-track spacing of a few hundred kilometres, larger lakes and reservoirs have a much higher probability to be crossed by a satellite track than smaller ones. Moreover, small water bodies tend to have a relatively big altimeter footprint compared to their size, which will affect the resulting shape of the returning waveform. The diameter of the footprint is mainly influenced by the water roughness (i.e. surface waves) and surrounding topography. In reality, the diameter of the footprint can therefore vary between 2 km over the ocean and up to 16 km for small lakes with considerable surrounding terrain topography (Fu and Cazenave, 2001). These land influences and surface waves within the altimeter footprint can affect the altimeter waveforms and require an additional retracking to achieve more accurate ranges. In order to achieve accurate results for small water bodies, the conditions have to be ideal, meaning a low surrounding topography, low surface waves and perpendicular crossings of the altimeter track and water bodies shore. In these ideal cases, satellite altimetry has the capability to observe rivers with a width of about 100-200 m or lakes with a diameter of a few hundred meters. The off-nadir effect is another problem which can occur when investigating smaller water bodies. In general, satellite altimetry measures in the nadir direction, but if the investigated water body is not located in the center of the footprint, then the radar pulses are not reflected in the nadir direction which leads to longer corrupted ranges that must be taken into account (Boergens et al., 2016).

In this paper we use water level time series from the „Database for Hydrological Time Series over Inland Waters“ (DAHITI) as input data for the volume estimation. DAHITI is an altimetry database launched in 2013 by the „Deutsches Geodätisches Forschungsinstitut der Technischen Universität München“ (DGFI-TUM). The data is accessible through a user-friendly web service (<http://dahiti.dgfi.tum.de/en/>) and is currently providing water levels for more than 780 lakes, reservoirs, rivers and wetlands. The processing strategy of DAHITI is based on a Kalman filtering approach and an extended outlier detection (Schwatke et al., 2015a) which combines different altimeter missions such as Topex/POSEIDON, Jason-1, 2 and 3, GFO, Envisat, ERS-1 and 2, Cryosat-2, and SARAL/AltiKa. DAHITI uses only high-frequency altimeter data. Depending on the measurement frequency of the altimeter, heights are measured every ~620m (10Hz), ~374m (20Hz), ~294m (18Hz) or ~173m (40Hz) along the altimeter track. To achieve more accurate ranges over inland waters, the Improved Threshold Retracker (Hwang et al., 2006) is used for the reanalysis of the altimeter measurements. The DAHITI approach provides all water level time series error information based on formal errors of the Kalman filtering.

The quality of the water level time series from satellite altimetry in DAHITI has been validated with in-situ data and varies depending on the extent of the inland water body and length of the crossing altimeter track. For large lakes with ocean-like conditions (such as the Great Lakes), accurate measurements can potentially be achieved with a root-mean-square error (RMSE) as low as 4-5 cm, while for smaller lakes and rivers the RMSE could increase towards several decimeters (Schwatke et al., 2015a). However, no clear relationship was observed between lake size and altimetry accuracy, as the

quality of water level time series is not only dependent on the target size, but also on many other factors (e.g. surrounding topography, surface waves, winter ice coverage, the position of altimeter track crossings).

2.2 The JRC Global Surface Water (GSW) dataset

The JRC Global Surface Water (GSW) dataset (Pekel et al., 2016) maps the temporal and spatial dynamics of global surface water over a 32-year period (from 16 March 1984 to 10 October 2015) at 30 m resolution. This dataset was produced by analysing the whole L1T Landsat 5, 7 and 8 archive. At the time of the study, it represented 3066080 images (1823 terabytes of data) and covered 99.95% of the landmass. The analysis was performed thanks to a dedicated expert system classifier. The inference engine of the classifier is a procedural sequential decision tree, which used both the multispectral and multitemporal attributes of the Landsat archive as well as ancillary data layers. It assigned –in a consistent way in both space and time- each pixel to one of three target classes, either water, land or non-valid observations (snow, ice, cloud or sensor-related issues). Classification performance, measured using over 40000 reference points revealed the high accuracy of the classifier; less than 1 % of false water detections, and less than 5 % of omission (Pekel et al., 2016). Thanks to its technical characteristics, the GSW dataset constitutes a very valuable long-term surface water record.

The stack of classified images constitutes the long-term water history documenting the “when and where” of the water presence. This information is recorded in the monthly water history dataset – a set of 380 global scale maps documenting the water presence for each month of the 32-year archive. This monthly information constitutes the most comprehensive and detailed data set of the GSW. Eight additional information layers, documenting different facets of the surface water dynamics are also available within the GSW dataset: (1) water occurrence, (2) occurrence change intensity, (3) seasonality, (4) recurrence, (5) transitions, (6) maximum water extent, (7) monthly recurrence and (8) yearly history. In the framework of this study, the monthly water history and maximum water extent (MWE)- a map documenting places where water has been detected at least once over the 32 years- were used.

The GSW dataset was completely developed using Google Earth Engine and all of the layers are available through the Earth Engine catalog (Gorelick et al., 2017). Moreover, Earth Engine is used in this research to calculate the monthly lake area time series. Earth Engine is a cloud-based global scale platform optimized for parallel geospatial analyses and data management in earth sciences, using Google’s computational power (Gorelick et al., 2017). Earth Engine allowed the analysis of lakes at global scale in high detail, while maintaining a high resolution of 30 m.

3 Methodology

3.1 Calculating monthly lake areas

Monthly time series of lake areas have been calculated for 137 lakes over all continents (Figure 1). These contained nearly all lakes available in the DAHITI altimetry database at the time of processing. No additional criteria were set for this study, as the GSW dataset covers all lakes globally. For 380 months over the period 1984-2015 lake areas were calculated using a

dedicated Google Earth Engine script. For each lake, a Region of Interest (ROI) was set by a manually drawn polygon that was approximately equal to the MWE of the lake (Figure 2). For every month, lake areas were calculated directly from the GSW monthly history dataset, by counting the number of water pixels inside the polygon and multiplying this by the pixel area. To improve the accuracy of the area calculations, the amount of non-valid observations (no data pixels) within the MWE, compared to all MWE pixels within the ROI, has been expressed as the no data fraction. This no data fraction has been used to filter accurate and less accurate area observations in the regression analysis and volume calculations (see Sect. 3.2). The white striping observed for Lake Mead in Figure 2 is an example of no data that is caused by Landsat sensor issues. Moreover, the coefficient of variation (CV) has been calculated from the area observations to express lake area variation normalized by mean lake size.

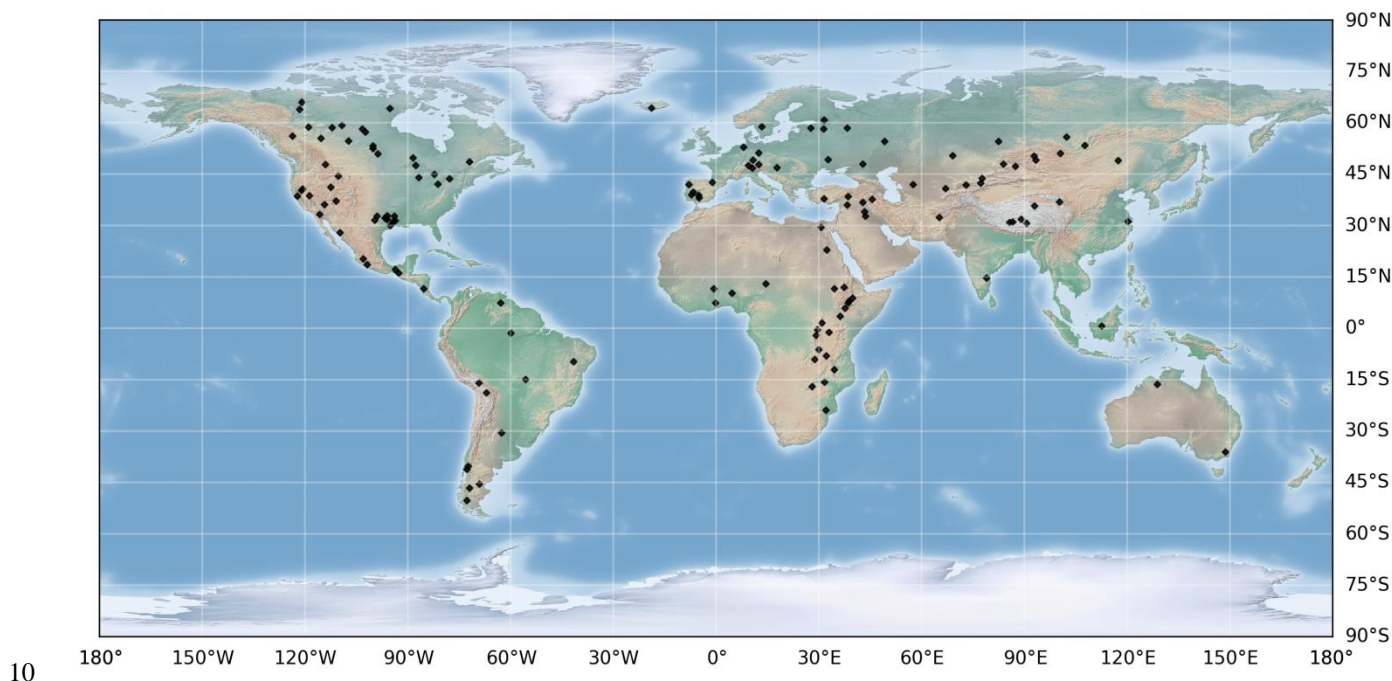


Figure 1 Geographical distribution of the analysed lakes.

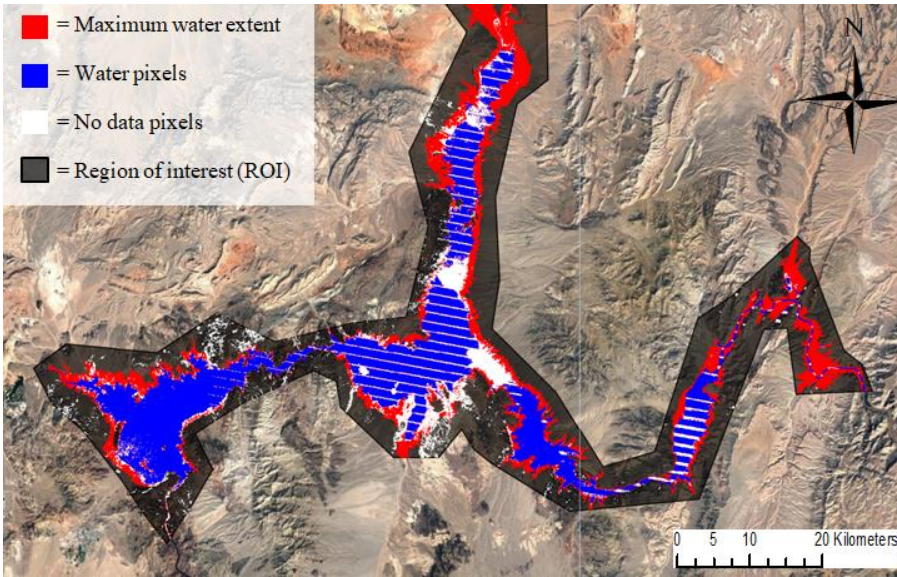


Figure 2 An example of the area input data for Lake Mead (U.S.) for February 2015, where the maximum water extent is marked as red, water as blue and no data as white pixels.

3.2 Calculating lake volumes variations

5 The volume of a lake or reservoir is a function of the water area (A) and level (h), derived from the hypsometry relationship (dh/dA). Monthly lake areas were only used in the regression if the no data percentage was below 1 %, because only accurate areas were desired to construct the regression line. As exact dates are not provided by the GSW dataset, the altimetry data has first been averaged per month after which monthly water levels ($h_{\text{Altimetry}}$) were coupled with monthly area values (A_{GSW}). These are illustrated with red dots in Figure 3 for Lake Mead (U.S.). The water level-area pairs were assumed
 10 to give linear hypsometric relationships of the water bodies (Figure 3, dashed blue line):

$$h_i = a \cdot A_i + b + \varepsilon_i \quad (1)$$

Where A_i and h_i are the area and water level respectively, a and b are the slope and intercept parameters, and ε_i is the error
 15 term or residual for time step i . The parameters a and b have been derived by minimising the residual sum of squares (RSS, i.e. $\sum_i \varepsilon_i^2$), using an Ordinary Least Squares Regression (OLS) technique. Therefore, the resulting residuals have zero mean and they are assumed to have a normal distribution. The hypsometric relations can be integrated to obtain the expected volume of the water body:

$$20 \quad E[V_i] = \frac{(h_i - b) \cdot A_i}{2} \quad (2)$$

Where A_i is the monthly calculated lake area derived from the GSW dataset, h_i is the water level from altimetry and b is the water level of the theoretical lake bottom from the linear regression at $A=0$, for time step i . By substituting the regression equation in Eq. (2), the expected value of the water volume can be calculated using h or A only:

$$5 \quad E[V_i] = \frac{(h_i - b)^2}{2a} = \frac{a \cdot A_i^2}{2} \quad (3)$$

Subsequently, a confidence interval (CI) was calculated around the expected value of the volumes calculated with A . The residual term in Eq. (1) was included in the volume calculation (Eq. 3) to estimate the residual uncertainty on the expected volumes calculated with A values. It is assumed that the residuals have a zero-mean Gaussian distribution $\varepsilon \sim N(0, \sigma_\varepsilon^2)$,
 10 where σ_ε is the standard deviation of ε . To obtain the α - probability CI around the expected volume $E[V_i]$, the residual term is replaced by its $\frac{1-\alpha}{2}$ and $\frac{1+\alpha}{2}$ quantiles:


$$CI_{E[V_i]} = \frac{a \cdot A_i^2}{2} \pm \frac{A_i}{2} \cdot \sigma_\varepsilon \cdot \Phi^{-1}\left(\frac{1+\alpha}{2}\right) \quad (4)$$

15 Where $\Phi^{-1}\left(\frac{1+\alpha}{2}\right)$ is the inverse of the cumulative density function of the standardized Gaussian distribution (mean = 0, standard deviation = 1) at probability level $\left(\frac{1+\alpha}{2}\right)$. In this research, a 95 % CI has been used.

Using these equations, absolute volumes are computed by using only the area or water level estimates, giving two different volumetric time series: V_{GSW} and $V_{\text{altimetry}}$. Rather than a 1 % no data threshold in the regression analysis for lake area
 20 estimations, a 5 % no data threshold has been applied to area estimations used for the volume calculation. This resulted in the best trade-off between the number of observations from the GSW dataset and the accuracy of the estimates. The extrapolated part of the regression line, and therefore in particular the theoretical lake bottom b , should be considered with caution, as the hypsometry relationship may change outside the observational range. The absolute volumes from Eq. (3) are therefore converted to volume variations from t_0 to t_1 (Figure 3, purple area). Most estimated volume variations were
 25 calculated using h or A values inside the observed part of the regression line (i.e. inside the range of observed h - A pairs). However, some volumes were estimated with A or h values that are outside such range. These volume estimates use an extrapolated lake hypsometry which is not observed and therefore more uncertain. These estimates are therefore separately classified in the volumetric plots.

Not all lakes showed considerable area fluctuation, as some lakes and reservoirs are artificially bounded or have very steep
 30 banks. The signal-to-noise ratio (SNR) for lakes with a very small CV is likely to be low as errors due to no data, misclassifications and the lake border discretisation with 30 m pixels will mask the actual area variations. Therefore, the

areas of lakes with a very small CV were interpreted to be constant. Lake volumes were still calculated, but only by multiplying the mean area with water level variations as observed by altimetry.

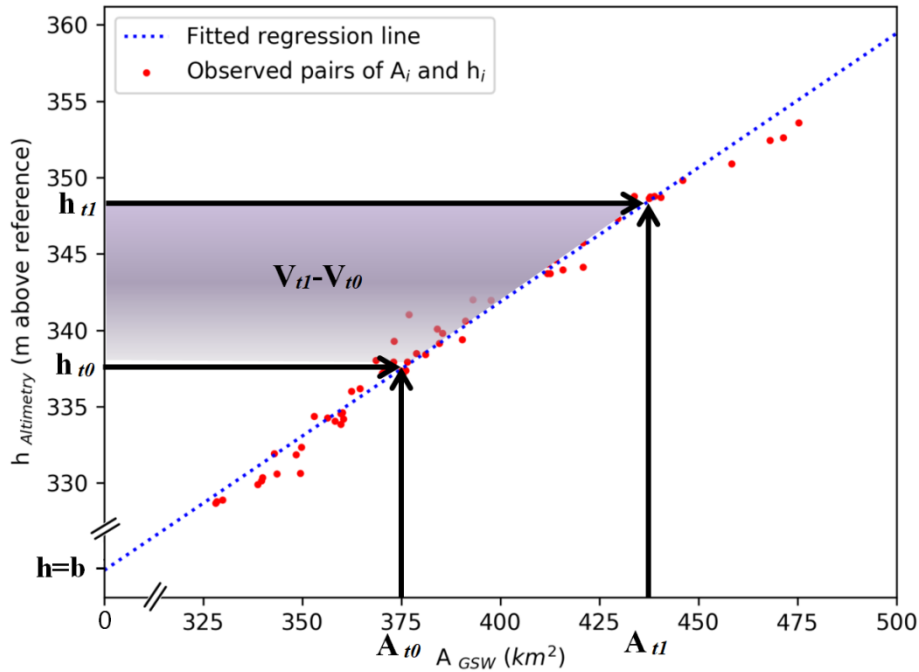

5 **Figure 3** Volume variation calculation for Lake Mead. The observed monthly pairs of A and h (red dots) are used to estimate a linear regression (blue dashed line) that is used to calculate volumetric changes. The volumetric change from t_0 to t_1 is equal to the purple area and can be visually interpreted as a 2D lake section.

3.3 Validation of the volume estimates

The validation has been carried out using the Pearson's correlation coefficient r , the root-mean-square error (RMSE) and
 10 the normalized RMSE (NRMSE). The Pearson's correlation coefficient r measures the linearity between in situ and estimated
 volume variations, while the RMSE accounts for the absolute error. The NRMSE has been calculated by normalizing the
 RMSE with the range of in situ lake volume variations:

$$\text{NRMSE} = \frac{\text{RMSE}}{\text{Obs}_{\max} - \text{Obs}_{\min}} \cdot 100 \% \quad (5)$$

15

Where Obs_{\max} and Obs_{\min} are the maximum and minimum observed in situ volumes since 1984.

4 Results

4.1 Regression analysis

137 lakes and reservoirs have been analysed over all continents. The linear OLS regression analysis resulted in highly variable R^2 values among the lakes and reservoirs. Low R^2 values were observed to be caused mainly by noise rather than non-linear hypsometry, as only three lakes (Tawakoni, Urmia and Eagle) returned a clear non-linear hypsometry relationship (see discussion). The mean R^2 of all 137 lakes is only 0.58, but 58 lakes showed an $R^2 > 0.8$ with an average of 0.91. Lake Eucumbene (Australia), Lake Kariba (Zambia), Lake Powell, Lake Mead and Hubbard Creek Reservoir (U.S.) are examples of these lakes, with high R^2 values and low regression residuals. The regression results for Lake Powell, Kariba, Mead and Nasser are showed in Figure 4, with R^2 values of respectively 0.99, 0.96, 0.98 and 0.92.

10


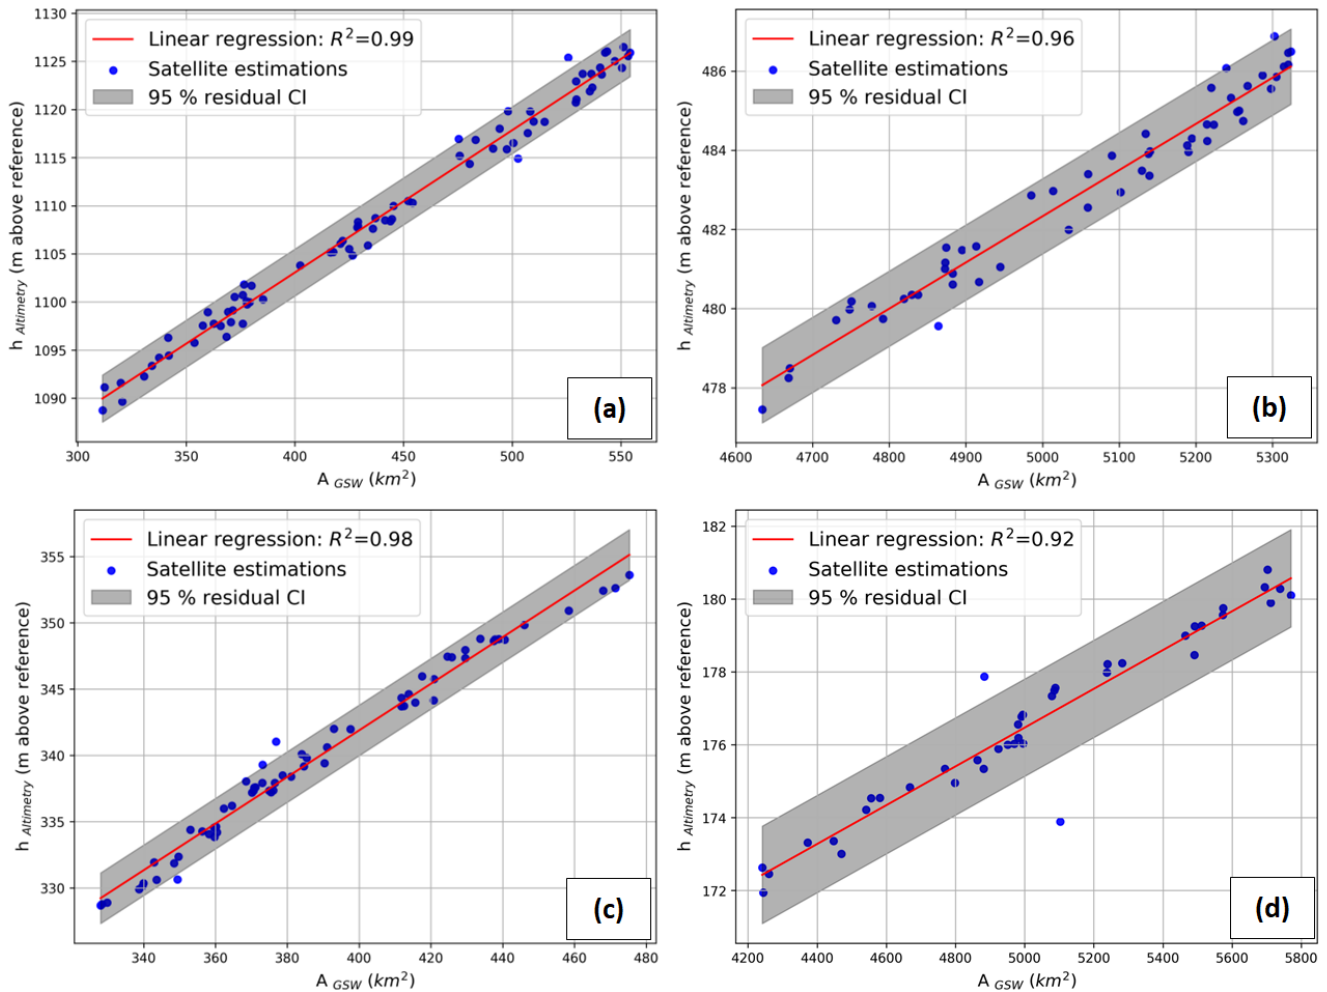


Figure 4 Area-level regressions for Lake Powell (a), Kariba (b), Mead (c) and Nasser (d), with R^2 values of respectively 0.99, 0.96, 0.98 and 0.92.

4.2 Division of the lakes in groups

Based on the R^2 values from the regression and the area CV, the lakes have been subdivided into lakes with a constant area (Lc) and lakes with a variable area (Lv) where the latter (Lv) category has been further subdivided into lakes with a good performance (LvG; $R^2 > 0.8$) and lakes with a poor performance (LvP; $R^2 < 0.8$) (Figure 5). 42 lakes are categorized as Lc as they showed a $CV < 0.008$ and all these lakes returned a $R^2 < 0.6$ with an average of 0.16 (black circles, Figure 5). These lakes have a very small variation in area, resulting in highly inaccurate regressions due to a low SNR. Therefore, these lakes were assumed to have a constant area and their volume was calculated by multiplying water level observations with the average of the GSW area estimates. For $CV > 0.008$, lakes showed considerable monthly area variations and mostly acceptable R^2 values with an average of 0.76. 58 lakes were classified as LvG as they showed a $R^2 > 0.8$, with an average of 0.91 (green triangles, Figure 5). For these lakes, volumes have been calculated using accurate linear regressions. For 37 lakes with a variable area, the regression was less accurate with a $R^2 < 0.8$ and a mean of 0.50 and therefore they are classified as LvP (red triangles, Figure 5). A table for each group, showing the most important lake properties and the R^2 values, is given in appendix 1.

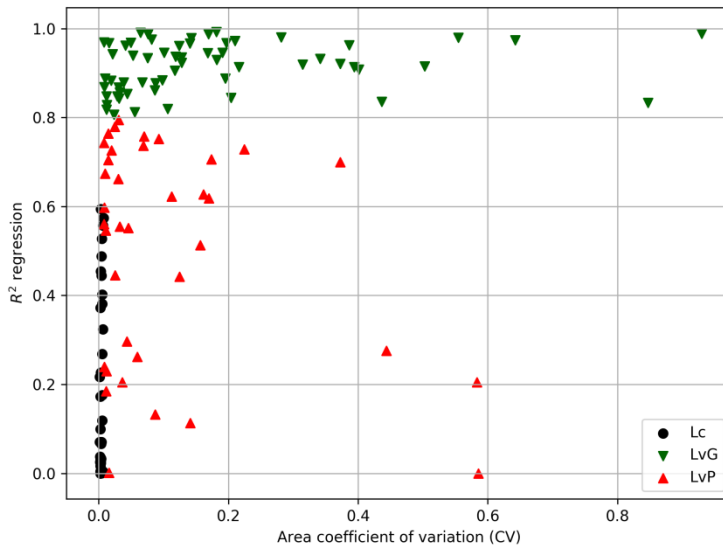

15 **Figure 5 Illustration of the division of the lakes into lakes with a constant area (Lc) and a variable area with a good performance (LvG) and with a poor performance (LvP), based on the R^2 and CV values.**

4.3 Volumetric results

For a total of 100 lakes (58 variable area lakes and 42 constant area lakes), the volume variation time series have been calculated, using both water levels ($V_{\text{Altimetry}}$) and water areas (V_{GSW}) as inputs. Volumetric results of the variable area lakes Powell, Kariba, Mead and Nasser are outlined below and are shown in Figure 6. $V_{\text{Altimetry}}$ or V_{GSW} estimates inside the

20

observational range of the regression (h - A pairs) are coloured blue and red. Some volume estimates are derived from observations outside the regression range; these are extrapolated estimates and are displayed with a darker colour tint. The red line displays the best estimate of the volume variation as calculated with observed water classifications in the GSW dataset (i.e. total area of surface water). The red shaded area displays the upper volume boundary on the V_{GSW} estimates, as derived from the GSW dataset pixels classified as no data within the MWE (max 5 %, see section 3.2). These no data pixels could theoretically be covered with water for that month, and this would increase the estimated volume. In this case the volume variation estimate would be somewhere within the red shaded area. The upper limit of the red shaded area would thus be reached if all no data pixels within the MWE contain surface water during that particular month. Another source of uncertainty is the uncertainty induced by the residuals in the regression, which is represented by the grey shaded area. It shows the effect of the 95 % residual-based CI on the volume variation estimates as calculated with Eq. (4).

Figure 7 summarizes the volumetric results, by showing lake location, lake type (constant, variable good or variable poor lakes), and the average volumetric change. The volumetric change shows the magnitude of reduction (red circles) or increase (blue circles) of average water storage between the periods 1984-2000 and 2000-2015 for LvG, and from 2000-2008 to 2008-2016 for Lc. Slightly more lakes showed a positive change (60) than a negative one (40). Considerable reductions of water storage were observed in Western U.S., due to major average volume declines in Lake Mead (10 km^3), Powell (6 km^3) and the Great Salt Lake (16 km^3). Average increases were found for the Great Lakes and most of the analysed lakes in Southeast Africa.

Lake Mead was formed after the construction of the Hoover Dam during the 1930s, in the former steep V-shaped slopes created by the Colorado River. It is located approximately 50 km east of Las Vegas in the Black Canyon, Arizona- Nevada (Figure 7). With a maximum depth of 158 m and a maximum capacity of 33-35 km^3 , Lake Mead is the largest reservoir in the U.S. by capacity and the second largest (after Lake Powell) by water area (Barnett and Pierce, 2008; Holdren and Turner, 2010). The lake showed a considerable reduction in water storage between 1984 and 2015 (Figure 6c). Between two periods of maximal reported capacity (1984-1988 and 1998-2000), a small decrease in capacity of around 7 km^3 was observed. From its historical maximum capacity in 2000, the water level dropped 40 m between 2000 and 2010 (Cook et al., 2007; Duan and Bastiaanssen, 2013), mainly because of a combination of water abstractions by around 25 million people and multiple intensive droughts (Holdren and Turner, 2010). This reduction of water storage is also reported by the satellite estimates. According to our estimates, Lake Mead lost approximately 20 km^3 of water from 2000 to 2015 (Figure 6c, Figure 7). Using the USGS in situ measurement of storage volume of 31 km^3 in 2000, this is an almost 70 % reduction of water storage over the last 15 years.

Lake Nasser is a crucial resource for Egypt's population, functioning as a source for irrigational water and electricity and as an important flood-control mechanism. With an estimated maximum storage capacity of 162 km^3 , Nasser is the main freshwater resource for approximately 85 % of the Egyptian population (Gao et al., 2012; Muala et al., 2014). The lake shows a strong annual cycle, with declines in water storage during the first half of the year and increases during the second half of the year (Figure 6d). The annual cycle amplitude varies from around 10 to 20 km^3 . Besides this yearly fluctuation,

Lake Nasser features an even longer inter-annual variability. From the lowest recorded volume over 1985-1993, water storage increased at least 40 km³ to record-high estimates in the period 1998-2002. From 2002, the lake shows a decreasing trend towards 2006, during which time it lost approximately 30 km³. Two peaks were observed over 2007-2009 and in 2005, when the lake gained 30-35 km³ of water and subsequently lost the same amount. The lake showed an average volume decrease over the whole observational period of only 1.8 km³, which is negligible compared to the size of the lake (Figure 7).

Lake Kariba formed after the construction of the Kariba Dam on the Zambezi River on the border of Zimbabwe and Zambia (Berg et al., 1996). It has an average surface area of 5364 km² and with an estimated capacity of 185 km³ it is the largest reservoir in Africa by volume (LakeNet, 2003). The reservoir shows a consistent seasonal variation, with increases of around 10-20 km³ during the first five months, and decreases over the last seven months of the year (Figure 6b). Moreover, the lake gained at least 45 km³ of water from 1996 to 1999. From 2000 to 2007, the volume decreased again by approximately 30 km³. From 2008, the water volume increased to a maximum reported capacity in May 2010. From July 2014, the lake shows a constantly decreasing trend towards the last year of the data (September 2015). Over the whole observational period, the average storage of the lake increased by 15 km³ (Figure 7).

With an area of 653 km², Lake Powell is the largest lake in the U.S. by water surface area (Barnett and Pierce, 2008; Benenati et al., 2000). Its maximum capacity of 33.3 km³ is slightly less than that of Lake Mead (Benenati et al., 2000; Holdren and Turner, 2010). The lake showed two periods of maximum capacity during 1984-1988 and 1995-2000 (Figure 6a). As observed for Lake Mead, a period of intensive drought in the years after 2000 caused a considerable reduction in volume. Over the period 2000-2004, water storage declined by approximately 16 km³. According to Cook et al. (2007), the volume left was only 38 % of the live capacity. The average volume decreased by 6.3 km³ from 1984-2000 to 2000-2015 (Figure 7).

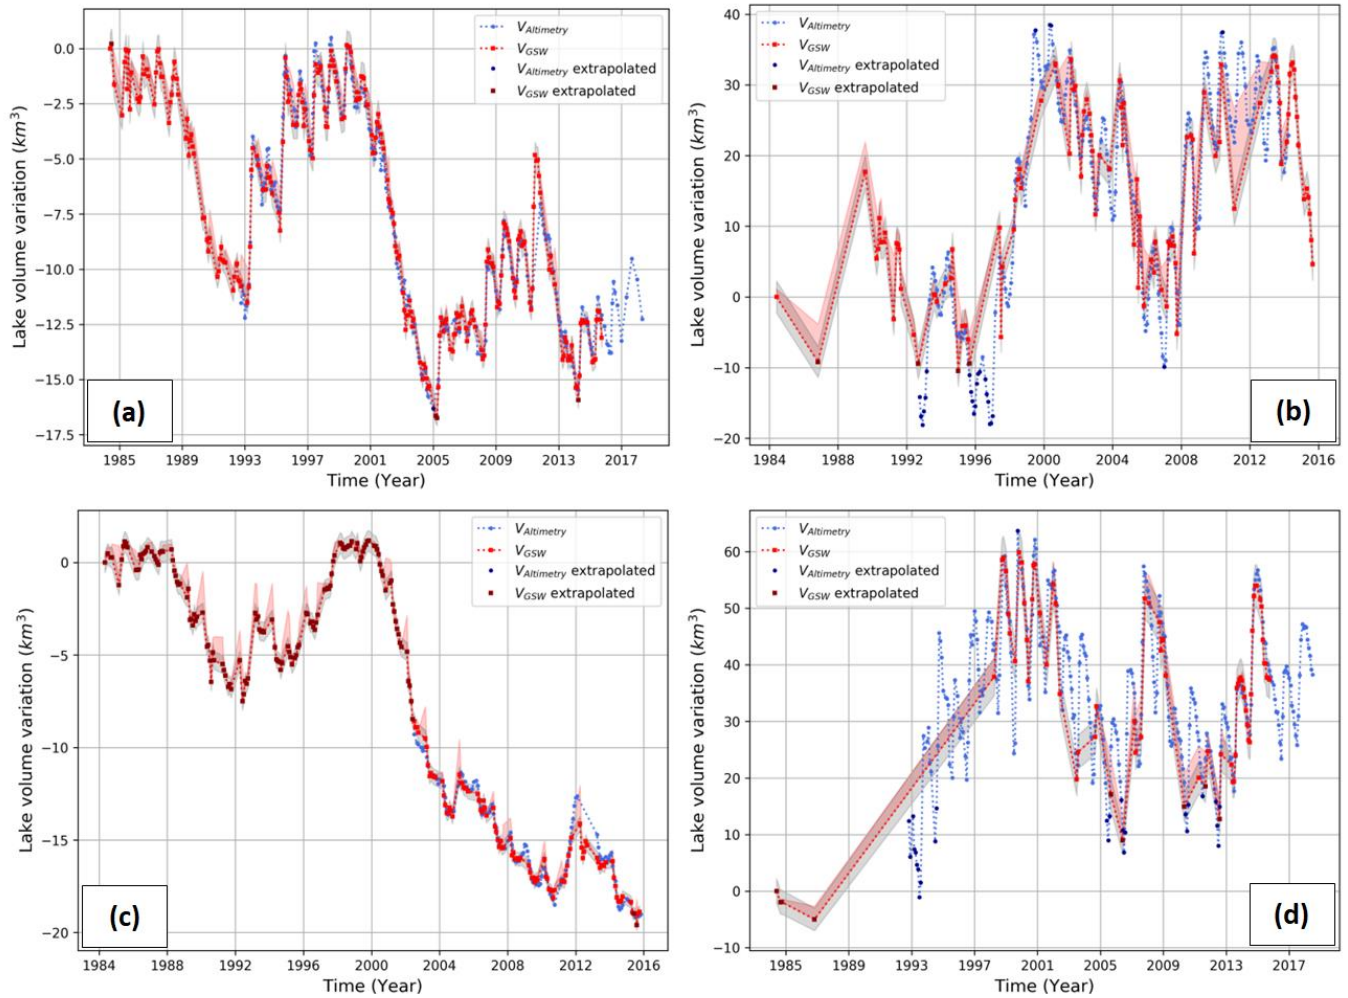


Figure 6 Lake volume variations for Lake Powell (a), Kariba (b), Mead (c) and Nasser (d) using $V_{\text{Altimetry}}$ (blue) and V_{GSW} (red). The grey and red shaded areas represent the 95 % residual-based CI and the uncertainty induced by no data within the MWE, respectively.

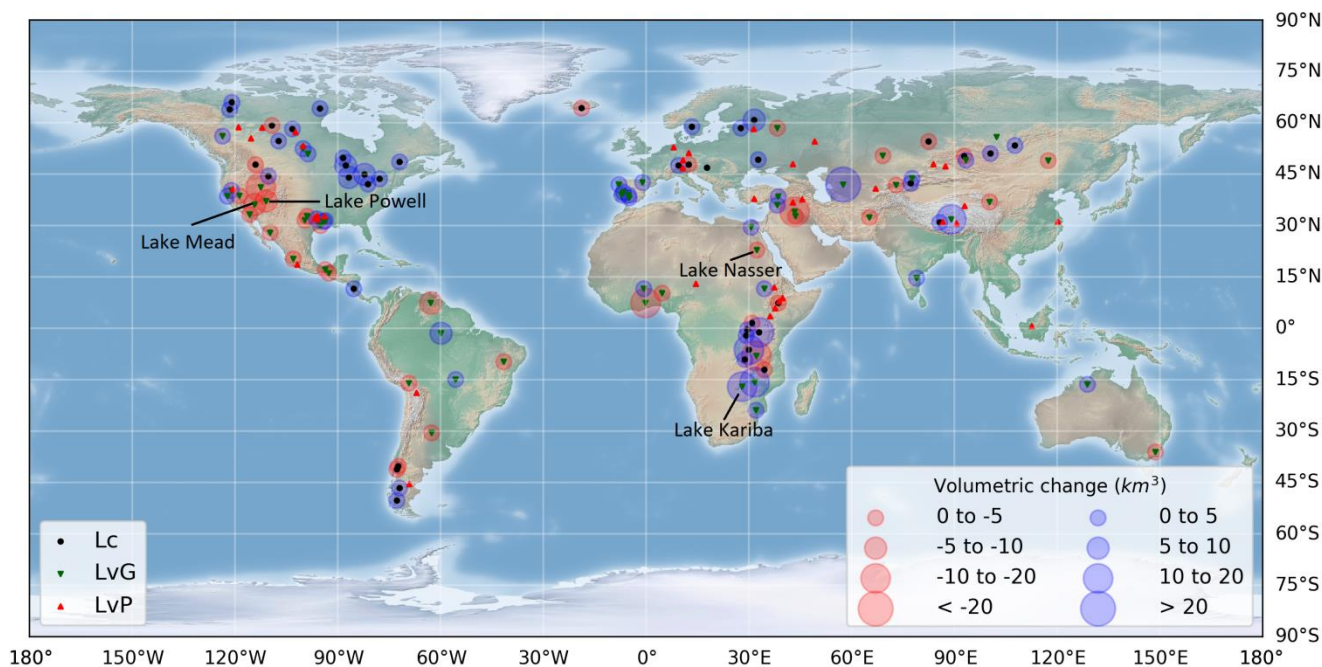


Figure 7 Lake and reservoir types (constant (Lc), good variable (LvG) or poor variable (LvP)) with the average volume change.

4.4 Validation of the volume estimates

Lake volume variations have been validated against in situ data that are based on a full bathymetric survey for 18 lakes. 5
 Nine of these lakes are located in the USA (Richland Chambers Reservoir, Hubbard Creek Reservoir, Lake Mead, Lake Houston, Lake Powell, O. H. Ivie Lake, Toledo Bend Reservoir, Lake Walker and Lake Berryessa), 1 in Africa (Roseires Reservoir), 6 in Spain (Serena Reservoir, Puente Nuevo Reservoir, Alcantara Reservoir, Lake Almanor, Yesa Reservoir and Encoro de Salas Reservoir) and 2 in Australia (Lake Argyle and Lake Eucumbene). U.S. lakes have been validated using USGS in situ lake/reservoir volumes obtained from: <https://waterdata.usgs.gov/nwis/current>. Lake Powell was the only U.S. 10
 reservoir whose data were obtained from the United States Bureau of Reclamation (USBR): <https://www.usbr.gov/rsvrWater/HistoricalApp.html>. Spanish validation data were gathered from the Spanish Ministry of Agriculture, Food and Environment via <http://ceh-flumen64.cedex.es>. In situ data for Roseires Reservoir were received from the Dams Implementation Unit of Ministry of Water Resources and Electricity, Sudan. Validation data for Lake Argyle and Lake Eucumbene were obtained from WaterNSW in Australia via <http://realtimedata.water.nsw.gov.au/water.stm>. 15
 The validation analysis has been done for volumes both excluding and including extrapolation. The non-extrapolated volumes showed average Pearsons r , RMSE and NRMSE of 0.96, 0.14 km³ and 7.25 % respectively (Table 1). The high correlation indicates that the validation data showed a very high linearity. When the extrapolated volumes were included, the NRMSE was slightly higher (7.4 %), but still acceptable for most lakes. However, for h or A observations that are much

smaller or larger than the observed h - A pairs in the regression, the extrapolation errors can be much higher (e.g. Roseires Reservoir). In general, relatively few V_{GSW} or $V_{Altimetry}$ estimates used this extrapolation.

Figure 8 shows the relationship between satellite and in situ volume variations for Lake Mead and illustrates the accuracy of the methodology. The estimates showed strong linearity with in situ data, as shown by the correlation coefficient of > 0.99 for both V_{GSW} as $V_{Altimetry}$. Both estimates were very close to the 1:1 line and therefore had a low NRMSE of 5.43 and 1.87 for V_{GSW} and $V_{Altimetry}$ respectively. The NRMSE of V_{GSW} was slightly higher, as this includes the extrapolated volume estimations from volume variations of 2 to -8 km^3 . These volumes were estimated using area observations outside the range of h - A pairs used in the regression. It is clear that the hypsometry of the lake does not hold perfectly true for these calculated areas.

10


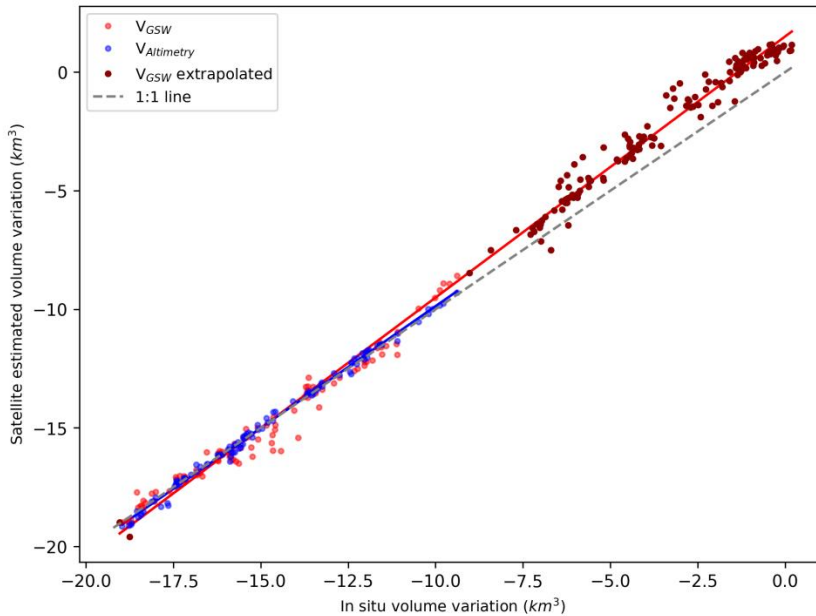


Figure 8 Relationship in volume variation between satellite estimated and in situ observations for Lake Mead, with a Pearson's $r > 0.99$ and a NRMSE of 5.43 % (V_{GSW}) and 1.87 % ($V_{Altimetry}$).


Figure 9 and Figure 10 show the validation volume time series against the satellite estimated volumes for Lake Mead and Lake Powell respectively. The time series showed that both the timing and magnitude of the estimated volume fluctuations were accurate for these lakes. For the non-extrapolated part of Lake Mead (2002-2016), estimated volumes were almost equal to the validation data. The extrapolated part (before 2002) was slightly overestimated. However, the dynamics over this period were still well captured. Lake Powell also showed accurate results, for both the seasonal and inter-annual fluctuations in water storage. Noteworthy for both lakes is the density of area observations due to a low amount of no data in the GSW dataset. For Lake Powell, the V_{GSW} even correctly captured seasonal fluctuations, which is not always the case (see

20

discussion). The high accuracy was expressed in a low NRMSE of 4.52 and 2.96 % for V_{GSW} and $V_{Altimetry}$ respectively. Note that almost no extrapolated volume estimates were required for the volume time series of Lake Powell.

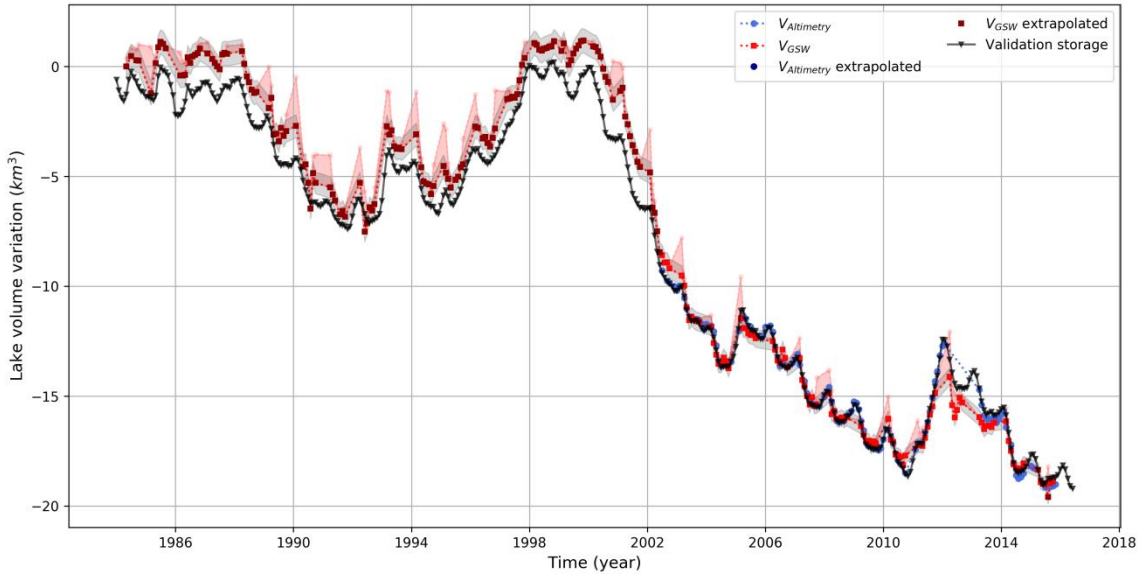

5 **Figure 9** Validation time series plotted with estimated reservoir volumes for Lake Mead. The black triangle line represents the validation storage as measured using the full lake bathymetry. The grey and red shaded areas represent the 95 % residual-based CI and the uncertainty induced by the no data within MWE, respectively.

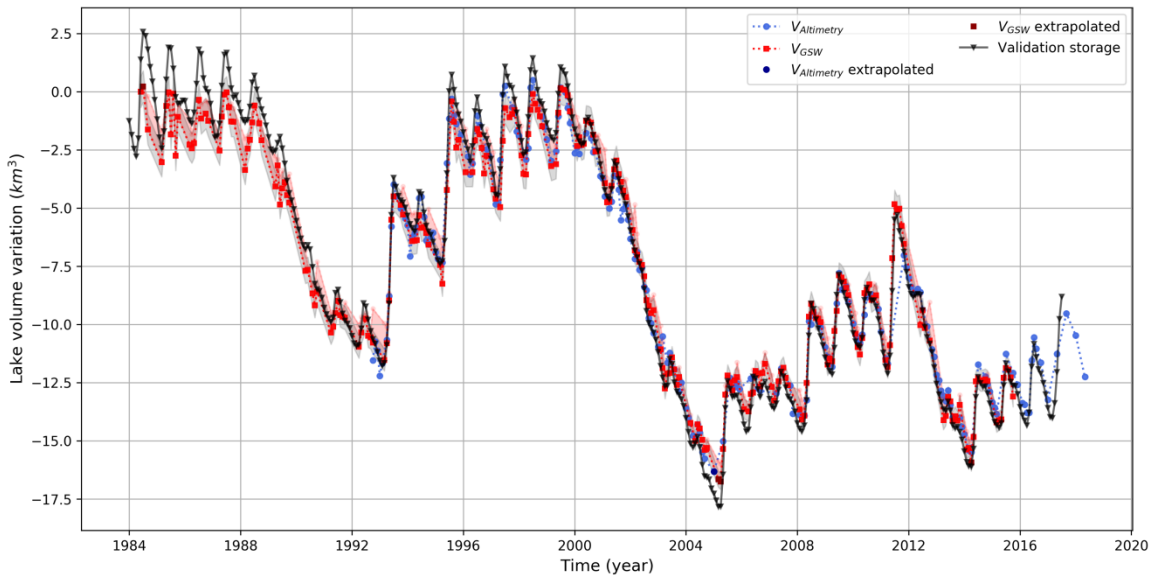

10 **Figure 10** Validation time series plotted with estimated reservoir volumes for Lake Powell. The black triangle line represents the validation storage as measured using the full lake bathymetry. The grey and red shaded areas represent the 95 % residual-based CI and the uncertainty induced by the no data within MWE, respectively.

5. Discussion

This study presented a new methodology to estimate lake and reservoir volumes using remote sensing alone. The validation showed that the method can produce water storage change estimates for many lakes, thus highlighting the potential of combining satellite altimetry and the GSW dataset to develop a global lake and reservoir volume variation dataset. The GSW dataset global coverage, 30 m resolution, high accuracy and monthly surface water observations over a 32-year period increases the number of analysed lakes and the accuracy, quantity and temporal range of lake area calculations. Therefore, volume variations can now also be calculated using GSW lake areas as input independent from altimetry data, which allows for volume calculations further back in time to 1984.

The lake and reservoir volume dataset developed here will help to better understand the behaviour and operations of lakes and reservoirs. As the number of reservoirs is still increasing because of growing energy demands, it is crucial to include their effects in (continental and global scale) hydrological models. Zajac et al. (2017) found that the exclusion of lakes and reservoirs often leads to inaccurate downstream discharge estimates. Furthermore, lake or reservoir storage change combined with modelled or observed inflow allows for a better estimation of the outflow (e.g. Muala et al., 2014). These outflow estimates can be used to calibrate hydrological models or estimate hydropower production in areas where in situ observations are lacking. However, due to a lack of storage observations and their availability – often because of commercial reasons -, the parametrization and the representation of lakes and reservoirs in many hydrological models – if at all present - is still highly simplified. Our global lake and reservoir volume dataset over 32 years will be very beneficial to calibrate and validate their parameterisation to mimic their operational behaviour. This will improve our current understanding of lakes and reservoirs, improve their simulations and consequently the simulations in the rest of the river basin. In addition, a better understanding of reservoirs will also likely improve water and energy production projections of the influence of these reservoirs under climate change, or under different management scenarios (e.g. changing downstream water requirements, flow legislation, changing inflow due to other activities upstream). Moreover, the area time series developed in this study can be included in models to improve on (often fixed) current area estimates and can furthermore improve estimates of open water evaporation.

The methodology used in this study has a couple of limitations. They arise mainly from limitations in the input data (GSW and DAHITI altimetry dataset) and the volume calculation methodology.

5.1 Satellite altimetry limitations

The altimeter footprint can be up to 16 m over land and land influences inside this footprint can alter the water level accuracy by disturbing the altimeter waveforms (Fu and Cazenave, 2001). Water level estimations of very small lakes or reservoirs can therefore have a RMSE of several decimeters or larger (Schwatke et al., 2015a). We analysed many small lakes in Europe that did not show accurate regressions when they were relatively small (e.g. Thülsfelder Talsperre, 1.7 km², Hainer See, 4 km², Lake Resia, 6.6 km² and Altmuehl See, 4.5 km²). However, many other factors than the size of the water

body determine the accuracy of the measurement; also surrounding topography, surface waves, winter ice coverage, the shape of the water body and the position of the altimeter track determine the measurement error. This could explain why no clear relationship between lake size and regression accuracy (R^2) was observed. Although most lakes with an area $< 10 \text{ km}^2$ showed poor regression results, some of these small lakes still returned an accurate regression (e.g. Barragem do Caia and Encoro de Salas). Water level estimations are only possible if the water body is located along mission-dependent ground tracks. Larger lakes and reservoirs were more frequently captured by a combination of satellite tracks and therefore showed more frequent observations than smaller ones.

5.2 The influence of no data in lake area calculations


The classifier of the GSW dataset has been shown to be very accurate, with less than 1 % of false water detections, and less than 5 % omission (Pekel et al., 2016). Therefore, the influence of classification errors in the volume estimations was very limited.

In this methodology, no data classifications in the GSW dataset play a much more important role. These are caused by snow, ice, cloud or sensor-related issues (e.g. white striping in Figure 2) and are likely to give an underestimation of the actual lake area if they are inside the MWE. Therefore, their influence has been reduced with strict no data thresholds applied to each monthly calculation. The 1% no data threshold for the regression and 5 % for the volume calculation resulted in the best trade-off between the number of observations from the GSW dataset and the accuracy of the estimates. Higher no data thresholds introduced too much variability in the volume estimates, as (1) regression lines became much noisier and (2) the area of monthly no data exceeded the actual lake area variation. Locations with frequent cloud cover, lake ice coverage or sensor-related image failures will often return no data amounts that exceed the threshold, resulting in a sparse V_{GSW} time series. Although they are sparse, these area volume estimates can still show an acceptable accuracy, as was observed for the Puente Nuevo Reservoir in Spain (Figure 11). For locations in the high or low latitudes, winter months are masked due to low solar zenith angles that cause considerable shadowing. Moreover, a short period of daylight or ice and snow coverage on the water surface can further increase the amount of no data in these regions.

Besides the varying image quality, the whole stack of historical Landsat imagery has an unequal global spatial distribution. The U.S. and Australia are well covered, while other regions, like Africa and Southwestern Europe, have much less Landsat observations (Pekel et al., 2016; Wolter et al., 2016). The volumetric plots of U.S. lakes therefore typically show a highly dense V_{GSW} , while lakes in Africa and other less monitored regions typically have more years of no observations, especially before 2000. This can clearly be observed by comparing Lake Mead and Powell (U.S.) with Lake Nasser and Kariba (Africa) in Figure 6. However, for lakes with sparse V_{GSW} estimates, $V_{\text{Altimetry}}$ estimates still provide a valuable volume variation record.

Many layers in the GSW dataset could be used to reduce the amount of no data pixels. This would considerably increase the capabilities of the methodology, especially in the regions mentioned above. No data pixels that are located in the middle of the lake and are surrounded by water pixels (e.g. Figure 2) have a high probability of being water. Furthermore, the large

temporal range (1984-2015) of the GSW dataset could be used to further decrease the amount of no data. For example, no data pixels that are classified as water over nearly all the 380 months could be assigned to the water class with high confidence. The GSW seasonality layer could also be used to find permanent water pixels, which can be converted to water if they are not observed during a specific month.

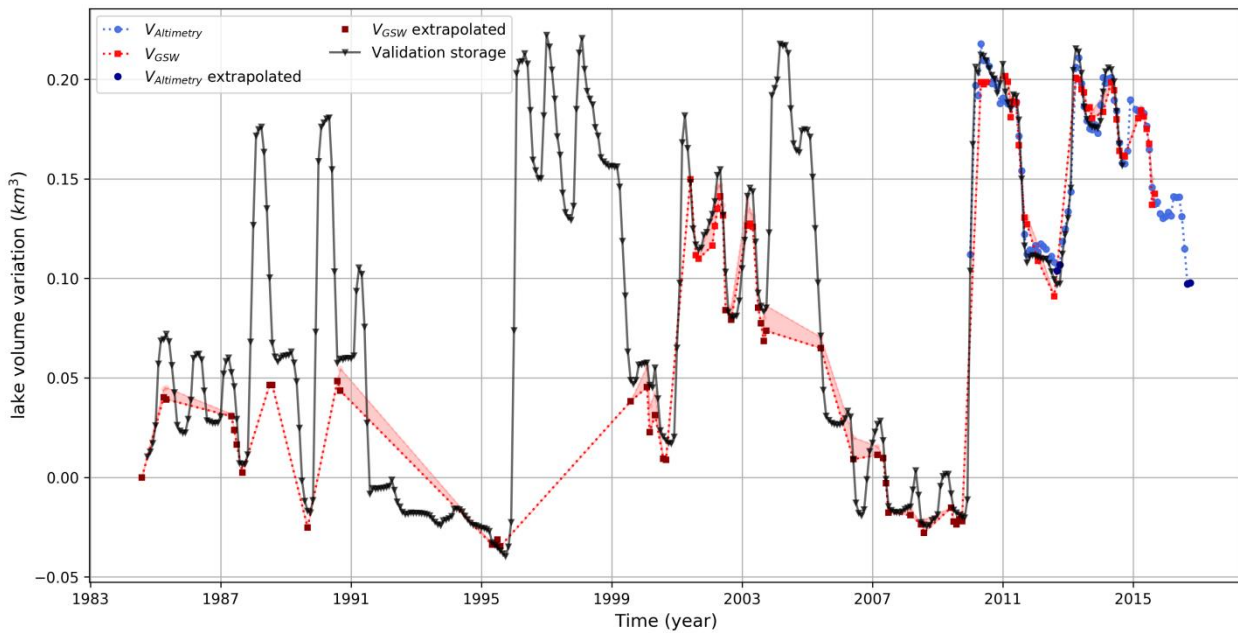

5

Figure 11 Time series of satellite estimated volume variations compared to validation storages for Puente Nuevo Reservoir.

5.3 Uncertainties and limitations in the volume calculation technique

Only three out of 137 lakes (Tawakoni, Urmia and Eagle) showed a clear non-linear area-level relation. For these lakes, volume variations were not estimated. Their regressions could be explained by a second- or third-order polynomial, as shown for Lake Urmia in Figure 12. This non-linearity is caused by a considerable change in slope, which will mostly be observed for lakes with extremely low water levels (e.g. Lake Urmia) or during floods.

To reduce data size, the monthly GSW dataset does not include exact dates of the Landsat observations. This causes more uncertainty in the regression, as the level and area observations may refer to different dates (maximum difference of one month) and therefore to slightly different lake conditions. For lakes with a highly variable level within a month, this uncertainty therefore increases. The outliers in the regression of Lake Nasser (Figure 4d) are expected to be largely induced by this uncertainty. For both outliers, the altimeter measurements were taken in the beginning of the month (2th and 6th day), and the water level changed considerably towards the next month. The Landsat observation therefore likely measured different lake conditions than the satellite altimeter.

For 37 lakes with lower performance, the regression showed relatively low R^2 values with an average of 0.50. The most important reasons for these bad regressions were found to be winter ice or snow coverage, cloud coverage, Landsat sensor

20

issues and multiple individual lake compartments. Winter ice coverage influences both the altimetry accuracy and the accuracy in the GSW water classification (e.g. Lake Ulungur, Rybinsk Reservoir, Reindeer Lake and Lake Ilmen). The current methodology needs to be refined to include lakes that split into multiple lakes during extreme drying (e.g. Aral Sea). As the different compartments can have different water level dynamics, individual regressions would need to be assigned to each compartment to calculate volume fluctuations of each compartment individually. Further research on water losses in the Aral Sea using this technique could be very promising.

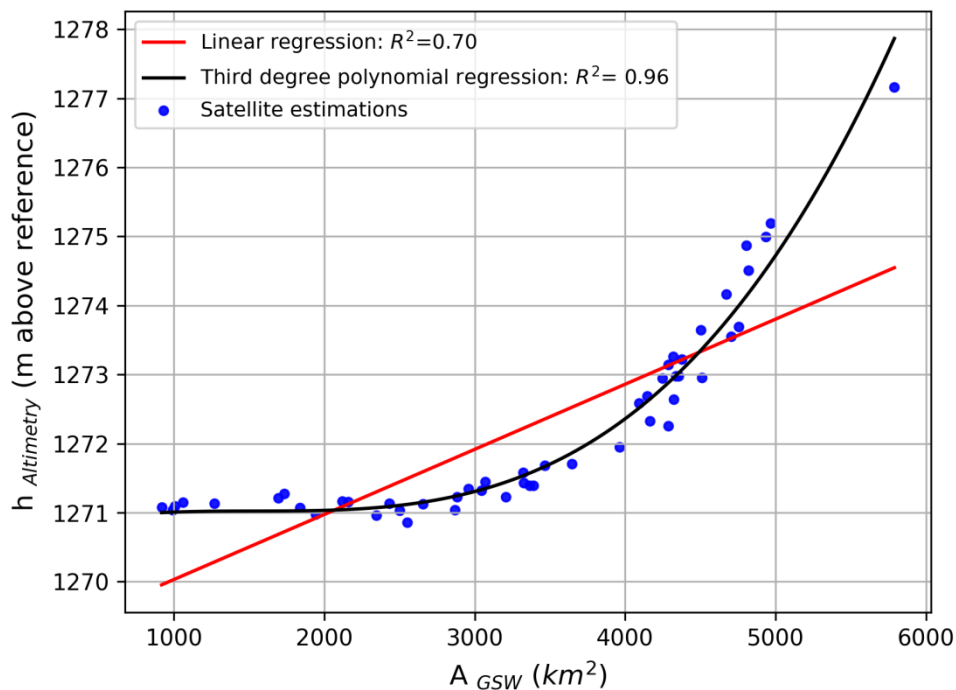


Figure 12 Relationship between A_{GSW} and $h_{Altimetry}$ for Lake Urmia. Only 3 out of the 135 lakes showed a clear non-linear relationship.

10 The calculated extrapolated volumes are more uncertain than the non-extrapolated ones, depending on whether the hypsometry relationship holds true or changes for the observed h or A value outside the regression range. For lakes formed in V-shaped river valleys with deep and straight slopes (e.g. Lake Mead), the hypsometry relationship is likely to hold for extremely low or high water levels. However, if the altimetry measurement period is short, the range of values captured by the regression line is likely to be small and the volume extrapolation using extreme level or area observations is expected to be inaccurate. This was observed for the Roseires Reservoir. However, including extrapolated volumes hardly changed the overall validation results, because the amount of total extrapolated volumes compared to non-extrapolated volumes is very small.

6. Conclusions and perspectives

This study successfully combined the JRC Global Surface Water (GSW) dataset and the DAHITI satellite altimetry dataset to estimate lake and reservoir volume fluctuations over all continents. The GSW dataset records surface water over a 32-year period, containing 3066080 monthly images that cover 99.95 % of the landmass. The extensive size and high accuracy of this surface water dataset allowed for detailed volume variation estimations over a very long time period (1984-2015), without being constrained by complex and computationally intensive classification procedures.

Lake areas from the GSW dataset and water levels from the DAHITI altimetry dataset have been combined in a regression to explain the lake hypsometry of 137 lakes globally. Nearly all lakes showed a linear regression. 58 of these lakes showed a highly accurate regression with $R^2 > 0.8$, with an average of 0.91. Lake volumes were calculated for all these lakes and for 42 other lakes with a nearly constant lake area. For 37 lakes, regressions were less accurate with an average R^2 of 0.50. Winter ice coverage and no data in the GSW dataset were found to be most important reasons for low R^2 values.

For 100 lakes (58 variable area and 42 nearly constant area) volume variations were calculated by integrating the hypsometric relationships, using both area and water level observations separately. Decreases in water storage were found in Western U.S., where Lake Mead, Powell and the Great Salt Lake lost respectively 10 km³, 6 km³ and 16 km³ of average volume between 1984-2000 and 2000-2015. According to our estimates, Lake Mead lost approximately 20 km³ of water from 2000 to 2015. Using the USGS in situ measured storage volume of 31 km³ in 2000, this is an almost 70 % reduction of water storage over last 15 years. Lake volume variation estimates have been validated for 18 lakes in the U.S., Spain, Australia and Africa using in situ lake volume time series. The estimated volume variations showed the method to be very accurate, expressed in an average Pearson correlation coefficient of 0.97, and a normalized RMSE of 7.42 %.

The low number of adequate Landsat lake area observations for some regions like Africa and Southwestern Europe still remains a limitation. Therefore, it would be highly beneficial for the purpose of this research to include surface water data from other satellites in the GSW dataset and to develop techniques to decrease the amount of no data in the current dataset. Future plans are to include Sentinel-1 and Sentinel-2 in the GSW dataset. The DAHITI database is continuously growing by analysing new water bodies, and newly available altimetry data will be processed to expand the volumetric dataset.

This lake and reservoir volume dataset will help to improve our current understanding of the behaviour of lakes and reservoirs, their representation in hydrological models and consequently the simulations of the river basin. This will moreover improve projections of the river basin under climate change or under different management scenarios and improve hydropower and open water evaporation estimations.

This study constitutes a proof of concept paving the way for increasing the number of lakes and reservoirs analysed, which could potentially be included as an a priori water storage dataset for the Surface Water and Ocean Topography (SWOT) hydrology and oceanography satellite mission. Launched in 2020, this mission will combine water body contours and accurate water level estimations to estimate storage changes in lakes and reservoirs with an average accuracy of 20 cm

(Biancamaria et al., 2016; Crétaux et al., 2015). The SWOT satellite will be unique due to its accuracy and capabilities on smaller water bodies with a size of at least 250 x 250 m.

Data availability. Research outcomes (i.e. lake and reservoir volumes) are not publicly accessible. However, they may become publicly available in a later stage through the DAHITI web service (<http://dahiti.dgfi.tum.de/en/>). The access to remote sensing data used in this study is explained in Sect. 2.

Appendix 1

Constant area lakes (Lc) overview

Lake/ Reservoir name	Latitude	Longitude	min area (km ²)	max area (km ²)	CV area	min water level (m)	max water level (m)	R2 regression	Average volume change between 2000-2008 and 2008-2015 (km ³)
Albert	1.63	30.91	5354.80	5412.16	0.003	620.71	622.55	0.01	-3.49
Argentino	-50.24	-72.84	1546.95	1555.79	0.004	177.04	180.78	0.01	0.40
Athabasca	59.19	-109.28	7528.69	7723.01	0.005	208.71	211.31	0.53	-0.59
Baikal	53.36	107.57	31572.61	31963.98	0.003	455.00	455.95	0.00	2.54
Baker	64.16	-95.28	1697.53	1723.77	0.004	0.62	2.14	0.45	0.44
Balaton	46.86	17.75	573.48	582.15	0.003	103.98	105.24	0.03	-
Buenos Aires	-46.55	-71.97	1832.01	1862.79	0.003	205.25	207.13	0.23	0.13
Chiemsee	47.88	12.45	74.89	76.50	0.005	517.86	519.55	0.27	-0.01
Constance	47.61	9.42	466.60	469.81	0.002	394.09	396.01	0.22	0.12
Dore	54.77	-107.31	621.17	632.80	0.004	458.79	459.94	0.49	0.28
Edward	-0.36	29.59	2209.06	2235.13	0.003	913.98	915.54	0.37	0.52
Erie	42.14	-81.29	25488.04	25789.63	0.003	173.55	174.87	0.00	2.36
Flathead	47.88	-114.14	480.89	494.76	0.006	878.96	882.12	0.40	-0.13
Great Bear	66.00	-120.97	30266.01	30555.78	0.003	156.95	157.75	0.17	4.49
Huron	45.01	-82.29	58972.33	59664.21	0.003	175.32	176.97	0.10	8.16
Issyk-Kul	42.44	77.27	6165.81	6220.68	0.002	1605.55	1606.32	0.04	0.16
Keller	63.93	-121.58	389.56	393.02	0.002	239.69	240.77	0.07	0.06
Khuvsgul	51.06	100.47	2758.95	2788.74	0.002	1646.49	1647.39	0.03	0.56
Kivu	-2.04	29.10	2368.70	2395.02	0.003	1460.74	1462.34	0.00	0.56
Kremenchuk	49.30	32.68	1828.27	1914.02	0.006	76.70	81.57	0.32	0.35
Ladoga	60.84	31.47	17330.63	17601.68	0.003	2.27	5.11	0.03	8.10
Llanquihue	-41.14	-72.82	855.85	864.19	0.002	50.00	51.00	0.00	-0.08
Malawi	-12.02	34.53	29195.33	29550.33	0.003	472.15	475.22	0.03	-4.18
Michigan	44.02	-86.76	57283.26	57856.91	0.002	175.25	176.91	0.00	7.59
Mweru	-9.02	28.72	4963.59	5104.84	0.006	923.20	926.72	0.01	2.24
Nicaragua	11.53	-85.41	7749.76	7815.10	0.003	30.05	32.56	0.02	1.22
Nipigon	49.81	-88.52	4462.91	4515.99	0.003	259.49	260.91	0.00	1.24
Novosibirsk	54.54	82.37	976.27	998.96	0.005	111.69	114.47	0.00	-0.02
Ontario	43.64	-77.81	18529.57	18741.92	0.003	73.97	75.37	0.04	0.37
Peipus	58.54	27.55	3465.82	3556.71	0.005	28.78	31.13	0.18	0.62
Porisvatn	64.27	-18.86	84.49	85.26	0.003	570.71	580.61	0.60	-0.06

Ranco	-40.24	-72.40	424.58	429.46	0.003	63.10	65.96	0.00	0.00
Saint Jean	48.59	-72.04	1063.55	1086.20	0.004	97.74	101.87	0.07	0.06
Shala	7.47	38.51	299.65	308.01	0.006	1553.45	1555.58	0.38	-0.14
Superior	47.55	-87.78	81320.65	82151.16	0.003	182.32	183.43	0.02	5.31
Tanganyika	-6.22	29.89	32400.06	32685.75	0.003	768.43	770.94	0.03	14.04
Uvs	50.32	92.75	3486.72	3628.63	0.008	761.81	763.25	0.57	-1.26
Vanern	58.90	13.27	5300.96	5414.91	0.005	44.22	45.33	0.12	0.95
Victoria	-1.12	32.90	66123.35	66765.69	0.004	1133.55	1135.95	0.07	11.55
Wollaston	58.23	-103.29	2192.42	2227.67	0.004	395.51	396.90	0.03	0.01
Yellowstone	44.43	-110.37	338.88	343.35	0.003	2357.03	2358.79	0.45	0.10
Zhari Namco	30.92	85.62	977.33	1007.46	0.007	4610.14	4613.18	0.56	0.97

Variable area lakes (LvG) overview

Lake/reservoir name	Latitude	Longitude	min area (km²)	max area (km²)	CV area	min water level (m)	max water level (m)	R2 regression	Average volume change between 1984-2000 and 2000-2016 (km³)
Alcantara	39.77	-6.67	43.22	63.72	0.098	187.83	216.33	0.88	0.43
Almanor	40.25	-121.14	87.07	100.89	0.028	1367.71	1373.24	0.85	0.03
Alvaro Obregon	27.96	-109.86	34.71	177.09	0.394	64.51	93.03	0.91	-0.29
Angostura	16.12	-92.64	265.26	562.21	0.143	496.84	527.92	0.98	-1.71
Argyle	-16.34	128.75	346.54	1187.54	0.195	88.66	95.83	0.89	3.30
Assad	36.00	38.26	518.94	643.55	0.044	297.60	304.36	0.85	0.52
Bagre	11.56	-0.68	0.00	195.02	0.555	227.12	236.06	0.98	0.44
Balbina	-1.44	-59.89	23.36	2421.59	0.315	42.12	49.09	0.92	5.51
Barragem do Caia	39.03	-7.19	5.54	15.72	0.197	222.06	233.22	0.97	0.01
Berryessa	38.58	-122.22	45.30	72.77	0.101	120.67	134.76	0.95	0.28
Boston	41.97	87.06	901.79	1063.23	0.052	1045.34	1049.88	0.98	0.31
Brahmamsagar	14.78	78.89	0.09	21.30	0.930	186.79	209.36	0.99	0.13
Bratsk	55.87	102.34	2908.56	3126.58	0.019	395.21	402.24	0.88	-
Cahora Bassa	-15.68	31.67	1629.92	2481.94	0.128	318.20	327.01	0.94	19.38
Chapala	20.24	-103.02	717.29	1102.63	0.107	1517.52	1522.95	0.82	-0.08
Chiquita	-30.54	-62.66	2866.43	6763.70	0.204	67.41	72.51	0.84	-0.48
Encoro de Salas	41.92	-7.93	1.06	3.75	0.191	815.95	828.93	0.95	0.01
Eucumbene	-36.08	148.70	53.47	131.58	0.210	1117.82	1155.38	0.97	-1.35
Great Salt Lake	41.18	-112.53	3228.40	6205.50	0.182	1278.83	1283.74	0.93	-15.72
Guri	7.40	-62.86	2914.13	3507.38	0.076	243.73	271.17	0.99	-7.26

Houston	29.98	-95.14	31.19	38.24	0.031	11.34	13.70	0.87	0.00
Hubbard Creek	32.79	-99.01	15.28	58.58	0.281	351.42	360.75	0.98	-0.14
Hulun	48.95	117.40	1782.96	2122.60	0.050	540.45	544.01	0.97	-3.01
Kainji	10.32	4.56	724.06	1134.86	0.075	128.60	139.71	0.93	-0.48
Kajaki	32.33	65.19	23.08	38.44	0.088	998.19	1021.17	0.88	-0.03
Kapchagay	43.82	77.61	1119.35	1242.98	0.021	475.34	479.41	0.94	0.17
Karakaya Baraji	38.53	38.47	21.41	236.14	0.141	673.61	692.12	0.97	0.81
Kariba	-16.99	28.04	4571.10	5323.91	0.041	475.54	487.09	0.96	15.28
Khyargas Nuur	49.18	93.32	1364.23	1397.40	0.008	1027.99	1032.76	0.97	1.49
Manitoba	50.98	-98.70	4700.32	5022.90	0.012	246.51	248.63	0.82	0.47
Manso	-14.95	-55.66	0.24	339.87	0.847	283.03	287.27	0.83	4.72
Massinger Barragen Mead	-23.89	32.04	16.25	128.93	0.342	100.50	123.66	0.93	1.10
Nasser	36.19	-114.41	327.92	580.50	0.181	328.69	353.61	0.98	-10.75
Netzahualcoyotl	22.88	32.33	3156.39	5770.06	0.128	166.85	181.08	0.92	-1.79
O. H. Ivie	17.14	-93.63	228.21	281.65	0.053	151.88	177.34	0.94	-1.12
Powell	31.55	-99.72	0.10	70.45	0.642	458.64	469.13	0.97	-0.15
Puente Nuevo	37.24	-110.96	311.38	555.09	0.169	1086.86	1126.50	0.99	-6.35
Qarun	38.13	-4.97	3.44	17.87	0.401	437.24	444.78	0.91	0.10
Qinghai	29.47	30.63	226.46	255.33	0.032	-42.59	-41.40	0.86	0.12
Richland Chambers Roseires	36.89	100.20	4217.58	4369.47	0.012	3193.29	3194.35	0.83	-0.36
Rukwa	31.99	-96.26	1.32	174.31	0.372	93.08	96.64	0.92	0.27
Sam Rayburn	11.60	34.46	88.65	578.54	0.436	471.70	487.74	0.84	2.06
Sarygamysh	-7.96	32.21	5388.63	6057.51	0.039	799.90	804.28	0.88	-13.01
Serena	31.22	-94.24	290.73	429.91	0.067	46.35	53.02	0.88	0.00
Siling Co	41.93	57.41	3086.11	3967.24	0.065	0.53	8.49	0.99	20.50
Sobradinho	38.89	-5.18	3.18	125.32	0.386	330.93	349.84	0.96	1.69
Tengiz	31.80	88.99	2324.93	2401.16	0.01	4537.72	4543.97	0.89	17.56
Tharthar	-9.67	-41.62	1501.04	3446.70	0.216	384.92	394.58	0.86	-2.20
Titicaca	50.44	69.08	861.36	1632.89	0.168	304.32	306.60	0.95	-1.25
Toktogul	34.01	43.26	1593.83	2286.33	0.119	42.76	63.60	0.94	-16.29
Toledo Bend	-15.90	-69.33	7513.44	8361.62	0.023	3809.10	3811.66	0.81	-2.60
Volta	41.79	72.90	195.07	289.14	0.117	856.13	898.94	0.91	-0.73
Walker	31.47	-93.72	472.87	630.83	0.056	48.86	52.65	0.81	0.01
Williston	7.44	-0.18	4645.90	6885.92	0.124	74.54	84.85	0.96	-14.51
Winnipegosis	38.68	-118.71	111.70	154.99	0.081	1191.20	1205.93	0.98	-0.96
Yesa	56.08	-123.66	1495.12	1715.51	0.031	656.92	671.72	0.84	2.72
	52.55	-100.15	5027.12	5257.38	0.008	252.43	254.72	0.87	2.78
	42.61	-1.11	11.50	17.42	0.086	459.12	486.80	0.86	0.02

Less performant variable area lakes (LvP) overview

Lake/reservoir name	Latitude	Longitude	min area (km ²)	max area (km ²)	CV area	min water level (m)	max water level (m)	R2 regression
Altmuhl	49.13	10.72	3.28	3.44	0.012	414.00	416.01	0.19
Aydar	40.87	66.91	1661.19	3228.23	0.174	244.61	248.04	0.71
Bardwell	32.28	-96.66	10.72	14.48	0.046	127.03	131.91	0.55
Beysehir	37.78	31.51	611.43	669.54	0.020	1120.43	1124.22	0.73
Caddabassa	8.87	39.87	30.15	48.89	0.141	560.51	563.13	0.11
Caddo	32.71	-94.02	40.75	63.30	0.125	50.59	52.87	0.44
Cedar	53.34	-100.17	2358.60	2709.49	0.025	252.59	256.56	0.45
Chad	13.04	14.49	1241.46	1459.73	0.044	279.96	282.13	0.30
Chamo	5.85	37.55	292.56	330.97	0.030	1105.26	1108.24	0.66
Churumuco	18.56	-101.86	156.26	309.69	0.157	137.28	161.38	0.51
Claire	58.59	-112.09	1231.20	1416.09	0.036	209.60	210.73	0.21
Danau Tang	0.63	112.47	2.81	6.50	0.170	17.77	24.78	0.62
Eagle	40.65	-120.73	51.08	102.63	0.093	1551.70	1556.77	0.75
Fairfield	31.79	-96.06	6.12	8.03	0.059	92.84	95.17	0.26
Hainer	51.17	12.46	0.00	3.70	0.586	123.52	127.82	0.00
Ilmen	58.25	31.38	941.97	1306.72	0.112	15.84	21.45	0.62
Kusai	35.73	92.87	263.91	332.97	0.087	4475.46	4484.40	0.13
Kuybyshev	54.60	49.17	4529.53	4839.51	0.012	47.73	53.17	0.61
Lesser Slave	55.44	-115.40	1120.94	1182.22	0.009	576.09	578.14	0.60
Mosul Dam	36.74	42.75	12.90	331.67	0.224	303.70	329.06	0.73
Musters	-45.40	-69.20	422.71	465.35	0.025	268.54	271.00	0.78
Nam Co	30.74	90.61	1948.79	2024.41	0.011	4721.94	4724.39	0.55
Poopo	-18.76	-67.09	10.62	3104.92	0.583	3685.50	3686.24	0.21
Reindeer	57.28	-102.38	5201.41	5422.67	0.010	335.58	337.42	0.67
Resia	46.80	10.53	5.77	6.12	0.015	1476.00	1496.18	0.76
Rybinsk	58.52	38.28	3590.26	3778.11	0.012	97.96	101.16	0.53
Tai Hu	31.20	120.23	2216.78	2359.42	0.016	1.36	2.67	0.00
Tana	11.99	37.31	2986.63	3107.77	0.008	1784.94	1788.29	0.74
Tangra Yumco	31.06	86.60	831.89	860.39	0.008	4531.35	4536.80	0.56
Tawakoni	32.89	-96.00	106.85	150.45	0.070	131.01	134.08	0.76
Thulsfelder	52.93	7.93	0.42	1.18	0.162	21.61	23.03	0.63
Tsimlyansk	47.96	42.79	1988.14	2366.59	0.031	31.70	36.38	0.80
Turkana	3.51	36.20	7033.64	7501.42	0.015	360.37	365.18	0.71
Ulungur	47.25	87.29	852.58	887.48	0.009	482.36	484.04	0.24

Urmia	37.64	45.50	917.87	5790.55	0.372	1270.11	1278.01	0.70
Zama	58.79	-119.03	65.19	288.52	0.443	325.88	328.81	0.28
Zaysan	48.01	83.89	2829.26	3253.41	0.032	388.60	394.87	0.56

Author contribution. T. B. developed the methodology, the scripts and was the main writer of the paper. A.R. helped writing the introduction section and gave comprehensive scientific support over the whole period. E.G. considerably supported in designing the methodology and in coding the scripts. C.S. provided DAHITI altimetry data, additionally processed water bodies on demand and moreover wrote the altimetry section. J.F.P. and A.C. contributed in the Google Earth Engine usage and wrote the GSW section. All authors actively contributed to the feedback process after the first draft.

Competing interests. The authors declare that they have no conflict of interest.

10 *Acknowledgements.* We would like to thank the Google Earth Engine team, and especially Matthew Hancher and Noel Gorelick, for support in developing the Earth Engine scripts. We would also like to express our gratitude to Guido Lemoine (Joint Research Centre) for his technical support in Earth Engine and Steven de Jong (Utrecht University) for his feedback on the first report.

References

- Avisse, N., Tilmant, A., Müller, M. F. and Zhang, H.: Monitoring small reservoirs storage from satellite remote sensing in inaccessible areas, *Hydrol. Earth Syst. Sci.*, 21(12), 6445–6459, doi:10.5194/hess-21-6445-2017, 2017.
- Balmer, M. and Downing, J.: Carbon dioxide concentrations in eutrophic lakes: undersaturation implies atmospheric uptake, *Inl. Waters*, 1(2), 125–132, doi:10.5268/IW-1.2.366, 2011.
- 5 Barnett, T. P. and Pierce, D. W.: When will Lake Mead go dry?, *Water Resour. Res.*, 44(3), doi:10.1029/2007WR006704, 2008.
- Benenati, E. P., Shannon, J. P., Blinn, D. W., Wilson, K. P. and Hueftle, S. J.: Reservoir-river linkages: Lake Powell and the Colorado River, Arizona, *J. North Am. Benthol. Soc.*, 19(4), 742–755, doi:10.2307/1468131, 2000.
- 10 Berg, H., Michélsen, P., Troell, M., Folke, C. and Kautsky, N.: Managing aquaculture for sustainability in tropical Lake Kariba, Zimbabwe, *Ecol. Econ.*, 18(2), 141–159, doi:10.1016/0921-8009(96)00018-3, 1996.
- Biancamaria, S., Lettenmaier, D. P. and Pavelsky, T. M.: The SWOT Mission and Its Capabilities for Land Hydrology, *Surv. Geophys.*, 37(2), 307–337, doi:10.1007/s10712-015-9346-y, 2016.
- 15 Biemans, H., Haddeland, I., Kabat, P., Ludwig, F., Hutjes, R. W. A., Heinke, J., von Bloh, W. and Gerten, D.: Impact of reservoirs on river discharge and irrigation water supply during the 20th century, *Water Resour. Res.*, 47(3), doi:10.1029/2009WR008929, 2011.
- Birkett, C. M.: The contribution of TOPEX/POSEIDON to the global monitoring of climatically sensitive lakes, *J. Geophys. Res.*, 100204(15), 179–25, doi:10.1029/95JC02125, 1995.
- Boergens, E., Dettmering, D., Schwatke, C. and Seitz, F.: Treating the hooking effect in satellite altimetry data: A case study 20 along the mekong river and its tributaries, *Remote Sens.*, 8(2), doi:10.3390/rs8020091, 2016.
- Bosch, W., Dettmering, D. and Schwatke, C.: Multi-mission cross-calibration of satellite altimeters: Constructing a long-term data record for global and regional sea level change studies, *Remote Sens.*, 6(3), 2255–2281, doi:10.3390/rs6032255, 2014.
- Chao, B. F., Wu, Y. H. and Li, Y. S.: Impact of artificial reservoir water impoundment on global sea level., *Science*, 25 320(5873), 212–214, doi:10.1126/science.1154580, 2008.
- Cole, J. J., Prairie, Y. T., Caraco, N. F., McDowell, W. H., Tranvik, L. J., Striegl, R. G., Duarte, C. M., Kortelainen, P., Downing, J. A., Middelburg, J. J. and Melack, J.: Plumbing the global carbon cycle: Integrating inland waters into the terrestrial carbon budget, *Ecosystems*, 10(1), 171–184, doi:10.1007/s10021-006-9013-8, 2007.
- Cook, E. R., Seager, R., Cane, M. A. and Stahle, D. W.: North American drought: Reconstructions, causes, and 30 consequences, *Earth-Science Rev.*, 81(1–2), 93–134, doi:10.1016/j.earscirev.2006.12.002, 2007.
- Crétaux, J.-F., Biancamaria, S., Arsen, A., Bergé Nguyen, M. and Becker, M.: Global surveys of reservoirs and lakes from satellites and regional application to the Syrdarya river basin, *Environ. Res. Lett.*, 10(1), 15002, doi:10.1088/1748-9326/10/1/015002, 2015.

- Crétau, J.-F., Abarca-del-Río, R., Bergé-Nguyen, M., Arsen, A., Drolon, V., Clos, G. and Maisongrande, P.: Lake Volume Monitoring from Space, *Surv. Geophys.*, 37(2), 269–305, doi:10.1007/s10712-016-9362-6, 2016.
- Downing, J. A., Prairie, Y. T., Cole, J. J., Duarte, C. M., Tranvik, L. J., Striegl, R. G., McDowell, W. H., Kortelainen, P., Caraco, N. F., Melack, J. M. and Middelburg, J. J.: The global abundance and size distribution of lakes, ponds, and impoundments, *Limnol. Oceanogr.*, 51(5), 2388–2397, doi:10.4319/lo.2006.51.5.2388, 2006.
- Duan, Z. and Bastiaanssen, W. G. M.: Estimating water volume variations in lakes and reservoirs from four operational satellite altimetry databases and satellite imagery data, *Remote Sens. Environ.*, 134, 403–416, doi:10.1016/j.rse.2013.03.010, 2013.
- Frappart, F., Calmant, S., Cauhopé, M., Seyler, F. and Cazenave, A.: Preliminary results of ENVISAT RA-2-derived water levels validation over the Amazon basin, *Remote Sens. Environ.*, 100(2), 252–264, doi:10.1016/j.rse.2005.10.027, 2006a.
- Frappart, F., Do Minh, K., L’Hermitte, J., Cazenave, A., Ramillien, G., Le Toan, T. and Mognard-Campbell, N.: Water volume change in the lower Mekong from satellite altimetry and imagery data, *Geophys. J. Int.*, 167(2), 570–584, doi:10.1111/j.1365-246X.2006.03184.x, 2006b.
- Frey, K. E. and Smith, L. C.: Amplified carbon release from vast West Siberian peatlands by 2100, *Geophys. Res. Lett.*, 32(9), 1–4, doi:10.1029/2004GL022025, 2005.
- Fu, L. L. and Cazenave, A.: *Satellite altimetry and earth sciences: a handbook of techniques and applications*, Academic Press., 2001.
- Gao, H., Birkett, C. and Lettenmaier, D. P.: Global monitoring of large reservoir storage from satellite remote sensing, *Water Resour. Res.*, 48(9), 1–12, doi:10.1029/2012WR012063, 2012.
- Gorelick, N., Hancher, M., Dixon, M., Ilyushchenko, S., Thau, D. and Moore, R.: Google Earth Engine: Planetary-scale geospatial analysis for everyone, *Remote Sens. Environ.*, doi:10.1016/j.rse.2017.06.031, 2017.
- Haddeland, I., Heinke, J., Biemans, H., Eisner, S., Flörke, M., Hanasaki, N., Konzmann, M., Ludwig, F., Masaki, Y., Schewe, J., Stacke, T., Tessler, Z. D., Wada, Y. and Wisser, D.: Global water resources affected by human interventions and climate change, *Proc. Natl. Acad. Sci.*, 111(9), 3251–3256, doi:10.1073/pnas.1222475110, 2014.
- Hanasaki, N., Kanae, S. and Oki, T.: A reservoir operation scheme for global river routing models, *J. Hydrol.*, 327(1–2), 22–41, doi:10.1016/j.jhydrol.2005.11.011, 2006.
- Holdren, G. C. and Turner, K.: Characteristics of Lake Mead, Arizona-Nevada, *Lake Reserv. Manag.*, 26(4), 230–239, doi:10.1080/07438141.2010.540699, 2010.
- Hwang, C., Guo, J., Deng, X., Hsu, H. Y. and Liu, Y.: Coastal gravity anomalies from retracked Geosat/GM altimetry: Improvement, limitation and the role of airborne gravity data, *J. Geod.*, 80(4), 204–216, doi:10.1007/s00190-006-0052-x, 2006.
- Kouraev, A. V., Zakharova, E. A., Samain, O., Mognard, N. M. and Cazenave, A.: Ob’ river discharge from TOPEX/Poseidon satellite altimetry (1992-2002), *Remote Sens. Environ.*, 93(1–2), 238–245, doi:10.1016/j.rse.2004.07.007, 2004.

- LakeNet: Lake profile: Kariba, [online] Available from: <http://www.worldlakes.org/lakedetails.asp?lakeid=8360> (Accessed 2 January 2018), 2003.
- Lehner, B. and Döll, P.: Development and validation of a global database of lakes, reservoirs and wetlands, *J. Hydrol.*, 296(1), 1–22, doi:10.1016/j.jhydrol.2004.03.028, 2004.
- 5 Liu, Q.: Interlinking climate change with water-energy-food nexus and related ecosystem processes in California case studies, *Ecol. Process.*, 5(1), doi:10.1186/s13717-016-0058-0, 2016.
- Meybeck, M.: Global distribution of lakes, in *Physics and Chemistry of Lakes*, pp. 1–35, Springer, Berlin, Germany., 1995.
- Micklin, P.: The future Aral Sea: hope and despair, *Environ. Earth Sci.*, 75(9), 844, doi:10.1007/s12665-016-5614-5, 2016.
- Muala, E., Mohamed, Y. A., Duan, Z. and van der Zaag, P.: Estimation of reservoir discharges from Lake Nasser and
10 Roseires Reservoir in the Nile Basin using satellite altimetry and imagery data, *Remote Sens.*, 6(8), 7522–7545, doi:10.3390/rs6087522, 2014.
- Pekel, J.-F., Cottam, A., Gorelick, N. and Belward, A. S.: High-resolution mapping of global surface water and its long-term changes, *Nature*, 1–19, doi:10.1038/nature20584, 2016.
- Ran, L. and Lu, X. X.: Delineation of reservoirs using remote sensing and their storage estimate: An example of the Yellow
15 River basin, China, *Hydrol. Process.*, 26(8), 1215–1229, doi:10.1002/hyp.8224, 2012.
- Richey, J. E., Melack, J. M., Aufdenkampe, A. K., Ballester, V. M. and Hess, L. L.: Outgassing from Amazonian rivers and wetlands as a large tropical source of atmospheric CO₂, *Nature*, 416(6881), 617–620, doi:10.1038/416617a, 2002.
- Schwatke, C., Dettmering, D., Bosch, W. and Seitz, F.: DAHITI - An innovative approach for estimating water level time series over inland waters using multi-mission satellite altimetry, *Hydrol. Earth Syst. Sci.*, 19(10), 4345–4364,
20 doi:10.5194/hess-19-4345-2015, 2015a.
- Schwatke, C., Dettmering, D., Börgens, E. and Bosch, W.: Potential of SARAL/AltiKa for Inland Water Applications, *Mar. Geod.*, 38, 626–643, doi:10.1080/01490419.2015.1008710, 2015b.
- Smith, L. C. and Pavelsky, T. M.: Remote sensing of volumetric storage changes in lakes, *Earth Surf. Process. Landforms*, 34(10), 1353–1358, doi:10.1002/esp.1822, 2009.
- 25 Tong, X., Pan, H., Xie, H., Xu, X., Li, F., Chen, L., Luo, X., Liu, S., Chen, P. and Jin, Y.: Estimating water volume variations in Lake Victoria over the past 22years using multi-mission altimetry and remotely sensed images, *Remote Sens. Environ.*, 187, 400–413, doi:10.1016/j.rse.2016.10.012, 2016.
- Tourian, M. J., Schwatke, C. and Sneeuw, N.: River discharge estimation at daily resolution from satellite altimetry over an entire river basin, *J. Hydrol.*, 546, 230–247, doi:10.1016/j.jhydrol.2017.01.009, 2017.
- 30 Verpoorter, C., Kutser, T., Seekell, D. A. and Tranvik, L. J.: A global inventory of lakes based on high-resolution satellite imagery, *Geophys. Res. Lett.*, 41(18), 6396–6402, doi:10.1002/2014GL060641, 2014.
- Villadsen, H., Andersen, O. B., Stenseng, L., Nielsen, K. and Knudsen, P.: CryoSat-2 altimetry for river level monitoring - Evaluation in the Ganges-Brahmaputra River basin, *Remote Sens. Environ.*, 168, 80–89, doi:10.1016/j.rse.2015.05.025, 2015.

- Wulder, M. A., White, J. C., Loveland, T. R., Woodcock, C. E., Belward, A. S., Cohen, W. B., Fosnight, E. A., Shaw, J., Masek, J. G. and Roy, D. P.: The global Landsat archive: Status, consolidation, and direction, *Remote Sens. Environ.*, 185, 271–283, doi:10.1016/j.rse.2015.11.032, 2016.
- 5 Zajac, Z., Revilla-Romero, B., Salamon, P., Burek, P., Hirpa, F. and Beck, H.: The impact of lake and reservoir parameterization on global streamflow simulation, *J. Hydrol.*, 548, 552–568, doi:10.1016/j.jhydrol.2017.03.022, 2017.
- Zakharova, E. A., Kouraev, A. V., Cazenave, A. and Seyler, F.: Amazon River discharge estimated from TOPEX/Poseidon altimetry, *Comptes Rendus Geosci.*, 338(3), 188–196, doi:10.1016/j.crte.2005.10.003, 2006.
- Zhang, G., Xie, H., Kang, S., Yi, D. and Ackley, S. F.: Monitoring lake level changes on the Tibetan Plateau using ICESat altimetry data (2003-2009), *Remote Sens. Environ.*, 115(7), 1733–1742, doi:10.1016/j.rse.2011.03.005, 2011.
- 10 Zhang, J., Xu, K., Yang, Y., Qi, L., Hayashi, S. and Watanabe, M.: Measuring water storage fluctuations in Lake Dongting, China, by Topex/Poseidon satellite altimetry, *Environ. Monit. Assess.*, 115(1–3), 23–37, doi:10.1007/s10661-006-5233-9, 2006.
- Zhou, Y., Jin, S., Tenzer, R. and Feng, J.: Water storage variations in the Poyang Lake Basin estimated from GRACE and satellite altimetry, *Geod. Geodyn.*, 7(2), 108–116, doi:10.1016/j.geog.2016.04.003, 2016.

15

Table 1 Overview of the validation results, excluding and including extrapolated volumes.

Lake/reservoir name:		<i>Extrapolated volumes excluded</i>			<i>Extrapolated volumes included</i>		
		Pearsons r	RMSE (km ³)	NRMSE (%)	Pearsons r	RMSE (km ³)	NRMSE (%)
Alcantara	GSW dataset:	0.941	0.229	12.750	0.941	0.229	12.750
	Altimetry:	0.986	0.151	8.427	0.987	0.153	8.265
Almanor	GSW dataset:	0.902	0.060	11.340	0.908	0.071	11.122
	Altimetry:	0.990	0.019	3.676	0.989	0.020	3.874
Argyle	GSW dataset:	0.954	0.471	7.924	0.954	0.471	7.924
	Altimetry:	0.995	0.147	2.474	0.995	0.147	2.474
Berryessa	GSW dataset:	0.961	0.063	7.448	0.989	0.076	5.311
	Altimetry:	0.978	0.043	5.575	0.978	0.043	5.575
Encoro de Salas	GSW dataset:	0.966	0.004	8.358	0.966	0.004	7.455
	Altimetry:	0.985	0.002	7.323	0.992	0.003	6.145
Eucumbene	GSW dataset:	0.933	0.114	11.802	0.933	0.114	11.802
	Altimetry:	0.964	0.084	8.419	0.964	0.084	8.419
Houston	GSW dataset:	0.904	0.008	10.235	0.904	0.008	10.235
	Altimetry:	0.938	0.005	5.666	0.938	0.005	5.436
Hubbard Creek	GSW dataset:	0.985	0.017	5.173	0.988	0.018	5.372
	Altimetry:	0.998	0.006	1.924	0.999	0.007	2.118
Mead	GSW dataset:	0.985	0.449	4.685	0.997	1.045	5.434
	Altimetry:	0.998	0.179	1.865	0.998	0.179	1.865
O. H. Ivie	GSW dataset:	0.985	0.019	4.924	0.993	0.030	4.950
	Altimetry:	0.999	0.006	1.784	0.999	0.006	1.784
Powell	GSW dataset:	0.993	0.913	4.947	0.994	0.923	4.524
	Altimetry:	0.997	0.552	3.074	0.998	0.554	2.964
Puente Nuevo	GSW dataset:	0.961	0.011	9.182	0.991	0.013	5.329
	Altimetry:	0.993	0.006	4.972	0.994	0.006	4.954
Richland Chambers	GSW dataset:	0.954	0.046	9.161	0.954	0.046	9.161
	Altimetry:	0.989	0.023	4.224	0.990	0.022	4.196
Roseires	GSW dataset:	0.805	0.295	18.872	0.971	2.434	41.455
	Altimetry:	0.925	0.214	12.443	0.962	0.214	11.473
Serena	GSW dataset:	0.989	0.092	4.907	0.989	0.122	3.767
	Altimetry:	0.990	0.077	4.294	0.990	0.077	4.294
Toledo Bend	GSW dataset:	0.765	0.351	14.376	0.777	0.345	14.135
	Altimetry:	0.988	0.122	5.015	0.988	0.121	4.974
Walker	GSW dataset:	0.936	0.071	10.798	0.971	0.072	8.180
	Altimetry:	0.988	0.032	4.882	0.990	0.041	4.499

Yesa reservoir	GSW dataset:	0.919	0.030	11.863	0.960	0.029	8.071
	Altimetry:	0.983	0.015	6.228	0.979	0.024	6.971
Average		0.959	0.137	7.250	0.970	0.215	7.424
