

Cover letter for hess-2018-291

Dear Editor,

On behalf of my co-authors, I would like to express our great appreciation to you and the reviewers for reviewing our manuscript entitled “Multivariate hydrologic design methods under nonstationary conditions and application to engineering practice” (ID: hess-2018-291). According to your suggestion, we have added these two important references in the revised manuscript.

Great thanks to you once again for the efforts on our paper.

With all best wishes

Yours

Cong JIANG

On behalf of my co-authors

Cong JIANG, PhD
School of Environmental Studies
China University of Geosciences
Wuhan 430074
People’s Republic of China
E-mail: jiangcong@cug.edu.cn

Multivariate hydrologic design methods under nonstationary conditions and application to engineering practice

Cong Jiang¹, Lihua Xiong², Lei Yan³, Jianfan Dong⁴ and Chong-Yu Xu^{2,5}

5 ¹School of Environmental Studies, China University of Geosciences, Wuhan 430074, China

²State Key Laboratory of Water Resources and Hydropower Engineering Science, Wuhan University, Wuhan 430072, China

³College of Water Conservancy and Hydropower, Hebei University of Engineering, Handan 056021, China

⁴Guangxi Water Resources Management Center, Nanning 530023, China

10 ⁵Department of Geosciences, University of Oslo, P.O. Box 1047 Blindern, N-0316 Oslo, Norway

Correspondence to: Cong Jiang (jiangcong@cug.edu.cn)

Abstract. Multivariate hydrologic design under stationary conditions is traditionally performed through the use of the design criterion of the return period, which is theoretically equal to the average inter-arrival time of flood events divided by the exceedance probability of the design flood event. Under nonstationary conditions, the exceedance probability of a given multivariate flood event varies over time. This suggests that the traditional return-period concept cannot apply to engineering practice under nonstationary conditions since by such a definition a given multivariate flood event would correspond to a time-varying return period. In this paper, average annual reliability (AAR) was employed as the criterion for multivariate design rather than the return period to ensure that a given multivariate flood event corresponded to a unique design level under nonstationary conditions. The multivariate hydrologic design conditioned on the given AAR was estimated from the nonstationary multivariate flood distribution constructed by a dynamic C-vine copula, allowing for time-varying marginal distributions and a time-varying dependence structure. Both the most-likely design event and confidence interval for the multivariate hydrologic design conditioned on the given AAR were identified to provide supporting information for designers. The multivariate flood series from the Xijiang River, China were chosen as a case study. The results indicated that both the marginal distributions and dependence structure of the multivariate flood series were nonstationary due to the

driving forces of urbanization and reservoir regulation. The nonstationarities of both the marginal distributions and dependence structure were found to affect the outcome of the multivariate hydrologic
30 design.

Keywords: Multivariate hydrologic design; Nonstationarity; Average annual reliability; Dynamic C-vine copula; Xijiang River

35 1. Introduction

A complete flood event or a flood hydrograph contain multiple feature variables, such as flood peak and flood volume, which can be associated with the safety of hydraulic structures (Salvadori et al., 2004, 2007, 2011; Xiao et al., 2009; Xiong et al., 2015; Loveridge et al., 2017; Shafaei et al., 2017). For example, the water level of a reservoir is controlled by not only flood peak flow, but also flood volume
40 (Salvadori et al., 2011). Therefore, multivariate hydrologic design, which takes into account multiple flood characteristics as well as their dependence, provides a more rational design strategy for hydraulic structures compared to univariate hydrologic design (Zheng et al., 2013, 2014; Balistrocchi and Bacchi, 2017).

Multivariate hydrologic design under stationary conditions has been widely investigated, and the
45 design criterion is usually quantified by the return period, similar to univariate hydrologic design. Under the definition of the average recurrence interval between flood events equaling or exceeding a given threshold (Chow, 1964), the return period of a given flood event under stationary conditions theoretically equals the average inter-arrival time between flood events divided by the exceedance probability (Salvadori et al., 2011). On the other hand, the exceedance probability of a univariate flood
50 event is usually uniquely defined without ambiguity, whereas the exceedance probability of a multivariate flood event could have multiple definitions (Salvadori and De Michele, 2004; Salvadori et al., 2011; Vandenberghe et al., 2011). To date, at least five kinds of different exceedance probabilities for a multivariate flood event have been defined: 1) the OR case in which at least one of the flood features exceeds the prescribed threshold; 2) the AND case in which all flood features exceed the
55 prescribed thresholds; 3) the Kendall case in which the univariate representation transformed from the Kendall's distribution function exceeds the prescribed threshold; 4) the Survival Kendall case in which the univariate representation transformed from the Survival Kendall's distribution function exceeds the prescribed threshold and; 5) the structural case in which the univariate representation transformed from a structure function exceeds the prescribed threshold (Favre et al., 2004; Salvadori and De Michele,
60 2004, 2010; Salvadori et al., 2007, 2013, 2015, 2016; Vandenberghe et al., 2011; Requena et al., 2013; Zheng et al., 2014).

Due to climate change as well as certain anthropogenic driving forces (Milly et al., 2008), the

nonstationarities of both univariate and multivariate flood series have been widely reported (Xiong and Guo, 2004; Villarini et al., 2009; Vogel et al., 2011; López and Francés, 2013; Bender et al., 2014; Xiong et al., 2015; Blöschl et al., 2017; Kundzewicz et al., 2018). The multivariate flood distribution exhibits more complex nonstationarity behaviors than the univariate distribution, including nonstationarities of individual margins and the dependence structure between the margins (Quessy et al., 2013; Bender et al., 2014; Xiong et al., 2015; Kwon et al., 2016; Sarhadi et al., 2016; Qi and Liu, 2017; Vezzoli et al., 2017; Bracken et al., 2018; Salvadori et al., 2018). Both nonstationarities of the margins and dependence structure could impact the multivariate hydrologic design. Under nonstationary conditions, the exceedance probability p of a given flood event varies from year to year; thus, the return period, calculated as the average inter-arrival time between two successive flood events divided by p , is no longer a constant (Salas and Obeysekera, 2014; Jiang et al., 2015a; Kwon et al., 2016; Sarhadi et al., 2016; Yan et al., 2017). As a result, a given flood event would correspond to a time-varying and non-unique return period. Consequently, the traditional return period-based method for estimating hydrologic design may no longer be applicable to engineering practice under nonstationary conditions (Salas and Obeysekera, 2014).

Although increasing attention has been focused on the hydrologic designs under nonstationary conditions in recent years, the focus has mainly been on univariate designs (Obeysekera and Salas, 2014; Obeysekera and Salas, 2016; Read and Vogel, 2016). To overcome the limitation of the traditional return period under nonstationary conditions, the concept of the return period has been revisited. Salas and Obeysekera (2014) extended two concepts of the return period into a nonstationary framework, defined as the expected waiting time (EWT) for an exceedance to occur (Olsen et al., 1998), and the time period that results in the expected number of exceedances (ENE) equal to one over this period (Parey et al., 2010).

Risk and reliability are both important measurements for assessing hydrologic designs (Vogel, 1987; Read and Vogel, 2015). Besides redefinitions of the return period, some risk-based or reliability-based metrics have been introduced as the hydrologic design criteria under nonstationary conditions (Rosner et al., 2014). Rootzén and Katz (2013) proposed the concept of design life level (DLL) to quantify hydrologic risk in a nonstationary climate during the entire design life period of hydraulic structures.

Read and Vogel (2015) introduced the concept of average annual reliability (AAR) to estimate the hydrologic designs under nonstationary conditions. Liang et al. (2016) defined the equivalent reliability (ER) to estimate the design flood under nonstationary conditions by linking DLL to return period. Salvadori et al. (2018) associated hydrologic designs with both given life times and failure probabilities to calculate bivariate design values under nonstationarity. These design criteria assess the risk or reliability of hydraulic structures associated with the flood distribution during the entire design life period, rather than for a single year. For a given design life period, these criteria can always yield a unique risk or reliability; therefore, they are applicable to the hydrologic designs under both stationary and nonstationary conditions.

100 Under the multivariate framework, a given design level would correspond to an infinite number of possible hydrologic design events (Hawkes, 2008; Kew et al., 2013; Fu et al., 2014; Zheng et al., 2015, 2017); however, these design events are generally not equivalent because their joint probability density values (i.e. likelihood) usually differ (Salvadori et al., 2011; Volpi and Fiori, 2012; Li et al., 2017; Yin et al., 2017). In engineering practice, it should be necessary to determine a typical design event as representative for a specific design level. For example, in Chinese engineering practice, a unique design flood hydrograph corresponding to a given design level is usually required to determine the scale of hydraulic structures (Yin et al., 2017). The most-likely design event, which theoretically has the largest joint probability density (likelihood) among all possible design events (Salvadori et al., 2011), appears to be the best representative candidate. Besides the most-likely design event, it is also necessary to identify the confidence interval for an infinite possible design events to provide a finite design range for designers (Volpi and Fiori, 2012; Yin et al., 2017). The most-likely design event and confidence interval for the bivariate hydrologic design under stationary conditions have been identified (Salvadori et al., 2011; Volpi and Fiori, 2012; Li et al., 2017; Yin et al., 2017; Salvadori et al., 2018); however, very few studies have focused on hydrologic designs with higher dimensions under nonstationary conditions.

115 Therefore, the objective of the present study was to address the issue of multivariate hydrologic design applying to engineering practice under nonstationary conditions, which is achieved through the following steps. First, the nonstationary multivariate flood distribution was constructed using a dynamic canonical vine (C-vine) copula (Aas et al., 2009), which was able to capture the nonstationarities of

both marginal distributions and the dependence structure. The design criterion for the multivariate flood event was then quantified according to average annual reliability (AAR) rather than the traditional return period, since a given multivariate flood event would correspond to a unique AAR under both stationary and nonstationary conditions (Read and Vogel, 2015; Yan et al., 2017). The multivariate hydrologic design for any given AAR was estimated from the nonstationary multivariate flood distribution.

The aforementioned methods for the multivariate hydrologic design under nonstationary conditions were applied to the Xijiang River, China. The four-dimensional (4-D) multivariate flood series, including the annual maximum daily discharge, annual maximum 3-day flood volume, annual maximum 7-day flood volume and annual maximum 15-day flood volume of the Xijiang River were chosen as the case study data because they constitute the variables used for deriving the design flood hydrograph for hydraulic structures. It has been found that the natural flood processes of this river have been significantly altered by urbanization and reservoir regulation (Xu et al., 2014), but these two factors have not yet been taken into account in multivariate hydrologic design.

The next section of the present paper describes the study area and data. Section 3 presents the methods developed in this paper. The results of the case study are provided in section 4. Finally, the conclusion and remarks are provided in section 5.

2. Study area and data

The multivariate flood series of the Xijiang River, South China (see Figure 1) were selected as a case study to illustrate the multivariate hydrologic design methods under nonstationary conditions. The drainage area of the Xijiang River basin (XRB) is 353,120 km² with a river length of 2,214 km. The basin falls within a humid subtropical monsoon climate region, with the flood season extending from May to October; therefore, floods have always been a serious natural hazard within the basin.

The calculation of design floods in China involving the derivation of flood hydrographs for hydraulic structures requires not only flood peak, but also flood volumes with different durations, such as 3 days, 7 days, 15 days and 30 days (Ministry of Water Resources of People's Republic of China, 1996; Xiao et al., 2009; Xiong et al., 2015; Li et al., 2017). For a large catchment such as the XRB, the duration of a flood process is usually longer than ten days. Therefore, the annual maximum daily

discharge (Q_1), annual maximum 3-day flood volume (V_3), annual maximum 7-day flood volume (V_7) and annual maximum 15-day flood volume (V_{15}) of the Xijiang River were defined as the multivariate flood series (Q_1, V_3, V_7, V_{15}) for deriving design flood hydrographs. The flood data were from 1951 to 150 2012, and observed at the Dahuangjiangkou gauge located at the main stream of the Xijiang River and draining a total catchment area of 294,669 km², approximately 83% of the total area of the XRB.

Rapid urbanization over recent decades has resulted in increasing river regulation projects built in the XRB, such as artificial levees for protecting urban areas from river flooding. As a result, flood flow has become increasingly constrained to the channel rather than overflow to the floodplain, resulting in 155 an increase in the observed river flood flow (Xu et al., 2014). For the purpose of flood control and hydropower generation, it is hard to find a river which is not impacted by reservoirs, particularly in a rapidly developing China. Reservoir regulation has become an increasingly significant factor affecting flood processes of the XRB, and should be seriously considered within downstream flood risk analysis and hydrologic design, particularly since 2006 when two reservoirs with considerable flood control 160 capacities were put into operation. These are the Longtan and Baise reservoirs with flood control capacities of 5×10^9 m³ and 1.64×10^9 m³ and catchment areas of 98,500 km² and 9,600 km², respectively. Climate change will likely result in flood nonstationarity by altering climatic conditions of the basin. Climatic conditions dominating flood processes in the XRB, such as extreme precipitation, appear to have been stationary over the past decades (Yang et al., 2010). Therefore, the current study 165 introduced only urbanization and reservoir regulation as the potential driving forces of flood nonstationarity, and ignored the effect of climate change.

The effect of urbanization on flood processes was quantified using the urban population (Pop). Given the unavailability of urban population data at the basin scale and the fact that the vast majority of cities in the XRB are distributed in Guangxi province, we used urban population data for Guangxi 170 province to represent those of the XRB. The annual urban population data during the observation period were obtained from the China Compendium of Statistics 1949–2008 (Department of Comprehensive Statistics of National Bureau of Statistics, 2010) and the website of the National Bureau of Statistics of PRC (<http://www.stats.gov.cn/tjsj/ndsj/>). The present study assumed the design life period for hydraulic

structures to be from 2013 to 2100. The urban population over the design life period was estimated
 175 based on the predicted growth rate of China's urban population reported by He (2014). The reservoir
 index (RI), which depends on the catchment area and flood controlling capacities of reservoirs, was
 used to quantify the effects of reservoir regulation on flood processes (López and Francés, 2013). As
 shown in Table 1, two reservoirs with flood control functions have been completed during the
 observation period from 1951 to 2012, and a further two are planned for operation during the design life
 180 period. Figure 2 illustrates the evolution of the urban population and reservoir index during both the
 observation and design life periods.

3. Methods

The present study included the following methods: 1) the nonstationary multivariate flood
 distribution based on a dynamic C-vine copula, allowing for both time-varying marginal distributions
 185 and a time-varying dependence structure and; 2) estimation of the multivariate hydrologic design
 associated with average annual reliability (AAR) under nonstationary conditions. To correspond to the
 case study in this paper, the multivariate flood series consisting of the annual maximum daily discharge
 (Q_1), annual maximum 3-day flood volume (V_3), annual maximum 7-day flood volume (V_7) and annual
 maximum 15-day flood volume (V_{15}) were chosen to illustrate the multivariate design methods under
 190 nonstationary conditions. It is worth noting that the proposed methods can be extended to other
 multivariate flood series such as consisting of flood peak, flood volume and flood duration.

3.1. Probability distribution of the nonstationary multivariate flood series

According to Sklar's Theorem (Sklar, 1959), the probability distribution of the 4-D flood series
 (Q_1, V_3, V_7, V_{15}) at time t measured by years ($t = 1, 2, \dots, n$, and n is the length of the flood series) can be
 195 formulated through a copula $C(\cdot)$ as follows:

$$\begin{aligned}
 & F(q_{1,t}, v_{3,t}, v_{7,t}, v_{15,t} | \boldsymbol{\theta}_t) \\
 &= C \left[F_1(q_{1,t} | \boldsymbol{\theta}_{1,t}), F_3(v_{3,t} | \boldsymbol{\theta}_{3,t}), F_7(v_{7,t} | \boldsymbol{\theta}_{7,t}), F_{15}(v_{15,t} | \boldsymbol{\theta}_{15,t}) | \boldsymbol{\theta}_{c,t} \right] \\
 &= C(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \boldsymbol{\theta}_{c,t})
 \end{aligned} \tag{1}$$

where $F_1(q_{1,t} | \boldsymbol{\theta}_{1,t})$, $F_3(v_{3,t} | \boldsymbol{\theta}_{3,t})$, $F_7(v_{7,t} | \boldsymbol{\theta}_{7,t})$ and $F_{15}(v_{15,t} | \boldsymbol{\theta}_{15,t})$ denote the marginal distributions for

Q_1, V_3, V_7 and V_{15} , respectively; $u_{1,t}, u_{3,t}, u_{7,t}$ and $u_{15,t}$ are the marginal probabilities of Q_1, V_3, V_7 and V_{15} , respectively; $\theta_{1,t}, \theta_{3,t}, \theta_{7,t}$ and $\theta_{15,t}$ are the corresponding distribution parameters and; $\theta_{c,t}$ stands
 200 for the copula parameter vector, which describes the strength of the dependence structure.
 $\theta_t = (\theta_{1,t}, \theta_{3,t}, \theta_{7,t}, \theta_{15,t}, \theta_{c,t})$ is the parameter vector of the entire multivariate distribution, including the
 marginal distribution parameters as well as the copula parameters.

According to the multivariate distribution of (Q_1, V_3, V_7, V_{15}) defined by Eq. (1), the corresponding
 density function can be written as:

$$\begin{aligned}
 & f(q_{1,t}, v_{3,t}, v_{7,t}, v_{15,t} | \theta_t) \\
 & = c \left[F_1(q_{1,t} | \theta_{1,t}), F_3(v_{3,t} | \theta_{3,t}), F_7(v_{7,t} | \theta_{7,t}), F_{15}(v_{15,t} | \theta_{15,t}) | \theta_{c,t} \right] \cdot \\
 & \quad f_1(q_{1,t} | \theta_{1,t}) \cdot f_3(v_{3,t} | \theta_{3,t}) \cdot f_7(v_{7,t} | \theta_{7,t}) \cdot f_{15}(v_{15,t} | \theta_{15,t}) \\
 & = c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \theta_{c,t}) \cdot f_1(q_{1,t} | \theta_{1,t}) \cdot f_3(v_{3,t} | \theta_{3,t}) \cdot f_7(v_{7,t} | \theta_{7,t}) \cdot f_{15}(v_{15,t} | \theta_{15,t})
 \end{aligned} \tag{2}$$

where $f_1(q_{1,t} | \theta_{1,t})$, $f_3(v_{3,t} | \theta_{3,t})$, $f_7(v_{7,t} | \theta_{7,t})$ and $f_{15}(v_{15,t} | \theta_{15,t})$ are the density functions of the
 marginal distributions for Q_1, V_3, V_7 and V_{15} , respectively and $c(\cdot)$ denotes the density function of
 copula $C(\cdot)$. As shown by Eq. (2), the multivariate distribution of (Q_1, V_3, V_7, V_{15}) can be separated into
 two modules, including the marginal distributions, i.e., $f_1(q_{1,t} | \theta_{1,t})$, $f_3(v_{3,t} | \theta_{3,t})$, $f_7(v_{7,t} | \theta_{7,t})$ and
 210 $f_{15}(v_{15,t} | \theta_{15,t})$, as well as the dependence structure expressed by the copula density function
 $c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \theta_{c,t})$. Under nonstationary conditions, both the margins and dependence structure of
 (Q_1, V_3, V_7, V_{15}) can vary over time t .

3.1.1. Nonstationary marginal distributions based on the time-varying moments model

The time-varying moments model that expresses the distribution parameters or moments as
 215 functions of time or some other explanatory variable(s) has been widely employed to capture the
 nonstationarities of univariate flood series (Strupczewski et al., 2001; Villarini et al., 2009). In this
 study, the nonstationary marginal distributions of the multivariate flood series (Q_1, V_3, V_7, V_{15}) were
 constructed by the time-varying moments model.

Based on cause-effect analysis, the flood processes of the XRB were found to mainly be impacted
 220 by urbanization and reservoir operation. The reservoir index RI and urban population Pop were
 therefore used as potential covariates for marginal distribution parameters, including the location
 parameter μ , scale parameter σ , and shape parameter ν (if any). In this study, both linear and
 exponential functions were considered to build the relationships between distribution parameters and
 covariates (Strupczewski et al., 2001; Vogel et al., 2011; Salas and Obeysekera, 2014; Jiang et al., 2015;
 225 Sarhadi et al., 2016; Read and Vogel, 2016; Yan et al., 2017). Taking the location parameter for
 illustration, the candidate functions of μ were generally formulated as follows:

$$\begin{aligned} \text{Linear:} \quad & \mu_t = \alpha_0 + \alpha_1 Pop_t + \alpha_2 RI_t \\ \text{Exponential:} \quad & \mu_t = \exp(\alpha_0 + \alpha_1 Pop_t + \alpha_2 RI_t) \end{aligned} \quad (3)$$

where α_0 , α_1 and α_2 are model parameters estimated using the maximum likelihood estimate (MLE)
 method (Strupczewski et al., 2001). As above, the linear expression in Eq. (3) gives an additive model
 230 which suggests that the effects of the covariates RI and Pop on μ are independent, while the
 exponential expression defines a multiplicative model which is able to take into account the possible
 interaction between the covariates RI and Pop . It is important to note that Eq. (3) defines four specific
 nonstationary models, the first one is the most complex nonstationary model where it is assumed that
 both RI and Pop are the driving factors of marginal distributions; the second and third models illustrate
 235 that the marginal nonstationarity is linked only to RI and Pop , respectively and; the final one represents
 the simplest and stationary model, which does not contain any covariates.

Five probability distributions widely used in flood frequency analysis, namely Pearson type III
 (PIII), Generalized Extreme Value (GEV), Gamma, Weibull and Lognormal distributions were
 employed as the candidate distributions for margins (Villarini et al., 2009; Yan et al., 2017). The
 240 goodness of fit (GoF) of the probability distributions was examined by the Kolmogorov-Smirnov (KS)
 test with significance level of 0.05 (Frank and Massey, 1951). The p -value of the KS test was simulated
 by the Monte Carlo method. The relative fitting qualities of the time-varying moments models were
 assessed by the Corrected Akaike Information Criterion (AICc; Hurvich and Tsai, 1989), which is
 stricter than the Akaike Information Criterion (AIC; Akaike, 1974). The best model featured with the
 245 smallest AICc value was chosen to describe the marginal distributions from the nonstationary models as

expressed by Eq. (3).

3.1.2. Nonstationary dependence structure based on the dynamic C-vine copula

After estimating the marginal distributions, the nonstationary dependence structure of (Q_1, V_3, V_7, V_{15}) as formulated by the copula density function $c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \boldsymbol{\theta}_{c,t})$ was constructed.

250 Given that most applied copula functions are for bivariate random variables, $c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \boldsymbol{\theta}_{c,t})$ cannot be directly expressed as a specific copula function. The pair copula method has been proven powerful for the construction of the distribution of multivariate random variables through the decomposition of the multivariate probability density into a series of bivariate copulas (Aas et al., 2009; Xiong et al., 2015; Shafaei et al., 2017). Therefore this study constructed the dependence structure of
255 (Q_1, V_3, V_7, V_{15}) using the pair copula method.

Numerous pair-copula decomposition forms for a multivariate distribution are available, among which two kinds of decompositions with regular vine structures prevail in practice, namely the canonical vine (C-vine) and the drawable vine (D-vine) (Aas et al., 2009). It is known that flood peak (e.g., Q_1) is the dominant feature quantifying a flood event as well as the key factor in hydrologic design
260 (Ministry of Water Resources of People's Republic of China, 1996). The C-vine is more suitable when there is a key variable governing multivariate dependence (Aas et al., 2009). In this case, the C-vine was employed to construct the joint distribution of (Q_1, V_3, V_7, V_{15}) with Q_1 elected as the key variable. Thus, the density function $c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \boldsymbol{\theta}_{c,t})$ can be decomposed into six bivariate pair copulas as follows:

$$\begin{aligned}
 c(u_{1,t}, u_{3,t}, u_{7,t}, u_{15,t} | \boldsymbol{\theta}_{c,t}) &= c_{13}(u_{1,t}, u_{3,t} | \theta_{13,t}) \cdot c_{17}(u_{1,t}, u_{7,t} | \theta_{17,t}) \cdot c_{115}(u_{1,t}, u_{15,t} | \theta_{115,t}) \cdot \\
 & c_{37|1} \left[F(u_{3,t} | u_{1,t}), F(u_{7,t} | u_{1,t}) | \theta_{37|1,t} \right] \cdot \\
 & c_{315|1} \left[F(u_{3,t} | u_{1,t}), F(u_{15,t} | u_{1,t}) | \theta_{315|1,t} \right] \cdot \\
 & c_{715|13} \left[F(u_{7,t} | u_{1,t}, u_{3,t}), F(u_{15,t} | u_{1,t}, u_{3,t}) | \theta_{715|13,t} \right]
 \end{aligned} \tag{4}$$

where $\boldsymbol{\theta}_{c,t} = (\theta_{13,t}, \theta_{17,t}, \theta_{115,t}, \theta_{37|1,t}, \theta_{315|1,t}, \theta_{715|13,t})$ is the parameter vector in the C-vine copula, and:

$$\begin{aligned}
F(u_{3,t} | u_{1,t}) &= \frac{\partial C_{13}(u_{1,t}, u_{3,t} | \theta_{13,t})}{\partial u_{1,t}} \\
F(u_{7,t} | u_{1,t}) &= \frac{\partial C_{17}(u_{1,t}, u_{7,t} | \theta_{17,t})}{\partial u_{1,t}} \\
F(u_{15,t} | u_{1,t}) &= \frac{\partial C_{115}(u_{1,t}, u_{15,t} | \theta_{115,t})}{\partial u_{1,t}} \\
F(u_{7,t} | u_{1,t}, u_{3,t}) &= \frac{\partial c_{37|1} [F(u_{3,t} | u_{1,t}), F(u_{7,t} | u_{1,t}) | \theta_{37|1,t}]}{\partial F(u_{3,t} | u_{1,t})} \\
F(u_{15,t} | u_{1,t}, u_{3,t}) &= \frac{\partial c_{315|1} [F(u_{3,t} | u_{1,t}), F(u_{15,t} | u_{1,t}) | \theta_{315|1,t}]}{\partial F(u_{3,t} | u_{1,t})}
\end{aligned} \tag{5}$$

Figure 3 shows the schematic decomposition of the 4-D C-vine copula as expressed by Eq. (4). It is evident that the hierarchical structure of the 4-D C-vine copula contains three trees and six edges. The first tree (T1) includes three bivariate pair copulas, i.e., $c_{13}(\cdot | \theta_{13,t})$, $c_{17}(\cdot | \theta_{17,t})$ and $c_{115}(\cdot | \theta_{115,t})$, which directly act on the marginal probabilities and describe the bivariate dependencies between the key variable Q_1 and the other three variables, i.e., V_3 , V_7 and V_{15} . The second tree (T2) includes two bivariate pair copulas $c_{37|1}(\cdot | \theta_{37|1,t})$ and $c_{315|1}(\cdot | \theta_{315|1,t})$, which act on the conditional distribution functions with $u_{1,t}$ as the conditioning variable. Finally, the third tree (T3) includes only one bivariate pair copula $c_{715|13}(\cdot | \theta_{715|13,t})$ acting on conditional distribution functions with both $u_{1,t}$ and $u_{3,t}$ as the conditioning variables.

In flood frequency analysis, the upper tail of the flood distribution deserves more attention because it allows the quantification of risks of the more serious flood events. The Gumbel-Hougaard copula, an extreme-value copula widely used in hydrology, accounts for the upper tail dependence, and is well-suited to the dependence structure of a multivariate flood distribution (Salvadori et al., 2007; Zhang and Singh, 2007; Xiong et al., 2015). Consequently, the present study employed the bivariate Gumbel-Hougaard copula to construct the dynamic C-vine copula formulated by Eq. (4). The bivariate Gumbel-Hougaard copula is expressed as follows:

$$C(u, v) = \exp\left\{-\left[(-\ln u)^{\theta_c} + (-\ln v)^{\theta_c}\right]^{1/\theta_c}\right\}, \theta_c \in [1, \infty) \quad (6)$$

285 where u and v are the bivariate marginal probabilities and θ_c is the single parameter measuring the dependence strength.

Similar to the nonstationary marginal distributions, the nonstationarity of the dependence structure of (Q_1, V_3, V_7, V_{15}) was characterized by the time variations of the copula parameters in T1, T2 and T3. Both linear and exponential functions were considered to characterize the time-varying copula parameters and generally formulated as follows:

$$\begin{aligned} \text{Linear:} \quad & \theta_{c,t} = \beta_0 + \beta_1 Pop_t + \beta_2 RI_t \\ \text{Exponential:} \quad & \theta_{c,t} = 1 + \exp(\beta_0 + \beta_1 Pop_t + \beta_2 RI_t) \end{aligned} \quad (7)$$

where β_0 , β_1 and β_2 are model parameters estimated using the MLE method (Aas et al., 2009). Here, the exponential expression in Eq. (7) was written as the sum of one and an exponential function of the covariates, so that the domain range of the copula parameter θ_c can be satisfied under any condition. To make it easy in parameter estimation, the model parameters for each pair copula were separately estimated. The model parameters for $\theta_{13,t}$, $\theta_{17,t}$ and $\theta_{115,t}$ in T1 were first estimated, and those for the remaining copula parameters $\theta_{37|1,t}$, $\theta_{315|1,t}$ and $\theta_{715|13,t}$ in T2 and T3 were then estimated in sequence. It is worth noting that these parameters can be also simultaneously estimated. These two methods could result in possible difference in parameter estimation.

300 The available GoF tests for vine copulas are very limited, with the Probability Integral Transform (PIT) test (Rosenblatt, 1952) appearing to be reliable (Aas et al., 2009). Under a null hypothesis of the multivariate flood variables (Q_1, V_3, V_7, V_{15}) following a given C-vine copula, the PIT converts the dependent flood variables into a new set of variables that are independent and uniformly distributed on $[0,1]^4$. The GoF of vine copulas can be obtained through determining whether the resulting variables are independent and uniform in $[0,1]$. For more details of the PIT test, readers are referred to Aas et al. (2009). The best nonstationary model for each bivariate pair copula in Eq. (4) was chosen from the nonstationary models generally expressed by Eq. (7) in terms of the AICc value.

3.2. Multivariate hydrologic design under nonstationary conditions

3.2.1. Average annual reliability for multivariate flood events

310 The AAR introduced by Read and Vogel (2015) was calculated using the arithmetic average method, thereby taking into account the reliability of each year with the same weighting factor. A safer design strategy should pay more attention to worse (i.e. lower) annual reliability; however, the arithmetic-average AAR is not capable of this function. The present study employed the geometric average method to calculate AAR, which is dominated more by the minimum than arithmetic average, and is
 315 theoretically able to yield safer design values. The geometric-average AAR is also equivalent to the metrics of DLL (Rootzén and Katz, 2013) and ER (Liang et al., 2016; Yan et al., 2017).

Denoting (q_1, v_3, v_7, v_{15}) as a given multivariate flood event, its exceedance probability p_t , which is the occurrence probability of a more dangerous multivariate event than (q_1, v_3, v_7, v_{15}) in a specific hazard scenario, would vary from year to year under nonstationary conditions. The AAR for
 320 (q_1, v_3, v_7, v_{15}) was calculated by the geometric average method as follows:

$$AAR(q_1, v_3, v_7, v_{15}) = \left[\prod_{t=T_1}^{T_2} (1 - p_t) \right]^{\frac{1}{T_2 - T_1 + 1}} \quad (8)$$

where T_1 and T_2 stand for the beginning year and ending year of the operation of an assumed hydraulic structure, respectively; $T_2 - T_1 + 1$ is the length of the design life period of the hydraulic structure and; $1 - p_t$ measures the annual reliability of the given multivariate flood event (q_1, v_3, v_7, v_{15}) at time t .

3.2.2. Exceedance probabilities of multivariate flood events

The present study characterized AAR by considering three widely used definitions of the exceedance probabilities of the multivariate flood event (q_1, v_3, v_7, v_{15}) , i.e., the OR, AND and Kendall cases (Salvadori and De Michele, 2004; Favre et al., 2004; Salvadori et al., 2007; Salvadori and De Michele, 2010; Vandenberghe et al., 2011; Salvadori et al., 2016). The OR case for (q_1, v_3, v_7, v_{15})
 330 defines the case under which at least one of the flood features exceeds the prescribed threshold. The exceedance probability in the OR case at time t was denoted as p_t^{or} , and was calculated by:

$$p_t^{or} = P(Q_{1,t} \geq q_1 \vee V_{3,t} \geq v_3 \vee V_{7,t} \geq v_7 \vee V_{15,t} \geq v_{15}) = 1 - F(q_1, v_3, v_7, v_{15} | \boldsymbol{\theta}_t) \quad (9)$$

where ‘ \vee ’ stands for the OR operator and $F(\cdot|\boldsymbol{\theta}_t)$ is defined in Eq. (1).

The AND case for (q_1, v_3, v_7, v_{15}) defines the case under which all of the flood features exceed the prescribed thresholds, and the corresponding exceedance probability p_t^{and} at time t was expressed as follows:

$$\begin{aligned} p_t^{and} &= P(Q_{1,t} > q_1 \wedge V_{3,t} > v_3 \wedge V_{7,t} > v_7 \wedge V_{15,t} > v_{15}) \\ &= \iiint\limits_{\Omega^{and}} f(Q_{1,t}, V_{3,t}, V_{7,t}, V_{15,t} | \boldsymbol{\theta}_t) dQ_{1,t} \cdot dV_{3,t} \cdot dV_{7,t} \cdot dV_{15,t} \\ \Omega^{and} &: q_1 < Q_{1,t} < \infty, v_3 < V_{3,t} < \infty, v_7 < V_{7,t} < \infty, v_{15} < V_{15,t} < \infty \end{aligned} \quad (10)$$

where ‘ \wedge ’ is the AND operator and $f(\cdot|\boldsymbol{\theta}_t)$ is defined in Eq. (2).

Under the Kendall case, the multivariate flood event (q_1, v_3, v_7, v_{15}) was first transformed into a univariate representation via the Kendall’s distribution function $K_C(\cdot)$ as follows:

$$K_C(\rho_t) = P[C(U_{1,t}, U_{3,t}, U_{7,t}, U_{15,t} | \boldsymbol{\theta}_{c,t}) \leq \rho_t] = P[F(Q_{1,t}, V_{3,t}, V_{7,t}, V_{15,t} | \boldsymbol{\theta}_t) \leq \rho_t] \quad (11)$$

where $\rho_t = F(q_1, v_3, v_7, v_{15} | \boldsymbol{\theta}_t)$ is the probability level corresponding to the given flood event (q_1, v_3, v_7, v_{15}) . The exceedance probability p_t^{ken} in the Kendall case at time t was expressed as follows:

$$p_t^{ken} = 1 - K_C(\rho_t) \quad (12)$$

For general multivariate cases, the exceedance probabilities p_t^{or} , p_t^{and} and p_t^{ken} could have no analytical solutions, but can be numerically estimated through the Monte Carlo method (Niederreiter, 1978; Salvadori et al., 2011, 2013). The AAR in the OR, AND and Kendall cases can be calculated by replacing the exceedance probability p_t in Eq. (8) by p_t^{or} , p_t^{and} and p_t^{ken} , respectively.

3.2.3. Most-likely design event and confidence interval for multivariate hydrologic design

The methods identifying both the most-like design event, denoted by $(z_{Q_1}^*, z_{V_3}^*, z_{V_7}^*, z_{V_{15}}^*)$, and the confidence interval for the multivariate hydrologic design $(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}})$ given $AAR=\eta$ are introduced below. The average annual probability density, denoted by $g(\cdot)$, of $(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}})$ over the entire design life period from T_1 to T_2 , was expressed as follows:

$$g(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}}) = \frac{1}{T_2 - T_1 + 1} \sum_{t=T_1}^{T_2} f(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}} | \theta_t) \quad (13)$$

355 The probability distribution function for $AAR \leq \eta$ can be written as:

$$\Phi(\eta) = \iiint_{\Omega: AAR(q_1, v_3, v_7, v_{15}) \leq \eta} g(q_1, v_3, v_7, v_{15}) dq_1 dv_3 dv_7 dv_{15} \quad (14)$$

By denoting the density function of $\Phi(\eta)$ as $\phi(\eta)$, the probability density of $(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}})$ conditioned on $AAR = \eta$ can be expressed as:

$$g_{|AAR=\eta}(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}}) = \frac{g(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}})}{\phi(\eta)} \quad (15)$$

360 The most-likely design event conditioned on $AAR = \eta$ was theoretically written as:

$$(z_{Q_1}^*, z_{V_3}^*, z_{V_7}^*, z_{V_{15}}^*) = \arg \max g_{|AAR=\eta}(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}}) \quad (16)$$

Unfortunately, the analytical solutions of both the most-likely design event $(z_{Q_1}^*, z_{V_3}^*, z_{V_7}^*, z_{V_{15}}^*)$ and confidence interval are unavailable, but can be approximately estimated through the Monte Carlo simulation method. First, the design events with sample size N conditioned on $AAR = \eta$ were generated.

365 These design events were then sorted in descending order of their multivariate probability densities, denoted by:

$$(z_{Q_1}^1, z_{V_3}^1, z_{V_7}^1, z_{V_{15}}^1), (z_{Q_1}^2, z_{V_3}^2, z_{V_7}^2, z_{V_{15}}^2), \dots, (z_{Q_1}^{Nc}, z_{V_3}^{Nc}, z_{V_7}^{Nc}, z_{V_{15}}^{Nc}), \dots, (z_{Q_1}^N, z_{V_3}^N, z_{V_7}^N, z_{V_{15}}^N) \quad (17)$$

where $Nc = N \cdot p_c$, and p_c is the critical probability level for the confidence interval. Thus, the approximate solution for $(z_{Q_1}^*, z_{V_3}^*, z_{V_7}^*, z_{V_{15}}^*)$ is $(z_{Q_1}^1, z_{V_3}^1, z_{V_7}^1, z_{V_{15}}^1)$. The lower boundary for the confidence

370 interval was expressed as follows:

$$\begin{cases} z_{Q_1}^L = \min(z_{Q_1}^1, z_{Q_1}^2, \dots, z_{Q_1}^{Nc}) \\ z_{V_3}^L = \min(z_{V_3}^1, z_{V_3}^2, \dots, z_{V_3}^{Nc}) \\ z_{V_7}^L = \min(z_{V_7}^1, z_{V_7}^2, \dots, z_{V_7}^{Nc}) \\ z_{V_{15}}^L = \min(z_{V_{15}}^1, z_{V_{15}}^2, \dots, z_{V_{15}}^{Nc}) \end{cases} \quad (18)$$

The upper boundary for the confidence interval was estimated by:

$$\begin{cases} z_{Q_1}^U = \max(z_{Q_1}^1, z_{Q_1}^2, \dots, z_{Q_1}^{Nc}) \\ z_{V_3}^U = \max(z_{V_3}^1, z_{V_3}^2, \dots, z_{V_3}^{Nc}) \\ z_{V_7}^U = \max(z_{V_7}^1, z_{V_7}^2, \dots, z_{V_7}^{Nc}) \\ z_{V_{15}}^U = \max(z_{V_{15}}^1, z_{V_{15}}^2, \dots, z_{V_{15}}^{Nc}) \end{cases} \quad (19)$$

3.2.4. Derivation of design flood hydrographs

375 In China, the design flood hydrographs for hydraulic structures are usually derived from the design flood events set against a benchmark flood hydrograph, which is chosen from the observed flood processes (Ministry of Water Resources of People's Republic of China, 1996; Xiao et al., 2009, Yin et al., 2017). As an example, suppose that a flood hydrograph consists of the features of annual maximum daily discharge, 3-day flood volume, 7-day flood volume and 15-day flood volume. The four features of
380 the benchmark flood hydrograph are denoted by Q_1^B , V_3^B , V_7^B and V_{15}^B , respectively. The design flood hydrograph corresponding to the multivariate hydrologic design realization $(z_{Q_1}, z_{V_3}, z_{V_7}, z_{V_{15}})$ can be derived by multiplying the benchmark flood hydrograph by different amplifiers, given as described below.

The amplifier K_1 for the annual maximum daily discharge was calculated by:

$$385 \quad K_1 = \frac{z_{Q_1}}{Q_1^B} \quad (20)$$

The amplifier K_{3-1} for the 3-day flood volume except for the annual maximum daily discharge was calculated by:

$$K_{3-1} = \frac{z_{V_3} - V(z_{Q_1})}{V_3^T - V(Q_1^B)} \quad (21)$$

where $V(\cdot)$ is the operator transforming daily discharge into flood volume. The amplifier K_{7-3} for the
390 7-day flood volume except for the 3-day flood volume was calculated by:

$$K_{7-3} = \frac{z_{V_7} - z_{V_3}}{V_7^T - V_3^B} \quad (22)$$

Finally, the amplifier K_{15-7} for the 15-day flood volume except for the 7-day flood volume was calculated by:

$$K_{15-7} = \frac{z_{V_{15}} - z_{V_7}}{V_{15}^T - V_7^B} \quad (23)$$

395 4. Results

4.1. Nonstationary analysis for marginal distributions

The time-varying moments model was employed to perform nonstationary analysis for each marginal distribution of the multivariate flood series (Q_1, V_3, V_7, V_{15}) of the Xijiang River. In general, the candidate distributions for all margins passed the GoF test at the 0.05 significance level. The chosen
 400 models featured with the smallest AICc values were shown in Table 2. The results indicated that the GEV distribution provided the best fit for the annual maximum daily discharge series Q_1 , whereas the Gamma distribution was chosen as the theoretical distribution for the flood volume series V_3, V_7 and V_{15} . All estimated model parameters were found to be statistically significant at the 0.05 level. The 95% uncertainty intervals for the estimated parameters are were calculated by the parametric bootstrap
 405 method (Kysely, 2009). In accordance with the modeling results, it can be seen that the location parameters μ for all flood series were nonstationary, while the scale and shape parameters were stationary. Through an exponential function, the location parameters μ referring to the means of the flood series were generally positively related to the urban population Pop , whereas they were negatively related to the reservoir index RI . This finding revealed the opposite roles played by
 410 urbanization and reservoir regulation on the flood processes of the XRB. In particular, more artificial levees were required to protect urban areas from flooding by constraining the flood flow to river channels, which resulted in increasing the river channel flood flow. The reservoirs played an active role in flood control by reducing the flood discharge downstream.

More specific to each margin of (Q_1, V_3, V_7, V_{15}) , the location parameters μ of the three short-
 415 duration flood series, i.e., Q_1, V_3 and V_7 , were positively linked to Pop , whereas RI was the driving

factor reducing μ for all flood series, including Q_1 , V_3 , V_7 and V_{15} . Owing to the difference in covariate selections, the short-duration flood series, including Q_1 , V_3 and V_7 , displayed asynchronous nonstationary behaviors with the long-duration flood series V_{15} occurring in the observation period of 1951–2012. As shown in Figure 4, Q_1 , V_3 and V_7 presented significantly increasing trends during 1951–
420 2005, particularly since the 1980s, marking the beginning of a period of rapid urbanization in China. V_{15} tended to follow a stationary process during 1951–2005. After the two flood control reservoirs were put into operation in 2006, all flood series, including Q_1 , V_3 , V_7 and V_{15} , exhibited a sharp decline.

The predicted marginal distributions for (Q_1, V_3, V_7, V_{15}) during the design life period from 2013 to 2100 were estimated using the time-varying moments model by replacing the observed covariates for μ
425 with those predicted. Figure 4 also shows that the mean values of Q_1 , V_3 and V_7 during the design life period increased with the growth of the urban population, following which they decreased sharply in 2023 after a larger reservoir named Datengxia is expected to be put into operation. After 2023, with no more reservoirs planned, the predicted mean values of Q_1 , V_3 and V_7 would be expected to reach their peaks in the mid-21st century followed by a slight declining trend because of a shrinking urban
430 population. Since V_{15} was only related to RI , V_{15} would show an abrupt decline in 2023 due to the regulation of the Datengxia Reservoir. In general, the predicted nonstationary marginal distributions for Q_1 and V_3 during 2013–2100 was roughly approximate to the marginal distributions under the assumption of stationarity, whereas the predicted nonstationary marginal distributions for V_7 and V_{15} exhibited smaller mean values than those of the stationary distributions.

4.2. Nonstationary dependence structure for (Q_1, V_3, V_7, V_{15})

After estimating the nonstationary marginal distributions for (Q_1, V_3, V_7, V_{15}) , the multivariate dependence structure was constructed by the dynamic C-vine copula with Q_1 elected as the key variable. Figure 5 illustrates significant correlations between the flood peak Q_1 and the flood volumes (i.e., V_3 , V_7 and V_{15}). Table 3 shows the estimation results of the dynamic C-vine copula. The PIT test for the

440 nonstationary dependence structure of (Q_1, V_3, V_7, V_{15}) suggested a satisfactory fitting effect, and most estimated parameters were statistically significant at the 0.05 level. The results indicated that the copula parameter θ_{115} for pair (Q_1, V_{15}) was found to be nonstationary and expressed as an exponential function of both the urban population Pop and reservoir index RI , whereas other copula parameters indicated stationary dependences. It was seen that the margin of Q_1 displayed asynchronous nonstationarity
445 behaviors with V_{15} (see Table 2 and Figure 4). Therefore, the dependence nonstationarity of the pair (Q_1, V_{15}) could possibly be attributed to the asynchronous marginal nonstationarities.

According to the regression function, θ_{115} was negatively related to Pop whereas it was positively related to RI . In other words, growing urbanization weakened the multivariate flood dependence, whereas reservoir regulation played an opposite role enhancing the dependence. This finding indicated
450 that human activities, including urbanization and reservoir regulation, not only changed the statistical characteristics of the marginal distributions of (Q_1, V_3, V_7, V_{15}) , but also affected the dependence of (Q_1, V_3, V_7, V_{15}) . Figure 6 shows the time variations of θ_{115} during the observation period of 1951–2012 as well as during the design life period of 2013–2100. Due to reservoir regulation, θ_{115} presented two obvious upward change points in both 2006 and 2023. Besides, θ_{115} also exhibited an obvious
455 decreasing trend with urban population growth from 1951 to the mid-21th century, followed by a slight increasing trend due to shrinking urban population. During the design life period, the predicted nonstationary θ_{115} suggests a weaker dependence for (Q_1, V_3, V_7, V_{15}) than the dependence under the stationary assumption, since it is usually smaller than the stationary estimation.

In addition, the change-point detection method based on the Cramér-von Mises statistic (Bücher et al., 2014) was employed to detect possible nonstationarities in both the marginal distributions and
460 dependence of the multivariate flood series (Q_1, V_3, V_7, V_{15}) . Readers are referred to Bücher et al. (2014) and Kojadinovic (2017) for specific steps to implement the change-point detection. The results indicated that neither the marginal distributions nor dependence displayed change points at the 0.05 significance level (see Table 4), whereas the previous analysis suggested nonstationary margins and

465 dependence due to the joint effects of urbanization and reservoir regulation. These aforementioned
inconsistencies could be attributed to the opposite roles of urbanization and reservoir regulation on
shifting of the multivariate flood distribution, with urbanization generally enlarging the mean values of
the flood series and weakening their dependence, and reservoir regulation decreasing the mean values
and strengthening the dependence. In other words, the nonstationarities induced by these two factors
470 may have offset each other. As a result, the nonstationarities of (Q_1, V_3, V_7, V_{15}) might have not been
captured by the statistical method based on the Cramér-von Mises statistic. This finding highlights the
significance of cause-effect analysis in judging the nonstationarities of hydrologic series (Xiong et al.,
2015).

4.3. Multivariate hydrologic design characterized by average annual reliability

475 The multivariate hydrologic designs, characterized by AAR associated with the OR, AND and
Kendall exceedance probabilities, were estimated from the predicted nonstationary multivariate
distribution for (Q_1, V_3, V_7, V_{15}) during the design life period from 2013 to 2100. The left columns in
Figures 7–10 show the most-likely design events and the 90% confidence intervals conditioned on the
AAR varying from 0.01 to 0.99. The multivariate hydrologic design events associated with both the OR
480 and Kendall exceedance probabilities exhibited the lower boundaries, whereas the design events
associated with the AND exceedance probability exhibited the upper boundaries.

The design flood hydrographs were derived from the multivariate hydrologic designs against the
benchmark flood hydrograph observed in 1988. Figure 11 shows the design flood hydrographs by
setting AAR equal to 0.90, 0.95 and 0.99. For any given multivariate flood event, the corresponding OR
485 exceedance probability was larger than that of AND, with the Kendall exceedance probability
somewhere in between (Vandenberghé et al., 2011). These differences among the OR, AND and Kendall
exceedance probabilities indicate the different design strategies. It must be noted that the choice of
design strategy in engineering practice is usually priori and is dependent on the specific design
requirements and mechanisms of failure for hydraulic structures (Serinaldi, 2015; Salvadori et al.,
490 2016).

We calculated the univariate hydrologic design events from the predicted marginal distributions to

compare the design strategies under the multivariate framework with those under the univariate framework. Figures 7–10 show that the univariate hydrologic design events exactly constituted the lower boundaries of the multivariate hydrologic design events associated with the OR exceedance probability, as well as the upper boundaries of the design events associated with the AND exceedance probability. Under a given AAR, the hydrologic designs under the univariate framework were generally smaller than the most-likely design events associated with the OR exceedance probability; whereas they were larger than those associated with the AND exceedance probability; and they were most approximate to those associated with the Kendall exceedance probability. The comparisons of the flood hydrographs displayed in Figure 11 reinforced these findings.

4.4. Impacts of multivariate nonstationarity behaviors on hydrologic design values

Sections 4.1 and 4.2 show the marginal distribution and dependence structure of the multivariate flood distribution of (Q_1, V_3, V_7, V_{15}) to be nonstationary. We estimated the multivariate hydrologic design events under an assumption of stationarity to illustrate how these nonstationarities act on the multivariate hydrologic designs, i.e., both marginal distributions and the dependence structure were treated as stationary (see the right columns in Figures 7–10). Figure 4 suggests that both the predicted nonstationary marginal distributions for Q_1 and V_3 during the design life period were approximate to the stationary marginal distributions. Therefore, the nonstationary and stationary marginal distributions yielded similar design values for z_{Q_1} and z_{V_3} (see Figures 7 and 8). The predicted nonstationary distributions for both V_7 and V_{15} indicated smaller mean values compared to those of the stationary distributions (see Figure 4); therefore, the corresponding hydrologic design values estimated from the nonstationary marginal distributions were generally smaller than those estimated from the stationary marginal distributions (see Figures 9 and 10).

The nonstationary multivariate flood distribution during the design life period was also predicted to exhibit a weaker dependence structure than that of the stationary distribution (see Figure 6). The dependence nonstationarity was expected to have a much subtler effect on the multivariate hydrologic design compared to the marginal nonstationarities (Xiong et al., 2015). To illustrate the individual effect of the dependence nonstationarity on the multivariate hydrologic design, an artificial nonstationary

condition for the multivariate flood distribution was set that only the marginal nonstationarities were
520 considered, whereas the dependence structure was treated as stationary. The results of the multivariate
hydrologic design events are shown in the middle columns in Figures 7–10. In general, the dependence
nonstationarity had less effect on the multivariate hydrologic designs compared the marginal
nonstationarities; however, some visible differences in both the 90% confidence intervals were still
525 identified. In summary, the nonstationary and weaker dependence structure generally suggested wider
confidence intervals for the multivariate hydrologic design values.

5. Conclusion and remarks

The statistical characteristics of both the marginal distributions and the dependence structure of
multivariate flood variables can vary with time under nonstationary conditions. It is possible that the
multivariate flood distribution estimated from the historical information will not reflect the statistical
530 characteristics of flooding in the future. As a result, the stationary-based hydrologic design would not be
able to deal with potential hydrologic risks of hydraulic structures. It is necessary for hydrologic
designers to take into account the physical driving forces (such as human activities and climate change)
responsible for the nonstationarities of multivariate flood variables.

The present study introduced possible methods for addressing multivariate hydrologic design for
535 application in engineering practice under nonstationary conditions. A dynamic C-vine copula allowing
for both time-varying marginal distributions and time-varying dependence structure was developed to
capture the nonstationarities of a multivariate flood distribution. The multivariate hydrologic design
under nonstationary conditions was estimated by specifying the design criterion by average annual
reliability. The most-likely design event and confidence interval were identified as the outcome of the
540 multivariate hydrologic design. Multivariate flood series (Q_1, V_3, V_7, V_{15}) from the Xijiang River were
chosen as a case study, with the main findings given below.

Urbanization and reservoir regulation were found to be the driving forces responsible for the
nonstationarities of both the marginal distributions and dependence structure of the multivariate flood
series (Q_1, V_3, V_7, V_{15}) . The growth of the urban population generally resulted in an increased mean value
545 of the individual flood series, whereas it weakened the dependence of (Q_1, V_3, V_7, V_{15}) . The increasing

reservoir index had the opposite effects on the individual flood series as well as their dependence. Under a given average annual reliability, the OR exceedance probability yielded the largest design values, followed by the Kendall and the AND exceedance probabilities. Nonstationarities in both marginal distributions and dependence structure affected the outcome of the multivariate hydrologic design. It is the marginal nonstationarities that played a dominant role in affecting the multivariate hydrologic design.

There are two remarks that can be made related to the practical implications of the hydrologic design methods developed in the current study that are detailed below.

The first remark relates to the length of observed flood data required for multivariate and nonstationary hydrologic designs. In theory, sufficiently long observed flood data (or other extreme-value data) are required to derive robust estimations of the distribution parameters and the correct hydrologic design values (Zheng et al., 2018). However, in reality, most data series are limited in length, thus forcing us to use what we have at hands to do research or design works without fulfilling the theoretical assumptions or requirements. Some recent studies suggested that univariate flood frequency analysis under stationary conditions usually requires flood data with a continuous period of at least 30 years (Ministry of Water Resources of People's Republic of China, 1996; Engeland et al., 2018; Kobierska et al., 2018). However, determining a definitive answer to what length of observed flood data is required for flood frequency analysis under multivariate and/or nonstationary settings poses a challenge since this issue has not yet been fully addressed. However, it is certain that multivariate and nonstationary hydrologic designs naturally require dataset of longer length, since they usually contain more parameters to be estimated.

The second remark related to the tradeoff between reducing estimation bias and increasing model uncertainty. Nonstationary models generally improve performance in fitting observation data by reducing estimation bias (Jiang et al., 2015b), but this is usually achieved at the expense of increasing model complexity, such as adding more model parameters and introducing more nonstationary covariates, which might induce additional sources of model uncertainty (Serinaldi and Kilsby, 2015; Read and Vogel, 2016). A careful balance between the model fitting effect and the model complexity should be maintained in practice when employing multivariate and nonstationary hydrologic design by

575 keeping in mind the following two points: 1) the multivariate and nonstationary models should remain effective but should also be kept as simple as possible to avoid over-fitting and; 2) to ensure a robust relationship between the distribution parameters and the explanatory covariates, the chosen covariates should be physically-related to the flood processes and supported by a well-defined cause-effect analysis.

580 *Data availability.* All the data used in this study can be requested by contacting the corresponding author C. Jiang at jiangcong@cug.edu.cn.

Author contributions. Cong Jiang and Lihua Xiong developed the main ideas. Cong Jiang and Lei Yan implemented the algorithms of the methods. Cong Jiang and Jianfan Dong collected the data used in the case study. Cong Jiang, Lihua Xiong and Chong-Yu Xu prepared the manuscript.

Competing interests. The authors have no conflicts of interest to declare.

585 *Acknowledgements.* This research was jointly financially supported by the National Natural Science Foundation of China (NSFC Grants 51809243 and 51525902), the Fundamental Research Funds for the Central Universities (Grant CUG170679), the Research Council of Norway (FRINATEK Project 274310), and the “111 Project” Fund of China (B18037), all of which are greatly appreciated. The authors express their gratitude to the reviewers for their constructive comments and suggestions that
590 have helped improve the manuscript.

Appendix

1. Calculating multivariate exceedance probabilities

1.1 OR exceedance probability (formulated by Eq. (9) in the paper)

595 Since the cumulative distribution function $F(q_1, v_3, v_7, v_{15} | \theta_t)$ has no analytical expression, the OR exceedance probability p_t^{or} at time t is calculated by the Monte Carlo method as follows:

(1) Calculate the marginal probabilities (u_1, u_3, u_7, u_{15}) of (q_1, v_3, v_7, v_{15}) ;

(2) Generate m samples $(u_{1,i}, u_{3,i}, u_{7,i}, u_{15,i})$ ($i = 1, 2, \dots, m$) from the C-vine copula expressed by Eq. (4);

(3) Calculate $F(q_1, v_3, v_7, v_{15} | \theta_t) = \frac{1}{m+1} \sum_{i=1}^m \mathbf{1}(u_{1,i} \leq u_1, u_{3,i} \leq u_3, u_{7,i} \leq u_7, u_{15,i} \leq u_{15})$;

600 (4) Calculate $p_t^{or} = 1 - F(q_1, v_3, v_7, v_{15} | \theta_t)$.

1.2 AND exceedance probability (formulated by Eq. (10) in the paper)

The AND exceedance probability p_t^{and} at time t is calculated by the Monte Carlo method as follows:

(1) Calculate the marginal probabilities (u_1, u_3, u_7, u_{15}) of (q_1, v_3, v_7, v_{15}) ;

(2) Generate m samples $(u_{1,i}, u_{3,i}, u_{7,i}, u_{15,i})$ ($i = 1, 2, \dots, m$) from the C-vine copula expressed by Eq. (4);

605 (3) Calculate $p_t^{and} = \frac{1}{m+1} \sum_{i=1}^m \mathbf{1}(u_{1,i} \geq u_1, u_{3,i} \geq u_3, u_{7,i} \geq u_7, u_{15,i} \geq u_{15})$.

1.3 The Kendall exceedance probability (formulated by Eq. (11) and Eq. (12) in the paper)

The Kendall exceedance probability p_t^{ken} at time t is calculated by the Monte Carlo method as follows:

(1) Calculate the marginal probabilities (u_1, u_3, u_7, u_{15}) of (q_1, v_3, v_7, v_{15}) ;

610 (2) Calculate $\rho_t = F(q_1, v_3, v_7, v_{15} | \theta_t)$ (see calculation steps 2–3 for OR exceedance probability);

(3) Generate m samples $(u_{1,i}, u_{3,i}, u_{7,i}, u_{15,i})$ ($i = 1, 2, \dots, m$) from the C-vine copula expressed by Eq. (4);

(4) For $j = 1, 2, \dots, m$, calculate $v_j = \frac{1}{m+1} \sum_{i=1}^m \mathbf{1}(u_{1,i} \leq u_{1,j}, u_{3,i} \leq u_{3,j}, u_{7,i} \leq u_{7,j}, u_{15,i} \leq u_{15,j})$;

(5) Calculate $K_C(\rho_t) = \frac{1}{m} \sum_{i=1}^m \mathbf{1}(v_i \leq \rho_t)$;

(6) Calculate $p_t^{ken} = 1 - K_C(\rho_t)$.

615 **2. Generating the multivariate design event samples** (formulated by Eq. (17) in the paper)

To calculate the most-likely design event and confidence interval conditioned on $AAR = \eta$, we need to generate the numerous multivariate design event samples by the Monte Carlo method. Here, we give the details of generating the design event samples as follows:

(1) Define the total number of design event samples N and the initial number of the design event
620 sample $i = 0$;

(2) Generate a random integer (denoted by t_r) among (T_1, T_1+1, \dots, T_2) ;

(3) Generate a random sample $(z_{Q_t}, z_{V_3}, z_{V_7}, z_{V_{15}})$ following the multivariate distribution

$F(z_{Q_t}, z_{V_3}, z_{V_7}, z_{V_{15}} | \theta_{t_r})$ with the distribution parameter vector θ_{t_r} ;

(4) Calculate the annual exceedance probability for each year throughout the period from T_1 to T_2 ;

625 (5) Calculate AAR during the period from T_1 to T_2 ;

(6) If $|AAR - \eta| < \varepsilon$ (where ε is a very small value, such as 0.0001), $i = i + 1$;

(7) If $i < N$, repeat steps (2)–(6).

References

Aas, K., Czado, C., Frigessi, A., and Bakken, H.: Pair-copula constructions of multiple dependence, Insurance
630 Math. Econ., 44, 182–198, <https://doi.org/10.1016/j.insmatheco.2007.02.001>, 2009.

Akaike, H.: A new look at the statistical model identification, IEEE Trans. Autom. Control, 19, 716–723, 1974.

Balisticchi, M., and Bacchi, B.: Derivation of flood frequency curves through a bivariate rainfall distribution
based on copula functions: application to an urban catchment in northern Italy's climate, Hydrology Research,
48(3), 749–762, <https://doi.org/10.2166/nh.2017.109>, 2017.

635 Bender, J., Wahl, T., and Jensen, J.: Multivariate design in the presence of non-stationarity, J. Hydrol., 514, 123–
130, <https://doi.org/10.1016/j.jhydrol.2014.04.017>, 2014.

Blöschl, G., et al.: Changing climate shifts timing of European floods, Science, 357, 588–590, 2017.

- Bracken, C., Holman, K. D., Rajagopalan, B., and Moradkhani, H.: A Bayesian hierarchical approach to multivariate nonstationary hydrologic frequency analysis, *Water Resour. Res.*, 54, 243–255, <https://doi.org/10.1002/2017WR020403>, 2018.
- 640
- Bücher, A., Kojadinovic, I., Rohmer, T., Segers, J.: Detecting changes in cross-sectional dependence in multivariate time series, *J. Multivar. Anal.*, 132, 111–128, <http://dx.doi.org/10.1016/j.jmva.2014.07.012>, 2014.
- Chow, V. T.: *Handbook of Applied Hydrology*, McGraw-Hill, New York, 1964.
- 645 Department of Comprehensive Statistics of National Bureau of Statistics: *China Compendium of Statistics 1949–2008* (in Chinese), China Stat. Press, Beijing, 2010.
- Engeland, K., Wilson, D., Borsányi, P., Roald, L., and Holmqvist, E.: Use of historical data in flood frequency analysis: A case study for four catchments in Norway, *Hydrology Research*, 49, 466–486, 2018,
- Favre, A. C., El Adlouni, S., Perreault, L., Thiémonge, N., and Bobée, B.: Multivariate hydrological frequency analysis using copulas, *Water Resour. Res.*, 40, W01101, <https://doi.org/10.1029/2003WR002456>, 2004.
- 650 Frank, J., and Massey, J. R.: The Kolmogorov-Smirnov test for goodness of fit, *J. Am. Stat. Assoc.*, 46, 68–78, 1951.
- Hawkes, P. J.: Joint probability analysis for estimation of extremes, *Journal of Hydraulic Research*, 46(sup2), 246–256, <https://doi.org/10.1080/00221686.2008.9521958>, 2008.
- 655 He, C.: *The China Modernization Report 2013* (in Chinese), Peking University Press, Beijing, 2014.
- Hurvich, C. M., and Tsai, C. L.: Regression and time series model selection in small samples, *Biometrika*, 76, 297–307, 1989.
- Jiang, C., Xiong, L., Wang, D., Liu, P., Guo, S., and Xu, C.-Y.: Separating the impacts of climate change and human activities on runoff using the Budyko-type equations with time-varying parameters, *J. Hydrol.*, 522, 326–338, <https://doi.org/10.1016/j.jhydrol.2014.12.060>, 2015b.
- 660 Jiang, C., Xiong, L., Xu, C.-Y., and Guo, S.: Bivariate frequency analysis of nonstationary low-flow series based on the time-varying copula, *Hydrol. Processes*, 29, 1521–1534, <https://doi.org/10.1002/hyp.10288>, 2015a.
- Kysely, J.: A cautionary note on the use of nonparametric bootstrap for estimating uncertainties in extreme-value models, *Journal of Applied Meteorology & Climatology*, 47 (12), 3236–3251, 2009.
- 665 Kew, S. F., Selten, F. M., Lenderink, G., and Hazeleger, W.: The simultaneous occurrence of surge and discharge extremes for the Rhine delta, *Nat. Hazards Earth Syst. Sci.*, 13, 2017–2029, <https://doi.org/10.5194/nhess-13-2017-2013>, 2013, 2013.
- Kobierska, F., Engeland, K., and Thorarinsdottir, T.: Evaluation of design flood estimates – a case study for Norway,

- Hydrology Research, 49, 450-465, 2018.
- 670 Kojadinovic, I.: npcp: Some nonparametric CUSUM tests for change-point detection in possibly multivariate observations, R Package Version 0.1-9, Vienna, Austria, 2017.
- Kundzewicz, Z.W., Pińskwar, I., and Brakenridge, G. R.: Changes in river flood hazard in Europe: a review, Hydrology Research, 49, 294-302, 2018.
- Kwon, H.-H., Lall, U., and Kim, S.-J.: The unusual 2013–2015 drought in South Korea in the context of a
675 multicentury precipitation record: Inferences from a nonstationary, multivariate, Bayesian copula model, Geophys. Res. Lett., 43, 8534–8544, <https://doi.org/10.1002/2016GL070270>, 2016.
- Li, T., Guo, S., Liu, Z., Xiong, L., and Yin, J.: Bivariate design flood quantile selection using copulas, Hydrology Research, 48, 997–1013, 2017.
- Liang, Z., Hu, Y., Huang, H., Wang, J., and Li, B.: Study on the estimation of design value under non-stationary
680 environment (in Chinese), South-to-North Water Transfers Water Sci. Technol., 14, 50–53, 2016.
- López, J., and Francés, F.: Non-stationary flood frequency analysis in continental Spanish rivers, using climate and reservoir indices as external covariates, Hydrol. Earth Syst. Sci., 17, 3189–3203, <https://doi.org/10.5194/hess-17-3189-2013>, 2013.
- Loveridge, M., Rahman, A., and Hill, P.: Applicability of a physically based soil water model (SWMOD) in
685 design flood estimation in eastern Australia, Hydrology Research, 48, 1652-1665, 2017.
- Milly, P., Betancourt, J., Falkenmark, M., Hirsch, R., Kundzewicz, Z., Lettenmaier, D., and Stouffer, R.: Climate change - Stationarity is dead: Whither water management? Science, 319(5863), 573–574, <https://doi.org/10.1126/science.1151915>, 2008.
- Ministry of Water Resources of People’s Republic of China: Design Criterion of Reservoir Management (in
690 Chinese), Chin. Water Resour. and Hydropower Press, Beijing, 1996.
- Niederreiter, H.: Quasi-Monte Carlo methods and pseudo-random numbers, Bulletin of the American Mathematical Society, 197, 957-1041, 1978.
- Obeyskera, J., and Salas, J.: Frequency of recurrent extremes under nonstationarity, J. Hydrol. Eng., 21, 04016005, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001339](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001339), 2016.
- 695 Obeyskera, J., and Salas, J.: Quantifying the uncertainty of design floods under nonstationary conditions, J. Hydrol. Eng., 19, 1438–1446, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0000931](https://doi.org/10.1061/(ASCE)HE.1943-5584.0000931), 2014.
- Olsen, J. R., Lambert, J. H., and Haines, Y. Y.: Risk of extreme events under nonstationarity conditions, Risk Anal., 18, 497–510, <https://doi.org/10.1111/j.1539-6924.1998.tb00364.x>, 1998.
- Parey, S., Hoang, T. T. H., and Dacunha-Castelle, D.: Different ways to compute temperature return levels in the

- 700 climate change context. *Environmetrics*, 21, 698–718, <https://doi.org/10.1002/env.1060>, 2010.
- Qi W., and Liu, J.: A non-stationary cost-benefit based bivariate extreme flood estimation approach, *J. Hydrol.*, 557, 589–599, <https://doi.org/10.1016/j.jhydrol.2017.12.045>, 2017.
- Quessy, J., Saïd, M., and Favre, A. C.: Multivariate Kendall’s tau for change-point detection in copulas, *Can. J. Stat.*, 41, 65–82, <https://doi.org/10.1002/cjs.11150>, 2013.
- 705 Read, L. K., and Vogel, R. M.: Hazard function analysis for flood planning under nonstationarity, *Water Resour. Res.*, 52, 4116–4131, <https://doi.org/10.1002/2015WR018370>, 2016.
- Read, L. K., and Vogel, R. M.: Reliability, return periods, and risk under nonstationarity, *Water Resour. Res.*, 51, 6381–6398, <https://doi.org/10.1002/2015WR017089>, 2015.
- Requena, A. I., Mediero, L., and Garrote, L.: A bivariate return period based on copulas for hydrologic dam design: Accounting for reservoir routing in risk estimation, *Hydrol. Earth Syst. Sci.*, 17(8), 3023–3038, <https://doi.org/10.5194/hess-17-3023-2013>, 2013.
- 710 Rootzén, H. and Katz, R. W.: Design Life Level: Quantifying risk in a changing climate, *Water Resour. Res.*, 49, 5964–5972, <https://doi.org/10.1002/wrcr.20425>, 2013.
- Rosner, A., Vogel, R. M., and Kirshen, P. H.: A risk-based approach to flood management decisions in a nonstationary world, *Water Resour. Res.*, 50, 1928–1942, <https://doi.org/10.1002/2013WR014561>, 2014.
- 715 Salas, J. D., and Obeysekera, J.: Revisiting the concepts of return period and risk for nonstationary hydrologic extreme events, *J. Hydrol. Eng.*, 19, 554–568, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0000820](https://doi.org/10.1061/(ASCE)HE.1943-5584.0000820), 2014.
- Salvadori, G., and De Michele, C.: Frequency analysis via copulas: theoretical aspects and applications to hydrological events, *Water Resour. Res.*, 40, W12511, <https://doi.org/10.1029/2004WR003133>, 2004.
- 720 Salvadori, G., and De Michele, C.: Multivariate multiparameter extreme value models and return periods: A copula approach, *Water Resour. Res.*, 46, W10501, <https://doi.org/10.1029/2009WR009040>, 2010.
- Salvadori, G., De Michele, C., and Durante, F.: On the return period and design in a multivariate framework, *Hydrol. Earth Syst. Sci.*, 15, 3293–3305, <https://doi.org/10.5194/hess-15-3293-2011>, 2011.
- 725 Salvadori, G., De Michele, C., Kottegoda, N. T., and Rosso, R.: *Extremes in Nature: An Approach Using Copulas*, Springer, Dordrecht, Netherlands, 2007.
- Salvadori, G., Durante, F., and De Michele, C.: Multivariate return period calculation via survival functions, *Water Resour. Res.*, 49, 2308–2311, <https://doi.org/10.1002/wrcr.20204>, 2013.
- 730 Salvadori, G., Durante, F., De Michele, C., Bernardi, M., and Petrella, L.: A multivariate Copula-based framework for dealing with Hazard Scenarios and Failure Probabilities, *Water Resour. Res.*, 52(5), 3701–

- 3721, <https://doi.org/10.1002/2015WR017225>, 2016.
- Salvadori, G., Durante, F., Michele, C. D., and Bernardi, M.: Hazard assessment under multivariate distributional change-points: Guidelines and a flood case study. *Water* 10 (6), 751–765, <https://doi.org/10.3390/w10060751>, 2018.
- 735 Salvadori, G., Durante, F., Tomasicchio, G. R., and D’Alessandro, F. : Practical guidelines for the multivariate assessment of the structural risk in coastal and off-shore engineering, *Coastal Eng.*, 95, 77–83, <https://doi.org/10.1016/j.coastaleng.2014.09.007>, 2015.
- Sarhadi, A., Burn, D. H., Ausín, M. C., and Wiper, M. P.: Time-varying nonstationary multivariate risk analysis using a dynamic Bayesian copula, *Water Resour. Res.*, 52, 2327–2349, <https://doi.org/10.1002/2015WR018525>, 2016.
- 740 Serinaldi, F., and Kilsby, C. G.: Stationarity is undead: Uncertainty dominates the distribution of extremes, *Adv. Water Resour.*, 77, 17–36, <https://doi.org/10.1016/j.advwatres.2014.12.013>, 2015.
- Serinaldi, F.: Dismissing return periods!, *Stoch. Eev. Res. Risk. A.*, 29 (4), 1179–1189, <http://dx.doi.org/10.1007/s00477-014-0916-1>, 2015.
- 745 Shafaei, M., Fakheri-Fard, A., Dinpashoh, Y., Mirabbasi, R., and De Michele, C.: Modeling flood event characteristics using D-vine structures. *Theoretical and Applied Climatology*, 130 (3-4), 713–724, <http://dx.doi.org/10.1007/s00704-016-1911-x>, 2017.
- Sklar, M.: *Fonctions de Répartition a n Dimensions et Leurs Marges*, 8 pp., Univ. Paris, Paris, 1959.
- Strupczewski, W. G., Singh, V. P., and Feluch, W.: Non-stationary approach to at-site flood frequency modeling I. Maximum likelihood estimation, *J. Hydrol.*, 248, 123–142, [https://doi.org/10.1016/S0022-1694\(01\)00397-3](https://doi.org/10.1016/S0022-1694(01)00397-3), 2001.
- 750 Vandenberghe, S., Verhoest, N. E. C., Onof, C., and De Baets, B.: A comparative copula - based bivariate frequency analysis of observed and simulated storm events: A case study on Bartlett - Lewis modeled rainfall, *Water Resour. Res.*, 47, W07529, <https://doi.org/10.1029/2009WR008388>, 2011.
- 755 Vezzoli, R., Salvadori, G., and De Michele, C.: A distributional multivariate approach for assessing performance of climate-hydrology models, *Scientific Reports*, 7(12071), <https://doi.org/10.1038/s41598-017-12343-1>, 2017.
- Villarini, G., Serinaldi, F., Smith, J. A., and Krajewski, W. F.: On the stationarity of annual flood peaks in the Continental United States during the 20th Century, *Water Resour. Res.*, 45, W08417, <https://doi.org/10.1029/2008WR007645>, 2009.
- 760

- Vogel, R. M., Yaindl, C., and Walter, M.: Nonstationarity: Flood magnification and recurrence reduction factors in the United States, *J. Am. Water Resour. Assoc.*, 47, 464–474, <https://doi.org/10.1111/j.1752-1688.2011.00541.x>, 2011.
- Vogel, R. M.: Reliability indices for water supply systems, *J. Water Resour. Plann. Manage.*, 113, 563–579, [https://doi.org/10.1061/\(ASCE\)0733-9496\(1987\)113:4\(563\)](https://doi.org/10.1061/(ASCE)0733-9496(1987)113:4(563)), 1987.
- 765
- Volpi, E., and Fiori, A.: Design event selection in bivariate hydrological frequency analysis, *Hydrol. Sci. J.*, 57, 1506–1515, <https://doi.org/10.1080/02626667.2012.726357>, 2012.
- Xiao, Y., Guo, S., Liu, P., Yan, B., and Chen, L.: Design flood hydrograph based on multicharacteristic synthesis index method, *J. Hydrol. Eng.*, 14(12), 1359-1364, [https://doi.org/10.1061/\(ASCE\)1084-0699\(2009\)4:12\(1359\)](https://doi.org/10.1061/(ASCE)1084-0699(2009)4:12(1359)), 2009.
- 770
- Xiong, L., and Guo, S.: Trend test and change-point detection for the annual discharge series of the Yangtze River at the Yichang hydrological station, *Hydrol. Sci. J.*, 49, 99–112, <https://doi.org/10.1623/hysj.49.1.99.53998>, 2004.
- Xiong, L., Jiang, C., Xu, C.-Y., Yu, K.-X., and Guo, S.: A framework of changepoint detection for multivariate hydrological series, *Water Resour. Res.*, 51, 8198–8217, <https://doi.org/10.1002/2015WR017677>, 2015.
- 775
- Xu, B., Xie, P., Tan, Y., Li, X., and Liu, Y.: Analysis of flood returning to main channel influence on the flood control ability of Xi River (in Chinese), *Journal of Hydroelectric Engineering*, 33, 65–72, 2014.
- Yan, L., Xiong, L., Guo, S., Xu, C.-Y., Xia, J., and Du, T.: Comparison of four nonstationary hydrologic design methods for changing environment, *J. Hydrol.*, 551, 132 – 150, <https://doi.org/10.1016/j.jhydrol.2017.06.001>, 2017.
- 780
- Yang, T., Shao, Q., Hao, Z., Chen, Xi, Zhang, Z., Xu, C-Y., and Sun, L.: Regional frequency analysis and spatio-temporal pattern characterization of rainfall extremes in the Pearl River Basin, China, *J. Hydrol.*, 380, 386–405, <https://doi.org/10.1016/j.jhydrol.2009.11.013>, 2010.
- Yin, J., Guo, S., Liu, Z., Chen, K., Chang, F., and Xiong, F.: Bivariate seasonal design flood estimation based on copulas, *J. Hydrol. Eng.*, 22, 05017028, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001594](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001594), 2017.
- 785
- Zhang, L., and Singh, V. P.: Trivariate flood frequency analysis using the Gumbel–Hougaard copula, *J. Hydrol. Eng.*, 12, 431–439, [https://doi.org/10.1061/\(ASCE\)1084-0699\(2007\)12:4\(431\)](https://doi.org/10.1061/(ASCE)1084-0699(2007)12:4(431)), 2007.
- Zheng, F., Leonard, M., and Westra, S.: Application of the design variable method to estimate coastal flood risk, *Journal of Flood Risk Management*, 10, 522-534, <https://doi.org/10.1111/jfr3.12180>, 2017.
- 790
- Zheng, F., Leonard, M., and Westra, S.: Efficient joint probability analysis of flood risk, *Journal of Hydroinformatics*, 17, 584-597, 2015.

- Zheng, F., Tao, R., Maier, H. R., See, L., Savic, D., Zhang, T., et al.: Crowdsourcing methods for data collection in geophysics: State of the art, issues, and future directions, *Reviews of Geophysics*, 56, <https://doi.org/10.1029/2018RG000616>, 2018.
- 795 Zheng, F., Westra, S., and Sisson, S. A.: Quantifying the dependence between extreme rainfall and storm surge in the coastal zone, *J. Hydrol.*, 505, 172-187, <https://doi.org/10.1016/j.jhydrol.2013.09.054>, 2013.
- Zheng, F., Westra, S., Leonard, M., and Sisson, S. A.: Modeling dependence between extreme rainfall and storm surge to estimate coastal flooding risk, *Water Resour. Res.*, 50, 2050-2071, <https://doi.org/10.1002/2013WR014616>, 2014.

800 **Table 1** Reservoirs information for the Xijiang River basin

Reservoir	Catchment area (km ²)	Flood control capacity (10 ⁹ m ³)	Year of operation
Longtan	98,500	5.0	2006
Baise	9,600	1.64	2006
Laokou	72,368	0.36	2016
Datengxia	198,612	1.5	2023 (expected)

Table 2 Results of nonstationary analysis for the marginal distributions of (Q_1, V_3, V_7, V_{15})

Flood series	Distribution	μ			σ	ν	p_KS
		α_0	α_1	α_2			
Q_1	GEV	10.050***	0.0212***	-2.166**	6892.085***	-0.271**	0.713
		[9.931, 10.182]	[0.005, 0.036]	[-4.006, -0.481]	[5313.291, 8176.206]	[-0.527, -0.092]	
V_3	Gamma	1.866***	0.0185**	-2.094**	0.261***	-	0.832
		[1.751, 1.977]	[0.002, 0.034]	[-3.801, -0.403]	[0.209, 0.300]		
V_7	Gamma	2.638***	0.0119**	-1.934**	0.269***	-	0.907
		[2.522, 2.754]	[-0.005, 0.028]	[-3.713, -0.166]	[0.215, 0.308]		
V_{15}	Gamma	3.258***	-	-1.525**	0.265***	-	0.926
		[3.213, 3.354]		[-2.807, 0.155]	[0.215, 0.307]		

805 The relationships between μ and covariates were built by the exponential function in Eq. (3). α_1 and α_2 are the parameters related to urban population (Pop) and reservoir index (RI), respectively. The symbols ‘***’, ‘**’, and ‘*’ denote that the estimated model parameters are significant at the levels of 0.01, 0.05 and 0.1, respectively. The numbers in brackets are the 95% uncertainty interval. p_KS stands for the p -value of the KS test for marginal distributions.

Table 3 Results of nonstationary analysis for the dependence structure of (Q_1, V_3, V_7, V_{15})

810


Copula parameter	Model parameters		
	β_0	β_1	β_2
θ_{13}	3.023*** [2.816, 3.249]	-	-
θ_{17}	1.719*** [1.483, 1.976]	-	-
θ_{115}	1.461*** [0.958, 2.038]	-0.111** [-0.021, -0.226]	9.426** [0.970, 20.416]
$\theta_{37 1}$	0.0926* [-0.316, 0.473]	-	-
$\theta_{315 1}$	-1.444** [-3.036, -0.693]	-	-
$\theta_{715 13}$	-0.231* [-0.728, 0.199]	-	-

The relationships between copula parameters and covariates were built by the exponential function in Eq. (7). β_1 and β_2 are the parameters related to urban population (*Pop*) and reservoir index (*RI*), respectively. The symbols '***', '**' and '*' denote that the estimated model parameters are significant at the levels of 0.01, 0.05 and 0.1, respectively. The numbers in brackets are the 95% uncertainty interval. p_PIT stands for p -value of the PIT test for the C-vine copula.

815


Table 4 Results of change-point detection for the marginal distributions and dependence of (Q_1, V_3, V_7, V_{15})

Flood series	Change point of margin	p -value	Flood series	Change point of dependence	p -value
Q_1	1993	0.072	(Q_1, V_3)	1955	0.083
V_3	1993	0.186	(Q_1, V_7)	1955	0.537
V_7	1994	0.752	(Q_1, V_{15})	1972	0.599
V_{15}	1981	0.423	(Q_1, V_3, V_7, V_{15})	1972	0.995

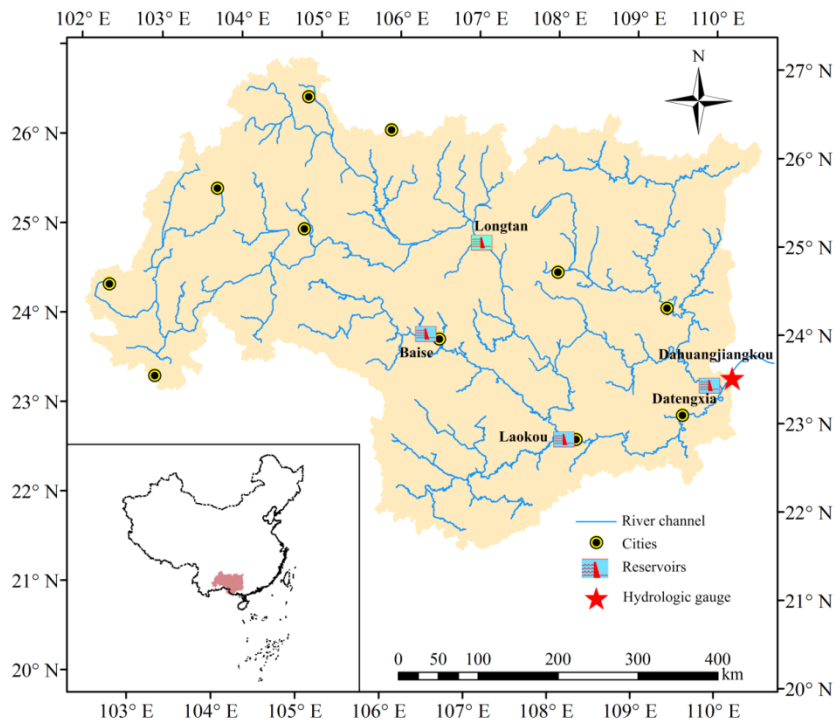

820

Figure 1. Map of the Xijiang River basin (above the Dahuangjiangkou gauge).

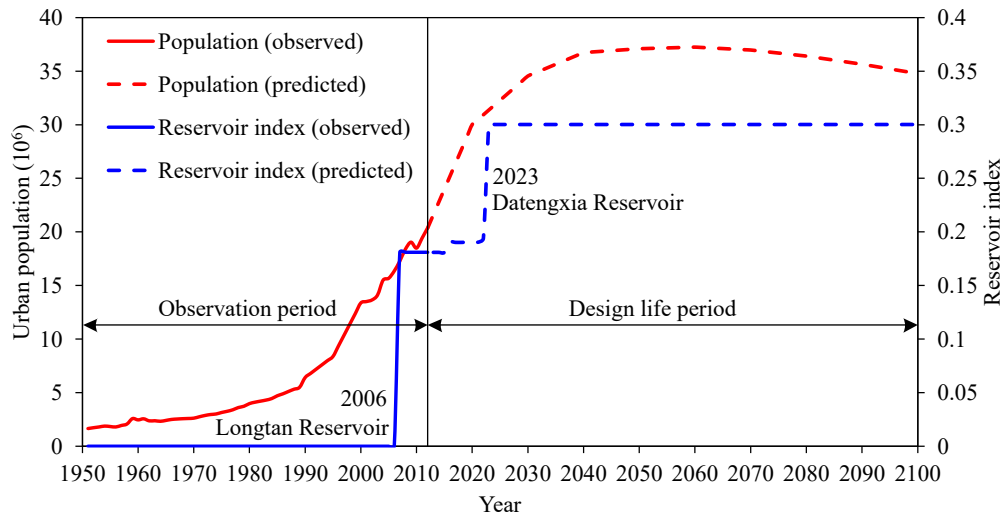

825 **Figure 2.** Evolution of the urban population and reservoir index during both the observation and design life periods.

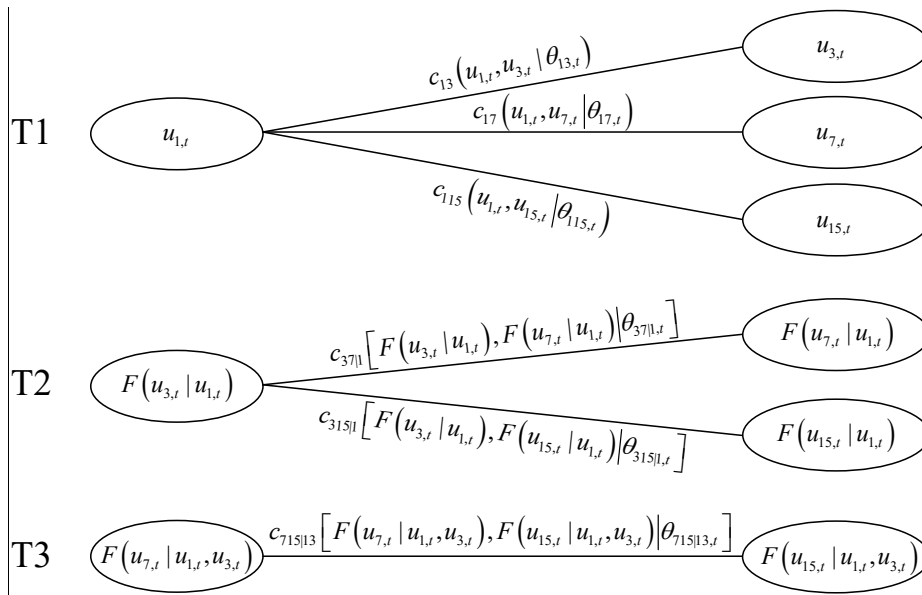


Figure 3. Decomposition of the four-dimensional C-vine copula.



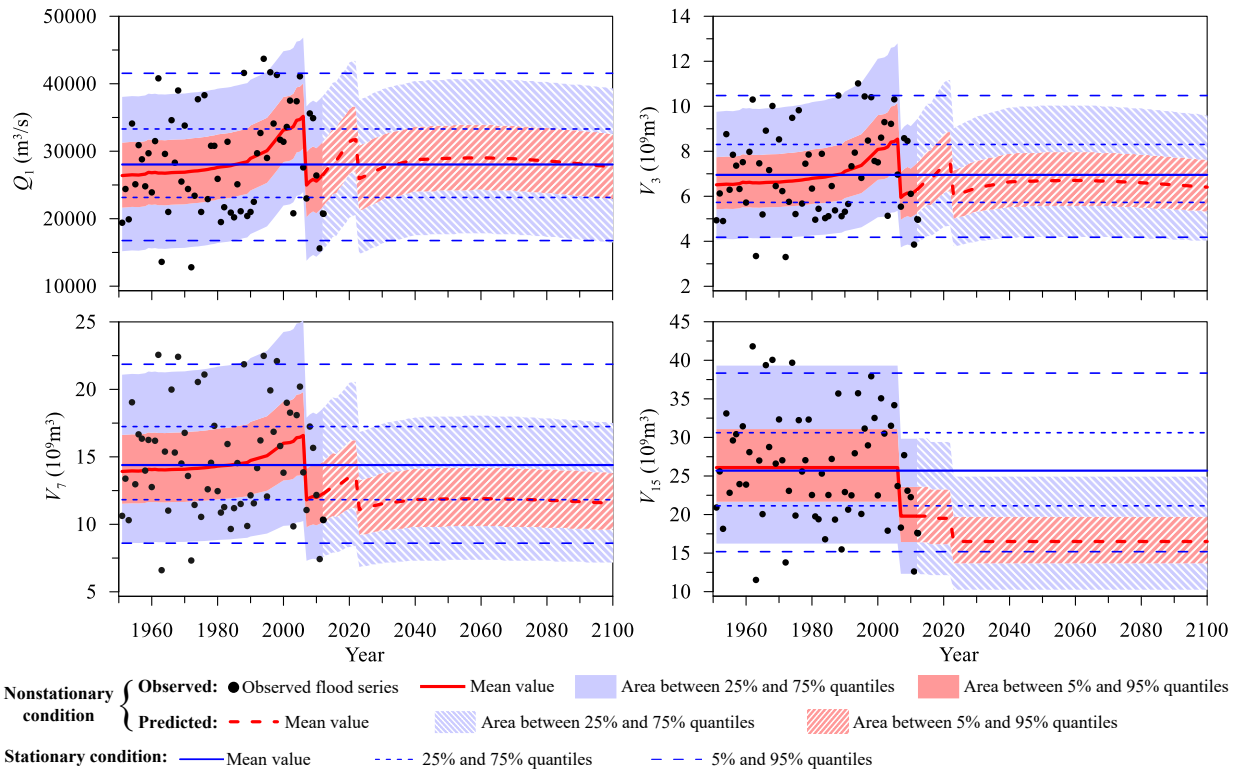


Figure 4. Nonstationary marginal distributions during both the observation and design life periods.

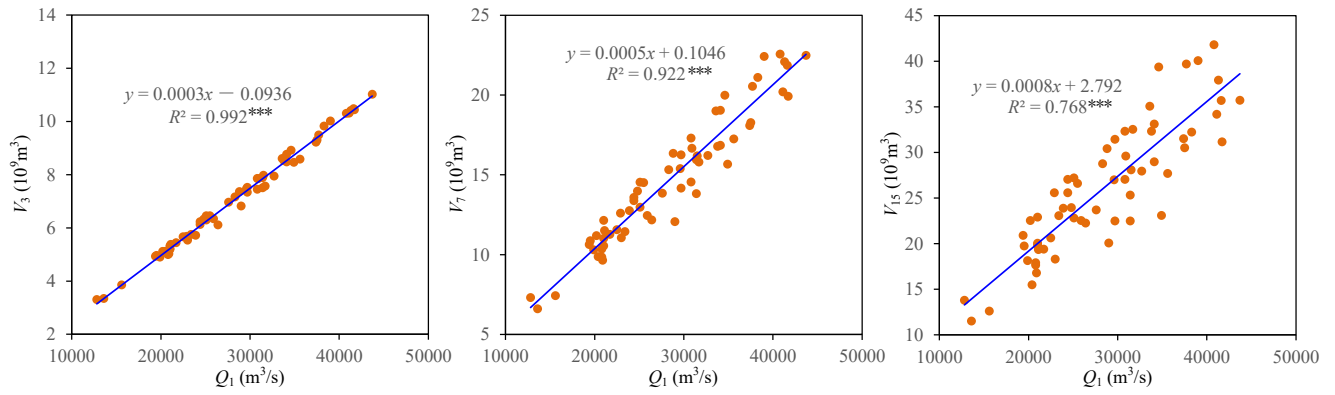


835

Figure 5. Statistical correlations between flood peak and flood volumes. The symbol ‘***’ indicates the statistical correlation at the 0.01 significance level.

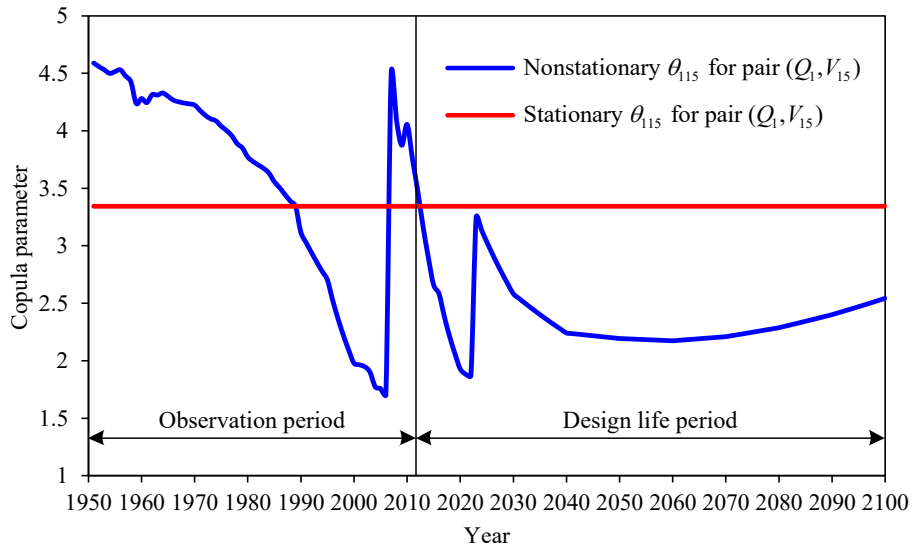

840

Figure 6. Nonstationary copula parameter for pair (Q_1, V_{15}) during both the observation and design life periods.

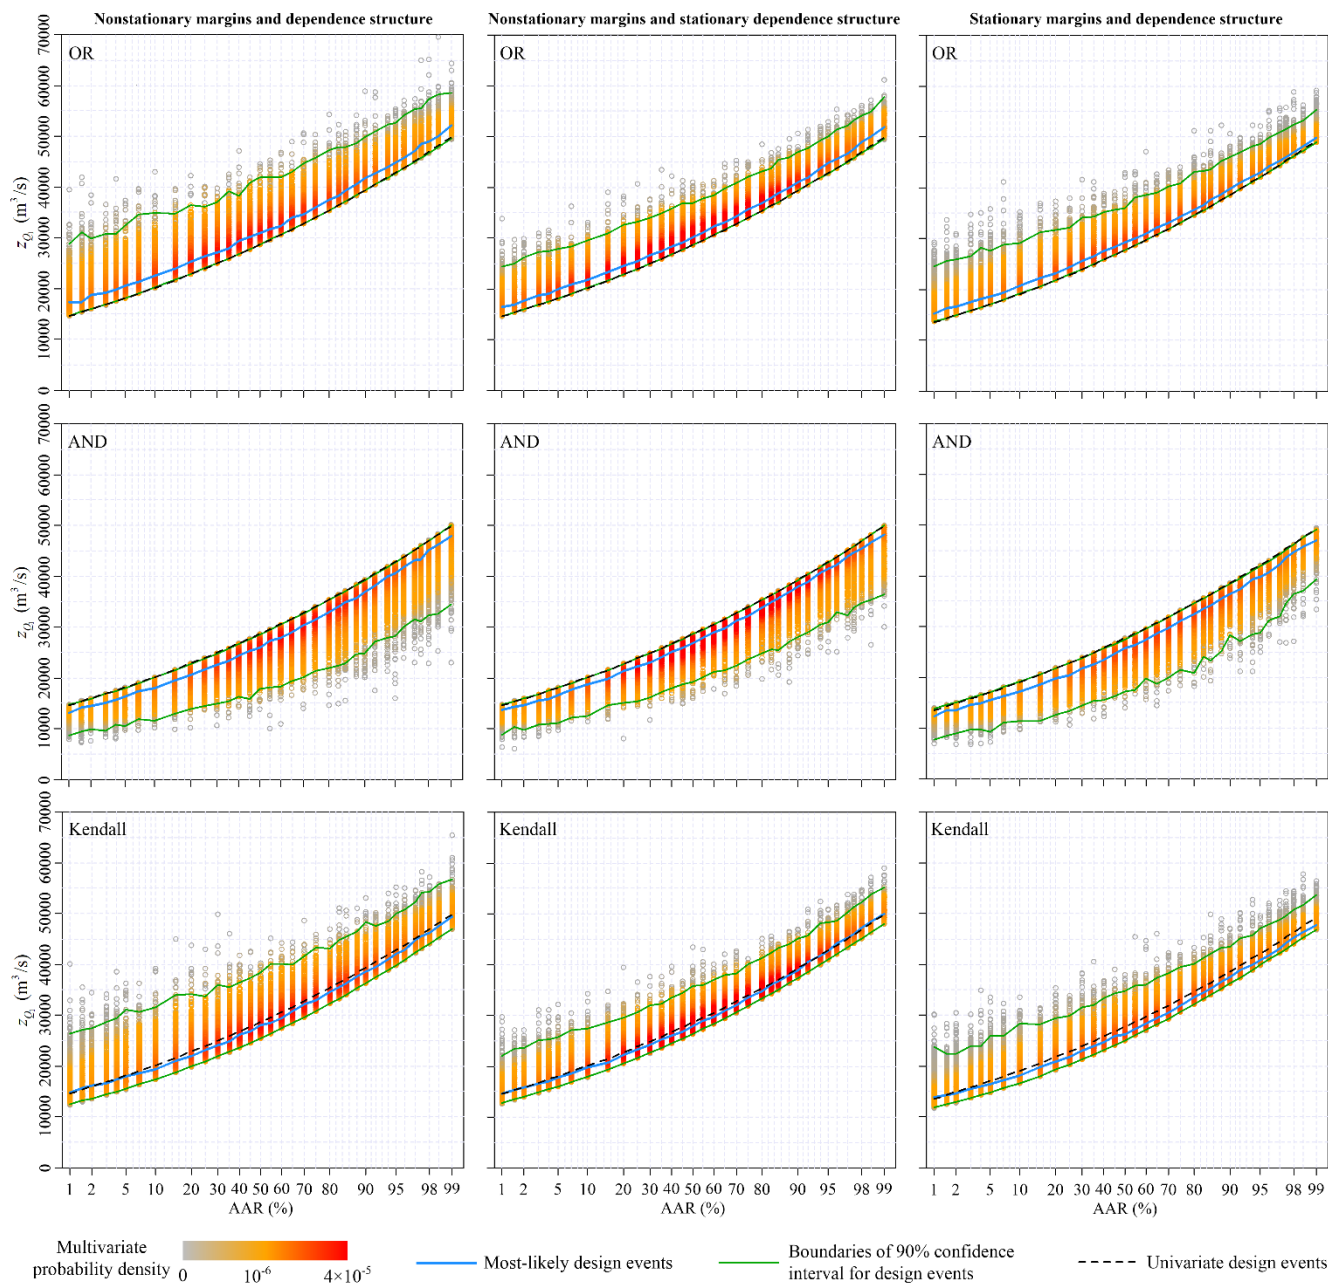

845 **Figure 7.** Design values of the annual maximum daily discharge for different average annual reliability (AAR) varying from 0.01 to 0.99 under three nonstationary conditions.

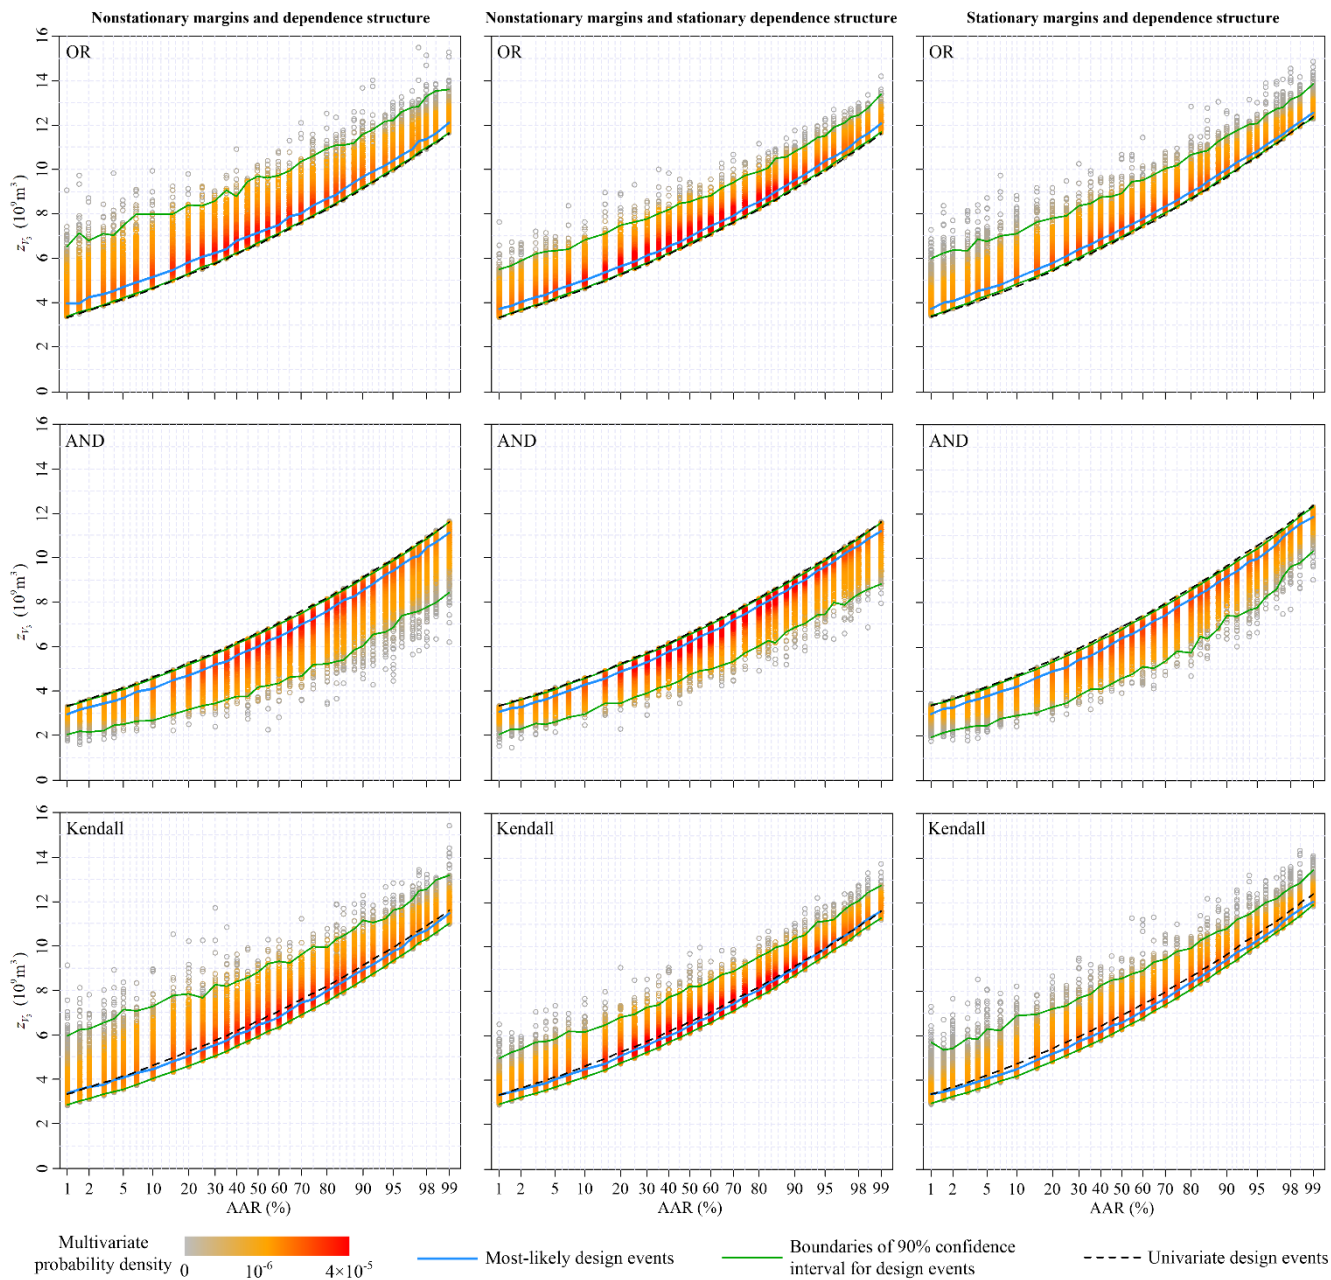


Figure 8. Design values of the 3-day flood volume for different average annual reliability (AAR) varying from 0.01 to 0.99 under three nonstationary conditions.



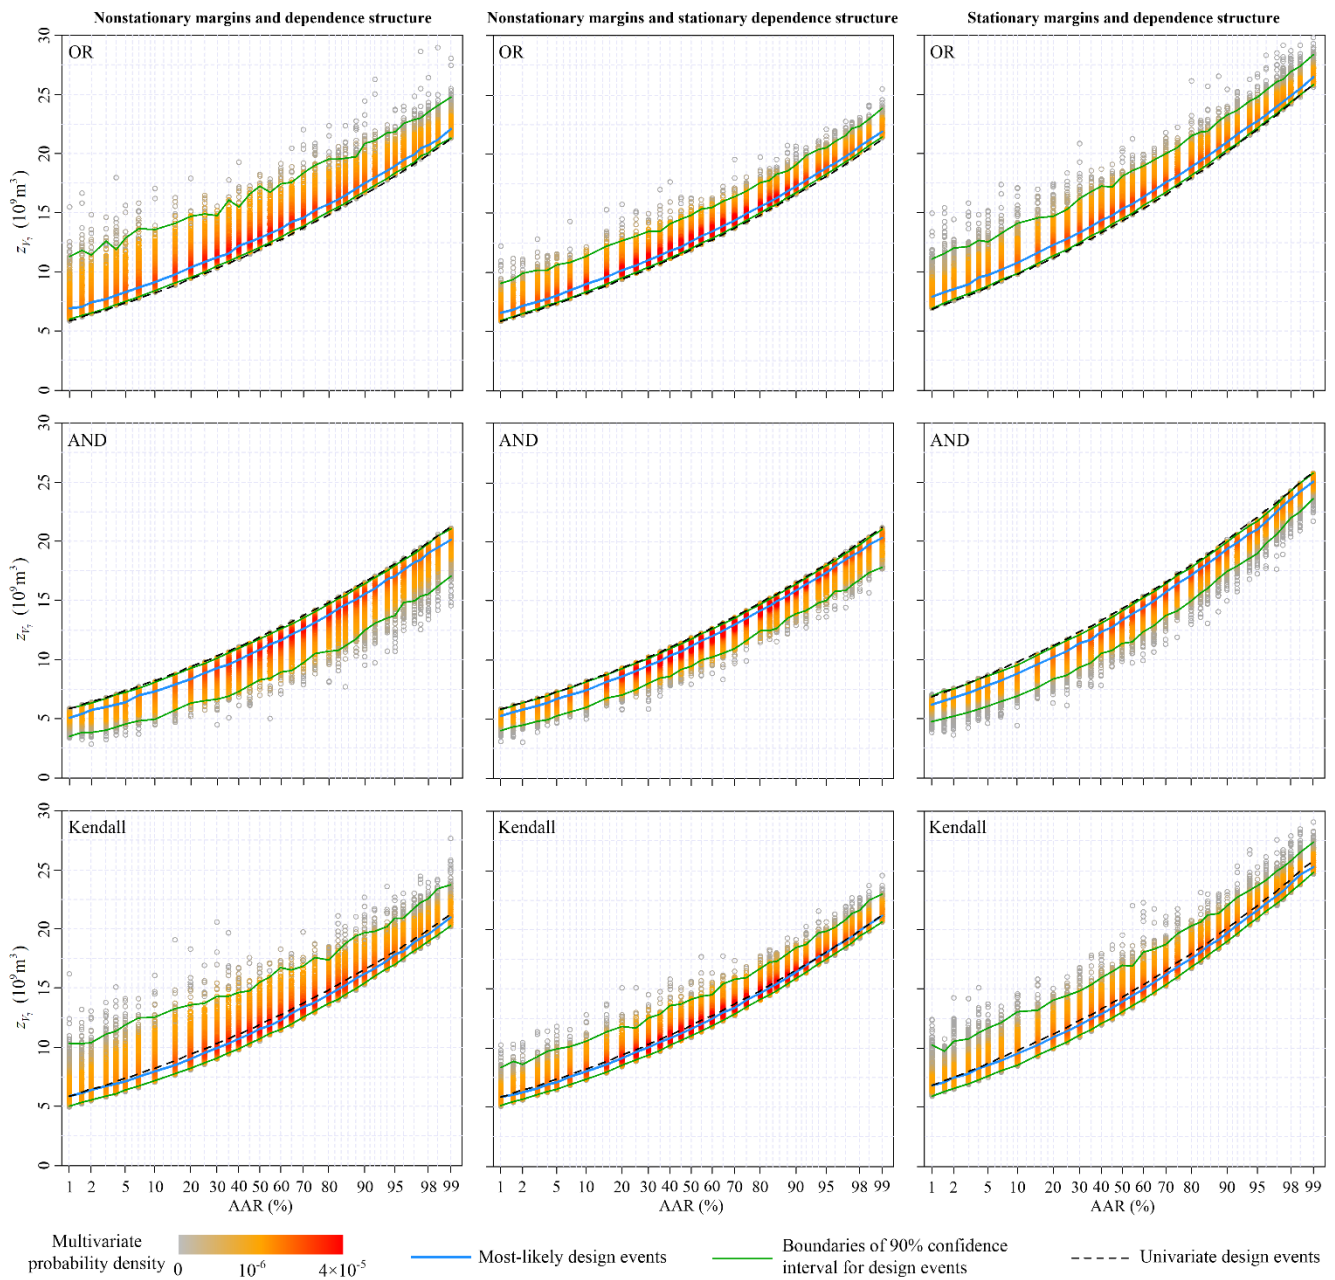


Figure 9. Design values of the 7-day flood volume for different average annual reliability (AAR) varying from 0.01 to 0.99 under three nonstationary conditions.

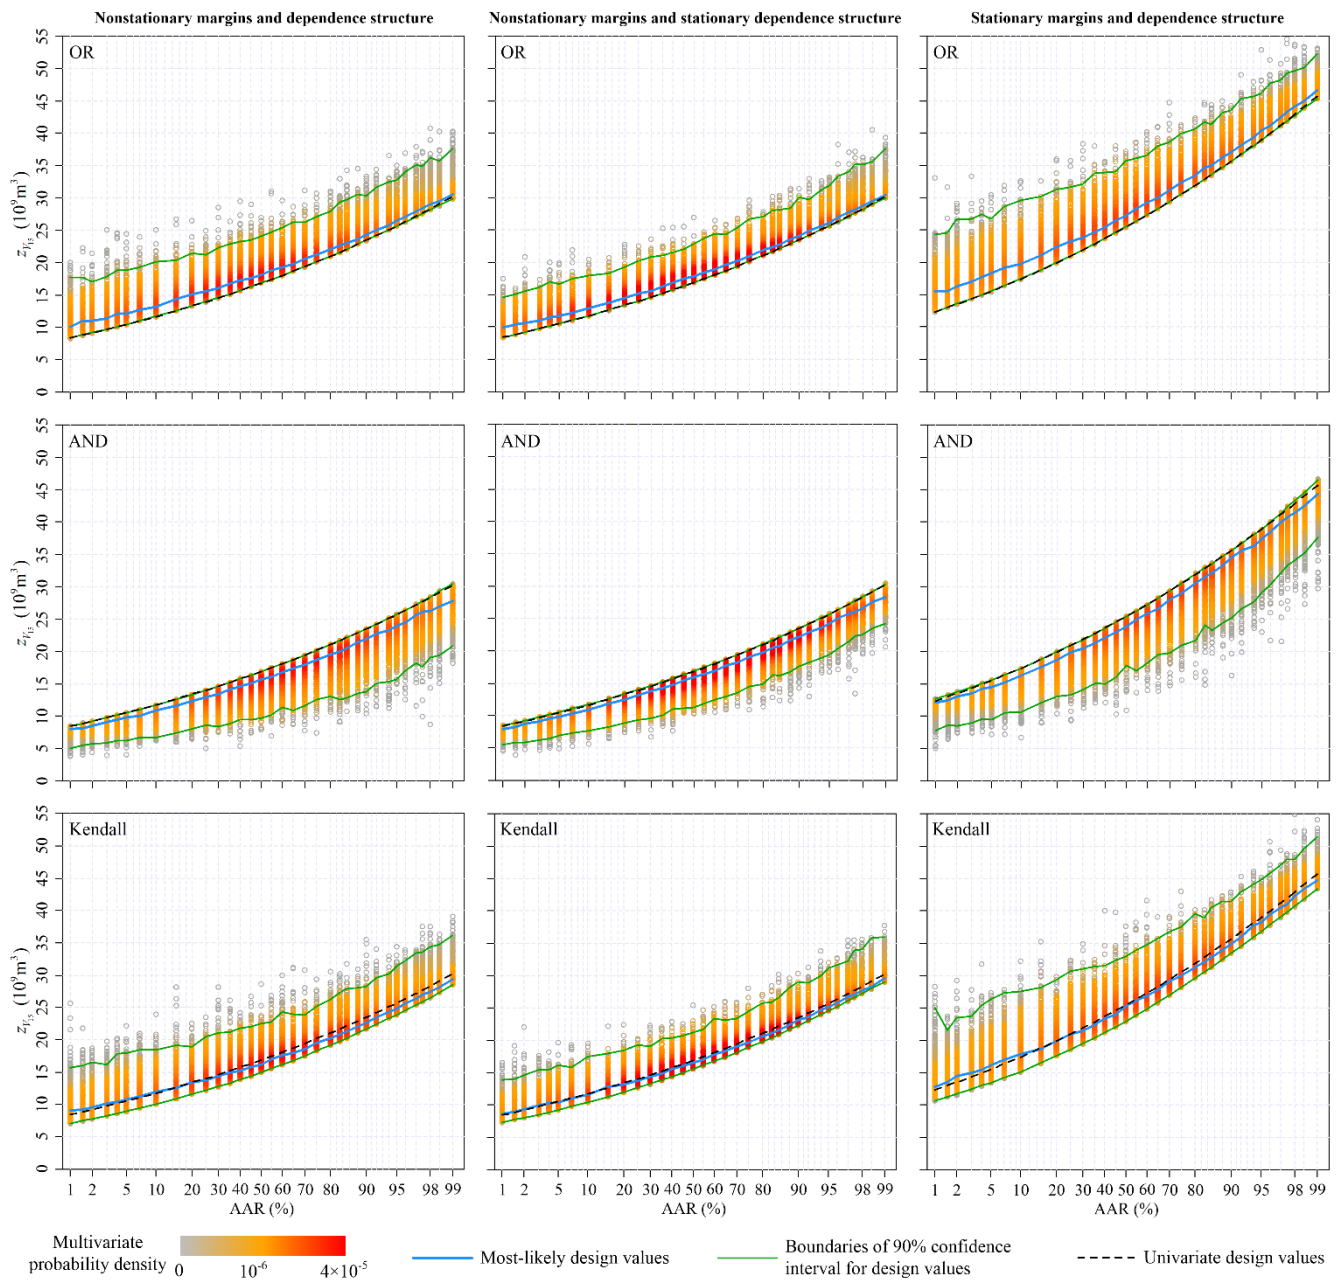

855

Figure 10. Design values of the 15-day flood volume for different average annual reliability (AAR) varying from 0.01 to 0.99 under three nonstationary conditions.

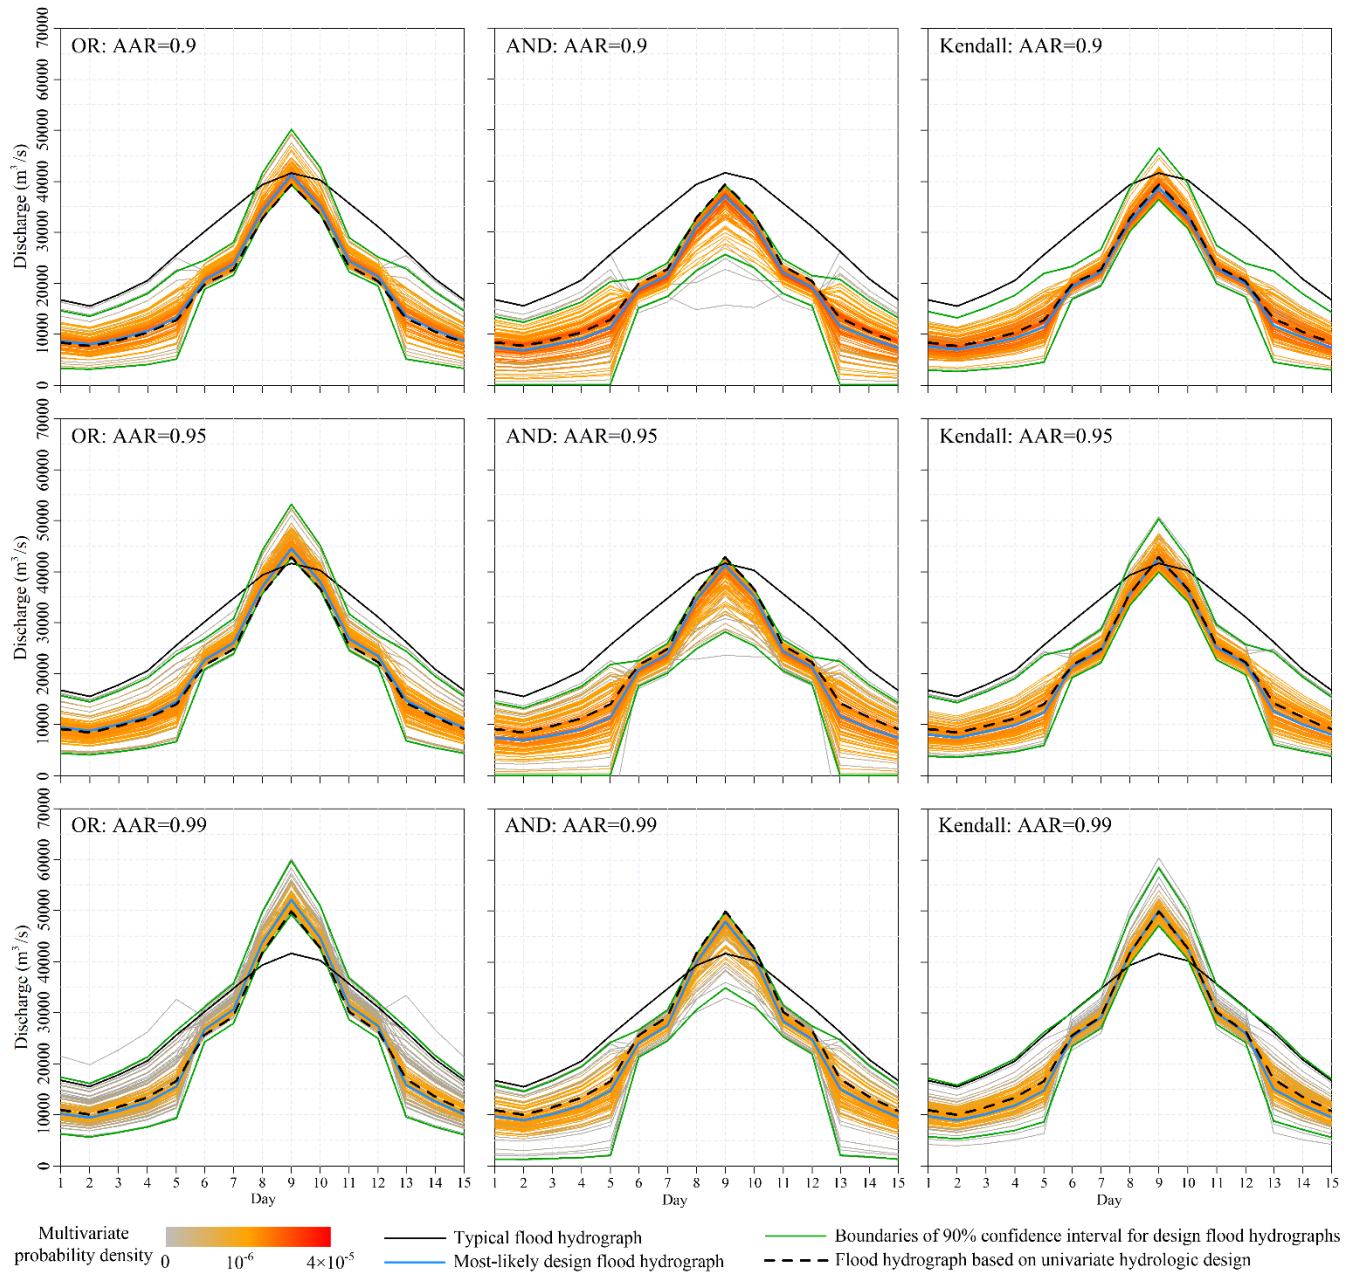

860

Figure 11. Design flood hydrographs associated with OR, AND and Kendall probabilities.