

Editor Comments:

Comments to the Author:

further elaborate the need for developing the method and theoretical base for pdf,

Dear Editor: Thank you for handling the review process of this manuscript. We appreciate your constructive comments and suggestions. The purpose for proposing the new distribution is elaborated in the introduction section. Particularly, the following sentence has been added in the introduction section:

(Lines 68-70) “The objective of this paper is to unify the SCS-CN method and VIC type of model by proposing a new distribution function for describing the soil water storage capacity.”

The following paragraph has been added in Section 5.2 to elaborate the theoretical base for the PDF:

(Lines 323-336) “This research started with the following research question: if the SCS-CN method is a saturation excess runoff generation model, what is the distribution function of soil water storage capacity? Wang and Tang (2014) showed that equation (37) is derived from the proportionality relationship of SCS-CN method, i.e., equation (38). From the comparison of boundary conditions between SCS-CN method and VIC type of model discussed in Section 4, it is observed that equation (37) does not include initial soil water storage, and the derived one from distribution function will include initial soil water storage (e.g., equation (34)). However, equation (37) can be viewed as the result of $S_0 = 0$; and W for equation (37) can be written as:

$$W = \int_0^P [1 - F(x)] dx \quad (39)$$

From equation (37), one obtains:

$$W = \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} \quad (40)$$

Substituting equation (40) into equation (39), one obtains:

$$\frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} = \int_0^P [1 - F(C)] dC \quad (41)$$

Equation (26) is obtained from equation (41).”

The manuscript has been revised and the point-by-point reply to reviewers' comments are listed below.

Reviewer #1:

Thank you for your constructive comments.

1. *Inconsistent numbers ('one' in line 11, but '1' in line 351; similarly for other numbers such as 'zero'.*

Thanks. "one" has been changed to "1"; and "zero" has been changed to "0".

2. *The motivation of this research is not strong, i.e., why the new distribution function is needed? Or what is the consequences of the mismatch of SCS-CN method and VIC type of model's boundary conditions. All those questions are not addressed in the introduction part. This is very important, since it can justify the value of this manuscript.*

The following sentence is added in the introduction section:

(Lines 68-70) "The objective of this paper is to unify the SCS-CN method and VIC type of model by proposing a new distribution function for describing the soil water storage capacity."

3. *With the proposed distribution, when storage index approaches infinity, soil wetting ratio approaches a certain value (≤ 1) depending on the initial storage. Will this be satisfied in application?*

The following sentence is added in Section 6:

(Lines 381-382) "(e.g., at the beginning of a rainfall event, runoff is generated at the initially saturated areas, such as wetlands [Gao et al., 2018])."

4. *The assumption used in deriving the probability density distribution is that the spatial distribution of precipitation is assumed to be uniform. This might need further explanation or justification.*

The following sentence is added in Section 5.2:

(Lines 276-278) "The rainfall in the catchment is assumed to be spatially uniform and the rainfall depth is denoted as P . If the spatial distribution of rainfall is not uniform, the method is applied to sub-catchments where the effect of spatial variability of rainfall is negligible."

Reviewer #2:

This is a very interesting paper and potentially significant contribution to the hydrology field, particularly semi-distributed rainfall-runoff modeling. The mathematics is quite solid. I do have a few minor comments/questions though.

Thank you for your constructive comments.

1. *It is not clear how the author reached the specific probability density function (PDF) (Eqn. 24) since it is not associated with any well-known functions. It'd be better if the author can clarify his reasoning process here.*

The following paragraph has been added in Section 5.2:

(Lines 323-336) “This research started with the following research question: if the SCS-CN method is a saturation excess runoff generation model, what is the distribution function of soil water storage capacity? Wang and Tang (2014) showed that equation (37) is derived from the proportionality relationship of SCS-CN method, i.e., equation (38). From the comparison of boundary conditions between SCS-CN method and VIC type of model discussed in Section 4, it is observed that equation (37) does not include initial soil water storage, and the derived one from distribution function will include initial soil water storage (e.g., equation (34)). However, equation (37) can be viewed as the result of $S_0 = 0$; and W for equation (37) can be written as:

$$W = \int_0^P [1 - F(x)] dx \quad (39)$$

From equation (37), one obtains:

$$W = \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} \quad (40)$$

Substituting equation (40) into equation (39), one obtains:

$$\frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} = \int_0^P [1 - F(C)] dC \quad (41)$$

Equation (26) is obtained from equation (41).”

2. *The comparison made between VIC and new distribution have different ranges of C values (Figure 3a and 3b, and Figure 4a and 4b). The C value goes from 0-200 for the new function and 0-50 for VIC.*

C_m has been changed to 200 in Figure 3b and Figure 4b.

3. *Though it can be seen from Figure 4 that for the new PDF the storage capacity curve has S-shape curve, for the same range of C value (0-50) the new distribution function seems to be no different from $\beta= 1.5$ and $C_m=50$.*

As shown in Figure 3a, when $a < 1$, the peak of $f(C)$ occurs at $C=0$; when $a > 1$, the peak of $f(C)$ occurs at $C > 0$. With the increase of a (when $C > 1$), the peak of $f(C)$ occurs at higher value of C . The following sentence has been added in Section 5.1:

(Lines 255-257) “The S-shape of CDF (Figure 4a) is more significant with higher value of a (e.g., $a=1.9$). For a smaller value of a , the difference between the new PDF and VIC-type of model becomes smaller.”

1 **A new probability density function for spatial distribution of soil water storage capacity**
2 **leads to SCS curve number method**

3 Dingbao Wang
4 Department of Civil, Environmental, and Construction Engineering, University of Central
5 Florida, Orlando, Florida, USA
6 Correspondence to: D. Wang, dingbao.wang@ucf.edu

7 **Abstract**

8 Following the Budyko framework, soil wetting ratio (the ratio between soil wetting and
9 precipitation) as a function of soil storage index (the ratio between soil wetting capacity and
10 precipitation) is derived from the SCS-CN method and the VIC type of model. For the SCS-CN
11 method, soil wetting ratio approaches ~~one~~1 when soil storage index approaches ~~∞~~infinity, due to
12 the limitation of the SCS-CN method in which the initial soil moisture condition is not explicitly
13 represented. However, for the VIC type of model, soil wetting ratio equals soil storage index
14 when soil storage index is lower than a certain value, due to the finite upper bound of the power
15 distribution function of storage capacity. In this paper, a new distribution function, supported on
16 a semi-infinite interval $x \in [0, \infty)$, is proposed for describing the spatial distribution of storage
17 capacity. From this new distribution function, an equation is derived for the relationship
18 between soil wetting ratio and storage index. In the derived equation, soil wetting ratio
19 approaches ~~zero~~0 as storage index approaches ~~zero~~0; when storage index tends to infinity, soil
20 wetting ratio approaches a certain value (≤ 1) depending on the initial storage. Moreover, the
21 derived equation leads to the exact SCS-CN method when initial water storage is ~~zero~~0.
22 Therefore, the new distribution function for soil water storage capacity explains the SCS-CN
23 method as a saturation excess runoff model and unifies the surface runoff modeling of SCS-CN
24 method and VIC type of model.

25 **Keywords:** SCS curve number method, VIC, Xinanjiang, saturation excess, distribution function,
26 soil water storage capacity, soil wetting

27 **1. Introduction**

28 The Soil Conservation Service Curve Number (SCS-CN) method [Mockus, 1972] has been
29 popularly used for direct runoff estimation in engineering communities. Even though the SCS-
30 CN method was obtained empirically [Ponce, 1996; Beven, 2011], it is often interpreted as an
31 infiltration excess runoff model [Bras, 1990; Mishra and Singh, 1999]. Yu [1998] showed that
32 partial area infiltration excess runoff generation on a statistical distribution of soil infiltration
33 characteristics provided similar runoff generation equation as the SCS-CN method. Recently,
34 Hooshyar and Wang [2016] derived an analytical solution for Richards' equation for ponded
35 infiltration into a soil column bounded by a water table; and they showed that the SCS-CN
36 method, as an infiltration excess model, is a special case of the derived general solution. The
37 SCS-CN method has also been interpreted as a saturation excess runoff model [Steenhuis *et al.*,
38 1995; Lyon *et al.*, 2004; Easton *et al.*, 2008]. During an interview, Mockus, who developed the
39 proportionality relationship of the SCS-CN method, stated that “saturation overland flow was the
40 most likely runoff mechanism to be simulated by the method” [Ponce, 1996]. Recently, Bartlett
41 *et al.* [2016a] developed a probabilistic framework, which provides a statistical justification of
42 the SCS-CN method and extends the saturation excess interpretation of the event-based runoff of
43 the method.

44 Since the 1970s, various saturation excess runoff models have been developed based on
45 the concept of probability distribution of soil storage capacity [Moore, 1985]. TOPMODEL is a
46 well-known saturation excess runoff model based on spatially distributed topography [Beven and
47 Kirkby, 1979; Sivapalan *et al.*, 1987]. To quantify the dynamic change of saturation area during

48 rainfall events, the spatial variability of soil moisture storage capacity is described by a
49 cumulative probability distribution function in the Xinanjiang model [Zhao, 1977; Zhao *et al.*,
50 1992] and the Variable Infiltration Capacity (VIC) model [Wood *et al.*, 1992; Liang *et al.*, 1994].
51 The distribution of storage capacity is described by a power function in these models, which
52 have been used for catchment scale runoff prediction and large scale land surface hydrologic
53 simulations. Bartlett *et al.* [2016b] unified TOPMODEL, the VIC type of model, and the SCS-
54 CN method by an event-based probabilistic storage framework, which includes a spatial
55 description of the runoff concept of “prethreshold” and “threshold-excess” runoff [Bartlett *et al.*,
56 2016a].

57 By applying the generalized proportionality hypothesis from the SCS-CN method to
58 mean annual water balance, Wang and Tang [2014] derived a one-parameter Budyko equation
59 [Budyko, 1974] for mean annual evaporation ratio (i.e., the ratio of evaporation to precipitation)
60 as a function of climate aridity index (i.e., the ratio of potential evaporation to precipitation). As
61 an analogy to the Budyko framework, the SCS-CN method and the VIC type of model at the
62 event scale can be represented by the relationship between soil wetting ratio, defined as the ratio
63 between soil wetting and precipitation, and soil storage index which is defined as the ratio
64 between soil wetting capacity and precipitation.

65 ~~In this paper, the functional forms for soil wetting ratio versus soil storage index are~~
66 ~~compared between the SCS-CN model and the VIC/Xinanjiang type of model. Based on the~~
67 ~~comparison, a new distribution function is proposed for describing the soil water storage capacity~~
68 ~~in the VIC type of model so that~~ The objective of this paper is to unify the SCS-CN method and
69 VIC type of model ~~are unified~~ by proposing a new distribution function for describing the soil
70 water storage capacity. In section 2, the SCS-CN method is presented in the form of Budyko-

71 type framework with two parameterization schemes. In section 3, the VIC type of model is
 72 presented in the form of Budyko-type framework. In section 4, the SCS-CN method is then
 73 compared with the VIC type of model from the perspectives of number of parameters and
 74 boundary conditions (i.e., the lower and upper bounds of soil storage index). In section 5, the
 75 proposed new distribution function is introduced and compared with the power distribution of
 76 VIC type of model; and a modified SCS-CN method considering initial storage explicitly is
 77 derived from the new distribution function. Conclusions are drawn in section 6.

78 **2. SCS curve number method**

79 In this section, the SCS-CN method is described in the form of surface runoff modeling and then
 80 is presented for infiltration modeling in the Budyko-type framework. The initial storage at the
 81 beginning of a time interval (e.g., rainfall event) is denoted by S_0 [mm], and the maximum value
 82 of average storage capacity over the catchment is denoted by S_b [mm]. The storage capacity for
 83 soil wetting for the time interval, S_p [mm], is computed by:

$$84 \quad S_p = S_b - S_0 \quad (1)$$

85 The total rainfall during the time interval is denoted by P [mm]. Before surface runoff is
 86 generated, a portion of rainfall is intercepted by vegetation and infiltrates into the soil. This
 87 portion of rainfall is called initial abstraction or initial soil wetting denoted by W_i [mm]. The
 88 remaining rainfall ($P - W_i$) is partitioned into runoff and continuing soil wetting. This
 89 competition is captured by the proportionality relationship in the SCS-CN method:

$$90 \quad \frac{W - W_i}{S_p - W_i} = \frac{Q}{P - W_i} \quad (2)$$

91 where W [mm] is the total soil wetting; $W - W_i$ is continuing wetting and $S_p - W_i$ is its
 92 potential value; Q [mm] is surface runoff; and $P - W_i$ is the available water and interpreted as

93 the potential value of Q . Since rainfall is partitioned into total soil wetting and surface runoff,
 94 i.e., $P = W + Q$, surface runoff is computed by substituting $W = P - Q$ into equation (2):

$$95 \quad Q = \frac{(P - W_i)^2}{P + S_p - 2W_i} \quad (3)$$

96 This equation is used for computing direct runoff in the SCS-CN method.

97 The SCS-CN method can also be represented in terms of soil wetting ratio ($\frac{W}{P}$).

98 Substituting equation (3) into $W = P - Q$ and dividing P on both sides, the soil wetting ratio
 99 equation is obtained:

$$100 \quad \frac{W}{P} = \frac{\frac{S_p}{P} - \frac{W_i^2}{P^2}}{1 + \frac{S_p}{P} - 2\frac{W_i}{P}} \quad (4)$$

101 Climate aridity index is defined as the ratio between potential evaporation and precipitation. In
 102 climate aridity index, both available water supply and water demand are determined by climate.

$$103 \quad \Phi_{sc} = \frac{S_p}{P} \quad (5)$$

104 A similar dimensionless parameter for the ratio between the maximum soil storage capacity and
 105 mean rainfall depth of rainfall events was defined in *Porporato et al.* [2004]. In soil storage
 106 index, water demand is determined by soil and available water supply is determined by climate.
 107 Substituting equation (5) into equation (4), the soil wetting equation for the SCS-CN method is
 108 obtained:

$$109 \quad \frac{W}{P} = \frac{\Phi_{sc} - \frac{W_i^2}{P^2}}{1 + \Phi_{sc} - 2\frac{W_i}{P}} \quad (6)$$

110 Two potential schemes for parameterizing the initial wetting in equation (6) are discussed in the
 111 following sections.

112 **2.1. Parameterization scheme 1: ratio between initial wetting and storage capacity**

113 The initial wetting is usually parameterized as the ratio between initial wetting and storage
 114 capacity in the SCS-CN method. The potential for continuing wetting is called potential
 115 maximum retention and is denoted by $S_m = S_p - W_i$. S_m is computed as a function of curve
 116 number which is dependent on land use/land cover and soil permeability. The ratio between W_i
 117 and S_m in the SCS curve number method is denoted by $\lambda = \frac{W_i}{S_p - W_i}$, and then the ratio between
 118 initial soil wetting and storage capacity is computed by:

$$119 \quad \frac{W_i}{S_p} = \frac{\lambda}{1+\lambda} \quad (7)$$

120 The value of λ varies in the range of $0 \leq \lambda \leq 0.3$, and a value of 0.2 is usually used [*Ponce and*
 121 *Hawkins, 1996*]. Substituting equation (7) into equation (6) leads to:

$$122 \quad \frac{W}{P} = \frac{1 - \left(\frac{\lambda}{1+\lambda}\right)^2 \Phi_{sc}}{1 - \frac{2\lambda}{1+\lambda} + \Phi_{sc}^{-1}} \quad (8)$$

123 Equation (8) is plotted in Figure 1 for $\lambda = 0.1$ and 0.3. As we can see, the range of Φ_{sc} is
 124 dependent on the parameter λ . Since $W_i \leq P$, Φ_{sc} is in the range of $\left[0, 1 + \frac{1}{\lambda}\right]$. Equation (8)
 125 satisfies the following boundary conditions: $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$; and $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \frac{\lambda+1}{\lambda}$. When
 126 $\lambda \rightarrow 0$, equation (8) becomes:

$$127 \quad \frac{W}{P} = \frac{1}{1 + \Phi_{sc}^{-1}} \quad (9)$$

128 Equation (9) is the lower bound for $\frac{W}{P}$ based on this parameterization scheme.

129 **2.2. Parameterization scheme 2: ratio between initial wetting and total wetting**

130 In order to avoid the situation that the range of Φ_{sc} is dependent on the parameter λ , we can
 131 use the following parameterization scheme [*Chen et al., 2013; Tang and Wang, 2017*]:

$$132 \quad \varepsilon = \frac{W_i}{W} \quad (10)$$

133 Substituting equation (10) into equation (6), we can obtain the following equation:

134
$$\frac{W}{P} = \frac{\Phi_{sc} - \varepsilon^2 \frac{W^2}{P^2}}{1 + \Phi_{sc} - 2\varepsilon \frac{W}{P}} \quad (11)$$

135 We can solve for $\frac{W}{P}$ from equation (11):

136
$$\frac{W}{P} = \frac{1 + \Phi_{sc} - \sqrt{(1 + \Phi_{sc})^2 - 4\varepsilon(2 - \varepsilon)\Phi_{sc}}}{2\varepsilon(2 - \varepsilon)} \quad (12)$$

137 Equation (12) has the same functional form as the derived Budyko equation for long-term
 138 evaporation ratio [Wang and Tang, 2014; Wang et al., 2015]. Equation (12) satisfies the
 139 following boundary conditions: $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$; and $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$. Based on equation
 140 (10), the range of ε is $[0, 1]$, and $\varepsilon = 1$ corresponds to the upper bound (Figure 1). Equation (12)
 141 becomes equation (9) as $\varepsilon \rightarrow 0$, and it is the lower bound. Figure 1 plots equation (12) for $\varepsilon =$
 142 0.1 and 0.3. Due to the dependence of the range of Φ_{sc} on the parameter λ in the first
 143 parameterization scheme, the second parameterization scheme is focused on in the following
 144 sections.

145 In the SCS-CN method, the soil wetting ratio is a function of soil storage index with a
 146 parameter for describing initial wetting. The average wetting capacity at the catchment scale is
 147 used for computing soil storage index; but the spatial variability of wetting capacity is not
 148 represented in the SCS-CN method.

149 3. Saturation excess runoff model

150 The spatial variability of soil water storage capacity is explicitly represented in the saturation
 151 excess runoff models such as VIC and Xinanjiang. In these models, the spatial variation of
 152 point-scale storage capacity (C) is represented by a power function:

153
$$F(C) = 1 - \left(1 - \frac{C}{C_m}\right)^\beta \quad (13)$$

154 where $F(C)$ is the cumulative probability, i.e., the fraction of catchment area for which the
 155 storage capacity is less than C [mm]; and C_m [mm] is the maximum value of point-scale storage
 156 capacity over the catchment. The water storage capacity includes vegetation interception,
 157 surface retention, and soil moisture capacity; β is the shape parameter of storage capacity
 158 distribution and is usually assumed to be a positive number. β ranges from 0.01 to 5.0 as
 159 suggested by *Wood et al.* [1992]. The storage capacity distribution curve is concave down for
 160 $0 < \beta < 1$ and concave up for $\beta > 1$. The average value of storage capacity over the catchment
 161 is equivalent to S_b in the SCS-CN method, and it is obtained by integrating the exceedance
 162 probability of storage capacity $S_b = \int_0^{C_m} (1 - F(x)) dx$:

$$163 \quad S_b = \frac{C_m}{\beta+1} \quad (14)$$

164 Similarly, for a given C , the catchment-scale storage S [mm] can be computed [*Moore*, 1985]:

$$165 \quad S = S_b \left[1 - \left(1 - \frac{C}{C_m} \right)^{\beta+1} \right] \quad (15)$$

166 To derive wetting ratio as a function of soil storage index, the initial storage at the
 167 catchment scale is parameterized by the degree of saturation:

$$168 \quad \psi = \frac{S_0}{S_b} \quad (16)$$

169 Recalling equation (1) and the definition of soil storage index (i.e., equation (5)), we obtain:

$$170 \quad \frac{S_b}{P} = \frac{\Phi_{sc}}{1-\psi} \quad (17)$$

171 The value of C corresponding to the initial storage S_0 is denoted as C_0 , and $S_0 = S_b \left[1 - \right.$
 172 $\left. \left(1 - \frac{C_0}{C_m} \right)^{\beta+1} \right]$ is obtained by substituting S_0 and C_0 into equation (15). When $P + C_0 \geq C_m$,

173 each point within the catchment is saturated and soil wetting reaches its maximum value, i.e.,

174 $W = S_p$. Substituting $C_0 = C_m - C_m \left(1 - \frac{S_0}{S_b}\right)^{\frac{1}{\beta+1}}$ into $P + C_0 \geq C_m$, we obtain:

$$175 \quad \Phi_{sc} \leq b \text{ where } b = (\beta + 1)^{-1}(1 - \psi)^{\frac{\beta}{\beta+1}} \quad (18)$$

176 Therefore, this condition is equivalent to:

$$177 \quad \frac{W}{P} = \Phi_{sc} \text{ when } \Phi_{sc} \leq b \quad (19)$$

178 Next, we will derive $\frac{W}{P}$ for the condition of $\Phi_{sc} > b$. The storage at the end of the
179 modeling period (e.g., rainfall-runoff event) is denoted as S_1 , which is computed by:

$$180 \quad S_1 = S_b \left[1 - \left(1 - \frac{P+C_0}{C_m} \right)^{\beta+1} \right] \quad (20)$$

181 Since $W = S_1 - S_0$, wetting is computed by:

$$182 \quad W = S_b \left[1 - \left(1 - \frac{P+C_0}{C_m} \right)^{\beta+1} \right] - S_0 \quad (21)$$

183 From equation (21), we obtain (see Appendix A for details):

$$184 \quad \frac{W}{P} = \Phi_{sc} \left[1 - \left(1 - b\Phi_{sc}^{-1} \right)^{\beta+1} \right] \text{ when } \Phi_{sc} > b \quad (22)$$

185 The limit of equation (22) for $\Phi_{sc} \rightarrow \infty$ can be obtained (see Appendix B for details):

$$186 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = (1 - \psi)^{\frac{\beta}{\beta+1}} \quad (23)$$

187 Equations (19) and (22) provide $\frac{W}{P}$ as a function of Φ_{sc} with two parameters (ψ and β). Figure 2

188 plots equations (19) and (22) for $\psi = 0$ and 0.5 when $\beta = 0.2$ and 2. As we can see, $\frac{W}{P}$ decreases

189 as β increases for given values of ψ and Φ_{sc} ; and $\frac{W}{P}$ decreases as ψ increases for given values of

190 β and Φ_{sc} , implicating that soil wetting ratio decreases with the degree of initial saturation under

191 a given soil storage index.

192 **4. Comparison between SCS-CN model and VIC type of model**

193 The SCS-CN model with the parameterization of ratio between initial wetting and total wetting is
 194 compared with the VIC type of saturation excess runoff model. In sections 2 and 3, we derived
 195 $\frac{W}{P}$ as a function of Φ_{sc} based on the SCS-CN method and the VIC type of model, which uses a
 196 power function to describe the spatial distribution of storage capacity. The SCS-CN method is a
 197 function of storage capacity S_p ; but the VIC type of model is a function of storage capacity S_p
 198 and the degree of initial saturation $\frac{S_0}{S_b}$. As a result, the function of $\frac{W}{P} \sim \frac{S_p}{P}$ for the SCS-CN method
 199 has only one parameter (ε), but it has two parameters (β and ψ) for the VIC type of model.

200 Table 1 shows the boundary conditions for the relationships between $\frac{W}{P}$ and Φ_{sc} from the
 201 SCS-CN method and the VIC type of model. The lower boundary of the SCS-CN method with
 202 parameter ε is $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$. However, for the VIC type of model, $\frac{W}{P} = \Phi_{sc}$ when $\Phi_{sc} \leq b$.
 203 For the SCS-CN method, W reaches its maximum (S_p) when rainfall reaches infinity; while for
 204 the VIC type of model, W reaches its maximum value (S_p) when rainfall reaches a finite number
 205 ($C_m - C_0$). In other words, for the SCS-CN method, the entire catchment becomes saturated
 206 when rainfall reaches infinity; while for the VIC type model, the entire catchment becomes
 207 saturated when rainfall reaches a finite number.

208 As shown in Table 1, the upper boundary of the SCS-CN method (with parameter ε) is 1.
 209 However, for the VIC type of model, the upper boundary is $(1 - \psi)^{\frac{\beta}{\beta+1}}$ instead of 1. This is due
 210 to the effect of initial storage in the VIC type of model. When initial storage is ~~0~~ (i.e., $\psi =$
 211 0), the wetting ratio $\frac{W}{P}$ for the VIC type of model has the same upper boundary condition as the
 212 SCS-CN method.

213 5. Unification of SCS-CN method and VIC type of model

214 Based on the comparison between the SCS-CN method and VIC type of model, a new
215 distribution function is proposed in this section for describing the spatial distribution of soil
216 water storage capacity, which unifies the SCS-CN method and VIC type of model. As discussed
217 in section 4, the upper boundary condition of the SCS-CN model (i.e., $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$) does
218 not depend on the initial storage. This upper boundary condition needs to be modified by
219 including the effect of initial storage so that the limit of $\frac{W}{P}$ as $\Phi_{sc} \rightarrow \infty$ is dependent on the
220 degree of initial saturation like the VIC type of model. However, the lower boundary condition
221 of the VIC model needs to be modified so that the lower boundary condition follows that $\frac{W}{P} \rightarrow 0$
222 as $\Phi_{sc} \rightarrow 0$ like the SCS-CN method. Through these modifications, the SCS-CN method and the
223 VIC type of saturation excess runoff model can be unified from the functional perspective of soil
224 wetting ratio.

225 Based on the comparison one may have the following questions: 1) Can the SCS-CN
226 method be derived from the VIC type of model by setting initial storage to ~~zero~~0? 2) If yes, what
227 is the distribution function for soil water storage capacity? Once we answer these questions, a
228 modified SCS-CN method considering initial storage explicitly can be derived as a saturation
229 excess runoff model based on a distribution function of water storage capacity, and it unifies the
230 SCS-CN method and VIC type of model. In this section, a new distribution function is proposed
231 for describing the spatial variability of soil water storage capacity, from which the SCS-CN
232 method is derived as a VIC type of model.

233 **5.1. A new distribution function**

234 The probability density function (PDF) of the new distribution for describing the spatial
235 distribution of water storage capacity is represented by:

236
$$f(C) = \frac{(2-a)\mu^2}{[(C+\mu)^2 - 2a\mu C]^{3/2}} \quad (24)$$

237 where C is point-scale water storage capacity and supported on a positive semi-infinite interval
 238 ($C \geq 0$); a is the shape parameter and its range is $0 < a < 2$; and μ is the mean of the
 239 distribution (i.e., the scale parameter). Figure 3a plots the PDFs for five sets of shape and scale
 240 parameters. When $a \leq 1$, the PDF monotonically decreases with the increase of C , i.e., the peak
 241 of PDF occurs at $C = 0$; while when $a > 1$, the peak of PDF occurs at $C > 0$ and the location of
 242 the peak depends on the values of a and μ . For comparison, Figure 3b plots the PDF for VIC
 243 model:

244
$$f(C) = \frac{\beta}{C_m} \left(1 - \frac{C}{C_m}\right)^{\beta-1} \quad (25)$$

245 As shown by the solid black curve in Figure 3b, when $0 < \beta < 1$, $f(C)$ approaches infinity as
 246 $C \rightarrow C_m$. It is a uniform distribution when $\beta = 1$. The peak of PDF occurs at $C = 0$ when $\beta >$
 247 1. Therefore, the peak of PDF for VIC model occurs at $C = 0$ or C_m .

248 The cumulative distribution function (CDF) corresponding to the proposed PDF is
 249 obtained by integrating equation (24):

250
$$F(C) = 1 - \frac{1}{a} + \frac{C+(1-a)\mu}{a\sqrt{(C+\mu)^2 - 2a\mu C}} \quad (26)$$

251 Figure 4a plots the CDFs corresponding to the PDFs in Figure 3a. For comparison, Figure 4b
 252 plots the CDFs corresponding to the PDFs in Figure 3b. The storage capacity distribution curve
 253 for the proposed distribution is concave up for $a \leq 1$ and S-shape for $a > 1$ (Figure 4a); while
 254 the storage capacity distribution curve for VIC model is concave up for $\beta > 1$ and concave down
 255 for $0 < \beta < 1$ (Figure 4b). The S-shape of CDF (Figure 4a) is more significant with higher
 256 value of a (e.g., $a=1.9$). For a smaller value of a , the difference between the new PDF and VIC-
 257 type of model becomes smaller. Therefore, the proposed distribution can fit the S-shape of

258 cumulative distribution for storage capacity which is observed from soil data [Huang *et al.*, 2003],
 259 but the power distribution of VIC type of model is not able to fit the S-shape of CDF.

260 **5.2. Deriving SCS-CN method from the proposed distribution function**

261 The soil wetting and surface runoff can be computed when equation (26) is used to describe the
 262 spatial distribution of soil water storage capacity in a catchment. The average value of storage
 263 capacity over the catchment is the mean of the distribution:

$$264 \quad \mu = S_b \quad (27)$$

265 For a given C , the catchment-scale storage S can be computed by $S = \int_0^C [1 - F(x)]dx$ [Moore,
 266 1985]. From equation (26), we obtain:

$$267 \quad S = \frac{C+S_b-\sqrt{(C+S_b)^2-2aS_bC}}{a} \quad (28)$$

268 For a rainfall-runoff event, the average initial storage at the catchment scale is denoted as S_0 and
 269 the corresponding value of C is denoted as C_0 . Substituting S_0 and C_0 into equation (28), we
 270 obtain:

$$271 \quad S_0 = \frac{C_0+S_b-\sqrt{(C_0+S_b)^2-2aS_bC_0}}{a} \quad (29)$$

272 Dividing S_b in both-hand sides of equation (29), we obtain:

$$273 \quad m = \frac{\psi(2-a\psi)}{2(1-\psi)} \quad (30)$$

274 where $\psi = \frac{S_0}{S_b}$ is defined in equation (16), and m is defined as:

$$275 \quad m = \frac{C_0}{S_b} \quad (31)$$

276 The rainfall in the catchment is assumed to be spatially uniform and the rainfall depth is
 277 denoted as P . If the spatial distribution of rainfall is not uniform, the method is applied to sub-

278 catchments where the effect of spatial variability of rainfall is negligible. The average storage at
 279 the catchment scale after infiltration is computed by substituting $C = C_0 + P$ into equation (28):

$$280 \quad S_1 = \frac{C_0 + P + S_b - \sqrt{(C_0 + P + S_b)^2 - 2aS_b(C_0 + P)}}{a} \quad (32)$$

281 The soil wetting is computed as the difference between S_1 and S_0 :

$$282 \quad W = \frac{P + \sqrt{(C_0 + S_b)^2 - 2aS_bC_0} - \sqrt{(C_0 + P + S_b)^2 - 2aS_b(C_0 + P)}}{a} \quad (33)$$

283 Dividing P on the both-hand sides of equation (33) and substituting equation (31), we obtain:

$$284 \quad \frac{W}{P} = \frac{1 + \frac{S_b}{P}\sqrt{(m+1)^2 - 2am} - \sqrt{\left(1 + (m+1)\frac{S_b}{P}\right)^2 - 2am\left(\frac{S_b}{P}\right)^2 - 2a\frac{S_b}{P}}}{a} \quad (34)$$

285 Substituting equation (17) into equation (34), we obtain:

$$286 \quad \frac{W}{P} = \frac{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi}\Phi_{sc} - \sqrt{\left(1 + \frac{m+1}{1-\psi}\Phi_{sc}\right)^2 - 2am\left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi}\Phi_{sc}}}{a} \quad (35)$$

287 Figure 5 plots equation (35) for $\psi = 0, 0.4, \text{ and } 0.6$ when $a = 0.6$ and 1.8 . As we can
 288 see, $\frac{W}{P}$ increases with a for given values of ψ and Φ_{sc} ; and $\frac{W}{P}$ decreases with ψ for given values
 289 of a and Φ_{sc} , which is consistent with the VIC model and implicates that soil wetting ratio
 290 decreases with the degree of initial saturation under a storage index. As shown in Figure 5,
 291 equation (35) satisfies the lower boundary of SCS-CN method and the upper boundary of the
 292 VIC model. Specifically, equation (35) satisfies the following boundary conditions (see
 293 Appendix C for details) shown in Table 1:

$$294 \quad \lim_{\Phi_{sc} \rightarrow 0} \frac{W}{P} = 0 \quad (36-1)$$

$$295 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{\sqrt{(m+1)^2 - 2am + a - m - 1}}{a\sqrt{(m+1)^2 - 2am}} \quad (36-2)$$

296 When the effect of initial storage is negligible (i.e., $\psi = 0$), $\frac{S_b}{P} = \Phi_{sc}$ from equation (17)
 297 and $m = 0$ from equation (30). Then, equation (35) becomes:

298
$$\frac{W}{P} = \frac{1 + \frac{S_b}{P} - \sqrt{\left(1 + \frac{S_b}{P}\right)^2 - 2a\frac{S_b}{P}}}{a} \quad (37)$$

299 Equation (37) is same as equation (12) with $a = 2\varepsilon(2 - \varepsilon)$. We can obtain the following
 300 equation from equation (37) (see Appendix D for detailed derivation):

301
$$\frac{Q}{P - \varepsilon W} = \frac{W - \varepsilon W}{S_b - \varepsilon W} \quad (38)$$

302 where εW is defined as initial abstraction (W_i) in the SCS-CN method. Since $S_b = S_p$ when
 303 $\psi = 0$, equation (38) is same as equation (2), i.e., the proportionality relationship of SCS-CN
 304 method.

305 Equation (35) is derived from the VIC type model by using equation (26) to describe the
 306 spatial distribution of soil water storage capacity. From this perspective, equation (35) is a
 307 saturation excess runoff model. Since equation (35) becomes the SCS-CN method when initial
 308 storage is negligible, equation (35) is the modified SCS-CN method which considers the effect of
 309 initial storage on runoff generation explicitly. Therefore, the new distribution function
 310 represented by equation (26) unifies the SCS-CN method and VIC type of model.

311 *Bartlett et al.* [2016a] developed an event-based probabilistic storage framework
 312 including a spatial description of “prethreshold” and “threshold-excess” runoff; and the
 313 framework has been utilized for unifying TOPMODEL, VIC and SCS-CN [*Bartlett et al.*, 2016b].
 314 The extended SCS-CN method (SCS-CN_x) from the probabilistic storage framework is derived
 315 given the following assumptions: 1) the spatial distribution of rainfall is exponential; 2) the
 316 spatial distribution of soil moisture deficit is uniform; and 3) the spatial distribution of storage
 317 capacity is exponential. When “prethreshold” runoff is ~~zero~~0 (i.e., there is only threshold-excess
 318 or saturation excess runoff), the SCS-CN_x method leads to the SCS-CN method without the
 319 initial abstraction term (i.e., there is no εW term in equation (38)). In this paper, the new

320 probability distribution function is used for storage capacity in the VIC model in which the
 321 spatial distribution of precipitation is assumed to be uniform. The obtained equation for
 322 saturation excess runoff leads to the exact SCS-CN method as shown in equation (38).

323 This research started with the following research question: if the SCS-CN method is a
 324 saturation excess runoff generation model, what is the distribution function of soil water storage
 325 capacity? Wang and Tang (2014) showed that equation (37) is derived from the proportionality
 326 relationship of SCS-CN method, i.e., equation (38). From the comparison of boundary
 327 conditions between SCS-CN method and VIC type of model discussed in Section 4, it is
 328 observed that equation (37) does not include initial soil water storage, and the derived one from
 329 distribution function will include initial soil water storage (e.g., equation (34)). However,
 330 equation (37) can be viewed as the result of $S_0 = 0$; and W for equation (37) can be written as:

$$331 \quad W = \int_0^P [1 - F(x)] dx \quad (39)$$

332 From equation (37), one obtains:

$$333 \quad W = \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} \quad (40)$$

334 Substituting equation (40) into equation (39), one obtains:

$$335 \quad \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} = \int_0^P [1 - F(C)] dC \quad (41)$$

336 Equation (26) is obtained from equation (41).

337 **5.3. Surface runoff of unified SCS-CN and VIC model**

338 From the unified SCS-CN and VIC model (i.e., equation (34)), surface runoff (Q) can be
 339 computed as:

$$340 \quad Q = \frac{(a-1)P-S_b\sqrt{(m+1)^2-2am}+\sqrt{[P+(m+1)S_b]^2-2amS_b^2-2aS_bP}}{a} \quad (3942)$$

341 The parameter m is computed by equation (30) as a function of ψ and a . Equation (4239)
 342 represents surface runoff as a function of precipitation (P), average soil water storage capacity
 343 (S_b), shape parameter of storage capacity distribution (a), and initial soil moisture (ψ). Figure 6
 344 plots equation (3942) under different values of P , S_b , a , and ψ . Figure 6a shows the effects of
 345 S_b and ψ on rainfall-runoff relationship with given shape parameter of $a=1.9$. The solid lines
 346 show the rainfall-runoff relations with zero initial storage ($\psi=0$); and the dashed lines show the
 347 rainfall-runoff relations with $\psi=0.2$. Given the same amount of precipitation and storage
 348 capacity, wetter soil ($\psi=0.2$) generates more surface runoff than drier soil ($\psi=0$); and the
 349 difference of runoff is higher for watersheds with larger average storage capacity. Figure 6b
 350 shows the effects of S_b and a on rainfall-runoff relationship with given initial soil moisture
 351 ($\psi=0.2$). The solid lines show the rainfall-runoff relations for $a=1.9$; and the dashed lines show
 352 the rainfall-runoff relations for $a=1.2$. As we can see, the shape parameter affects the runoff
 353 generation significantly for watersheds with larger average storage capacity.

354 In the SCS-CN method, surface runoff is computed as $Q = \frac{(P-0.2S_b)^2}{P+0.8S_b}$. The effect of
 355 initial soil moisture on runoff is considered implicitly by varying the curve number for normal,
 356 dry and wet conditions depending on the antecedent moisture condition. In the unified SCS-CN
 357 model shown in equation (3942), the effect of initial soil moisture is explicitly included through
 358 ψ , which is the ratio between average initial water storage and average storage capacity. In the
 359 SCS-CN method, the value of initial abstraction W_i is parameterized as a function of average
 360 storage capacity, i.e., $W_i = 0.2S_b$. In the unified SCS-CN model shown in equation (3942), W_i is
 361 dependent on the shape parameter a . Therefore, the unified SCS-CN model extends the original
 362 SCS-CN method for including the effect of initial soil moisture explicitly and estimating the
 363 parameter for initial abstraction.

364 **6. Conclusions**

365 In this paper, the SCS-CN method and the saturation excess runoff models based on distribution
366 functions (e.g., VIC model) are presented in terms of soil wetting (i.e., infiltration). Like the
367 Budyko framework, the relationship between soil wetting ratio and soil storage index is obtained
368 for the SCS-CN method and the VIC type of model. It is found that the boundary conditions for
369 the obtained functions do not fully match. For the SCS-CN method, soil wetting ratio
370 approaches 1 when soil storage index approaches infinity, and this is due to the limitation of the
371 SCS-CN method, i.e. the initial soil moisture condition is not explicitly represented in the
372 proportionality relationship. However, for the VIC type of model, soil wetting ratio equals soil
373 storage index when soil storage index is lower than a certain value, and this is due to the finite
374 bound of the distribution function of storage capacity.

375 In this paper, a new distribution function, which is supported by $x \in [0, \infty)$ instead of a
376 finite upper bound, is proposed for describing the spatial distribution of soil water storage
377 capacity. From this new distribution function, an equation is derived for the relationship
378 between soil wetting ratio and storage index, and this equation satisfies the following boundary
379 conditions: when storage index approaches ~~zero~~0, soil wetting ratio approaches ~~zero~~0; when
380 storage index approaches infinity, soil wetting ratio approaches a certain value (≤ 1) depending
381 on the initial storage (e.g., at the beginning of a rainfall event, runoff is generated at the initially
382 saturated areas, such as wetlands [Gao et al., 2018]). Meanwhile, the model becomes the exact
383 SCS-CN method when initial storage is negligible. Therefore, the new distribution function for
384 soil water storage capacity explains the SCS-CN method as a saturation excess runoff model, and
385 unifies the SCS-CN method and the VIC type of model for surface runoff modeling.

386 Future potential work could test the performance of the proposed new distribution
 387 function for quantifying the spatial distribution of storage capacity by analyzing the spatially
 388 distributed soil data. On one hand, the distribution functions of probability distributed model
 389 [Moore, 1985], VIC model, and Xinanjiang model could be replaced by the new distribution
 390 function and the model performance would be further evaluated. On the other hand, the
 391 extended SCS-CN method (i.e., equation (35)), which includes initial storage explicitly, could be
 392 used for surface runoff modeling in SWAT model, and the model performance would be
 393 evaluated.

394 **Acknowledgements**

395 The author would like to thank University of Central Florida Faculty Excellence for their support
 396 during his sabbatical leave. This paper is theoretical and does not contain any supplementary
 397 data.

398

399 **Appendix A**

400 The following equation is obtained by dividing P on both sides of equation (21):

$$401 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \frac{S_b}{P} \left(1 - \frac{P + C_0}{C_m}\right)^{\beta+1} \quad (\text{A1})$$

402 Substituting $\frac{C_0}{C_m} = 1 - \left(1 - \frac{S_0}{S_b}\right)^{\frac{1}{\beta+1}}$ into equation (A1), we obtain:

$$403 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \frac{S_b}{P} \left(1 - \frac{P}{C_m} - \left[1 - \left(1 - \frac{S_0}{S_b}\right)^{\frac{1}{\beta+1}}\right]\right)^{\beta+1} \quad (\text{A2})$$

404 Substituting equation (14) into equation (A2),

$$405 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \left(\left(\frac{S_b - S_0}{P}\right)^{\frac{1}{\beta+1}} - \frac{\left(\frac{S_b}{P}\right)^{-\frac{\beta}{\beta+1}}}{\beta+1} \right)^{\beta+1} \quad (\text{A3})$$

406 Substituting equations (5) and (17) into (A3), we obtain:

$$407 \quad \frac{W}{P} = \Phi_{sc} - \left(\Phi_{sc}^{\frac{1}{\beta+1}} - \frac{\left(\frac{\Phi_{sc}}{1-\psi}\right)^{\frac{\beta}{\beta+1}}}{\beta+1} \right)^{\beta+1} \quad (A4)$$

408 which leads to:

$$409 \quad \frac{W}{P} = \Phi_{sc} \left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right] \quad (A5)$$

410 where b is defined in equation (18).

411

412 Appendix B

$$413 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc} \left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right] \quad (B1)$$

414 The right hand side of equation (B1) is re-written as:

$$415 \quad \lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc} \left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right] = \lim_{\Phi_{sc} \rightarrow \infty} \frac{1 - (1 - b\Phi_{sc}^{-1})^{\beta+1}}{\Phi_{sc}^{-1}} \quad (B2)$$

416 Since $\lim_{\Phi_{sc} \rightarrow \infty} 1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} = 0$ and $\lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc}^{-1} = 0$, we apply the L'Hospital's Rule,

$$417 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{\left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right]'}{(\Phi_{sc}^{-1})'} = \lim_{\Phi_{sc} \rightarrow \infty} b(\beta + 1)(1 - b\Phi_{sc}^{-1})^{\beta} \quad (B3)$$

418 Since $\lim_{\Phi_{sc} \rightarrow \infty} (1 - b\Phi_{sc}^{-1})^{\beta} = 1$, the limit for $\frac{W}{P}$ is obtained:

$$419 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = b(\beta + 1) \quad (B4)$$

420 Substituting equation (18) into (B4), we obtain:

$$421 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = (1 - \psi)^{\frac{\beta}{\beta+1}} \quad (B5)$$

422

423 Appendix C

$$424 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \lim_{\Phi_{sc} \rightarrow \infty} \frac{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} - \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}}{a} \quad (C1)$$

425 Multiplying $1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} + \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}$ to the
 426 denominator and numerator of the right hand side, equation (C1) leads to:

$$427 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{1}{a} \lim_{\Phi_{sc} \rightarrow \infty} \frac{\frac{2\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} - \frac{2(m+1)}{1-\psi} \Phi_{sc} + \frac{2a}{1-\psi} \Phi_{sc}}{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} + \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}} \quad (C2)$$

428 Dividing Φ_{sc} in the denominator and numerator, we obtain:

$$429 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{1}{a(1-\psi)} \lim_{\Phi_{sc} \rightarrow \infty} \frac{2\sqrt{(m+1)^2 - 2am} - 2(m+1) + 2a}{\frac{1}{\Phi_{sc}} + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} + \sqrt{\left(\frac{1}{\Phi_{sc}} + \frac{m+1}{1-\psi}\right)^2 - 2am \left(\frac{1}{1-\psi}\right)^2 - \frac{2a}{(1-\psi)\Phi_{sc}}}} \quad (C3)$$

430 Therefore, the limit of $\frac{W}{P}$ as $\Phi_{sc} \rightarrow \infty$ is:

$$431 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{\sqrt{(m+1)^2 - 2am} + a - m - 1}{a\sqrt{(m+1)^2 - 2am}} \quad (C4)$$

432

433 Appendix D

434 Substituting $a = 2\varepsilon(2 - \varepsilon)$ into equation (37), one can obtain:

$$435 \quad \frac{W}{P} = \frac{1 + \frac{S_b}{P} - \sqrt{\left(1 + \frac{S_b}{P}\right)^2 - 4\varepsilon(2-\varepsilon)\frac{S_b}{P}}}{2\varepsilon(2-\varepsilon)} \quad (D1)$$

436 Equation (D1) is the solution of the following quadratic function:

$$437 \quad \varepsilon(2 - \varepsilon) \left(\frac{W}{P}\right)^2 - \left(1 + \frac{S_b}{P}\right) \frac{W}{P} + \frac{S_b}{P} = 0 \quad (D2)$$

438 Multiplying P^2 at the both-hand sides of equation (D2), equation (D2) becomes:

$$439 \quad \varepsilon(2 - \varepsilon)W^2 - (P + S_b)W + S_bP = 0 \quad (D3)$$

440 Equation (D3) can be written as the following one:

$$441 \quad \frac{P-W}{P-\varepsilon W} = \frac{W-\varepsilon W}{S_b-\varepsilon W} \quad (D4)$$

442 Substituting $Q = P - W$ into equation (D4), we obtain the proportionality relationship of SCS-
443 CN method:

$$444 \quad \frac{Q}{P-\varepsilon W} = \frac{W-\varepsilon W}{S_b-\varepsilon W} \quad (D5)$$

445

446

447

448

449 **References**

450 Bartlett, M. S., A. J. Parolari, J. J. McDonnell, and A. Porporato (2016a), Beyond the SCS-CN
451 method: A theoretical framework for spatially lumped rainfall-runoff response, *Water*
452 *Resour. Res.*, 52, 4608–4627, doi:10.1002/2015WR018439.

453 Bartlett, M. S., A. J. Parolari, J. J. McDonnell, and A. Porporato (2016b), Framework for event-
454 based semidistributed modeling that unifies the SCS-CN method, VIC, PDM, and
455 TOPMODEL, *Water Resour. Res.*, 52, 7036 – 7052, doi:10.1002/2016WR019084.

456 Beven, K. J. (2011), *Rainfall-runoff modelling: the primer*, John Wiley & Sons.

457 Beven, K., and M. J. Kirkby (1979), A physically based, variable contributing area model of
458 basin hydrology, *Hydrol. Sci. J.*, 24(1), 43-69.

459 Bras, R. L. (1990), *Hydrology: an introduction to hydrologic science*, Addison Wesley
460 Publishing Company.

461 Budyko, M. I. (1974), *Climate and Life*, 508 pp., Academic Press, New York.

462 Chen, X., N. Alimohammadi, and D. Wang (2013), Modeling interannual variability of seasonal
463 evaporation and storage change based on the extended Budyko framework, *Water Resour.*
464 *Res.*, 49, doi:10.1002/wrcr.20493.

465 Easton, Z. M., D. R. Fuka, M. T. Walter, D. M. Cowan, E. M. Schneiderman, and T. S. Steenhuis
466 (2008), Re-conceptualizing the soil and water assessment tool (SWAT) model to predict
467 runoff from variable source areas, *J. Hydrol.*, 348(3), 279-291.

468 Gao, H., C. Birkel, M. Hrachowitz, D. Tetzlaff, C. Soulsby, and H. H. G. Savenije (2018), A
469 simple topography driven and calibration-free runoff generation module, *Hydrol. Earth*
470 *Syst. Sci. Discuss.*, <https://doi.org/10.5194/hess-2018-141>.

471 Huang, M., X. Liang, and Y. Liang (2003), A transferability study of model parameters for the
472 variable infiltration capacity land surface scheme, *J. Geophys. Res.*, 108(D22), 8864,
473 doi:10.1029/2003JD003676.

474 Hooshyar, M., and D. Wang (2016), An analytical solution of Richards' equation providing the
475 physical basis of SCS curve number method and its proportionality relationship, *Water*
476 *Resour. Res.*, 52(8), 6611-6620, doi: 10.1002/2016WR018885.

477 Liang, X., D. P. Lettenmaier, E. F. Wood, and S. J. Burges (1994), A simple hydrologically
478 based model of land surface water and energy fluxes for general circulation models, *J.*
479 *Geophys. Res.: Atmospheres*, 99(D7), 14415-14428.

480 Lyon, S. W., M. T. Walter, P. Gérard-Marchant, and T. S. Steenhuis (2004), Using a topographic
481 index to distribute variable source area runoff predicted with the SCS curve - number
482 equation, *Hydrol. Process.*, 18(15), 2757-2771.

483 Mishra, S. K., and V. P. Singh (1999), Another look at SCS-CN method, *J. Hydrol. Eng.*, 4(3),
484 257-264.

485 Mockus, V. (1972), *National Engineering Handbook Section 4, Hydrology*, NTIS.

486 Moore, R. J. (1985), The probability-distributed principle and runoff production at point and
487 basin scales, *Hydrol. Sci. J.*, 30, 273-297.

488 Ponce, V. (1996), Notes of my conversation with Vic Mockus, Unpublished material. Available
489 from: <http://mockus.sdsu.edu/>[Accessed 29 September 2017].

490 Ponce, V. M. and R. H. Hawkins (1996), Runoff curve number: has it reached maturity? *J.*
491 *Hydrol. Eng.*, 1(1), 9-20.

492 Porporato, A., E. Daly, and I. Rodriguez-Iturbe (2004), Soil Water Balance and Ecosystem
493 Response to Climate Change, *Am. Nat.*, 164(5), 625-632.

494 Sivapalan, M., K. Beven, E. F. Wood (1987), On hydrologic similarity: 2. A scaled model of
495 storm runoff production, *Water Resour. Res.*, 23(12), 2266–2278.

496 Steenhuis, T. S., M. Winchell, J. Rossing, J. A. Zollweg, and M. F. Walter (1995), SCS runoff
497 equation revisited for variable-source runoff areas, *J. Irrig. Drain. Eng.*, 121(3), 234-238.

498 Tang, Y., and D. Wang (2017), Evaluating the role of watershed properties in long-term water
499 balance through a Budyko equation based on two-stage partitioning of precipitation,
500 *Water Resour. Res.*, 53, 4142–4157, doi:10.1002/2016WR019920.

501 Wang, D. and Y. Tang (2014), A one-parameter Budyko model for water balance captures
502 emergent behavior in Darwinian hydrologic models, *Geophys. Res. Lett.*, 41, 4569–4577,
503 doi:10.1002/2014GL060509.

504 Wang, D., J. Zhao, Y. Tang, and M. Sivapalan (2015), A thermodynamic interpretation of
505 Budyko and L’vovich formulations of annual water balance: Proportionality hypothesis
506 and maximum entropy production, *Water Resour. Res.*, 51, 3007–3016,
507 doi:10.1002/2014WR016857.

508 Wood, E. F., D. P. Lettenmaier, and V. G. Zartarian (1992), A land - surface hydrology
509 parameterization with subgrid variability for general circulation models, *J. Geophys. Res.:*
510 *Atmospheres*, 97(D3), 2717-2728.

- 511 Yu, B. (1998), Theoretical justification of SCS method for runoff estimation, *J. Irrig. Drain.*
512 *Eng.*, 124(6), 306-310.
- 513 Zhao, R. (1977), *Flood forecasting method for humid regions of China*, East China College of
514 Hydraulic Engineering, Nanjing, China.
- 515 Zhao, R. (1992), The Xinanjiang model applied in China, *J. Hydrol.*, 135, 371-381.
- 516

517 **Figure captions:**

518 Figure 1: Wetting ratio $\left(\frac{W}{P}\right)$ versus soil storage index $\left(\frac{S_p}{P}\right)$ from the SCS-CN method based on

519 two parameterization schemes: $\lambda = \frac{W_i}{S_p - W_i}$ (scheme 1) and $\varepsilon = \frac{W_i}{W}$ (scheme 2).

520 Figure 2: The impact of β and the degree of initial storage ($\psi = S_0/S_b$) on soil wetting ratio
521 (W/P) .

522 Figure 3: The probability density functions (PDF) with different parameter values: (a) the
523 proposed PDF represented by equation (24); and (b) the power distribution of VIC model, i.e.,
524 equation (25).

525 Figure 4: The cumulative distribution functions (CDF) with different parameter values: (a) the
526 proposed distribution function represented by equation (26); and (b) the power distribution of
527 VIC model represented by equation (13).

528 Figure 5: The effects of the degree of initial storage ($\psi=0, 0.4, \text{ and } 0.6$) and shape parameter
529 ($a=0.6 \text{ and } 1.8$) on soil wetting in the modified SCS-CN method derived from the proposed
530 distribution function for soil water storage capacity.


531

532 Table 1: The boundary conditions of the functions for relating wetting ratio $\left(\frac{W}{P}\right)$ to soil storage
 533 index (Φ_{sc}): 1) the SCS-CN method; 2) the VIC type of model; and 3) the modified SCS-CN
 534 method based on the proposed new distribution for VIC type of model.

Event Scale Model	Lower Boundary Condition	Upper Boundary Condition
SCS-CN, parameterization of initial wetting, $\varepsilon = \frac{W_i}{W}$	$\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$	$\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$
Power function for storage capacity distribution (VIC type of model)	$\frac{W}{P} = \Phi_{sc}$ when $\Phi_{sc} \leq a$	$\frac{W}{P} \rightarrow (1 - \psi)^{\frac{\beta}{\beta+1}}$ as $\Phi_{sc} \rightarrow \infty$
Modified SCS-CN method based on the proposed distribution for storage capacity	$\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$	$\frac{W}{P} \rightarrow \frac{\sqrt{(m+1)^2 - 2am} + a - m - 1}{a\sqrt{(m+1)^2 - 2am}}$ as $\Phi_{sc} \rightarrow \infty$

535

536

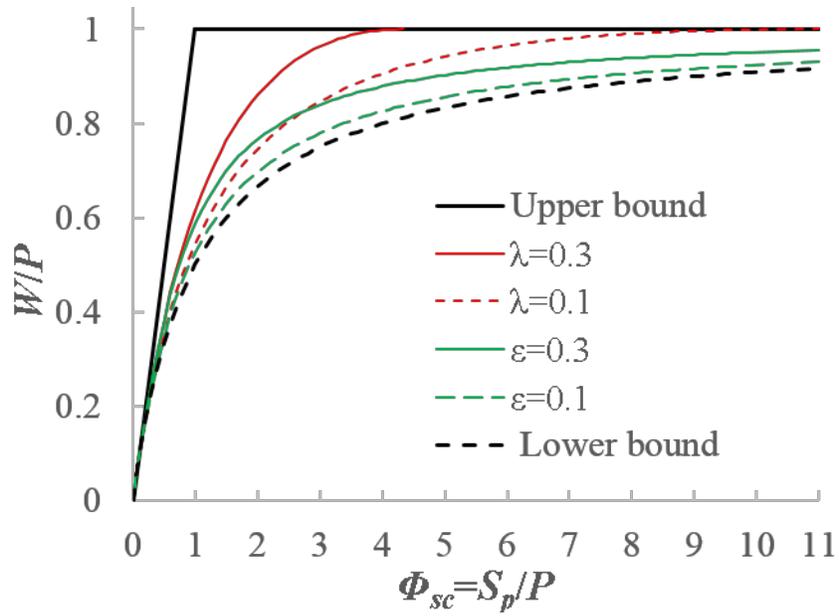


537

538 Figure 1: Wetting ratio $\left(\frac{W}{P}\right)$ versus soil storage index $\left(\frac{S_p}{P}\right)$ from the SCS-CN method based on
 539 two parameterization schemes: $\lambda = \frac{W_i}{S_p - W_i}$ (scheme 1) and $\epsilon = \frac{W_i}{W}$ (scheme 2).

540

541

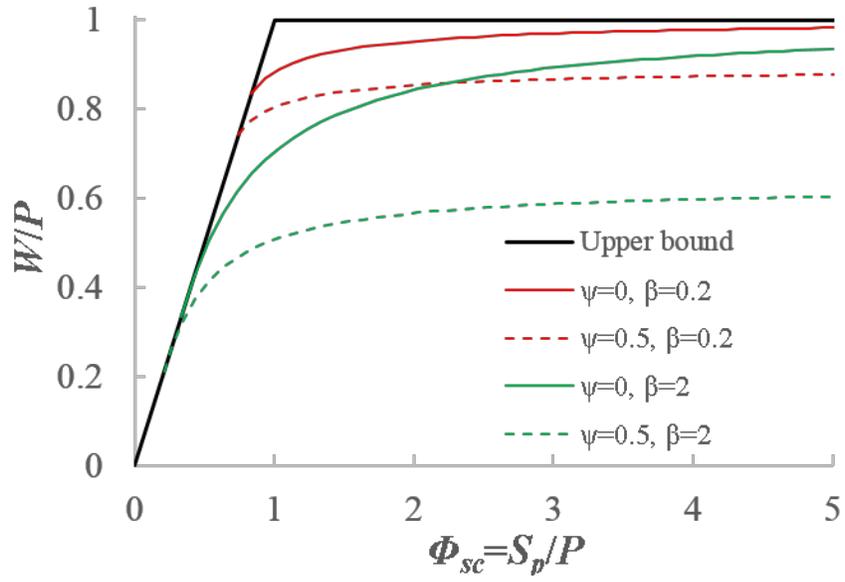


542

543 Figure 2: The impact of β and the degree of initial storage ($\psi = S_0/S_b$) on soil wetting ratio
 544 (W/P).

545

546

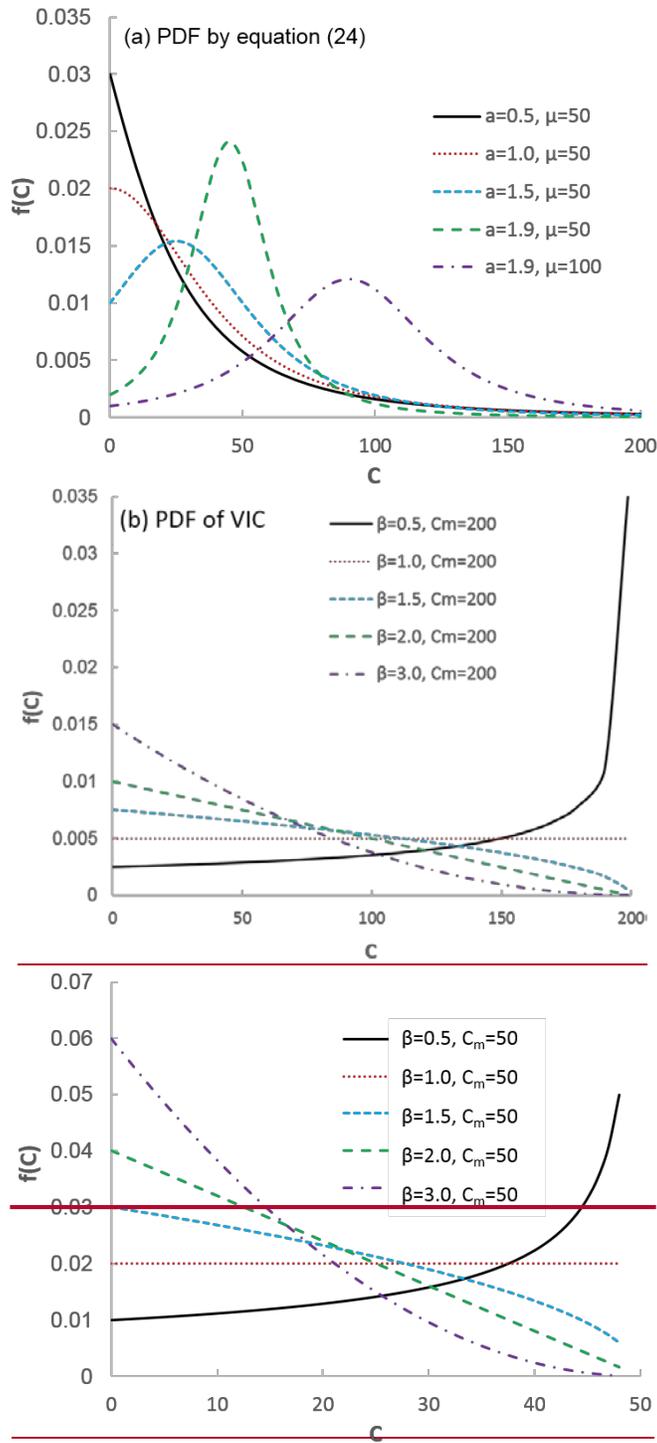


547

548

549

550 Figure 3: The probability density functions (PDF) with different parameter values: (a) the
 551 proposed PDF represented by equation (24); and (b) the power distribution of VIC model, i.e.,
 552 equation (25).
 553
 554

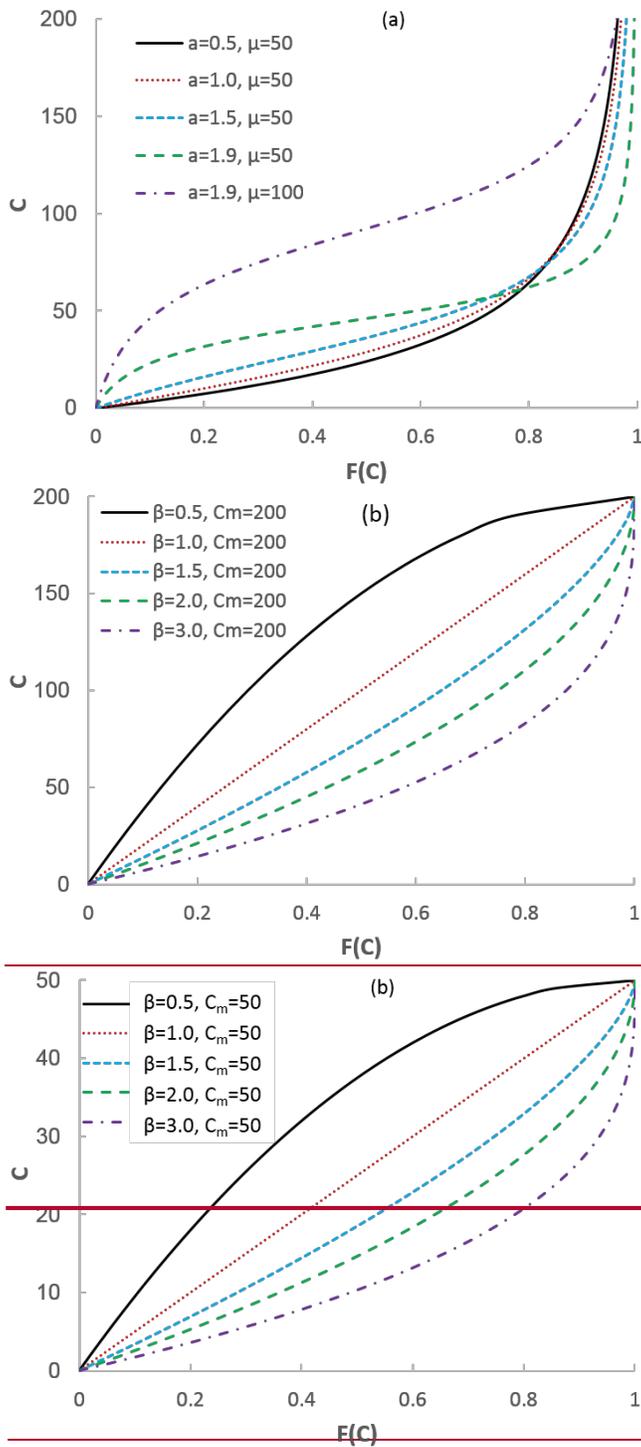


555

556

557

558 Figure 4: The cumulative distribution functions (CDF) with different parameter values: (a) the
 559 proposed distribution function represented by equation (26); and (b) the power distribution of
 560 VIC model represented by equation (13).
 561

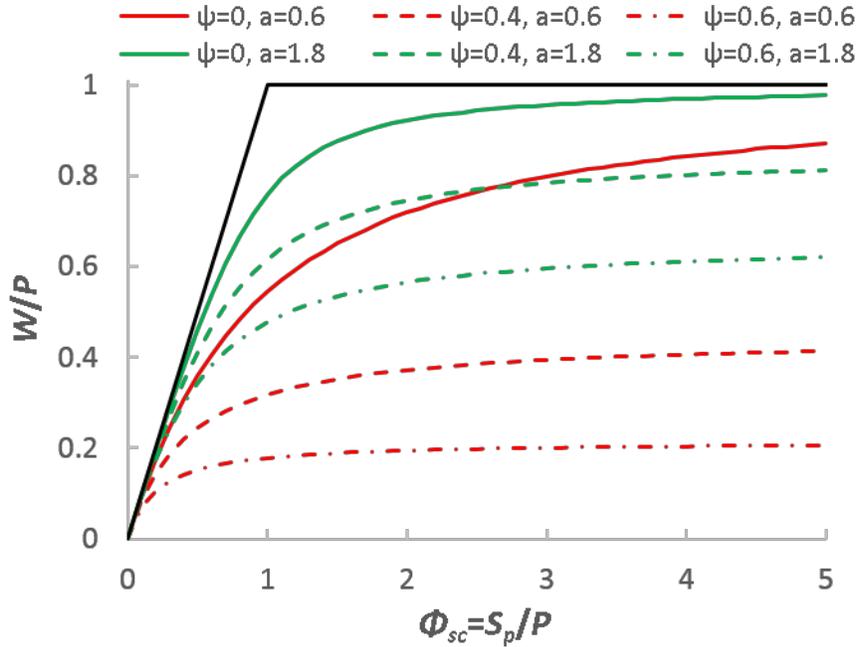


562

563 Figure 5: The effects of the degree of initial storage ($\psi=0, 0.4,$ and 0.6) and shape parameter
 564 ($a=0.6$ and 1.8) on soil wetting in the modified SCS-CN method derived from the proposed
 565 distribution function for soil water storage capacity.

566

567

568

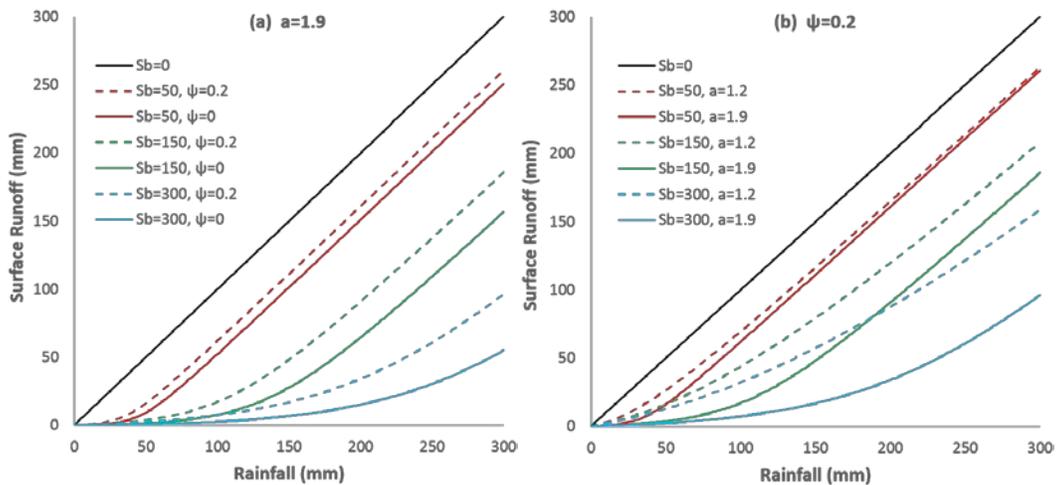

569

570 Figure 6: (a) The effects of average storage capacity and initial storage on rainfall-runoff relation;

571 and (b) The effects of average storage capacity and shape parameter on rainfall-runoff relation.