

1 **A new probability density function for spatial distribution of soil water storage capacity**
2 **leads to SCS curve number method**

3 Dingbao Wang

4 Department of Civil, Environmental, and Construction Engineering, University of Central
5 Florida, Orlando, Florida, USA

6 Correspondence to: D. Wang, dingbao.wang@ucf.edu

7 **Abstract**

8 Following the Budyko framework, soil wetting ratio (the ratio between soil wetting and
9 precipitation) as a function of soil storage index (the ratio between soil wetting capacity and
10 precipitation) is derived from the SCS-CN method and the VIC type of model. For the SCS-CN
11 method, soil wetting ratio approaches 1 when soil storage index approaches ∞ , due to the
12 limitation of the SCS-CN method in which the initial soil moisture condition is not explicitly
13 represented. However, for the VIC type of model, soil wetting ratio equals soil storage index
14 when soil storage index is lower than a certain value, due to the finite upper bound of the power
15 distribution function of storage capacity. In this paper, a new distribution function, supported on
16 a semi-infinite interval $x \in [0, \infty)$, is proposed for describing the spatial distribution of storage
17 capacity. From this new distribution function, an equation is derived for the relationship
18 between soil wetting ratio and storage index. In the derived equation, soil wetting ratio
19 approaches 0 as storage index approaches 0; when storage index tends to infinity, soil wetting
20 ratio approaches a certain value (≤ 1) depending on the initial storage. Moreover, the derived
21 equation leads to the exact SCS-CN method when initial water storage is 0. Therefore, the new
22 distribution function for soil water storage capacity explains the SCS-CN method as a saturation
23 excess runoff model and unifies the surface runoff modeling of SCS-CN method and VIC type of
24 model.

25 **Keywords:** SCS curve number method, VIC, Xinanjiang, saturation excess, distribution function,
26 soil water storage capacity, soil wetting

27 **1. Introduction**

28 The Soil Conservation Service Curve Number (SCS-CN) method [Mockus, 1972] has been
29 popularly used for direct runoff estimation in engineering communities. Even though the SCS-
30 CN method was obtained empirically [Ponce, 1996; Beven, 2011], it is often interpreted as an
31 infiltration excess runoff model [Bras, 1990; Mishra and Singh, 1999]. Yu [1998] showed that
32 partial area infiltration excess runoff generation on a statistical distribution of soil infiltration
33 characteristics provided similar runoff generation equation as the SCS-CN method. Recently,
34 Hooshyar and Wang [2016] derived an analytical solution for Richards' equation for ponded
35 infiltration into a soil column bounded by a water table; and they showed that the SCS-CN
36 method, as an infiltration excess model, is a special case of the derived general solution. The
37 SCS-CN method has also been interpreted as a saturation excess runoff model [Steenhuis *et al.*,
38 1995; Lyon *et al.*, 2004; Easton *et al.*, 2008]. During an interview, Mockus, who developed the
39 proportionality relationship of the SCS-CN method, stated that “saturation overland flow was the
40 most likely runoff mechanism to be simulated by the method” [Ponce, 1996]. Recently, Bartlett
41 *et al.* [2016a] developed a probabilistic framework, which provides a statistical justification of
42 the SCS-CN method and extends the saturation excess interpretation of the event-based runoff of
43 the method.

44 Since the 1970s, various saturation excess runoff models have been developed based on
45 the concept of probability distribution of soil storage capacity [Moore, 1985]. TOPMODEL is a
46 well-known saturation excess runoff model based on spatially distributed topography [Beven and
47 Kirkby, 1979; Sivapalan *et al.*, 1987]. To quantify the dynamic change of saturation area during

48 rainfall events, the spatial variability of soil moisture storage capacity is described by a
49 cumulative probability distribution function in the Xinanjiang model [Zhao, 1977; Zhao *et al.*,
50 1992] and the Variable Infiltration Capacity (VIC) model [Wood *et al.*, 1992; Liang *et al.*, 1994].
51 The distribution of storage capacity is described by a power function in these models, which
52 have been used for catchment scale runoff prediction and large scale land surface hydrologic
53 simulations. Bartlett *et al.* [2016b] unified TOPMODEL, the VIC type of model, and the SCS-
54 CN method by an event-based probabilistic storage framework, which includes a spatial
55 description of the runoff concept of “prethreshold” and “threshold-excess” runoff [Bartlett *et al.*,
56 2016a].

57 By applying the generalized proportionality hypothesis from the SCS-CN method to
58 mean annual water balance, Wang and Tang [2014] derived a one-parameter Budyko equation
59 [Budyko, 1974] for mean annual evaporation ratio (i.e., the ratio of evaporation to precipitation)
60 as a function of climate aridity index (i.e., the ratio of potential evaporation to precipitation). As
61 an analogy to the Budyko framework, the SCS-CN method and the VIC type of model at the
62 event scale can be represented by the relationship between soil wetting ratio, defined as the ratio
63 between soil wetting and precipitation, and soil storage index which is defined as the ratio
64 between soil wetting capacity and precipitation.

65 The objective of this paper is to unify the SCS-CN method and VIC type of model by
66 proposing a new distribution function for describing the soil water storage capacity. In section 2,
67 the SCS-CN method is presented in the form of Budyko-type framework with two
68 parameterization schemes. In section 3, the VIC type of model is presented in the form of
69 Budyko-type framework. In section 4, the SCS-CN method is then compared with the VIC type
70 of model from the perspectives of number of parameters and boundary conditions (i.e., the lower

71 and upper bounds of soil storage index). In section 5, the proposed new distribution function is
 72 introduced and compared with the power distribution of VIC type of model; and a modified
 73 SCS-CN method considering initial storage explicitly is derived from the new distribution
 74 function. Conclusions are drawn in section 6.

75 **2. SCS curve number method**

76 In this section, the SCS-CN method is described in the form of surface runoff modeling and then
 77 is presented for infiltration modeling in the Budyko-type framework. The initial storage at the
 78 beginning of a time interval (e.g., rainfall event) is denoted by S_0 [mm], and the maximum value
 79 of average storage capacity over the catchment is denoted by S_b [mm]. The storage capacity for
 80 soil wetting for the time interval, S_p [mm], is computed by:

$$81 \quad S_p = S_b - S_0 \quad (1)$$

82 The total rainfall during the time interval is denoted by P [mm]. Before surface runoff is
 83 generated, a portion of rainfall is intercepted by vegetation and infiltrates into the soil. This
 84 portion of rainfall is called initial abstraction or initial soil wetting denoted by W_i [mm]. The
 85 remaining rainfall ($P - W_i$) is partitioned into runoff and continuing soil wetting. This
 86 competition is captured by the proportionality relationship in the SCS-CN method:

$$87 \quad \frac{W - W_i}{S_p - W_i} = \frac{Q}{P - W_i} \quad (2)$$

88 where W [mm] is the total soil wetting; $W - W_i$ is continuing wetting and $S_p - W_i$ is its
 89 potential value; Q [mm] is surface runoff; and $P - W_i$ is the available water and interpreted as
 90 the potential value of Q . Since rainfall is partitioned into total soil wetting and surface runoff,
 91 i.e., $P = W + Q$, surface runoff is computed by substituting $W = P - Q$ into equation (2):

$$92 \quad Q = \frac{(P - W_i)^2}{P + S_p - 2W_i} \quad (3)$$

93 This equation is used for computing direct runoff in the SCS-CN method.

94 The SCS-CN method can also be represented in terms of soil wetting ratio ($\frac{W}{P}$).

95 Substituting equation (3) into $W = P - Q$ and dividing P on both sides, the soil wetting ratio
96 equation is obtained:

$$97 \quad \frac{W}{P} = \frac{\frac{S_p - W_i^2}{P} - \frac{W_i^2}{P^2}}{1 + \frac{S_p - W_i}{P} - 2\frac{W_i}{P}} \quad (4)$$

98 Climate aridity index is defined as the ratio between potential evaporation and precipitation. In
99 climate aridity index, both available water supply and water demand are determined by climate.

$$100 \quad \Phi_{sc} = \frac{S_p}{P} \quad (5)$$

101 A similar dimensionless parameter for the ratio between the maximum soil storage capacity and
102 mean rainfall depth of rainfall events was defined in *Porporato et al.* [2004]. In soil storage
103 index, water demand is determined by soil and available water supply is determined by climate.
104 Substituting equation (5) into equation (4), the soil wetting equation for the SCS-CN method is
105 obtained:

$$106 \quad \frac{W}{P} = \frac{\Phi_{sc} - \frac{W_i^2}{P^2}}{1 + \Phi_{sc} - 2\frac{W_i}{P}} \quad (6)$$

107 Two potential schemes for parameterizing the initial wetting in equation (6) are discussed in the
108 following sections.

109 **2.1. Parameterization scheme 1: ratio between initial wetting and storage capacity**

110 The initial wetting is usually parameterized as the ratio between initial wetting and storage
111 capacity in the SCS-CN method. The potential for continuing wetting is called potential
112 maximum retention and is denoted by $S_m = S_p - W_i$. S_m is computed as a function of curve
113 number which is dependent on land use/land cover and soil permeability. The ratio between W_i

114 and S_m in the SCS curve number method is denoted by $\lambda = \frac{W_i}{S_p - W_i}$, and then the ratio between
 115 initial soil wetting and storage capacity is computed by:

$$116 \quad \frac{W_i}{S_p} = \frac{\lambda}{1+\lambda} \quad (7)$$

117 The value of λ varies in the range of $0 \leq \lambda \leq 0.3$, and a value of 0.2 is usually used [*Ponce and*
 118 *Hawkins, 1996*]. Substituting equation (7) into equation (6) leads to:

$$119 \quad \frac{W}{P} = \frac{1 - \left(\frac{\lambda}{1+\lambda}\right)^2 \Phi_{sc}}{1 - \frac{2\lambda}{1+\lambda} + \Phi_{sc}^{-1}} \quad (8)$$

120 Equation (8) is plotted in Figure 1 for $\lambda = 0.1$ and 0.3 . As we can see, the range of Φ_{sc} is
 121 dependent on the parameter λ . Since $W_i \leq P$, Φ_{sc} is in the range of $\left[0, 1 + \frac{1}{\lambda}\right]$. Equation (8)

122 satisfies the following boundary conditions: $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$; and $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \frac{\lambda+1}{\lambda}$. When

123 $\lambda \rightarrow 0$, equation (8) becomes:

$$124 \quad \frac{W}{P} = \frac{1}{1 + \Phi_{sc}^{-1}} \quad (9)$$

125 Equation (9) is the lower bound for $\frac{W}{P}$ based on this parameterization scheme.

126 **2.2. Parameterization scheme 2: ratio between initial wetting and total wetting**

127 In order to avoid the situation that the range of Φ_{sc} is dependent on the parameter λ , we can
 128 use the following parameterization scheme [*Chen et al., 2013; Tang and Wang, 2017*]:

$$129 \quad \varepsilon = \frac{W_i}{W} \quad (10)$$

130 Substituting equation (10) into equation (6), we can obtain the following equation:

$$131 \quad \frac{W}{P} = \frac{\Phi_{sc} - \varepsilon^2 \frac{W^2}{P^2}}{1 + \Phi_{sc} - 2\varepsilon \frac{W}{P}} \quad (11)$$

132 We can solve for $\frac{W}{P}$ from equation (11):

133
$$\frac{W}{P} = \frac{1 + \Phi_{sc} - \sqrt{(1 + \Phi_{sc})^2 - 4\varepsilon(2 - \varepsilon)\Phi_{sc}}}{2\varepsilon(2 - \varepsilon)} \quad (12)$$

134 Equation (12) has the same functional form as the derived Budyko equation for long-term
 135 evaporation ratio [Wang and Tang, 2014; Wang et al., 2015]. Equation (12) satisfies the
 136 following boundary conditions: $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$; and $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$. Based on equation
 137 (10), the range of ε is $[0, 1]$, and $\varepsilon = 1$ corresponds to the upper bound (Figure 1). Equation (12)
 138 becomes equation (9) as $\varepsilon \rightarrow 0$, and it is the lower bound. Figure 1 plots equation (12) for $\varepsilon =$
 139 0.1 and 0.3. Due to the dependence of the range of Φ_{sc} on the parameter λ in the first
 140 parameterization scheme, the second parameterization scheme is focused on in the following
 141 sections.

142 In the SCS-CN method, the soil wetting ratio is a function of soil storage index with a
 143 parameter for describing initial wetting. The average wetting capacity at the catchment scale is
 144 used for computing soil storage index; but the spatial variability of wetting capacity is not
 145 represented in the SCS-CN method.

146 3. Saturation excess runoff model

147 The spatial variability of soil water storage capacity is explicitly represented in the saturation
 148 excess runoff models such as VIC and Xinanjiang. In these models, the spatial variation of
 149 point-scale storage capacity (C) is represented by a power function:

150
$$F(C) = 1 - \left(1 - \frac{C}{C_m}\right)^\beta \quad (13)$$

151 where $F(C)$ is the cumulative probability, i.e., the fraction of catchment area for which the
 152 storage capacity is less than C [mm]; and C_m [mm] is the maximum value of point-scale storage
 153 capacity over the catchment. The water storage capacity includes vegetation interception,
 154 surface retention, and soil moisture capacity; β is the shape parameter of storage capacity

155 distribution and is usually assumed to be a positive number. β ranges from 0.01 to 5.0 as
 156 suggested by *Wood et al.* [1992]. The storage capacity distribution curve is concave down for
 157 $0 < \beta < 1$ and concave up for $\beta > 1$. The average value of storage capacity over the catchment
 158 is equivalent to S_b in the SCS-CN method, and it is obtained by integrating the exceedance
 159 probability of storage capacity $S_b = \int_0^{C_m} (1 - F(x)) dx$:

$$160 \quad S_b = \frac{C_m}{\beta+1} \quad (14)$$

161 Similarly, for a given C , the catchment-scale storage S [mm] can be computed [*Moore*, 1985]:

$$162 \quad S = S_b \left[1 - \left(1 - \frac{C}{C_m} \right)^{\beta+1} \right] \quad (15)$$

163 To derive wetting ratio as a function of soil storage index, the initial storage at the
 164 catchment scale is parameterized by the degree of saturation:

$$165 \quad \psi = \frac{S_0}{S_b} \quad (16)$$

166 Recalling equation (1) and the definition of soil storage index (i.e., equation (5)), we obtain:

$$167 \quad \frac{S_b}{P} = \frac{\Phi_{sc}}{1-\psi} \quad (17)$$

168 The value of C corresponding to the initial storage S_0 is denoted as C_0 , and $S_0 = S_b \left[1 - \right.$

169 $\left. \left(1 - \frac{C_0}{C_m} \right)^{\beta+1} \right]$ is obtained by substituting S_0 and C_0 into equation (15). When $P + C_0 \geq C_m$,

170 each point within the catchment is saturated and soil wetting reaches its maximum value, i.e.,

171 $W = S_p$. Substituting $C_0 = C_m - C_m \left(1 - \frac{S_0}{S_b} \right)^{\frac{1}{\beta+1}}$ into $P + C_0 \geq C_m$, we obtain:

$$172 \quad \Phi_{sc} \leq b \text{ where } b = (\beta + 1)^{-1} (1 - \psi)^{\frac{\beta}{\beta+1}} \quad (18)$$

173 Therefore, this condition is equivalent to:

$$174 \quad \frac{W}{P} = \Phi_{sc} \text{ when } \Phi_{sc} \leq b \quad (19)$$

175 Next, we will derive $\frac{W}{P}$ for the condition of $\Phi_{sc} > b$. The storage at the end of the
 176 modeling period (e.g., rainfall-runoff event) is denoted as S_1 , which is computed by:

$$177 \quad S_1 = S_b \left[1 - \left(1 - \frac{P+C_0}{C_m} \right)^{\beta+1} \right] \quad (20)$$

178 Since $W = S_1 - S_0$, wetting is computed by:

$$179 \quad W = S_b \left[1 - \left(1 - \frac{P+C_0}{C_m} \right)^{\beta+1} \right] - S_0 \quad (21)$$

180 From equation (21), we obtain (see Appendix A for details):

$$181 \quad \frac{W}{P} = \Phi_{sc} \left[1 - \left(1 - b\Phi_{sc}^{-1} \right)^{\beta+1} \right] \text{ when } \Phi_{sc} > b \quad (22)$$

182 The limit of equation (22) for $\Phi_{sc} \rightarrow \infty$ can be obtained (see Appendix B for details):

$$183 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = (1 - \psi)^{\frac{\beta}{\beta+1}} \quad (23)$$

184 Equations (19) and (22) provide $\frac{W}{P}$ as a function of Φ_{sc} with two parameters (ψ and β). Figure 2
 185 plots equations (19) and (22) for $\psi = 0$ and 0.5 when $\beta = 0.2$ and 2. As we can see, $\frac{W}{P}$ decreases
 186 as β increases for given values of ψ and Φ_{sc} ; and $\frac{W}{P}$ decreases as ψ increases for given values of
 187 β and Φ_{sc} , implicating that soil wetting ratio decreases with the degree of initial saturation under
 188 a given soil storage index.

189 **4. Comparison between SCS-CN model and VIC type of model**

190 The SCS-CN model with the parameterization of ratio between initial wetting and total wetting is
 191 compared with the VIC type of saturation excess runoff model. In sections 2 and 3, we derived
 192 $\frac{W}{P}$ as a function of Φ_{sc} based on the SCS-CN method and the VIC type of model, which uses a
 193 power function to describe the spatial distribution of storage capacity. The SCS-CN method is a
 194 function of storage capacity S_p ; but the VIC type of model is a function of storage capacity S_p

195 and the degree of initial saturation $\frac{S_0}{S_b}$. As a result, the function of $\frac{W}{P} \sim \frac{S_p}{P}$ for the SCS-CN method
196 has only one parameter (ε), but it has two parameters (β and ψ) for the VIC type of model.

197 Table 1 shows the boundary conditions for the relationships between $\frac{W}{P}$ and Φ_{sc} from the
198 SCS-CN method and the VIC type of model. The lower boundary of the SCS-CN method with
199 parameter ε is $\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$. However, for the VIC type of model, $\frac{W}{P} = \Phi_{sc}$ when $\Phi_{sc} \leq b$.
200 For the SCS-CN method, W reaches its maximum (S_p) when rainfall reaches infinity; while for
201 the VIC type of model, W reaches its maximum value (S_p) when rainfall reaches a finite number
202 ($C_m - C_0$). In other words, for the SCS-CN method, the entire catchment becomes saturated
203 when rainfall reaches infinity; while for the VIC type model, the entire catchment becomes
204 saturated when rainfall reaches a finite number.

205 As shown in Table 1, the upper boundary of the SCS-CN method (with parameter ε) is 1.
206 However, for the VIC type of model, the upper boundary is $(1 - \psi)^{\frac{\beta}{\beta+1}}$ instead of 1. This is due
207 to the effect of initial storage in the VIC type of model. When initial storage is 0 (i.e., $\psi = 0$),
208 the wetting ratio $\frac{W}{P}$ for the VIC type of model has the same upper boundary condition as the
209 SCS-CN method.

210 **5. Unification of SCS-CN method and VIC type of model**

211 Based on the comparison between the SCS-CN method and VIC type of model, a new
212 distribution function is proposed in this section for describing the spatial distribution of soil
213 water storage capacity, which unifies the SCS-CN method and VIC type of model. As discussed
214 in section 4, the upper boundary condition of the SCS-CN model (i.e., $\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$) does
215 not depend on the initial storage. This upper boundary condition needs to be modified by

216 including the effect of initial storage so that the limit of $\frac{W}{P}$ as $\Phi_{sc} \rightarrow \infty$ is dependent on the
 217 degree of initial saturation like the VIC type of model. However, the lower boundary condition
 218 of the VIC model needs to be modified so that the lower boundary condition follows that $\frac{W}{P} \rightarrow 0$
 219 as $\Phi_{sc} \rightarrow 0$ like the SCS-CN method. Through these modifications, the SCS-CN method and the
 220 VIC type of saturation excess runoff model can be unified from the functional perspective of soil
 221 wetting ratio.

222 Based on the comparison one may have the following questions: 1) Can the SCS-CN
 223 method be derived from the VIC type of model by setting initial storage to 0? 2) If yes, what is
 224 the distribution function for soil water storage capacity? Once we answer these questions, a
 225 modified SCS-CN method considering initial storage explicitly can be derived as a saturation
 226 excess runoff model based on a distribution function of water storage capacity, and it unifies the
 227 SCS-CN method and VIC type of model. In this section, a new distribution function is proposed
 228 for describing the spatial variability of soil water storage capacity, from which the SCS-CN
 229 method is derived as a VIC type of model.

230 **5.1. A new distribution function**

231 The probability density function (PDF) of the new distribution for describing the spatial
 232 distribution of water storage capacity is represented by:

$$233 \quad f(C) = \frac{(2-a)\mu^2}{[(C+\mu)^2 - 2a\mu C]^{3/2}} \quad (24)$$

234 where C is point-scale water storage capacity and supported on a positive semi-infinite interval
 235 ($C \geq 0$); a is the shape parameter and its range is $0 < a < 2$; and μ is the mean of the
 236 distribution (i.e., the scale parameter). Figure 3a plots the PDFs for five sets of shape and scale
 237 parameters. When $a \leq 1$, the PDF monotonically decreases with the increase of C , i.e., the peak
 238 of PDF occurs at $C = 0$; while when $a > 1$, the peak of PDF occurs at $C > 0$ and the location of

239 the peak depends on the values of a and μ . For comparison, Figure 3b plots the PDF for VIC
 240 model:

$$241 \quad f(C) = \frac{\beta}{c_m} \left(1 - \frac{C}{c_m}\right)^{\beta-1} \quad (25)$$

242 As shown by the solid black curve in Figure 3b, when $0 < \beta < 1$, $f(C)$ approaches infinity as
 243 $C \rightarrow c_m$. It is a uniform distribution when $\beta = 1$. The peak of PDF occurs at $C = 0$ when $\beta >$
 244 1. Therefore, the peak of PDF for VIC model occurs at $C = 0$ or c_m .

245 The cumulative distribution function (CDF) corresponding to the proposed PDF is
 246 obtained by integrating equation (24):

$$247 \quad F(C) = 1 - \frac{1}{a} + \frac{C+(1-a)\mu}{a\sqrt{(C+\mu)^2-2a\mu C}} \quad (26)$$

248 Figure 4a plots the CDFs corresponding to the PDFs in Figure 3a. For comparison, Figure 4b
 249 plots the CDFs corresponding to the PDFs in Figure 3b. The storage capacity distribution curve
 250 for the proposed distribution is concave up for $a \leq 1$ and S-shape for $a > 1$ (Figure 4a); while
 251 the storage capacity distribution curve for VIC model is concave up for $\beta > 1$ and concave down
 252 for $0 < \beta < 1$ (Figure 4b). The S-shape of CDF (Figure 4a) is more significant with higher
 253 value of a (e.g., $a=1.9$). For a smaller value of a , the difference between the new PDF and VIC-
 254 type of model becomes smaller. The proposed distribution can fit the S-shape of cumulative
 255 distribution for storage capacity which is observed from soil data [Huang *et al.*, 2003], but the
 256 power distribution of VIC type of model is not able to fit the S-shape of CDF.

257 **5.2. Deriving SCS-CN method from the proposed distribution function**

258 The soil wetting and surface runoff can be computed when equation (26) is used to describe the
 259 spatial distribution of soil water storage capacity in a catchment. The average value of storage
 260 capacity over the catchment is the mean of the distribution:

261
$$\mu = S_b \quad (27)$$

262 For a given C , the catchment-scale storage S can be computed by $S = \int_0^C [1 - F(x)]dx$ [Moore,
263 1985]. From equation (26), we obtain:

264
$$S = \frac{C+S_b-\sqrt{(C+S_b)^2-2aS_bC}}{a} \quad (28)$$

265 For a rainfall-runoff event, the average initial storage at the catchment scale is denoted as S_0 and
266 the corresponding value of C is denoted as C_0 . Substituting S_0 and C_0 into equation (28), we
267 obtain:

268
$$S_0 = \frac{C_0+S_b-\sqrt{(C_0+S_b)^2-2aS_bC_0}}{a} \quad (29)$$

269 Dividing S_b in both-hand sides of equation (29), we obtain:

270
$$m = \frac{\psi(2-a\psi)}{2(1-\psi)} \quad (30)$$

271 where $\psi = \frac{S_0}{S_b}$ is defined in equation (16), and m is defined as:

272
$$m = \frac{C_0}{S_b} \quad (31)$$

273 The rainfall in the catchment is assumed to be spatially uniform and the rainfall depth is
274 denoted as P . If the spatial distribution of rainfall is not uniform, the method is applied to sub-
275 catchments where the effect of spatial variability of rainfall is negligible. The average storage at
276 the catchment scale after infiltration is computed by substituting $C = C_0 + P$ into equation (28):

277
$$S_1 = \frac{C_0+P+S_b-\sqrt{(C_0+P+S_b)^2-2aS_b(C_0+P)}}{a} \quad (32)$$

278 The soil wetting is computed as the difference between S_1 and S_0 :

279
$$W = \frac{P+\sqrt{(C_0+S_b)^2-2aS_bC_0}-\sqrt{(C_0+P+S_b)^2-2aS_b(C_0+P)}}{a} \quad (33)$$

280 Dividing P on the both-hand sides of equation (33) and substituting equation (31), we obtain:

$$\frac{W}{P} = \frac{1 + \frac{S_b}{P} \sqrt{(m+1)^2 - 2am} - \sqrt{\left(1 + (m+1) \frac{S_b}{P}\right)^2 - 2am \left(\frac{S_b}{P}\right)^2} - 2a \frac{S_b}{P}}{a} \quad (34)$$

Substituting equation (17) into equation (34), we obtain:

$$\frac{W}{P} = \frac{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} - \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2} - \frac{2a}{1-\psi} \Phi_{sc}}{a} \quad (35)$$

Figure 5 plots equation (35) for $\psi = 0, 0.4, \text{ and } 0.6$ when $a = 0.6$ and 1.8 . As we can see, $\frac{W}{P}$ increases with a for given values of ψ and Φ_{sc} ; and $\frac{W}{P}$ decreases with ψ for given values of a and Φ_{sc} , which is consistent with the VIC model and implicates that soil wetting ratio decreases with the degree of initial saturation under a storage index. As shown in Figure 5, equation (35) satisfies the lower boundary of SCS-CN method and the upper boundary of the VIC model. Specifically, equation (35) satisfies the following boundary conditions (see Appendix C for details) shown in Table 1:

$$\lim_{\Phi_{sc} \rightarrow 0} \frac{W}{P} = 0 \quad (36-1)$$

$$\lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{\sqrt{(m+1)^2 - 2am + a - m - 1}}{a \sqrt{(m+1)^2 - 2am}} \quad (36-2)$$

When the effect of initial storage is negligible (i.e., $\psi = 0$), $\frac{S_b}{P} = \Phi_{sc}$ from equation (17) and $m = 0$ from equation (30). Then, equation (35) becomes:

$$\frac{W}{P} = \frac{1 + \frac{S_b}{P} - \sqrt{\left(1 + \frac{S_b}{P}\right)^2 - 2a \frac{S_b}{P}}}{a} \quad (37)$$

Equation (37) is same as equation (12) with $a = 2\varepsilon(2 - \varepsilon)$. We can obtain the following equation from equation (37) (see Appendix D for detailed derivation):

$$\frac{Q}{P - \varepsilon W} = \frac{W - \varepsilon W}{S_b - \varepsilon W} \quad (38)$$

299 where εW is defined as initial abstraction (W_i) in the SCS-CN method. Since $S_b = S_p$ when
300 $\psi = 0$, equation (38) is same as equation (2), i.e., the proportionality relationship of SCS-CN
301 method.

302 Equation (35) is derived from the VIC type model by using equation (26) to describe the
303 spatial distribution of soil water storage capacity. From this perspective, equation (35) is a
304 saturation excess runoff model. Since equation (35) becomes the SCS-CN method when initial
305 storage is negligible, equation (35) is the modified SCS-CN method which considers the effect of
306 initial storage on runoff generation explicitly. Therefore, the new distribution function
307 represented by equation (26) unifies the SCS-CN method and VIC type of model.

308 *Bartlett et al.* [2016a] developed an event-based probabilistic storage framework
309 including a spatial description of “prethreshold” and “threshold-excess” runoff; and the
310 framework has been utilized for unifying TOPMODEL, VIC and SCS-CN [*Bartlett et al.*, 2016b].
311 The extended SCS-CN method (SCS-CN_x) from the probabilistic storage framework is derived
312 given the following assumptions: 1) the spatial distribution of rainfall is exponential; 2) the
313 spatial distribution of soil moisture deficit is uniform; and 3) the spatial distribution of storage
314 capacity is exponential. When “prethreshold” runoff is 0 (i.e., there is only threshold-excess or
315 saturation excess runoff), the SCS-CN_x method leads to the SCS-CN method without the initial
316 abstraction term (i.e., there is no εW term in equation (38)). In this paper, the new probability
317 distribution function is used for storage capacity in the VIC model in which the spatial
318 distribution of precipitation is assumed to be uniform. The obtained equation for saturation
319 excess runoff leads to the exact SCS-CN method as shown in equation (38).

320 This research started with the following research question: if the SCS-CN method is a
321 saturation excess runoff generation model, what is the distribution function of soil water storage

322 capacity? Wang and Tang (2014) showed that equation (37) is derived from the proportionality
 323 relationship of SCS-CN method, i.e., equation (38). From the comparison of boundary
 324 conditions between SCS-CN method and VIC type of model discussed in Section 4, it is
 325 observed that equation (37) does not include initial soil water storage, and the derived one from
 326 distribution function will include initial soil water storage (e.g., equation (34)). However,
 327 equation (37) can be viewed as the result of $S_0 = 0$; and W for equation (37) can be written as:

$$328 \quad W = \int_0^P [1 - F(x)] dx \quad (39)$$

329 From equation (37), one obtains:

$$330 \quad W = \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} \quad (40)$$

331 Substituting equation (40) into equation (39), one obtains:

$$332 \quad \frac{P+S_b-\sqrt{(S_b+P)^2-2aPS_b}}{a} = \int_0^P [1 - F(C)] dC \quad (41)$$

333 Equation (26) is obtained from equation (41).**5.3. Surface runoff of unified SCS-CN and VIC**
 334 **model**

335 From the unified SCS-CN and VIC model (i.e., equation (34)), surface runoff (Q) can be
 336 computed as:

$$337 \quad Q = \frac{(a-1)P-S_b\sqrt{(m+1)^2-2am}+\sqrt{[P+(m+1)S_b]^2-2amS_b^2-2aS_bP}}{a} \quad (42)$$

338 The parameter m is computed by equation (30) as a function of ψ and a . Equation (42)
 339 represents surface runoff as a function of precipitation (P), average soil water storage capacity
 340 (S_b), shape parameter of storage capacity distribution (a), and initial soil moisture (ψ). Figure 6
 341 plots equation (42) under different values of P , S_b , a , and ψ . Figure 6a shows the effects of S_b
 342 and ψ on rainfall-runoff relationship with given shape parameter of $a=1.9$. The solid lines show
 343 the rainfall-runoff relations with zero initial storage ($\psi=0$); and the dashed lines show the

344 rainfall-runoff relations with $\psi=0.2$. Given the same amount of precipitation and storage
345 capacity, wetter soil ($\psi=0.2$) generates more surface runoff than drier soil ($\psi=0$); and the
346 difference of runoff is higher for watersheds with larger average storage capacity. Figure 6b
347 shows the effects of S_b and a on rainfall-runoff relationship with given initial soil moisture
348 ($\psi=0.2$). The solid lines show the rainfall-runoff relations for $a=1.9$; and the dashed lines show
349 the rainfall-runoff relations for $a=1.2$. As we can see, the shape parameter affects the runoff
350 generation significantly for watersheds with larger average storage capacity.

351 In the SCS-CN method, surface runoff is computed as $Q = \frac{(P-0.2S_b)^2}{P+0.8S_b}$. The effect of
352 initial soil moisture on runoff is considered implicitly by varying the curve number for normal,
353 dry and wet conditions depending on the antecedent moisture condition. In the unified SCS-CN
354 model shown in equation (42), the effect of initial soil moisture is explicitly included through ψ ,
355 which is the ratio between average initial water storage and average storage capacity. In the
356 SCS-CN method, the value of initial abstraction W_i is parameterized as a function of average
357 storage capacity, i.e., $W_i = 0.2S_b$. In the unified SCS-CN model shown in equation (42), W_i is
358 dependent on the shape parameter a . Therefore, the unified SCS-CN model extends the original
359 SCS-CN method for including the effect of initial soil moisture explicitly and estimating the
360 parameter for initial abstraction.

361 **6. Conclusions**

362 In this paper, the SCS-CN method and the saturation excess runoff models based on distribution
363 functions (e.g., VIC model) are presented in terms of soil wetting (i.e., infiltration). Like the
364 Budyko framework, the relationship between soil wetting ratio and soil storage index is obtained
365 for the SCS-CN method and the VIC type of model. It is found that the boundary conditions for
366 the obtained functions do not fully match. For the SCS-CN method, soil wetting ratio

367 approaches 1 when soil storage index approaches infinity, and this is due to the limitation of the
368 SCS-CN method, i.e. the initial soil moisture condition is not explicitly represented in the
369 proportionality relationship. However, for the VIC type of model, soil wetting ratio equals soil
370 storage index when soil storage index is lower than a certain value, and this is due to the finite
371 bound of the distribution function of storage capacity.

372 In this paper, a new distribution function, which is supported by $x \in [0, \infty)$ instead of a
373 finite upper bound, is proposed for describing the spatial distribution of soil water storage
374 capacity. From this new distribution function, an equation is derived for the relationship
375 between soil wetting ratio and storage index, and this equation satisfies the following boundary
376 conditions: when storage index approaches 0, soil wetting ratio approaches 0; when storage
377 index approaches infinity, soil wetting ratio approaches a certain value (≤ 1) depending on the
378 initial storage (e.g., at the beginning of a rainfall event, runoff is generated at the initially
379 saturated areas, such as wetlands [*Gao et al.*, 2018]). Meanwhile, the model becomes the exact
380 SCS-CN method when initial storage is negligible. Therefore, the new distribution function for
381 soil water storage capacity explains the SCS-CN method as a saturation excess runoff model, and
382 unifies the SCS-CN method and the VIC type of model for surface runoff modeling.

383 Future potential work could test the performance of the proposed new distribution
384 function for quantifying the spatial distribution of storage capacity by analyzing the spatially
385 distributed soil data. On one hand, the distribution functions of probability distributed model
386 [*Moore*, 1985], VIC model, and Xinanjiang model could be replaced by the new distribution
387 function and the model performance would be further evaluated. On the other hand, the
388 extended SCS-CN method (i.e., equation (35)), which includes initial storage explicitly, could be

389 used for surface runoff modeling in SWAT model, and the model performance would be
 390 evaluated.

391 **Acknowledgements**

392 The author would like to thank University of Central Florida Faculty Excellence for their support
 393 during his sabbatical leave. This paper is theoretical and does not contain any supplementary
 394 data.

395

396 **Appendix A**

397 The following equation is obtained by dividing P on both sides of equation (21):

$$398 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \frac{S_b}{P} \left(1 - \frac{P + C_0}{C_m}\right)^{\beta+1} \quad (\text{A1})$$

399 Substituting $\frac{C_0}{C_m} = 1 - \left(1 - \frac{S_0}{S_b}\right)^{\frac{1}{\beta+1}}$ into equation (A1), we obtain:

$$400 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \frac{S_b}{P} \left(1 - \frac{P}{C_m} - \left[1 - \left(1 - \frac{S_0}{S_b}\right)^{\frac{1}{\beta+1}}\right]\right)^{\beta+1} \quad (\text{A2})$$

401 Substituting equation (14) into equation (A2),

$$402 \quad \frac{W}{P} = \frac{S_b - S_0}{P} - \left(\left(\frac{S_b - S_0}{P}\right)^{\frac{1}{\beta+1}} - \frac{\left(\frac{S_b}{P}\right)^{-\frac{\beta}{\beta+1}}}{\beta+1} \right)^{\beta+1} \quad (\text{A3})$$

403 Substituting equations (5) and (17) into (A3), we obtain:

$$404 \quad \frac{W}{P} = \Phi_{sc} - \left(\Phi_{sc}^{\frac{1}{\beta+1}} - \frac{\left(\frac{\Phi_{sc}}{1-\psi}\right)^{-\frac{\beta}{\beta+1}}}{\beta+1} \right)^{\beta+1} \quad (\text{A4})$$

405 which leads to:

$$406 \quad \frac{W}{P} = \Phi_{sc} \left[1 - \left(1 - b\Phi_{sc}^{-1}\right)^{\beta+1}\right] \quad (\text{A5})$$

407 where b is defined in equation (18).

408

409 Appendix B

$$410 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc} \left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right] \quad (\text{B1})$$

411 The right hand side of equation (B1) is re-written as:

$$412 \quad \lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc} \left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right] = \lim_{\Phi_{sc} \rightarrow \infty} \frac{1 - (1 - b\Phi_{sc}^{-1})^{\beta+1}}{\Phi_{sc}^{-1}} \quad (\text{B2})$$

413 Since $\lim_{\Phi_{sc} \rightarrow \infty} 1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} = 0$ and $\lim_{\Phi_{sc} \rightarrow \infty} \Phi_{sc}^{-1} = 0$, we apply the L'Hospital's Rule,

$$414 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{\left[1 - (1 - b\Phi_{sc}^{-1})^{\beta+1} \right]'}{(\Phi_{sc}^{-1})'} = \lim_{\Phi_{sc} \rightarrow \infty} b(\beta + 1)(1 - b\Phi_{sc}^{-1})^{\beta} \quad (\text{B3})$$

415 Since $\lim_{\Phi_{sc} \rightarrow \infty} (1 - b\Phi_{sc}^{-1})^{\beta} = 1$, the limit for $\frac{W}{P}$ is obtained:

$$416 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = b(\beta + 1) \quad (\text{B4})$$

417 Substituting equation (18) into (B4), we obtain:

$$418 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = (1 - \psi)^{\frac{\beta}{\beta+1}} \quad (\text{B5})$$

419

420 Appendix C

$$421 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \lim_{\Phi_{sc} \rightarrow \infty} \frac{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} - \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}}{a} \quad (\text{C1})$$

422 Multiplying $1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} + \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}$ to the

423 denominator and numerator of the right hand side, equation (C1) leads to:

$$424 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{1}{a} \lim_{\Phi_{sc} \rightarrow \infty} \frac{\frac{2\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} - \frac{2(m+1)}{1-\psi} \Phi_{sc} + \frac{2a}{1-\psi} \Phi_{sc}}{1 + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} \Phi_{sc} + \sqrt{\left(1 + \frac{m+1}{1-\psi} \Phi_{sc}\right)^2 - 2am \left(\frac{\Phi_{sc}}{1-\psi}\right)^2 - \frac{2a}{1-\psi} \Phi_{sc}}} \quad (\text{C2})$$

425 Dividing Φ_{sc} in the denominator and numerator, we obtain:

$$426 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{1}{a(1-\psi)} \lim_{\Phi_{sc} \rightarrow \infty} \frac{2\sqrt{(m+1)^2 - 2am - 2(m+1) + 2a}}{\frac{1}{\Phi_{sc}} + \frac{\sqrt{(m+1)^2 - 2am}}{1-\psi} + \sqrt{\left(\frac{1}{\Phi_{sc}} + \frac{m+1}{1-\psi}\right)^2 - 2am\left(\frac{1}{1-\psi}\right)^2} - \frac{2a}{(1-\psi)\Phi_{sc}}} \quad (C3)$$

427 Therefore, the limit of $\frac{W}{P}$ as $\Phi_{sc} \rightarrow \infty$ is:

$$428 \quad \lim_{\Phi_{sc} \rightarrow \infty} \frac{W}{P} = \frac{\sqrt{(m+1)^2 - 2am + a - m - 1}}{a\sqrt{(m+1)^2 - 2am}} \quad (C4)$$

429

430 **Appendix D**

431 Substituting $a = 2\varepsilon(2 - \varepsilon)$ into equation (37), one can obtain:

$$432 \quad \frac{W}{P} = \frac{1 + \frac{S_b}{P} - \sqrt{\left(1 + \frac{S_b}{P}\right)^2 - 4\varepsilon(2-\varepsilon)\frac{S_b}{P}}}{2\varepsilon(2-\varepsilon)} \quad (D1)$$

433 Equation (D1) is the solution of the following quadratic function:

$$434 \quad \varepsilon(2 - \varepsilon) \left(\frac{W}{P}\right)^2 - \left(1 + \frac{S_b}{P}\right) \frac{W}{P} + \frac{S_b}{P} = 0 \quad (D2)$$

435 Multiplying P^2 at the both-hand sides of equation (D2), equation (D2) becomes:

$$436 \quad \varepsilon(2 - \varepsilon)W^2 - (P + S_b)W + S_bP = 0 \quad (D3)$$

437 Equation (D3) can be written as the following one:

$$438 \quad \frac{P-W}{P-\varepsilon W} = \frac{W-\varepsilon W}{S_b-\varepsilon W} \quad (D4)$$

439 Substituting $Q = P - W$ into equation (D4), we obtain the proportionality relationship of SCS-

440 CN method:

$$441 \quad \frac{Q}{P-\varepsilon W} = \frac{W-\varepsilon W}{S_b-\varepsilon W} \quad (D5)$$

442

443

444

445

446 **References**

447 Bartlett, M. S., A. J. Parolari, J. J. McDonnell, and A. Porporato (2016a), Beyond the SCS-CN
448 method: A theoretical framework for spatially lumped rainfall-runoff response, *Water*
449 *Resour. Res.*, 52, 4608–4627, doi:10.1002/2015WR018439.

450 Bartlett, M. S., A. J. Parolari, J. J. McDonnell, and A. Porporato (2016b), Framework for event-
451 based semidistributed modeling that unifies the SCS-CN method, VIC, PDM, and
452 TOPMODEL, *Water Resour. Res.*, 52, 7036 – 7052, doi:10.1002/2016WR019084.

453 Beven, K. J. (2011), *Rainfall-runoff modelling: the primer*, John Wiley & Sons.

454 Beven, K., and M. J. Kirkby (1979), A physically based, variable contributing area model of
455 basin hydrology, *Hydrol. Sci. J.*, 24(1), 43-69.

456 Bras, R. L. (1990), *Hydrology: an introduction to hydrologic science*, Addison Wesley
457 Publishing Company.

458 Budyko, M. I. (1974), *Climate and Life*, 508 pp., Academic Press, New York.

459 Chen, X., N. Alimohammadi, and D. Wang (2013), Modeling interannual variability of seasonal
460 evaporation and storage change based on the extended Budyko framework, *Water Resour.*
461 *Res.*, 49, doi:10.1002/wrcr.20493.

462 Easton, Z. M., D. R. Fuka, M. T. Walter, D. M. Cowan, E. M. Schneiderman, and T. S. Steenhuis
463 (2008), Re-conceptualizing the soil and water assessment tool (SWAT) model to predict
464 runoff from variable source areas, *J. Hydrol.*, 348(3), 279-291.

465 Gao, H., C. Birkel, M. Hrachowitz, D. Tetzlaff, C. Soulsby, and H. H. G. Savenije (2018), A
466 simple topography driven and calibration-free runoff generation module, *Hydrol. Earth*
467 *Syst. Sci. Discuss.*, <https://doi.org/10.5194/hess-2018-141>.

468 Huang, M., X. Liang, and Y. Liang (2003), A transferability study of model parameters for the
469 variable infiltration capacity land surface scheme, *J. Geophys. Res.*, 108(D22), 8864,
470 doi:10.1029/2003JD003676.

471 Hooshyar, M., and D. Wang (2016), An analytical solution of Richards' equation providing the
472 physical basis of SCS curve number method and its proportionality relationship, *Water*
473 *Resour. Res.*, 52(8), 6611-6620, doi: 10.1002/2016WR018885.

474 Liang, X., D. P. Lettenmaier, E. F. Wood, and S. J. Burges (1994), A simple hydrologically
475 based model of land surface water and energy fluxes for general circulation models, *J.*
476 *Geophys. Res.: Atmospheres*, 99(D7), 14415-14428.

477 Lyon, S. W., M. T. Walter, P. Gérard-Marchant, and T. S. Steenhuis (2004), Using a topographic
478 index to distribute variable source area runoff predicted with the SCS curve - number
479 equation, *Hydrol. Process.*, 18(15), 2757-2771.

480 Mishra, S. K., and V. P. Singh (1999), Another look at SCS-CN method, *J. Hydrol. Eng.*, 4(3),
481 257-264.

482 Mockus, V. (1972), *National Engineering Handbook Section 4, Hydrology*, NTIS.

483 Moore, R. J. (1985), The probability-distributed principle and runoff production at point and
484 basin scales, *Hydrol. Sci. J.*, 30, 273-297.

485 Ponce, V. (1996), Notes of my conversation with Vic Mockus, Unpublished material. Available
486 from: <http://mockus.sdsu.edu/>[Accessed 29 September 2017].

487 Ponce, V. M. and R. H. Hawkins (1996), Runoff curve number: has it reached maturity? *J.*
488 *Hydrol. Eng.*, 1(1), 9-20.

489 Porporato, A., E. Daly, and I. Rodriguez-Iturbe (2004), Soil Water Balance and Ecosystem
490 Response to Climate Change, *Am. Nat.*, 164(5), 625-632.

491 Sivapalan, M., K. Beven, E. F. Wood (1987), On hydrologic similarity: 2. A scaled model of
492 storm runoff production, *Water Resour. Res.*, 23(12), 2266–2278.

493 Steenhuis, T. S., M. Winchell, J. Rossing, J. A. Zollweg, and M. F. Walter (1995), SCS runoff
494 equation revisited for variable-source runoff areas, *J. Irrig. Drain. Eng.*, 121(3), 234-238.

495 Tang, Y., and D. Wang (2017), Evaluating the role of watershed properties in long-term water
496 balance through a Budyko equation based on two-stage partitioning of precipitation,
497 *Water Resour. Res.*, 53, 4142–4157, doi:10.1002/2016WR019920.

498 Wang, D. and Y. Tang (2014), A one-parameter Budyko model for water balance captures
499 emergent behavior in Darwinian hydrologic models, *Geophys. Res. Lett.*, 41, 4569–4577,
500 doi:10.1002/2014GL060509.

501 Wang, D., J. Zhao, Y. Tang, and M. Sivapalan (2015), A thermodynamic interpretation of
502 Budyko and L’vovich formulations of annual water balance: Proportionality hypothesis
503 and maximum entropy production, *Water Resour. Res.*, 51, 3007–3016,
504 doi:10.1002/2014WR016857.

505 Wood, E. F., D. P. Lettenmaier, and V. G. Zartarian (1992), A land - surface hydrology
506 parameterization with subgrid variability for general circulation models, *J. Geophys. Res.:*
507 *Atmospheres*, 97(D3), 2717-2728.

508 Yu, B. (1998), Theoretical justification of SCS method for runoff estimation, *J. Irrig. Drain.*
509 *Eng.*, 124(6), 306-310.

510 Zhao, R. (1977), *Flood forecasting method for humid regions of China*, East China College of
511 Hydraulic Engineering, Nanjing, China.

512 Zhao, R. (1992), The Xinanjiang model applied in China, *J. Hydrol.*, 135, 371-381.

513

514 **Figure captions:**

515 Figure 1: Wetting ratio $\left(\frac{W}{P}\right)$ versus soil storage index $\left(\frac{S_p}{P}\right)$ from the SCS-CN method based on

516 two parameterization schemes: $\lambda = \frac{W_i}{S_p - W_i}$ (scheme 1) and $\varepsilon = \frac{W_i}{W}$ (scheme 2).

517 Figure 2: The impact of β and the degree of initial storage ($\psi = S_0/S_b$) on soil wetting ratio
518 (W/P) .

519 Figure 3: The probability density functions (PDF) with different parameter values: (a) the
520 proposed PDF represented by equation (24); and (b) the power distribution of VIC model, i.e.,
521 equation (25).

522 Figure 4: The cumulative distribution functions (CDF) with different parameter values: (a) the
523 proposed distribution function represented by equation (26); and (b) the power distribution of
524 VIC model represented by equation (13).

525 Figure 5: The effects of the degree of initial storage ($\psi=0, 0.4, \text{ and } 0.6$) and shape parameter
526 ($a=0.6 \text{ and } 1.8$) on soil wetting in the modified SCS-CN method derived from the proposed
527 distribution function for soil water storage capacity.


528

529 Table 1: The boundary conditions of the functions for relating wetting ratio $\left(\frac{W}{P}\right)$ to soil storage
 530 index (Φ_{sc}): 1) the SCS-CN method; 2) the VIC type of model; and 3) the modified SCS-CN
 531 method based on the proposed new distribution for VIC type of model.

Event Scale Model	Lower Boundary Condition	Upper Boundary Condition
SCS-CN, parameterization of initial wetting, $\varepsilon = \frac{W_i}{W}$	$\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$	$\frac{W}{P} \rightarrow 1$ as $\Phi_{sc} \rightarrow \infty$
Power function for storage capacity distribution (VIC type of model)	$\frac{W}{P} = \Phi_{sc}$ when $\Phi_{sc} \leq a$	$\frac{W}{P} \rightarrow (1 - \psi)^{\frac{\beta}{\beta+1}}$ as $\Phi_{sc} \rightarrow \infty$
Modified SCS-CN method based on the proposed distribution for storage capacity	$\frac{W}{P} \rightarrow 0$ as $\Phi_{sc} \rightarrow 0$	$\frac{W}{P} \rightarrow \frac{\sqrt{(m+1)^2 - 2am} + a - m - 1}{a\sqrt{(m+1)^2 - 2am}}$ as $\Phi_{sc} \rightarrow \infty$

532

533

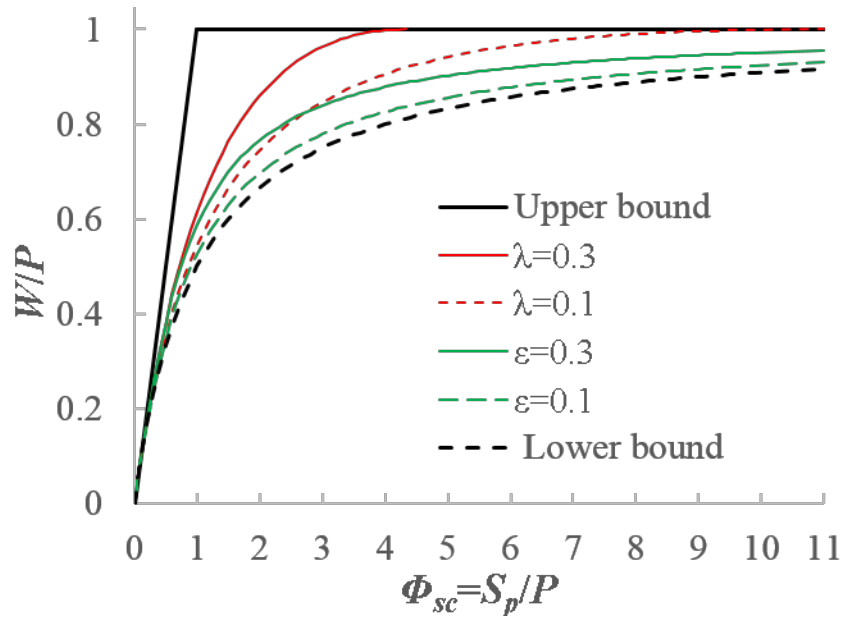


534

535 Figure 1: Wetting ratio $\left(\frac{W}{P}\right)$ versus soil storage index $\left(\frac{S_p}{P}\right)$ from the SCS-CN method based on
 536 two parameterization schemes: $\lambda = \frac{W_i}{S_p - W_i}$ (scheme 1) and $\epsilon = \frac{W_i}{W}$ (scheme 2).

537

538

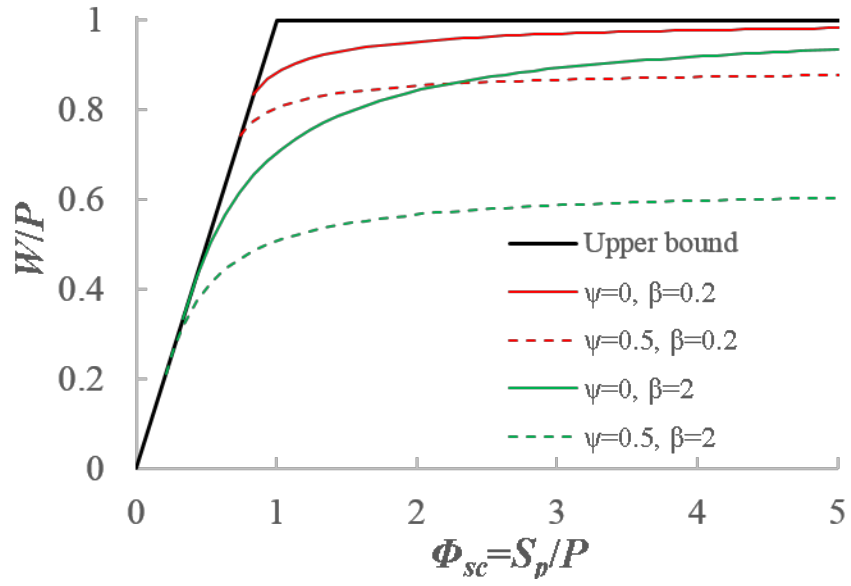


539

540 Figure 2: The impact of β and the degree of initial storage ($\psi = S_0/S_b$) on soil wetting ratio
 541 (W/P).

542

543

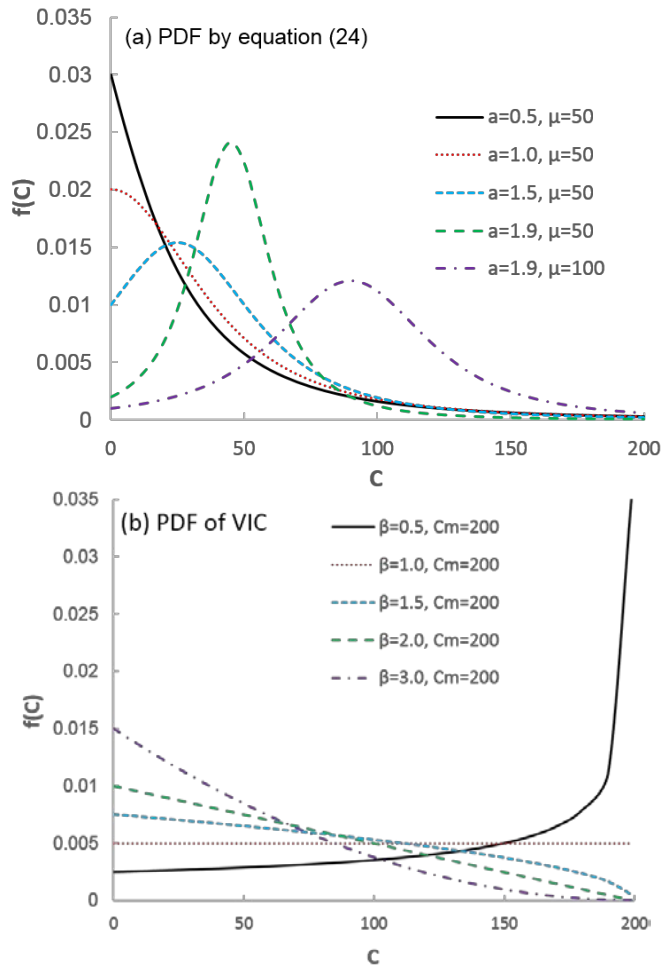

544


545

546 Figure 3: The probability density functions (PDF) with different parameter values: (a) the
 547 proposed PDF represented by equation (24); and (b) the power distribution of VIC model, i.e.,
 548 equation (25).

549

550

551

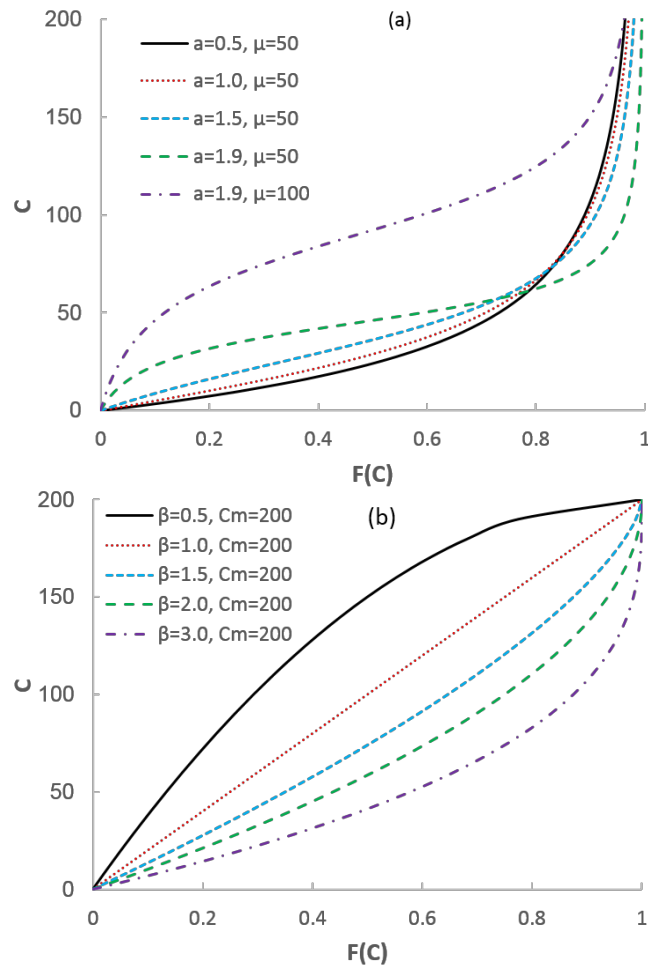

552


553

554

555

556

Figure 4: The cumulative distribution functions (CDF) with different parameter values: (a) the proposed distribution function represented by equation (26); and (b) the power distribution of VIC model represented by equation (13).

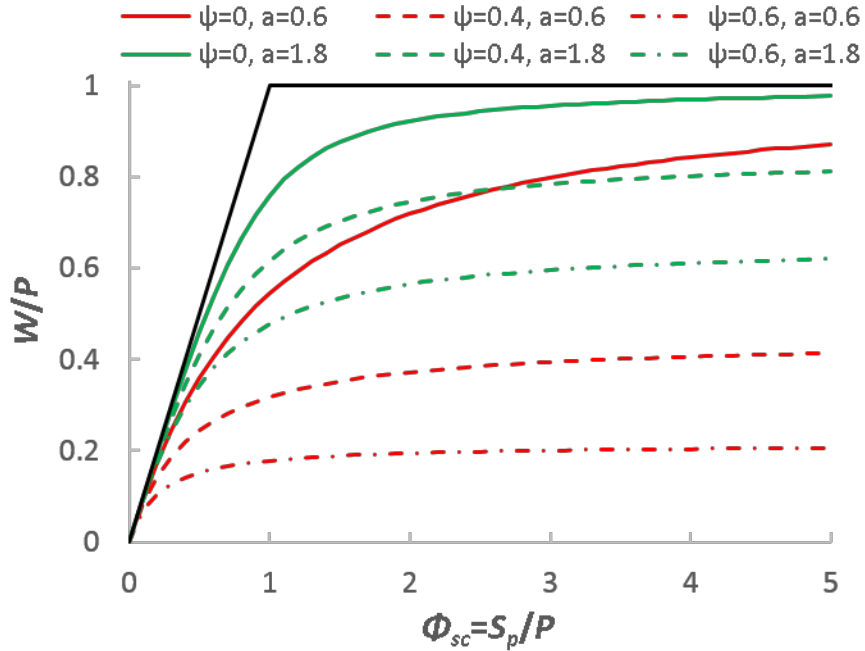


557

558 Figure 5: The effects of the degree of initial storage ($\psi=0, 0.4, \text{ and } 0.6$) and shape parameter
 559 ($a=0.6 \text{ and } 1.8$) on soil wetting in the modified SCS-CN method derived from the proposed
 560 distribution function for soil water storage capacity.

561

562

563

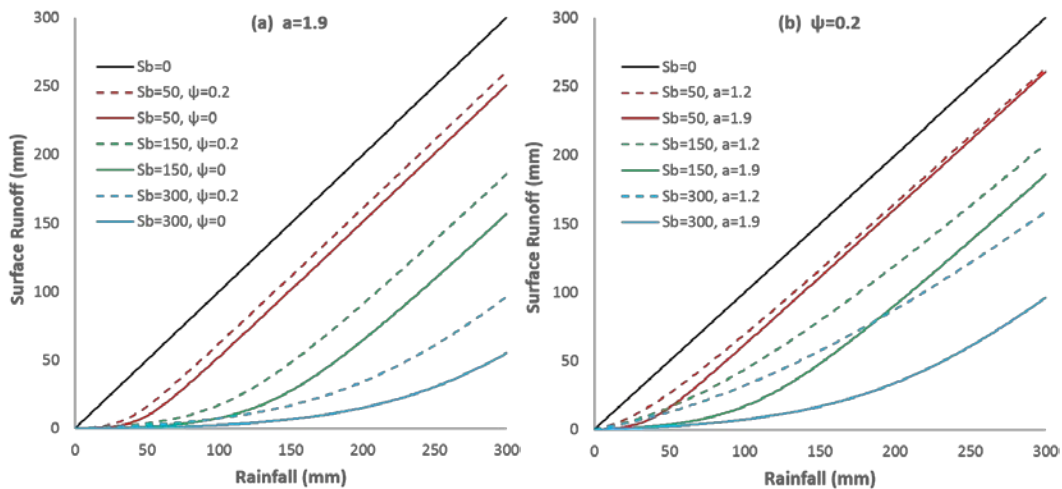

564

565 Figure 6: (a) The effects of average storage capacity and initial storage on rainfall-runoff relation;

566 and (b) The effects of average storage capacity and shape parameter on rainfall-runoff relation.