

Editor Decision: Publish subject to revisions (further review by editor and referees) (29 Apr 2019) by

Stan Schymanski

Comments to the Author:

Dear Dr. Rieger,

5 Both referees consider your manuscript valuable but still requiring improvements before publication. I am very grateful for the reviewers' extremely constructive approach and their contributions to help improve your article further, despite your partly confrontational responses to previous referee comments.

As suggested by Referee #4 and myself at an earlier stage, the arguments brought forward by the referees are likely thoughts that other readers will have as well and therefore it is not helpful to spend your effort in lengthy replies to the referees, but preferable to address the main points in the manuscript itself, for the benefit of the readership.

15 As an example, Referee #1 pointed out that **global hydrological models** (GHMs) are mentioned in the abstract, but no-where else. This is surprising, given your detailed discussion of this point in the previous round of review. Why was this discussion not included in the manuscript? Please include a concise discussion of the pros and cons of your approach in comparison to using GHMs for a similar analysis, as requested by Referee #1.

20 → [Implemented in Introduction and Conclusions](#)

Both Referee #2 in the previous round of review and Referee #4 in the current round pointed out that references to **groundwater** in this manuscript are misleading as **groundwater** may be disconnected from the hydrological processes considered here. Therefore I would like to ask you to carefully revise the article and remove or clarify any potentially misleading statements. Again, please do not rebut this point in your response but address it in the manuscript.

→ [Checked and changed](#)

After **conferring with Referee #4**, we agree that your discussion of Tourian et al. (2018) on P6L13-20 is adequate, so please disregard this comment.

All the other comments seem straightforward to address.

- 5 The inclusion of "**application to the Amazon basin**" in the title, as suggested by Referee #4, would also alleviate concerns about the untested claim of global applicability in the previous round of review.

At the same time, I agree with the suggestion to **shorten the title and abstract** and I am also not convinced that "phasing" and explicit mentioning of "Both the Catchment and the River Network" are
10 crucial in the title.

→ Title as agreed in the email

→ Abstract shortened

- 15 Please pay attention to a clean **organisation of the document**, as pointed out by both referees.

Indeed, Fig. 1 is part of the introduction, whereas it contains results generated as part of the present work if I am not mistaken, so it should be part of the results, and re-organised to be consistent with the flow of the main text.

It is also not obvious to me or referee #4 what data and theory Fig. 1 is actually based on.

- 20 → *Fig.1 is a result of Riegger and Tourian, 2014, (its Fig.2) and the respective recharge / discharge time series. It is data exclusively (no modelling) as described on P5 L24-34. It is the basis for the investigation of Tourian et al., 2018, the starting point of this investigation and is necessary for the motivation of a physical / conceptual description of the phase shift*

This would be much easier to clarify if it were part of the results, after all the concepts, equations and data needed for this figure have been explained.

- 25 If Fig. 1 is needed to discuss Tourian et al. (2018), then this discussion might be better placed in the discussion section, instead of the introduction.

→ *there is no need for a further discussion of Tourian et al. 2018.*

Conclusions have to be placed in a separate section, as described in the manuscript preparation instructions (see link below), so the last section has to be separated into two sections, Discussion followed by Conclusions, as has been pointed out before.

5 The conclusions may contain elements of the Summary and Outlook section, but there is no place for an explicit summary in HESS.

→ Restructuring: summary and outlook in “conclusions and discussions”

As pointed out by both referees, Section 6, "Data driven Determination of Drainable Storage volumes" is out of place. The equations given here are not referred to in the main text as far as I can see, so what
10 is their relevance?

→ “data driven determination” as mathematical method which had to be tested is integrated in chapter 3 “properties and optimization ..”

15

Please revise and re-organise the manuscript accordingly, while respecting the clear instructions given here: https://www.hydrology-and-earth-system-sciences.net/for_authors/manuscript_preparation.html.

For example: "Figure captions: Each illustration should have a concise but descriptive caption. The abbreviations used in the figure must be defined, unless they are common abbreviations or have already
20 been defined in the text. Figure captions should be included in the text file and not in the figure files."

→ checked

„Quantification of Drainable Water Storage Volumes on Landmasses and in River Networks based on GRACE and River Runoff using a Cascaded Storage Approach – First Application on Amazon”

Johannes Riegger ¹

5 ¹ Institute for Modelling Hydraulic and Environmental Systems, University of Stuttgart, Germany

Correspondence to: Johannes Riegger (Johannes.Riegger@iws.uni-stuttgart.de)

Abstract.

The knowledge of water storage volumes in catchments and in river networks leading to river discharge is essential for the description of river ecology, the prediction of floods and specifically for a sustainable management of water resources in the context of climate change. ~~Measurements of mass variations by the GRACE gravity satellite or by ground based observations of river or groundwater level variations do not permit the determination of the respective storage volumes, which could be considerably bigger than the mass variations themselves. In addition mass variations measured by GRACE comprise all time variant storage compartments whether they are hydraulically coupled, contributing to river discharge, or uncoupled like soil moisture, isolated surface water or snow and ice.~~

15 ~~For fully humid tropical conditions like the Amazon the relationship between GRACE and river discharge is linear with a phase shift. This permits to determine the hydraulic time constant and thus to quantify the total drainable storage directly from observed runoff, if the phase shift can be interpreted as the river time lag. Global Hydrological Models describe a large number of different storages storage compartments yet the determination of the time lag and the related river network storage still means a huge effort.~~ As a time lag can be described by a storage cascade, a lumped conceptual model with cascaded storages for the catchment and river network is set up here with individual hydraulic time constants and mathematically solved by piecewise analytical solutions.

25 Tests of the scheme with synthetic recharge time series show that a parameter optimization either versus mass anomalies or runoff reproduces the time constants for both, the catchment and the river network τ_C and τ_R in a unique way, and hence permits an individual quantification of the respective storage volumes. The application to the full Amazon basin leads to a very good fitting performance for total mass, river runoff and their phasing (Nash-Sutcliffe for signals 0.96, for monthly residuals 0.72). The calculated river network mass highly correlates (0.96 for signals, 0.76 for monthly residuals) with the observed flood area from GIEMS and corresponds to observed flood volumes. ~~This provides additional independent information for investigations on flood hydraulics.~~

Formatted: Not Highlight

The fitting performance versus GRACE permits to determine river runoff and Drainable storage volumes from recharge and GRACE exclusively i.e. even for ungauged catchments. An adjustment of the hydraulic time constants (τ_C , τ_R) on a training period facilitates a simple determination of Drainable storage volumes for other times directly from measured river discharge and/or GRACE and thus a closure of data gaps without the necessity of further model runs.

5 1 Introduction

In the context of water resources management and climate change there is an ongoing discussion on how to assess available water resources i.e. the storage volumes which can be used for water supply in a dynamic way beyond the limitations of sustainable extraction rates. The maximum average extraction rate for a sustainable use of water resources is limited by the long-term recharge of a catchment (Sophocleous, 1997, Bredehoeft, 1997), however, this rate based definition of groundwater stress only allows an assessment of water resources with respect to long-term sustainability and does not permit short term groundwater-management in order to satisfy specific water demands. Thus the knowledge of water resources involved in the water cycle contributing to river discharge such as parts of the groundwater or surface water system is essential. In addition, the knowledge of the storage volumes is essential for climate studies as it might lead to limitations in the water cycle.

Thus, the attempt was made by different authors to estimate available water resources by the volume of the respective groundwater storage (under the assumption that the contribution of surface water is comparably small). Korzun, 1978 and Naegele, 1969 provide estimates of total storage volumes across the global land masses (except for Greenland and Antarctica) based on very coarse assumptions for aquifers with homogeneous thickness and porosity. As a consequence the uncertainties cover orders of magnitude as Shiklomanov, 1993 Alley, 2006 and Famiglietti, 2014 are warning. The revision of these estimates by the introduction of specific yield instead of porosity for dominant soil classes together with the assumption of different saturated thicknesses in order to obtain the "Extractable" storage (Richey et al., 2015a, Alley, 2006) does not solve the problem of missing information on the contributing soils or aquifers in general. Regional storage estimates for specific aquifers derived from groundwater models (Cao et al., 2013) or measured estimates of saturated thickness and porosity (Williamson et al., 1989) are considered to deliver more realistic estimates for storage volumes, yet are sparsely distributed over the globe. However, for semi-arid and arid climate zones with very low recharge and/or deep aquifer systems with fossil water resources they deliver the best possible estimation at present. Richey et al., 2015b try to bypass the huge uncertainties in the quantification of total storage by the introduction of a "Total Groundwater Stress" indicator, which is defined by the time needed for the depletion of groundwater storage to a specified extent. It is determined by the ratio of an estimated total storage of a (sufficiently large) catchment and the measured trend in the mass anomalies given by GRACE.

Very little attention has so far been given to the quantification of the storage volumes of renewable water resources participating in the dynamic water cycle driven by precipitation P, actual evapotranspiration ET_a and river runoff R. The reason for this is seen in the problem that observations of time variant groundwater or river levels only permit the estimation of volume changes yet no absolute storage volumes, which could be considerably bigger.

5 Natural systems consist of many different storage components like canopy, snow/ice, surface, soil, unsaturated/saturated underground, drainage system etc. Direct measurements of storage volumes from water or pressure levels are problematic as they are based on assumptions and approximations. ~~Ground-based measurements of storages for example~~ They are based on point measurements and quite rare on large spatial scales compared to the heterogeneity scale of the respective compartments. This leads to large interpolation errors. In addition, the storage coefficients for porous media describing the
10 relationship between the measurable groundwater heads or capillary pressure on the one hand, and storage volume or absolute soil saturation on the other hand, are insufficiently known on large scales. Remote sensing data have been limited to near surface water storage (open water bodies, soil) up until now and are thus of limited benefit for the quantification of water storage with respect to accuracy and coverage due to methodological constraints (Schlesinger, 2007).

In contrast to discharge-less basins and/or arid areas, which are nearly exclusively driven by precipitation and
15 evapotranspiration, the storage dynamics of catchments draining into a river system allows to address the hydraulically coupled storage compartments via their contributions to river discharge. These comprise groundwater, surface water, the river network and temporarily inundated areas. All storages draining into the river system by gravity are referred to as “Drainable” storage here. So aquifers or parts of them not draining into the river system without an energy input are not considered here.

20 For time periods with no recharge hydraulically coupled storage components with a linear runoff storage (R-S) relationship lead to an exponential decrease in river discharge or streamflow depending on the related hydraulic time constant τ :

$$Q(t) = Q(t_0) \cdot e^{-\frac{t-t_0}{\tau}} \quad (1)$$

The corresponding total Drainable Storage in terms of mass density M_{storage} for any given time t_0 is then given by an infinite
25 temporal integration over river discharge $Q(t)$ from the corresponding catchment area A - called river Runoff $R(t) = Q(t)/A$ here - starting at time t_0 :

$$M_{\text{storage}}(t_0) = \frac{V_{\text{tot}}(t_0)}{A} = \frac{1}{A} \cdot \int_{t_0}^{\infty} Q(t) dt = \frac{Q(t_0)}{A} \cdot \int_{t_0}^{\infty} e^{-\frac{t-t_0}{\tau}} dt = \tau \cdot \frac{Q(t_0)}{A} = \tau \cdot R(t_0) \quad (2)$$

Contributions from several storage compartments (with individual time constants) superpose, if they drain in parallel and if
30 there is no feedback from the river system. For this case, there is a wide range of time series analysis methods (Tallaksen, 1995), which allow to separate the flow components into fast, medium or slow and the corresponding surface, interflow or

groundwater flow contributions according to their individual time constants. Thus, measurements of the different time constants allow to determine the Drainable Storage of the respective storage compartment and the corresponding mean Drainable Storage :

$$\bar{M}^x = \bar{R} \cdot \tau_x = \bar{N} \cdot \tau_x \quad (3)$$

5 from mean runoff R or recharge N.

On global scales the absolute storage volume of the Drainable Storages can be determined from runoff time series directly, if there are distinct and long enough periods of negligible or even negative recharge (actual evapotranspiration > precipitation) as it occurs in seasonally dry regions (Niger, Mekong, some Amazon sub-catchments etc.). From the purely exponential decrease in river discharge the time constant can be determined directly from a curve fit as shown in Fig.1b for Amazon sub-catchments. If the dry period is long enough the sequence of different time constants taken from the discharge curve even permits a discrimination between the fast response by overland flow and the slow response by the groundwater system.

10 Catchments with permanent input i.e. no periods of negligible recharge, however, do not show an exponential behaviour for discharge (Fig.1a). For these cases the hydraulic time constant cannot be taken from discharge dynamics directly, but has to be estimated by hydrological models. These intend to describe the large number of storages distributed over the catchment by the assumed processes and calibrate the involved parameters by their respective superposed flows versus the observed river discharge. The main difficulties in verifying large or Global Scale Hydrological Models or Land Surface Models (GHMs / LSMs) consist in the quantification of local individual storage volumes and related flows by local groundbased measurements. Thus, even though distributed hydrological models very much support an understanding of processes in the water cycle the limitation of the calibration versus river discharge exclusively introduces an ambiguity in the impact of contributing processes and the related storages and flows.

15 Since 2013 GRACE observations of the time-variable gravity field provide monthly distributions of mass density on large spatial scales >~ 200000km² (Tapley et al., 2004). However, as the water storage in different compartments (snow, ice, vegetation, soil, surface-, ground- water etc.) superposes with all other terrestrial (geophysical) masses, only the time variant part of the GRACE signal can be used to quantify the Terrestrial Water storage (TWS) anomalies (monthly mass signals minus long term average), but not the related absolute storage volumes. Nevertheless, this for the first time permits a direct comparison of measured TWS and observed river runoff R_o. Surprisingly some global hydrological models (GHMs) showed a considerable phase shift between measured mass anomalies by GRACE and river discharge as well as between calculated and measured runoff and an underestimation of mass signal amplitudes (Güntner et al., 2007, Chen et al., 2007, Schmidt et al., 2008, Werth et al., 2009, Werth et al., 2010) even though they comprise a large number of storages like soil, surface water, groundwater etc.

Formatted: Not Highlight

The direct comparison of GRACE anomalies and river runoff on large spatial and monthly time scales—by Riegger and Tourian, 2014, revealed that measured runoff-storage (R-S) diagrams show hysteresis curves of distinct form and extent (Fig.1a,b), which are characteristic for different climatic conditions (like fully humid, seasonally dry or boreal) and can be explained considering recharge and runoff properties (Fig.1c,d).

5 Thus for example, catchments in fully humid conditions (like the full Amazon basin upstream Obidos (295) and some of its sub-catchments like upstream Manacapuru (501)) with a permanent input i.e. only positive recharge (Fig.1e) show a counterclockwise hysteresis (Fig.1a). If this can be fully described by a positive phase shift, river runoff and storage behave like a Linear Time Invariant (LTI) system (Riegger and Tourian, 2014) i.e. the R-S relationship is linear, if the phase shift is adapted as shown in Fig.1a. For this case the hysteresis can be purely assigned to a time lag. Once the phase shift is adapted

10 the slope in the R-S diagram corresponds to the hydraulic time constant via $\tau = R/M$. The time constant and the reasonable assumption of a proportional R-S relationship (no runoff for empty storage) then facilitates the quantification of the Drainable Storage, (Eq. 3), i.e. the volume related to the hydraulically coupled storage compartment, which drains by gravity.

15

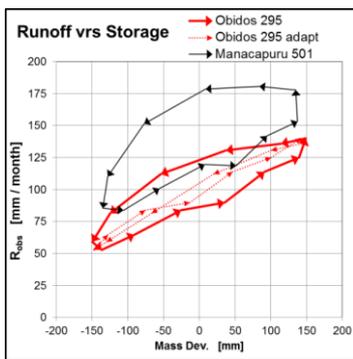


Fig.1a: R-S diagram with counter clockwise hysteresis for mean monthly observed runoff R_p versus GRACE dM for fully humid catchments incl. a phase adaption for Amazon upstream Obidos. (Riegger and Tourian, 2014)

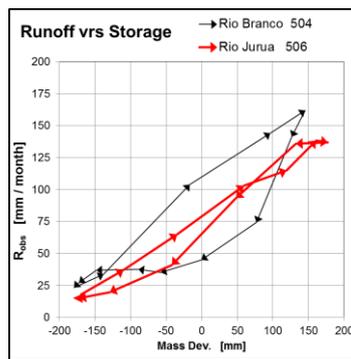


Fig.1b R-S diagram with clockwise hysteresis for mean monthly observed runoff R_p versus GRACE anomaly dM for seasonally dry catchments in the Amazon basin. (Riegger and Tourian, 2014)

Formatted: Not Highlight

Formatted: Font: Symbol, Italic

Formatted: Font: Italic

Formatted: Not Highlight

Formatted Table

Formatted: English (United States)

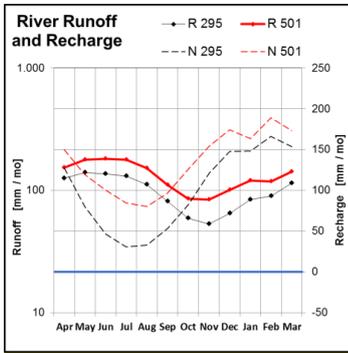


Fig.1c: Mean monthly Runoff R and Recharge N for fully humid catchments in the Amazon basin (Log scale for R)

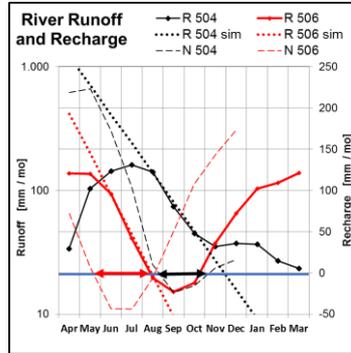


Fig.1d: Mean monthly Runoff R and Recharge N for seasonally dry catchments in the Amazon basin (Log scale for R) incl. exponential fittings for Runoff R_{sim}

Formatted: Centered

Formatted: Centered

In contrast, catchments with distinct periods of zero or negative recharge (like Niger, Mekong or Rio Branco (504), Rio Jurua (506) in the Amazon basin (Fig.1b)) show a clockwise hysteresis in the R-S diagram- and a form, which is determined by an increase in mass and runoff during wet periods, a decrease in mass and runoff with different slopes corresponding to different time constants and a possible mass loss without a related runoff (by negative recharge (Fig.1d) possibly by evapotranspiration from the soil zone) during dry periods. This type of hysteresis is determined by storage changes not connected with river discharge (uncoupled) and cannot be explained by a time lag as it is not causal.

Formatted: Not Highlight

Formatted: Not Highlight

The consequence from the above discussion is that the determination of the hydraulic time constant and thus the Drainable storage is only possible for catchments for which the hysteresis is fully explained by a positive phase shift i.e. uncoupled storages are either negligible or can be separated from GRACE mass by other means (as shown below for boreal regions);

Based on this method Tourian et al., (2018,) apply an adaption of the phase shift using a Hilbert transform in order to determine the hydraulic time constants and the total Drainable water storage for the sub catchments of the Amazon basin without a consideration of the form of the R-S hysteresis. To be shure, this leads to reasonable results for the sub catchments with permanent input (Fig.1 a, c) for which the time dependent uncoupled storage is negligible. However, for Rio Branco (504) or Rio Jurua (506) this condition is not fulfilled as the hysteresis is determined by mass changes in the uncoupled storage and by runoff with different time constants (Fig.1b, d). For these catchments the exclusive adjustment of the phase shift leads to negative time lags -(which are not physical -) and as a consequence to misleading time constants- and thus to considerable errors in the determination of Drainable storage volumes.

The accurate description of the R-S hysteresis of a catchment and its river network is the prerequisite for an accurate description of the system dynamics and the related storage volumes on the land masses (canopy, soil, overland flow, saturated / unsaturated underground) and in the river network.

5 Recent developments in river routing schemes of global hydrologic models with a hydrodynamic modelling of the flow in the river network system have successfully dealt with the description of phase shifts generated by the time lag in the river network (Paiva et al., 2013, Luo et al., 2017, Siqueira et al., 2018). Getirana et al., 2017a, emphasize the importance of integrating an adequate river routing schemes not only for an improved phase agreement with observed river discharge but also for an appropriate fit of the total mass amplitude to GRACE by the inclusion of the corresponding river network storage.

10 Yet a hydrodynamic modelling of a complete river network system for the determination of the river network time lag and storage means a huge modelling effort (Getirana et al., 2017b).

A far more simple approach is presented by Riegger and Tourian, 2014, describing the system by macroscopic variables summarizing all coupled storage compartments on landmasses and in the river network and analogously all uncoupled storage compartments in one respective single storage by their effect on the R-S relationship. The intention of such a “top-down” or lumped approach is to integrate the catchment scale water balance and describe the system by large scale variables and parameters, which are directly measurable or adjustable. For this purpose recharge based on moisture flux divergence or catchment water balance using GRACE can be used which are quite accurate, yet limited to global scales (see below). Thus, opposite to distributed hydrological models which are based on spatially / temporally distributed data (for

15 hydrometeorological input, local storage conditions in vegetation, soil and underground) and a detailed description of internal processes - which cannot be verified locally at present – this “top-down” approach uses measured catchment scale input, storages and runoff. Where necessary and possible catchment scale parameters are used to separate coupled and uncoupled storages (like MODIS snow coverage for boreal regions, Riegger and Tourian, 2014). In addition the time lag between storage and river discharge need not be explicitly described by an excessive routing scheme. Instead the related

20 phase shift can be adapted by mathematical methods. This leads to a description of the system behaviour with high accuracy (Nash Sutcliffe 0.97 for full Amazon) by an adaption of only two parameters, the hydraulic time scale and the phase shift, even though the physical cause of the phase shift is not addressed explicitly.

A disadvantage of the above approaches (Riegger and Tourian, 2014, Tourian et al., 2018) is that it does not permit to

30 quantify the individual Drainable storage volumes on landmasses and in the river network separately, but only the total Drainable volume of the catchment. The information contained in the phase shift or time lag is not used for a quantification of the river network storage volume. Yet, as observations of inundated areas in river networks such as from the GIEMS “Global Inundation Extent from Multi-Satellites” project (Prigent et al, 2007, Papa et al., 2008, Papa et al., 2013) and hydrodynamic models of the river network (Paiva et al., 2013, Getirana et al., 2017b, Siqueira et al., 2018) indicate a

considerable contribution of river network storage corresponding to a non negligible time lag, the river network storage must be considered in the integration of the total catchment water balance. As a sequence of storages (cascaded storages) leads to a time lag i.e. a phase shift (Nash, 1957), and storages draining in parallel (as for overland and groundwater flow) just lead to a superposition (with no time lag), a storage cascade is considered as an appropriate description to account for a time lag.

5

This paper explores the accuracy and uniqueness of a lumped, top down approach called “Cascaded storage approach” based on the integration of given recharge in the water balance utilizing a cascade of a catchment storage and a river network storage for a simple description of the observed time lag and the individual storage volumes. This permits to describe the system with a minimum number of macroscopic observation data and an adaption of only two parameters, the hydraulic time constants of the catchment and the river network. These time constants then could be used for nowcasts or even forecasts (within the time lag) of river discharge and/or Drainable storage volumes directly from measurements without the need for further modelling.

10

The paper is structured as follows: Section 2 presents the mathematical framework of piecewise analytical solutions of the water balance equation for a cascade of catchment and river network storages. It also contains the description of observables, which permit the comparison of calculated and measured values. The Single Storage approach is handled as the specific case for a negligible river network time constant. In section 3, the properties of the Cascaded Storage approach and its impact on the performance of the parameter optimization are described for synthetic recharge data and compared to the “Single Storage” approach. Based on the Cascaded Storage approach a fully data driven approach is presented which permits a simplified determination of the Drainable storage volumes directly from measurements without the need of further model runs. In section 4 the approach is applied to data from the Amazon basin and evaluated versus measurements of GRACE mass, river runoff and flood area from GIEMS. Conclusions are drawn in section 5 and discussed with respect to global applications of GSMs/LSMs. Possible future investigations in order to overcome limitations of the approach are sketched.

15

20

Formatted: Not Highlight

2 Mathematical framework

25

In order to investigate the impact of a non negligible river water storage on the time lag in the river system, the water balance of the total system comprising both the catchment and river network storage has to be considered. A conceptual model corresponding to a Nash cascade (Nash, 1957), called “Cascaded Storage” approach here, is set up with individual time constants for the different storages and with the following properties:

30

- Surface and the groundwater storages on the land mass of the catchment both fed by recharge and draining into the river network are summarized to a so-called “Catchment” storage M_C with time constant τ_C . Overland and groundwater flow are summarized to catchment runoff.

- Temporal variations of uncoupled storage compartments like soil or open water bodies are considered as negligible.
 - The river network storage M_R with time constant τ_R is assumed to be instantaneously distributed within the river network system. Internal routing effects, which might lead to an additional delay in streamflow response, are not considered.
- 5
- Any possible hydraulic feedback from the river to the catchment system is assumed to be negligible.

These conditions are chosen for conceptual and mathematical simplicity in this first approach here regardless of the necessity to address several coupled storages with different time constants and different uncoupled storage compartments for the general applicability with a global coverage. Thus, applications of this first approach are limited to catchments for which the hysteresis can be fully described by a time lag.

10

The following abbreviations are used in the mathematical description (Table.1):

Abbreviation	Description	Units: general / for application
N	recharge = (precipitation - actual evapotranspiration)	volume area ⁻¹ time ⁻¹ [mm month ⁻¹]
M_C	Storage mass catchment	mass density in equivalent water height [mm]
τ_C	Time constant catchment	time unit [month]
R_C	Runoff catchment	volume area ⁻¹ time ⁻¹ [mm month ⁻¹]
ω_{MC}	Phasing catchment mass	time unit [month]
M_R	Storage mass river network	mass density in equivalent water height [mm]
τ_R	Time constant river network	time unit [month]
R_R	Runoff river network	volume area ⁻¹ time ⁻¹ [mm month ⁻¹]
ω_{RR}	Phasing river network mass	time unit [month]
M_T	Storage mass total system	mass density in equivalent water height [mm]
τ_T	Time constant total system	time unit [month]
ω_{MT}	Phasing mass total system	time unit [month]
R_O	Observed river runoff	volume area ⁻¹ time ⁻¹ [mm month ⁻¹]
GRACE	GRACE mass anomaly	mass density in equivalent water height [mm]
GIEMS	Flood area	area [km ²]
Prefix "d"	indicates signal anomalies from long term mean (anomalies)	
Suffix "m"	indicates mean values on the intervals	

Table.1: Abbreviations in the mathematical descriptions:

The total system behaviour is described by two balance equations :

$$5 \quad 1. \quad \text{catchment storage} \quad \frac{\partial}{\partial t} M^C(t) = N(t) - R^C(t) = N(t) - \frac{1}{\tau_C} \cdot M^C(t) \quad (4)$$

$$\text{with } R^C(t) = \frac{1}{\tau_C} \cdot M^C(t) \quad (5)$$

$$2. \quad \text{river storage} \quad \frac{\partial}{\partial t} M^R(t) = R^C(t) - R^R(t) = R^C(t) - \frac{1}{\tau_R} \cdot M^R(t) \quad (6)$$

$$\text{with } R^R(t) = \frac{1}{\tau_R} \cdot M^R(t) \quad (7)$$

10 with a proportional R-S relationship for hydraulically coupled storages. N denotes the recharge as input, R_C the catchment runoff from the catchment storage M_C, which cannot be measured directly on large spatial scales, and R_R the river runoff from the river network storage M_R which can be measured at discharge gauging stations.

The water balance equation, Eq.(4), for the catchment is generally solved by:

$$M^C(t - t_0) = M^C(t_0) \cdot e^{-\frac{t-t_0}{\tau_C}} + \int_{t_0}^t N(w) \cdot e^{-\frac{w-t}{\tau_C}} \cdot dw \quad (8)$$

15 where M_C(t₀) is the initial condition and N(w) the time dependent recharge.

For recharge N(t) being given with a certain temporal resolution in time units or by periods of piecewise constant values and arbitrary length (stress periods) the recharge time series can be described as :

$$N(t) = \sum_{i=0}^{n-1} N_{i+1} \cdot \gamma_{i+1}(t) \quad \text{with} \quad \gamma_{i+1}(t) = \begin{cases} 1 & \text{for } t \in [t_i, t_{i+1}] \\ 0 & \text{for } t \notin [t_i, t_{i+1}] \end{cases} \quad \text{for each interval } [t_i, t_{i+1}] \quad (9)$$

20

For calculation convenience Eq. (8) can be solved successively for each stress period using the values at the end of the last period as starting value, which leads to the piecewise analytical solution for catchment mass for a time $t \in [t_i, t_{i+1}]$ in stress period $i+1$:

$$M_{i+1}^C(t - t_i) = M_i^C(t_i) \cdot e^{-\frac{t-t_i}{\tau_C}} + N_{i+1} \cdot \tau_C \cdot \left(1 - e^{-\frac{t-t_i}{\tau_C}} \right) : \quad (10)$$

The respective catchment runoff R_C based on Eq. (5) and M_C from Eq. (10) is used as input for the river network water balance, Eq.(6), and leads to the general solution for the river network storage M_R :

$$M^R(t-t_0) = M^R(t_0) \cdot e^{-\frac{t-t_0}{\tau_R}} + \int_{t_0}^t R^C(u) \cdot e^{-\frac{u-t}{\tau_R}} \cdot du \quad (11)$$

and the iterative solutions for time $t \in [t_i, t_{i+1}]$ in stress period $i+1$:

$$M_{i+1}^R(t-t_i) = M_i^R(t_i) \cdot e^{-\frac{t-t_i}{\tau_R}} + N_{i+1} \cdot \tau_R \cdot \left(1 - e^{-\frac{t-t_i}{\tau_R}} \right) + \left[M_i^C(t_i) - N_{i+1} \cdot \tau_C \right] \cdot \frac{\tau_R}{\tau_C - \tau_R} \cdot \left(e^{-\frac{t-t_i}{\tau_C}} - e^{-\frac{t-t_i}{\tau_R}} \right) \quad (12)$$

The total mass M_T is then given by :
$$M_i^T = M_i^C + M_i^R. \quad (13)$$

The mixed term in Eq. (12) and thus the total mass are commutative in (τ_C, τ_R) and show a singularity at $\tau_C = \tau_R$ with an asymptotic value. For $\tau_R > \tau_C$ solutions also exist with analogous values in total mass M_T for $M_R > M_C$.

10

It has to be emphasized here, that the piecewise analytical solutions for time periods of constant recharge provide a mathematical solution for an arbitrary temporal resolution without numerical limitations. Finite Difference solutions are limited by stability criteria $(t_{i+1}-t_i) < \tau$ and accuracy criteria $(t_{i+1}-t_i) < \tau/10$ for the smallest τ . Analytical solutions facilitate an exact calculation of the response of the river network during the time interval of constant recharge (though the time constant of the river network could be much shorter than the time interval or the time constant of the catchment). Thus avoid the very high temporal discretization, which otherwise would be needed using a Finite Difference scheme, is avoided.

15

The observables related to measurements by GRACE and discharge from gauging stations are the total mass anomaly dM_T and the river runoff R_R . GRACE observations with acceptable error are still limited to monthly resolution. Discharge as well as some of the meteorological inputs like precipitation, evapotranspiration or moisture flux divergence are often measured in daily values, some of the products in monthly values. For an optimal adaption to the monthly resolution of GRACE products, the approach presented here is based on monthly values but could also be applied to daily data without problems.

20

The mass values used in the calculations here are assigned to the interval boundaries while the values for monthly recharge and measured runoff are constant over the interval and temporally assigned to the centre of the interval. Thus, for a comparison of the calculated mass and runoff values versus the observed monthly values of GRACE and discharge the calculated values have to be averaged over the interval. As the dynamics follow an exponential behaviour the mean values cannot be taken from arithmetic averages at the interval boundaries but instead from an integral average over the interval.

25

Formatted: Not Highlight

The mean storage mass for M_X is given for each interval $[t_i, t_{i+1}]$ by :

$$\bar{M}_{i+1}^X = \frac{1}{t_{i+1} - t_i} \int_{t_i}^{t_{i+1}} M_{i+1}^X(t - t_i) \cdot dt \quad (14)$$

$$\text{leading to mean runoff } \bar{R}^X(t) = \frac{1}{\tau_X} \cdot \bar{M}^X(t) \quad (15)$$

i.e. mean catchment mass and runoff :

$$\bar{M}_{i+1}^C = (M_i^C - N_{i+1} \cdot \tau_C) \cdot \frac{\tau_C}{(t_{i+1} - t_i)} \left(1 - e^{-\frac{t_{i+1} - t_i}{\tau_C}} \right) + N_{i+1} \cdot \tau_C \quad (16)$$

$$\text{and } \bar{R}_i^C = \frac{1}{\tau_C} \cdot \bar{M}_i^C \quad (17)$$

and mean river mass and runoff :

$$\begin{aligned} \bar{M}_{i+1}^R &= (M_i^R - N_{i+1} \cdot \tau_R) \cdot \frac{\tau_R}{(t_{i+1} - t_i)} \left(1 - e^{-\frac{t_{i+1} - t_i}{\tau_R}} \right) + N_{i+1} \cdot \tau_R \\ &+ \frac{[M_i^C - N_{i+1} \cdot \tau_C]}{(t_{i+1} - t_i)} \cdot \frac{\tau_R}{\tau_C - \tau_R} \left(\tau_R \cdot e^{-\frac{t_{i+1} - t_i}{\tau_R}} - \tau_C \cdot e^{-\frac{t_{i+1} - t_i}{\tau_C}} + (\tau_C - \tau_R) \right) \end{aligned} \quad (18)$$

10 The Observables, which allow a comparison to measured data are :

- average river runoff $\bar{R}_i^R = \frac{1}{\tau_R} \cdot \bar{M}_i^R$ corresponding to measured monthly runoff (19)

- average total mass $\bar{M}_i^T = \bar{M}_i^C + \bar{M}_i^R$ corresponding to monthly GRACE data (20)


The equations Eq. (10) - Eq. (20) are self-consistent, i.e. the corresponding balance equations are fulfilled with :

$$15 \quad \frac{M_{i+1}^T(t - t_i) - M_i^T}{(t - t_i)} + \bar{R}_{i+1}^R(t - t_i) = N_{i+1} \quad (21)$$

For the Single Storage approach the above piecewise analytical solutions of the Cascaded Storage approach, Eq. (8) - Eq. (21), are used for $\tau_R \ll \tau_C$ (here $\tau_R = 10^{-3}$ months). For this case the river network mass is negligible compared to the catchment mass.

3 Properties and optimization performance

For the evaluation of the parameter optimization performance of the Cascaded Storage approach an example with synthetic recharge as input is investigated. This permits the quantification of the uniqueness and accuracy of the parameter estimation undisturbed by noise. It also facilitates the discrimination of errors in the calculation scheme itself and impacts arising from undistributed processes when compared to real world data. For an application to GRACE measurements the main question is if and why the time constants τ_C and τ_R can be determined independently by an optimization versus anomalies in total mass and/or river runoff. Thus, in order to understand the optimization results with respect to uniqueness the general properties of the approach are presented and discussed first. For the synthetic case a recharge time series of sinusoidal form with a period of 12 arbitrary time units and length units with an amplitude and mean value of one is used as the driving force and the calculation is run until equilibrium is reached. The example in Fig.2 shows the effect of a non negligible river network time constant $\tau_R = 2.5$ time units for a catchment time constant $\tau_C = 3$ time units which leads to an increase in total mass $M_T(t) = M_C(t) + M_R(t)$ with respect to the average level and signal amplitude and to a phase shift between total mass M_T and river mass M_R i.e. the corresponding river runoff R_R .

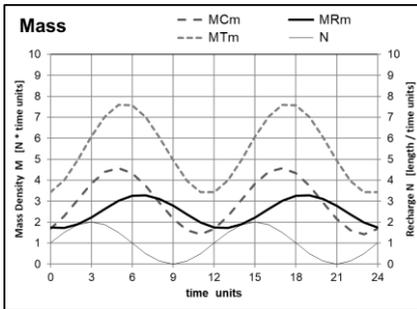

15 Fig.2: Time series of Recharge N, catchment mass M_C , river network mass M_R , and Total masses M_T for the synthetic case at equilibrium

In order to describe the general behaviour of the mass and runoff time series and their dependence on τ_C and τ_R , their properties are summarized here in the form of statistical values for the synthetic case with the sinusoidal recharge in equilibrium. This helps to understand why unique values for the time constants are achieved in the parameter optimization process. The values of time constants τ_C and τ_R used for the statistical description cover a wide range from 0.1 to 100 time units and are combined independently.

20

3.1 Catchment and river mass

Based on the mean mass values, Eq.(14), (16), (18), of each stress period the long term averages for the storage compartments are given by :


$$\bar{M}^C = \bar{N} \cdot \tau_C \quad \bar{M}^R = \bar{N} \cdot \tau_R \quad \bar{M}^T = \bar{N} \cdot (\tau_C + \tau_R) \quad (22a,b,c)$$

- 5 For $\tau_R \ll \tau_C$ (here $\tau_R = 10^{-3}$) the river network mass is negligible and the solution corresponds to a Single Storage approach. For a non negligible river network storage the given average values for total mass M_T mean that the effective “total” time constant is given by the sum of the catchment and river time constants $\tau_T = \tau_C + \tau_R$, which means that the total mass M_T observed by GRACE is bigger than the mass M_C calculated for the catchments alone. However, Equation (22c) cannot be used for the determination of $\tau_T = \tau_C + \tau_R$ from GRACE measurements directly as GRACE only provides mass anomalies.

10

The relative signal amplitudes (standard deviations normalized with those of the respective input) of both the catchment mass M_C or river mass M_R show the same functional form $\sigma_{MC} / \sigma_N \sim \sigma_{MR} / \sigma_{RC} = \text{stdev}(M_C) / N$ for the respective time constants τ_C or τ_R (Fig.3, $\tau_R = 10^{-3}$) with a monotonous increase to an asymptotic value $\sigma_{MC} / \sigma_N \sim \sigma_{MR} / \sigma_{RC} = 2$ which is reached at about one full period of the input. The superposition of the signal amplitudes for the observable total mass $M_T(t)$

- 15 $= M_C(t) + M_R(t)$ leads to a complex behaviour for $\sigma_{MT} / \sigma_N(\tau_C, \tau_R)$ (Fig.3), if the river time constant τ_R is not negligible ($\tau_R = 10^{-3}$) and especially if it gets close to τ_C .

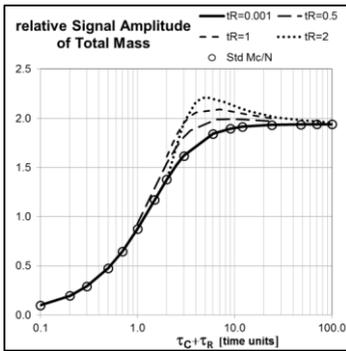

20 Fig.3: Signal Amplitudes of Total mass normalized by recharge: σ_{MT} / σ_N versus total mass time constant $\tau_T = \tau_C + \tau_R$ for different river time constants τ_R

3.2 Catchment and river runoff

The calculated long term averages of the runoff contributions R_C and R_R correspond to the ones of the water balance equations, Eq.(4), (6), given by the mean recharge and thus are not dependent on the time constants.

$$\bar{R}^R(t) = \bar{R}^C(t) = \bar{N} \quad (23)$$

5 Thus, an observed long term average of runoff does not permit the determination of the time constant and hence the storage volume, Eq. (22).

The relative signal amplitudes of both, catchment and river runoff (normalized with the respective input σ_{RC}/σ_N and σ_{RR}/σ_{RC} show the same functional form corresponding to a Single Storage approach (Fig.4, $\tau_R = 10^{-3}$) and decrease monotonously with the respective time constants τ_C and τ_R to an asymptotic zero. However, the signal amplitude of the observable river

10 runoff $\sigma_{RR}/\sigma_N(\tau_C + \tau_R)$, normalized with recharge N , shows a deviations for different τ_C and τ_R with the same $\tau_C + \tau_R$ (Fig.4).

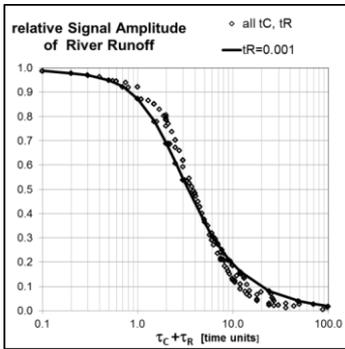


Fig.4: Signal Amplitudes for river runoff normalized by recharge: σ_{RR}/σ_N versus total mass time constant $\tau_T = \tau_C + \tau_R$ for combinations in (τ_C, τ_R)

15

Both observables, total mass and river runoff, show a non unique behaviour with respect to combinations in (τ_C, τ_R) for the same $\tau_T = \tau_C + \tau_R$ and considerable deviations from the Single Storage approach ($\tau_R = 10^{-3}$). Measurements of the signal amplitudes thus only provide coarse estimates of the total time constant τ_T , yet do not permit distinction between τ_R and τ_C and between catchment and river network storage.

20 However, so far, only the signal amplitudes are examined, but not the specific properties of the time series, i.e. the dynamic response to input signals in form and phase. The convolution in the solution of the balance equation, Eq.(8) and (11), leads to a different phasing with respect to the input $N(t)$, which can be utilized for a separation of the respective time constants.

3.3 Phasing

For the synthetic example with a sinusoidal recharge time series $N(t)$ as input the phasing ω of the different response signals is determined by the fit of a sinusoidal function (Fig.5). This facilitates the easy determination of the phasing and thus the relative phase shift $\Delta\omega$ between the signals. Masses and the related runoffs are in phase for the same storage compartments, Eq.(15). For a negligible river network time constant ($\tau_R = 10^{-3}$) river runoff R_R is in phase with the catchment storage M_C .

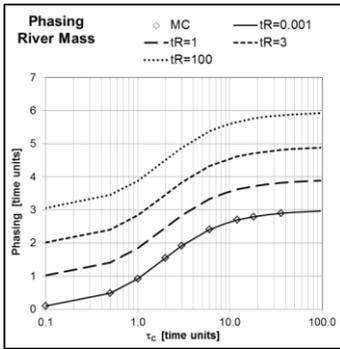


Fig.5: Phasing of river network mass with respect to recharge time series displayed versus τ_C for different τ_R

The functional form of the phasing ω_{MC} for the catchment mass M_C or the corresponding runoff R_C relative to recharge $N(t)$ (Fig.5) can be empirically described by the monotonous function :

$$\omega_{MC}(\tau_C) = \omega_{\max} \left(1 - e^{-\frac{\tau_C}{\lambda}} \right) \quad (24)$$


with the empirical parameters $\omega_{\max} = 2,8$ and $\lambda = 2,7$ and an error $\varepsilon < .2\%$ relative to the maximum.

As the catchment runoff R_C with the phasing ω_{MC} serves as input into the river system, the phasing of the river system with respect to to catchment runoff R_C , which has the same functional form as Eq. (24), is added on top of it (Fig.5). The resulting phasing of the river network storage or river runoff is thus given by a superposition in the form:

$$\omega_{RR}(\tau_C, \tau_R) = \omega_{\max} \left(1 - e^{-\frac{\tau_C}{\lambda}} \right) + \omega_{\max} \left(1 - e^{-\frac{\tau_R}{\lambda}} \right) \quad (25)$$

for any combination (τ_C, τ_R) and with the same empirical parameters as in Eq. (24).

As total mass $M_T(t) = M_C(t) + M_R(t)$ is the superposition of the signals with the respective amplitudes and phasing, the phasing of total mass $M_T(t)$ is situated between catchment and the river system mass according to τ_R . This means that for non negligible river network mass ($\tau_R > 0$) a phase shift between total mass (GRACE) and observed river discharge and also between total mass and modelled catchment mass must occur. The phasing of total mass $M_T(t)$ for all combinations (τ_C, τ_R) Fig.6 shows the same functional form as ω_{MC} and ω_{MR} , Eq.(24), (25) if displayed versus the total time constant $\tau_T = \tau_C + \tau_R$.

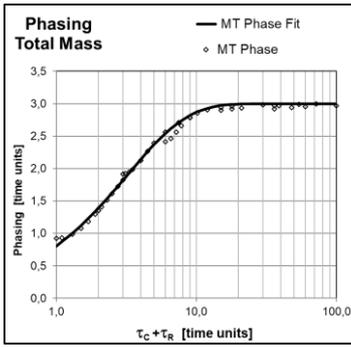

10 Fig.6: Phasing of Total mass versus total time constant $\tau_T = \tau_C + \tau_R$

It can be approximated by the fitting function M_T fit :

$$\omega_{MT}(\tau_C, \tau_R) = \omega_{\max} \left(1 - e^{-\frac{\tau_C + \tau_R}{\lambda}} \right) \quad (26)$$

with the empirical parameters $\omega_{\max} = 2,95$ and $\lambda = 3.2$

15

The phase shift between GRACE total mass and river runoff is thus given by :

$$\Delta\omega(\tau_C, \tau_R) = \omega_{RR} - \omega_{MT} = \omega_{\max} \left(1 - e^{-\frac{\tau_C}{\lambda}} \right) + \omega_{\max} \left(1 - e^{-\frac{\tau_R}{\lambda}} \right) - \omega_{\max} \left(1 - e^{-\frac{\tau_C + \tau_R}{\lambda}} \right) \quad (27)$$

20 The empirical phase shift $\Delta\omega$ from Eq.27 corresponds to the one determined by a phase adaption $\Delta\omega_{\text{adapt}}$ (Eq. 38 & 39) of total mass and runoff within $\sim 5\%$ (see supplement). This in principle allows for a determination of τ_C and τ_R separately from the adapted phase shift $\Delta\omega_{\text{adapt}}$ and the total mass time constant $\tau_T = \tau_C + \tau_R$ according to Eq. (27). However, errors

introduced by the linear interpolation used for the adaption of the phase shift lead to a much lower accuracy than the parameter estimation via the time series.

3.4 Parameter estimation

5 The analytical solutions for synthetic recharge time series –permit the evaluation of the uniqueness and accuracy of the parameter optimization for given observables independent from limitations in the accuracy of numerical schemes and independent from noise in real world data sets. For given combinations (τ_C, τ_R) the analytical solutions are used as synthetic measurements and are fitted with the same algorithm in order to retrieve the fit parameters $(\underline{\tau}_C, \underline{\tau}_R)$.

As the total mass M_T , Eq.(20), and the phasing, Eq.(25-27), are commutative in (τ_C, τ_R) , either the data range $\tau_R < \tau_C$ or $\tau_R > \tau_C$ has to be used for a unique optimization. This is realized via an additional constraint in the optimization. For the discussion here the condition $\tau_R < \tau_C$ is used, which hydrologically reflects the more frequent situations that the inundation volume is smaller than the catchment storage but the results can also be applied to $\tau_R > \tau_C$, which might be the case in flat areas with a dense river network (such as the Amazon), which typically leads to temporarily inundated areas.

As absolute signal values are not relevant for the determination of the time constant from runoff or not available for GRACE data, the optimization versus the respective time series is based on signal amplitudes and the phasing. Thus, for a unique determination of $(\underline{\tau}_C, \underline{\tau}_R)$ the following conditions have to be fulfilled:

a) Optimization versus runoff

$$\sigma_{RR} / \sigma_N(\widehat{\tau}_C, \widehat{\tau}_R) = \sigma_{RR} / \sigma_N(\tau_C + \tau_R) \quad (28)$$

20

$$\omega_{RR}(\widehat{\tau}_C, \widehat{\tau}_R) = \omega_{\max} \left(1 - e^{-\frac{\tau_C}{\lambda}} \right) + \omega_{\max} \left(1 - e^{-\frac{\tau_R}{\lambda}} \right) \quad (29)$$

b) Optimization versus mass anomalies

$$\sigma_{MT} / \sigma_N(\widehat{\tau}_C, \widehat{\tau}_R) = \sigma_{MT} / \sigma_N(\tau_C, \tau_R) \quad (30)$$

25

$$\widehat{\omega}_{MT}(\widehat{\tau}_C, \widehat{\tau}_R) = \omega_{MT}(\tau_C + \tau_R) = \omega_{\max} \left(1 - e^{-\frac{\tau_C + \tau_R}{\lambda}} \right) \quad (31)$$

With the constraints $\tau_R < \tau_C$ or $\tau_R > \tau_C$ there is only one $(\underline{\tau}_C, \underline{\tau}_R)$ fulfilling the respective conditions, thus leading to unique solutions. The optimization delivers RMSE errors for the time series in the range $10^{-8} - 10^{-7}$ and estimated time constants $(\underline{\tau}_C, \underline{\tau}_R)$ with a relative error $\varepsilon(\underline{\tau}_X)/\tau_X$ which does not depend on absolute values of (τ_C, τ_R) but on their ratio τ_R/τ_C (Fig.7).

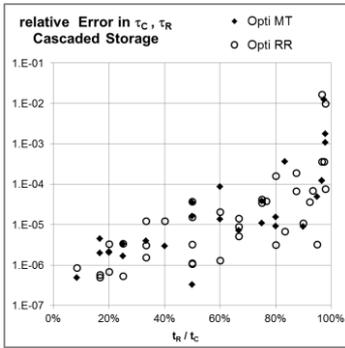


Fig.7: Relative error $\varepsilon(\underline{\tau}_X)/\tau_X$ of the time constants τ_C and τ_R for the Cascaded Storage approach with an optimizations versus Total mass M_T or versus river runoff R_R .

For the synthetic case relative errors $\varepsilon(\tau_X)/\tau_X$ are very small ($\sim 10^{-7}$ at $\tau_R/\tau_C \sim 0$) and show an exponential increase to a maximum of $\sim 1\%$ at $\tau_R \sim \tau_C$. The error for $\tau_R < \tau_C$ is analogous to $\tau_R > \tau_C$ and equal for an optimization versus runoff or mass anomalies .

For catchments showing a phase shift between total mass and runoff the description of the system by a Single Storage approach ($\tau_R = 10^{-3}$) leads to a considerably higher relative error $\varepsilon(\underline{\tau}_X)/\tau_X$ in the estimated time constant $\underline{\tau}_C \sim (\tau_C + \tau_R)$ and thus also in Drainable Storage volume. It follows a power function and corresponds to $\varepsilon < 10\%$ for $\underline{\tau}_C < 3$ and $\varepsilon > 40\%$ for $\underline{\tau}_C > 6$. For this case the optimization versus river runoff or mass anomalies leads to different total time constants (rel. Diff. $\varepsilon > 7\%$ for $\underline{\tau}_C > 5$). Even though this might look like an acceptable result for $\underline{\tau}_C < 3$, there are still inevitable deviations in signal amplitudes (10-20%) and phasing between the modelled and measured signals for both total mass and river runoff time series.

It can be summarized that in contrast to the Single Storage approach the Cascaded Storage approach permits the determination of both time constants (τ_C, τ_R) independently in a unique, highly accurate way for optimizations with respect to either total mass anomalies or river runoff. However, it has to be mentioned that even though the theoretical error in time constants remains below 1% for $\tau_R \sim \tau_C$, the ambiguity for $\tau_R < \tau_C$ or $\tau_R > \tau_C$ cannot be solved without further information on the volume of the river network.

3.5 Fully data driven Determination of Drainable Storage volumes

For the case that river discharge is available for a sufficient period of time the Cascaded storage approach facilitates a simple determination of the Drainable water storage volumes both for the catchment and for the river network directly from observations without the necessity of new model runs. The two time constants (τ_C, τ_R) adapted during a training period permit to quantify the Drainable water storage volumes M_T, M_C and M_R at other times directly from observations of GRACE mass anomalies and river discharge. With a simple numerical adaption of the phase shift $\Delta\omega$ resulting from the time constants (τ_C, τ_R) according to EQ.27 a quite accurate determination of the total Drainable storage volume from measured river discharge exclusively or the other way round of runoff from GRACE mass anomalies is possible.

These can be determined by the following calculations :

1. Long term averages of Drainable storage volumes from observed runoff R_o :

$$\overline{M}_{sim}^C = \tau_C \cdot \overline{R}_o \quad \overline{M}_{sim}^R = \tau_R \cdot \overline{R}_o \quad \overline{M}_{sim}^T = \tau_T \cdot \overline{R}_o \quad \text{with } \overline{R}_o = \overline{N} \quad \text{and } \tau_T = \tau_C + \tau_R$$

according to Eq. (22a,b,c) and Eq. (23) :

- Field Code Changed
- Field Code Changed
- Field Code Changed
- Field Code Changed

2. Time series of Drainable storage volumes from GRACE and observed runoff R_o without the need for a phase adaption:

$$M_{sim}^R(t) = \tau_R \cdot R_o(t) \quad (35)$$

(NSS 0.961, NSR 0.576, corrR 0.859 vs M_R from Eq.18)

- Field Code Changed

$$M_{sim}^T(t) = dM^T(t) + \overline{M}^T = GRACE(t) + \overline{M}^T = GRACE(t) + \tau_T \cdot \overline{N} = GRACE(t) + \tau_T \cdot \overline{R}_o \quad (36)$$

(NSS 0.973, NSR 0.751, corrR 0.901 vs M_T from Eq.20)

- Field Code Changed

Formatted: Indent: Left: 7.62 cm

$$M_{sim}^C(t) = M^T(t) - M^R(t) = GRACE(t) + \tau_T \cdot \overline{R}_o - \tau_R \cdot R_o(t) \quad (37)$$

(NSS 0.906, NSR -0.065, corrR 0.607 vs M_C from Eq.16)

- Field Code Changed

The simplified calculations directly based on observations lead to accurate equivalences to the fully calculated time series of total and the river network storage volumes M_T and M_R and to a reasonable description of the catchment storage volumes M_C .

3. Time series of total Drainable storage volumes M_T , directly from observed runoff R_o

or simulated river runoff R_{sim}^R from GRACE with a numerical phase adaption of $\Delta\omega$.

Use of the phase shift $\Delta\omega_{adapt}$ adapted between GRACE and observed river runoff by a linear temporal interpolation (Riegger and Tourian, 2014) permits a simple description of river runoff directly from GRACE (Eq.38) or of total Drainable water storage M_T directly from observed runoff (Eq.39) and corresponds to $\Delta\omega$ from Eq.27 within $\ll 10\%$. Both lead to very similar fitting performances.

$$R_{sim}^R(t_i) = \frac{1}{\tau_T} \cdot \left[(1 - \Delta\omega) \cdot GRACE(t_i) + \Delta\omega \cdot GRACE(t_{i-1}) + \tau_T \cdot \bar{R}_o \right] \quad (38)$$

(NSS 0.943, NSR 0.698, corrR 0.864 vs measured $R_{o,i}$)

$$M_{sim}^T(t_i) = \tau_T \cdot \left[(1 - \Delta\omega) \cdot R_o(t_i) + \Delta\omega \cdot R_o(t_{i+1}) \right] \quad (39)$$

(NSS 0.946, NSR 0.483, corrR 0.859 vs GRACE)

For the representativeness of the fitting performance the fully data driven approach (Eq.35-Eq.39) is compared to the respective masses and runoff from the Cascaded storage approach applied to the Amazon basin (see below) and not to synthetic data. The related calculations are accessible in the xls-workbook provided in the supplement.

This performance means that the determination of the two time constants (τ_C, τ_R) by the Cascaded storage approach during a sufficient training period facilitates a simple quantification of Drainable storage volume or runoff time series directly from measured river discharge or GRACE anomalies. This provides a possibility to close data gaps in river discharge or GRACE directly from measurements with high accuracy.

4 Application to the Amazon catchment

The R-S diagram of the full Amazon basin shows a hysteresis (Fig.1b, d) corresponding to a phase shift, which can be interpreted as the time lag of river discharge. The Amazon basin upstream Obidos is situated in a fully humid tropic environment with permanent, yet variable recharge and is large enough (4704394km^2) for low noise levels in the signals of GRACE and moisture flux divergence. With permanent recharge flow contributions from overland flow and groundwater cannot be distinguished in the discharge curve. Also, on a spatial average over the full Amazon basin, with permanent recharge the uncoupled storages (like soil water storage, open water bodies etc.) are not time variant, i.e. there is no dry out effect. Any contribution from time dependent, uncoupled storages could be recognized in the R-S diagram as it would appear

Field Code Changed

Field Code Changed

Formatted: Not Highlight

Formatted: Indent: Left: 8.89 cm, First line: 0 cm

Formatted: Not Highlight

as a hysteresis, which does not correspond to a time lag, or by the respective deviations in the scatter plots of calculated versus measured runoff or storage volumes (see supplement). This is not the case.

Generally recharge from different approaches and products can serve as input to the system such as :

5 1.
$$N(t) = P(t) - ET(t) \quad (32)$$

from the hydrometeorological products precipitation P and actual evapotranspiration ETa

2.
$$N(t) = -\nabla \cdot \bar{Q} \quad (33)$$

from atmospheric data, with monthly vertically integrated moisture flux divergence viMFD

3.
$$N(t) = \frac{\partial}{\partial t} M(t) + R(t) \quad (34)$$

10 from the terrestrial water balance with monthly temporal derivatives of GRACE measurements and measured river runoff R_o of the catchment.

Here recharge [mm/month] is taken either from the water balance, Eq.(34), or from moisture flux divergence, Eq.(33), provided by ERA-INTERIM of ECMWF and processed by the Institute of Meteorology and Climate Research, Garmisch, Germany. For GRACE mass anomalies data from GeoForschungsZentrum GFZ Potsdam Release 5 are used in mm equivalent water height. Both are handled as described in detail in Riegger and Tourian, 2014. Their spatial resolution limits the application of the approach to global scales $\gg 200000\text{km}^2$. River discharge is taken from the ORE HYBAM project (<http://ore-hybam.org>) and converted to runoff [mm/month] by normalization with the catchment area. For a comparison of the calculated river network storage with observations from the “Global Inundation Extent from Multi-Satellite GIEMS (Prigent et al., 2001) flood area [km²] is used. As GRACE mass anomalies are most accurate for a monthly time resolution at present, the other data sets are aggregated to a monthly resolution as well. For the parameter optimization time series of river runoff and GRACE mass anomalies are used for the time period from January 2004 until January 2009. Monthly runoff and the storage volume of the catchment and river network are calculated for Amazon based on different recharge products here and optimized either versus runoff or GRACE mass anomalies . The results calculated with recharge from the terrestrial water balance optimized versus GRACE are shown in Figures 8-10 for both (a) the monthly signal and (b) the monthly residual (monthly value minus mean monthly value) for January 2003-2009 .

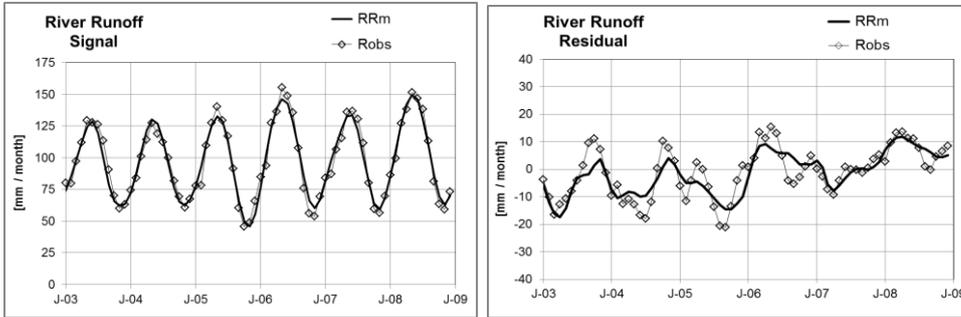


Fig.8: Time series of river runoff for the Amazon basin (Obidos) and optimization versus GRACE (a) for the signal (b) for the residual

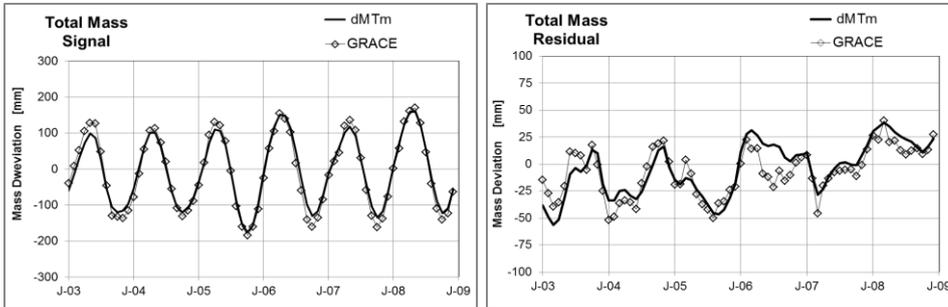


Fig.9: Time series of Total mass anomalies for the Amazon and optimization versus GRACE (a) for the signal (b) for the residual

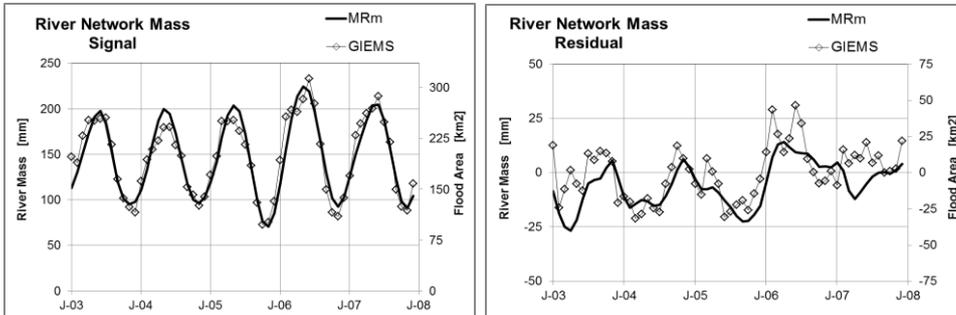


Fig.10: Time series of River network storage and inundated area from GIEMS for the Amazon (a) for the signal (b) for the residual

The calculated river runoff R_R , total mass anomaly dM_T and river network mass M_R fit very well with the measured river runoff, GRACE and the flooded area from GIEMS both with respect to the signal and the de-seasonalized monthly residual.

The Cascaded Storage approach reproduces the phase shift between measured runoff R_o and total mass dM_T (or GRACE respectively). The calculated river network mass M_R of about 50% of the total mass M_T for Amazon is proportional to observed runoff R_o without any phase shift (Fig.11)!

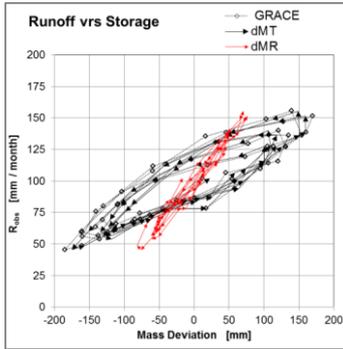


Fig.11: R-S relationships for observed runoff versus the mass anomalies of GRACE, calculated Total mass dM_T and river network mass dM_R

Calculated hydraulic time constants, mean values and signal amplitudes for the absolute storage volumes are provided in Table.2 for the full Amazon basin upstream Obidos. In addition the performance of optimizations either versus river runoff (Column A) or versus GRACE (Column B) and for different recharge products (Column D, E) is displayed. This shows that the optimization versus different references leads to a very similar results while the fitting performance for the two recharge products (Columns A, B and D, E) is quite different. For recharge from water balance, Eq.(34), the resulting time constants and thus the storage masses differ in a range of ~5% for the different references while they vary ~10% for recharge from moisture flux divergence.

In order to illustrate the benefits of the Cascaded versus a Single Storage approach even in the fitting quality, results for a fixed $\tau_R = 10^{-3}$, which correspond to a Single Storage, are shown (Column C, F) for different recharge products. With the Single Storage approach - beside the much worse fitting performance - the resulting time constant $\tau_T = \tau_C + \tau_R$ is overestimated (corresponding to the investigations in section 3) and the modelled signal amplitude is about 20% less than that measured from GRACE. In addition a non negligible phase shift remains between the modelled runoff and measured discharge.

	A	B	C	D	E	F
Approach	Cascaded	Cascaded	Single	Cascaded	Cascaded	Single
Recharge	R+dM/dt	R+dM/dt	R+dM/dt	-divQ	-divQ	-divQ
Optimization	RR	dMT	dMT	RR	dMT	dMT
τ_c [month]	1.53	1.62	3.55	1.68	1.87	3.95
τ_r [month]	1.53	1.62	0.001	1.68	1.87	0.001
Avg M_T [mm]	304.81	321.77	353.29	333.00	370.93	392.02
Avg M_c [mm]	152.17	160.58	353.19	166.23	185.12	391.92
Avg M_R [mm]	152.64	161.18	0.10	166.77	185.81	0.10
Avg R_R [mm month ⁻¹]	99.53	99.59	99.39	99.35	99.49	99.34
Avg N [mm month ⁻¹]	98.80	98.80	98.80	99.07	99.07	99.07
Stdev M_T [mm]	98.46	100.38	84.09	101.73	105.34	87.83
Stdev M_c [mm]	58.49	60.40	84.06	61.22	65.05	87.80
Stdev M_R [mm]	45.48	46.02	0.02	46.70	47.55	0.02
RMSE R_R-R_o [mm month⁻¹]	5.76	6.08	12.13	11.99	12.57	18.08
RMSE M_T- GRACE [mm]	15.28	14.73	28.93	35.45	34.54	42.31
NS_S R_R-R_o	0.96	0.96	0.84	0.85	0.83	0.65
NS_R R_R-R_o	0.74	0.72	0.73	-0.09	-0.08	-0.10
corr_S R_R-R_o	0.98	0.98	0.94	0.92	0.92	0.82
corr_R R_R-R_o	0.86	0.85	0.87	0.48	0.46	0.41
NS_S dM_T- GRACE	0.98	0.98	0.92	0.89	0.89	0.84
NS_R dM_T- GRACE	0.74	0.72	0.71	-0.57	-0.81	-0.71
corr_S dM_T- GRACE	0.99	0.99	0.98	0.94	0.94	0.93
corr_R dM_T- GRACE	0.90	0.90	0.88	0.58	0.56	0.51
corr_S $dGIEMS$- GRACE	0.92	0.92	0.92	0.92	0.92	0.92
corr_S $GIEMS$-M_T	0.93	0.94	0.95	0.82	0.84	0.82
corr_S $GIEMS$-M_R	0.96	0.95	0.95	0.88	0.86	0.82
corr_R $dGIEMS$- GRACE	0.65	0.65	0.65	0.65	0.65	0.65
corr_R $GIEMS$-M_R	0.76	0.75	0.78	0.04	-0.01	0.01

Table.2: The statistical characteristics are listed for calculated river runoff R_R , total mass M_T , catchment mass M_c and river network mass M_R and observed river runoff R_o , GRACE mass anomalies and flood areas from GIEMS using: RMSE: Root-mean-square error of simulated versus measured, NS_S: Nash Sutcliffe coefficient of the signal (simulated values versus long-term mean of measured), NS_R: Nash Sutcliffe coefficient of monthly residuals (simulated values versus monthly mean of measured), corr_S: correlation of simulated versus measured signals, corr_R: correlation of simulated versus measured monthly residuals, Avg and Stdev are the long term mean and standard deviations, prefix “d” used for anomalies related to the long term mean. Results are compared for the different optimization references runoff R_o or GRACE for recharge from water balance R+dM/dt (A, B) and for atmospheric input -divQ (D, E). The Cascaded storage approach is compared to Single storage approach in (C, F).

The Cascaded Storage approach with recharge from the water balance, Eq. (34), leads to high accuracy fits between calculated and measured river runoff and total storage mass for the signals (NSS $R_R-R_o=0.96$, NSS $dM_T-GRACE = 0.98$) and for the residuals (NSR $R_R-R_o = 0.74$, NSR $dM_T-GRACE = 0.74$, the respective calculations are available in the xls-workbook provided in the supplement).

- 5 The comparison of the water budgets for 14 different GHM/LSMs (Getirana et al. (2014)) for the Amazon basin permits to sort in the results of the Cascaded Storage Approach into those of the GHM/LSMs (Getirana et al. (2014), Fig. 14). With a Nash-Sutcliffe coefficient NSR ($R =$ with respect to the mean seasonal cycle) of 0.74 and a correlation $\phi\text{-corr}R = 0.90$ compared to an NSR of 0.58 and a correlation $\phi\text{-corr}R=0.84$ for the best LSM, the Cascaded Storage approach outperforms the GHM/LSMs for full Amazon. Even the fully data driven approach (Eq.39) with an NSR of 0.483, and a correlation
- 10 $\text{corr}R=0.859$ for simulated mass anomaly versus GRACE is comparable to the best performances in the GHM/LSM test by Getirana et al. (2014). The related calculations are accessible in the xls-workbook provided in the supplement.
- This is partly seen as the result of the simplicity of the lumped approach averaging out errors that emanate from the large number of different processes described by the GHMs/LSMs. However, the main reason for the better performance is seen in the quality of recharge data taken from the water balance using GRACE and river runoff, as the use of moisture flux
- 15 divergence for this purpose leads to much worse performance.

Formatted: Not Highlight

The calculated river network mass M_R of the Amazon varies in the range of 40-65% of total mass M_T with an average ~50%, corresponding to the values found by Paiva et al., 2013 and Papa et al., 2013 or ~41% by Getirana et al., 2017a. The correlation versus the observed flood area from GIEMS is higher for the calculated river network mass M_R (0.96 for the signal and 0.76 for the monthly residual) than for GRACE (0.92 and 0.65 respectively). The consistency of the calculated river network mass (and the corresponding observed river runoff $R_R = M_R \tau_R^{-1} = 0.742 M_R$) with the flood areas is seen much more clearly in the phasing (Fig.12), which shows a clear phase shift for GRACE versus GIEMS (see also Papa et al., 2008), yet none for calculated M_R . As already Getirana et al., 2017a emphasized, only an appropriate description of the river network storage permits a correct description of the total storage in amplitude and phasing for a comparison with GRACE.

25

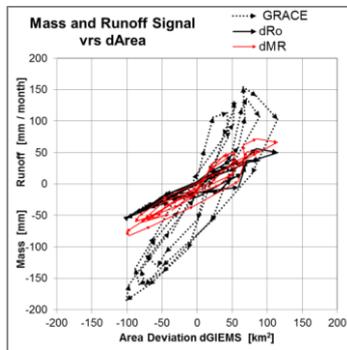


Fig.12: GRACE mass, calculated river network mass dM_R and observed river runoff dR_o versus Flood Area $dGIEMS$; all displayed as anomalies (please consider $dM_R = dR_R \tau_R = 1.53 dR_R$)

5 Conclusions and Discussion

5 The test of the Cascaded storage approach with synthetic recharge data has shown that the parameter optimization either versus mass Δ -anomalies or runoff reproduces the time constants (τ_C , τ_R) for both, the catchment and the river network in a unique way with high accuracy, yet with an ambiguity for $\tau_R < \tau_C$ or $\tau_R > \tau_C$, and thus in the related storage volumes. This problem can only be solved by reasonable assumptions or better by additional information on the volume of river network or flood areas, which can be taken from ground based observations or remote sensing. In principle, river network storage could

10 also be used for the parameter optimization. It could be provided by GIEMS flood areas and water levels from altimetry. This might also help to decide whether the catchment storage is clearly bigger than the river network storage, even if these data are not too accurate. Close to $\tau_R \sim \tau_C$, the generally high accuracy of $\sim 1\%$ RMSE is limited as the separation of the storages depends on the quality of the respective additional information on the volume of the river network. In contrast to this, the description of a system (showing a phase shift) by a Single Storage approach can only address the total Drainable

15 storage and leads to phasing differences between the calculated and measured runoff or storage and to considerable errors in the time constant of the total system.

The application to the full Amazon catchment shows that the system behaviour including the time lag can be described by a simple conceptual model with a catchment and a river network storage in sequence and an adjustment of only two

20 parameters, the time constants. The storage amplitudes for the total Drainable water storage and the time lag to runoff are described with high precision. Calculated river network volume and the observed flood area correspond to GIEMS observations and newest model results incl. river routing (Getirana et al., 2017a) and are in phase with river discharge. This

Formatted: Not Highlight

Formatted: Not Highlight

independent quantification of the river network volume permits an investigation of the relationship between flood areas, flood volumes, river runoff and calculated river network with its additional information and might provide insights into river hydraulics i.e. routing times and the mass- area- and level- relationships of flooded areas.

Formatted: Not Highlight

5 As the optimization performance is comparable for either reference, the observed river runoff or GRACE anomalies, a calculation with given recharge and an optimization versus measured GRACE data can be used to determine both, the river discharge as well as the Drainable storage volumes even for ungauged basins. For these cases the availability of accurate recharge data determines the accuracy of runoff and storage calculations at present. However, for ungauged basins the use of moisture flux divergence still provides quite acceptable results based on remote sensing and atmospheric data exclusively.

Formatted: Not Highlight

10

For the case that river discharge is available for a sufficient period of time, in order to adapt the two time constants (τ_C, τ_R) sufficiently the Cascaded storage approach facilitates a simple “fully data driven” determination of the Drainable water storage volumes $M_T(t)$, $M_C(t)$ and $M_R(t)$ at other times directly from observations of GRACE and river discharge without the necessity of new model runs. This permits to close data gaps or even do forecasts within the period of the time lag.

Formatted: Not Highlight

15

Comparing global hydrological or land surface models with the presented Cascaded storage approach it can be summarized: Distributed hydrological models use a lot of detailed local information in order to address a large number of involved processes for each grid cell. In this way they provide a spatially distributed and a very detailed composition of the involved storages and flows. However, it is very difficult to discriminate the respective processes locally with the consequence that only their superposition can be compared to measurable data like river discharge. This creates a kind of ambiguity between the different contributions, thus losing parts of the benefits of a detailed description. As it has also been pointed out by Getirana et al., 2017a, for a comparison of the superposed storages to GRACE anomalies the river network storage changes have to be quantified as well, as only the total storage changes are measured by GRACE. This means that an appropriate description of the river network storage and the time lag is an inevitable prerequisite for an appropriate adaption of model parameters. A hydrodynamic modelling of the river network facilitates the quantification of its storage to be sure, yet means a real computational challenge.

Formatted: Not Highlight

Formatted: Not Highlight

20

25

30

The Cascaded storage approach permits the quantification of the Drainable storage volumes both for land masses and river network directly from GRACE and river discharge for gauged catchments or from GRACE and recharge for ungauged catchments by adapting only two parameters, the time constants. No detailed information on local vegetation, surface, unsaturated / saturated zone, etc. and related flow processes nor a hydrodynamic modelling with detailed hydraulic information on river roughness, cross section, gradient or backwater effects is needed.

5 At present, the Cascaded storage approach is limited to climatic and physiographic conditions for which the hysteresis is completely explained by a time lag, i.e. that no impacts of uncoupled storage components are visible in the R-S diagram. For a global coverage the Cascaded storage approach has to be extended by an explicit integration of coupled and uncoupled storage compartments to account for other regional climatic and physiographic conditions. The uncoupled storage components then have to be quantified either by their absolute storage volume or by their relative contribution to total storage.

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

10 As Riegger and Tourian, 2014, have shown for boreal catchments, this can be done by means of remote sensing and a conceptual description. Boreal catchments are temporarily dominated by snow leading to a huge hysteresis due to a superposition of masses from fully coupled (liquid) and uncoupled (solid) storage compartments. Remote sensing of the catchments snow coverage by MODIS facilitates the separation of the coupled liquid storage (proportional to river runoff) on the uncovered areas and the uncoupled frozen part on the snow covered areas. The coupled liquid storage determined in this way actually constitutes a LTI system, i.e. the hysteresis can be fully explained by a phase shift. This fulfils the prerequisites for the Cascaded storage approach and thus permits an application to boreal catchments as well. In consequence, the principle of the Cascaded storage approach is not limited to fully humid climatic conditions. It permits an application to other climatic regions as well, provided that the coupled and uncoupled storage compartments can be separated.

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Not Highlight

15 The description of monsoonal regions for example, which play an important role in the global water budget, is a considerable challenge. For these regions with seasonally dry periods high precipitation events during the wet season lead to distinct runoff in parallel from overland and groundwater with different time constants τ_S and τ_{GW} and to time dependent uncoupled storage compartments like soil or isolated open water bodies, which do not contribute to discharge. All these storages have to be addressed for an adequate description of the drainable storage volumes. The uncoupled storage compartments have to be quantified by remote sensing (soil moisture and open water body altimetry from satellites) and subtracted from the total catchment mass measured by GRACE, which of course is a major task.

Formatted: Not Highlight

Formatted: Not Highlight

20 As the spatial resolution of GRACE and the accuracy of moisture flux divergence is limiting the applicability of the Cascaded storage approach to global scale catchments at the moment, any improvement in the spatial / temporal resolution and accuracy of GRACE and hydrometeorological data products will tremendously increase the number of catchments which can be described by this approach in future.

Formatted: Not Highlight

30

7 Summary and Outlook

The lumped description of the water storages in catchment systems by a cascade of catchment storages and a river network storage facilitates the quantification of their individual Drainable storage volumes and their phasing directly from large scale observations of GRACE, remote sensing and river discharge. No detailed information on vegetation, soil etc., complex flow processes nor hydrodynamic modelling with detailed hydraulic information on river roughness, cross section, gradient or backwater effects is needed. An optimization versus GRACE measurements permits a determination of river runoff and Drainable storage volumes from recharge and GRACE exclusively, and thus provides reasonable results for ungauged catchments. The piecewise analytical solutions for time periods of constant recharge provide accurate calculations even for the much shorter time constants of the river network without numerical limitations.

The fact, that river network and flood volumes can be quantified by this approach independently, permits an investigation of the relationship between flood areas, flood volumes, river runoff and calculated river network with additional information and might provide insights into river hydraulics i.e. routing times and the mass-area and level-relationships of flooded areas.

The individual adjustment of the hydraulic time constants for the catchment and the river network (τ_C, τ_R) on a training period facilitates a determination of Drainable storage volumes M_C, M_R and M_T at other times directly from measurements of river discharge and GRACE without the necessity of further model runs. River runoff can also be determined directly from GRACE and vice versa by an adaption of the time lag. This permits to close data gaps in river discharge or GRACE time series and even provides the possibility for operational forecasts within the period of the time lag.

For a global coverage the Cascaded storage approach has to be extended for an implementation of the uncoupled storage components according to the regional climatic and physiographic conditions. For boreal catchment MODIS snow coverage can be used for a quantification of coupled and uncoupled storage components.

The description of monsoonal regions, which play an important role in the global water budget, remains a major challenge.

For these regions with seasonally dry periods high precipitation events during the wet season lead to distinct runoff in parallel from overland and groundwater with different time constants τ_S and τ_{GW} and to time dependent uncoupled storage compartments like soil or isolated open water bodies, which do not contribute to discharge. All these storages have to be addressed for an adequate description of the Drainable Storage Volumes. The uncoupled storage compartments have to be quantified by remote sensing (soil moisture and open water body altimetry from satellites) and subtracted from the total catchment mass measured by GRACE

As the spatial resolution of GRACE and the accuracy of moisture flux divergence is limiting the Cascaded storage approach to global scale catchments at the moment, any improvement in the spatial / temporal resolution and accuracy of GRACE and

hydrometeorological data products will tremendously increase the number of catchments which can be described by this approach in future.

Data availability

In the supplement calculations and data are provided in an EXCEL workbook for the synthetic case and for the Amazon
5 catchment.

Acknowledgements

The author would like to thank Nico Sneeuw and Mohammad Tourian from the Institute of Geodesy, Stuttgart, for the
handling of GRACE data , Harald Kunstmann and Christof Lorenz from the Institute of Meteorology and Climate Research,
Garmisch, for the provision of moisture flux data and Catherine Prigent, Observatoire de Paris, for the provision of Flood
10 areas from the GIEMS project.

References

- Alley, W. M.: Tracking U.S. groundwater reserves for the future?, *Environment*, 48(3), 10–25, 2006.
- Bredehoeft, J.: Safe yield and the water budget myth, *Ground Water*, 35(6), 929–929, doi:10.1111/j.1745-
15 6584.1997.tb00162.x, 1997
- Cao, G., Zheng, C., Scanlon, B. R., Liu, J., and Li W.: Use of flow modeling to assess sustainability of groundwater
resources in the North China Plain, *Water Resour. Res.*, 49, doi:10.1029/2012WR011899, 2013
- [Chen, J. L.; Wilson, C. R.; Famiglietti, J. S. et al.: Attenuation effect on seasonal basin-scale water storage changes from
GRACE time-variable gravity. *Journal of Geodesy* \(4\) 237-245, 2007](#)
- 20 [Güntner, A., Stuck, J., Werth, S., Döll, P., Verzano, K., and Merz, B.: A global analysis of temporal and spatial variations in
continental water storage. *Water Resour. Res.* 43, W05416, doi:10.1029/2006WR005247, 2007](#)
- Famiglietti, J. S.: The global groundwater crisis, *Nat. Clim. Change*, 4(11), 945–948, doi:10.1038/nclimate2425, 2014
- Frappart, F., Papa, F., da Silva, J.S., Ramillien, G., Prigent, C., Seyler, F., Calmant, S.: Surface freshwater storage and
dynamics in the Amazon basin during the 2005 exceptional drought, *Environ. Res. Lett.* 7, doi: 10.1088/1748-
25 9326/7/044010, 2012
- Getirana, A. et al.: Water Balance in the Amazon Basin from a Land surface Model Ensemble, *Journal of Hydrometeorology*,
2586-2614,doi:10.1175/JHM-D-14-0068.1, 2014

- Getirana, A., Kumar, S., Giroto, M., & Rodell, M.: River and Floodplains as Key Components of Global Terrestrial Water Storage Variability, *Geophysical Research Letters*, 44-50, doi: 10.1002/2017GL074684, 2017a
- Getirana, A., Peters-Lidard, Ch., Rodell, M., Bates, P. D., Tradoff between cost and accuracy in large-scale surface water dynamic modeling, *Water Resour. Res.*, 53, doi:10.1002/2017WR020519, 2017b
- 5 Korzun, V. I.: *World Water Balance and Water Resources of the Earth* [in Russian], 638 pp., Hydrometeoizdat, Leningrad, 1974
- Luo, X., Li, H.-Y., Leung, L. R., Tesfa, T. K., Getirana, A., Papa, F., and Hess, L. L.: Modeling surface water dynamics in the Amazon Basin using MOSART-Inundation v1.0: impacts of geomorphological parameters and river flow representation, *Geosci. Model Dev.*, 10, 1233-1259, https://doi.org/10.5194/gmd-10-1233-2017, 2017
- 10 Nace, R. L.: World water inventory and control, in *Water, Earth, and Man*, edited by R. J. Chorley, pp. 31–42, Methuen, London, U. K., 1969
- Nash, J.E.: The form of the instantaneous unit hydrograph, *Proc. I.A.S.H. Assem. Gen.*, Toronto, Ont., 3: 114-131, 1957
- Paiva, R.C., Buarque, D.C., Collischonn, W., Bonnet, M. P., Frappart, F., Calmant, S., Mendes, C.A.B.: Large scale hydrologic and hydrodynamic modelling of the Amazon river Basin, *Water Resour. Res.*, 49, doi: 10.1002/wrcr.20067, 2013
- 15 Papa, F., Güntner, A., Frappart, F., Prigent, C., Rossow, W.B.: Variations of surface water extent and water storage in large river basins: A comparison of different global sources, *Geophysical Research Letters*, 35, doi: 10.1029/2008GL033857, 2008
- Papa, F., Frappart, F., Güntner, A., Prigent, Aires, F., Getirana, A.C.V., Maurer, R.: Surface freshwater storage and variability in the Amazon basin from multi-satellite observation, 1993-2007, *J. Geophys. Res.: Atmos.*, 118, 11,951-11,965, 20 doi: 10.1002/2013JD020500, 2013
- Prigent, C., E. Matthews F. Papa, F. Aires, Rossow, W. B.: Remote Sensing of global wetland Dynamics with multiple satellite data sets, *Geo. Res. Lett.*, 28, 4631-4634, 2001
- Prigent, C., F. Papa, F. Aires, F., Rossow, W. B. , and Matthews E.: Global inundation dynamics inferred from multiple satellite observations, 1993 – 2000, *J. Geophys. Res.*, 112, D12107, doi:10.1029/ 2006JD007847, 2007
- 25 Richey, A. S., Thomas, B. F., Lo, M.-H., Famiglietti, J. S., Swenson, S., and Rodell M.: Uncertainty in global groundwater storage estimates in a Total Groundwater Stress framework, *Water Resour. Res.*, 51, 5198–5216, doi:10.1002/2015WR017351, 2015a
- Richey, A. S., Thomas, B. F., Lo, M.-H., Reager, J. T., Famiglietti, J. S., Voss, K., Swenson, S., and Rodell M.: Quantifying renewable groundwater stress with GRACE, *Water Resour. Res.*, 51, 5217–5238, doi:10.1002/ 2015WR017349, 2015b
- 30 Riegger, J., Tourian, M., Devaraju, B., Sneeuw, N., Analysis of grace uncertainties by hydrological and hydro-meteorological observations, *Journal Geodyn.*, 5960, 16-27, doi:10.1016/j.jog.2012.02.001, 2012
- Riegger, J., and Tourian, M. J.: Characterization of runoff-storage relationships by satellite gravimetry and remote sensing. *Water Resour. Res.*, 50, doi:10.1002/2013WR013847, 2014

- Schlesinger, M.E.: Human-induced climate change : an interdisciplinary assessment, xviii, Cambridge University Press, 2007
- [Schmidt, R., Petrovic, S., Güntner, A., Barthelmes, F., Wunsch, J., and Kusche, J.: Periodic components of water storage changes from GRACE and global hydrology models. *J. Geophys. Res.*, 113, B08419, oi:10.1029/2007JB005363, 2008](#)
- 5 Tapley, B. D., Bettadpur, S., Ries, J. C., Thompson, P. F., and Watkins M. M.: GRACE measurements of mass variability in the Earth system, *Sciences N. Y.*, 305(5683), 503–505, doi:10.1126/science.1099192, 2004
- Tourian, M. J., Reager, J. T. and Sneeuw, N.: The Total Drainable Water Storage of the Amazon River Basin: A First Estimate Using GRACE, *Water Resources Research*, 54(5), 3290–3312, doi:10.1029/2017WR021674, 2018.
- Williamson, A. K., Prudic, D. E., and Swain L. A.: Ground-water flow in the Central Valley, California, U.S. Geol. Surv. Prof. Pap. 1401-D, 225 pp, 1989
- 10 Shiklomanov, I. A.: World freshwater resources, in *Water in Crisis: A Guide to the World's Fresh Water Resources*, edited by P. H. Gleick, pp. 13–24, Oxford Univ. Press, N. Y., 1993
- Siqueira, V. A., Paiva, R. C. D., Fleischmann, A. S., Fan, F. M., Ruhoff, A. L., Pontes, P. R. M., Paris, A., Calmant, S., and Collischonn, W.: Toward continental hydrologic–hydrodynamic modeling in South America, *Hydrol. Earth Syst. Sci. Discuss.*, <https://doi.org/10.5194/hess-2018-225>, in review, 2018
- 15 Sophocleous, M.: Managing water resources systems: Why “safe yield” is not sustainable, *Ground Water*, 35(4), 561–561, doi:10.1111/j.1745-6584.1997.tb00116.x, 1997
- Tallaksen, L.M.: A review of baseflow recession analysis, *Journal of Hydrology*, No. 165, S. 349-370, 1995
- [Werth, S., Güntner, A., Schmidt, R., and Kusche, J.: Evaluation of GRACE filter tools from a hydrological perspective. *Geophys. J. Int.*, 179, 1499–1515, doi: 10.1111/j.1365-46X.2009.04355.x, 2009](#)
- 20 [Werth, S., Güntner, A.: Calibration analysis for water storage variability of the global hydrological model WGHM. *Hydrol. Earth Syst. Sci.*, 14, 59–78, \[www.hydrol-earth-syst-sci.net/14/59/2010/\]\(http://www.hydrol-earth-syst-sci.net/14/59/2010/\), 2010](#)

Formatted: English (United Kingdom)